



26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 26-tone RU

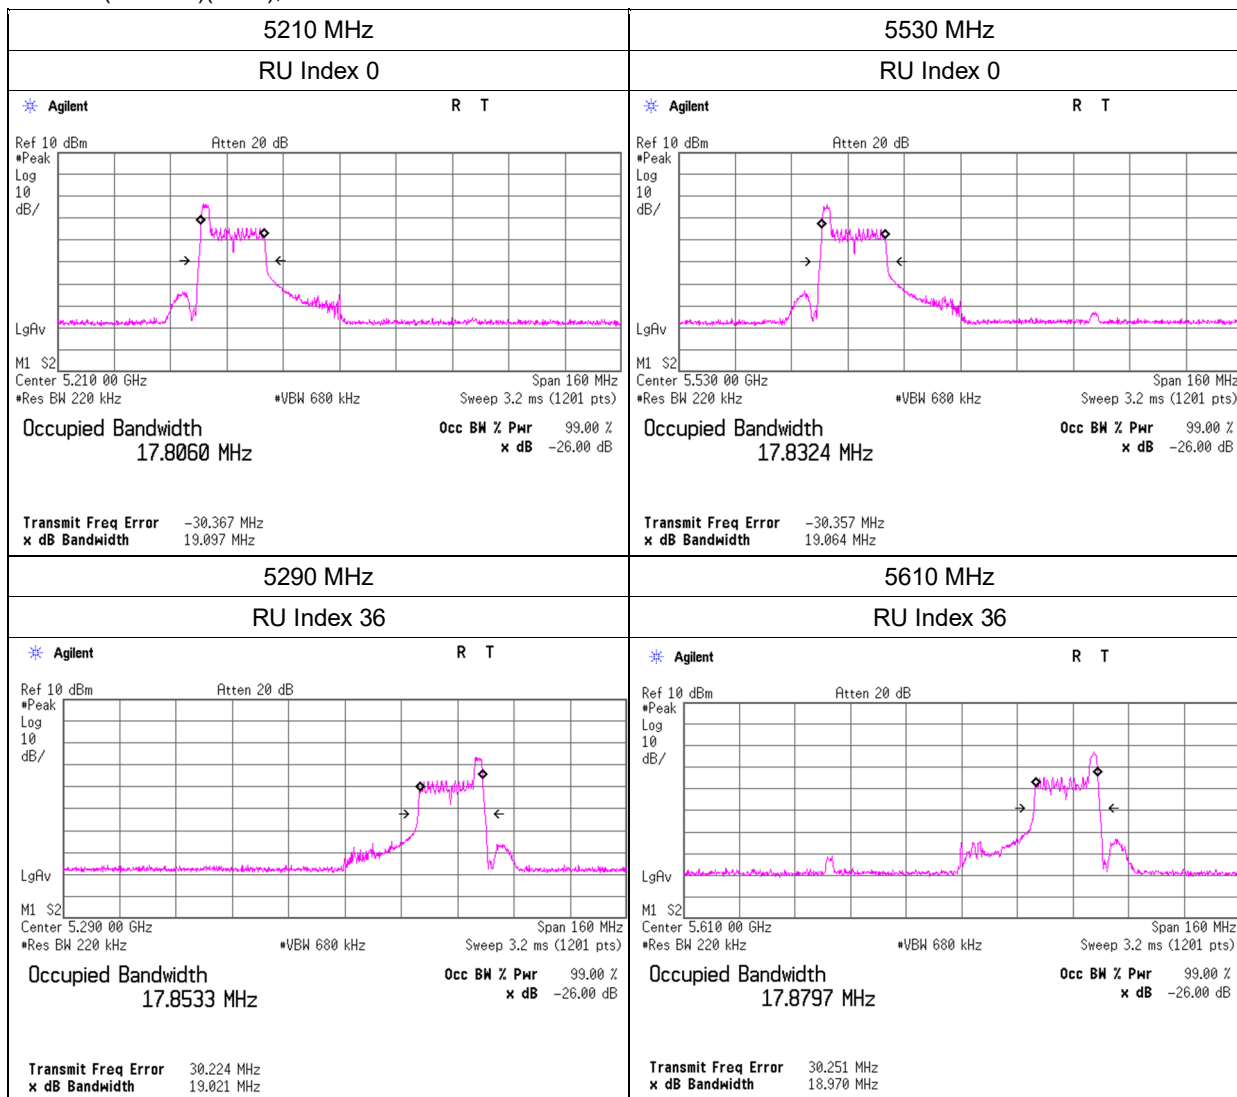


26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 26-tone RU

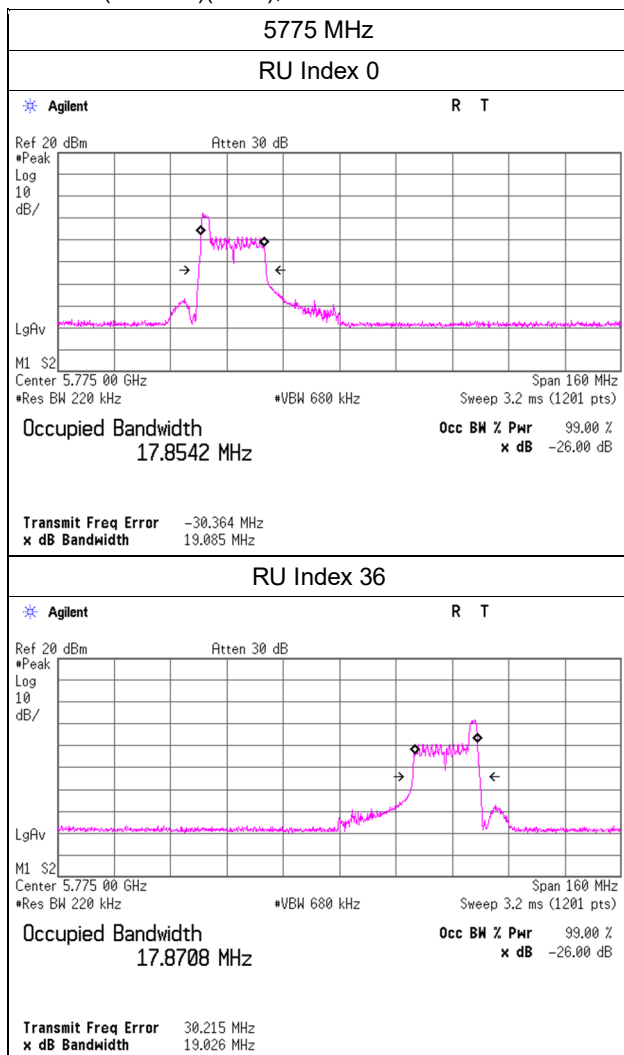


26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 52-tone RU

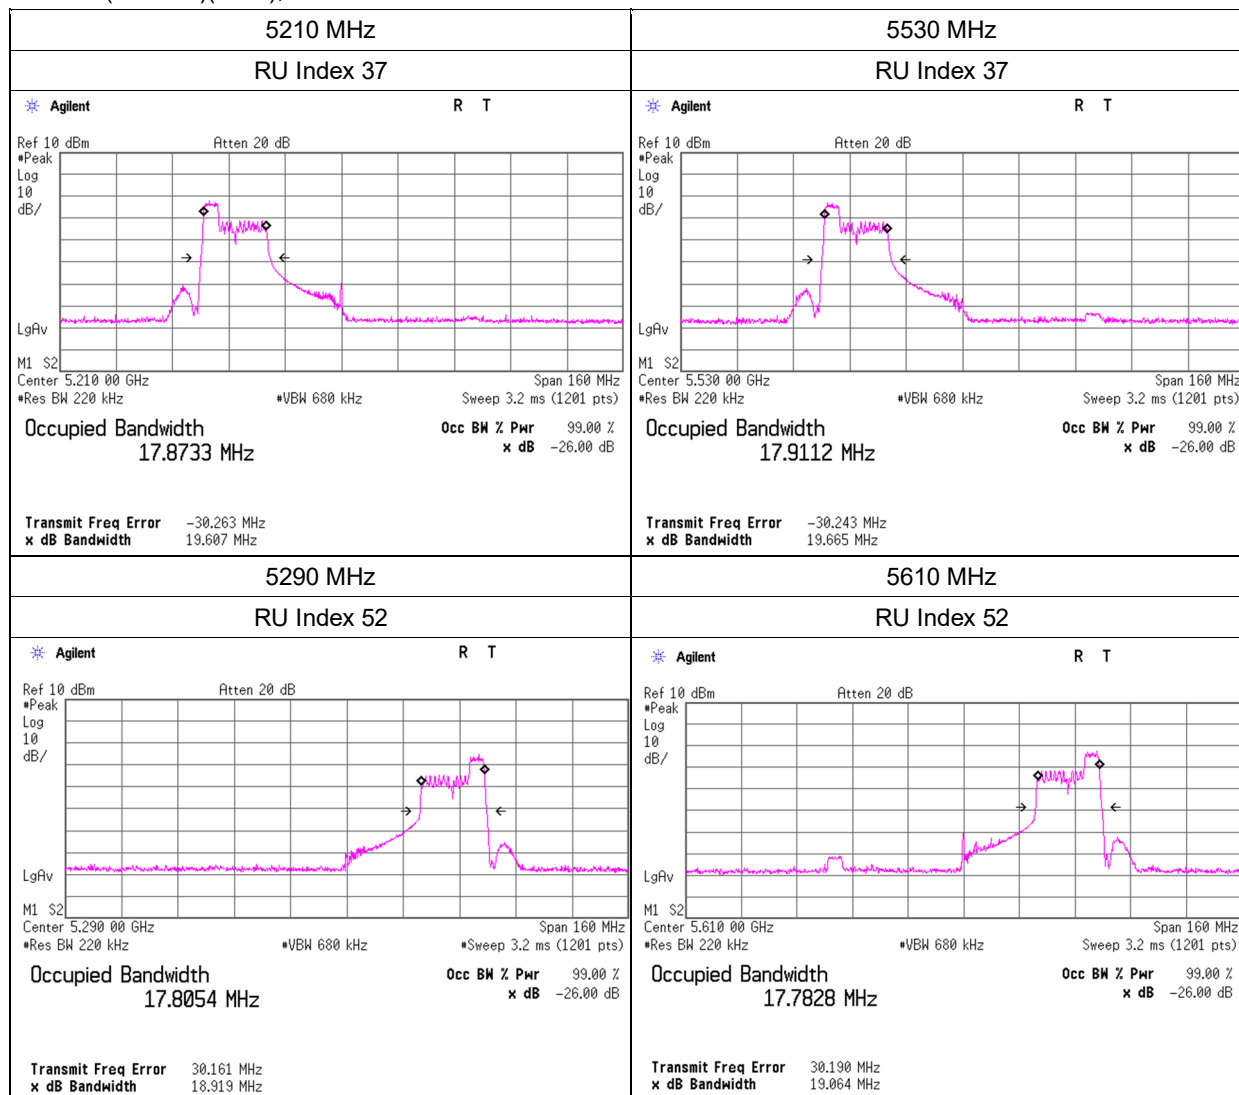


26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 52-tone RU

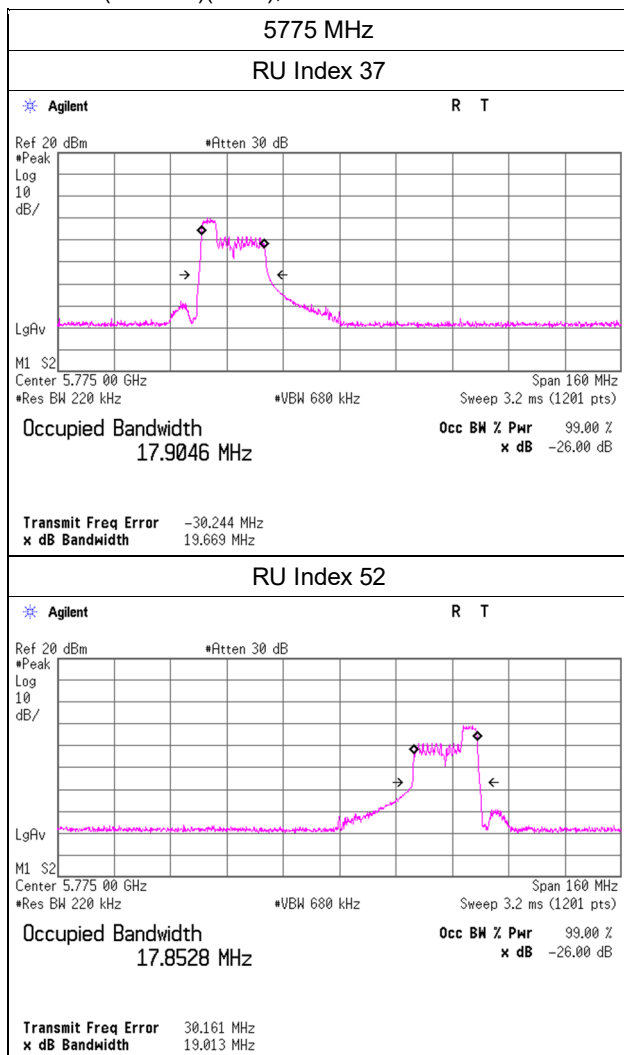


26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 106-tone RU

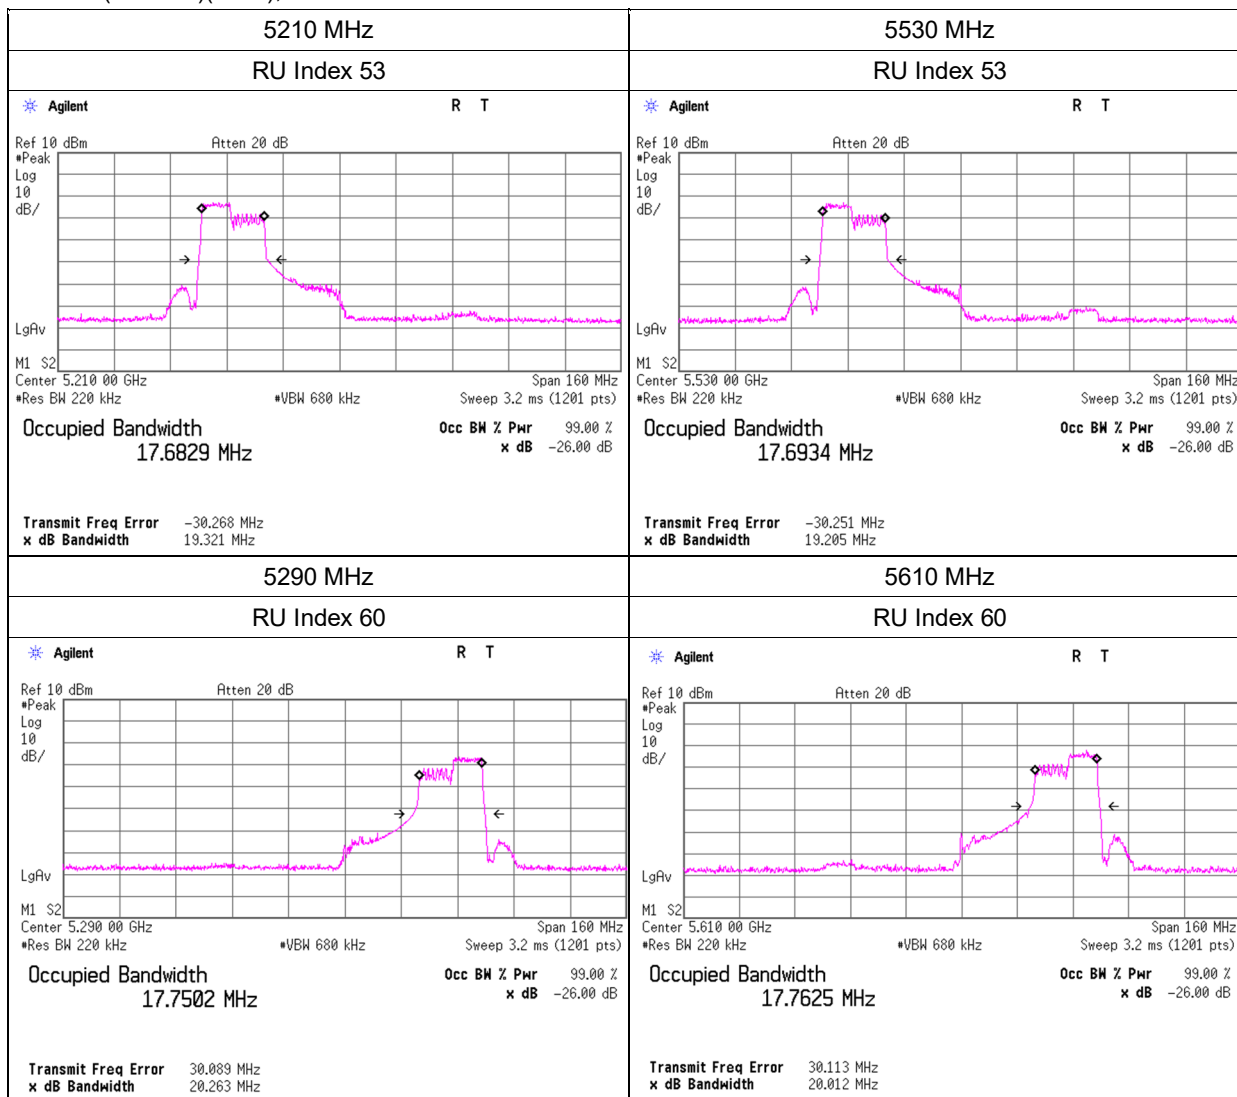


26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 106-tone RU

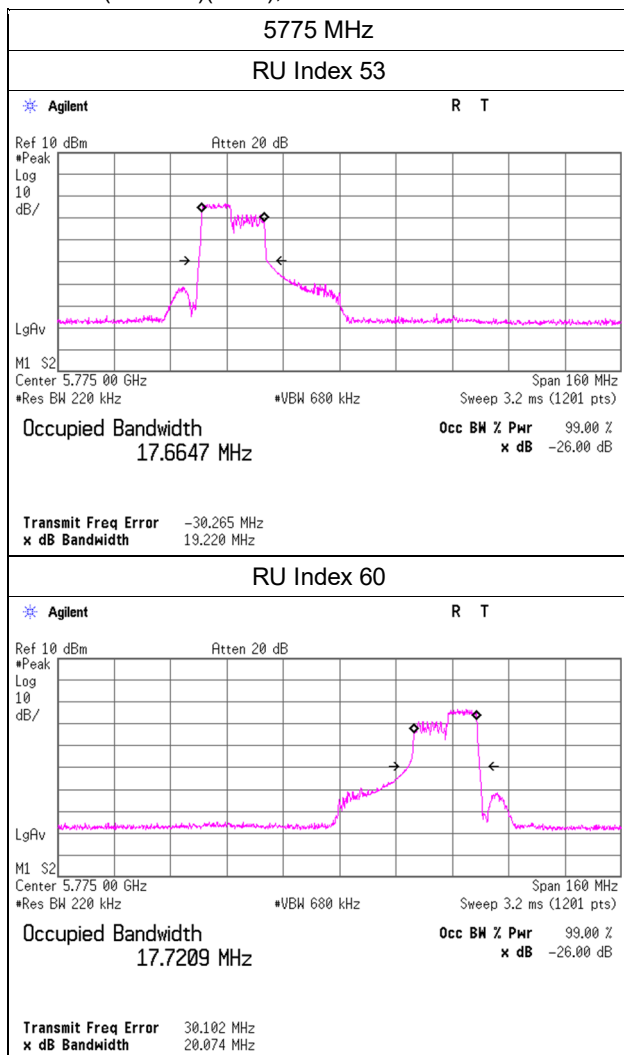


26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 242-tone RU

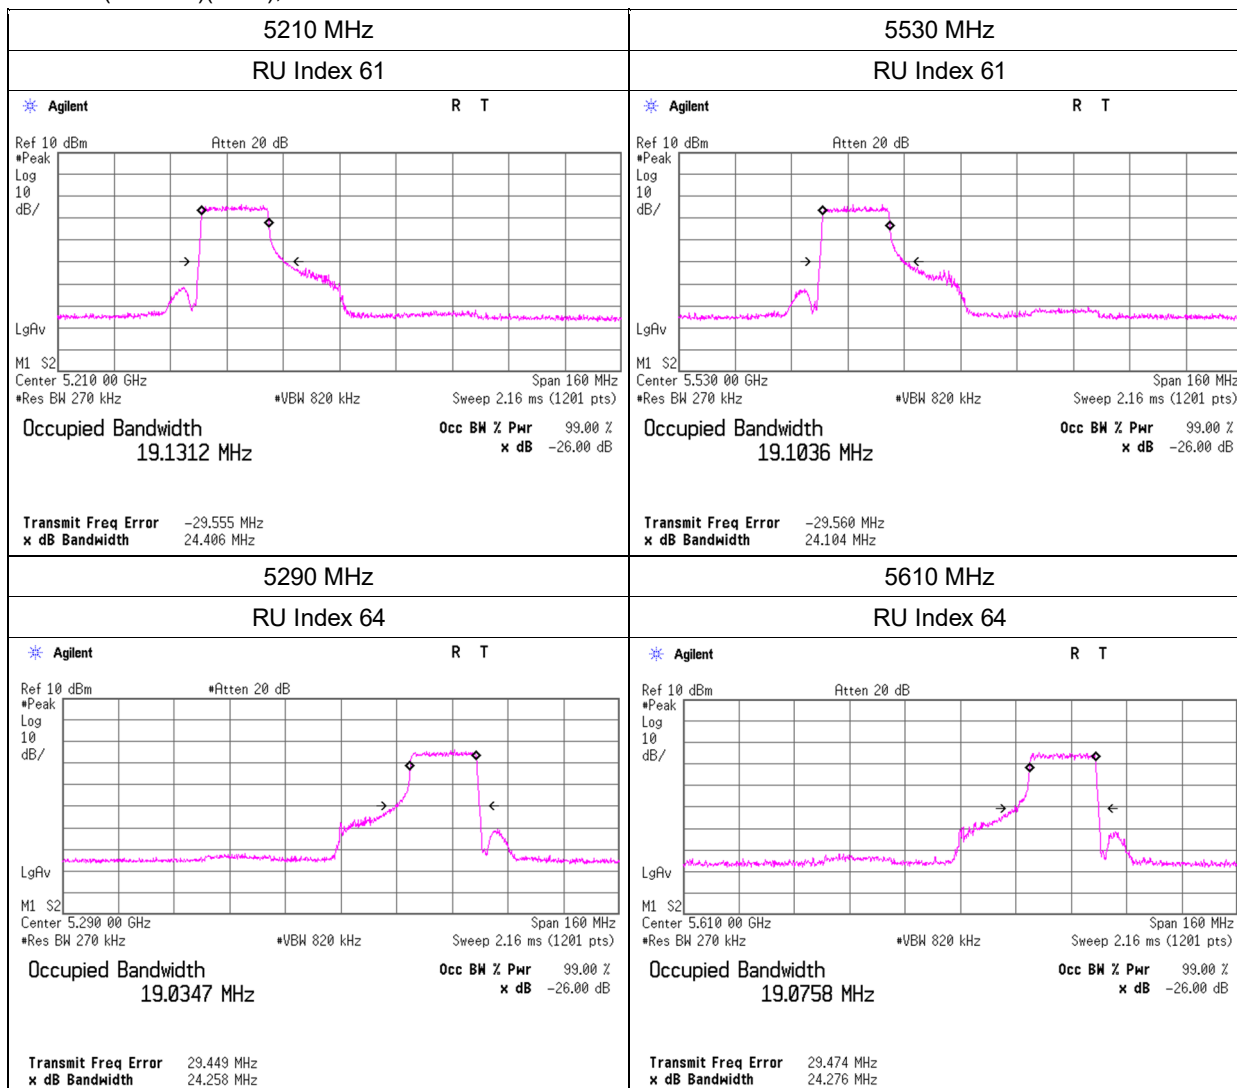


26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 242-tone RU

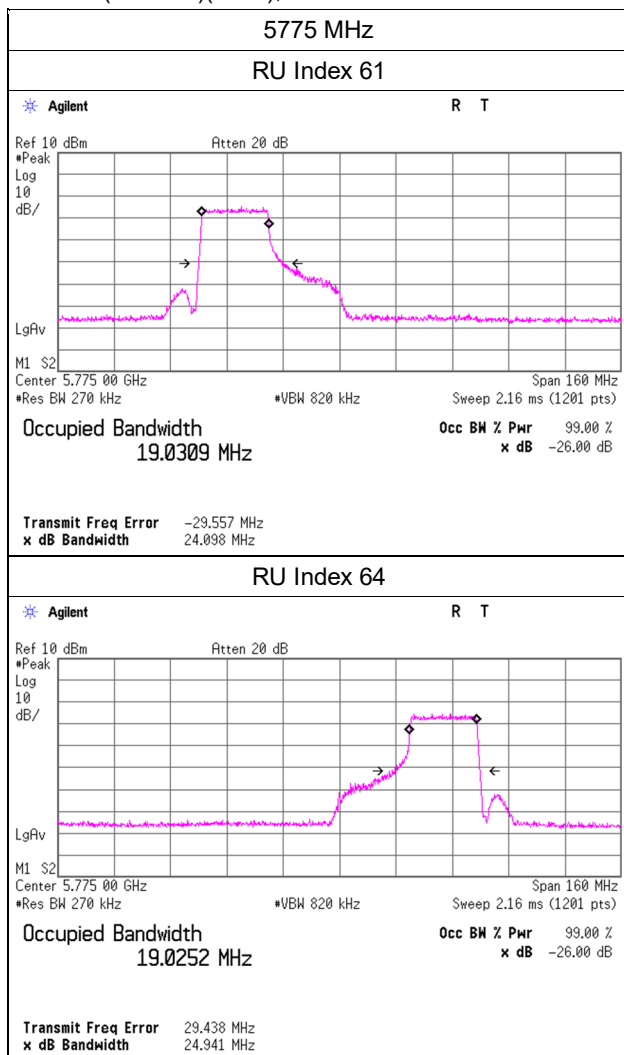


26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 484-tone RU

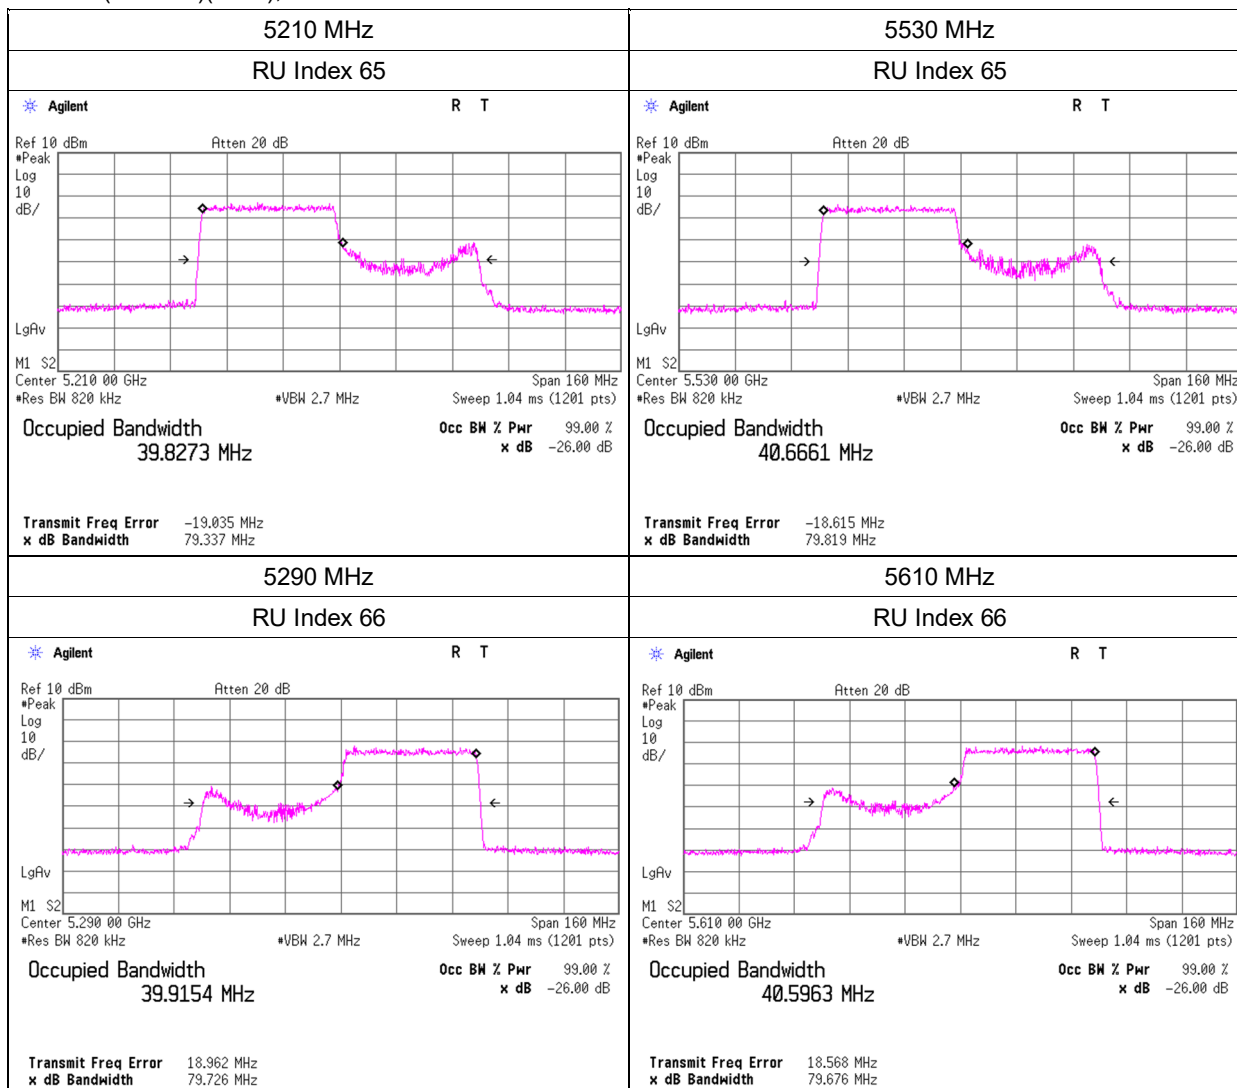


26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 484-tone RU

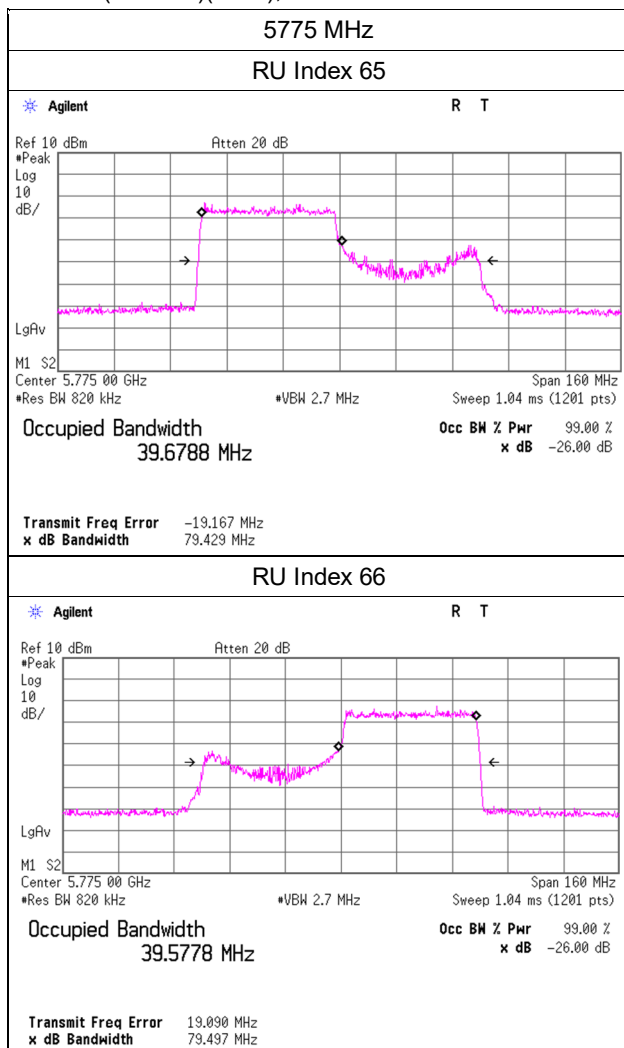

26 dB Emission Bandwidth and 99 % Occupied Bandwidth

11ax-80(OFDMA)(SDM), 996-tone RU

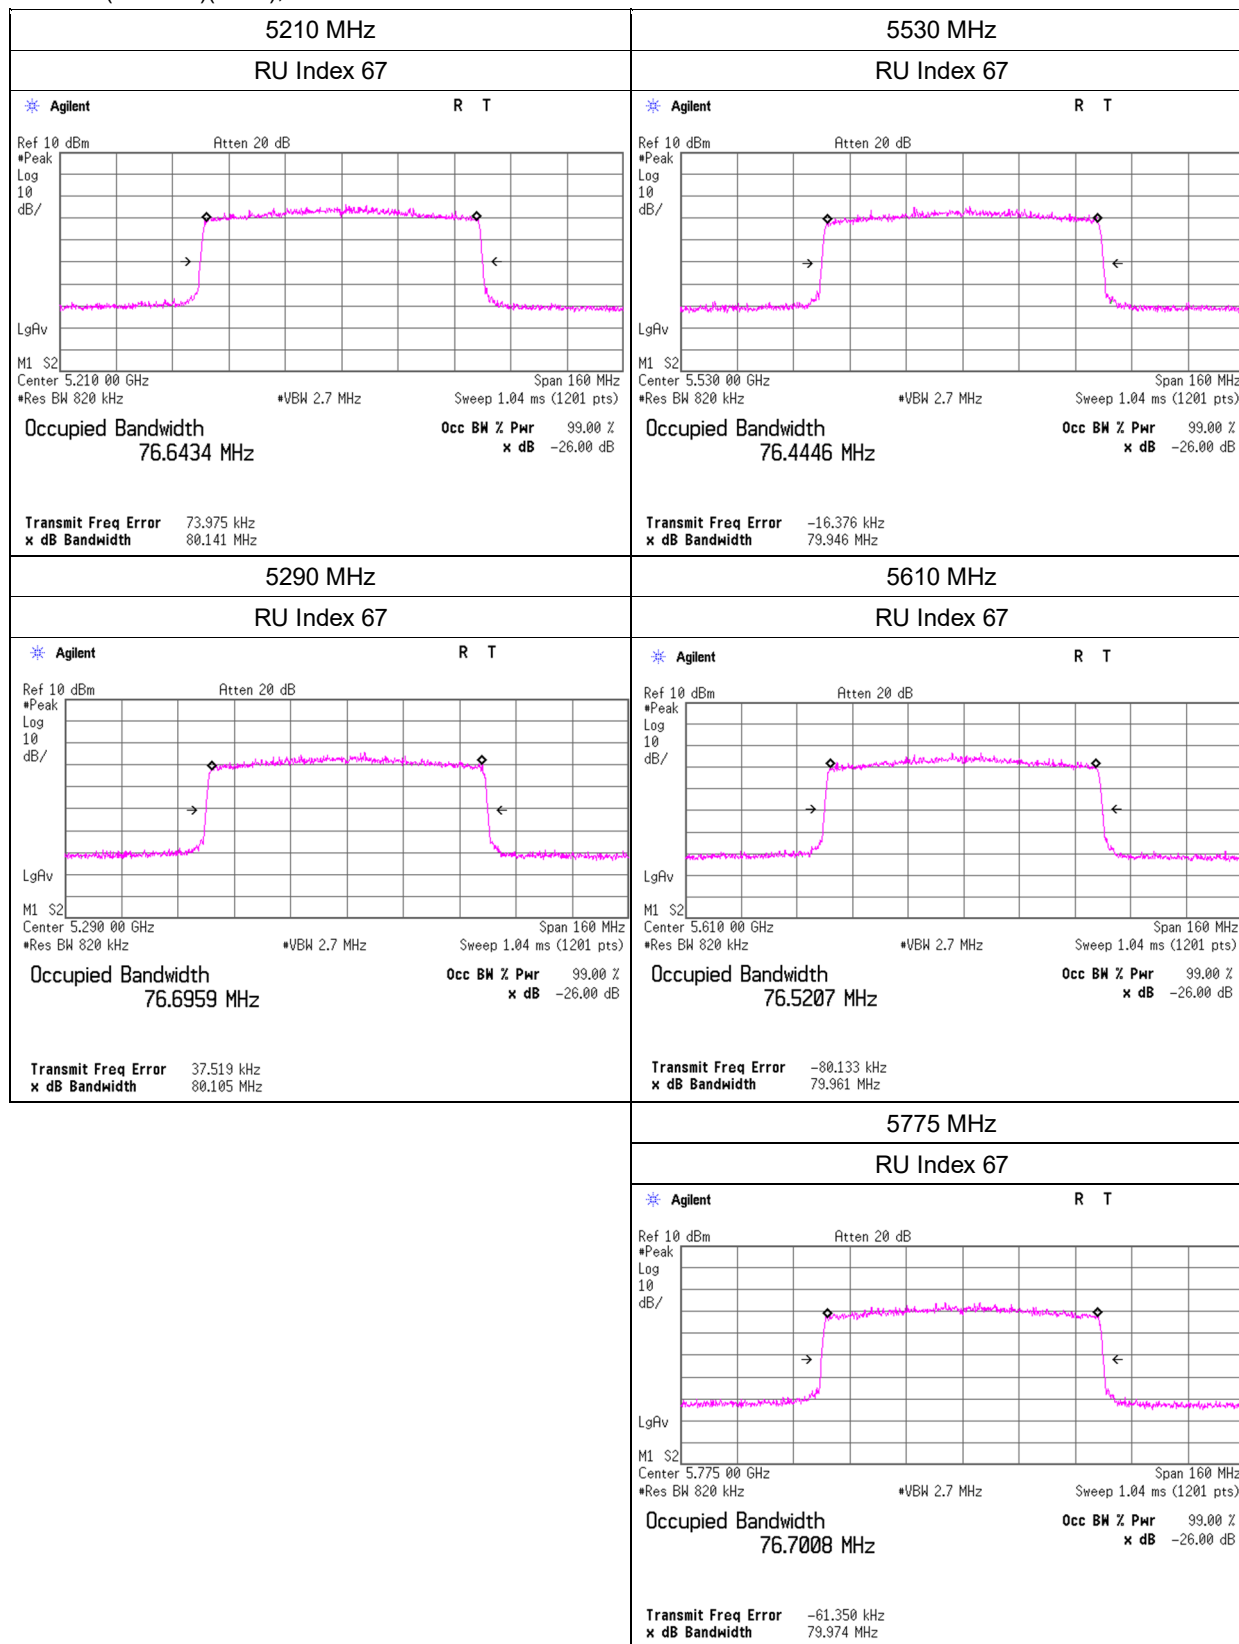

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 24, 2025	MR1	25 deg.C	47 %RH	Miku Ikudome

11a

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5745	15.786	> 0.500
5785	15.822	> 0.500
5825	16.322	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 24, 2025	MR1	25 deg.C	47 %RH	Miku Ikudome

11ac-20(SDM)

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5745	16.454	> 0.500
5785	16.412	> 0.500
5825	16.552	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 24, 2025	MR1	25 deg.C	47 %RH	Miku Ikudome

11ax-20(OFDM)(SDM)

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5745	18.832	> 0.500
5785	18.811	> 0.500
5825	18.578	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 28, 2025	MR1	27 deg.C	46 %RH	Hiromasa Sato

11ax-20(OFDMA)(SDM), 26-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5745	0	2.088	> 0.500
5785	4	2.626	> 0.500
5825	8	2.095	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 28, 2025	MR1	27 deg.C	46 %RH	Hiromasa Sato

11ax-20(OFDMA)(SDM), 52-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5745	37	4.538	> 0.500
5785	38	4.075	> 0.500
5825	40	4.128	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 28, 2025	MR1	27 deg.C	46 %RH	Hiromasa Sato

11ax-20(OFDMA)(SDM), 106-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5745	53	8.422	> 0.500
5785	53	8.414	> 0.500
5825	54	8.388	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 28, 2025	MR1	27 deg.C	46 %RH	Hiromasa Sato

11ax-20(OFDMA)(SDM), 242-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5745	61	19.018	> 0.500
5785	61	19.002	> 0.500
5825	61	19.030	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 25, 2025	MR1	24 deg.C	43 %RH	Miku Ikudome

11ac-40(SDM)

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5755	35.106	> 0.500
5795	35.107	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 25, 2025	MR1	24 deg.C	43 %RH	Miku Ikudome

11ax-40(OFDM)(SDM)

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5755	35.165	> 0.500
5795	35.163	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-40(OFDMA)(SDM), 26-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5755	0	2.072	> 0.500
5795	17	2.055	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-40(OFDMA)(SDM), 52-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5755	37	4.097	> 0.500
5795	44	4.092	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-40(OFDMA)(SDM), 106-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5755	53	8.317	> 0.500
5795	56	8.323	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-40(OFDMA)(SDM), 242-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5755	61	18.829	> 0.500
5795	62	18.834	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-40(OFDMA)(SDM), 484-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5755	65	35.174	> 0.500
5795	65	35.186	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 25, 2025	MR1	24 deg.C	43 %RH	Miku Ikudome

11ac-80(SDM)

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5775	75.223	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 25, 2025	MR1	24 deg.C	43 %RH	Miku Ikudome

11ax-80(OFDM)(SDM)

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
5775	75.365	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-80(OFDMA)(SDM), 26-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5775	0	2.086	> 0.500
	36	2.089	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-80(OFDMA)(SDM), 52-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5775	37	4.114	> 0.500
	52	4.095	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-80(OFDMA)(SDM), 106-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5775	53	8.751	> 0.500
	60	8.402	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-80(OFDMA)(SDM), 242-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5775	61	18.701	> 0.500
	64	18.763	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--

Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-80(OFDMA)(SDM), 484-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5775	65	37.753	> 0.500
	66	37.720	> 0.500

6 dB Bandwidth

Mode	Tx			
------	----	--	--	--


Date	Test Site	Temperature	Humidity	Engineer
July 29, 2025	MR1	27 deg.C	47 %RH	Hiromasa Sato

11ax-80(OFDMA)(SDM), 996-tone RU

Tested Frequency [MHz]	RU Index	6 dB Bandwidth [MHz]	Limit [MHz]
5775	67	75.385	> 0.500


6 dB Bandwidth

11a

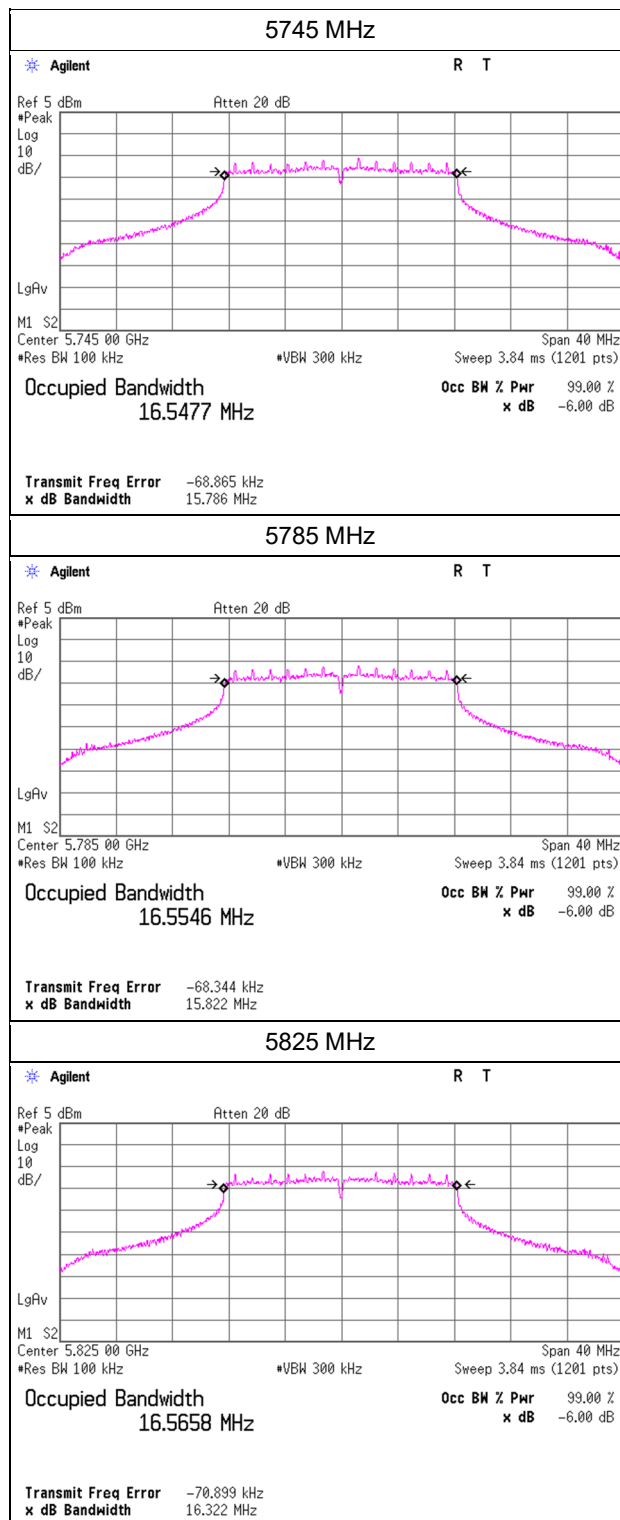


6 dB Bandwidth

11ac-20(SDM)

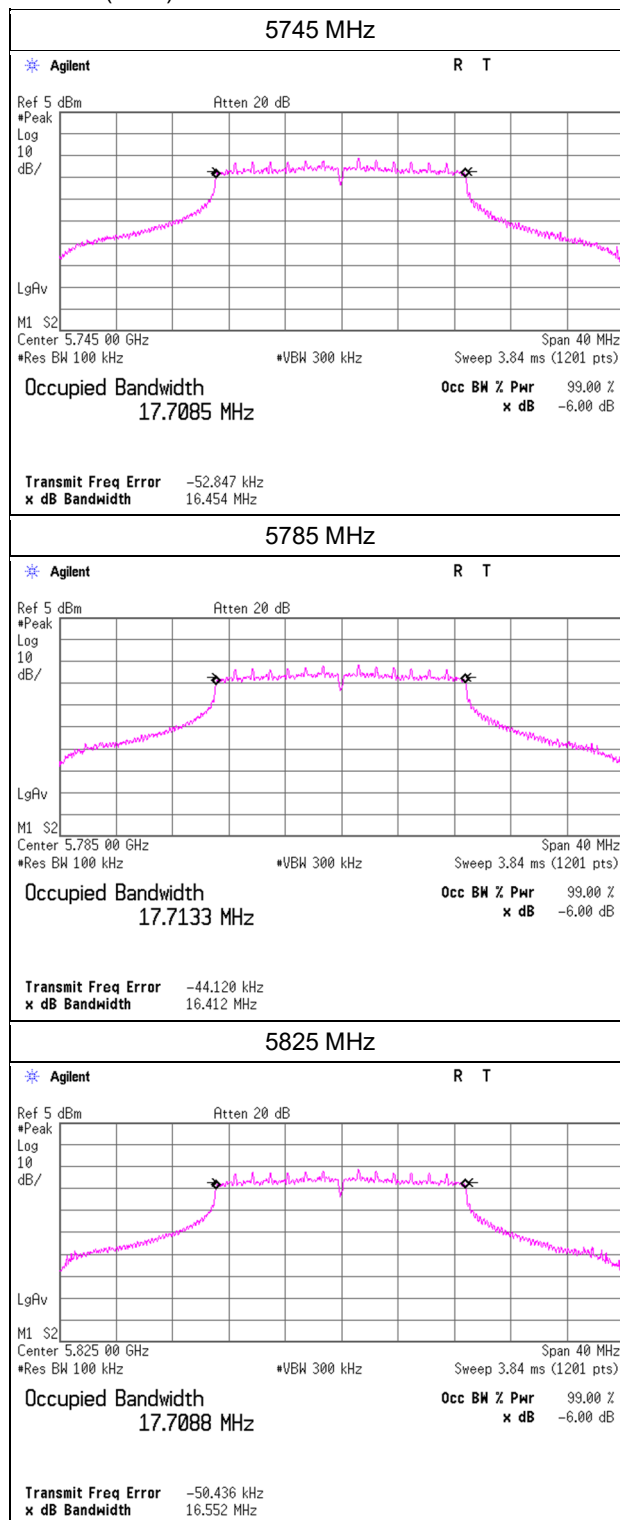


6 dB Bandwidth

11ax-20(OFDM)(SDM)

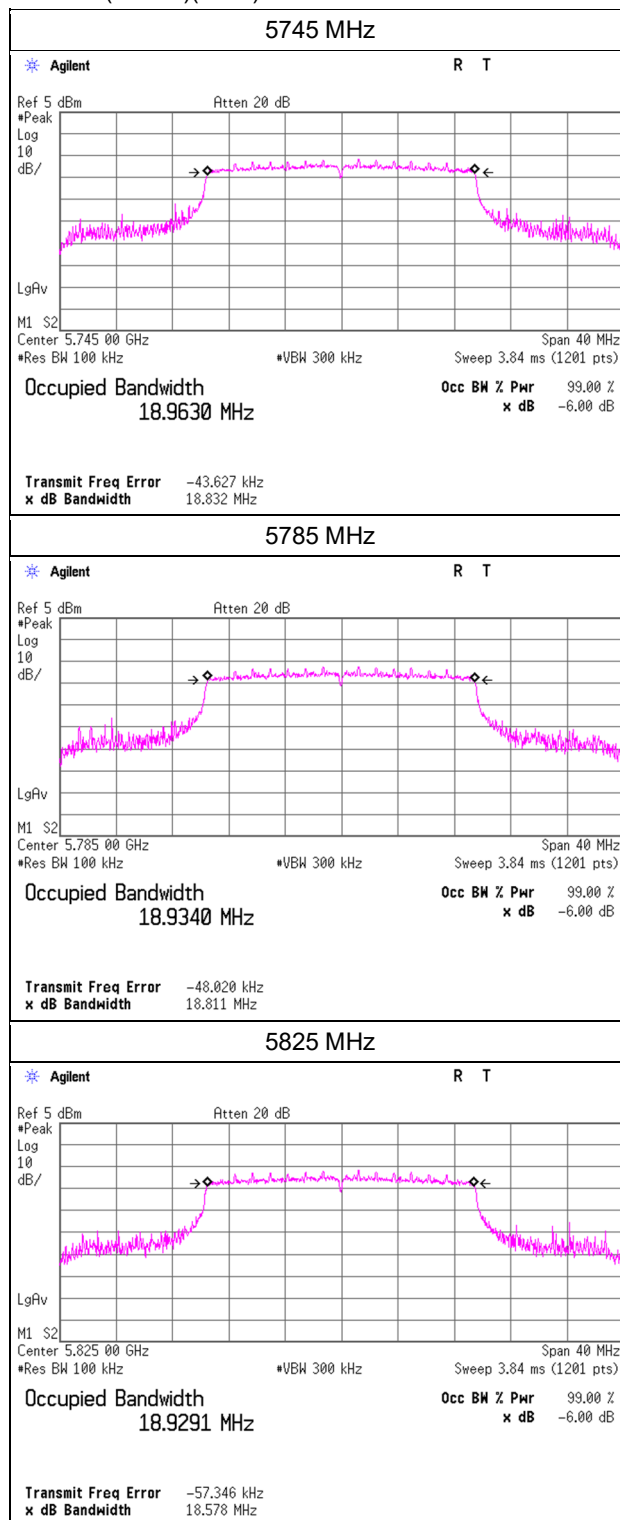


6 dB Bandwidth

11ax-20(OFDMA)(SDM), 26-tone RU

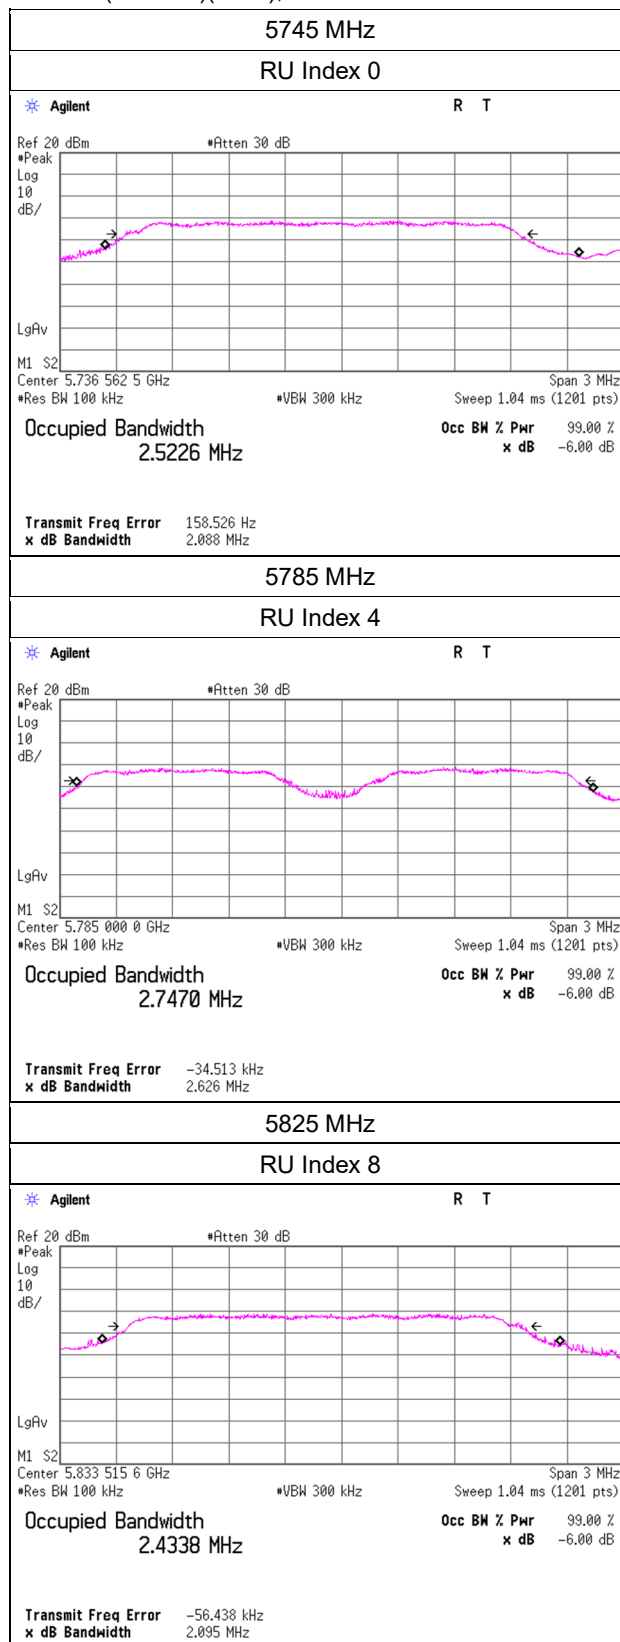


6 dB Bandwidth

11ax-20(OFDMA)(SDM), 52-tone RU

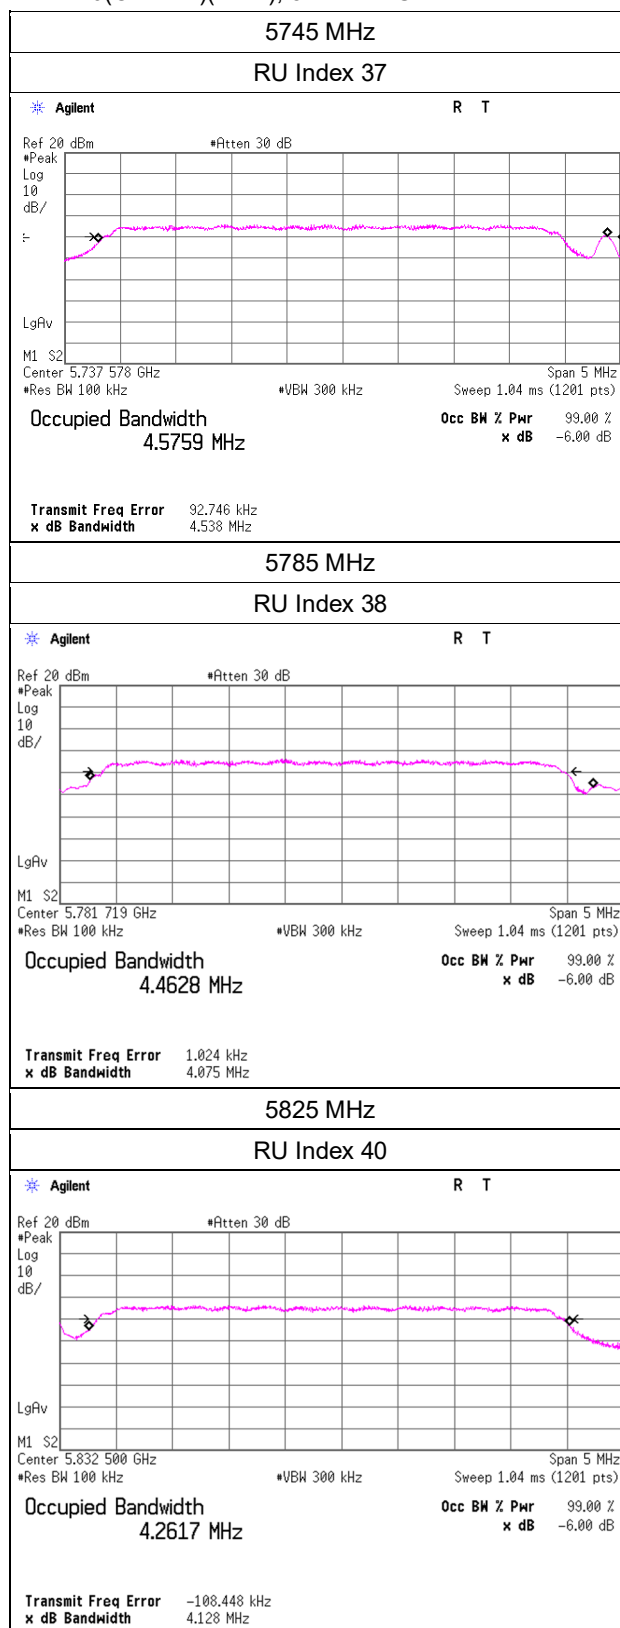

6 dB Bandwidth

11ax-20(OFDMA)(SDM), 106-tone RU

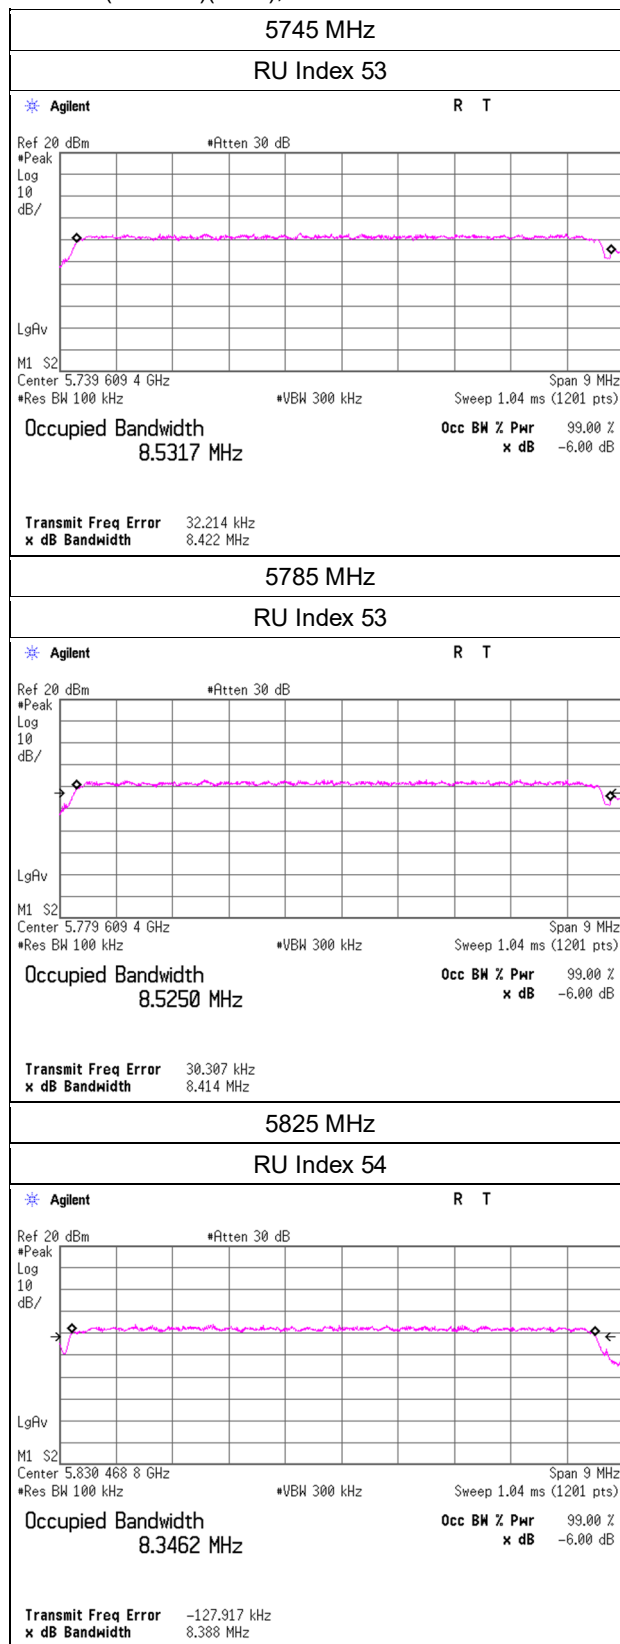

6 dB Bandwidth

11ax-20(OFDMA)(SDM), 242-tone RU

