



# **RADIO TEST REPORT**

**Test Report No. : 13434268S-A-R2**

**Applicant** : Nintendo Co., Ltd.  
**Type of EUT** : Game controller  
**Model Number of EUT** : HAC-043  
**FCC ID** : BKEHAC043  
**Test regulation** : FCC Part 15 Subpart C: 2021  
**Test Result** : Complied (Refer to SECTION 3)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.  
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in SECTION 1.
10. This report is a revised version of 13434268S-A-R1. 13434268S-A-R1 is replaced with this report.

**Date of test:** February 19 to August 18, 2021

**Representative test engineer:**   
Shiro Kobayashi  
Engineer

**Approved by:**   
Akio Hayashi  
Manager



CERTIFICATE 1266.03

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
- ☒ There is no testing item of "Non-accreditation".

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

## REVISION HISTORY

**Original Test Report No.: 13434268S-A**

| Revision     | Test report No. | Date            | Page revised | Contents                                                                                                                                                                                                                                                                                                                 |
|--------------|-----------------|-----------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| - (Original) | 13434268S-A     | May 18, 2021    | -            | -                                                                                                                                                                                                                                                                                                                        |
| 1            | 13434268S-A-R1  | July 26, 2021   | 5            | Correction of Address:<br>“2-1 Minamimatsuda-cho, Higashikujo,<br>Minami-ku, Kyoto” to “11-1 Hokotate-cho,<br>Kamitoba, Minami-ku, Kyoto 601-8501,<br>Japan”<br>Update of Rating:<br>“DC 5 V” to “DC 5 V (USB), DC 4.2 V<br>(Battery)”<br>Update of Clock frequency:<br>“CPU: 96 MHz” to “CPU: 96 MHz (XTAL:<br>24 MHz)” |
|              |                 |                 | 6            | Update of 3.1:<br>“January 12, 2021 and effective February 11,<br>2021” to “May 3, 2021 and effective July 2,<br>2021”<br>Addition of “* The revision does not affect<br>the test result conducted before its effective<br>date.”                                                                                        |
|              |                 |                 | 16-21        | Correction of Model No.<br>“HAT-043” to “HAC-043”                                                                                                                                                                                                                                                                        |
| 2            | 13434268S-A-R2  | August 19, 2021 | 1            | Update Date of test:<br>From<br>“February 19 to March 12, 2021”<br>To<br>“February 19 to August 18, 2021”                                                                                                                                                                                                                |
|              |                 |                 | 6            | Update Worst Margin of Spurious Emission &<br>Band Edge Compliance:<br>From 8.5 dB <sup>④</sup> To 8.7 dB <sup>④</sup><br>9920.000 MHz, <sup>④</sup> 9764.000 MHz, <sup>④</sup><br>Vertical, AV, <sup>④</sup> Horizontal, AV, <sup>④</sup><br>3DH5 2480 MHz <sup>④</sup> DH5 2441 MHz <sup>④</sup>                       |
|              |                 |                 | 14           | Correction of r:<br>From “3.91” m to “0.09 m”                                                                                                                                                                                                                                                                            |
|              |                 |                 | 39-44        | Update Radiated Spurious Emission Data of<br>Tx, Hopping Off, 3DH5 mode.                                                                                                                                                                                                                                                 |
|              |                 |                 | 53-54        | Update and Addition of Test equipment.                                                                                                                                                                                                                                                                                   |

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Reference: Abbreviations (Including words undescribed in this report)

|                |                                                                 |         |                                                     |
|----------------|-----------------------------------------------------------------|---------|-----------------------------------------------------|
| A2LA           | The American Association for Laboratory Accreditation           | MCS     | Modulation and Coding Scheme                        |
| AC             | Alternating Current                                             | MRA     | Mutual Recognition Arrangement                      |
| AFH            | Adaptive Frequency Hopping                                      | N/A     | Not Applicable                                      |
| AM             | Amplitude Modulation                                            | NIST    | National Institute of Standards and Technology      |
| Amp, AMP       | Amplifier                                                       | NS      | No signal detect.                                   |
| ANSI           | American National Standards Institute                           | NSA     | Normalized Site Attenuation                         |
| Ant, ANT       | Antenna                                                         | NVLAP   | National Voluntary Laboratory Accreditation Program |
| AP             | Access Point                                                    | OBW     | Occupied Band Width                                 |
| ASK            | Amplitude Shift Keying                                          | OFDM    | Orthogonal Frequency Division Multiplexing          |
| Atten., ATT    | Attenuator                                                      | P/M     | Power meter                                         |
| AV             | Average                                                         | PCB     | Printed Circuit Board                               |
| BPSK           | Binary Phase-Shift Keying                                       | PER     | Packet Error Rate                                   |
| BR             | Bluetooth Basic Rate                                            | PHY     | Physical Layer                                      |
| BT             | Bluetooth                                                       | PK      | Peak                                                |
| BT LE          | Bluetooth Low Energy                                            | PN      | Pseudo random Noise                                 |
| BW             | BandWidth                                                       | PRBS    | Pseudo-Random Bit Sequence                          |
| Cal Int        | Calibration Interval                                            | PSD     | Power Spectral Density                              |
| CCK            | Complementary Code Keying                                       | QAM     | Quadrature Amplitude Modulation                     |
| Ch., CH        | Channel                                                         | QP      | Quasi-Peak                                          |
| CISPR          | Comite International Special des Perturbations Radioelectriques | QPSK    | Quadri-Phase Shift Keying                           |
| CW             | Continuous Wave                                                 | RBW     | Resolution Band Width                               |
| DBPSK          | Differential BPSK                                               | RDS     | Radio Data System                                   |
| DC             | Direct Current                                                  | RE      | Radio Equipment                                     |
| D-factor       | Distance factor                                                 | RF      | Radio Frequency                                     |
| DFS            | Dynamic Frequency Selection                                     | RMS     | Root Mean Square                                    |
| DQPSK          | Differential QPSK                                               | RSS     | Radio Standards Specifications                      |
| DSSS           | Direct Sequence Spread Spectrum                                 | Rx      | Receiving                                           |
| EDR            | Enhanced Data Rate                                              | SA, S/A | Spectrum Analyzer                                   |
| EIRP, e.i.r.p. | Equivalent Isotropically Radiated Power                         | SG      | Signal Generator                                    |
| EMC            | ElectroMagnetic Compatibility                                   | SVSWR   | Site-Voltage Standing Wave Ratio                    |
| EMI            | ElectroMagnetic Interference                                    | TR      | Test Receiver                                       |
| EN             | European Norm                                                   | Tx      | Transmitting                                        |
| ERP, e.r.p.    | Effective Radiated Power                                        | VBW     | Video BandWidth                                     |
| EU             | European Union                                                  | Vert.   | Vertical                                            |
| EUT            | Equipment Under Test                                            | WLAN    | Wireless LAN                                        |
| Fac.           | Factor                                                          |         |                                                     |
| FCC            | Federal Communications Commission                               |         |                                                     |
| FHSS           | Frequency Hopping Spread Spectrum                               |         |                                                     |
| FM             | Frequency Modulation                                            |         |                                                     |
| Freq.          | Frequency                                                       |         |                                                     |
| FSK            | Frequency Shift Keying                                          |         |                                                     |
| GFSK           | Gaussian Frequency-Shift Keying                                 |         |                                                     |
| GNSS           | Global Navigation Satellite System                              |         |                                                     |
| GPS            | Global Positioning System                                       |         |                                                     |
| Hori.          | Horizontal                                                      |         |                                                     |
| ICES           | Interference-Causing Equipment Standard                         |         |                                                     |
| IEC            | International Electrotechnical Commission                       |         |                                                     |
| IEEE           | Institute of Electrical and Electronics Engineers               |         |                                                     |
| IF             | Intermediate Frequency                                          |         |                                                     |
| ILAC           | International Laboratory Accreditation Conference               |         |                                                     |
| ISED           | Innovation, Science and Economic Development Canada             |         |                                                     |
| ISO            | International Organization for Standardization                  |         |                                                     |
| JAB            | Japan Accreditation Board                                       |         |                                                     |
| LAN            | Local Area Network                                              |         |                                                     |
| LIMS           | Laboratory Information Management System                        |         |                                                     |

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

| <b>CONTENTS</b>                                                                | <b>PAGE</b> |
|--------------------------------------------------------------------------------|-------------|
| <b>SECTION 1: Customer information.....</b>                                    | <b>5</b>    |
| <b>SECTION 2: Equipment under test (EUT).....</b>                              | <b>5</b>    |
| <b>SECTION 3: Test specification, procedures &amp; results.....</b>            | <b>6</b>    |
| <b>SECTION 4: Operation of EUT during testing.....</b>                         | <b>9</b>    |
| <b>SECTION 5: Conducted Emission.....</b>                                      | <b>12</b>   |
| <b>SECTION 6: Radiated Spurious Emission .....</b>                             | <b>13</b>   |
| <b>SECTION 7: Antenna Terminal Conducted Tests.....</b>                        | <b>15</b>   |
| <b>APPENDIX 1: Test data .....</b>                                             | <b>16</b>   |
| Conducted Emission .....                                                       | 16          |
| 20 dB Bandwidth, 99 %Occupied Bandwidth and Carrier Frequency Separation ..... | 22          |
| Number of Hopping Frequency .....                                              | 26          |
| Dwell time.....                                                                | 28          |
| Maximum Peak Output Power.....                                                 | 31          |
| Average Output Power.....                                                      | 32          |
| Radiated Spurious Emission .....                                               | 34          |
| Conducted Spurious Emission .....                                              | 45          |
| Conducted Emission Band Edge compliance .....                                  | 51          |
| <b>APPENDIX 2: Test instruments .....</b>                                      | <b>53</b>   |
| <b>APPENDIX 3: Photographs of test setup .....</b>                             | <b>55</b>   |
| Conducted Emission .....                                                       | 55          |
| Radiated Spurious Emission .....                                               | 56          |
| Worst Case Position.....                                                       | 57          |
| Antenna Terminal Conducted Tests.....                                          | 58          |

## **SECTION 1: Customer information**

|                  |   |                                                               |
|------------------|---|---------------------------------------------------------------|
| Company Name     | : | Nintendo Co., Ltd.                                            |
| Address          | : | 11-1 Hokotate-cho, Kamitoba, Minami-ku, Kyoto 601-8501, Japan |
| Telephone Number | : | +81-75-662-9600                                               |
| Facsimile Number | : | +81-75-662-9624                                               |
| Contact Person   | : | Yosuke Ishikawa                                               |

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT) other than the Receipt Date
- SECTION 4: Operation of EUT during testing

\* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

## **SECTION 2: Equipment under test (EUT)**

### **2.1 Identification of EUT**

|                            |   |                                                                                            |
|----------------------------|---|--------------------------------------------------------------------------------------------|
| Type                       | : | Game controller                                                                            |
| Model Number               | : | HAC-043                                                                                    |
| Serial Number              | : | Refer to SECTION 4.2                                                                       |
| Rating                     | : | DC 5 V (USB), DC 4.2 V (Battery)                                                           |
| Receipt Date               | : | February 4, 2021                                                                           |
| Country of Mass-production | : | China                                                                                      |
| Condition                  | : | Engineering prototype<br>(Not for Sale: This sample is equivalent to mass-produced items.) |
| Modification               | : | No Modification by the test lab.                                                           |

### **2.2 Product Description**

Model: HAC-043 (referred to as the EUT in this report) is a Game controller.

## **Radio Specification**

### **Bluetooth (BDR / EDR function)**

|                           |   |                              |
|---------------------------|---|------------------------------|
| Radio Type                | : | Transceiver                  |
| Frequency of Operation    | : | 2402 MHz - 2480 MHz          |
| Modulation                | : | FHSS                         |
| Antenna type              | : | $\lambda/4$ Invert F antenna |
| Antenna Gain              | : | 1.99 dBi                     |
| Clock frequency (Maximum) | : | CPU: 96 MHz (XTAL: 24 MHz)   |

## SECTION 3: Test specification, procedures & results

### 3.1 Test Specification

Test Specification : FCC Part 15 Subpart C  
FCC Part 15 final revised on May 3, 2021 and effective July 2, 2021

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted limits  
Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,  
and 5725-5850 MHz

\* The revision does not affect the test result conducted before its effective date.  
Also the EUT complies with FCC Part 15 Subpart B.

### 3.2 Procedures and results

| Item                                     | Test Procedure                                                                  | Specification                                                                      | Worst Margin                                               | Results             | Remarks                                         |
|------------------------------------------|---------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------|---------------------|-------------------------------------------------|
| Conducted Emission                       | FCC: ANSI C63.10-2013<br>6. Standard test methods<br>-----<br>ISED: RSS-Gen 8.8 | FCC: Section 15.207<br>-----<br>ISED: RSS-Gen 8.8                                  | 29.6 dB,<br>0.41337 MHz, N<br>AV, DH5 2402 MHz             | Complied<br>a)      | -                                               |
| Carrier Frequency Separation             | FCC: KDB 558074 D01<br>15.247 Meas Guidance v05r02<br>ISED: -                   | FCC: Section15.247(a)(1)<br>-----<br>ISED: RSS-247 5.1 (b)                         | See data.                                                  | Complied<br>b)      | Conducted                                       |
| 20 dB Bandwidth                          | FCC: KDB 558074 D01<br>15.247 Meas Guidance v05r02<br>ISED: -                   | FCC: Section15.247(a)(1)<br>-----<br>ISED: RSS-247 5.1 (a)                         |                                                            | Complied<br>b)      | Conducted                                       |
| Number of Hopping Frequency              | FCC: KDB 558074 D01<br>15.247 Meas Guidance v05r02<br>ISED: -                   | FCC: Section15.247(a)(1)(iii)<br>-----<br>ISED: RSS-247 5.1 (d)                    |                                                            | Complied<br>c)      | Conducted                                       |
| Dwell time                               | FCC: KDB 558074 D01<br>15.247 Meas Guidance v05r02<br>ISED: -                   | FCC: Section15.247(a)(1)(iii)<br>-----<br>ISED: RSS-247 5.1 (d)                    |                                                            | Complied<br>d)      | Conducted                                       |
| Maximum Peak Output Power                | FCC: KDB 558074 D01<br>15.247 Meas Guidance v05r02<br>ISED: RSS-Gen 6.12        | FCC: Section15.247(a)(b)(1)<br>-----<br>ISED: RSS-247 5.4 (b)                      |                                                            | Complied<br>e)      | Conducted                                       |
| Spurious Emission & Band Edge Compliance | FCC: KDB 558074 D01<br>15.247 Meas Guidance v05r02<br>ISED: RSS-Gen 6.13        | FCC: Section15.247(d)<br>-----<br>ISED: RSS-247 5.5<br>RSS-Gen 8.9<br>RSS-Gen 8.10 | 8.7 dB<br>9764.000 MHz,<br>Horizontal, AV,<br>DH5 2441 MHz | Complied<br>f) / g) | Conducted/<br>Radiated<br>(above 30 MHz)<br>*1) |

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\*1) Radiated test was selected over 30 MHz based on section 15.247(d).

- a) Refer to APPENDIX 1 (data of Conducted Emission)
- b) Refer to APPENDIX 1 (data of 20 dB Bandwidth, 99 % Occupied Bandwidth and Carrier Frequency Separation)
- c) Refer to APPENDIX 1 (data of Number of Hopping Frequency)
- d) Refer to APPENDIX 1 (data of Dwell time)
- e) Refer to APPENDIX 1 (data of Maximum Peak Output Power)
- f) Refer to APPENDIX 1 (data of Conducted Spurious Emission)
- g) Refer to APPENDIX 1 (data of Radiated Spurious Emission)

Symbols:

|           |                                                                                                             |
|-----------|-------------------------------------------------------------------------------------------------------------|
| Complied  | The data of this test item has enough margin, more than the measurement uncertainty.                        |
| Complied# | The data of this test item meets the limits unless the measurement uncertainty is taken into consideration. |

\* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

### FCC Part 15.31 (e)

This EUT provides the stable voltage constantly to RF Part regardless of input voltage. Therefore, this EUT complies with the requirement.

### FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.3 Addition to standard

| Item                                                                                                       | Test Procedure    | Specification | Worst margin | Results | Remarks   |
|------------------------------------------------------------------------------------------------------------|-------------------|---------------|--------------|---------|-----------|
| 99 % Occupied Bandwidth                                                                                    | ISED: RSS-Gen 6.7 | ISED: -       | N/A          | -<br>b) | Conducted |
| b) Refer to APPENDIX 1 (data of 20 dB Bandwidth, 99 % Occupied Bandwidth and Carrier Frequency Separation) |                   |               |              |         |           |

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .

Shonan EMC Lab.

| Item                                             | Frequency range | Uncertainty (+/-) |                |                |
|--------------------------------------------------|-----------------|-------------------|----------------|----------------|
|                                                  |                 | No. 1 SAC / SR    | No. 2 SAC / SR | No. 3 SAC / SR |
| Conducted emission (AC Mains) LISN               | 150 kHz-30 MHz  | 2.6 dB            | 2.6 dB         | 2.56dB         |
| Radiated emission<br>(Measurement distance: 3 m) | 9 kHz-30 MHz    | 3.0 dB            | 2.7 dB         | 2.7 dB         |
|                                                  | 30 MHz-200 MHz  | 4.6 dB            | 4.6 dB         | 4.6 dB         |
|                                                  | 200 MHz-1 GHz   | 6.0 dB            | 6.0 dB         | 6.0 dB         |
|                                                  | 1 GHz-6 GHz     | 4.8 dB            | 4.8 dB         | 4.8 dB         |
|                                                  | 6 GHz-18 GHz    | 5.4 dB            | 5.4 dB         | 5.4 dB         |
|                                                  | 18 GHz-40 GHz   | 5.3 dB            | 5.3 dB         | 5.3 dB         |
| Radiated emission<br>(Measurement distance: 1 m) | 1 GHz-18 GHz    | 5.7 dB            | 5.7 dB         | 5.7 dB         |
|                                                  | 18 GHz-40 GHz   | 5.6 dB            | 5.6 dB         | 5.6 dB         |

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

| Antenna terminal test                                   | Uncertainty (+/-) |
|---------------------------------------------------------|-------------------|
| Power Measurement above 1 GHz (Average Detector)_SPM-06 | 1.4 dB            |
| Power Measurement above 1 GHz (Peak Detector)_SPM-06    | 1.6 dB            |
| Power Measurement above 1 GHz (Average Detector)_SPM-07 | 0.89 dB           |
| Power Measurement above 1 GHz (Peak Detector)_SPM-07    | 1.2 dB            |
| Power Measurement above 1 GHz (Average Detector)_SPM-13 | 0.91 dB           |
| Power Measurement above 1 GHz (Peak Detector)_SPM-13    | 1.2 dB            |
| Spurious emission (Conducted) below 1GHz                | 0.87 dB           |
| Spurious emission (Conducted) 1 GHz-3 GHz               | 0.96 dB           |
| Spurious emission (Conducted) 3 GHz-18 GHz              | 3.0 dB            |
| Spurious emission (Conducted) 18 GHz-26.5 GHz           | 2.6 dB            |
| Spurious emission (Conducted) 26.5 GHz-40 GHz           | 2.2 dB            |
| Bandwidth Measurement                                   | 0.012 %           |
| Duty cycle and Time Measurement                         | 0.27 %            |
| Temperature_SCH-01                                      | 0.95 deg.C.       |
| Humidity_SCH-01                                         | 0.83 %            |
| Temperature_SCH-02                                      | 2.0 deg.C.        |
| Humidity_SCH-02                                         | 6.6 %             |
| Voltage                                                 | 0.86 %            |

### 3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.  
1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN  
Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401  
A2LA Certificate Number: 1266.03  
(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

| Test site                  | IC Registration Number | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Maximum measurement distance |
|----------------------------|------------------------|----------------------------|------------------------------------------------------------------|------------------------------|
| No.1 Semi-anechoic chamber | 2973D-1                | 20.6 x 11.3 x 7.65         | 20.6 x 11.3                                                      | 10 m                         |
| No.2 Semi-anechoic chamber | 2973D-2                | 20.6 x 11.3 x 7.65         | 20.6 x 11.3                                                      | 10 m                         |
| No.3 Semi-anechoic chamber | 2973D-3                | 12.7 x 7.7 x 5.35          | 12.7 x 7.7                                                       | 5 m                          |
| No.4 Semi-anechoic chamber | -                      | 8.1 x 5.1 x 3.55           | 8.1 x 5.1                                                        | -                            |
| No.1 Shielded room         | -                      | 6.8 x 4.1 x 2.7            | 6.8 x 4.1                                                        | -                            |
| No.2 Shielded room         | -                      | 6.8 x 4.1 x 2.7            | 6.8 x 4.1                                                        | -                            |
| No.3 Shielded room         | -                      | 6.3 x 4.7 x 2.7            | 6.3 x 4.7                                                        | -                            |
| No.4 Shielded room         | -                      | 4.4 x 4.7 x 2.7            | 4.4 x 4.7                                                        | -                            |
| No.5 Shielded room         | -                      | 7.8 x 6.4 x 2.7            | 7.8 x 6.4                                                        | -                            |
| No.6 Shielded room         | -                      | 7.8 x 6.4 x 2.7            | 7.8 x 6.4                                                        | -                            |
| No.8 Shielded room         | -                      | 3.45 x 5.5 x 2.4           | 3.45 x 5.5                                                       | -                            |
| No.1 Measurement room      | -                      | 2.55 x 4.1 x 2.5           | -                                                                | -                            |

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

## **SECTION 4: Operation of EUT during testing**

### **4.1 Operating Mode(s)**

Bluetooth: Transmitting, Payload: PRBS9

Details of Operating Mode(s)

| Test Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Mode                                                    | Tested frequency             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------|
| Conducted Emission,<br>Spurious Emission<br>(Conducted/Radiated)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Tx (Hopping Off) DH5, 3DH5                              | 2402 MHz, 2441 MHz, 2480 MHz |
| Carrier Frequency Separation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Tx (Hopping On) DH5, 3DH5                               | 2402 MHz, 2441 MHz, 2480 MHz |
| 20dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Tx (Hopping Off) DH5, 3DH5                              | 2402 MHz, 2441 MHz, 2480 MHz |
| Number of Hopping Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Tx (Hopping On) DH5, 3DH5                               | -                            |
| Dwell time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Tx (Hopping On),<br>-DH1, DH3, DH5<br>-3DH1, 3DH3, 3DH5 | -                            |
| Maximum Peak Output Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Tx (Hopping Off) DH5, 2DH5, 3DH5                        | 2402 MHz, 2441 MHz, 2480 MHz |
| Band Edge Compliance<br>(Conducted)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Tx DH5, 3DH5<br>-Hopping On<br>-Hopping Off             | 2402 MHz, 2480 MHz           |
| 99% Occupied Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Tx DH5, 3DH5<br>-Hopping On<br>-Hopping Off             | 2402 MHz, 2441 MHz, 2480 MHz |
| <p>*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)</p> <p>*2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.</p> <p>* It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.</p> <p>*EUT has the power settings by the software as follows;<br/> Power settings: Fixed<br/> Software: CyBluetool Version 0.1.97.1<br/> (Date: 2021.1.20, Storage location: Driven by connected PC)</p> <p>*This setting of software is the worst case.<br/> Any conditions under the normal use do not exceed the condition of setting.<br/> In addition, end users cannot change the settings of the output power of the product.</p> |                                                         |                              |

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## 4.2 Configuration and peripherals

[Radiated Emission test, Conducted Emission test]

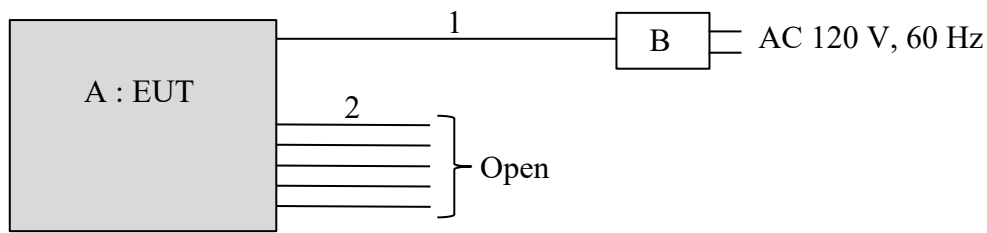

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.  
As a result of comparing AC 120 V and AC 240 V at pre-check, conducted emission test was performed with AC 120 V of the worst voltage as representative.


### Description of EUT and Support equipment

| No. | Item            | Model number | Serial number | Manufacturer       | Remarks |
|-----|-----------------|--------------|---------------|--------------------|---------|
| A   | Game Controller | HAC-043      | S-1290        | Nintendo Co., Ltd. | EUT     |
| B   | AC Adapter      | HAC-002(USZ) | S-992         | Nintendo Co., Ltd. | -       |

### List of cables used

| No. | Name   | Length (m) | Shield     |            | Remarks |
|-----|--------|------------|------------|------------|---------|
|     |        |            | Cable      | Connector  |         |
| 1   | DC     | 1.5        | Unshielded | Unshielded | -       |
| 2   | Signal | 0.2        | Unshielded | Unshielded | -       |

[Antenna Terminal Conducted tests]

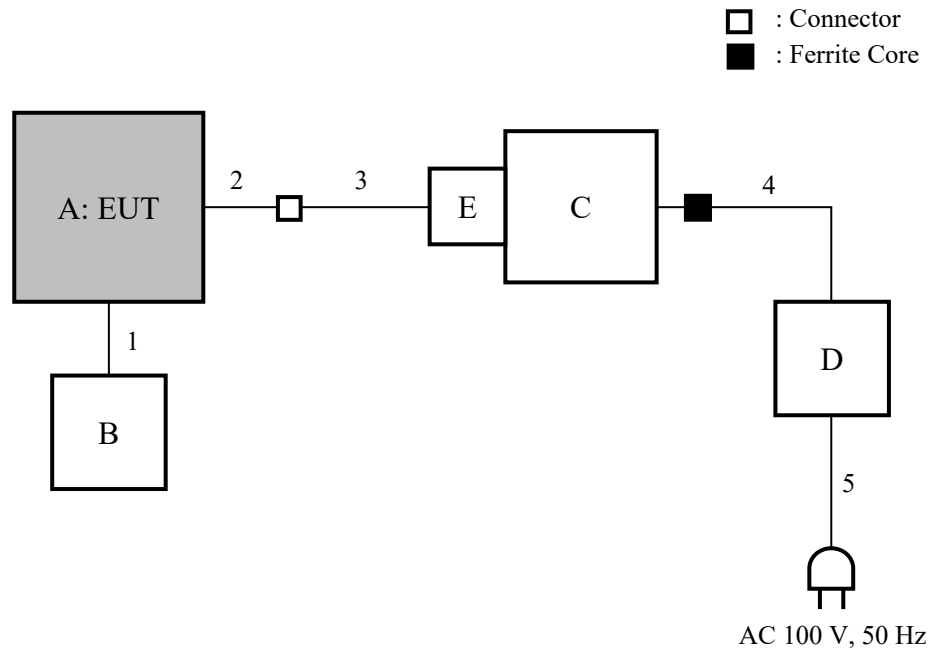

#### Description of EUT and Support equipment

| No. | Item                        | Model number  | Serial number      | Manufacturer | Remarks |
|-----|-----------------------------|---------------|--------------------|--------------|---------|
| A   | Game Controller             | HAC-043       | S-1158             | Nintendo     | EUT     |
| B   | RECHARGEABLE LI-ION BATTERY | HAC-006       | S-1159             | Nintendo     | -       |
| C   | Laptop PC                   | CF-SV9RDQVS   | S-1253             | Panasonic    | -       |
| D   | AC Adapter                  | CF-AA65D2A M1 | 65D2AM1208002421WA | Panasonic    | -       |
| E   | UART-USB cable              | TTL-232RG     | S-1292             | FTDI         | -       |

#### List of cables used

| No. | Name | Length (m) | Shield     |            | Remarks |
|-----|------|------------|------------|------------|---------|
|     |      |            | Cable      | Connector  |         |
| 1   | DC   | 0.03       | Unshielded | Unshielded | -       |
| 2   | UART | 0.15       | Unshielded | Unshielded | -       |
| 3   | USB  | 2.0        | Shielded   | Shielded   | -       |
| 4   | DC   | 1.0        | Unshielded | Unshielded | -       |
| 5   | AC   | 0.8        | Unshielded | Unshielded | -       |

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 5: Conducted Emission**

### **Test Procedure and conditions**

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80 cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hung at a 40 cm height to the ground plane.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Shielded Room.


The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

|                          |                            |
|--------------------------|----------------------------|
| <b>Detector</b>          | <b>: QP and CISPR AV</b>   |
| <b>Measurement range</b> | <b>: 0.15 MHz - 30 MHz</b> |
| <b>Test data</b>         | <b>: APPENDIX</b>          |
| <b>Test result</b>       | <b>: Pass</b>              |

**Figure 1: Test Setup**

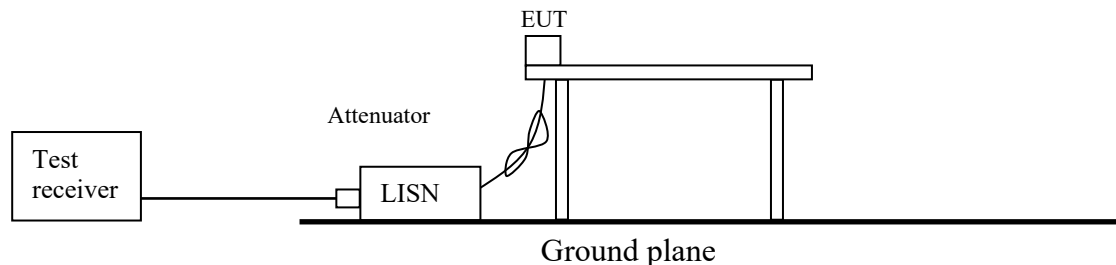

## **SECTION 6: Radiated Spurious Emission**

### **Test Procedure**

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 2.0 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

### **Test Antennas are used as below;**


|              |                   |                  |             |
|--------------|-------------------|------------------|-------------|
| Frequency    | 30 MHz to 200 MHz | 200 MHz to 1 GHz | Above 1 GHz |
| Antenna Type | Biconical         | Logperiodic      | Horn        |

|                 |               |                          |                                                                                                       |
|-----------------|---------------|--------------------------|-------------------------------------------------------------------------------------------------------|
| Frequency       | Below 1 GHz   | Above 1GHz               |                                                                                                       |
| Instrument used | Test Receiver | Spectrum Analyzer        |                                                                                                       |
| Detector        | QP            | PK                       | AV *1)                                                                                                |
| IF Bandwidth    | BW 120 kHz    | RBW: 1 MHz<br>VBW: 3 MHz | RBW: 1 MHz<br>VBW: 1/T<br>(T: burst length, refer to Burst rate confirmation sheet)<br>Detector: Peak |

\*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.


**Figure 2: Test Setup**

Below 1 GHz

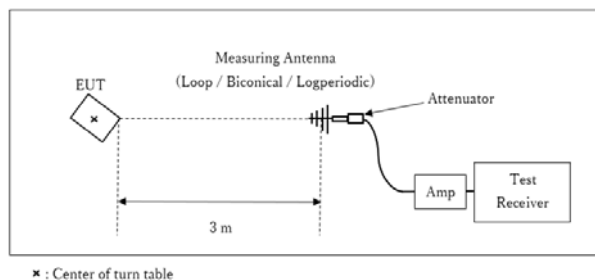

Test Distance: 3 m


1 GHz - 10 GHz

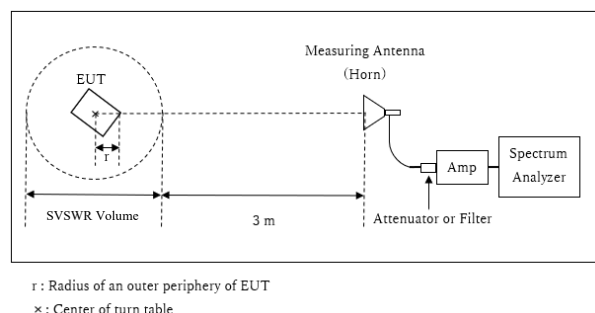

Distance Factor:  $20 \times \log (3.91 \text{ m} / 3.0 \text{ m}) = 2.31 \text{ dB}$   
\* Test Distance:  $(3 + \text{SVSWR Volume} / 2) - r = 3.91 \text{ m}$

SVSWR Volume : 2.0 m  
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)  
r = 0.09 m

10 GHz - 26.5 GHz

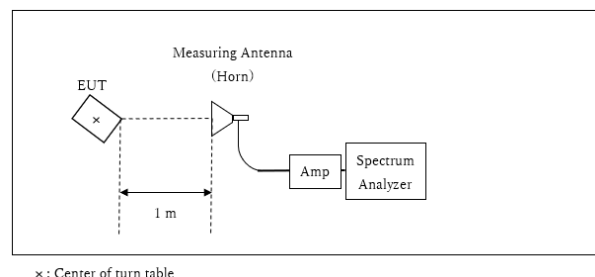

Distance Factor:  $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$   
\*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

| Antenna polarization | Below 1 GHz | 1-10 GHz | 10-18 GHz | 18-26.5 GHz |
|----------------------|-------------|----------|-----------|-------------|
| Horizontal           | X           | Z        | X         | X           |
| Vertical             | X           | Z        | X         | X           |

**Measurement range** : 30 MHz - 26.5 GHz

**Test data** : APPENDIX

**Test result** : Pass

## **SECTION 7: Antenna Terminal Conducted Tests**

### **Test Procedure**

The tests were made with below setting connected to the antenna port.

| Test                                             | Span                                    | RBW             | VBW                | Sweep time                                                     | Detector         | Trace       | Instrument used                  |
|--------------------------------------------------|-----------------------------------------|-----------------|--------------------|----------------------------------------------------------------|------------------|-------------|----------------------------------|
| 20 dB Bandwidth                                  | 3 MHz                                   | 30 kHz          | 100 kHz            | Auto                                                           | Peak             | Max Hold    | Spectrum Analyzer                |
| 99 % Occupied Bandwidth *1)                      | Enough width to display emission skirts | 1 to 5 % of OBW | Three times of RBW | Auto                                                           | Peak             | Max Hold    | Spectrum Analyzer                |
| Maximum Peak Output Power                        | -                                       | -               | -                  | Auto                                                           | Peak Average *2) | -           | Power Meter (Sensor: 160 MHz BW) |
| Carrier Frequency Separation                     | 3 MHz                                   | 100 kHz         | 300 kHz            | Auto                                                           | Peak             | Max Hold    | Spectrum Analyzer                |
| Number of Hopping Frequency                      | 30 MHz                                  | 100 kHz         | 300 kHz            | Auto                                                           | Peak             | Max Hold    | Spectrum Analyzer                |
| Dwell Time                                       | Zero Span                               | 100 kHz, 1 MHz  | 300 kHz, 3 MHz     | As necessary capture the entire dwell time per hopping channel | Peak             | Clear Write | Spectrum Analyzer                |
| Conducted Spurious Emission *3) *4)              | 9 kHz to 150 kHz                        | 200 Hz          | 620 Hz             | Auto                                                           | Peak             | Max Hold    | Spectrum Analyzer                |
|                                                  | 150 kHz to 30 MHz                       | 10 kHz          | 30 kHz             |                                                                |                  |             |                                  |
|                                                  | 30 MHz to 25 GHz                        | 100 kHz         | 300 kHz            |                                                                |                  |             |                                  |
| Conducted Spurious Emission Band Edge compliance | 10 MHz                                  | 100 kHz         | 300 kHz            | Auto                                                           | Peak             | Max Hold    | Spectrum Analyzer                |

\*1) Peak hold was applied as Worst-case measurement.

\*2) Reference data

\*3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

(9 kHz -150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)

\*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to  $45.5 - 51.5 = -6.0$  dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

The equipment and cables were not used for factor 0 dB of the data sheets.

**Test data** : APPENDIX

**Test result** : Pass

## APPENDIX 1: Test data

### Conducted Emission

#### DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Shonan EMC Lab. No.2 Shielded Room  
Date : 2021/03/12

Company : Nintendo Co., Ltd.  
Kind of EUT : Game Controller  
Model No. : HAC-043  
Serial No. : S-1290  
Remarks : -

Mode : DH5 2402 MHz  
Order No. : 13434268S  
Power : AC 120 V / 60 Hz / USB 5 V  
Temp./Humi. : 20 deg.C / 34 %RH

Limit : FCC\_Part 15 Subpart C(15.207)

Engineer : Yusuke Tanikawara

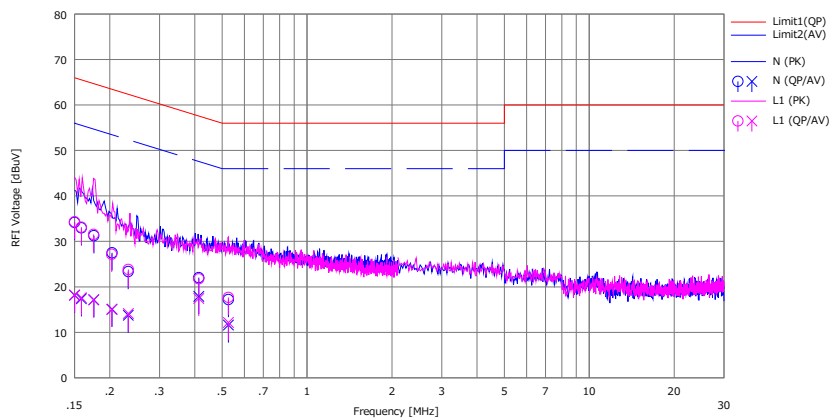

| No. | Freq.<br>[MHz] | Reading        |                | C.Fac | Results        |                | Limit          |                | Margin       |              | Phase | Comment |
|-----|----------------|----------------|----------------|-------|----------------|----------------|----------------|----------------|--------------|--------------|-------|---------|
|     |                | (QP)<br>[dBuV] | (AV)<br>[dBuV] |       | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dB] | (AV)<br>[dB] |       |         |
| 1   | 0.15000        | 21.60          | 5.60           | 12.56 | 34.16          | 18.16          | 66.00          | 56.00          | 31.8         | 37.8         | N     |         |
| 2   | 0.15868        | 20.40          | 4.80           | 12.56 | 32.96          | 17.36          | 65.53          | 55.53          | 32.5         | 38.1         | N     |         |
| 3   | 0.17571        | 18.70          | 4.60           | 12.56 | 31.26          | 17.16          | 64.69          | 54.69          | 33.4         | 37.5         | N     |         |
| 4   | 0.20371        | 14.90          | 2.50           | 12.58 | 27.48          | 15.08          | 63.46          | 53.46          | 35.9         | 38.3         | N     |         |
| 5   | 0.23245        | 10.80          | 1.20           | 12.57 | 23.37          | 13.77          | 62.36          | 52.36          | 38.9         | 38.5         | N     |         |
| 6   | 0.41337        | 9.40           | 5.30           | 12.61 | 22.01          | 17.91          | 57.58          | 47.58          | 35.5         | 29.6         | N     |         |
| 7   | 0.52631        | 4.60           | -1.00          | 12.60 | 17.20          | 11.60          | 56.00          | 46.00          | 38.8         | 34.4         | N     |         |
| 8   | 0.15000        | 21.70          | 5.60           | 12.61 | 34.31          | 18.21          | 66.00          | 56.00          | 31.6         | 37.7         | L1    |         |
| 9   | 0.15868        | 20.50          | 5.00           | 12.61 | 33.11          | 17.61          | 65.53          | 55.53          | 32.4         | 37.9         | L1    |         |
| 10  | 0.17521        | 18.90          | 4.50           | 12.62 | 31.52          | 17.12          | 64.71          | 54.71          | 33.1         | 37.5         | L1    |         |
| 11  | 0.20321        | 14.50          | 2.40           | 12.65 | 27.15          | 15.05          | 63.48          | 53.48          | 36.3         | 38.4         | L1    |         |
| 12  | 0.23269        | 11.20          | 1.50           | 12.63 | 23.83          | 14.13          | 62.35          | 52.35          | 38.5         | 38.2         | L1    |         |
| 13  | 0.41337        | 9.10           | 4.80           | 12.65 | 21.75          | 17.45          | 57.58          | 47.58          | 35.8         | 30.1         | L1    |         |
| 14  | 0.52632        | 5.00           | -0.50          | 12.68 | 17.68          | 12.18          | 56.00          | 46.00          | 38.3         | 33.8         | L1    |         |

Calculation: Result[dBuV]=Reading[dBuV]+C.Fac(LISN(AMN)+Cable+ATT)[dB]  
LISN(AMN):SLS-02

## Conducted Emission

### DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Shonan EMC Lab. No.2 Shielded Room  
Date : 2021/03/12

Company : Nintendo Co., Ltd.  
Kind of EUT : Game Controller  
Model No. : HAC-043  
Serial No. : S-1290  
Remarks : -

Mode : DHS 2441 MHz  
Order No. : 13434268S  
Power : AC 120 V / 60 Hz / USB 5 V  
Temp./Humi. : 20 deg.C / 34 %RH

Limit : FCC\_Part 15 Subpart C(15.207)

Engineer : Yusuke Tanikawara

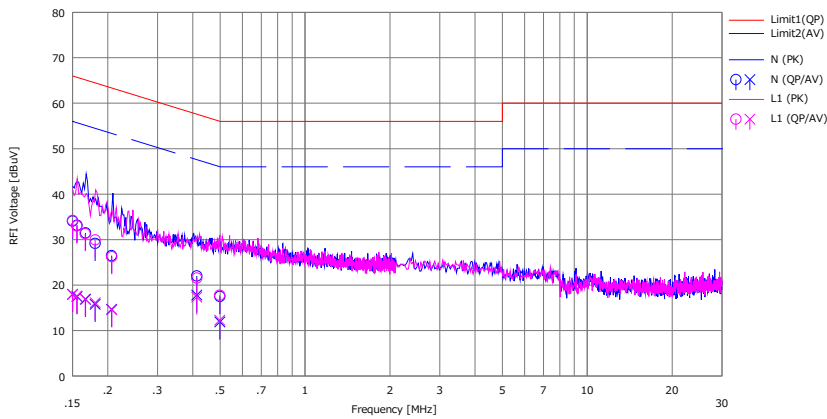

| No. | Freq.<br>[MHz] | Reading        |                | C.Fac | Results        |                | Limit          |                | Margin       |              | Phase | Comment |
|-----|----------------|----------------|----------------|-------|----------------|----------------|----------------|----------------|--------------|--------------|-------|---------|
|     |                | (QP)<br>[dBuV] | (AV)<br>[dBuV] |       | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dB] | (AV)<br>[dB] |       |         |
| 1   | 0.15000        | 21.50          | 5.40           | 12.56 | 34.06          | 17.96          | 66.00          | 56.00          | 31.9         | 38.0         | N     |         |
| 2   | 0.15561        | 20.60          | 4.90           | 12.56 | 33.16          | 17.46          | 65.70          | 55.70          | 32.5         | 38.2         | N     |         |
| 3   | 0.16683        | 18.90          | 4.30           | 12.56 | 31.46          | 16.86          | 65.12          | 55.12          | 33.6         | 38.2         | N     |         |
| 4   | 0.18041        | 16.60          | 3.20           | 12.56 | 29.16          | 15.76          | 64.47          | 54.47          | 35.3         | 38.7         | N     |         |
| 5   | 0.20625        | 13.90          | 2.10           | 12.58 | 26.48          | 14.68          | 63.35          | 53.35          | 36.8         | 38.6         | N     |         |
| 6   | 0.41337        | 9.40           | 5.20           | 12.61 | 22.01          | 17.81          | 57.58          | 47.58          | 35.5         | 29.7         | N     |         |
| 7   | 0.49902        | 4.90           | -0.70          | 12.59 | 17.49          | 11.89          | 56.02          | 46.02          | 38.5         | 34.1         | N     |         |
| 8   | 0.15000        | 21.60          | 5.40           | 12.61 | 34.21          | 18.01          | 66.00          | 56.00          | 31.7         | 37.9         | L1    |         |
| 9   | 0.15529        | 20.40          | 5.00           | 12.61 | 33.01          | 17.61          | 65.71          | 55.71          | 32.7         | 38.1         | L1    |         |
| 10  | 0.16623        | 18.70          | 4.30           | 12.62 | 31.32          | 16.92          | 65.15          | 55.15          | 33.8         | 38.2         | L1    |         |
| 11  | 0.18045        | 17.30          | 3.50           | 12.63 | 29.93          | 16.13          | 64.46          | 54.46          | 34.5         | 38.3         | L1    |         |
| 12  | 0.20665        | 13.60          | 1.90           | 12.65 | 26.25          | 14.55          | 63.34          | 53.34          | 37.0         | 38.7         | L1    |         |
| 13  | 0.41338        | 8.90           | 4.70           | 12.65 | 21.55          | 17.35          | 57.58          | 47.58          | 36.0         | 30.2         | L1    |         |
| 14  | 0.49838        | 5.10           | -0.40          | 12.67 | 17.77          | 12.27          | 56.03          | 46.03          | 38.2         | 33.7         | L1    |         |

Calculation: Result[dBuV]=Reading[dBuV]+C.Fac(LISN(AMN))+Cable+ATT[dB]  
LISN(AMN): SLS-02

## Conducted Emission

### DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Shonan EMC Lab. No.2 Shielded Room  
Date : 2021/03/12

Company : Nintendo Co., Ltd.  
Kind of EUT : Game Controller  
Model No. : HAC-043  
Serial No. : S-1290  
Remarks : -

Mode : DH5 2480 MHz  
Order No. : 13434268S  
Power : AC 120 V / 60 Hz / USB 5 V  
Temp./Humi. : 20 deg.C / 34 %RH

Limit : FCC\_Part 15 Subpart C(15.207)

Engineer : Yusuke Tanikawara

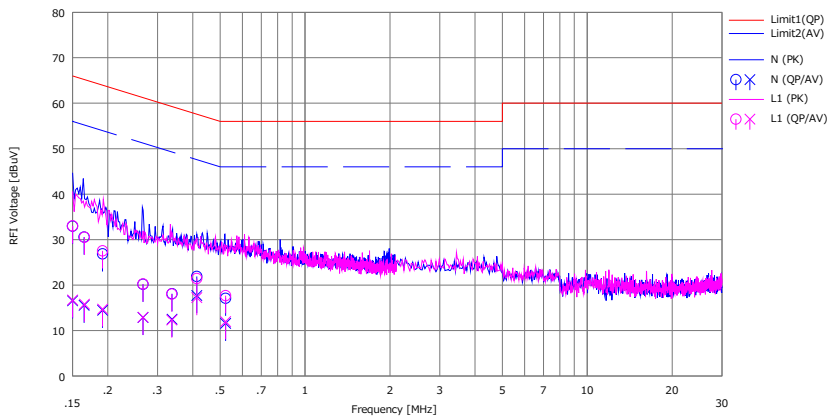

| No. | Freq.<br>[MHz] | Reading        |                | C.Fac | Results        |                | Limit          |                | Margin       |              | Phase | Comment |
|-----|----------------|----------------|----------------|-------|----------------|----------------|----------------|----------------|--------------|--------------|-------|---------|
|     |                | (QP)<br>[dBuV] | (AV)<br>[dBuV] |       | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dB] | (AV)<br>[dB] |       |         |
| 1   | 0.15000        | 20.40          | 4.00           | 12.56 | 32.96          | 16.56          | 66.00          | 56.00          | 33.0         | 39.4         | N     |         |
| 2   | 0.16490        | 18.00          | 3.00           | 12.56 | 30.56          | 15.56          | 65.21          | 55.21          | 34.6         | 39.6         | N     |         |
| 3   | 0.19159        | 14.30          | 1.90           | 12.57 | 26.87          | 14.47          | 63.97          | 53.97          | 37.1         | 39.5         | N     |         |
| 4   | 0.26657        | 7.60           | 0.30           | 12.57 | 20.17          | 12.87          | 61.22          | 51.22          | 41.0         | 38.3         | N     |         |
| 5   | 0.33785        | 5.50           | -0.10          | 12.58 | 18.08          | 12.48          | 59.26          | 49.26          | 41.1         | 36.7         | N     |         |
| 6   | 0.41335        | 9.30           | 5.10           | 12.61 | 21.91          | 17.71          | 57.58          | 47.58          | 35.6         | 29.8         | N     |         |
| 7   | 0.52294        | 4.50           | -1.00          | 12.59 | 17.09          | 11.59          | 56.00          | 46.00          | 38.9         | 34.4         | N     |         |
| 8   | 0.15000        | 20.40          | 4.10           | 12.61 | 33.01          | 16.71          | 66.00          | 56.00          | 32.9         | 39.2         | L1    |         |
| 9   | 0.16538        | 17.90          | 3.20           | 12.62 | 30.52          | 15.82          | 65.19          | 55.19          | 34.6         | 39.3         | L1    |         |
| 10  | 0.19167        | 14.90          | 2.10           | 12.63 | 27.53          | 14.73          | 63.96          | 53.96          | 36.4         | 39.2         | L1    |         |
| 11  | 0.26665        | 7.60           | 0.30           | 12.62 | 20.22          | 12.92          | 61.22          | 51.22          | 41.0         | 38.3         | L1    |         |
| 12  | 0.33715        | 5.40           | -0.30          | 12.63 | 18.03          | 12.33          | 59.27          | 49.27          | 41.2         | 36.9         | L1    |         |
| 13  | 0.41337        | 8.80           | 4.60           | 12.65 | 21.45          | 17.25          | 57.58          | 47.58          | 36.1         | 30.3         | L1    |         |
| 14  | 0.52292        | 5.00           | -0.70          | 12.67 | 17.67          | 11.97          | 56.00          | 46.00          | 38.3         | 34.0         | L1    |         |

Calculation: Result[dBuV]=Reading[dBuV]+C.Fac(LISN(AMN)+Cable+ATT)[dB]  
LISN(AMN):SLS-02

## Conducted Emission

### DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Shonan EMC Lab. No.2 Shielded Room  
Date : 2021/03/12

Company : Nintendo Co., Ltd.  
Kind of EUT : Game Controller  
Model No. : HAC-043  
Serial No. : S-1290  
Remarks : -

Mode : 3DH5 2402 MHz  
Order No. : 13434268S  
Power : AC 120 V / 60 Hz / USB 5 V  
Temp./Humi. : 20 deg.C / 34 %RH

Limit : FCC\_Part 15 Subpart C(15.207)

Engineer : Yusuke Tanikawara

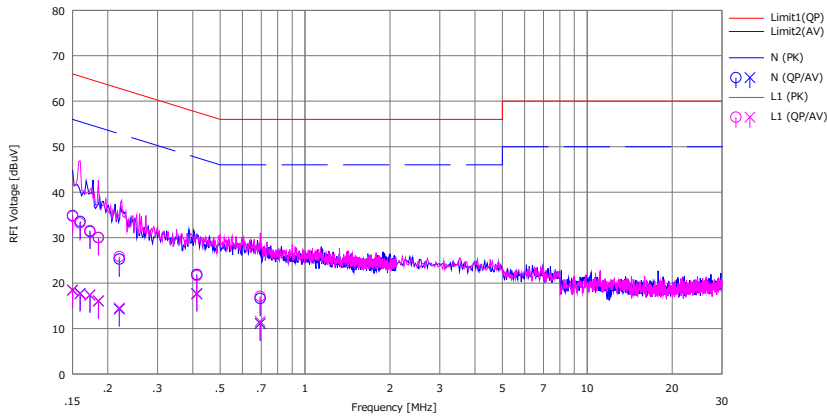

| No. | Freq.<br>[MHz] | Reading        |                | C.Fac | Results        |                | Limit          |                | Margin       |              | Phase | Comment |
|-----|----------------|----------------|----------------|-------|----------------|----------------|----------------|----------------|--------------|--------------|-------|---------|
|     |                | (QP)<br>[dBuV] | (AV)<br>[dBuV] |       | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dB] | (AV)<br>[dB] |       |         |
| 1   | 0.15000        | 22.30          | 5.90           | 12.56 | 34.86          | 18.46          | 66.00          | 56.00          | 31.1         | 37.5         | N     |         |
| 2   | 0.15969        | 21.00          | 5.20           | 12.56 | 33.56          | 17.76          | 65.48          | 55.48          | 31.9         | 37.7         | N     |         |
| 3   | 0.17292        | 18.80          | 4.80           | 12.56 | 31.36          | 17.36          | 64.82          | 54.82          | 33.4         | 37.4         | N     |         |
| 4   | 0.18526        | 17.40          | 3.50           | 12.57 | 29.97          | 16.07          | 64.25          | 54.25          | 34.2         | 38.1         | N     |         |
| 5   | 0.21972        | 12.70          | 1.70           | 12.58 | 25.28          | 14.28          | 62.83          | 52.83          | 37.5         | 38.5         | N     |         |
| 6   | 0.41338        | 9.30           | 5.10           | 12.61 | 21.91          | 17.71          | 57.58          | 47.58          | 35.6         | 29.8         | N     |         |
| 7   | 0.69372        | 4.00           | -1.50          | 12.63 | 16.63          | 11.13          | 56.00          | 46.00          | 39.3         | 34.8         | N     |         |
| 8   | 0.15000        | 22.10          | 5.80           | 12.61 | 34.71          | 18.41          | 66.00          | 56.00          | 31.2         | 37.5         | L1    |         |
| 9   | 0.15929        | 20.60          | 5.00           | 12.61 | 33.21          | 17.61          | 65.50          | 55.50          | 32.2         | 37.8         | L1    |         |
| 10  | 0.17283        | 18.90          | 4.80           | 12.62 | 31.52          | 17.42          | 64.82          | 54.82          | 33.3         | 37.4         | L1    |         |
| 11  | 0.18514        | 17.40          | 3.50           | 12.63 | 30.03          | 16.13          | 64.25          | 54.25          | 34.2         | 38.1         | L1    |         |
| 12  | 0.21979        | 13.20          | 1.90           | 12.64 | 25.84          | 14.54          | 62.83          | 52.83          | 36.9         | 38.2         | L1    |         |
| 13  | 0.41338        | 9.00           | 4.90           | 12.65 | 21.65          | 17.55          | 57.58          | 47.58          | 35.9         | 30.0         | L1    |         |
| 14  | 0.69304        | 4.40           | -1.10          | 12.69 | 17.09          | 11.59          | 56.00          | 46.00          | 38.9         | 34.4         | L1    |         |

Calculation: Result[dBuV]=Reading[dBuV]+C.Fac(LISN(AMN)+Cable+ATT)[dB]  
LISN(AMN): SLS-02

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Conducted Emission

### DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Shonan EMC Lab. No.2 Shielded Room  
Date : 2021/03/12

Company : Nintendo Co., Ltd.  
Kind of EUT : Game Controller  
Model No. : HAC-043  
Serial No. : S-1290  
Remarks : -

Mode : 3DH5 2441 MHz  
Order No. : 13434268S  
Power : AC 120 V / 60 Hz / USB 5 V  
Temp./Humi. : 20 deg.C / 34 %RH

Limit : FCC\_Part 15 Subpart C(15.207)

Engineer : Yusuke Tanikawara

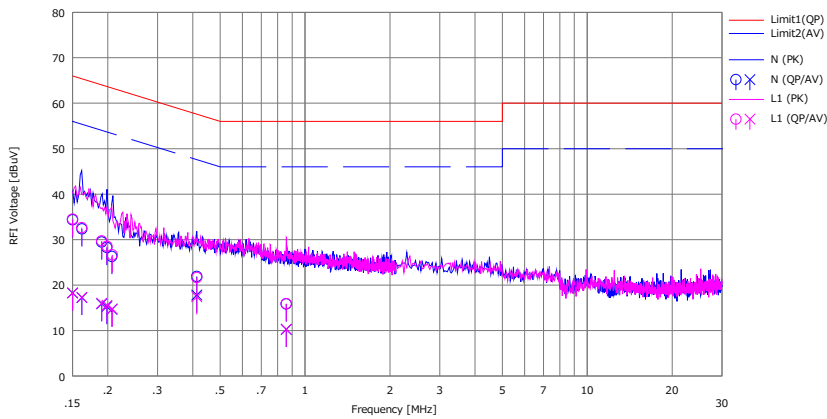

| No. | Freq.<br>[MHz] | Reading        |                | C.Fac | Results        |                | Limit          |                | Margin       |              | Phase | Comment |
|-----|----------------|----------------|----------------|-------|----------------|----------------|----------------|----------------|--------------|--------------|-------|---------|
|     |                | (QP)<br>[dBuV] | (AV)<br>[dBuV] |       | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dB] | (AV)<br>[dB] |       |         |
| 1   | 0.15000        | 21.80          | 5.70           | 12.56 | 34.36          | 18.26          | 66.00          | 56.00          | 31.6         | 37.7         | N     |         |
| 2   | 0.16198        | 19.80          | 4.70           | 12.56 | 32.36          | 17.26          | 65.36          | 55.36          | 33.0         | 38.1         | N     |         |
| 3   | 0.19027        | 16.90          | 3.30           | 12.57 | 29.47          | 15.87          | 64.02          | 54.02          | 34.5         | 38.1         | N     |         |
| 4   | 0.19840        | 15.70          | 2.70           | 12.58 | 28.28          | 15.28          | 63.68          | 53.68          | 35.4         | 38.4         | N     |         |
| 5   | 0.20686        | 13.70          | 2.10           | 12.58 | 26.28          | 14.68          | 63.33          | 53.33          | 37.0         | 38.6         | N     |         |
| 6   | 0.41338        | 9.30           | 5.20           | 12.61 | 21.91          | 17.81          | 57.58          | 47.58          | 35.6         | 29.7         | N     |         |
| 7   | 0.85769        | 3.20           | -2.40          | 12.65 | 15.85          | 10.25          | 56.00          | 46.00          | 40.1         | 35.7         | N     |         |
| 8   | 0.15000        | 21.90          | 5.70           | 12.61 | 34.51          | 18.31          | 66.00          | 56.00          | 31.4         | 37.6         | L1    |         |
| 9   | 0.16172        | 20.00          | 4.70           | 12.62 | 32.62          | 17.32          | 65.38          | 55.38          | 32.7         | 38.0         | L1    |         |
| 10  | 0.19026        | 17.10          | 3.40           | 12.63 | 29.73          | 16.03          | 64.03          | 54.03          | 34.3         | 38.0         | L1    |         |
| 11  | 0.19871        | 15.90          | 2.90           | 12.65 | 28.55          | 15.55          | 63.66          | 53.66          | 35.1         | 38.1         | L1    |         |
| 12  | 0.20737        | 14.00          | 2.10           | 12.65 | 26.65          | 14.75          | 63.31          | 53.31          | 36.6         | 38.5         | L1    |         |
| 13  | 0.41338        | 9.00           | 4.80           | 12.65 | 21.65          | 17.45          | 57.58          | 47.58          | 35.9         | 30.1         | L1    |         |
| 14  | 0.85787        | 3.20           | -2.40          | 12.71 | 15.91          | 10.31          | 56.00          | 46.00          | 40.0         | 35.6         | L1    |         |

Calculation: Result[dBuV]=Reading[dBuV]+C.Fac(LISN(AMN))+Cable+ATT[dB]  
LISN(AMN):SLS-02

## Conducted Emission

### DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Shonan EMC Lab. No.2 Shielded Room  
Date : 2021/03/12

Company : Nintendo Co., Ltd.  
Kind of EUT : Game Controller  
Model No. : HAC-043  
Serial No. : S-1290  
Remarks : -

Mode : 3DH5 2480 MHz  
Order No. : 13434268S  
Power : AC 120 V / 60 Hz / USB 5 V  
Temp./Humi. : 20 deg.C / 34 %RH

Limit : FCC\_Part 15 Subpart C(15.207)

Engineer : Yusuke Tanikawara

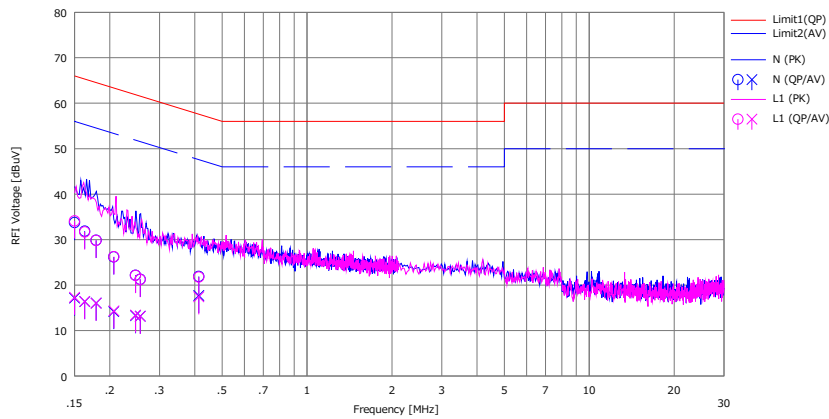

| No. | Freq.<br>[MHz] | Reading        |                | C.Fac | Results        |                | Limit          |                | Margin       |              | Phase | Comment |
|-----|----------------|----------------|----------------|-------|----------------|----------------|----------------|----------------|--------------|--------------|-------|---------|
|     |                | (QP)<br>[dBuV] | (AV)<br>[dBuV] |       | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dBuV] | (AV)<br>[dBuV] | (QP)<br>[dB] | (AV)<br>[dB] |       |         |
| 1   | 0.15000        | 21.20          | 4.60           | 12.56 | 33.76          | 17.16          | 66.00          | 56.00          | 32.2         | 38.8         | N     |         |
| 2   | 0.16294        | 19.30          | 3.80           | 12.56 | 31.86          | 16.36          | 65.31          | 55.31          | 33.4         | 38.9         | N     |         |
| 3   | 0.17896        | 17.30          | 3.50           | 12.56 | 29.86          | 16.06          | 64.53          | 54.53          | 34.6         | 38.4         | N     |         |
| 4   | 0.20654        | 13.60          | 1.60           | 12.58 | 26.18          | 14.18          | 63.34          | 53.34          | 37.1         | 39.1         | N     |         |
| 5   | 0.24659        | 9.60           | 0.70           | 12.57 | 22.17          | 13.27          | 61.87          | 51.87          | 39.7         | 38.6         | N     |         |
| 6   | 0.25649        | 8.70           | 0.60           | 12.57 | 21.27          | 13.17          | 61.54          | 51.54          | 40.2         | 38.3         | N     |         |
| 7   | 0.41338        | 9.30           | 5.10           | 12.61 | 21.91          | 17.71          | 57.58          | 47.58          | 35.6         | 29.8         | N     |         |
| 8   | 0.15000        | 21.50          | 4.70           | 12.61 | 34.11          | 17.31          | 66.00          | 56.00          | 31.8         | 38.6         | L1    |         |
| 9   | 0.16298        | 19.20          | 3.90           | 12.49 | 31.69          | 16.39          | 65.31          | 55.31          | 33.6         | 38.9         | L1    |         |
| 10  | 0.17869        | 17.20          | 3.40           | 12.63 | 29.83          | 16.03          | 64.55          | 54.55          | 34.7         | 38.5         | L1    |         |
| 11  | 0.20689        | 13.60          | 1.70           | 12.65 | 26.25          | 14.35          | 63.33          | 53.33          | 37.0         | 38.9         | L1    |         |
| 12  | 0.24679        | 9.50           | 0.80           | 12.62 | 22.12          | 13.42          | 61.86          | 51.86          | 39.7         | 38.4         | L1    |         |
| 13  | 0.25641        | 8.60           | 0.50           | 12.62 | 21.22          | 13.12          | 61.55          | 51.55          | 40.3         | 38.4         | L1    |         |
| 14  | 0.41338        | 9.10           | 4.80           | 12.65 | 21.75          | 17.45          | 57.58          | 47.58          | 35.8         | 30.1         | L1    |         |

Calculation: Result[dBuV]=Reading[dBuV]+C.Fac(LISN(AMN)+Cable+ATT)[dB]  
LISN(AMN):SLS-02

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## 20 dB Bandwidth, 99 % Occupied Bandwidth and Carrier Frequency Separation


Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx, Hopping Off, Tx, Hopping On

| Mode | Freq.<br>[MHz] | 20 dB Bandwidth<br>[MHz] | 99 % Occupied<br>Bandwidth<br>[kHz] | Carrier Frequency<br>Separation<br>[MHz] | Limit for Carrier<br>Frequency separation<br>[MHz] |
|------|----------------|--------------------------|-------------------------------------|------------------------------------------|----------------------------------------------------|
| DH5  | 2402.0         | 0.945                    | 885.013                             | 1.000                                    | $\geq 0.630$                                       |
| DH5  | 2441.0         | 0.944                    | 885.001                             | 1.000                                    | $\geq 0.630$                                       |
| DH5  | 2480.0         | 0.948                    | 882.570                             | 1.000                                    | $\geq 0.632$                                       |
| DH5  | Hopping On     | -                        | 78589.2                             | -                                        | -                                                  |
| 3DH5 | 2402.0         | 1.319                    | 1214.9                              | 1.000                                    | $\geq 0.880$                                       |
| 3DH5 | 2441.0         | 1.319                    | 1215.2                              | 1.000                                    | $\geq 0.879$                                       |
| 3DH5 | 2480.0         | 1.320                    | 1216.2                              | 1.000                                    | $\geq 0.880$                                       |
| 3DH5 | Hopping On     | -                        | 78755.8                             | -                                        | -                                                  |

Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).

No limit applies to 20 dB Bandwidth.

## 20 dB Bandwidth and 99 % Occupied Bandwidth

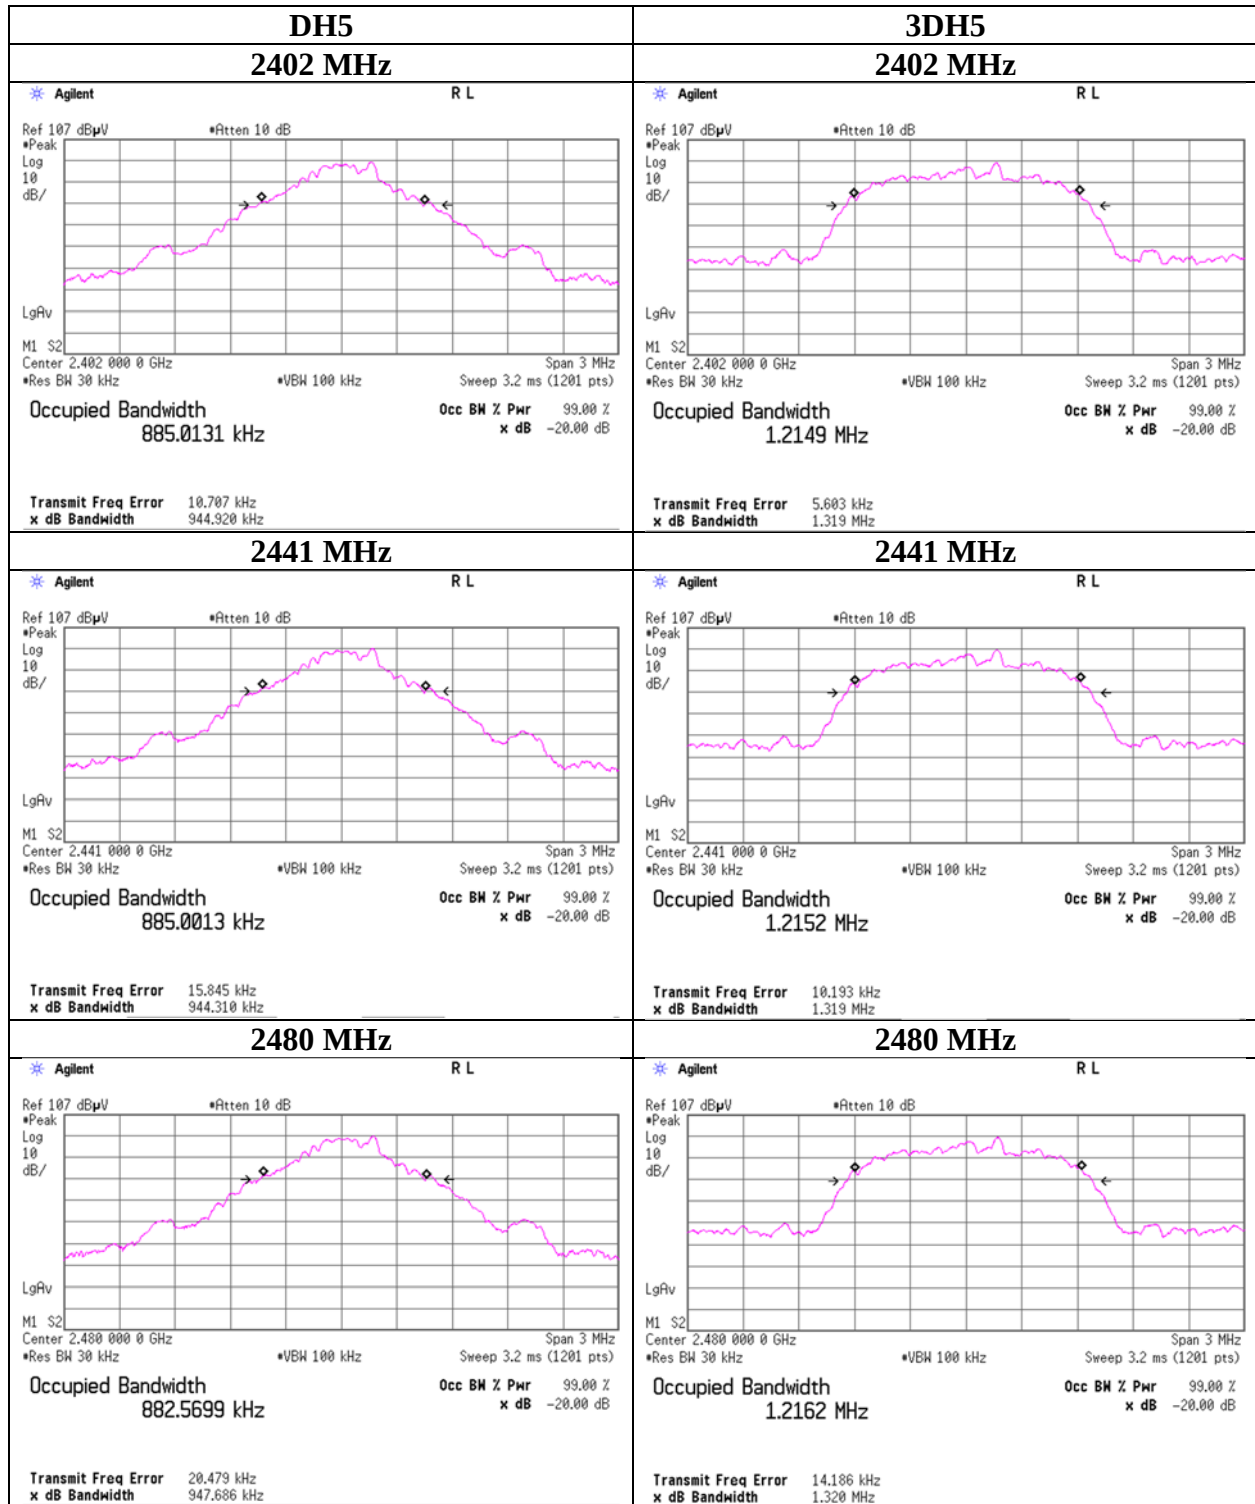

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## 20 dB Bandwidth and 99 % Occupied Bandwidth

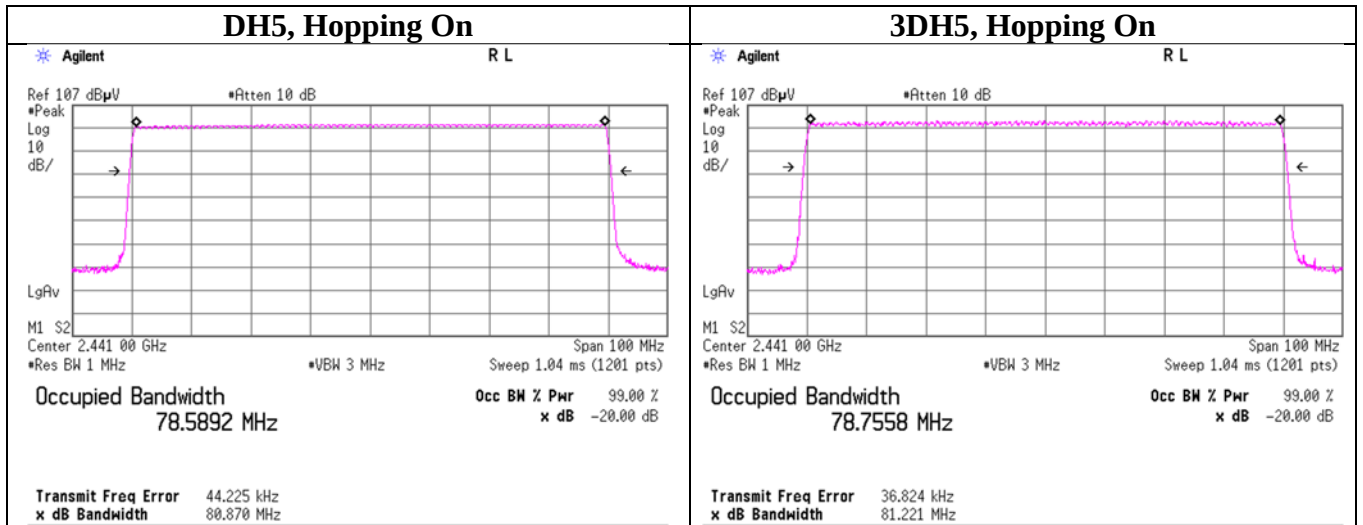

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Carrier Frequency Separation

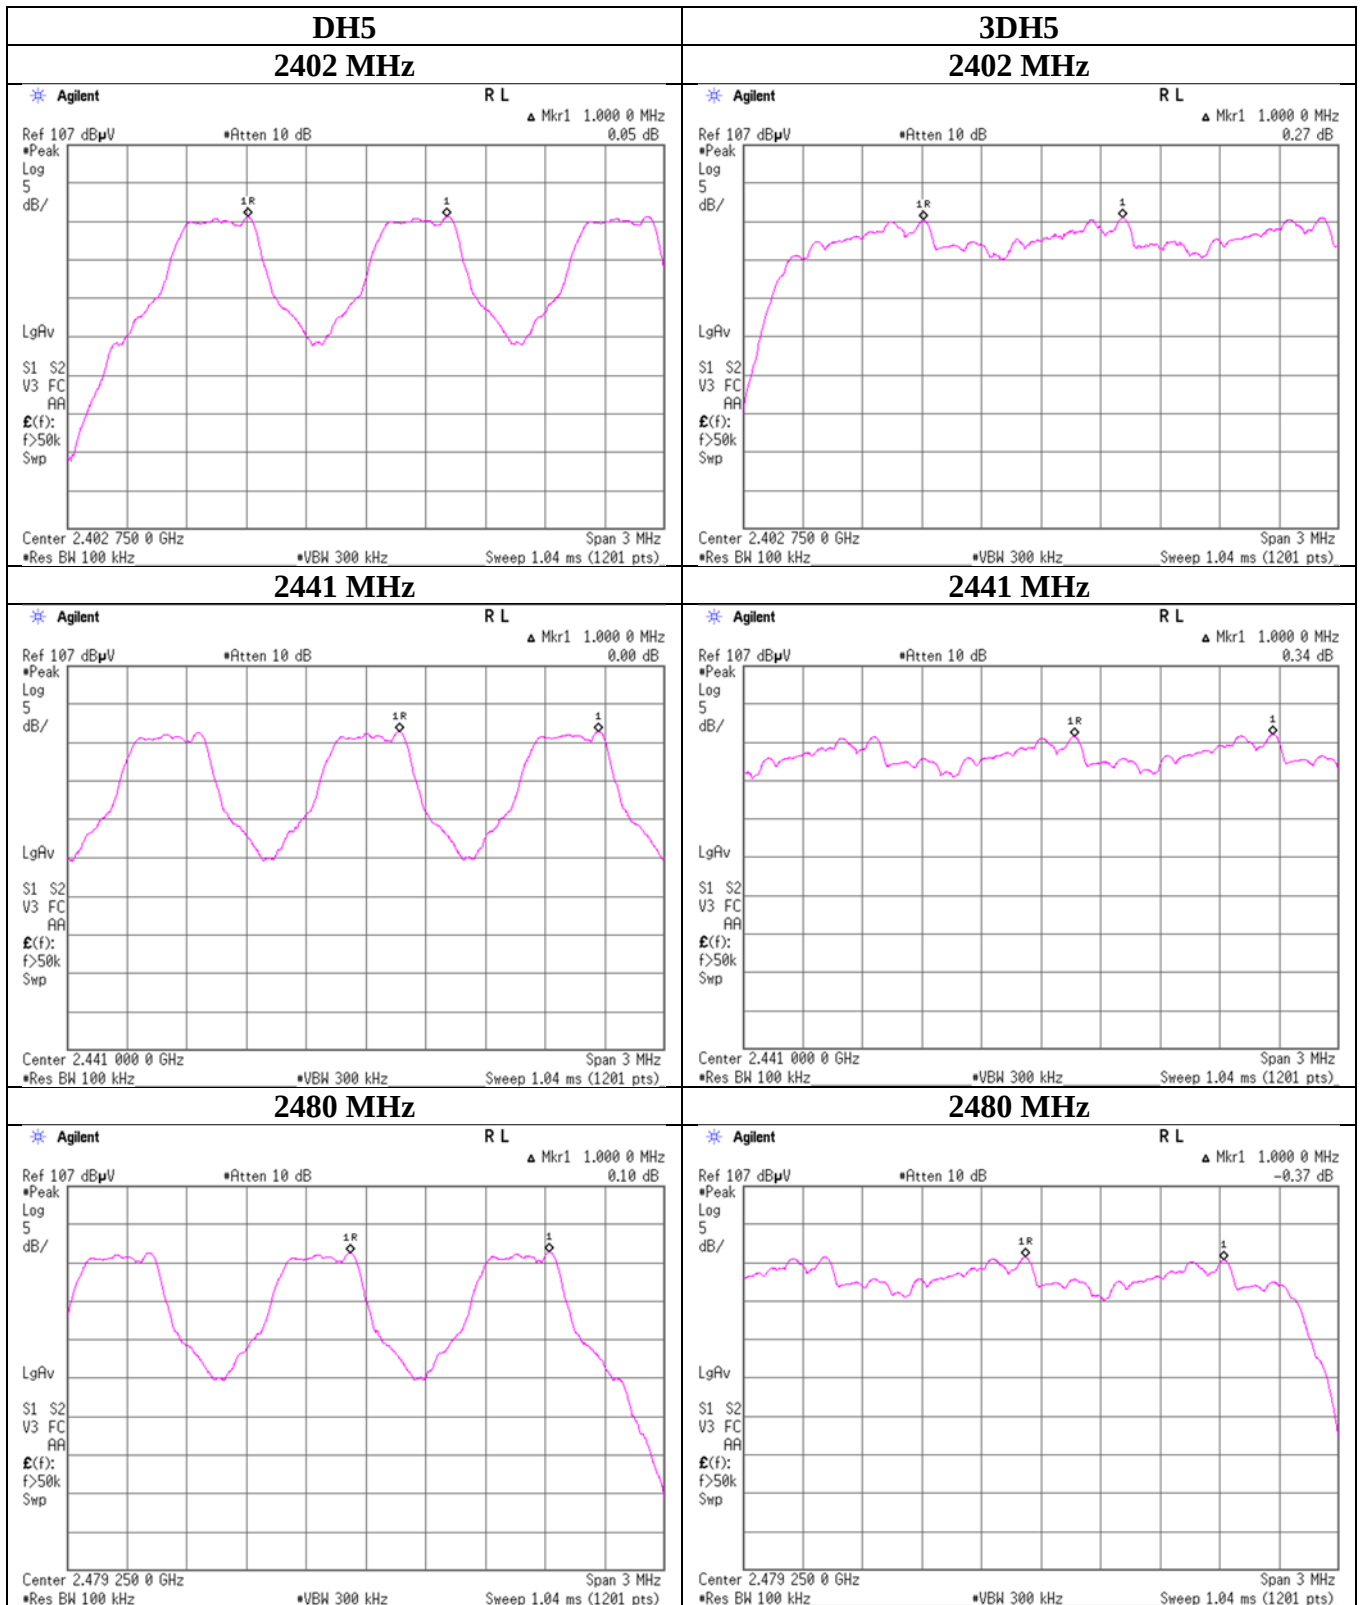

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


### **Number of Hopping Frequency**

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx, Hopping On

| Mode | Number of channel<br>[channels] | Limit<br>[channels] |
|------|---------------------------------|---------------------|
| DH5  | 79                              | $\geq 15$           |
| 3DH5 | 79                              | $\geq 15$           |

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

## Number of Hopping Frequency

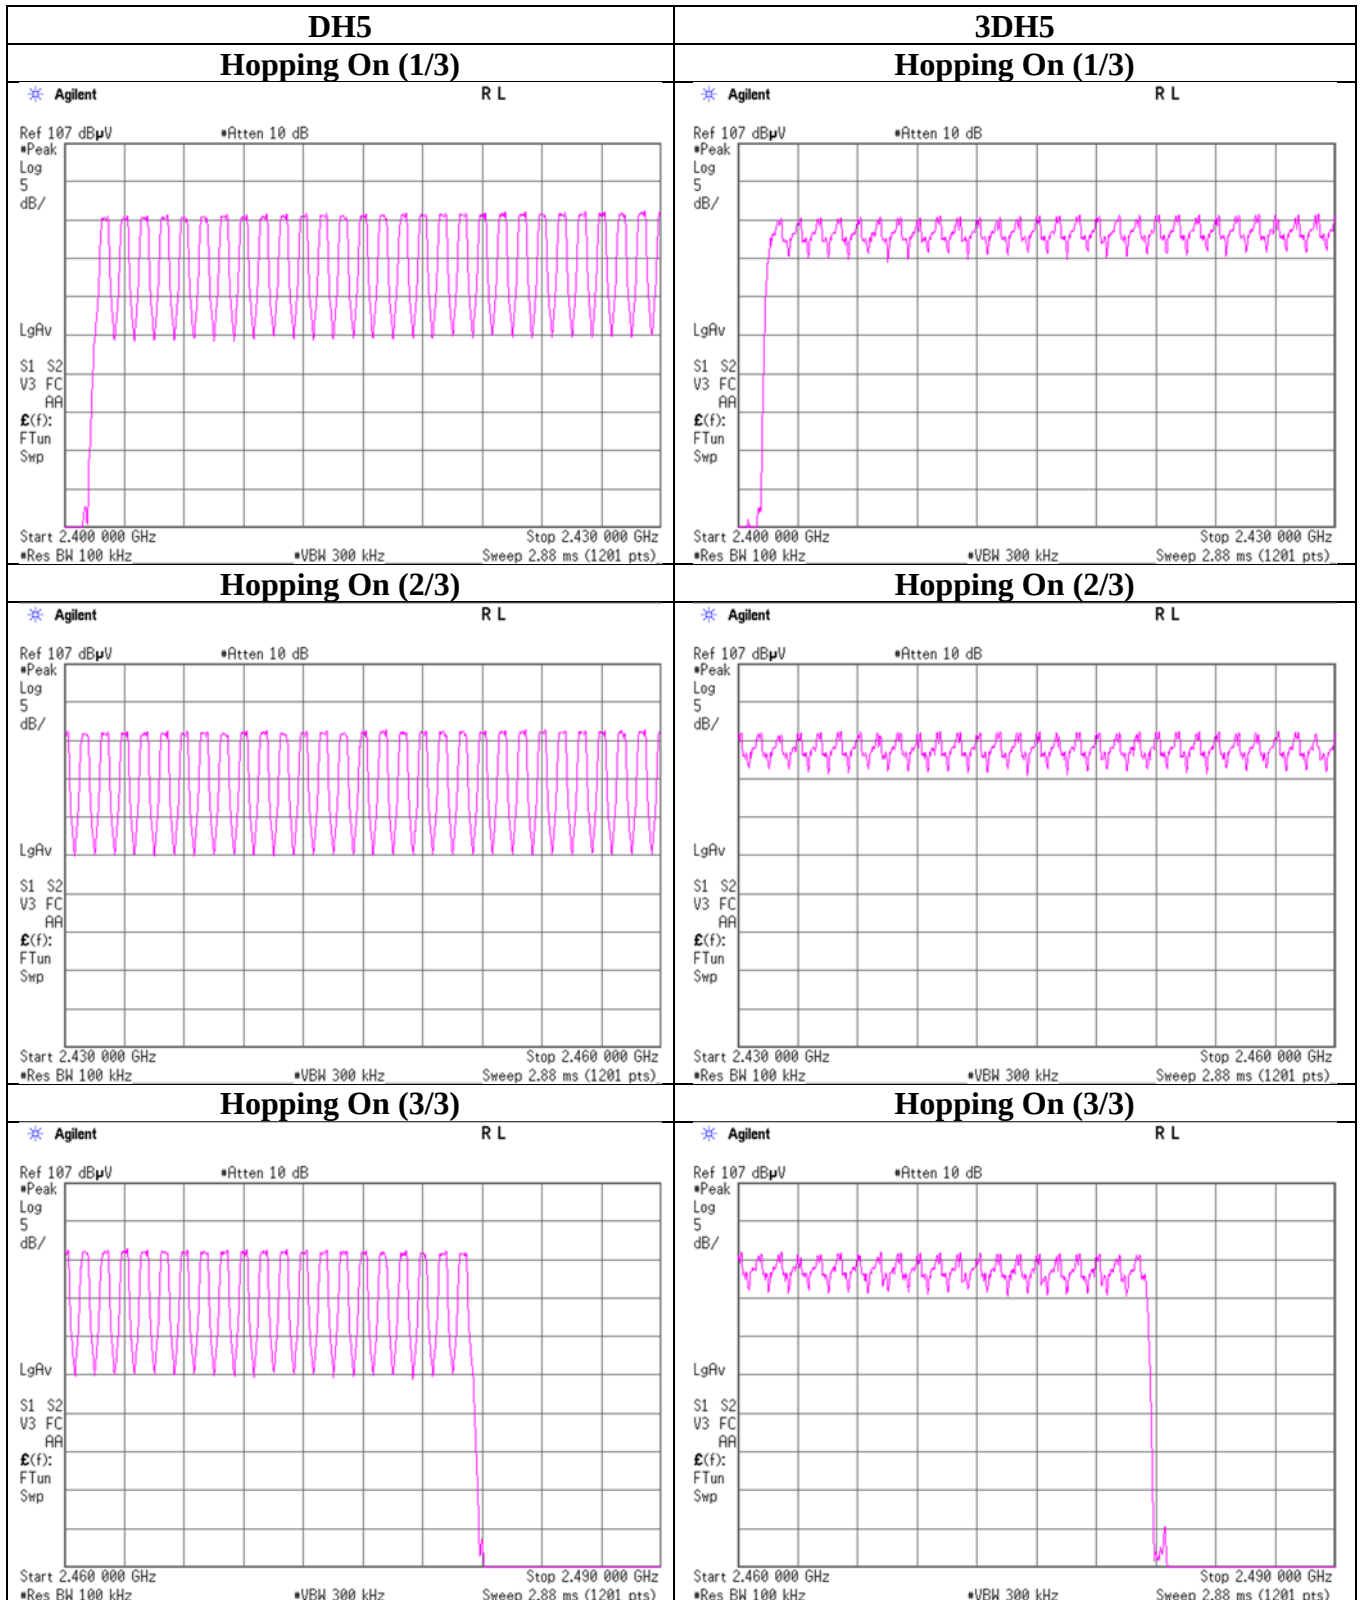

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Dwell time

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx, Hopping On

| Mode | Number of transmission<br>in a 31.6(79 Hopping x 0.4)<br>/ 12.8 (32 Hopping x 0.4) second period |   |          |                       | Length of<br>transmission<br>[msec] | Result<br>[msec] | Limit<br>[msec] |
|------|--------------------------------------------------------------------------------------------------|---|----------|-----------------------|-------------------------------------|------------------|-----------------|
| DH1  | 51.6 times                                                                                       | / | 5 sec. x | 31.6 sec. = 327 times | 0.423                               | 138              | 400             |
| DH3  | 29.6 times                                                                                       | / | 5 sec. x | 31.6 sec. = 188 times | 1.682                               | 316              | 400             |
| DH5  | 21.0 times                                                                                       | / | 5 sec. x | 31.6 sec. = 133 times | 2.930                               | 390              | 400             |
| 3DH1 | 50.6 times                                                                                       | / | 5 sec. x | 31.6 sec. = 320 times | 0.428                               | 137              | 400             |
| 3DH3 | 27.6 times                                                                                       | / | 5 sec. x | 31.6 sec. = 175 times | 1.679                               | 294              | 400             |
| 3DH5 | 21.0 times                                                                                       | / | 5 sec. x | 31.6 sec. = 133 times | 2.930                               | 390              | 400             |

Sample Calculation

Result = Number of transmission x Length of transmission

\*Average data of 5 tests.(except Inquiry)


| Mode | Sampling [times] |    |    |    |    | Average<br>[times] |
|------|------------------|----|----|----|----|--------------------|
|      | 1                | 2  | 3  | 4  | 5  |                    |
| DH1  | 51               | 52 | 51 | 52 | 52 | 51.6               |
| DH3  | 28               | 29 | 31 | 31 | 29 | 29.6               |
| DH5  | 20               | 23 | 19 | 20 | 23 | 21.0               |
| 3DH1 | 51               | 50 | 50 | 52 | 50 | 50.6               |
| 3DH3 | 27               | 27 | 27 | 28 | 29 | 27.6               |
| 3DH5 | 20               | 20 | 24 | 20 | 21 | 21.0               |

Sample Calculation

Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in  $N \times 0.4s$ , where  $N$  is the number of channels being used in the hopping sequence ( $20 \leq N \leq 79$ ), is always less than  $0.4s$  regardless of packet size. This is confirmed in the test report for  $N = 79$ .

## Dwell time

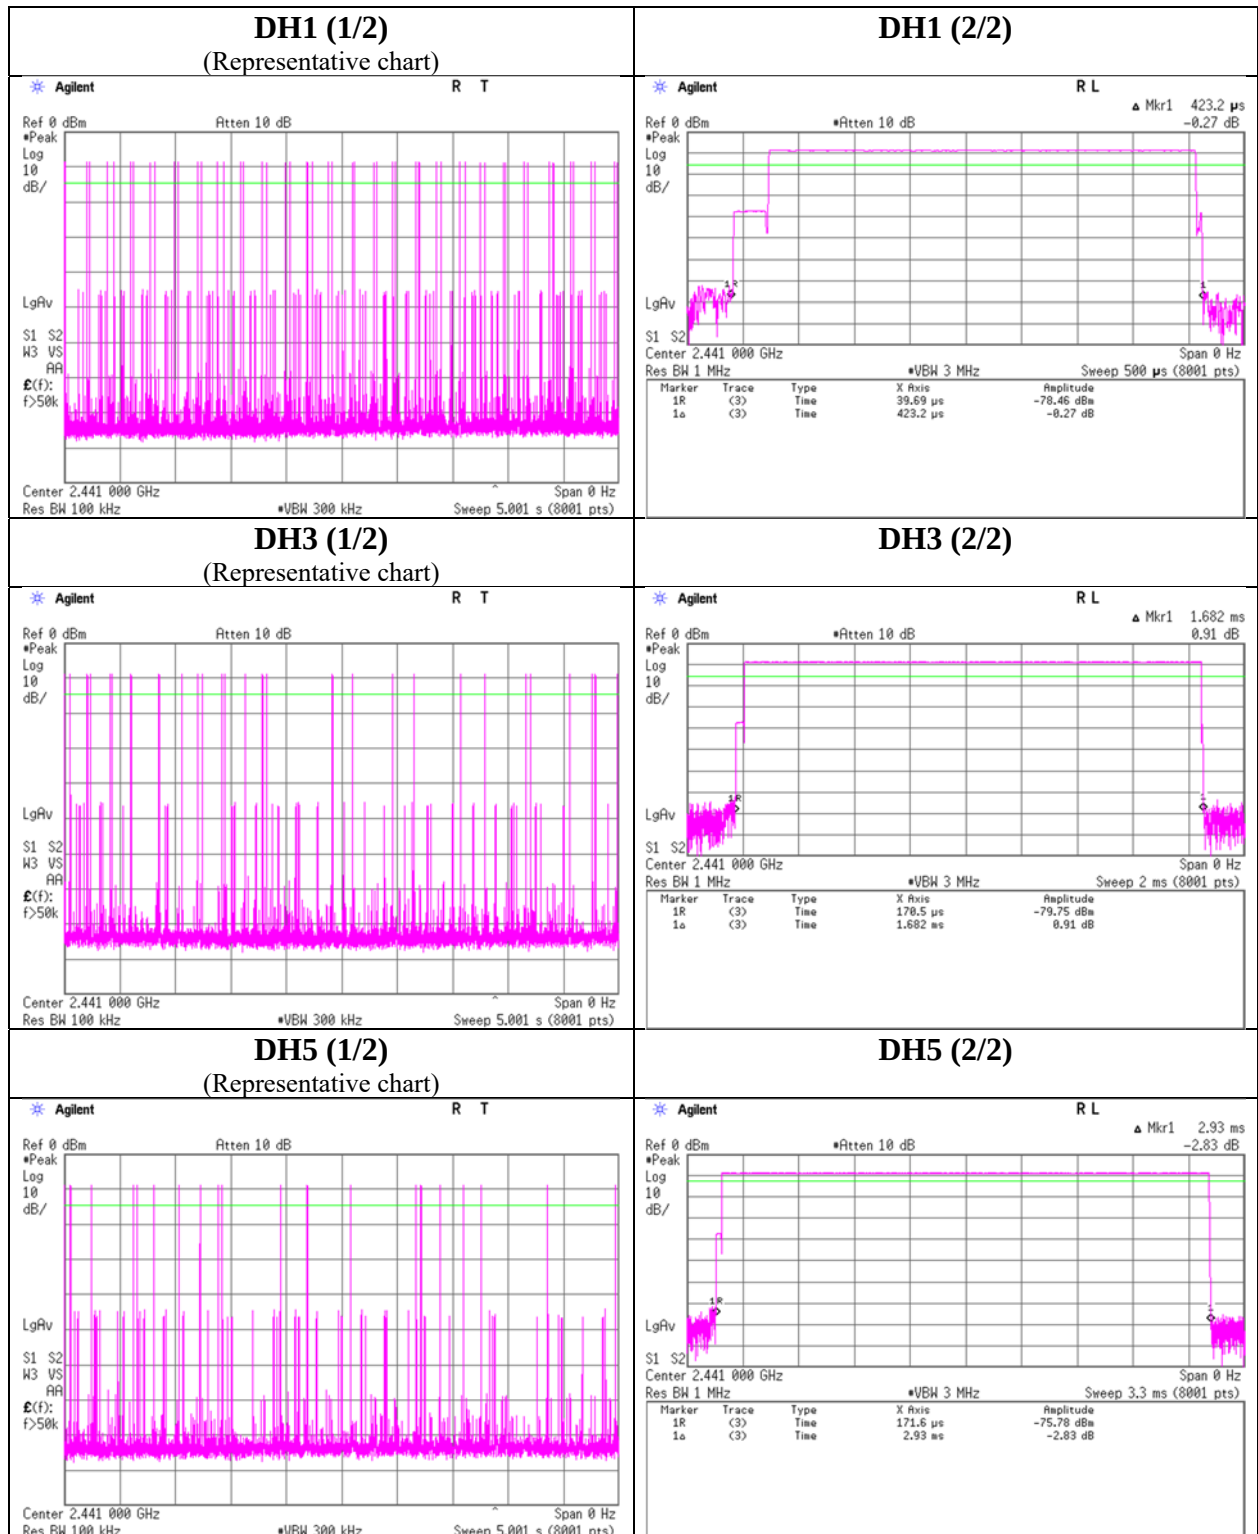

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Dwell time

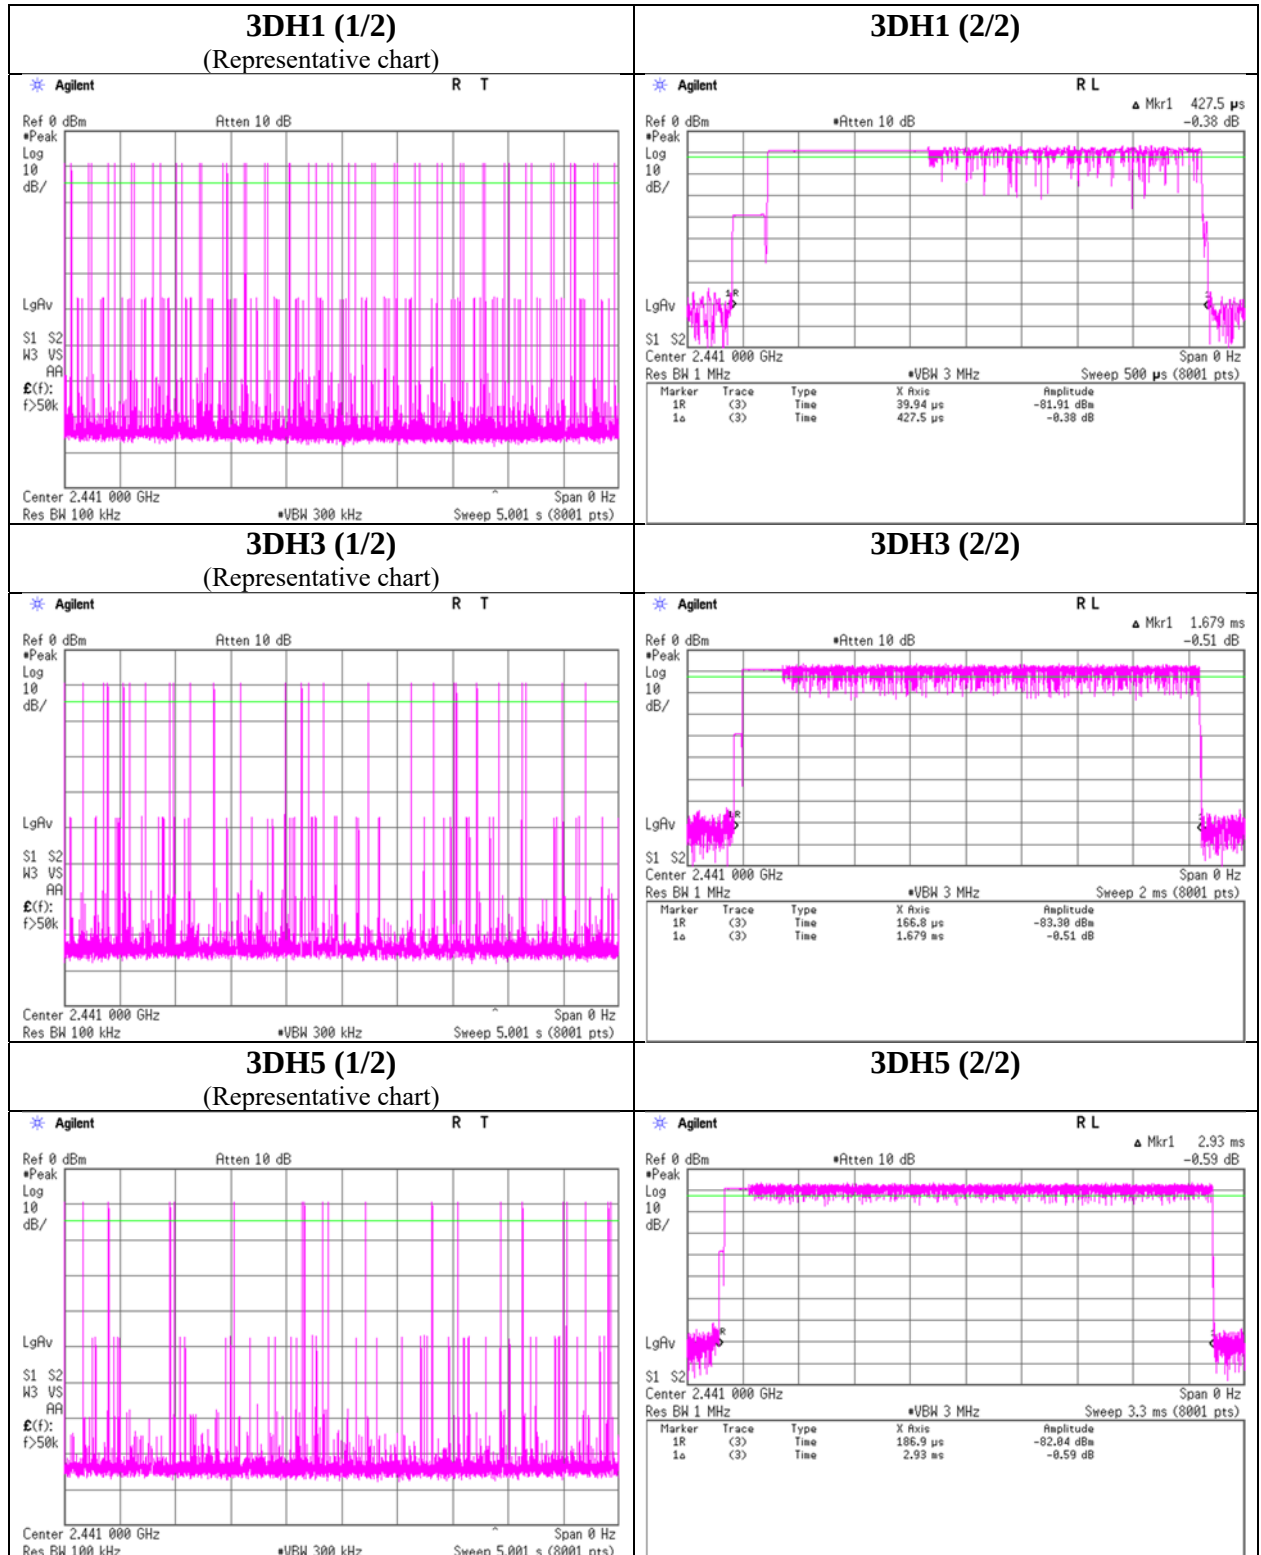

## Maximum Peak Output Power

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx, Hopping Off

|      |                |                  |                    |                     | Conducted Power |      |       |      |                | e.i.r.p. for RSS-247  |        |      |       |      |                |
|------|----------------|------------------|--------------------|---------------------|-----------------|------|-------|------|----------------|-----------------------|--------|------|-------|------|----------------|
| Mode | Freq.<br>[MHz] | Reading<br>[dBm] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Result          |      | Limit |      | Margin<br>[dB] | Antenna Gain<br>[dBi] | Result |      | Limit |      | Margin<br>[dB] |
|      |                |                  |                    |                     | [dBm]           | [mW] | [dBm] | [mW] |                |                       | [dBm]  | [mW] | [dBm] | [mW] |                |
| DH5  | 2402.0         | -9.53            | 2.33               | 9.81                | 2.61            | 1.82 | 20.96 | 125  | 18.35          | 1.99                  | 4.60   | 2.88 | 36.02 | 4000 | 31.42          |
| DH5  | 2441.0         | -8.76            | 2.34               | 9.82                | 3.40            | 2.19 | 20.96 | 125  | 17.56          | 1.99                  | 5.39   | 3.46 | 36.02 | 4000 | 30.63          |
| DH5  | 2480.0         | -8.91            | 2.35               | 9.82                | 3.26            | 2.12 | 20.96 | 125  | 17.70          | 1.99                  | 5.25   | 3.35 | 36.02 | 4000 | 30.77          |
| 2DH5 | 2402.0         | -7.36            | 2.33               | 9.81                | 4.78            | 3.01 | 20.96 | 125  | 16.18          | 1.99                  | 6.77   | 4.75 | 36.02 | 4000 | 29.25          |
| 2DH5 | 2441.0         | -6.82            | 2.34               | 9.82                | 5.34            | 3.42 | 20.96 | 125  | 15.62          | 1.99                  | 7.33   | 5.41 | 36.02 | 4000 | 28.69          |
| 2DH5 | 2480.0         | -7.28            | 2.35               | 9.82                | 4.89            | 3.08 | 20.96 | 125  | 16.07          | 1.99                  | 6.88   | 4.88 | 36.02 | 4000 | 29.14          |
| 3DH5 | 2402.0         | -7.22            | 2.33               | 9.81                | 4.92            | 3.10 | 20.96 | 125  | 16.04          | 1.99                  | 6.91   | 4.91 | 36.02 | 4000 | 29.11          |
| 3DH5 | 2441.0         | -6.72            | 2.34               | 9.82                | 5.44            | 3.50 | 20.96 | 125  | 15.52          | 1.99                  | 7.43   | 5.53 | 36.02 | 4000 | 28.59          |
| 3DH5 | 2480.0         | -7.15            | 2.35               | 9.82                | 5.02            | 3.18 | 20.96 | 125  | 15.94          | 1.99                  | 7.01   | 5.02 | 36.02 | 4000 | 29.01          |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20 ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20 dB BW without 2/3 relaxation, 125 mW power limit was applied to it.

## Average Output Power (Reference data for RF Exposure)

|                        |                                    |
|------------------------|------------------------------------|
| Report No.             | 13434268S-A-R2                     |
| Test place             | Shonan EMC Lab. No.5 Shielded Room |
| Date                   | February 19, 2021                  |
| Temperature / Humidity | 24 deg. C / 42 % RH                |
| Engineer               | Shiro Kobayashi                    |
| Mode                   | Tx, Hopping Off                    |

| Mode | Freq.<br>[MHz] | Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Result<br>(Time average) |      | Duty<br>factor<br>[dB] | Result<br>(Burst power average) |      |
|------|----------------|------------------|-----------------------|------------------------|--------------------------|------|------------------------|---------------------------------|------|
|      |                |                  |                       |                        | [dBm]                    | [mW] |                        | [dBm]                           | [mW] |
| DH5  | 2402.0         | -11.08           | 2.33                  | 9.81                   | 1.06                     | 1.28 | 1.08                   | 2.14                            | 1.64 |
| DH5  | 2441.0         | -10.25           | 2.34                  | 9.82                   | 1.91                     | 1.55 | 1.08                   | 2.99                            | 1.99 |
| DH5  | 2480.0         | -10.45           | 2.35                  | 9.82                   | 1.72                     | 1.49 | 1.08                   | 2.80                            | 1.91 |
| 2DH5 | 2402.0         | -11.16           | 2.33                  | 9.81                   | 0.98                     | 1.25 | 1.08                   | 2.06                            | 1.61 |
| 2DH5 | 2441.0         | -10.56           | 2.34                  | 9.82                   | 1.60                     | 1.45 | 1.08                   | 2.68                            | 1.85 |
| 2DH5 | 2480.0         | -11.03           | 2.35                  | 9.82                   | 1.14                     | 1.30 | 1.08                   | 2.22                            | 1.67 |
| 3DH5 | 2402.0         | -11.15           | 2.33                  | 9.81                   | 0.99                     | 1.26 | 1.08                   | 2.07                            | 1.61 |
| 3DH5 | 2441.0         | -10.56           | 2.34                  | 9.82                   | 1.60                     | 1.45 | 1.08                   | 2.68                            | 1.85 |
| 3DH5 | 2480.0         | -11.02           | 2.35                  | 9.82                   | 1.15                     | 1.30 | 1.08                   | 2.23                            | 1.67 |

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

\*The equipment and cables were not used for factor 0 dB of the data sheets.


## Burst Rate Confirmation

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx, Hopping Off


### DH5

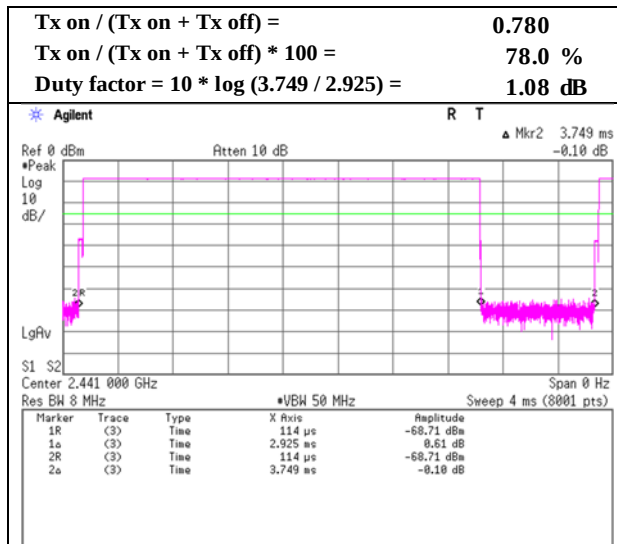

### 2DH5

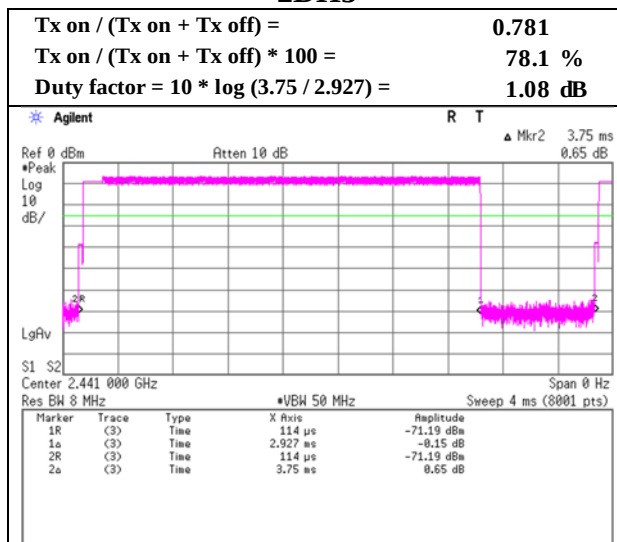

### 3DH5

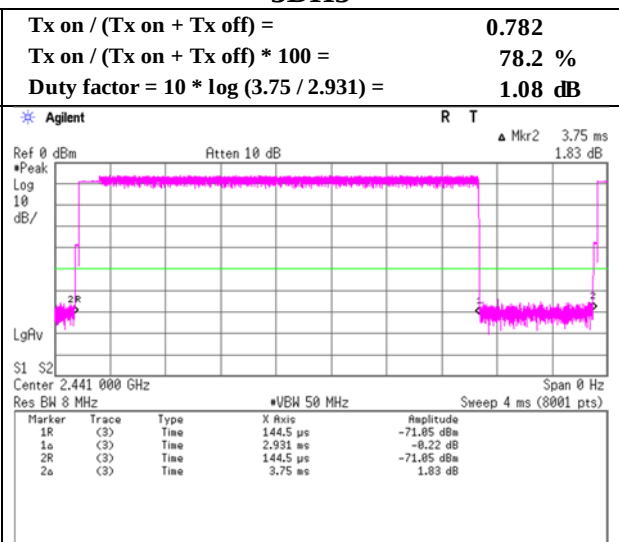

## Radiated Spurious Emission

|                        |                               |                  |                    |
|------------------------|-------------------------------|------------------|--------------------|
| Report No.             | 13434268S-A-R2                |                  |                    |
| Test place             | Shonan EMC Lab.               |                  |                    |
| Semi Anechoic Chamber  | No.3                          | No.3             | No.3               |
| Date                   | March 4, 2021                 | March 3, 2021    | March 4, 2021      |
| Temperature / Humidity | 28 deg.C, 35 %RH              | 26 deg.C, 39 %RH | 28 deg.C, 35 %RH   |
| Engineer               | Hiromasa Sato                 | Hiromasa Sato    | Hiromasa Sato      |
|                        | (30MHz -1 GHz)                | (1 GHz -10 GHz)  | (10 GHz -26.5 GHz) |
| Mode                   | Tx, Hopping Off, DH5 2402 MHz |                  |                    |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark                 |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|------------------------|
| Hori.    | 182.254         | QP       | 30.42          | 16.14           | 7.79      | 32.06     | 0.00                 | 22.29           | 43.5           | 21.2        | 163         | 99          | -                      |
| Hori.    | 319.045         | QP       | 26.33          | 14.10           | 8.63      | 31.96     | 0.00                 | 17.10           | 46.0           | 28.9        | 149         | 257         | -                      |
| Hori.    | 582.409         | QP       | 27.15          | 18.84           | 9.74      | 31.92     | 0.00                 | 23.81           | 46.0           | 22.1        | 100         | 356         | -                      |
| Hori.    | 2390.000        | PK       | 46.96          | 28.41           | 14.42     | 41.62     | 2.31                 | 50.48           | 73.9           | 23.4        | 147         | 134         | -                      |
| Hori.    | 4804.000        | PK       | 47.76          | 31.60           | 6.92      | 42.89     | 2.31                 | 45.70           | 73.9           | 28.2        | 150         | 0           | -                      |
| Hori.    | 7206.000        | PK       | 47.92          | 37.60           | 8.33      | 43.39     | 2.31                 | 52.77           | 73.9           | 21.1        | 150         | 0           | -                      |
| Hori.    | 9608.000        | PK       | 47.52          | 38.92           | 9.49      | 43.18     | 2.31                 | 55.06           | 73.9           | 18.8        | 150         | 0           | -                      |
| Hori.    | 2390.000        | AV       | 35.50          | 28.41           | 14.42     | 41.62     | 2.31                 | 39.02           | 53.9           | 14.8        | 147         | 134         | VBW:360 Hz             |
| Hori.    | 4804.000        | AV       | 37.23          | 31.60           | 6.92      | 42.89     | 2.31                 | 35.17           | 53.9           | 18.7        | 150         | 0           | VBW:360 Hz,Floor noise |
| Hori.    | 7206.000        | AV       | 37.40          | 37.60           | 8.33      | 43.39     | 2.31                 | 42.25           | 53.9           | 11.6        | 150         | 0           | VBW:360 Hz,Floor noise |
| Hori.    | 9608.000        | AV       | 37.12          | 38.92           | 9.49      | 43.18     | 2.31                 | 44.66           | 53.9           | 9.2         | 150         | 0           | VBW:360 Hz,Floor noise |
| Vert.    | 49.304          | QP       | 28.34          | 11.43           | 6.77      | 32.17     | 0.00                 | 14.37           | 40.0           | 25.6        | 100         | 36          | -                      |
| Vert.    | 56.492          | QP       | 32.02          | 9.07            | 6.67      | 32.16     | 0.00                 | 15.60           | 40.0           | 24.4        | 103         | 221         | -                      |
| Vert.    | 73.329          | QP       | 28.83          | 6.38            | 7.04      | 32.15     | 0.00                 | 10.10           | 40.0           | 29.9        | 100         | 182         | -                      |
| Vert.    | 89.762          | QP       | 29.98          | 8.12            | 7.53      | 32.14     | 0.00                 | 13.49           | 43.5           | 30.0        | 100         | 22          | -                      |
| Vert.    | 105.465         | QP       | 31.05          | 11.13           | 7.26      | 32.13     | 0.00                 | 17.31           | 43.5           | 26.1        | 100         | 324         | -                      |
| Vert.    | 120.202         | QP       | 31.00          | 13.06           | 7.23      | 32.11     | 0.00                 | 19.18           | 43.5           | 24.3        | 100         | 345         | -                      |
| Vert.    | 182.580         | QP       | 30.30          | 16.14           | 7.79      | 32.06     | 0.00                 | 22.17           | 43.5           | 21.3        | 151         | 100         | -                      |
| Vert.    | 2390.000        | PK       | 46.76          | 28.41           | 14.42     | 41.62     | 2.31                 | 50.28           | 73.9           | 23.6        | 187         | 88          | -                      |
| Vert.    | 4804.000        | PK       | 48.46          | 31.60           | 6.92      | 42.89     | 2.31                 | 46.40           | 73.9           | 27.5        | 150         | 0           | -                      |
| Vert.    | 7206.000        | PK       | 47.56          | 37.60           | 8.33      | 43.39     | 2.31                 | 52.41           | 73.9           | 21.4        | 150         | 0           | -                      |
| Vert.    | 9608.000        | PK       | 47.38          | 38.92           | 9.49      | 43.18     | 2.31                 | 54.92           | 73.9           | 18.9        | 150         | 0           | -                      |
| Vert.    | 2390.000        | AV       | 35.39          | 28.41           | 14.42     | 41.62     | 2.31                 | 38.91           | 53.9           | 14.9        | 187         | 88          | VBW:360 Hz             |
| Vert.    | 4804.000        | AV       | 37.16          | 31.60           | 6.92      | 42.89     | 2.31                 | 35.10           | 53.9           | 18.8        | 150         | 0           | VBW:360 Hz,Floor noise |
| Vert.    | 7206.000        | AV       | 37.38          | 37.60           | 8.33      | 43.39     | 2.31                 | 42.23           | 53.9           | 11.6        | 150         | 0           | VBW:360 Hz,Floor noise |
| Vert.    | 9608.000        | AV       | 37.27          | 38.92           | 9.49      | 43.18     | 2.31                 | 44.81           | 53.9           | 9.0         | 150         | 0           | VBW:360 Hz,Floor noise |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz :  $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.31\text{ dB}$

10 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|---------|
| Hori.    | 2402.000        | PK       | 94.37          | 28.38           | 14.44     | 41.63     | 2.31                 | 97.87           | -              | -           | Carrier |
| Hori.    | 2400.000        | PK       | 39.87          | 28.38           | 14.43     | 41.63     | 2.31                 | 43.36           | 77.8           | 34.4        | -       |
| Vert.    | 2402.000        | PK       | 94.64          | 28.38           | 14.44     | 41.63     | 2.31                 | 98.14           | -              | -           | Carrier |
| Vert.    | 2400.000        | PK       | 39.84          | 28.38           | 14.43     | 41.63     | 2.31                 | 43.33           | 78.1           | 34.7        | -       |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz :  $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.31\text{ dB}$

10 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**\*These results have sufficient margin without taking account Duty cycle correction factor.**

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                               |
|------------------------|-------------------------------|
| Report No.             | 13434268S-A-R2                |
| Test place             | Shonan EMC Lab.               |
| Semi Anechoic Chamber  | No.3                          |
| Date                   | March 3, 2021                 |
| Temperature / Humidity | 26 deg.C, 39 %RH              |
| Engineer               | Hiromasa Sato                 |
|                        | (1 GHz -10 GHz)               |
| Mode                   | Tx, Hopping Off, DH5 2402 MHz |

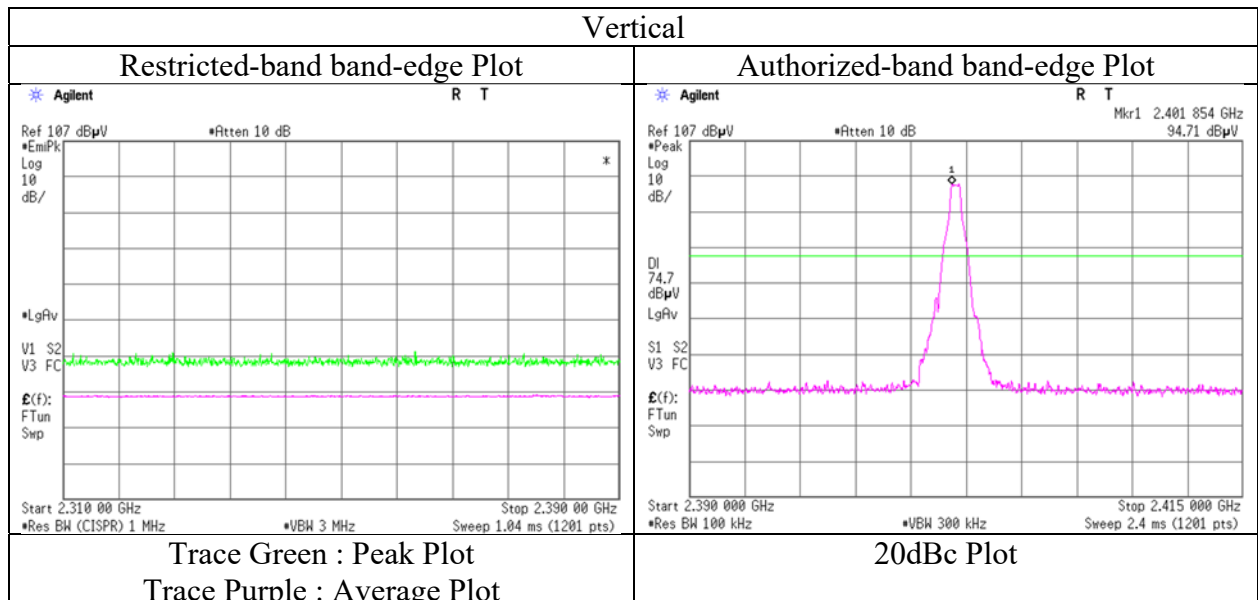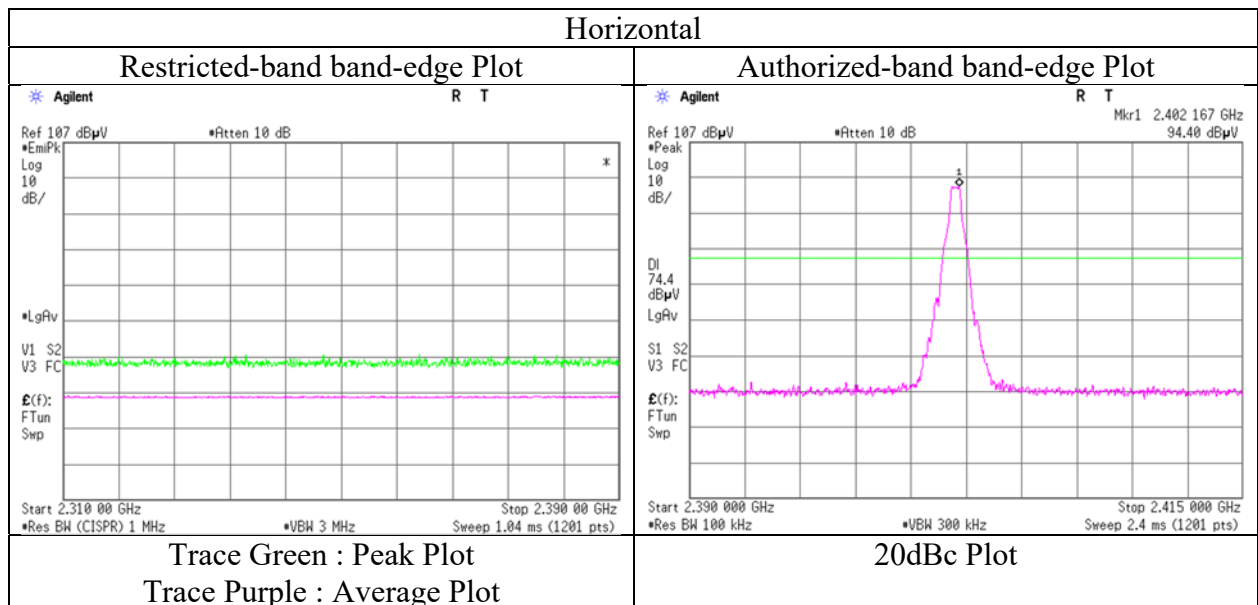

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

|                        |                               |                  |                    |
|------------------------|-------------------------------|------------------|--------------------|
| Report No.             | 13434268S-A-R2                |                  |                    |
| Test place             | Shonan EMC Lab.               |                  |                    |
| Semi Anechoic Chamber  | No.3                          | No.3             | No.3               |
| Date                   | March 4, 2021                 | March 3, 2021    | March 4, 2021      |
| Temperature / Humidity | 28 deg.C, 35 %RH              | 26 deg.C, 39 %RH | 28 deg.C, 35 %RH   |
| Engineer               | Hiromasa Sato                 | Hiromasa Sato    | Hiromasa Sato      |
|                        | (30MHz -1 GHz)                | (1 GHz -10 GHz)  | (10 GHz -26.5 GHz) |
| Mode                   | Tx, Hopping Off, DH5 2441 MHz |                  |                    |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Distance<br>Factor [dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark                  |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|-------------------------|--------------------|-------------------|----------------|----------------|----------------|-------------------------|
| Hori.    | 182.096            | QP       | 26.38             | 16.14              | 7.79         | 32.06        | 0.00                    | 18.25              | 43.5              | 25.2           | 147            | 179            | -                       |
| Hori.    | 283.877            | QP       | 27.05             | 13.40              | 8.44         | 31.98        | 0.00                    | 16.91              | 46.0              | 29.0           | 100            | 105            | -                       |
| Hori.    | 318.978            | QP       | 30.17             | 14.10              | 8.63         | 31.96        | 0.00                    | 20.94              | 46.0              | 25.0           | 100            | 260            | -                       |
| Hori.    | 4882.000           | PK       | 48.82             | 31.63              | 6.96         | 42.89        | 2.31                    | 46.83              | 73.9              | 27.0           | 150            | 0              | -                       |
| Hori.    | 7323.000           | PK       | 48.90             | 37.71              | 8.39         | 43.52        | 2.31                    | 53.79              | 73.9              | 20.1           | 150            | 0              | -                       |
| Hori.    | 9764.000           | PK       | 48.48             | 39.19              | 9.56         | 42.97        | 2.31                    | 56.57              | 73.9              | 17.3           | 150            | 0              | -                       |
| Hori.    | 4882.000           | AV       | 36.62             | 31.63              | 6.96         | 42.89        | 2.31                    | 34.63              | 53.9              | 19.2           | 150            | 0              | VBW:360 Hz, Floor noise |
| Hori.    | 7323.000           | AV       | 37.44             | 37.71              | 8.39         | 43.52        | 2.31                    | 42.33              | 53.9              | 11.5           | 150            | 0              | VBW:360 Hz, Floor noise |
| Hori.    | 9764.000           | AV       | 37.11             | 39.19              | 9.56         | 42.97        | 2.31                    | 45.20              | 53.9              | 8.7            | 150            | 0              | VBW:360 Hz, Floor noise |
| Vert.    | 44.772             | QP       | 25.46             | 13.07              | 6.73         | 32.17        | 0.00                    | 13.09              | 40.0              | 26.9           | 100            | 2              | -                       |
| Vert.    | 56.788             | QP       | 31.13             | 8.99               | 6.65         | 32.16        | 0.00                    | 14.61              | 40.0              | 25.3           | 100            | 25             | -                       |
| Vert.    | 89.464             | QP       | 31.22             | 8.07               | 7.53         | 32.14        | 0.00                    | 14.68              | 43.5              | 28.8           | 100            | 173            | -                       |
| Vert.    | 106.129            | QP       | 30.62             | 11.24              | 7.26         | 32.13        | 0.00                    | 16.99              | 43.5              | 26.5           | 100            | 84             | -                       |
| Vert.    | 121.489            | QP       | 28.64             | 13.17              | 7.25         | 32.11        | 0.00                    | 16.95              | 43.5              | 26.5           | 100            | 57             | -                       |
| Vert.    | 179.335            | QP       | 26.46             | 15.95              | 7.80         | 32.07        | 0.00                    | 18.14              | 43.5              | 25.3           | 100            | 179            | -                       |
| Vert.    | 318.907            | QP       | 29.81             | 14.10              | 8.63         | 31.96        | 0.00                    | 20.58              | 46.0              | 25.4           | 153            | 165            | -                       |
| Vert.    | 4882.000           | PK       | 48.96             | 31.63              | 6.96         | 42.89        | 2.31                    | 46.97              | 73.9              | 26.9           | 150            | 0              | -                       |
| Vert.    | 7323.000           | PK       | 48.34             | 37.71              | 8.39         | 43.52        | 2.31                    | 53.23              | 73.9              | 20.6           | 150            | 0              | -                       |
| Vert.    | 9764.000           | PK       | 48.13             | 39.19              | 9.56         | 42.97        | 2.31                    | 56.22              | 73.9              | 17.6           | 150            | 0              | -                       |
| Vert.    | 4882.000           | AV       | 36.57             | 31.63              | 6.96         | 42.89        | 2.31                    | 34.58              | 53.9              | 19.3           | 150            | 0              | VBW:360 Hz, Floor noise |
| Vert.    | 7323.000           | AV       | 37.27             | 37.71              | 8.39         | 43.52        | 2.31                    | 42.16              | 53.9              | 11.7           | 150            | 0              | VBW:360 Hz, Floor noise |
| Vert.    | 9764.000           | AV       | 36.98             | 39.19              | 9.56         | 42.97        | 2.31                    | 45.07              | 53.9              | 8.8            | 150            | 0              | VBW:360 Hz, Floor noise |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz :  $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.31\text{ dB}$

10 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**\*These results have sufficient margin without taking account Duty cycle correction factor.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

|                        |                               |                  |                    |
|------------------------|-------------------------------|------------------|--------------------|
| Report No.             | 13434268S-A-R2                |                  |                    |
| Test place             | Shonan EMC Lab.               |                  |                    |
| Semi Anechoic Chamber  | No.3                          | No.3             | No.3               |
| Date                   | March 4, 2021                 | March 3, 2021    | March 4, 2021      |
| Temperature / Humidity | 28 deg.C, 35 %RH              | 26 deg.C, 39 %RH | 28 deg.C, 35 %RH   |
| Engineer               | Hiromasa Sato                 | Hiromasa Sato    | Hiromasa Sato      |
|                        | (30MHz -1 GHz)                | (1 GHz -10 GHz)  | (10 GHz -26.5 GHz) |
| Mode                   | Tx, Hopping Off, DH5 2480 MHz |                  |                    |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark                 |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|------------------------|
| Hori.    | 183.187         | QP       | 25.34          | 16.15           | 7.78      | 32.06     | 0.00                 | 17.21           | 43.5           | 26.2        | 214         | 139         | -                      |
| Hori.    | 288.040         | QP       | 27.65          | 13.42           | 8.47      | 31.98     | 0.00                 | 17.56           | 46.0           | 28.4        | 100         | 290         | -                      |
| Hori.    | 319.163         | QP       | 30.34          | 14.11           | 8.63      | 31.96     | 0.00                 | 21.12           | 46.0           | 24.8        | 100         | 274         | -                      |
| Hori.    | 2483.500        | PK       | 47.23          | 28.28           | 14.52     | 41.65     | 2.31                 | 50.69           | 73.9           | 23.2        | 257         | 325         | -                      |
| Hori.    | 4960.000        | PK       | 47.96          | 31.79           | 7.03      | 42.89     | 2.31                 | 46.20           | 73.9           | 27.7        | 150         | 0           | -                      |
| Hori.    | 7440.000        | PK       | 48.01          | 37.88           | 8.44      | 43.65     | 2.31                 | 52.99           | 73.9           | 20.9        | 150         | 0           | -                      |
| Hori.    | 9920.000        | PK       | 47.81          | 39.05           | 9.62      | 42.77     | 2.31                 | 56.02           | 73.9           | 17.8        | 150         | 0           | -                      |
| Hori.    | 2483.500        | AV       | 35.84          | 28.28           | 14.52     | 41.65     | 2.31                 | 39.30           | 53.9           | 14.6        | 257         | 325         | VBW:360 Hz             |
| Hori.    | 4960.000        | AV       | 36.88          | 31.79           | 7.03      | 42.89     | 2.31                 | 35.12           | 53.9           | 18.7        | 150         | 0           | VBW:360 Hz,Floor noise |
| Hori.    | 7440.000        | AV       | 36.87          | 37.88           | 8.44      | 43.65     | 2.31                 | 41.85           | 53.9           | 12.0        | 150         | 0           | VBW:360 Hz,Floor noise |
| Hori.    | 9920.000        | AV       | 36.39          | 39.05           | 9.62      | 42.77     | 2.31                 | 44.60           | 53.9           | 9.3         | 150         | 0           | VBW:360 Hz,Floor noise |
| Vert.    | 45.022          | QP       | 26.39          | 12.98           | 6.73      | 32.17     | 0.00                 | 13.93           | 40.0           | 26.0        | 100         | 6           | -                      |
| Vert.    | 56.479          | QP       | 30.86          | 9.07            | 6.67      | 32.16     | 0.00                 | 14.44           | 40.0           | 25.5        | 100         | 153         | -                      |
| Vert.    | 89.579          | QP       | 30.56          | 8.09            | 7.53      | 32.14     | 0.00                 | 14.04           | 43.5           | 29.4        | 100         | 3           | -                      |
| Vert.    | 105.929         | QP       | 30.15          | 11.21           | 7.26      | 32.13     | 0.00                 | 16.49           | 43.5           | 27.0        | 100         | 92          | -                      |
| Vert.    | 121.137         | QP       | 29.04          | 13.14           | 7.25      | 32.11     | 0.00                 | 17.32           | 43.5           | 26.1        | 100         | 357         | -                      |
| Vert.    | 179.722         | QP       | 25.19          | 15.96           | 7.79      | 32.07     | 0.00                 | 16.87           | 43.5           | 26.6        | 100         | 267         | -                      |
| Vert.    | 319.204         | QP       | 29.49          | 14.11           | 8.63      | 31.96     | 0.00                 | 20.27           | 46.0           | 25.7        | 137         | 166         | -                      |
| Vert.    | 2483.500        | PK       | 46.71          | 28.28           | 14.52     | 41.65     | 2.31                 | 50.17           | 73.9           | 23.7        | 198         | 282         | -                      |
| Vert.    | 4960.000        | PK       | 47.74          | 31.79           | 7.03      | 42.89     | 2.31                 | 45.98           | 73.9           | 27.9        | 150         | 0           | -                      |
| Vert.    | 7440.000        | PK       | 47.69          | 37.88           | 8.44      | 43.65     | 2.31                 | 52.67           | 73.9           | 21.2        | 150         | 0           | -                      |
| Vert.    | 9920.000        | PK       | 48.06          | 39.05           | 9.62      | 42.77     | 2.31                 | 56.27           | 73.9           | 17.6        | 150         | 0           | -                      |
| Vert.    | 2483.500        | AV       | 35.96          | 28.28           | 14.52     | 41.65     | 2.31                 | 39.42           | 53.9           | 14.4        | 198         | 282         | VBW:360 Hz             |
| Vert.    | 4960.000        | AV       | 37.02          | 31.79           | 7.03      | 42.89     | 2.31                 | 35.26           | 53.9           | 18.6        | 150         | 0           | VBW:360 Hz,Floor noise |
| Vert.    | 7440.000        | AV       | 37.07          | 37.88           | 8.44      | 43.65     | 2.31                 | 42.05           | 53.9           | 11.8        | 150         | 0           | VBW:360 Hz,Floor noise |
| Vert.    | 9920.000        | AV       | 36.11          | 39.05           | 9.62      | 42.77     | 2.31                 | 44.32           | 53.9           | 9.5         | 150         | 0           | VBW:360 Hz,Floor noise |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz :  $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.31\text{ dB}$

10 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**\*These results have sufficient margin without taking account Duty cycle correction factor.**

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab.  
Semi Anechoic Chamber No.3  
Date March 3, 2021  
Temperature / Humidity 26 deg.C, 39 %RH  
Engineer Hiromasa Sato  
(1 GHz -10 GHz)  
Mode Tx, Hopping Off, DH5 2480 MHz

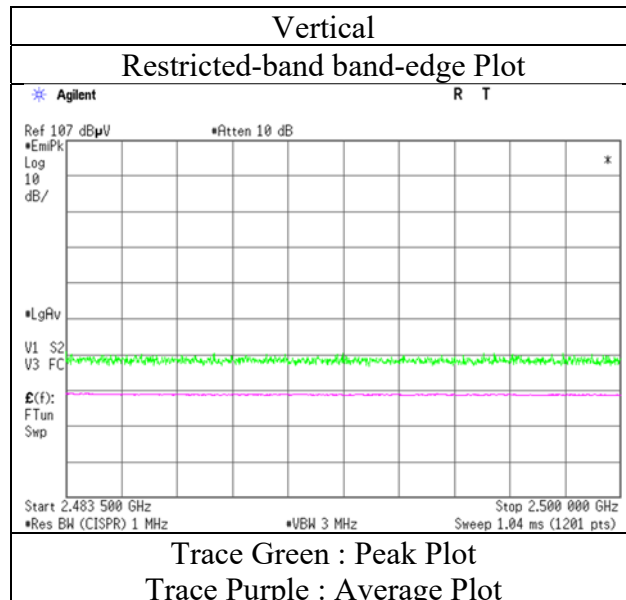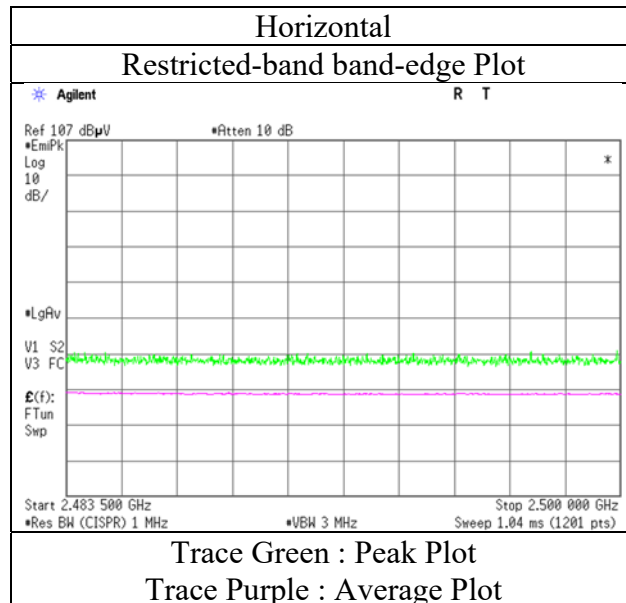

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

|                        |                                |                  |                    |
|------------------------|--------------------------------|------------------|--------------------|
| Report No.             | 13434268S-A-R2                 |                  |                    |
| Test place             | Shonan EMC Lab.                |                  |                    |
| Semi Anechoic Chamber  | No.3                           | No.3             | No.3               |
| Date                   | March 4, 2021                  | August 18, 2021  | March 4, 2021      |
| Temperature / Humidity | 28 deg.C, 35 %RH               | 21 deg.C, 69 %RH | 28 deg.C, 35 %RH   |
| Engineer               | Hiromasa Sato                  | Shiro Kobayashi  | Hiromasa Sato      |
|                        | (30MHz -1 GHz)                 | (1 GHz -10 GHz)  | (10 GHz -26.5 GHz) |
| Mode                   | Tx, Hopping Off, 3DH5 2402 MHz |                  |                    |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark                   |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|--------------------------|
| Hori.    | 181.968         | QP       | 25.44          | 16.13           | 7.78      | 32.06     | 0.00                 | 17.29           | 43.5           | 26.2        | 148         | 193         | -                        |
| Hori.    | 288.849         | QP       | 27.33          | 13.42           | 8.47      | 31.98     | 0.00                 | 17.24           | 46.0           | 28.7        | 150         | 220         | -                        |
| Hori.    | 319.123         | QP       | 30.37          | 14.11           | 8.63      | 31.96     | 0.00                 | 21.15           | 46.0           | 24.8        | 100         | 355         | -                        |
| Hori.    | 2390.000        | PK       | 48.14          | 28.33           | 14.43     | 41.62     | 2.31                 | 51.59           | 73.9           | 22.3        | 152         | 144         | -                        |
| Hori.    | 4804.000        | PK       | 48.71          | 31.77           | 7.02      | 42.89     | 2.31                 | 46.92           | 73.9           | 26.9        | 100         | 0           | -                        |
| Hori.    | 7206.000        | PK       | 48.23          | 37.37           | 8.49      | 43.39     | 2.31                 | 53.01           | 73.9           | 20.8        | 100         | 0           | -                        |
| Hori.    | 9608.000        | PK       | 48.56          | 39.12           | 9.66      | 43.18     | 2.31                 | 56.47           | 73.9           | 17.4        | 100         | 0           | -                        |
| Hori.    | 2390.000        | AV       | 35.53          | 28.33           | 14.43     | 41.62     | 2.31                 | 38.98           | 53.9           | 14.9        | 152         | 144         | VBW: 360 Hz              |
| Hori.    | 4804.000        | AV       | 36.37          | 31.77           | 7.02      | 42.89     | 2.31                 | 34.58           | 53.9           | 19.3        | 100         | 0           | VBW: 360 Hz, Floor noise |
| Hori.    | 7206.000        | AV       | 36.09          | 37.37           | 8.49      | 43.39     | 2.31                 | 40.87           | 53.9           | 13.0        | 100         | 0           | VBW: 360 Hz, Floor noise |
| Hori.    | 9608.000        | AV       | 36.54          | 39.12           | 9.66      | 43.18     | 2.31                 | 44.45           | 53.9           | 9.4         | 100         | 0           | VBW: 360 Hz, Floor noise |
| Vert.    | 44.695          | QP       | 26.16          | 13.10           | 6.73      | 32.17     | 0.00                 | 13.82           | 40.0           | 26.1        | 100         | 6           | -                        |
| Vert.    | 57.103          | QP       | 30.75          | 8.90            | 6.65      | 32.16     | 0.00                 | 14.14           | 40.0           | 25.8        | 100         | 207         | -                        |
| Vert.    | 89.809          | QP       | 30.21          | 8.13            | 7.53      | 32.14     | 0.00                 | 13.73           | 43.5           | 29.7        | 100         | 244         | -                        |
| Vert.    | 106.621         | QP       | 30.08          | 11.31           | 7.25      | 32.12     | 0.00                 | 16.52           | 43.5           | 26.9        | 100         | 180         | -                        |
| Vert.    | 121.015         | QP       | 29.57          | 13.14           | 7.25      | 32.11     | 0.00                 | 17.85           | 43.5           | 25.6        | 100         | 341         | -                        |
| Vert.    | 182.921         | QP       | 25.34          | 16.15           | 7.79      | 32.06     | 0.00                 | 17.22           | 43.5           | 26.2        | 100         | 165         | -                        |
| Vert.    | 319.341         | QP       | 29.56          | 14.12           | 8.63      | 31.96     | 0.00                 | 20.35           | 46.0           | 25.6        | 150         | 181         | -                        |
| Vert.    | 2390.000        | PK       | 47.60          | 28.33           | 14.43     | 41.62     | 2.31                 | 51.05           | 73.9           | 22.8        | 139         | 225         | -                        |
| Vert.    | 4804.000        | PK       | 48.41          | 31.77           | 7.02      | 42.89     | 2.31                 | 46.62           | 73.9           | 27.2        | 100         | 0           | -                        |
| Vert.    | 7206.000        | PK       | 47.81          | 37.37           | 8.49      | 43.39     | 2.31                 | 52.59           | 73.9           | 21.3        | 100         | 0           | -                        |
| Vert.    | 9608.000        | PK       | 48.76          | 39.12           | 9.66      | 43.18     | 2.31                 | 56.67           | 73.9           | 17.2        | 100         | 0           | -                        |
| Vert.    | 2390.000        | AV       | 35.47          | 28.33           | 14.43     | 41.62     | 2.31                 | 38.92           | 53.9           | 14.9        | 139         | 225         | VBW: 360 Hz              |
| Vert.    | 4804.000        | AV       | 36.42          | 31.77           | 7.02      | 42.89     | 2.31                 | 34.63           | 53.9           | 19.2        | 100         | 0           | VBW: 360 Hz, Floor noise |
| Vert.    | 7206.000        | AV       | 36.12          | 37.37           | 8.49      | 43.39     | 2.31                 | 40.90           | 53.9           | 13.0        | 100         | 0           | VBW: 360 Hz, Floor noise |
| Vert.    | 9608.000        | AV       | 36.63          | 39.12           | 9.66      | 43.18     | 2.31                 | 44.54           | 53.9           | 9.3         | 100         | 0           | VBW: 360 Hz, Floor noise |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz :  $20\log(3.91 \text{ m} / 3.0 \text{ m}) = 2.31 \text{ dB}$

10 GHz - 40 GHz :  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|---------|
| Hori.    | 2402.000        | PK       | 95.28          | 28.31           | 14.45     | 41.63     | 2.31                 | 98.72           | -              | -           | Carrier |
| Hori.    | 2400.000        | PK       | 40.11          | 28.31           | 14.45     | 41.63     | 2.31                 | 43.55           | 78.7           | 35.1        | -       |
| Vert.    | 2402.000        | PK       | 95.71          | 28.31           | 14.45     | 41.63     | 2.31                 | 99.15           | -              | -           | Carrier |
| Vert.    | 2400.000        | PK       | 40.90          | 28.31           | 14.45     | 41.63     | 2.31                 | 44.34           | 79.1           | 34.7        | -       |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz :  $20\log(3.91 \text{ m} / 3.0 \text{ m}) = 2.31 \text{ dB}$

10 GHz - 40 GHz :  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$

\*These results have sufficient margin without taking account Duty cycle correction factor.

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                                |
|------------------------|--------------------------------|
| Report No.             | 13434268S-A-R2                 |
| Test place             | Shonan EMC Lab.                |
| Semi Anechoic Chamber  | No.3                           |
| Date                   | August 18, 2021                |
| Temperature / Humidity | 21 deg.C, 69 %RH               |
| Engineer               | Shiro Kobayashi                |
|                        | (1 GHz -10 GHz)                |
| Mode                   | Tx, Hopping Off, 3DH5 2402 MHz |

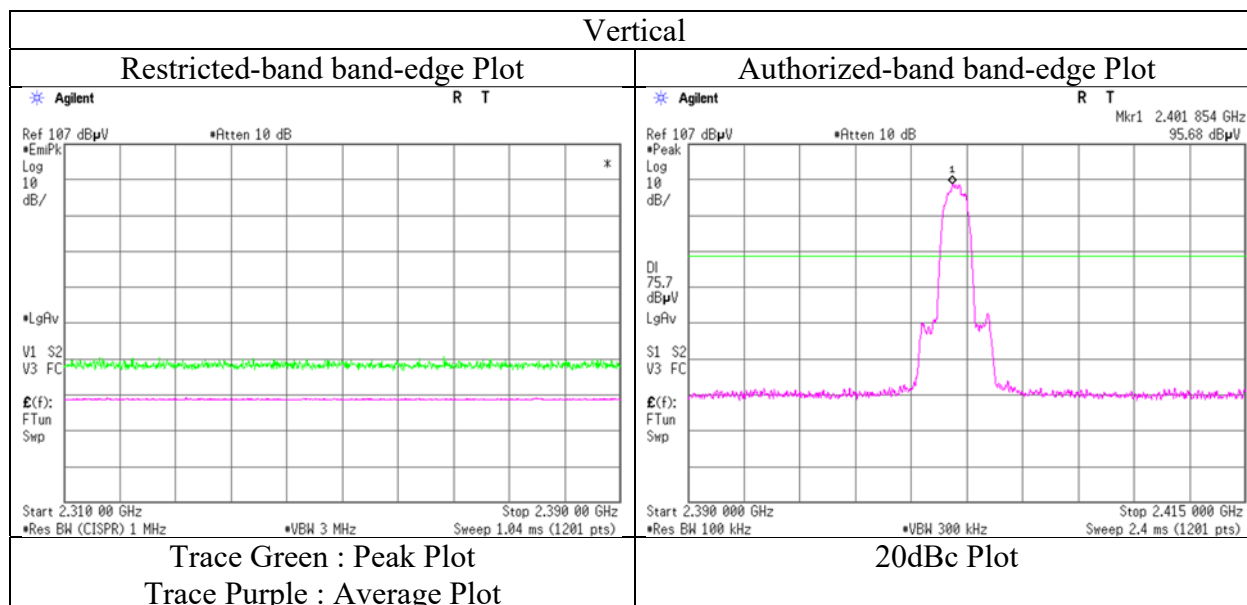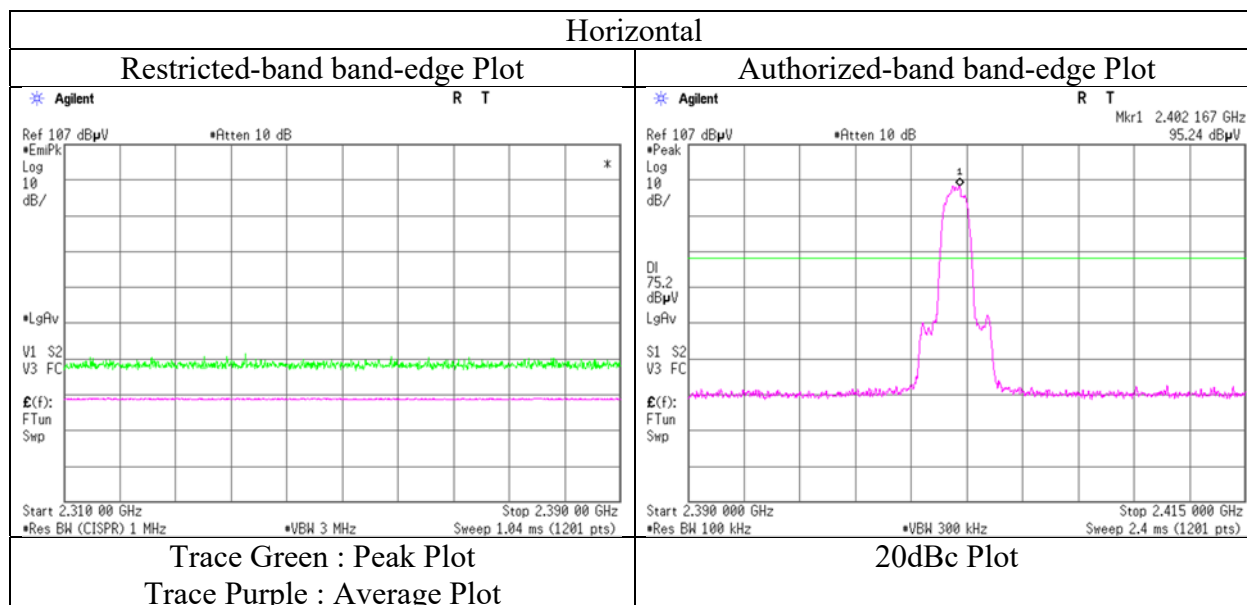

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

|                        |                                |                  |                    |
|------------------------|--------------------------------|------------------|--------------------|
| Report No.             | 13434268S-A-R2                 |                  |                    |
| Test place             | Shonan EMC Lab.                |                  |                    |
| Semi Anechoic Chamber  | No.3                           | No.3             | No.3               |
| Date                   | March 4, 2021                  | August 18, 2021  | March 4, 2021      |
| Temperature / Humidity | 28 deg.C, 35 %RH               | 21 deg.C, 69 %RH | 28 deg.C, 35 %RH   |
| Engineer               | Hiromasa Sato                  | Shiro Kobayashi  | Hiromasa Sato      |
|                        | (30MHz -1 GHz)                 | (1 GHz -10 GHz)  | (10 GHz -26.5 GHz) |
| Mode                   | Tx, Hopping Off, 3DH5 2441 MHz |                  |                    |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Distance<br>Factor [dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark                   |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|-------------------------|--------------------|-------------------|----------------|----------------|----------------|--------------------------|
| Hori.    | 182.911            | QP       | 25.29             | 16.15              | 7.79         | 32.06        | 0.00                    | 17.17              | 43.5              | 26.3           | 243            | 66             | -                        |
| Hori.    | 287.987            | QP       | 27.56             | 13.42              | 8.47         | 31.98        | 0.00                    | 17.47              | 46.0              | 28.5           | 100            | 208            | -                        |
| Hori.    | 319.069            | QP       | 30.28             | 14.10              | 8.63         | 31.96        | 0.00                    | 21.05              | 46.0              | 24.9           | 100            | 271            | -                        |
| Hori.    | 4882.000           | PK       | 48.59             | 31.87              | 7.08         | 42.89        | 2.31                    | 46.96              | 73.9              | 26.9           | 100            | 0              | -                        |
| Hori.    | 7323.000           | PK       | 47.33             | 37.54              | 8.57         | 43.52        | 2.31                    | 52.23              | 73.9              | 21.6           | 100            | 0              | -                        |
| Hori.    | 9764.000           | PK       | 47.06             | 39.41              | 9.75         | 42.97        | 2.31                    | 55.56              | 73.9              | 18.3           | 100            | 0              | -                        |
| Hori.    | 4882.000           | AV       | 36.36             | 31.87              | 7.08         | 42.89        | 2.31                    | 34.73              | 53.9              | 19.1           | 100            | 0              | VBW: 360 Hz, Floor noise |
| Hori.    | 7323.000           | AV       | 36.07             | 37.54              | 8.57         | 43.52        | 2.31                    | 40.97              | 53.9              | 12.9           | 100            | 0              | VBW: 360 Hz, Floor noise |
| Hori.    | 9764.000           | AV       | 35.59             | 39.41              | 9.75         | 42.97        | 2.31                    | 44.09              | 53.9              | 9.8            | 100            | 0              | VBW: 360 Hz, Floor noise |
| Vert.    | 44.319             | QP       | 26.85             | 13.23              | 6.71         | 32.17        | 0.00                    | 14.62              | 40.0              | 25.3           | 100            | 101            | -                        |
| Vert.    | 50.121             | QP       | 27.03             | 11.14              | 6.78         | 32.17        | 0.00                    | 12.78              | 40.0              | 27.2           | 100            | 43             | -                        |
| Vert.    | 56.303             | QP       | 30.71             | 9.12               | 6.68         | 32.16        | 0.00                    | 14.35              | 40.0              | 25.6           | 100            | 118            | -                        |
| Vert.    | 90.530             | QP       | 30.07             | 8.26               | 7.52         | 32.14        | 0.00                    | 13.71              | 43.5              | 29.7           | 100            | 9              | -                        |
| Vert.    | 105.881            | QP       | 30.26             | 11.20              | 7.26         | 32.13        | 0.00                    | 16.59              | 43.5              | 26.9           | 100            | 29             | -                        |
| Vert.    | 120.514            | QP       | 29.76             | 13.09              | 7.23         | 32.11        | 0.00                    | 17.97              | 43.5              | 25.5           | 100            | 176            | -                        |
| Vert.    | 183.019            | QP       | 25.11             | 16.15              | 7.79         | 32.06        | 0.00                    | 16.99              | 43.5              | 26.5           | 100            | 224            | -                        |
| Vert.    | 319.106            | QP       | 29.37             | 14.11              | 8.63         | 31.96        | 0.00                    | 20.15              | 46.0              | 25.8           | 148            | 197            | -                        |
| Vert.    | 4882.000           | PK       | 48.85             | 31.87              | 7.08         | 42.89        | 2.31                    | 47.22              | 73.9              | 26.6           | 100            | 0              | -                        |
| Vert.    | 7323.000           | PK       | 47.35             | 37.54              | 8.57         | 43.52        | 2.31                    | 52.25              | 73.9              | 21.6           | 100            | 0              | -                        |
| Vert.    | 9764.000           | PK       | 46.98             | 39.41              | 9.75         | 42.97        | 2.31                    | 55.48              | 73.9              | 18.4           | 100            | 0              | -                        |
| Vert.    | 4882.000           | AV       | 36.58             | 31.87              | 7.08         | 42.89        | 2.31                    | 34.95              | 53.9              | 18.9           | 100            | 0              | VBW: 360 Hz, Floor noise |
| Vert.    | 7323.000           | AV       | 36.01             | 37.54              | 8.57         | 43.52        | 2.31                    | 40.91              | 53.9              | 12.9           | 100            | 0              | VBW: 360 Hz, Floor noise |
| Vert.    | 9764.000           | AV       | 35.61             | 39.41              | 9.75         | 42.97        | 2.31                    | 44.11              | 53.9              | 9.7            | 100            | 0              | VBW: 360 Hz, Floor noise |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz :  $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.31\text{ dB}$

10 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**\*These results have sufficient margin without taking account Duty cycle correction factor.**

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

|                        |                                |                  |                    |
|------------------------|--------------------------------|------------------|--------------------|
| Report No.             | 13434268S-A-R2                 |                  |                    |
| Test place             | Shonan EMC Lab.                |                  |                    |
| Semi Anechoic Chamber  | No.3                           | No.3             | No.3               |
| Date                   | March 4, 2021                  | August 18, 2021  | March 4, 2021      |
| Temperature / Humidity | 28 deg.C, 35 %RH               | 21 deg.C, 69 %RH | 28 deg.C, 35 %RH   |
| Engineer               | Hiromasa Sato                  | Shiro Kobayashi  | Hiromasa Sato      |
|                        | (30MHz -1 GHz)                 | (1 GHz -10 GHz)  | (10 GHz -26.5 GHz) |
| Mode                   | Tx, Hopping Off, 3DH5 2480 MHz |                  |                    |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Distance<br>Factor [dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark                   |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|-------------------------|--------------------|-------------------|----------------|----------------|----------------|--------------------------|
| Hori.    | 182.969            | QP       | 25.37             | 16.15              | 7.79         | 32.06        | 0.00                    | 17.25              | 43.5              | 26.2           | 140            | 276            | -                        |
| Hori.    | 287.588            | QP       | 27.87             | 13.42              | 8.46         | 31.98        | 0.00                    | 17.77              | 46.0              | 28.2           | 150            | 3              | -                        |
| Hori.    | 319.020            | QP       | 30.37             | 14.10              | 8.63         | 31.96        | 0.00                    | 21.14              | 46.0              | 24.8           | 100            | 62             | -                        |
| Hori.    | 2483.500           | PK       | 47.79             | 28.24              | 14.53        | 41.65        | 2.31                    | 51.22              | 73.9              | 22.6           | 309            | 343            | -                        |
| Hori.    | 4960.000           | PK       | 48.74             | 32.14              | 7.14         | 42.89        | 2.31                    | 47.44              | 73.9              | 26.4           | 150            | 0              | -                        |
| Hori.    | 7440.000           | PK       | 47.74             | 37.62              | 8.64         | 43.65        | 2.31                    | 52.66              | 73.9              | 21.2           | 150            | 0              | -                        |
| Hori.    | 9920.000           | PK       | 47.16             | 39.30              | 9.83         | 42.77        | 2.31                    | 55.83              | 73.9              | 18.0           | 150            | 0              | -                        |
| Hori.    | 2483.500           | AV       | 36.05             | 28.24              | 14.53        | 41.65        | 2.31                    | 39.48              | 53.9              | 14.4           | 309            | 343            | VBW: 360 Hz              |
| Hori.    | 4960.000           | AV       | 37.33             | 32.14              | 7.14         | 42.89        | 2.31                    | 36.03              | 53.9              | 17.8           | 150            | 0              | VBW: 360 Hz, Floor noise |
| Hori.    | 7440.000           | AV       | 36.67             | 37.62              | 8.64         | 43.65        | 2.31                    | 41.59              | 53.9              | 12.3           | 150            | 0              | VBW: 360 Hz, Floor noise |
| Hori.    | 9920.000           | AV       | 35.87             | 39.30              | 9.83         | 42.77        | 2.31                    | 44.54              | 53.9              | 9.3            | 150            | 0              | VBW: 360 Hz, Floor noise |
| Vert.    | 45.167             | QP       | 26.05             | 12.93              | 6.73         | 32.17        | 0.00                    | 13.54              | 40.0              | 26.4           | 100            | 4              | -                        |
| Vert.    | 49.587             | QP       | 26.26             | 11.33              | 6.78         | 32.17        | 0.00                    | 12.20              | 40.0              | 27.8           | 100            | 290            | -                        |
| Vert.    | 57.048             | QP       | 30.36             | 8.91               | 6.64         | 32.16        | 0.00                    | 13.75              | 40.0              | 26.2           | 100            | 6              | -                        |
| Vert.    | 89.919             | QP       | 30.11             | 8.15               | 7.53         | 32.14        | 0.00                    | 13.65              | 43.5              | 29.8           | 100            | 6              | -                        |
| Vert.    | 105.069            | QP       | 30.17             | 11.06              | 7.27         | 32.13        | 0.00                    | 16.37              | 43.5              | 27.1           | 100            | 337            | -                        |
| Vert.    | 120.417            | QP       | 29.59             | 13.08              | 7.23         | 32.11        | 0.00                    | 17.79              | 43.5              | 25.7           | 100            | 0              | -                        |
| Vert.    | 183.070            | QP       | 25.28             | 16.15              | 7.79         | 32.06        | 0.00                    | 17.16              | 43.5              | 26.3           | 100            | 227            | -                        |
| Vert.    | 319.031            | QP       | 29.20             | 14.10              | 8.63         | 31.96        | 0.00                    | 19.97              | 46.0              | 26.0           | 150            | 187            | -                        |
| Vert.    | 2483.500           | PK       | 47.89             | 28.24              | 14.53        | 41.65        | 2.31                    | 51.32              | 73.9              | 22.5           | 217            | 260            | -                        |
| Vert.    | 4960.000           | PK       | 48.07             | 32.14              | 7.14         | 42.89        | 2.31                    | 46.77              | 73.9              | 27.1           | 150            | 0              | -                        |
| Vert.    | 7440.000           | PK       | 48.36             | 37.62              | 8.64         | 43.65        | 2.31                    | 53.28              | 73.9              | 20.6           | 150            | 0              | -                        |
| Vert.    | 9920.000           | PK       | 46.80             | 39.30              | 9.83         | 42.77        | 2.31                    | 55.47              | 73.9              | 18.4           | 150            | 0              | -                        |
| Vert.    | 2483.500           | AV       | 36.09             | 28.24              | 14.53        | 41.65        | 2.31                    | 39.52              | 53.9              | 14.3           | 217            | 260            | VBW: 360 Hz              |
| Vert.    | 4960.000           | AV       | 37.27             | 32.14              | 7.14         | 42.89        | 2.31                    | 35.97              | 53.9              | 17.9           | 150            | 0              | VBW: 360 Hz, Floor noise |
| Vert.    | 7440.000           | AV       | 36.51             | 37.62              | 8.64         | 43.65        | 2.31                    | 41.43              | 53.9              | 12.4           | 150            | 0              | VBW: 360 Hz, Floor noise |
| Vert.    | 9920.000           | AV       | 35.50             | 39.30              | 9.83         | 42.77        | 2.31                    | 44.17              | 53.9              | 9.7            | 150            | 0              | VBW: 360 Hz, Floor noise |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz :  $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.31\text{ dB}$

10 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

**\*These results have sufficient margin without taking account Duty cycle correction factor.**

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission (Reference Plot for band-edge)


|                        |                                    |
|------------------------|------------------------------------|
| Report No.             | 13434268S-A-R2                     |
| Test place             | Shonan EMC Lab.                    |
| Semi Anechoic Chamber  | No.3                               |
| Date                   | August 18, 2021                    |
| Temperature / Humidity | 21 deg.C, 69 %RH                   |
| Engineer               | Shiro Kobayashi<br>(1 GHz -10 GHz) |
| Mode                   | Tx, Hopping Off, 3DH5 2480 MHz     |

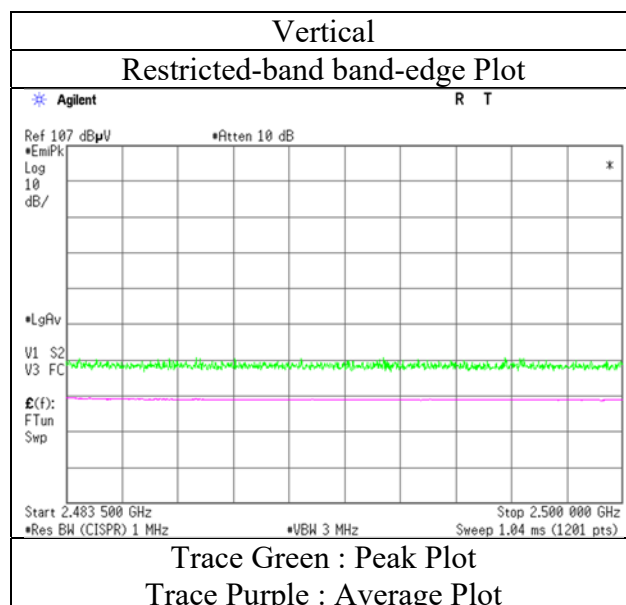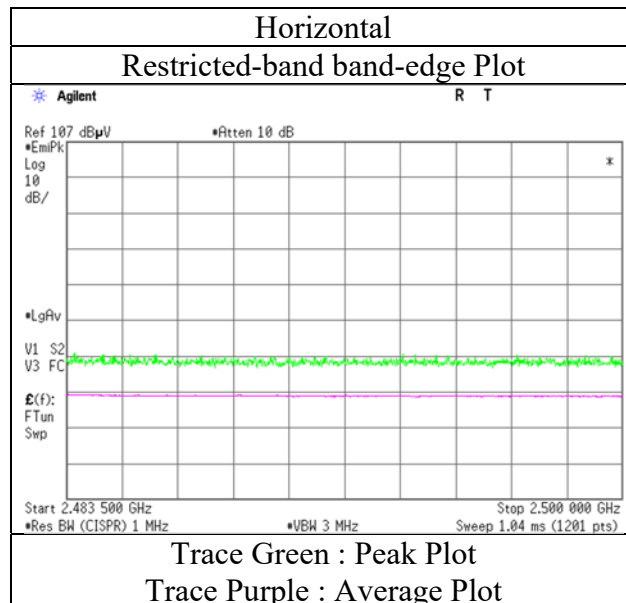

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Plot data, Worst case)**

|                        |                                 |                                    |                                     |
|------------------------|---------------------------------|------------------------------------|-------------------------------------|
| Report No.             | 13434268S-A-R2                  |                                    |                                     |
| Test place             | Shonan EMC Lab.                 |                                    |                                     |
| Semi Anechoic Chamber  | No.3                            | No.3                               | No.3                                |
| Date                   | March 4, 2021                   | August 18, 2021                    | March 4, 2021                       |
| Temperature / Humidity | 28 deg.C, 35 %RH                | 21 deg.C, 69 %RH                   | 28 deg.C, 35 %RH                    |
| Engineer               | Hiromasa Sato<br>(30MHz -1 GHz) | Shiro Kobayashi<br>(1 GHz -10 GHz) | Hiromasa Sato<br>(10 GHz -26.5 GHz) |
| Mode                   | Tx, Hopping Off, 3DH5 2441 MHz  |                                    |                                     |


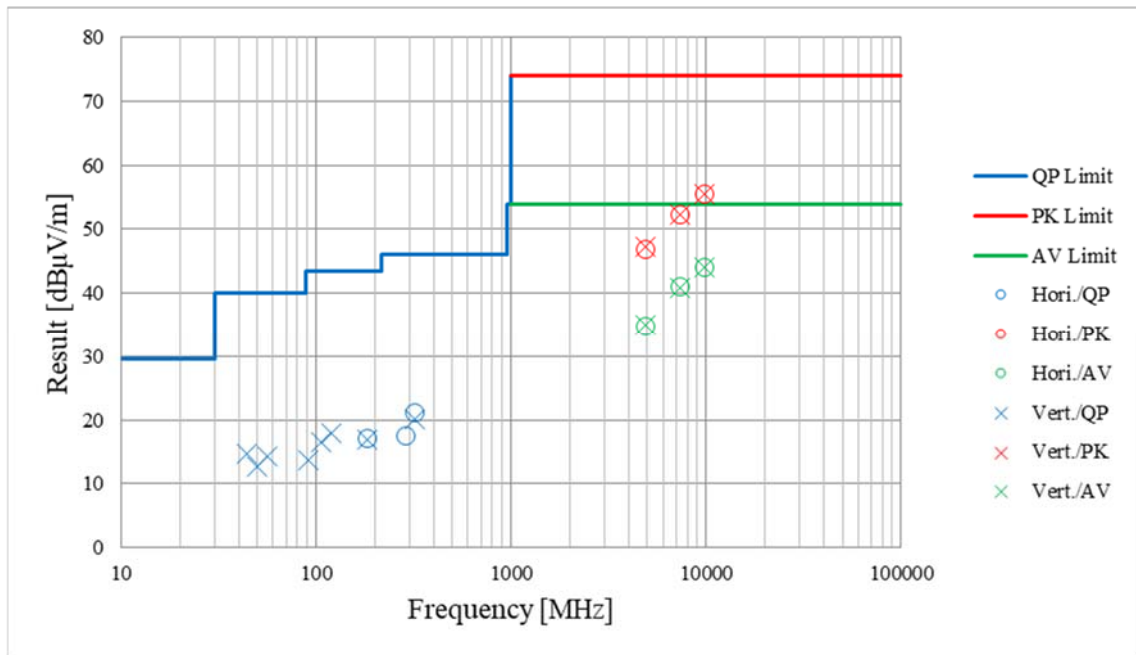


\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

## Conducted Spurious Emission

|                        |                                    |
|------------------------|------------------------------------|
| Report No.             | 13434268S-A-R2                     |
| Test place             | Shonan EMC Lab. No.5 Shielded Room |
| Date                   | February 19, 2021                  |
| Temperature / Humidity | 24 deg. C / 42 % RH                |
| Engineer               | Shiro Kobayashi                    |
| Mode                   | Tx, Hopping Off, DH5               |

### 2402 MHz

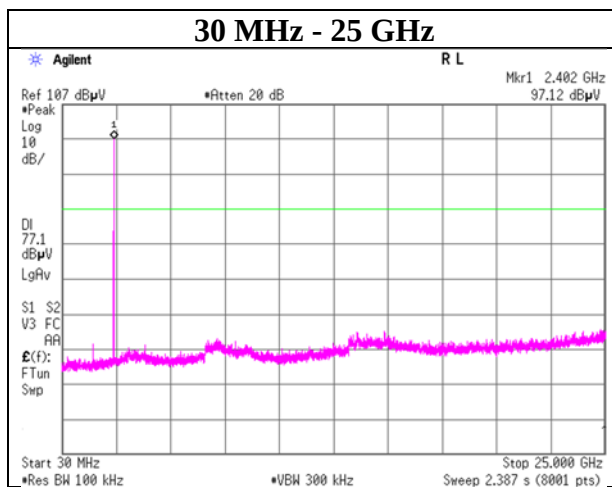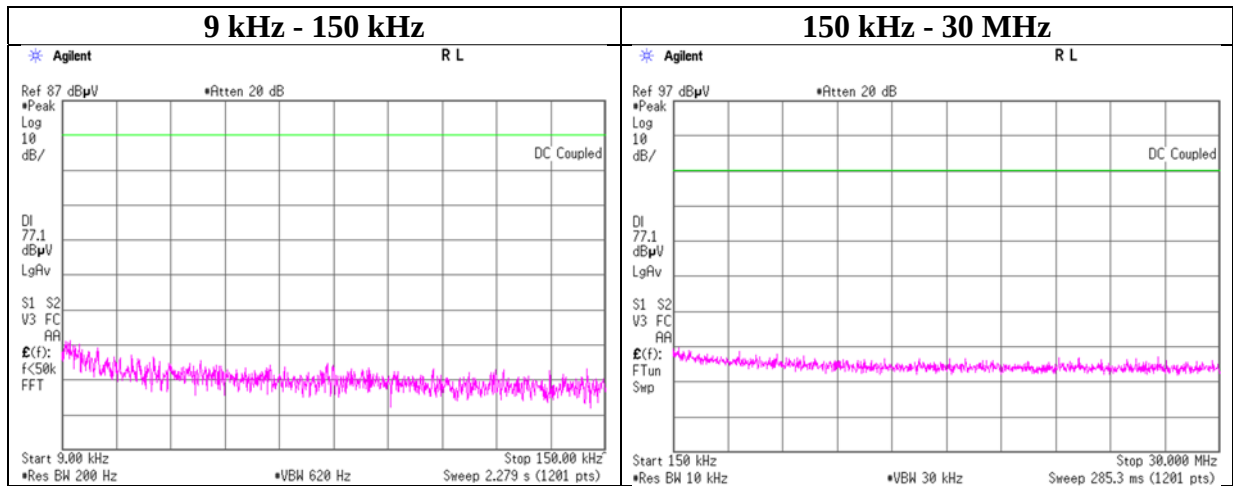

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Conducted Spurious Emission

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx, Hopping Off, DH5

### 2441 MHz

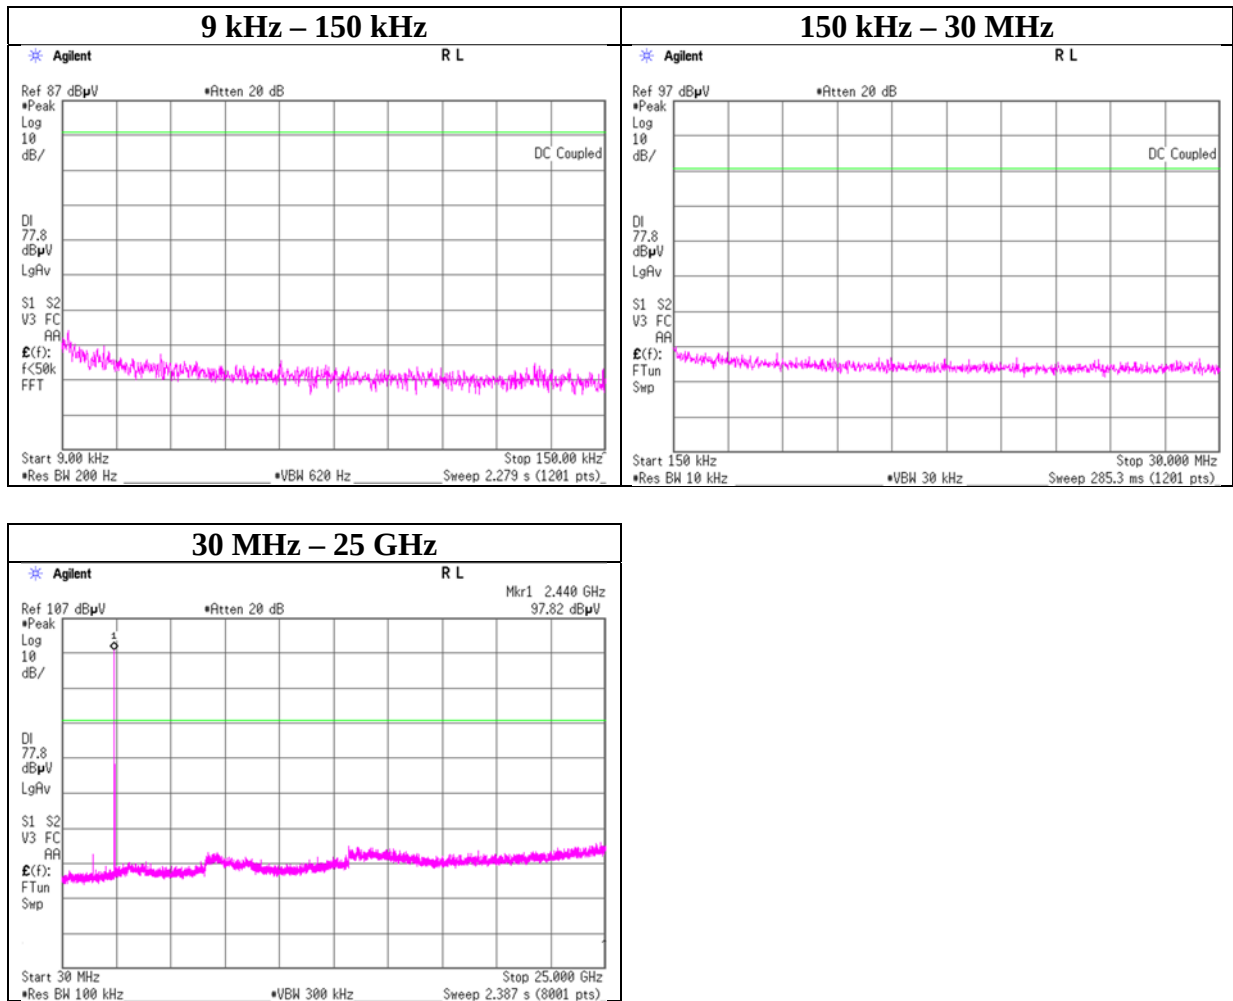

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Conducted Spurious Emission

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx, Hopping Off, DH5

### 2480 MHz

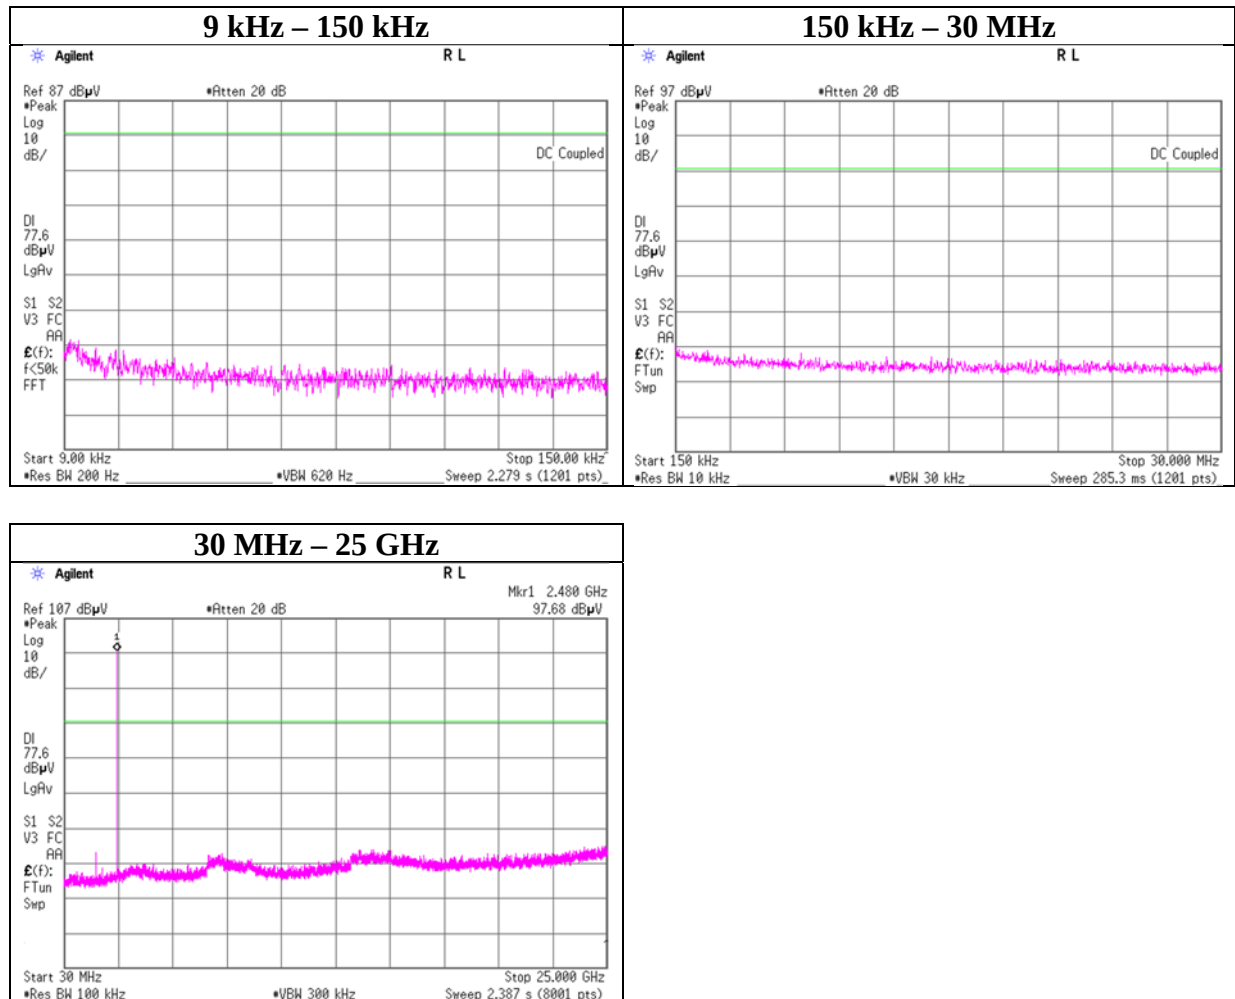

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN



Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Conducted Spurious Emission

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx, Hopping Off, 3DH5

### 2402 MHz

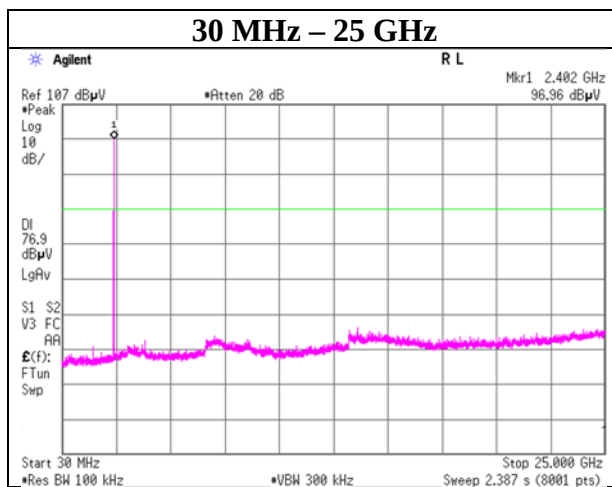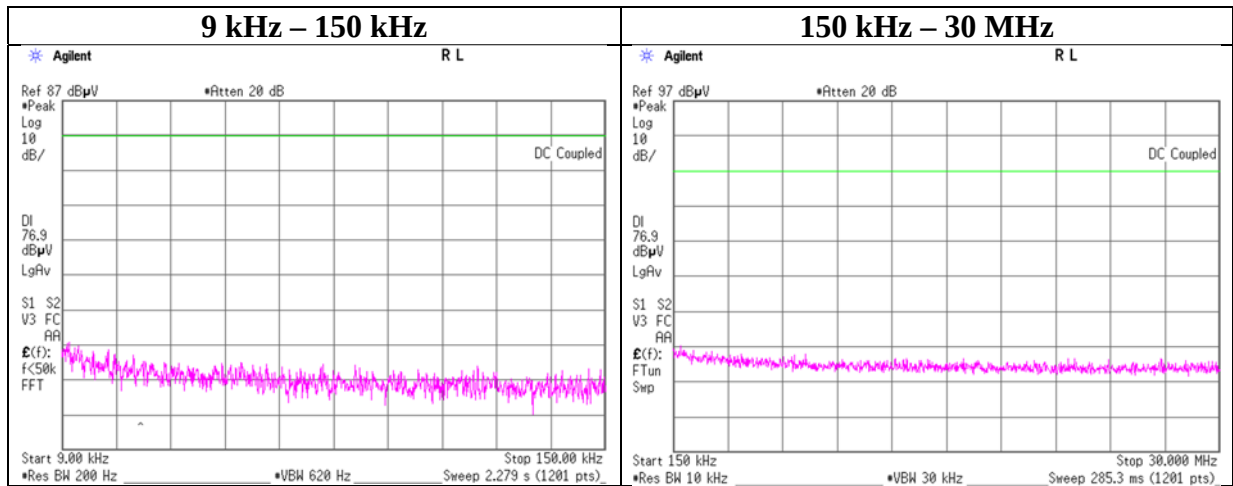

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN



Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Conducted Spurious Emission

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx, Hopping Off, 3DH5



### 2441 MHz

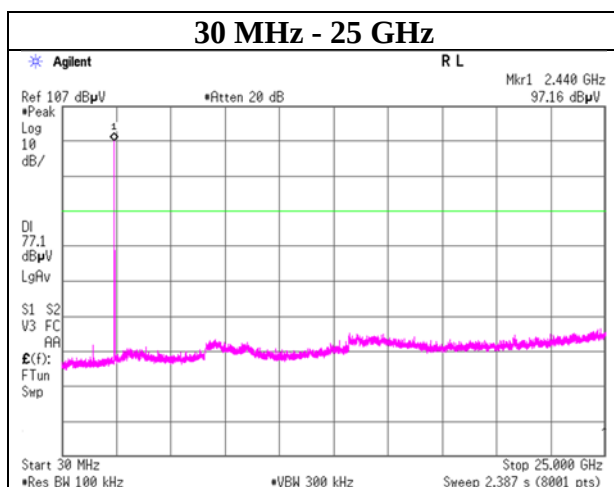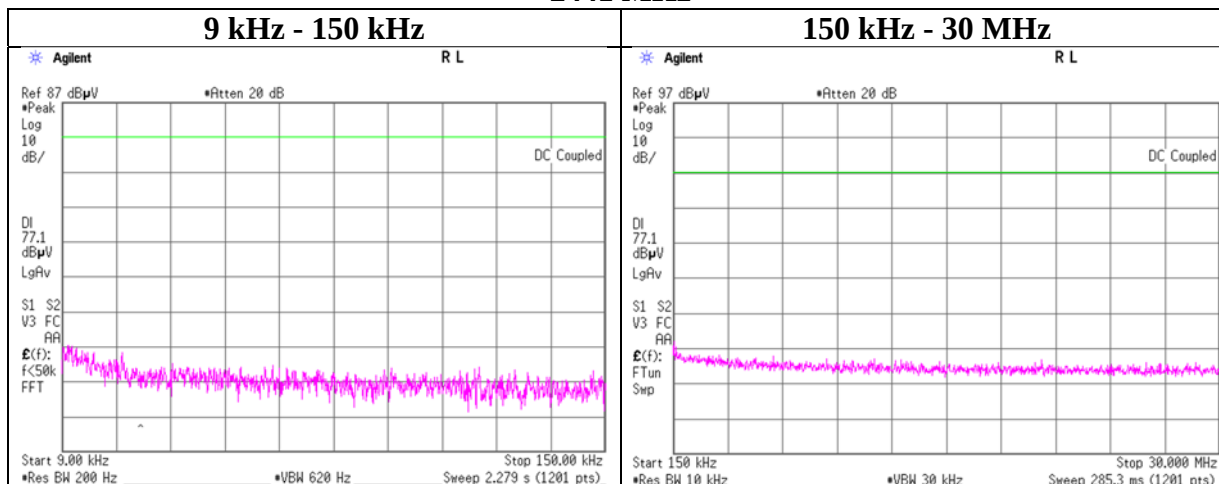

## Conducted Spurious Emission

|                        |                                    |
|------------------------|------------------------------------|
| Report No.             | 13434268S-A-R2                     |
| Test place             | Shonan EMC Lab. No.5 Shielded Room |
| Date                   | February 19, 2021                  |
| Temperature / Humidity | 24 deg. C / 42 % RH                |
| Engineer               | Shiro Kobayashi                    |
| Mode                   | Tx, Hopping Off, 3DH5              |

### 2480 MHz

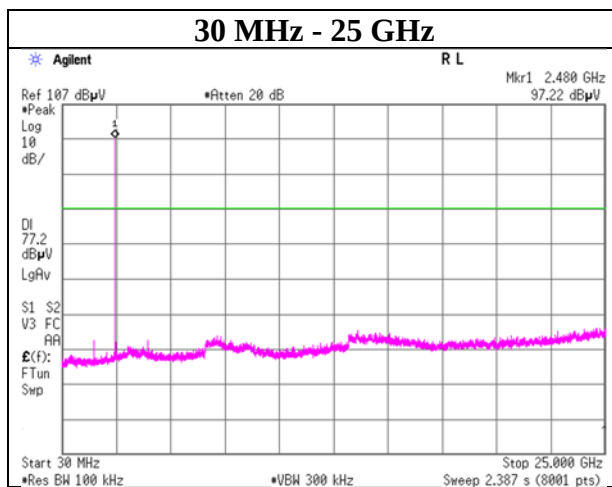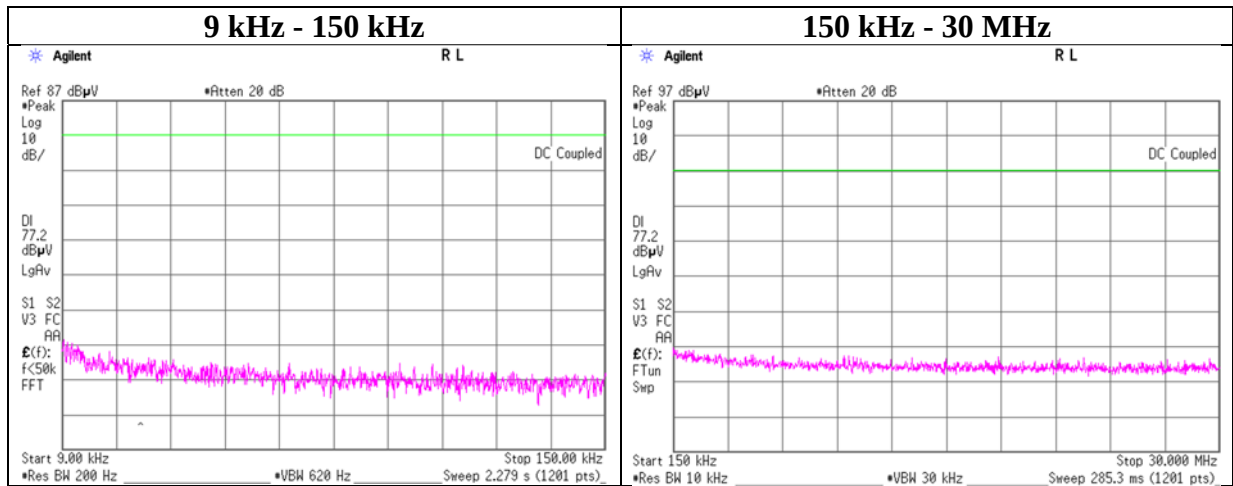

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


## Conducted Emission Band Edge compliance

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx DH5

### Hopping On

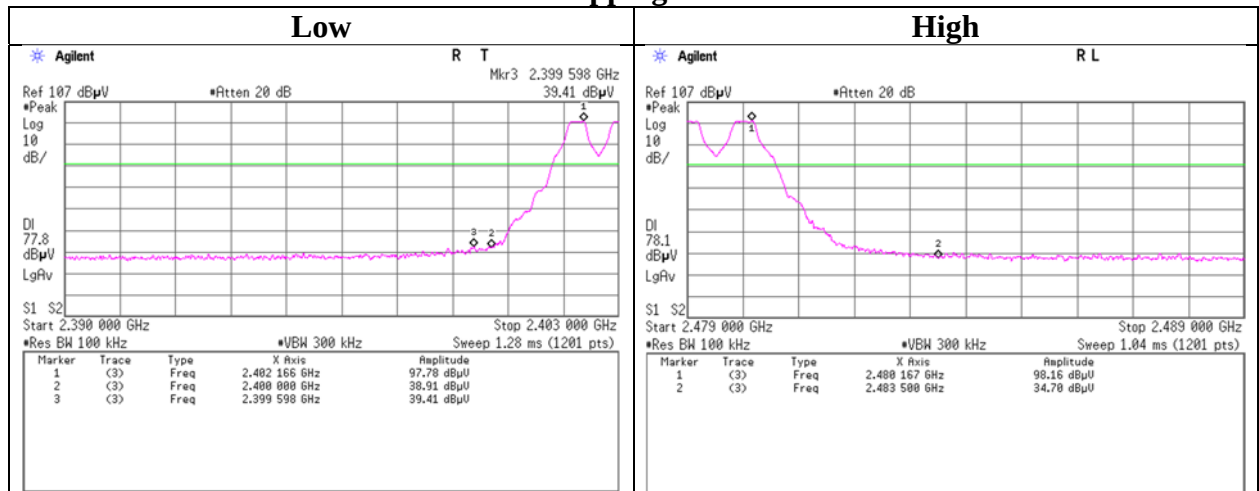


### Hopping Off

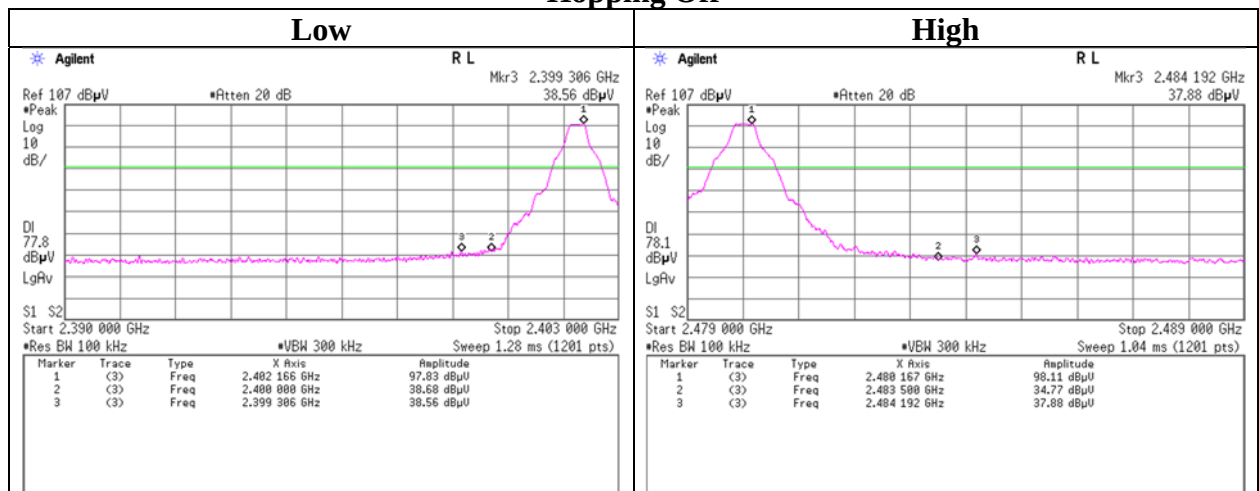


## Conducted Emission Band Edge compliance

Report No. 13434268S-A-R2  
Test place Shonan EMC Lab. No.5 Shielded Room  
Date February 19, 2021  
Temperature / Humidity 24 deg. C / 42 % RH  
Engineer Shiro Kobayashi  
Mode Tx 3DH5

### Hopping On

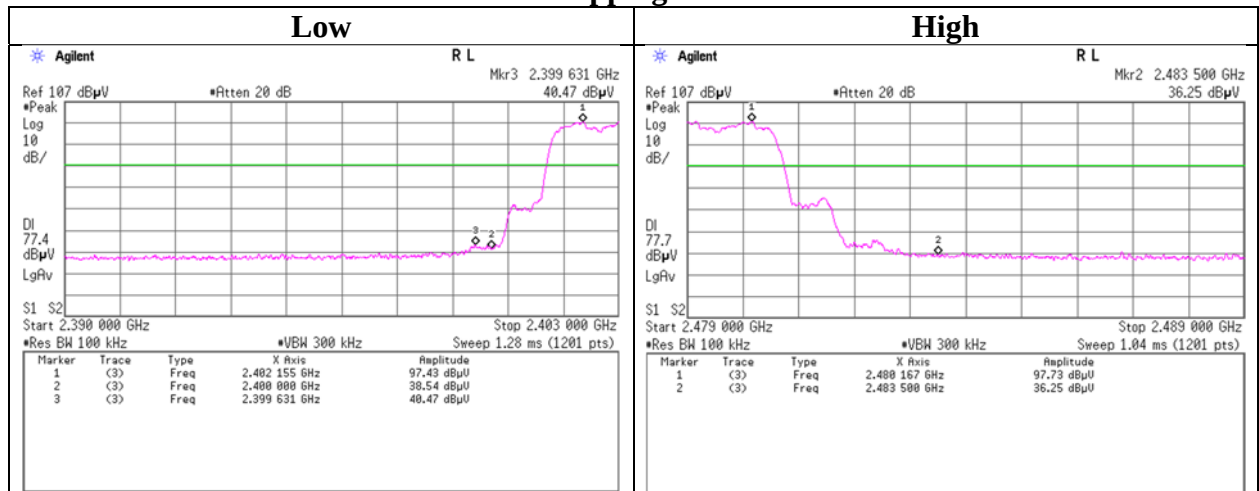

### Hopping Off

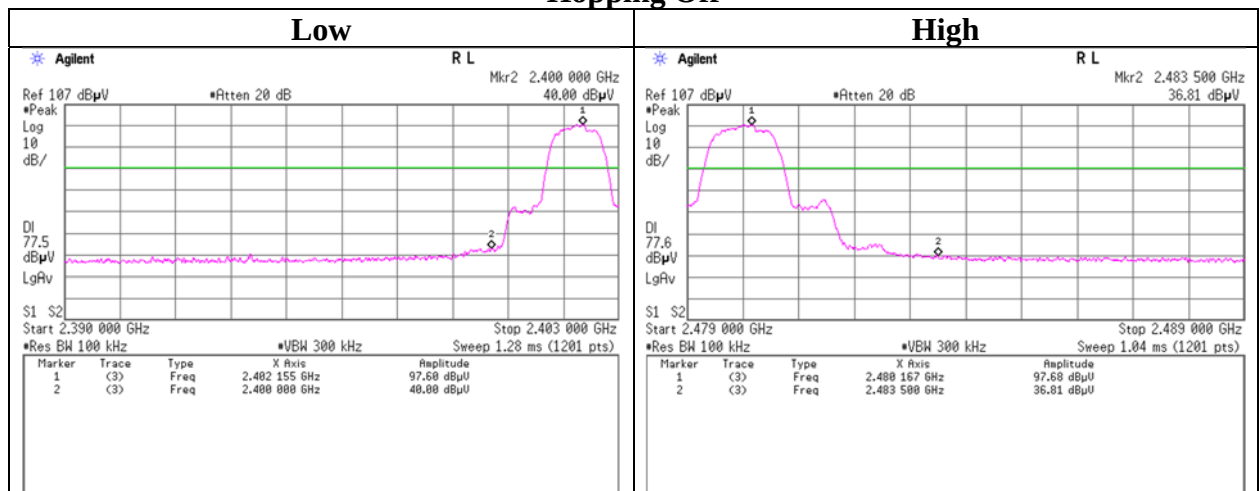

## APPENDIX 2: Test instruments

### Test equipment [1/2]

| Test Item | Local ID                       | LIMS ID | Description               | Manufacturer                                       | Model                                      | Serial                  | Last Calibration Date | Cal Int |
|-----------|--------------------------------|---------|---------------------------|----------------------------------------------------|--------------------------------------------|-------------------------|-----------------------|---------|
| AT        | SAT10-14                       | 154591  | Attenuator                | Weinschel Corp.                                    | 54A-10                                     | 81595                   | 2021/04/08            | 12      |
| AT        | SCC-G13                        | 145166  | Coaxial Cable             | Suhner                                             | SUCOFLEX 102                               | 31599/2                 | 2020/12/21            | 12      |
| AT        | SOS-27                         | 191845  | Humidity Indicator        | CUSTOM. Inc                                        | CTH-201                                    | -                       | 2020/09/29            | 12      |
| AT        | SPM-13                         | 169910  | Power Meter               | Keysight Technologies Inc                          | 8990B                                      | MY51000448              | 2021/01/25            | 12      |
| AT        | SPSS-07                        | 169912  | Power sensor              | Keysight Technologies Inc                          | N1923A                                     | MY57290005              | 2021/01/25            | 12      |
| AT        | SRENT-15                       | 160899  | Spectrum Analyzer         | Keysight Technologies Inc                          | E4440A                                     | MY46185516              | 2021/01/26            | 12      |
| AT        | STS-05                         | 146212  | Digital Hitester          | HIOKI E.E. CORPORATION                             | 3805-50                                    | 80997828                | 2020/10/19            | 12      |
| CE        | KJM-10                         | 146454  | Measure                   | KOMELON                                            | KMC-36                                     | -                       | -                     | -       |
| CE        | SAT3-13                        | 150923  | Attenuator                | JFW                                                | 50HF-003N                                  | -                       | 2021/01/26            | 12      |
| CE        | SCC-B12/B13/SRSE-02            | 144969  | Coaxial Cable&RF Selector | Suhner/Suhner/TOYO                                 | RG223U/141PE/NS4906                        | -/0901-270(RF Selector) | 2021/04/12            | 12      |
| CE        | SLS-02                         | 145539  | LISN                      | Rohde & Schwarz                                    | ENV216                                     | 100512                  | 2021/02/24            | 12      |
| CE        | SOS-22                         | 191839  | Humidity Indicator        | CUSTOM. Inc                                        | CTH-201                                    | -                       | 2020/10/01            | 12      |
| CE        | STR-01                         | 145790  | Test Receiver             | Rohde & Schwarz                                    | ESU40                                      | 100093                  | 2020/04/24            | 12      |
| CE        | STS-02                         | 145793  | Digital Hitester          | HIOKI E.E. CORPORATION                             | 3805-50                                    | 80997819                | 2020/04/09            | 12      |
| CE,RE     | COTS-SE MI-5                   | 170932  | EMI Software              | TSJ (Techno Science Japan)                         | TEPTO-DV3(RE,C E,ME,PE)                    | -                       | -                     | -       |
| RE        | KJM-02                         | 146432  | Measure                   | TAJIMA                                             | GL19-55                                    | -                       | -                     | -       |
| RE        | KSA-08                         | 145089  | Spectrum Analyzer         | Keysight Technologies Inc                          | E4446A                                     | MY46180525              | 2020/11/24            | 12      |
| RE        | SAEC-03( NSA)                  | 145565  | Semi-Anechoic Chamber     | TDK                                                | SAEC-03(NSA)                               | 3                       | 2020/04/12            | 12      |
| RE        | SAEC-03( SVSWR)                | 145566  | Semi-Anechoic Chamber     | TDK                                                | SAEC-03(SVSWR)                             | 3                       | 2021/05/21            | 12      |
| RE        | SAF-03                         | 145126  | Pre Amplifier             | SONOMA                                             | 310N                                       | 290213                  | 2021/02/10            | 12      |
| RE        | SAF-06                         | 145005  | Pre Amplifier             | Toyo Corporation                                   | TPA0118-36                                 | 1440491                 | 2021/02/08            | 12      |
| RE        | SAF-08                         | 145007  | Pre Amplifier             | Toyo Corporation                                   | HAP18-26W                                  | 19                      | 2021/03/01            | 12      |
| RE        | SAT10-06                       | 145137  | Attenuator                | Keysight Technologies Inc                          | 8493C-010                                  | 74865                   | 2020/10/05            | 12      |
| RE        | SAT6-13                        | 167094  | Attenuator                | JFW                                                | 50HF-006N                                  | -                       | 2021/02/10            | 12      |
| RE        | SBA-03                         | 145023  | Biconical Antenna         | Schwarzbeck Mess-Elektronik OHG                    | BBA9106                                    | 91032666                | 2020/05/17            | 12      |
| RE        | SCC-C1/C2/C3/C4/C5/C10/SRSE-03 | 145171  | Coaxial Cable&RF Selector | Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO | 8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906 | -/0901-271(RF Selector) | 2021/04/12            | 12      |
| RE        | SCC-G40                        | 166491  | Coaxial Cable             | Junkosha                                           | MWX221-01000NF SNMS/B                      | 1612S005                | 2021/01/19            | 12      |
| RE        | SCC-G43                        | 156380  | Coaxial Cable             | Huber+Suhner                                       | SUCOFLEX_104_E                             | SN MY 13406/4E          | 2021/05/17            | 12      |
| RE        | SCC-G44                        | 168300  | Coaxial Cable             | Huber+Suhner                                       | SUCOFLEX 104                               | 800375/4A               | 2020/11/20            | 12      |
| RE        | SCC-G58                        | 183047  | Coaxial Cable             | Huber+Suhner                                       | SUCOFLEX 104                               | 800287/4A               | 2021/05/17            | 12      |

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

#### Test equipment [2/2]

| Test Item | Local ID | LIMS ID | Description         | Manufacturer                       | Model      | Serial     | Last Calibration Date | Cal Int |
|-----------|----------|---------|---------------------|------------------------------------|------------|------------|-----------------------|---------|
| RE        | SFL-02   | 145301  | Highpass Filter     | MICRO-TRONICS                      | HPM50111   | 51         | 2020/10/05            | 12      |
| RE        | SFL-18   | 145305  | Highpass Filter     | MICRO-TRONICS                      | HPM50111   | 119        | 2021/04/08            | 12      |
| RE        | SHA-03   | 145501  | Horn Antenna        | Schwarzbeck<br>Mess-Elektronik OHG | BBHA9120D  | 9120D-739  | 2021/06/14            | 12      |
| RE        | SHA-04   | 145512  | Horn Antenna        | ETS-Lindgren                       | 3160-09    | 00094868   | 2020/06/15            | 12      |
| RE        | SLA-07   | 145529  | Logperiodic Antenna | Schwarzbeck<br>Mess-Elektronik OHG | VUSLP9111B | 196        | 2020/05/17            | 12      |
| RE        | SOS-23   | 191840  | Humidity Indicator  | CUSTOM. Inc                        | CTH-201    | -          | 2021/08/02            | 12      |
| RE        | SSA-02   | 145800  | Spectrum Analyzer   | Keysight Technologies<br>Inc       | E4448A     | MY48250106 | 2021/04/13            | 12      |
| RE        | STR-08   | 150463  | Test Receiver       | Rohde & Schwarz                    | ESW44      | 101581     | 2020/12/02            | 12      |
| RE        | STS-03   | 146210  | Digital Hitester    | HIOKI E.E.<br>CORPORATION          | 3805-50    | 80997823   | 2020/10/19            | 12      |

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: CE: Conducted Emission test  
RE: Radiated Emission test  
AT: Antenna Terminal Conducted test