

A

B

C


D

E


F

Cutting line(刀模线):
Punchingline(针孔线)

SIZE
(尺寸图)

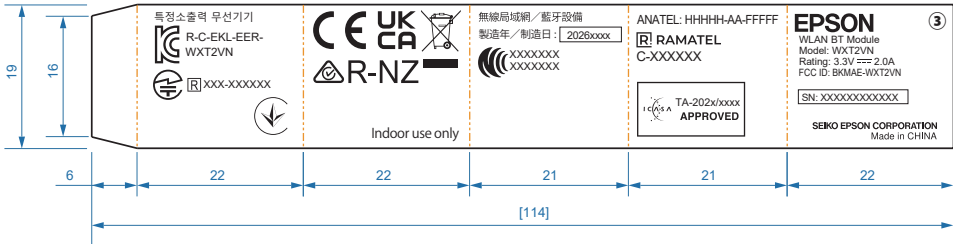


Cutting die sketch
(刀模示意图)

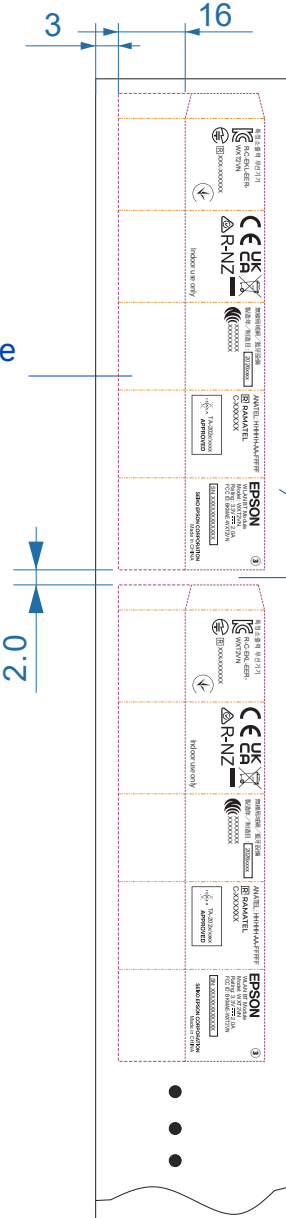

NO Waste
(不排废)

Waste discharge
(排废)

Coiling sketch
(卷料示意图)

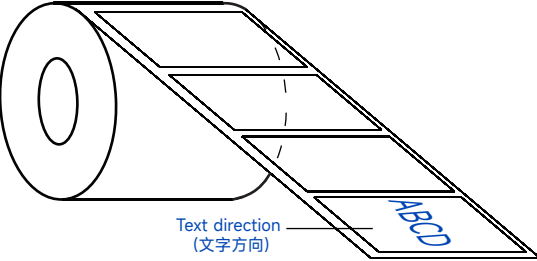

Technical Requirements (技术要求):

- (SIZE)is the main size((尺寸)标志为重点尺寸).
- Printing color: Black (印刷颜色: 黑色)
- Tolerance requirements: The tolerance of the external dimensions is ± 0.2 , and that of others is ± 0.3 . (公差要求: 外形尺寸公差为 ± 0.2 , 其他为 ± 0.3 。)
- Adhesive requirements: Checkered glue, peel strength (N/25mm 180°) ≥ 12 . (背胶要求: 网纹胶, 剥离强度 (N/25mm 180°) ≥ 12)
- Wipe resistance requirements: Resistant to wiping with alcohol, gasoline or n-hexane. (耐擦拭要求: 耐酒精、汽油或正己烷擦拭。)
- High - low temperature test: -20℃~70℃, each cycle is 2 hours, the test duration is 8 hours, without warping, falling off or blistering. (高低温试验: -20℃~70℃, 每个周期 2 小时, 试验持续时间 8 小时, 无翘起、脱落或起泡。)
- Test method: Refer to Jiuzhou's "Reliability Test Specification". (试验方法: 参考九洲的《可靠性试验规范》。)
- The product must comply with the requirements of the REACH regulation and the latest RoHS directive. (产品必须符合 REACH 法规和最新 RoHS 指令要求。)
- The adhered object: Metal(complanate). (被粘贴对象: 金属(平面))

Surface treatment
(镀 涂)

1.0	Created first version.	姚兴辉	2026.03.04
REV. (版本号)	Description (内容)	Signature (签名)	Date (日期)
Designed by (设计)	姚兴辉 2026.03.04		
Checked by (审核)			
Standardized by (标准化)			
Approved by (批准)	唐志飞 2026.03.04		

SN label
(流水号标贴)

1. SMR. 1097. 05XXX

Angle(视角)	Scale(比例)	Unit(单位)
	1:1	mm

100# Synthetic paper
(100#合成纸, 背网纹胶)

Page(第几页):1
In all page(总页数):1