


|               |                            |                |            |
|---------------|----------------------------|----------------|------------|
| Test_Mode     | $\pi$ /4DQPSK Transmitting | Test_Frequency | 2402MHz    |
| Tset_Engineer | \                          | Test_Date      | 2026/08/26 |


Test Graph

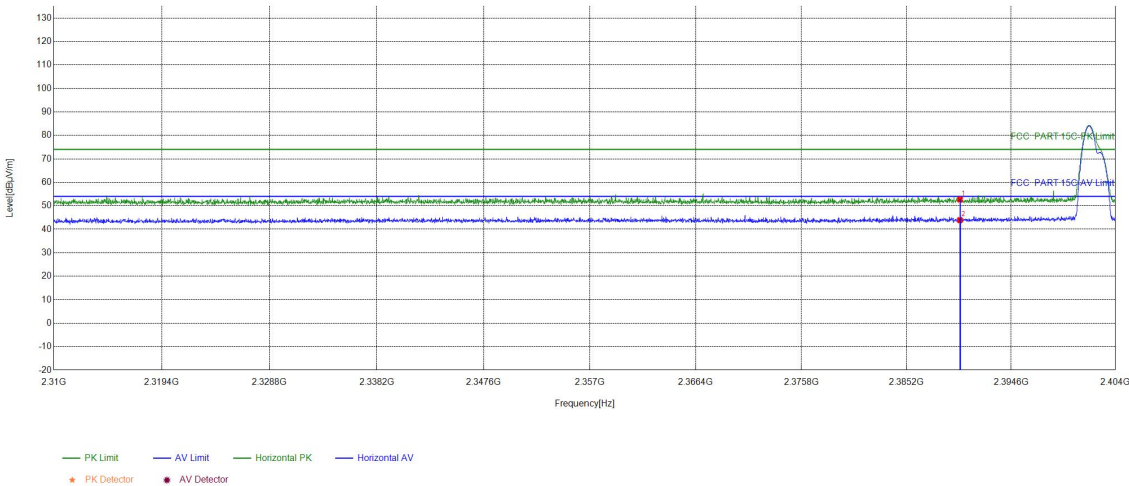

| Suspected List |             |             |                |                |                |             |        |            |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|------------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   | Remark |
| 1              | 2390        | 15.96       | 36.73          | 52.69          | 74.00          | 21.31       | PASS   | Horizontal | PK     |
| 2              | 2390        | 15.96       | 27.93          | 43.89          | 54.00          | 10.11       | PASS   | Horizontal | AV     |

|               |                               |                |            |
|---------------|-------------------------------|----------------|------------|
| Test_Mode     | $\pi$ /4DQPSK<br>Transmitting | Test_Frequency | 2402MHz    |
| Tset_Engineer | \                             | Test_Date      | 2026/08/26 |


Test Graph

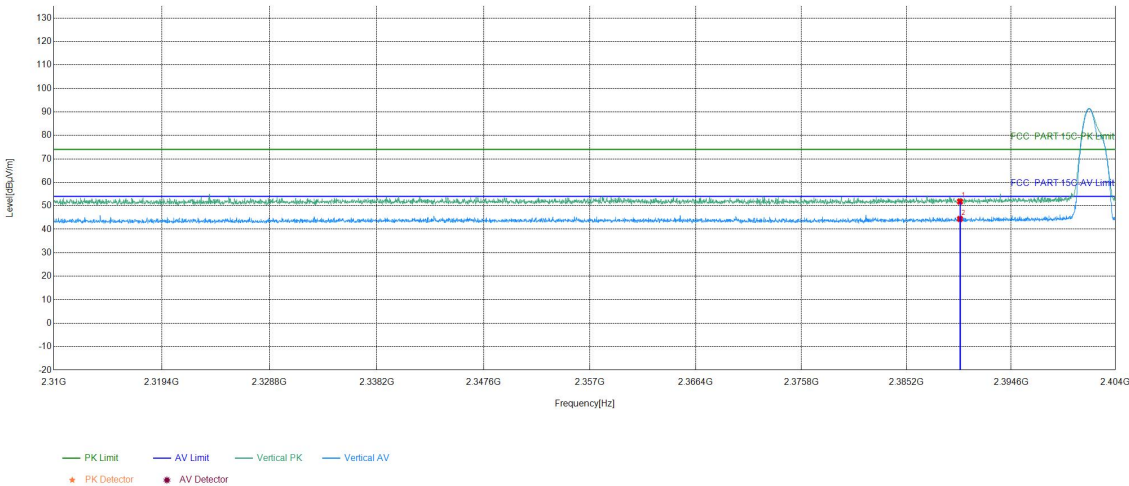

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2390        | 15.96       | 35.84          | 51.80          | 74.00          | 22.20       | PASS   | Vertical | PK     |
| 2              | 2390        | 15.96       | 28.44          | 44.40          | 54.00          | 9.60        | PASS   | Vertical | AV     |

|               |                               |                |            |
|---------------|-------------------------------|----------------|------------|
| Test_Mode     | $\pi$ /4DQPSK<br>Transmitting | Test_Frequency | 2480MHz    |
| Tset_Engineer | \                             | Test_Date      | 2026/08/26 |


Test Graph

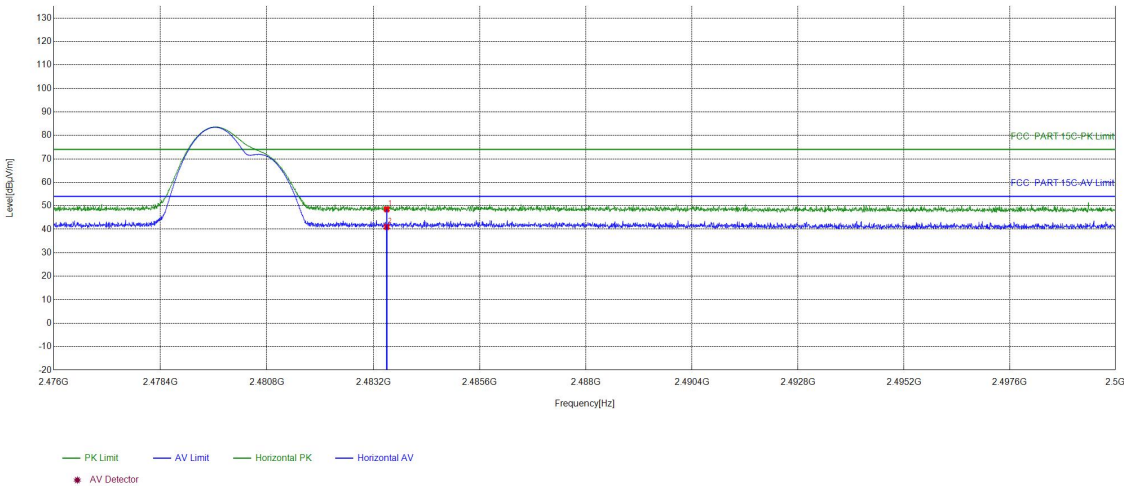

| Suspected List |             |             |                |                |                |             |        |            |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|------------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   | Remark |
| 1              | 2483.5      | 16.29       | 32.23          | 48.52          | 74.00          | 25.48       | PASS   | Horizontal | PK     |
| 2              | 2483.5      | 16.29       | 24.73          | 41.02          | 54.00          | 12.98       | PASS   | Horizontal | AV     |

|               |                               |                |            |
|---------------|-------------------------------|----------------|------------|
| Test_Mode     | $\pi$ /4DQPSK<br>Transmitting | Test_Frequency | 2480MHz    |
| Tset_Engineer | \                             | Test_Date      | 2026/08/26 |


Test Graph

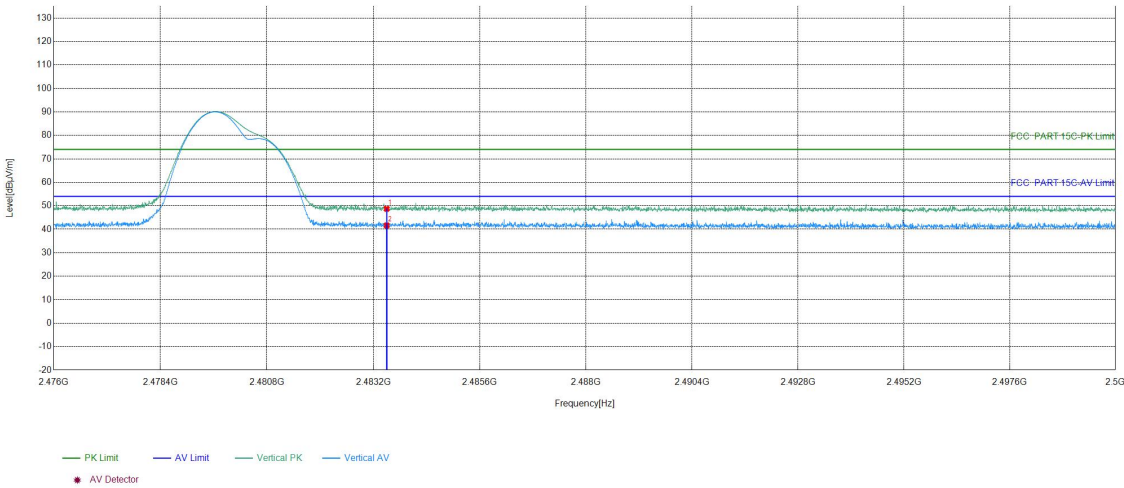

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 32.43          | 48.72          | 74.00          | 25.28       | PASS   | Vertical | PK     |
| 2              | 2483.5      | 16.29       | 25.35          | 41.64          | 54.00          | 12.36       | PASS   | Vertical | AV     |

|               |                    |                |            |
|---------------|--------------------|----------------|------------|
| Test_Mode     | 8DPSK Transmitting | Test_Frequency | 2402MHz    |
| Tset_Engineer | \                  | Test_Date      | 2026/08/26 |


Test Graph

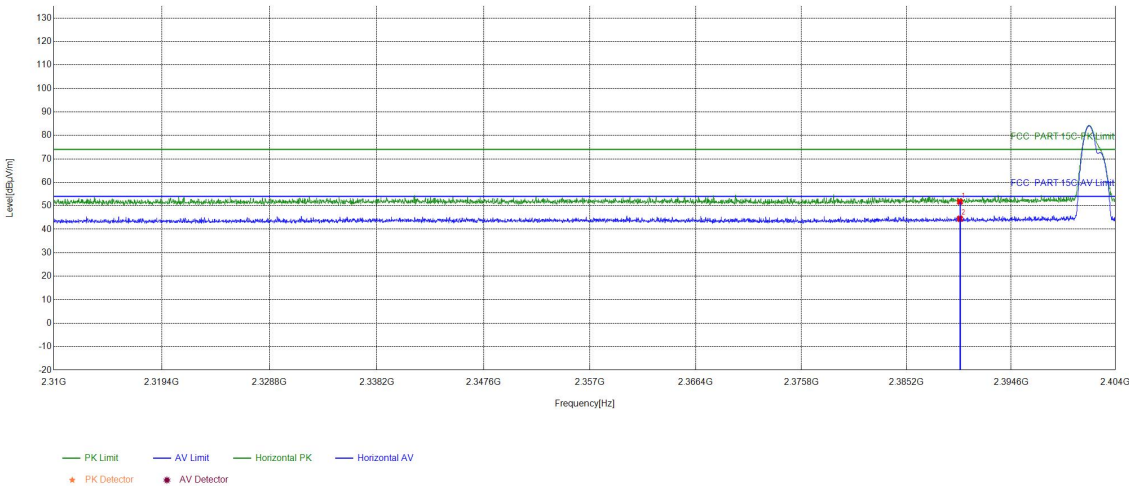

| Suspected List |             |             |                |                |                |             |        |            |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|------------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   | Remark |
| 1              | 2390        | 15.96       | 35.79          | 51.75          | 74.00          | 22.25       | PASS   | Horizontal | PK     |
| 2              | 2390        | 15.96       | 28.56          | 44.52          | 54.00          | 9.48        | PASS   | Horizontal | AV     |

|               |                    |                |            |
|---------------|--------------------|----------------|------------|
| Test_Mode     | 8DPSK Transmitting | Test_Frequency | 2402MHz    |
| Tset_Engineer | \                  | Test_Date      | 2026/08/26 |


Test Graph

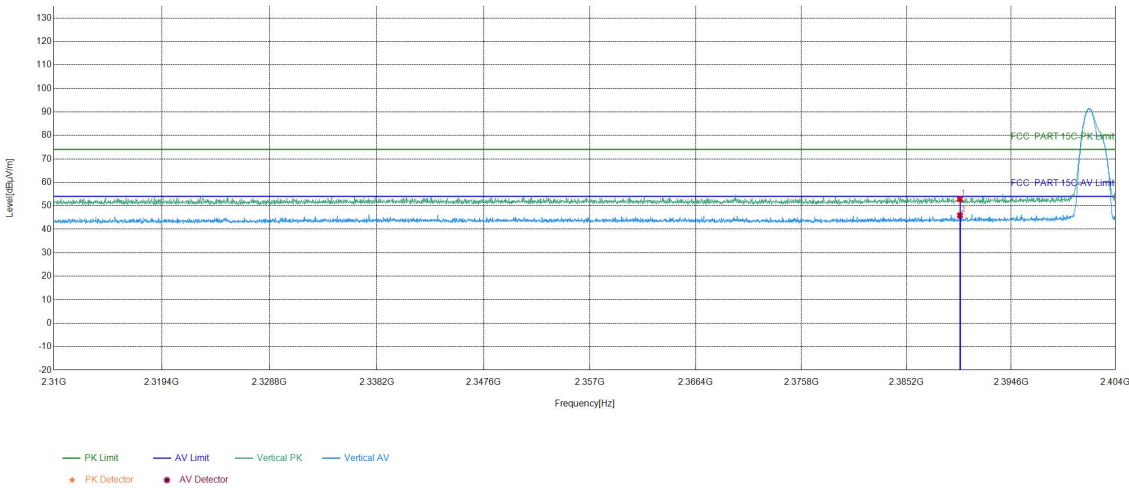

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2390        | 15.96       | 36.86          | 52.82          | 74.00          | 21.18       | PASS   | Vertical | PK     |
| 2              | 2390        | 15.96       | 29.95          | 45.91          | 54.00          | 8.09        | PASS   | Vertical | AV     |

|               |                    |                |            |
|---------------|--------------------|----------------|------------|
| Test_Mode     | 8DPSK Transmitting | Test_Frequency | 2480MHz    |
| Tset_Engineer | \                  | Test_Date      | 2026/08/26 |


Test Graph

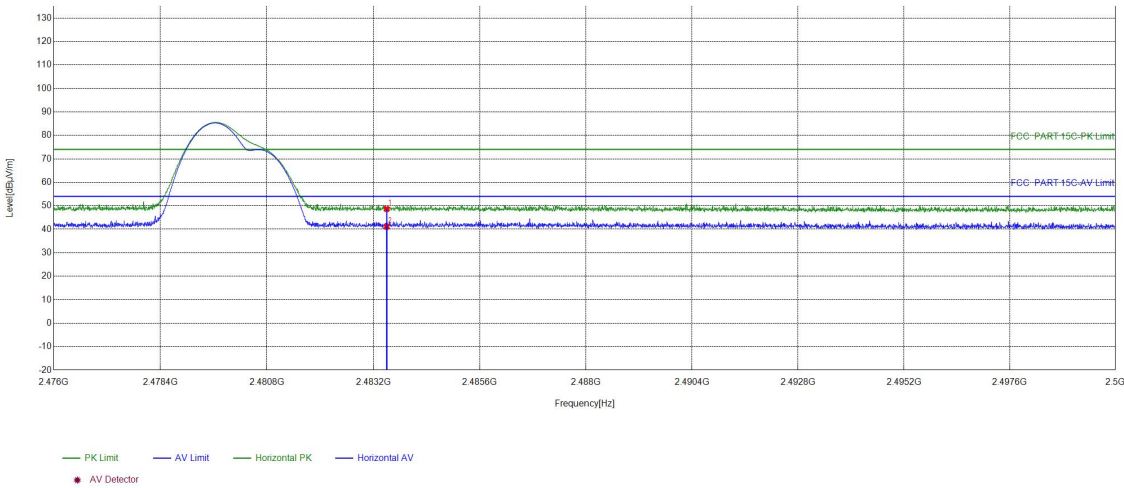

| Suspected List |             |             |                |                |                |             |        |            |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|------------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   | Remark |
| 1              | 2483.5      | 16.29       | 32.37          | 48.66          | 74.00          | 25.34       | PASS   | Horizontal | PK     |
| 2              | 2483.5      | 16.29       | 24.82          | 41.11          | 54.00          | 12.89       | PASS   | Horizontal | AV     |

|               |                    |                |            |
|---------------|--------------------|----------------|------------|
| Test_Mode     | 8DPSK Transmitting | Test_Frequency | 2480MHz    |
| Tset_Engineer | \                  | Test_Date      | 2026/08/26 |

Test Graph

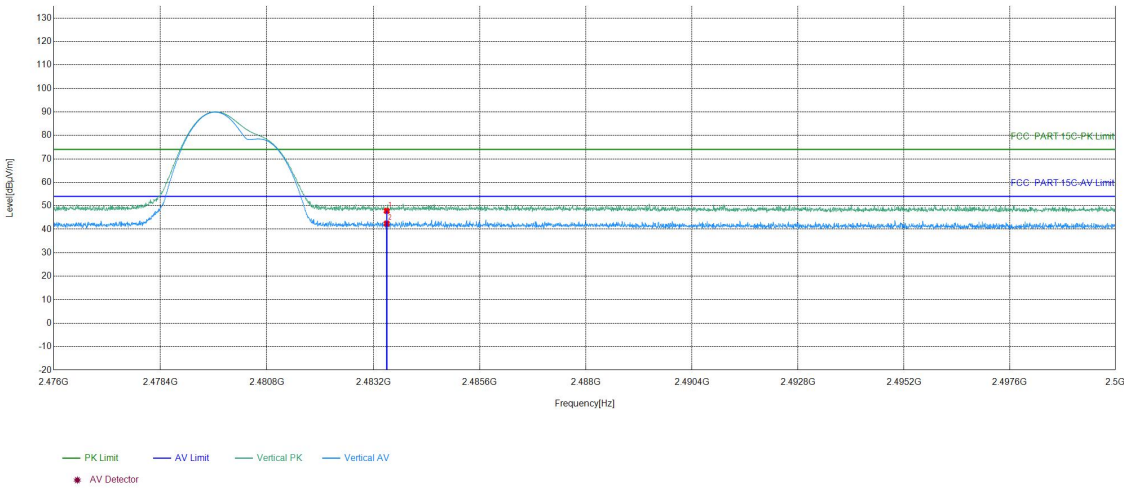

| Suspected List |             |             |                |                |                |             |        |          |        |
|----------------|-------------|-------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO             | Freq. [MHz] | Factor [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1              | 2483.5      | 16.29       | 31.56          | 47.85          | 74.00          | 26.15       | PASS   | Vertical | PK     |
| 2              | 2483.5      | 16.29       | 26.13          | 42.42          | 54.00          | 11.58       | PASS   | Vertical | AV     |

Note:  
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level =Receiver Reading - Correct Factor  
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

## 5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S819081

## 6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S819081.

## Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

\*\*\* End of Report \*\*\*