



# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

**Test Report No.** : E058R-038

**Applicant** : KTV GLOBAL CORPORATION

**Address** : 149, Gongdan 1-Dong, Gumi-City, Kyungbuk, 730-031, Korea

**Manufacturer** : KTV GLOBAL CORPORATION

**Address** : 149, Gongdan 1-Dong, Gumi-City, Kyungbuk, 730-031, Korea

**Type of Equipment** : 15" LCD CCTV MONITOR

**FCC ID** : BRFLCM15AA

**Model Name** : LCM15AA

**Serial number** : N/A

**Total page of Report** : 13 pages (including this page)

**Date of Incoming** : June 15, 2005

**Date of Issuing** : August 22, 2005

## SUMMARY

The equipment complies with the regulation; **PART 15 SUBPART B, Class B Computing Device Peripherals.**

This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production

Prepared by: \_\_\_\_\_

Seung-Hyun, Nam / Project Engineer  
EMC Div.  
ONETECH Corp.

Reviewed by: \_\_\_\_\_

Gea-Won, Lee / Chief Engineer  
EMC Div.  
ONETECH Corp.



## CONTENTS

|                                                 | Page |
|-------------------------------------------------|------|
| 1. VERIFICATION OF COMPLIANCE.....              | 3    |
| 2. GENERAL INFORMATION.....                     | 4    |
| 2.1 PRODUCT DESCRIPTION.....                    | 4    |
| 2.2 MODEL DIFFERENCES.....                      | 4    |
| 2.3 RELATED SUBMITTAL(S) / GRANT(S) .....       | 4    |
| 2.4 TEST SYSTEM DETAILS .....                   | 4    |
| 2.5 TEST METHODOLOGY .....                      | 5    |
| 2.6 TEST FACILITY .....                         | 5    |
| 3. SYSTEM TEST CONFIGURATION.....               | 6    |
| 3.1 JUSTIFICATION .....                         | 6    |
| 3.2 EUT EXERCISE SOFTWARE.....                  | 6    |
| 3.3 CABLE DESCRIPTION .....                     | 7    |
| 3.4 NOISE SUPPRESSION PARTS ON CABLE .....      | 7    |
| 3.5 EQUIPMENT MODIFICATIONS .....               | 7    |
| 3.6 CONFIGURATION OF TEST SYSTEM .....          | 8    |
| 4. PRELIMINARY TEST .....                       | 8    |
| 4.1 AC POWER LINE CONDUCTED EMISSION TEST ..... | 8    |
| 4.2 RADIATED EMISSION TEST .....                | 8    |
| 5. FINAL RESULT OF MEASUREMENT .....            | 9    |
| 5.1 CONDUCTED EMISSION TEST.....                | 9    |
| 5.2 RADIATED EMISSION TEST .....                | 11   |
| 6. FIELD STRENGTH CALCULATION .....             | 13   |
| 7. LIST OF TEST EQUIPMENT.....                  | 14   |

**1. VERIFICATION OF COMPLIANCE**

APPLICANT : KTV GLOBAL CORPORATION  
ADDRESS : 149, Gongdan 1-Dong, Gumi-City, Kyungbuk, 730-031, Korea  
CONTACT PERSON : Mr. Eui-Yeun, Kim / Team Leader  
TELEPHONE NO : +82-54-467-3551  
FCC ID : BRFLCM15AA  
MODEL NO/NAME : LCM15AA  
SERIAL NUMBER : N/A  
DATE : August 22, 2005

|                                                         |                                                      |
|---------------------------------------------------------|------------------------------------------------------|
| EQUIPMENT CLASS                                         | JBP - Peripheral Device for Class B Computing Device |
| E.U.T. DESCRIPTION                                      | 15" LCD CCTV MONITOR                                 |
| THIS REPORT CONCERNS                                    | ORIGINAL GRANT                                       |
| MEASUREMENT PROCEDURES                                  | ANSI C63.4: 2003                                     |
| TYPE OF EQUIPMENT TESTED                                | PRE-PRODUCTION                                       |
| KIND OF EQUIPMENT<br>AUTHORIZATION REQUESTED            | CERTIFICATION                                        |
| EQUIPMENT WILL BE OPERATED<br>UNDER FCC RULES PART(S)   | PART 15 SUBPART B, SECTION 15.101                    |
| MODIFICATIONS ON THE EQUIPMENT<br>TO ACHIEVE COMPLIANCE | No                                                   |
| FINAL TEST WAS CONDUCTED ON                             | 3 METER OPEN AREA TEST SITE                          |

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. GENERAL INFORMATION

### 2.1 Product Description

The KTV GLOBAL CORPORATION, Model LCM15AA (referred to as the EUT in this report) is a 15" LCD CCTV MONITOR. Product specification described herein was obtained from product data sheet or user's manual.

|                                              |                                                                          |
|----------------------------------------------|--------------------------------------------------------------------------|
| CHASSIS TYPE                                 | Plastic                                                                  |
| LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz) | 24 MHz, 14.31818 MHz and 27 MHz on the Main Board                        |
| NUMBER OF LAYERS                             | 4 Layers: Main Board, 1 Layer: Control Board                             |
| ELECTRICAL RATING                            | Input : AC100-240V, 50/60Hz, 1.2A, Output : DC 12V, 4.0A (AC/DC Adaptor) |
| EXTERNAL TERMINALS                           | BNC Jack, RCA Jack, Mini DIN Jack, D-Sub 15 Pins, DVI-D Jack             |

### 2.2 Model Differences

- None

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

| Model     | Manufacturer                     | FCC ID     | Description                       | Connected to |
|-----------|----------------------------------|------------|-----------------------------------|--------------|
| LCM15AA   | KTV GLOBAL CORPORATION           | BRFLCM15AA | 15" LCD CCTV MONITOR (EUT)        | PC           |
| 0217B1248 | Li Shin International Enterprise | N/A        | AC/DC Adaptor (Inside of the EUT) | EUT          |
| DHP       | Dell Computer Corp               | DoC        | PC                                | -            |
| 3701      | Goodnicetech                     | N/A        | Keyboard                          | PC           |
| P801      | N/A                              | N/A        | Mouse                             | PC           |
| SAC-410ND | Samsung Aerospace                | N/A        | CCD Camera                        | EUT          |
| 2225C     | HP                               | DSI6XU2225 | Printer                           | PC           |
| 020-0470  | Cardinal                         | GDE0196    | Modem                             | PC           |
| SAM-14M   | Samsung                          | N/A        | CCTV Monitor                      | EUT          |



## 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

## 2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-080, Korea. Description details of test facilities were submitted to the Commission on April 04, 2003. (Registration Number: 340658)



### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

| DEVICE TYPE    | MANUFACTURER   | MODEL/PART NUMBER | FCC ID |
|----------------|----------------|-------------------|--------|
| Main Board     | KTV            | PLAM12            | N/A    |
| Inverter Board | P.I.S Corp.    | AT-0150XH (BIT)   | N/A    |
| LCD Panel      | LG Philips LCD | LC150X02          | N/A    |
| Front Board    | KTV            | PLAC03            | N/A    |

#### 3.2 EUT exercise Software

The following two modes were operated during compliance testing, but worst emissions were recorded in this report.

- 1) The windows program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. This program was included into HOST. Once loaded, this program sequentially exercises each system component in turn. The sequence used is: (1) series of "H" characters are printed on the monitor until the screen is completely full, (2) copy series of "H" characters to mass storage device (if one is used). The complete cycle is repeated continuously.

The test was performed about each resolution from minimum resolution to maximum resolution for getting maximum noise level and the investigated maximum resolution mode of the EUT was 1024 x 768, 75Hz.

- 2) The EUT was operated with CCTV monitor mode during the test.



### 3.3 Cable Description

|                      | Power Cord Shielded (Y/N) | I/O cable Shielded (Y/N) | Length (M)     |
|----------------------|---------------------------|--------------------------|----------------|
| 15" LCD CCTV MONITOR | N                         | Y                        | 1.5(P), 1.5(D) |
| PC                   | N                         | -                        | 1.5(P)         |
| Keyboard             | N                         | N                        | 1.5(D)         |
| Mouse                | N                         | N                        | 1.5(D)         |
| CCD Camera           | N                         | N                        | 1.5(P), 1.5(D) |
| Printer              | N                         | Y                        | 1.5(P), 1.5(D) |
| Modem                | N                         | Y                        | 1.5(P), 1.5(D) |
| CCTV Monitor         | N                         | Y                        | 1.5(P), 1.5(D) |

\* The marked "(P)" means the Power Cable and "(D)" means Signal Cable.

### 3.4 Noise Suppression Parts on Cable

|                      | Ferrite Bead (Y/N) | Location       | Metal Hood (Y/N) | Location |
|----------------------|--------------------|----------------|------------------|----------|
| 15" LCD CCTV MONITOR | Y                  | BOTH END       | Y                | BOTH END |
| PC                   | -                  | -              | -                | -        |
| Keyboard             | N                  | N/A            | Y                | PC END   |
| Mouse                | N                  | N/A            | Y                | PC END   |
| CCD Camera           | Y                  | CCD Camera END | Y                | BOTH END |
| Printer              | N                  | N/A            | Y                | BOTH END |
| Modem                | N                  | N/A            | Y                | BOTH END |
| CCTV Monitor         | N                  | N/A            | Y                | BOTH END |

### 3.5 Equipment Modifications

-. None

### 3.6 Configuration of Test System

**Line Conducted Test:** The power of the EUT was supplied by AC/DC adapter and the adapter was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2003 7.2.3 to determine the worse operating conditions.

**Radiated Emission Test:** Preliminary radiated emission test was conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

| Operation Mode                                                                  | The Worse operating condition (Please check one only) |
|---------------------------------------------------------------------------------|-------------------------------------------------------|
| CCTV Monitor Mode                                                               | -                                                     |
| Peripheral device mode for Class B computing device<br>(Resolution: 1024 x 768) | X                                                     |

### 4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

| Operation Mode                                                                  | The Worse operating condition (Please check one only) |
|---------------------------------------------------------------------------------|-------------------------------------------------------|
| CCTV Monitor Mode                                                               | -                                                     |
| Peripheral device mode for Class B computing device<br>(Resolution: 1024 x 768) | X                                                     |



## 5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

### 5.1 Conducted Emission Test

Humidity Level : 41 % Temperature: 21 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107(a)  
 Type of Test : CLASS B  
 Result : PASSED BY -7.92 dB at 0.18 MHz under peak mode

EUT : 15" LCD CCTV MONITOR Date: June 15, 2005  
 Operating Condition : Continuously displayed "H" characters on the screen of the EUT  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)  
 Resolution : 1024 x 768, 75Hz

| Frequency (MHz) | Line | Peak (dBuV)    |            | Margin (dB) |
|-----------------|------|----------------|------------|-------------|
|                 |      | Emission level | Q.P Limits |             |
| 0.18            | H    | 56.57          | 64.49      | -7.92       |
| 0.23            | N    | 47.91          | 62.27      | -14.36      |
| 5.31            | H    | 46.11          | 60.00      | -13.89      |
| 10.40           | H    | 47.36          | 60.00      | 12.64       |
| 13.68           | H    | 47.04          | 60.00      | -12.96      |
| 19.52           | H    | 45.53          | 60.00      | -14.47      |
| Frequency (MHz) | Line | Average (dBuV) |            | Margin (dB) |
|                 |      | Emission level | Limits     |             |
| 0.18            | H    | 44.07          | 54.49      | -10.42      |
| 0.23            | N    | 38.69          | 52.27      | -13.58      |
| 10.40           | H    | 32.51          | 50.00      | -17.49      |
| 13.68           | H    | 34.53          | 50.0       | -15.47      |

Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line

See next page for an overview sweep performed with peak and average detector.


Tested by: In-Sub, Youn / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.


EMC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea  
 (TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

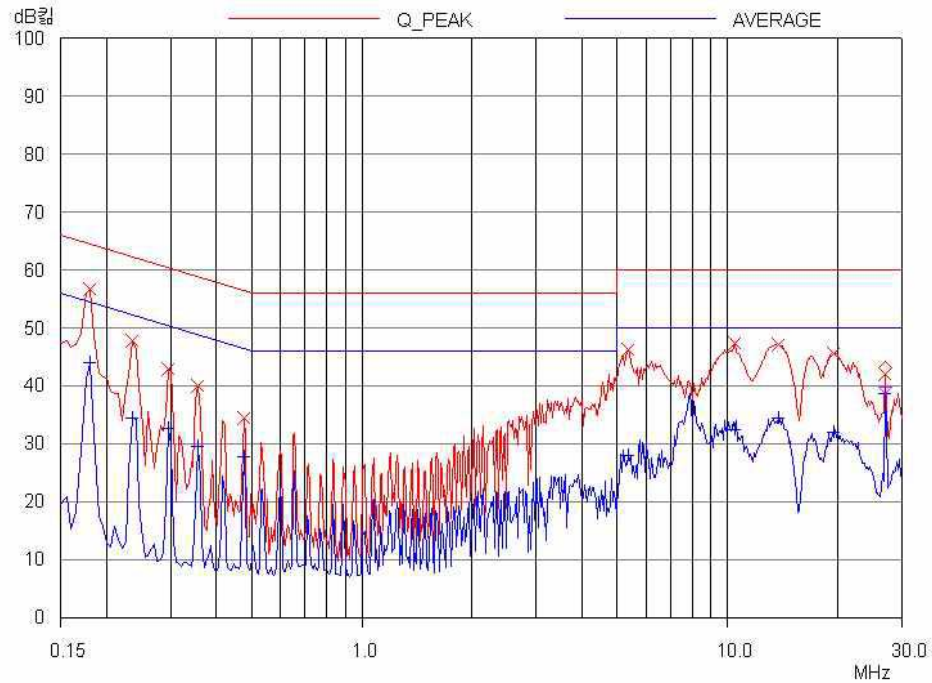

## HOT LINE

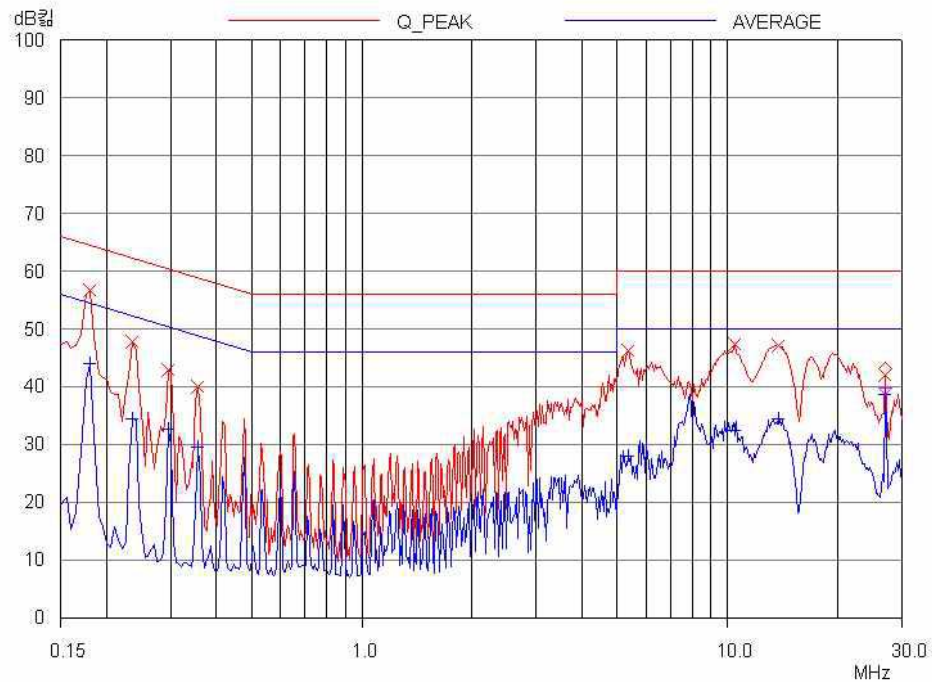

## NEUTRAL LINE

**5.2 Radiated Emission Test**

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 40 % Temperature: 24 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109(a)  
 Type of Test : CLASS B  
 Result : PASSED BY -4.32dB at 256.48MHz

EUT : 15" LCD CCTV MONITOR Date: July  
 26, 2005

Operating Condition : Continuously displayed "H" characters on the screen of the EUT

Frequency range : 30MHz – 1000MHz

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

Distance : 3 Meter

Resolution : 1024 x 768, 75Hz

| Radiated Emission |                | Ant  | Correction Factors |               | Total            | FCC               |                |
|-------------------|----------------|------|--------------------|---------------|------------------|-------------------|----------------|
| Freq.<br>(MHz)    | Amp.<br>(dBuV) | Pol. | Ant.<br>(dBuV/m)   | Cable<br>(dB) | Amp.<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) |
| 53.60             | 23.60          | V    | 9.45               | 1.43          | 34.48            | 40.00             | -5.52          |
| 72.60             | 26.60          | H    | 5.84               | 1.55          | 33.99            | 40.00             | -6.01          |
| 106.70            | 22.80          | V    | 11.10              | 1.90          | 35.80            | 43.52             | -7.72          |
| 120.30            | 19.60          | V    | 12.99              | 2.01          | 34.60            | 43.52             | -8.92          |
| 241.10            | 20.90          | H    | 16.79              | 3.26          | 40.95            | 46.02             | -5.07          |
| 256.48            | 21.10          | H    | 17.17              | 3.43          | 41.70            | 46.02             | -4.32          |
| 480.40            | 18.80          | H    | 17.04              | 5.11          | 40.95            | 46.02             | -5.07          |
| 528.90            | 16.90          | H    | 17.94              | 5.38          | 40.22            | 46.02             | -5.80          |
| 697.40            | 14.60          | H    | 20.47              | 6.36          | 41.43            | 46.02             | -4.59          |
| 721.00            | 13.90          | H    | 20.85              | 6.61          | 41.36            | 46.02             | -4.66          |
| 818.20            | 12.40          | V    | 21.17              | 7.16          | 40.73            | 46.02             | -5.29          |



# ONETECH

*Testing & Evaluation Lab.*

Page 12 of 13

FCC ID. : BRFLCM15AA

Report No. : E058R-038

**Tested by: In-Sub, Youn / Test Engineer**

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-004 (Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea  
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

**EMC Testing Dept** : 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

---

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



## 7. LIST OF TEST EQUIPMENT

| No. | EQUIPMENTS               | MFR.        | MODEL       | SER. NO.     | LAST CAL | DUE CAL | USE |
|-----|--------------------------|-------------|-------------|--------------|----------|---------|-----|
| 1.  | Test receiver            | R/S         | ESVS10      | 827864/005   | DEC/04   | 12MONTH | ■   |
| 2.  | Test receiver            | R/S         | ESHS 10     | 834467/007   | MAY/05   | 12MONTH | ■   |
| 3.  | Spectrum analyzer        | HP          | 8566B       | 3407A08547   | JUL/05   | 12MONTH |     |
| 4.  | Spectrum analyzer        | HP          | 8568B       | 3109A05456   | APR/05   | 12MONTH | ■   |
| 5.  | RF preselector           | HP          | 85685A      | 3107A01264   | APR/05   | 12MONTH | ■   |
| 6.  | Quasi-Peak Adapter       | HP          | 8574B       | 2811A01432   | APR/05   | 12MONTH | ■   |
| 7.  | TRILOG Broadband Antenna | Schwarzbeck | VULB9163    | VULB9163 166 | APR/05   | 12MONTH |     |
| 8.  | Biconical antenna        | EMCO        | 3110        | 9003-1121    | FEB/05   | 12MONTH |     |
|     |                          | Schwarzbeck | VHA9103     | 91031852     | JAN/05   |         | ■   |
| 9.  | Log Periodic antenna     | EMCO        | 3146        | 9001-2614    | FEB/05   | 12MONTH |     |
|     |                          | Schwarzbeck | 9108-A(494) | 62281001     | FEB/05   |         | ■   |
| 10. | LISN                     | EMCO        | 3825/2      | 9109-1867    | JUL/04   | 12MONTH |     |
|     |                          |             |             | 9109-1869    | JUL/05   |         | ■   |
|     |                          | Schwarzbeck | NSLK 8128   | 8128-216     | JUN/05   |         | ■   |
| 11. | Position Controller      | HD GmbH     | HD100       | N/A          | N/A      | N/A     | ■   |
| 12. | Turn Table               | HD GmbH     | DS420S      | N/A          | N/A      | N/A     | ■   |
| 13. | Antenna Master           | HD GmbH     | MA240       | N/A          | N/A      | N/A     | ■   |