
Appendix for the Report

Dosimetric Assessment of the Bang & Olufsen BeoCom 1 (FCC ID: BV5BEOCOM1) According to the FCC Requirements

SAR Distribution Plots

September 01, 2003
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
Bang & Olufsen Telecom
Kjeldsmarkvej 1
DK-7600 Struer Denmark

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, 2450 MHZ HEAD.....	3
2	SAR DISTRIBUTION PLOTS, 2450 MHZ BODY.....	7
3	SAR Z-AXIS SCANS (VALIDATION).....	9
4	SAR Z-AXIS SCANS (MEASUREMENTS).....	11

1 SAR Distribution Plots, 2450 MHz Head

Test Laboratory: IMST

File Name: [Comulm_1.da4](#)

DUT: BeoCom 1; Type: BeoCom 1; Serial: 17330250

Communication System: 2.4 GHz Cordless Phone; Frequency: 2450 MHz; Duty Cycle: 1:16

Medium: Head 2450 ($\sigma = 1.86$ mho/m, $\epsilon_r = 37.9$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(4.8, 4.8, 4.8); Calibrated: 15.05.2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn335; Calibrated: 05.05.2003

- Phantom: SAM TP:1176; Type: SAM 4.0; Serial: 1176

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

cheek left/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.96 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.0679 mW/g

cheek left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.164 W/kg

SAR(1 g) = 0.0704 mW/g; SAR(10 g) = 0.0329 mW/g

Reference Value = 3.96 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.0734 mW/g

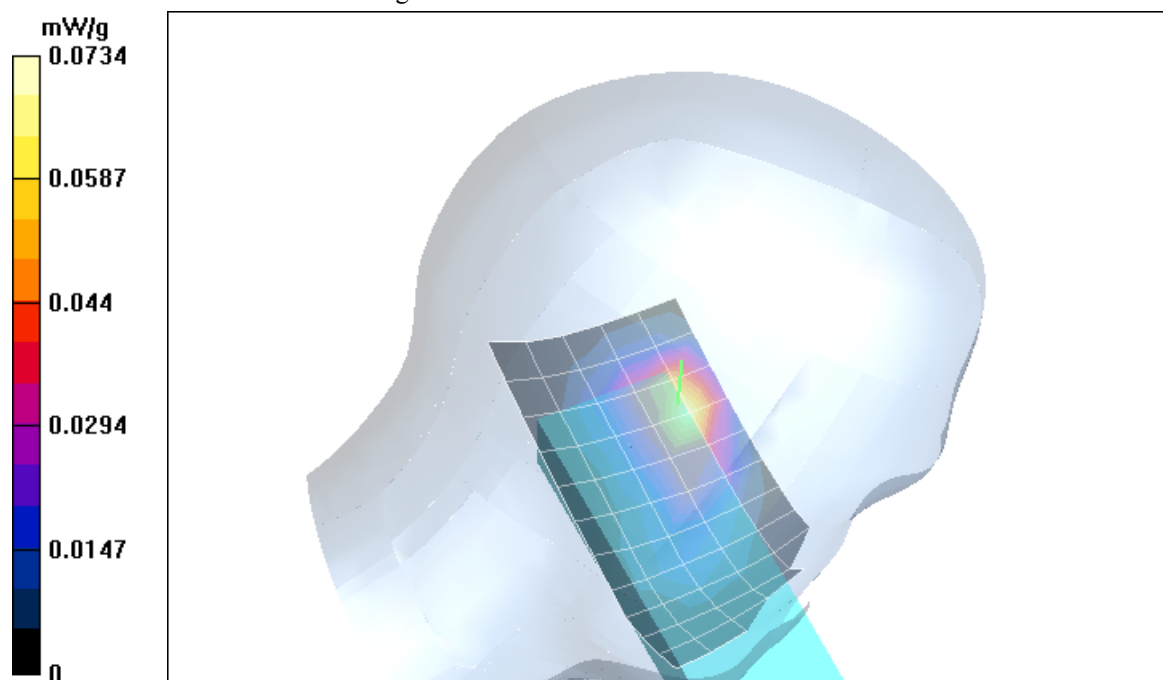


Fig. 1: SAR distribution for 2450 MHz, channel 041, cheek position, left side of head. (02.07.2003; Ambient Temperature: 21.3° C; Liquid Temperature: 19.3° C).

Test Laboratory: IMST

File Name: [Comulm_2.da4](#)

DUT: BeoCom 1; Type: BeoCom 1; Serial: 17330250

Communication System: 2.4 GHz Cordless Phone; Frequency: 2450 MHz; Duty Cycle: 1:16

Medium: Head 2450 ($\sigma = 1.86 \text{ mho/m}$, $\epsilon_r = 37.9$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(4.8, 4.8, 4.8); Calibrated: 15.05.2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn335; Calibrated: 05.05.2003

- Phantom: SAM TP:1176; Type: SAM 4.0; Serial: 1176

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

tilted left/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.36 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.0558 mW/g

tilted left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.0607 mW/g; SAR(10 g) = 0.0296 mW/g

Reference Value = 4.36 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.0647 mW/g

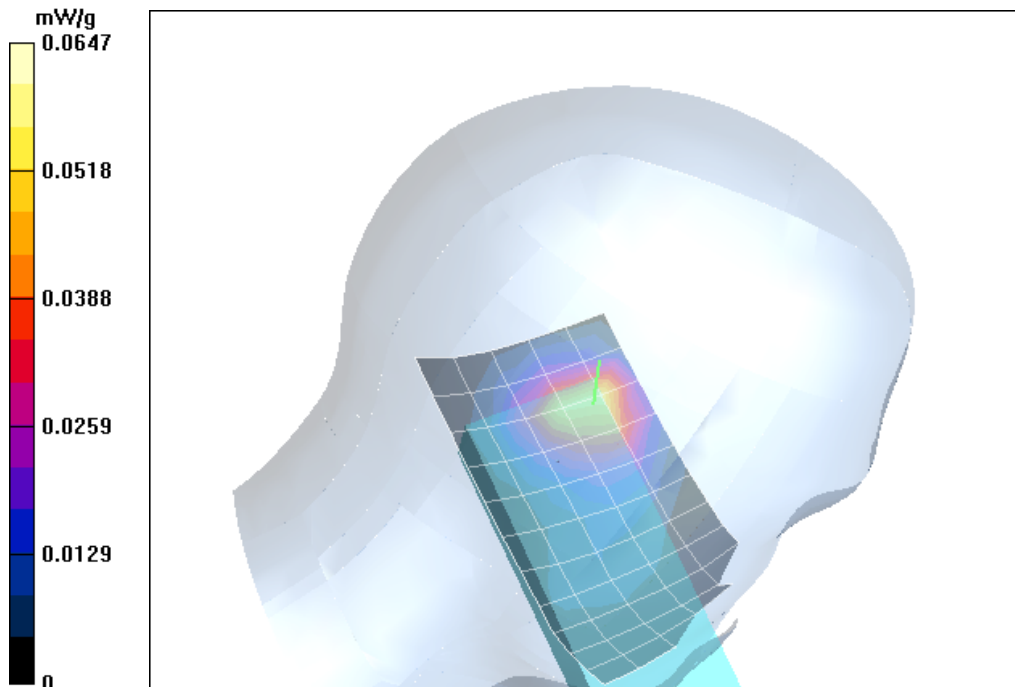


Fig. 2: SAR distribution for 2450 MHz, channel 041, tilted position, left side of head. (02.07.2003; Ambient Temperature: 21.1° C; Liquid Temperature : 19.2° C).

Test Laboratory: IMST

File Name: [Comurm_1.da4](#)

DUT: BeoCom 1; Type: BeoCom 1; Serial: 17330250

Program: Measurement

Communication System: 2.4 GHz Cordless Phone; Frequency: 2450 MHz; Duty Cycle: 1:16

Medium: Head 2450 ($\sigma = 1.86$ mho/m, $\epsilon_r = 37.9$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(4.8, 4.8, 4.8); Calibrated: 15.05.2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn335; Calibrated: 05.05.2003

- Phantom: SAM TP:1176; Type: SAM 4.0; Serial: 1176

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

cheek right/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.29 V/m

Power Drift = -0.05 dB

Maximum value of SAR = 0.0474 mW/g

cheek right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.0513 mW/g; SAR(10 g) = 0.0254 mW/g

Reference Value = 4.29 V/m

Power Drift = -0.05 dB

Maximum value of SAR = 0.0539 mW/g

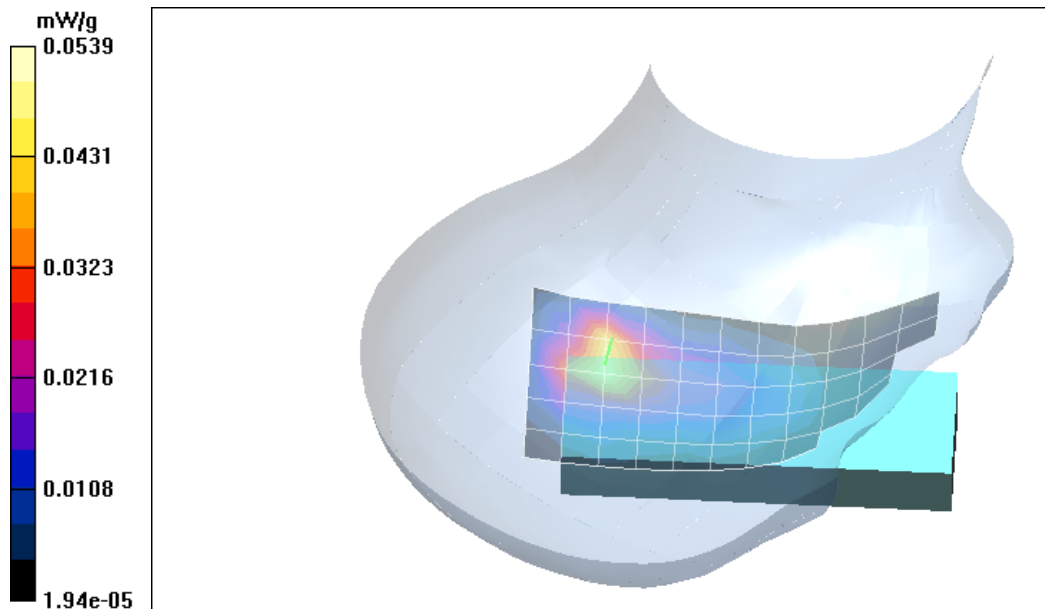


Fig. 3: SAR distribution for 2450 MHz, channel 041, cheek position, right side of head (02.07.2003; Ambient Temperature: 21.1° C; Liquid Temperature : 19.1° C).

Test Laboratory: IMST

File Name: [Comurm_2.da4](#)

DUT: BeoCom 1; Type: BeoCom 1; Serial: 17330250

Communication System: 2.4 GHz Cordless Phone; Frequency: 2450 MHz; Duty Cycle: 1:16

Medium: Head 2450 ($\sigma = 1.86 \text{ mho/m}$, $\epsilon_r = 37.9$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(4.8, 4.8, 4.8); Calibrated: 15.05.2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn335; Calibrated: 05.05.2003

- Phantom: SAM TP:1176; Type: SAM 4.0; Serial: 1176

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

tilted right/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.96 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.0496 mW/g

tilted right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.0545 mW/g; SAR(10 g) = 0.0268 mW/g

Reference Value = 3.96 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.058 mW/g

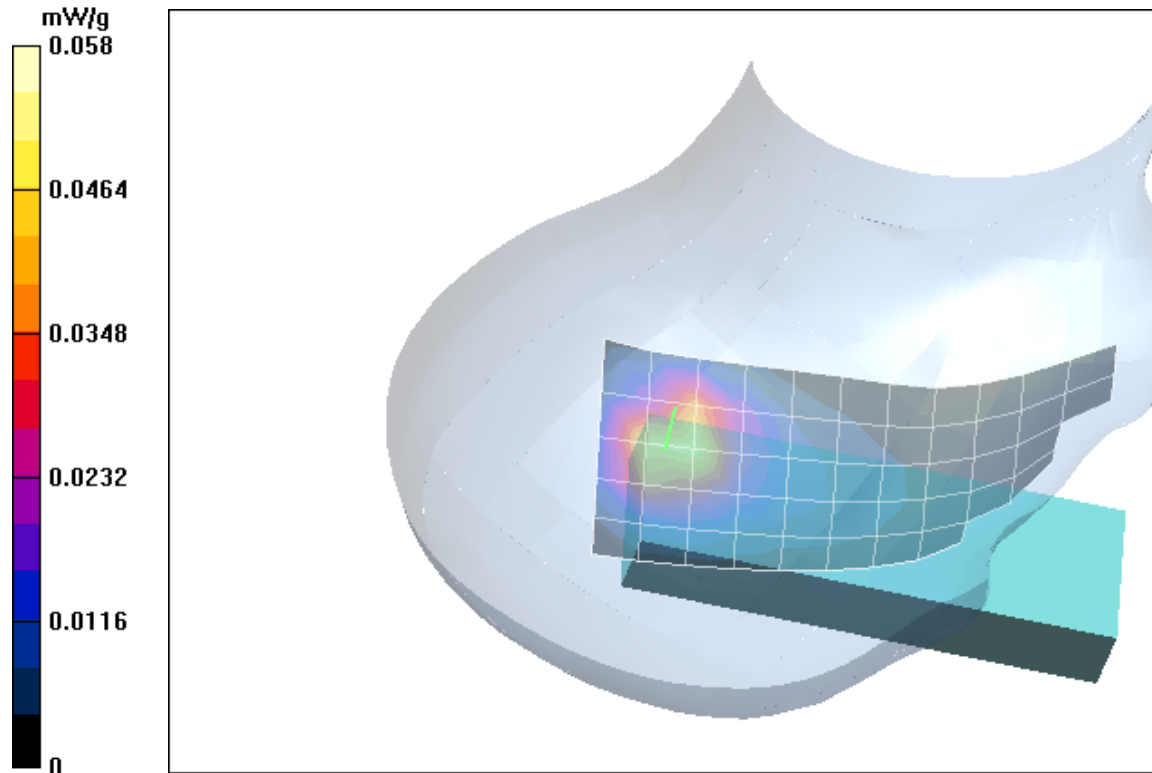


Fig. 4: SAR distribution for 2450 MHz, channel 041, tilted position, right side of head. (02.07.2003; Ambient Temperature: 21.0° C; Liquid Temperature : 18.9° C).

2 SAR Distribution Plots, 2450 MHz Body

Test Laboratory: IMST

File Name: [comuhm_1.da4](#)

DUT: BeoCom 1; Type: BeoCom 1; Serial: 17330250

Communication System: 2.4 GHz Cordless Phone; Frequency: 2450 MHz; Duty Cycle: 1:16

Medium: Body 2450 MHz ($\sigma = 1.95 \text{ mho/m}$, $\epsilon_r = 50.4$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(4.4, 4.4, 4.4); Calibrated: 15.05.2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 05.05.2003
- Phantom: SAM TP:1176; Type: SAM;
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Unnamed procedure/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.36 V/m

Power Drift = 0.12 dB

Maximum value of SAR = 0.0314 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.0662 W/kg

SAR(1 g) = 0.0306 mW/g; SAR(10 g) = 0.0159 mW/g

Reference Value = 3.36 V/m

Power Drift = 0.12 dB

Maximum value of SAR = 0.0322 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.0612 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.0155 mW/g

Reference Value = 3.36 V/m

Power Drift = 0.12 dB

Maximum value of SAR = 0.0288 mW/g

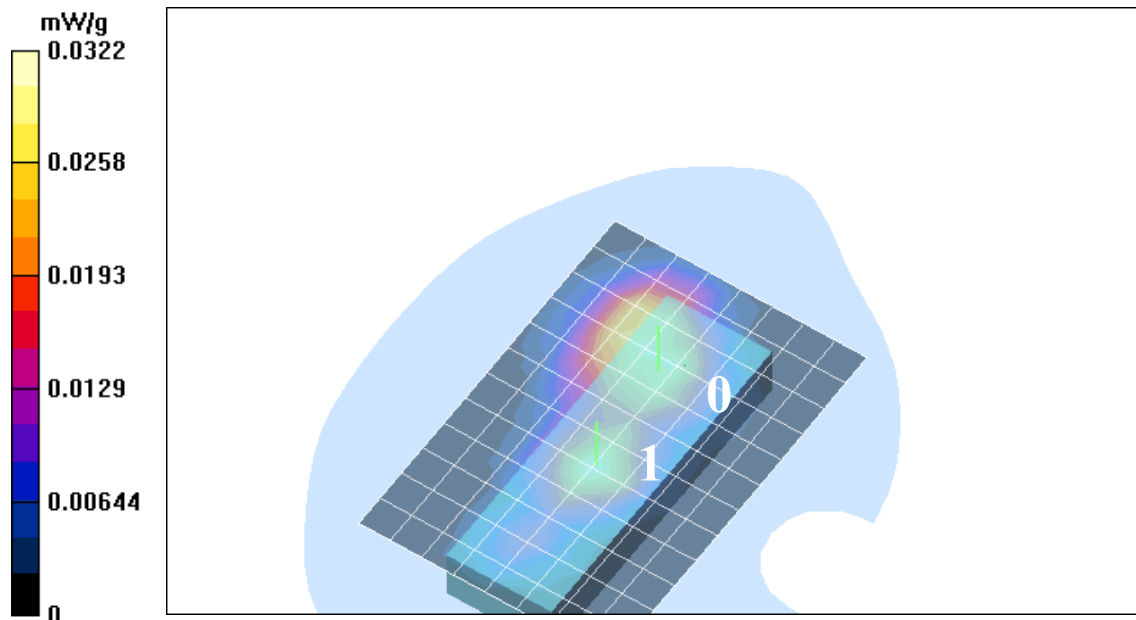


Fig. 5: SAR distribution for belt clip with headset, 2450 MHz, channel 041, display towards the ground. (03.07.2003; Ambient Temperature: 21.0° C; Liquid Temperature : 20.3° C).

Test Laboratory: IMST

File Name: [comuhm_2.da4](#)

DUT: BeoCom 1; Type: BeoCom 1; Serial: 17330250

Communication System: 2.4 GHz Cordless Phone; Frequency: 2450 MHz; Duty Cycle: 1:16

Medium: Body 2450 MHz ($\sigma = 1.95 \text{ mho/m}$, $\epsilon_r = 50.4$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(4.4, 4.4, 4.4); Calibrated: 15.05.2003

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn335; Calibrated: 05.05.2003

- Phantom: SAM TP:1176; Type: SAM;

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Unnamed procedure/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.23 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.0786 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.0815 mW/g; SAR(10 g) = 0.0395 mW/g

Reference Value = 2.23 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.0856 mW/g

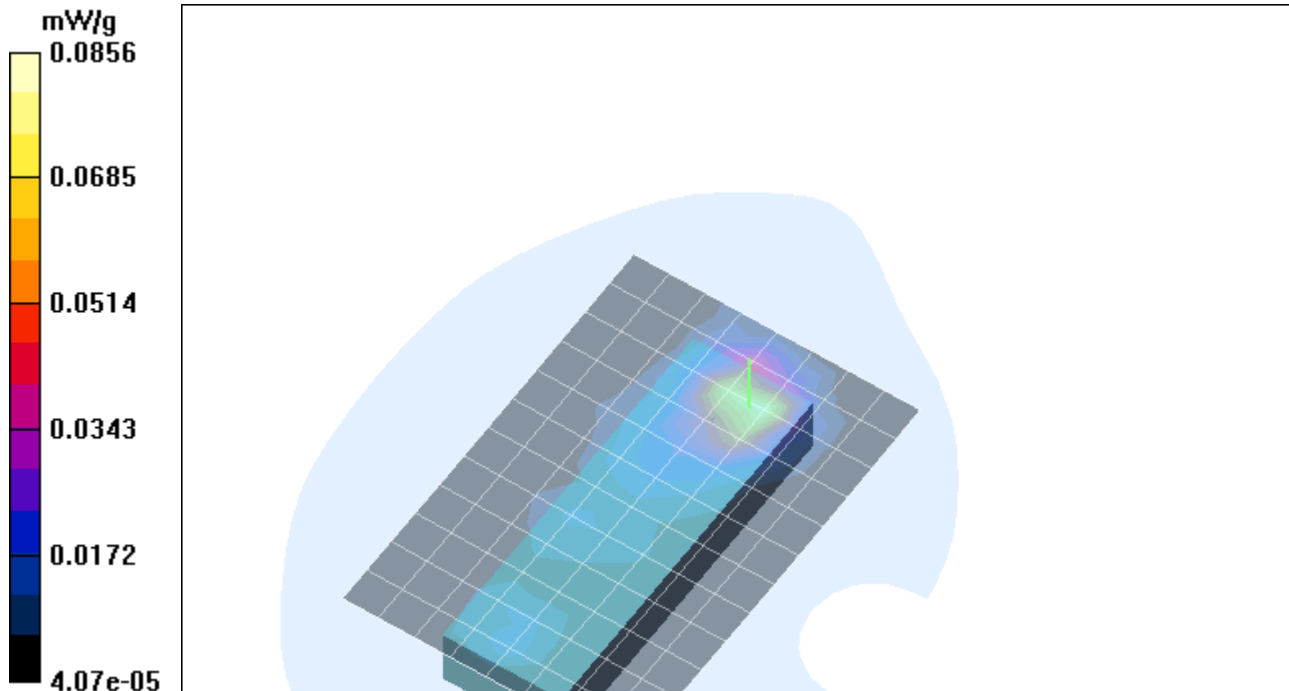


Fig. 6: SAR distribution for belt clip with headset, 2450 MHz, channel 041, display towards the phantom. (03.07.2003; Ambient Temperature: 21.1° C; Liquid Temperature : 20.3° C).

3 SAR z-axis scans (Validation)

The following pictures show the z-axis scan for the worst case values.

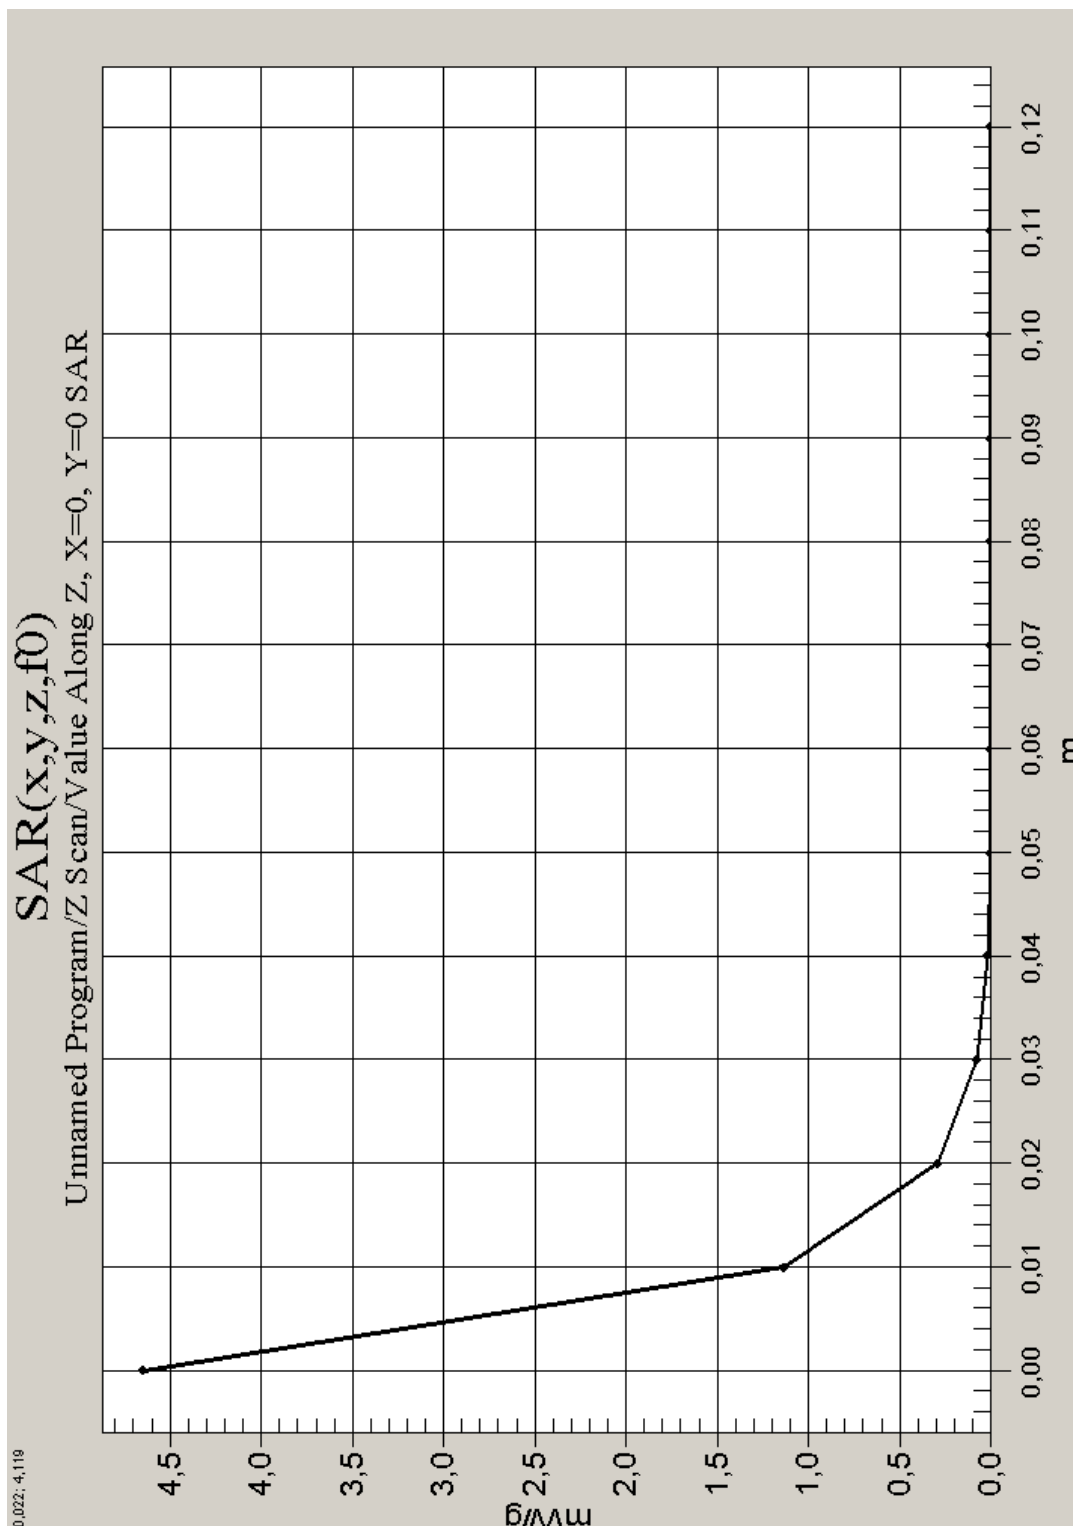


Fig. 7: Validation measurement 2450 MHz Head (02.07.2003), coarse grid. Ambient Temperature: 21.1° C, Liquid Temperature: 20.50° C.

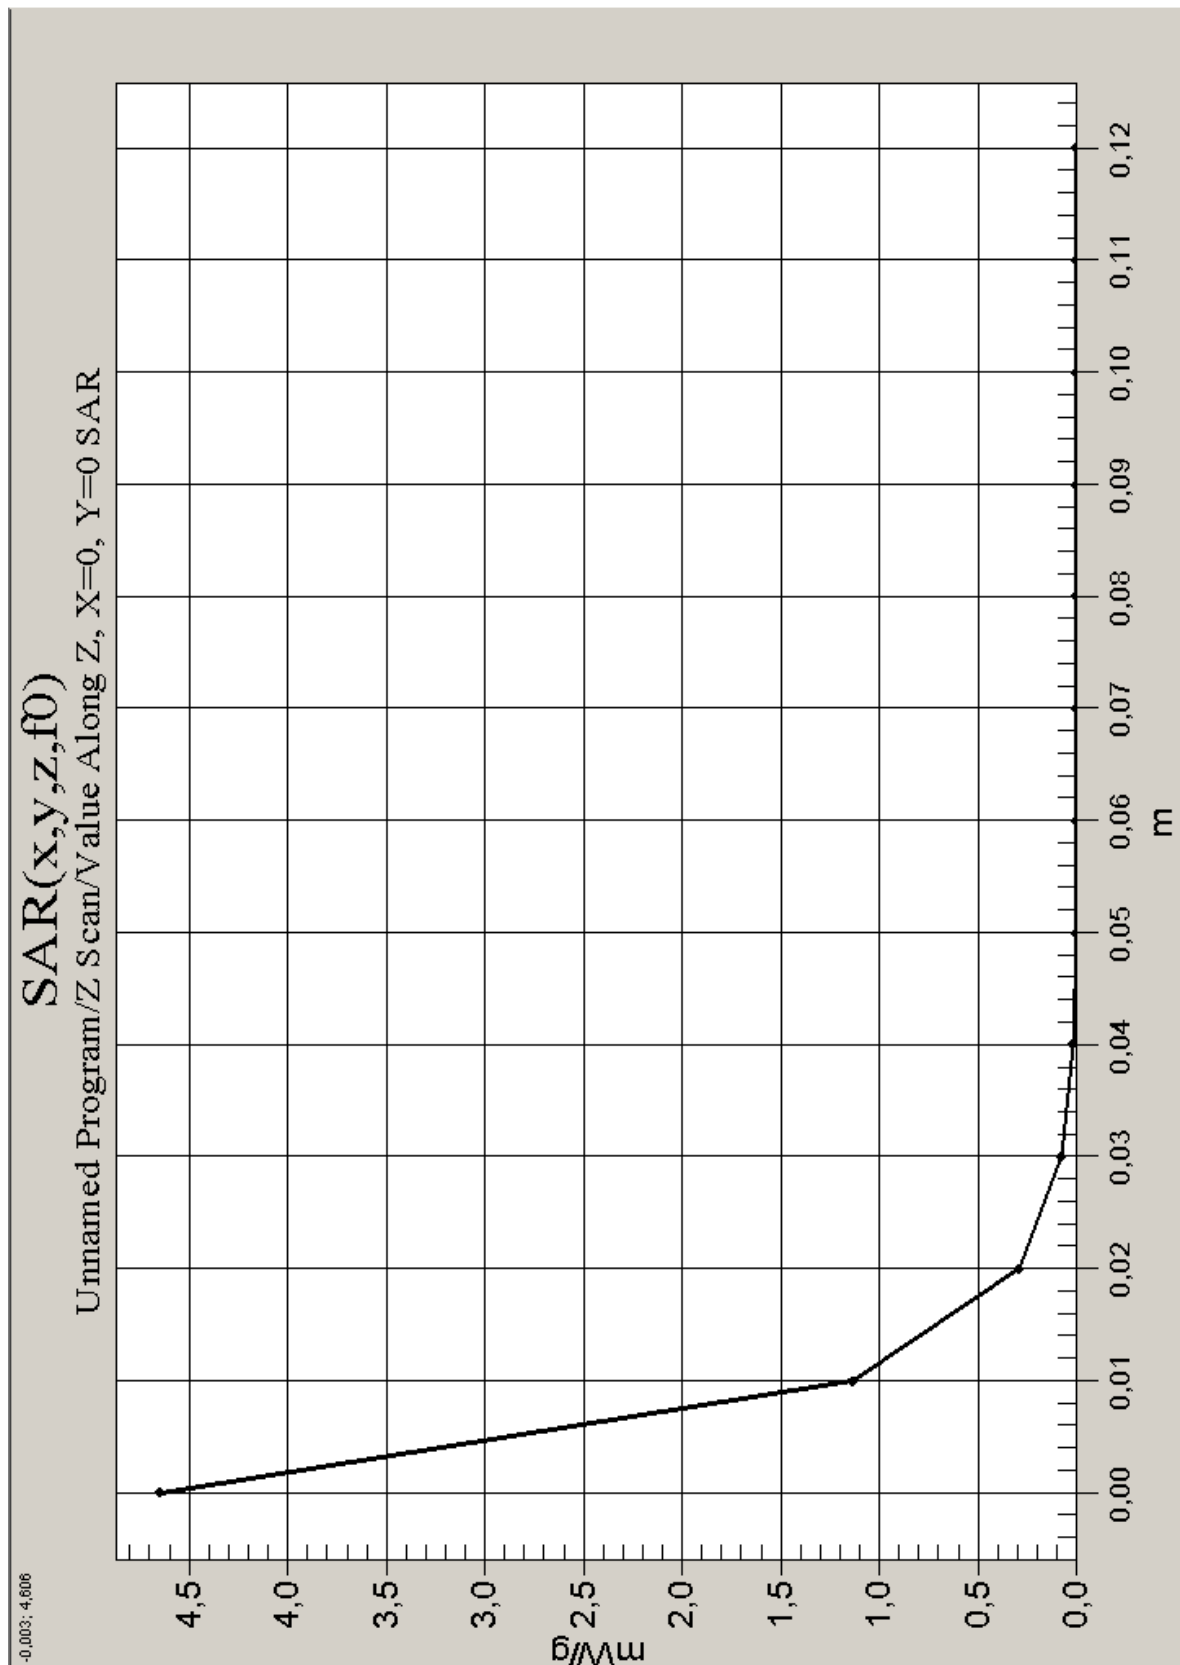


Fig. 8: Validation measurement 2450 MHz body (03.07.2003). Ambient Temperature: 21.0° C, Liquid Temperature: 20.6° C

4 SAR z-axis scans (Measurements)

The following pictures show the z-axis scan for the worst case values.

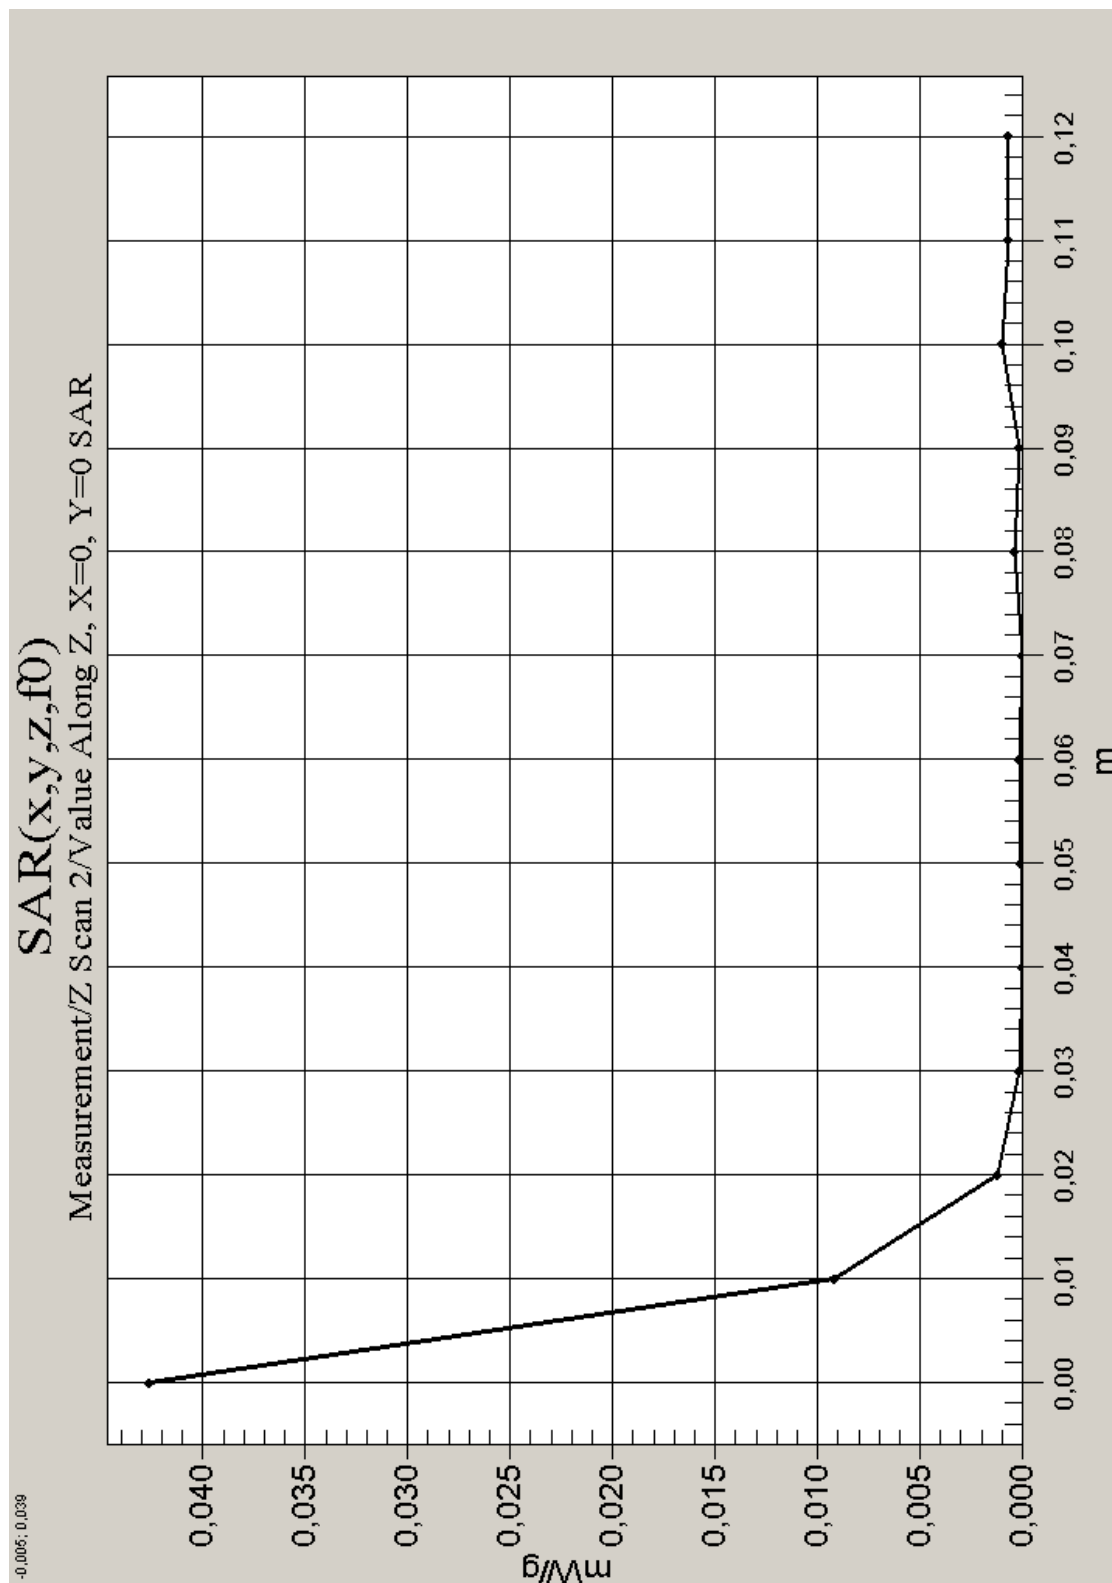


Fig. 9: 2450MHz, cheek position, left side of head, channel 041 (02.07.2003; Ambient Temperature: 21.3° C; Liquid Temperature : 19.3° C).

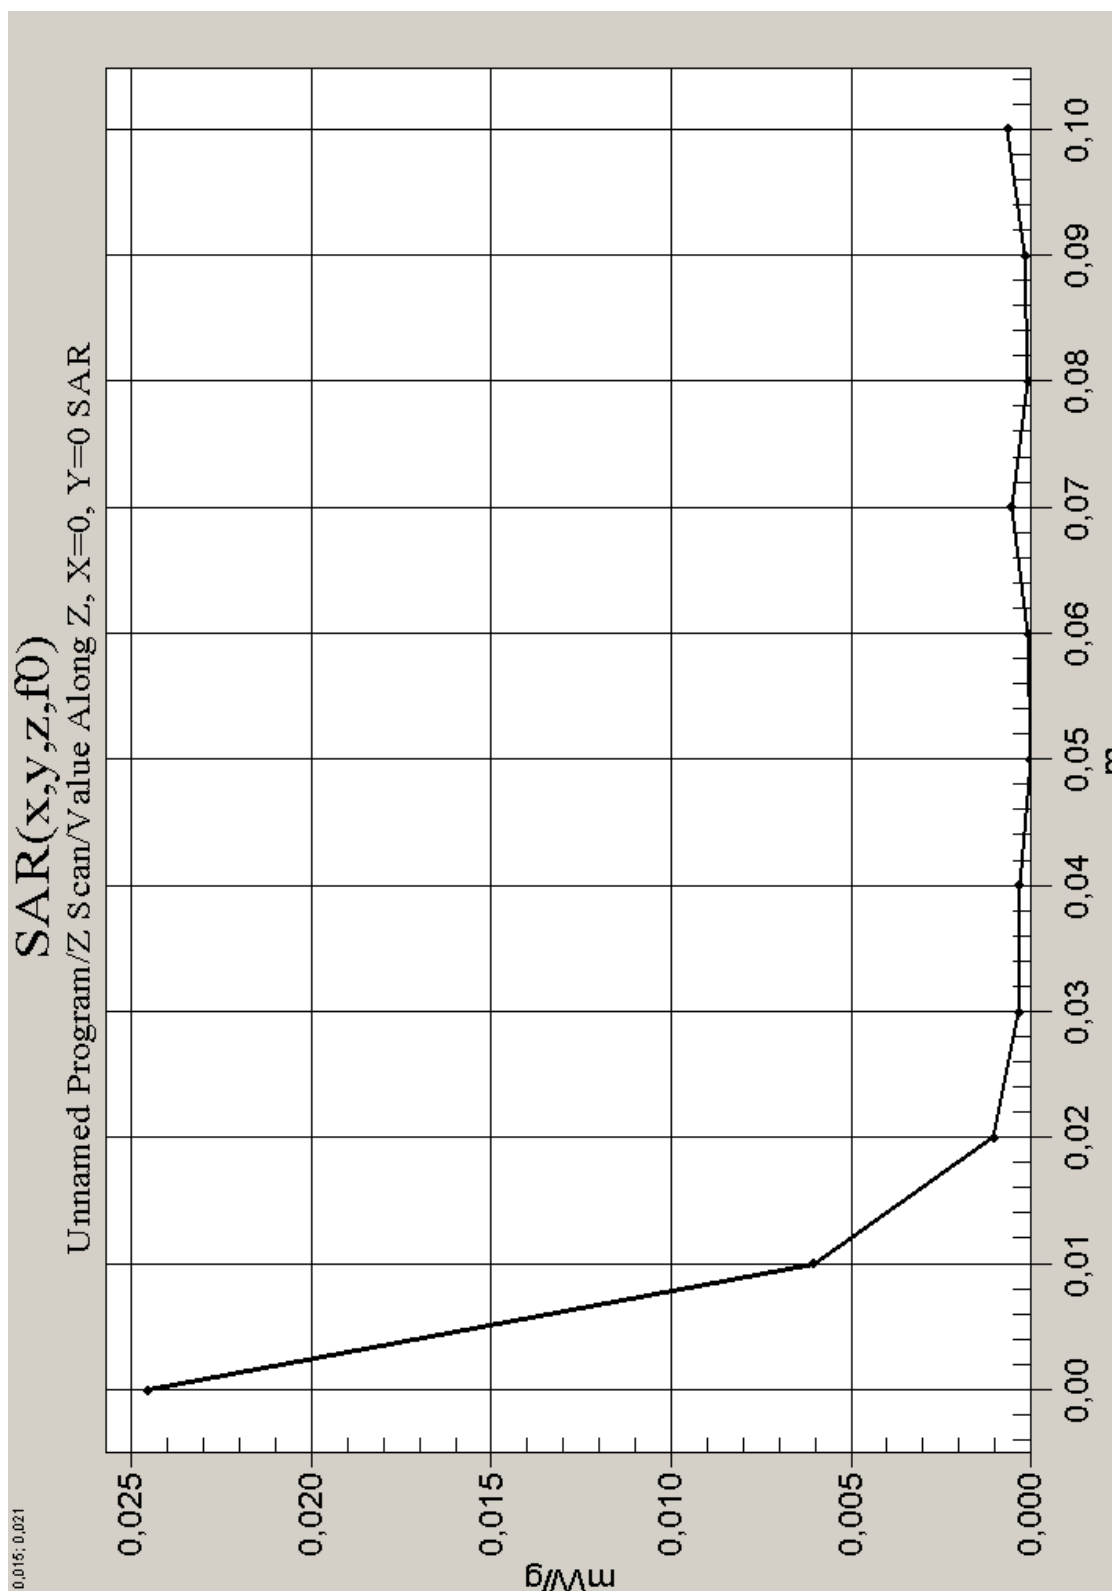


Fig. 10: 2450 MHz, channel 041, body worn configuration with headset and belt clip, display towards the phantom. (03.07.2003; Ambient Temperature: 21.1° C; Liquid Temperature : 20.3° C).