



Engineering and Testing for EMC and Safety Compliance

## TYPE CERTIFICATION REPORT

**M/A-COM, Inc.**  
1011 Pawtucket Blvd.  
Lowell, MA 01853  
Daryl Popowitch  
Phone: (434) 455-9527

**MODEL: SkyMaster  
700 MHz Base Station**

**FCC ID: BV8MBS700A100**

**June 4, 2004**

| STANDARDS REFERENCED FOR THIS REPORT |                                                                                        |
|--------------------------------------|----------------------------------------------------------------------------------------|
| PART 2: 2001                         | FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS          |
| PART 15: 2001                        | RADIO FREQUENCY DEVICES - §15.109: RADIATED EMISSIONS LIMITS                           |
| PART 90: 2001                        | PRIVATE LAND MOBILE RADIO SERVICES                                                     |
| ANSI C63.4-2001                      | STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS         |
| ANSI/TIA/EIA603- 2002                | LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT<br>MEASUREMENT AND PERFORMANCE STANDARDS |
| ANSI/TIA/EIA 603-1-2002              | ADDENDUM TO ANSI/TIA/EIA 603-1992                                                      |
| ANSI/TIA/EIA -102.CAAA; 2002         | DIGITAL C4FM/CQPSK TRANSCEIVER MEASUREMENT METHODS                                     |

| Frequency Range | Maximum Measured<br>Output Power (W)<br>Conducted | Measured Frequency<br>Tolerance<br>(ppm) | Emission Designator               |
|-----------------|---------------------------------------------------|------------------------------------------|-----------------------------------|
| 764-767 MHz     | 100.5                                             | 0.0                                      | 12K1F9W (4-Level TDMA voice/data) |
| 773-776 MHz     | 100.5                                             | 0.00                                     | 12K1F9W (4-Level TDMA voice/data) |

**REPORT PREPARED BY TEST ENGINEER: DAN BIGGS**

*Document Number: 2004023*

*This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc.*

## TABLE OF CONTENTS

|        |                                                                                                                  |    |
|--------|------------------------------------------------------------------------------------------------------------------|----|
| 1      | GENERAL INFORMATION .....                                                                                        | 5  |
| 1.1    | TEST FACILITY .....                                                                                              | 5  |
| 1.2    | RELATED SUBMITTAL(S)/GRANT(S) .....                                                                              | 5  |
| 2      | CONFORMANCE STATEMENT .....                                                                                      | 6  |
| 3      | TESTED SYSTEM DETAILS .....                                                                                      | 7  |
| 4      | FCC RULES AND REGULATIONS PART 2 §2.1033(C)(8) VOLTAGES AND CURRENTS THROUGH THE FINAL AMPLIFYING STAGE .....    | 8  |
| 5      | FCC RULES AND REGULATIONS PART 90 §90.541 AND PART 2 §2.1046 (A): RF POWER OUTPUT: CONDUCTED .....               | 8  |
| 5.1    | TEST PROCEDURE .....                                                                                             | 8  |
| 5.2    | TEST DATA .....                                                                                                  | 9  |
| 6      | FCC RULES AND REGULATIONS PART 90 §90.543 (C) AND PART 2 §2.1051: SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....  | 10 |
| 6.1    | TEST PROCEDURE .....                                                                                             | 10 |
| 6.2    | TEST DATA .....                                                                                                  | 11 |
| 7      | FCC RULES AND REGULATIONS PART 90 §90.543 (C) AND PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION ..... | 13 |
| 7.1    | TEST PROCEDURE .....                                                                                             | 13 |
| 7.2    | TEST DATA .....                                                                                                  | 13 |
| 7.2.1  | CFR 47 PART 90.210 REQUIREMENTS .....                                                                            | 13 |
| 8      | FCC RULES AND REGULATIONS PART 90 §90.543 (A): EMISSION LIMITATIONS: ACCP REQUIREMENTS .....                     | 17 |
| 8.1    | TEST PROCEDURE .....                                                                                             | 17 |
| 8.2    | TEST DATA .....                                                                                                  | 18 |
| 9      | FCC RULES AND REGULATIONS PART 90 §90.543 (A) AND PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH .....               | 19 |
| 9.1    | TEST PROCEDURE .....                                                                                             | 19 |
| 9.2    | TEST DATA .....                                                                                                  | 19 |
| 10     | FCC RULES AND REGULATION PART 90 §90.539 AND PART 2 §2.1055: FREQUENCY STABILITY .....                           | 21 |
| 10.1   | TEST PROCEDURE .....                                                                                             | 21 |
| 10.2   | TEST DATA .....                                                                                                  | 22 |
| 10.2.1 | FREQUENCY STABILITY/TEMPERATURE VARIATION .....                                                                  | 22 |
| 10.2.2 | FREQUENCY STABILITY/VOLTAGE VARIATION .....                                                                      | 24 |
| 11     | FCC RULES AND REGULATIONS PART 90 §90.543 (E): PROTECTION OF 1559-1610 MHZ BAND .....                            | 25 |
| 11.1   | TEST PROCEDURE .....                                                                                             | 25 |
| 11.2   | TEST DATA .....                                                                                                  | 25 |
| 12     | FCC RULES AND REGULATIONS PART 2 §2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH .....                        | 27 |
| 13     | CONCLUSION .....                                                                                                 | 27 |

## TABLE OF TABLES

|             |                                                                                            |    |
|-------------|--------------------------------------------------------------------------------------------|----|
| TABLE 3-1:  | EQUIPMENT UNDER TEST (EUT) .....                                                           | 7  |
| TABLE 3-2:  | SUPPORT EQUIPMENT .....                                                                    | 7  |
| TABLE 5-1:  | RF POWER OUTPUT (HIGH POWER): CARRIER OUTPUT POWER (UNMODULATED) .....                     | 9  |
| TABLE 5-2:  | RF POWER OUTPUT (RATED POWER) .....                                                        | 9  |
| TABLE 5-3:  | TEST EQUIPMENT USED FOR TESTING (RF POWER OUTPUT - CONDUCTED) .....                        | 9  |
| TABLE 6-1:  | CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 764.0125 MHz – HIGH POWER .....                   | 11 |
| TABLE 6-2:  | CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 764.0125 MHz – LOW POWER .....                    | 11 |
| TABLE 6-3:  | CONDUCTED SPURIOUS EMISSIONS CHANNEL 4 – 775.9875 MHz – HIGH POWER .....                   | 12 |
| TABLE 6-4:  | CONDUCTED SPURIOUS EMISSIONS CHANNEL 4 – 775.9875 MHz – LOW POWER .....                    | 12 |
| TABLE 6-5:  | TEST EQUIPMENT (CONDUCTED SPURIOUS EMISSIONS) .....                                        | 12 |
| TABLE 7-1:  | FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 1 – 764.0125 MHz; WIDE BAND; HIGH POWER ..... | 14 |
| TABLE 7-2:  | FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 1 – 764.0125 MHz; WIDE BAND; LOW POWER .....  | 14 |
| TABLE 7-3:  | FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 4 – 775.9875 MHz; WIDE BAND; HIGH POWER ..... | 15 |
| TABLE 7-4:  | FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 4 – 775.9875 MHz; WIDE BAND; LOW POWER .....  | 15 |
| TABLE 7-5:  | TEST EQUIPMENT (FIELD STRENGTH OF SPURIOUS RADIATION) .....                                | 16 |
| TABLE 8-1:  | TEST EQUIPMENT (ACCP REQUIREMENTS) .....                                                   | 18 |
| TABLE 9-1:  | TEST EQUIPMENT (OCCUPIED BANDWIDTH) .....                                                  | 20 |
| TABLE 10-1: | FREQUENCY STABILITY/TEMPERATURE VARIATION - 766.9875 MHz .....                             | 22 |
| TABLE 10-2: | TEST EQUIPMENT (FREQUENCY STABILITY/TEMPERATURE) .....                                     | 23 |
| TABLE 10-3: | FREQUENCY STABILITY/VOLTAGE VARIATION - 766.9875 MHz .....                                 | 24 |
| TABLE 10-4: | TEST EQUIPMENT (FREQUENCY STABILITY/VOLTAGE) .....                                         | 24 |
| TABLE 11-1: | TEST RESULTS - EIRP IN GNSS BAND .....                                                     | 25 |
| TABLE 11-2: | TEST EQUIPMENT (EIRP IN GNSS BAND) .....                                                   | 26 |

## TABLE OF PLOTS

|            |                                                                      |    |
|------------|----------------------------------------------------------------------|----|
| PLOT 9-1:  | OCCUPIED BANDWIDTH; WIDE BAND; 4-LEVEL OPENSky TDMA; CHANNEL 1 ..... | 19 |
| PLOT 9-2:  | OCCUPIED BANDWIDTH; WIDE BAND; 4-LEVEL OPENSky TDMA; CHANNEL 4 ..... | 20 |
| PLOT 10-1: | TEMPERATURE FREQUENCY STABILITY .....                                | 22 |
| PLOT 10-2: | VOLTAGE FREQUENCY STABILITY .....                                    | 24 |

## TABLE OF FIGURES

|             |                                      |   |
|-------------|--------------------------------------|---|
| FIGURE 3-1: | CONFIGURATION OF TESTED SYSTEM ..... | 7 |
|-------------|--------------------------------------|---|

## TABLE OF APPENDICES

|             |                                      |    |
|-------------|--------------------------------------|----|
| APPENDIX A: | AGENCY AUTHORIZATION LETTER .....    | 28 |
| APPENDIX B: | CONFIDENTIALITY REQUEST LETTER ..... | 29 |
| APPENDIX C: | LABEL INFORMATION .....              | 30 |
| APPENDIX D: | OPERATIONAL DESCRIPTION .....        | 32 |
| APPENDIX E: | PARTS LIST/TUNE UP .....             | 33 |
| APPENDIX F: | SCHEMATICS .....                     | 34 |
| APPENDIX G: | BLOCK DIAGRAM .....                  | 35 |
| APPENDIX H: | MANUAL .....                         | 36 |
| APPENDIX I: | TEST CONFIGURATION PHOTOGRAPHS ..... | 37 |
| APPENDIX J: | EXTERNAL PHOTOGRAPHS .....           | 39 |
| APPENDIX K: | INTERNAL PHOTOGRAPHS .....           | 45 |

## TABLE OF PHOTOGRAPHS

|                |                                            |    |
|----------------|--------------------------------------------|----|
| PHOTOGRAPH 1:  | FCC ID LABEL LOCATION ON BACK OF DCX ..... | 31 |
| PHOTOGRAPH 2:  | RADIATED EMISSIONS – FRONT VIEW .....      | 37 |
| PHOTOGRAPH 3:  | RADIATED EMISSIONS – BACK VIEW .....       | 38 |
| PHOTOGRAPH 4:  | DCX FRONT VIEW .....                       | 39 |
| PHOTOGRAPH 5:  | DCX REAR VIEW .....                        | 40 |
| PHOTOGRAPH 6:  | HPA FRONT VIEW .....                       | 41 |
| PHOTOGRAPH 7:  | HPA REAR VIEW .....                        | 42 |
| PHOTOGRAPH 8:  | BSC .....                                  | 43 |
| PHOTOGRAPH 9:  | BSX .....                                  | 44 |
| PHOTOGRAPH 10: | HPA WITHOUT TOP COVER .....                | 45 |
| PHOTOGRAPH 11: | HPA CONTROLLER WITHOUT COVER .....         | 46 |
| PHOTOGRAPH 12: | HPA CONTROLLER PCB FRONT VIEW .....        | 47 |
| PHOTOGRAPH 13: | HPA CONTROLLER PCB REAR VIEW .....         | 48 |
| PHOTOGRAPH 14: | HPA WITHOUT CONTROLLER .....               | 49 |
| PHOTOGRAPH 15: | HPA WITH RF COVER .....                    | 50 |
| PHOTOGRAPH 16: | HPA WITH RF DECK REMOVED .....             | 51 |
| PHOTOGRAPH 17: | HPA UNDERSIDE RF DECK .....                | 52 |
| PHOTOGRAPH 18: | HPA RF DECK TOP VIEW .....                 | 53 |
| PHOTOGRAPH 19: | HPA RF BOTTOM VIEW .....                   | 54 |
| PHOTOGRAPH 20: | HPA RF AMP .....                           | 55 |
| PHOTOGRAPH 21: | HPA RF AMP (LEFT SIDE) .....               | 56 |
| PHOTOGRAPH 22: | HPA RF AMP (RIGHT SIDE) .....              | 57 |
| PHOTOGRAPH 23: | BSC .....                                  | 58 |
| PHOTOGRAPH 24: | BSC PCB TOP VIEW .....                     | 59 |
| PHOTOGRAPH 25: | BSC PCB BOTTOM VIEW .....                  | 60 |
| PHOTOGRAPH 26: | BSX WITH SHIELDS .....                     | 61 |
| PHOTOGRAPH 27: | BSX WITHOUT SHIELDS .....                  | 62 |
| PHOTOGRAPH 28: | BSX PCB TOP VIEW .....                     | 63 |
| PHOTOGRAPH 29: | BSX PCB BOTTOM VIEW .....                  | 64 |

## 1 GENERAL INFORMATION

The following Type Certification Report is prepared on behalf of **M/A-COM, Inc.** in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **SkyMaster 700 MHz Base Station; FCC ID: BV8MBS700A100**. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47, and ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 2001. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

### 1.1 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 1994, submitted to and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 2001).

### 1.2 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application report.


## 2 CONFORMANCE STATEMENT

| STANDARDS REFERENCED FOR THIS REPORT |                                                                                        |
|--------------------------------------|----------------------------------------------------------------------------------------|
| PART 2: 1999                         | FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS          |
| PART 15: 1999                        | §15.109: RADIATED EMISSIONS LIMITS                                                     |
| PART 90: 1998                        | PRIVATE LAND MOBILE RADIO SERVICES                                                     |
| ANSI C63.4-2001                      | STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS         |
| ANSI/TIA/EIA603- 2002                | LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT<br>MEASUREMENT AND PERFORMANCE STANDARDS |
| ANSI/TIA/EIA 603-1-2002              | ADDENDUM TO ANSI/TIA/EIA 603-1992                                                      |
| ANSI/TIA/EIA -102.CAAA; 2002         | DIGITAL C4FM/CQPSK TRANSCEIVER MEASUREMENT METHODS                                     |

| Frequency Range | Maximum Measured Output<br>Power (W)<br>Conducted | Measured Frequency<br>Tolerance<br>(ppm) | Emission Designator               |
|-----------------|---------------------------------------------------|------------------------------------------|-----------------------------------|
| 764-767 MHz     | 100.5                                             | 0.0                                      | 12K1F9W (4-Level TDMA voice/data) |
| 773-776 MHz     | 100.5                                             | 0.0                                      | 12K1F9W (4-Level TDMA voice/data) |

We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. No modifications were made to the equipment during testing in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to or exclusions from the above standards for Certification methodology.

Signature: 

Date: June 4, 2004

Typed/Printed Name: Rick McMurray

Position: Vice President of Operations

Signature: 

Date: June 4, 2004

Typed/Printed Name: Daniel W. Biggs

Position: Test Engineer

### 3 TESTED SYSTEM DETAILS

The test sample was received on February 24, 2004. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.


**TABLE 3-1: EQUIPMENT UNDER TEST (EUT)**

| Part                           | Manufacturer  | Model     | PN/SN   | FCC ID        | RTL Bar Code |
|--------------------------------|---------------|-----------|---------|---------------|--------------|
| SKyMaster 700 MHz Base Station | M/A-COM, Inc. | BSH 11178 | HPA-100 | BV8MBS700A100 | 15758        |
| Digital Controller/Transceiver | M/A-COM, Inc. | N/A       | N/A     | N/A           | 15758        |

**TABLE 3-2: SUPPORT EQUIPMENT**

| Part                   | Manufacturer    | Model    | PN/SN | FCC ID | RTL Bar Code |
|------------------------|-----------------|----------|-------|--------|--------------|
| Notebook Computer      | Hewlett Packard | Omnibook | N/A   | N/A    | N/A          |
| Serial interface cable | N/A             | N/A      | N/A   | N/A    | N/A          |

**FIGURE 3-1: CONFIGURATION OF TESTED SYSTEM**

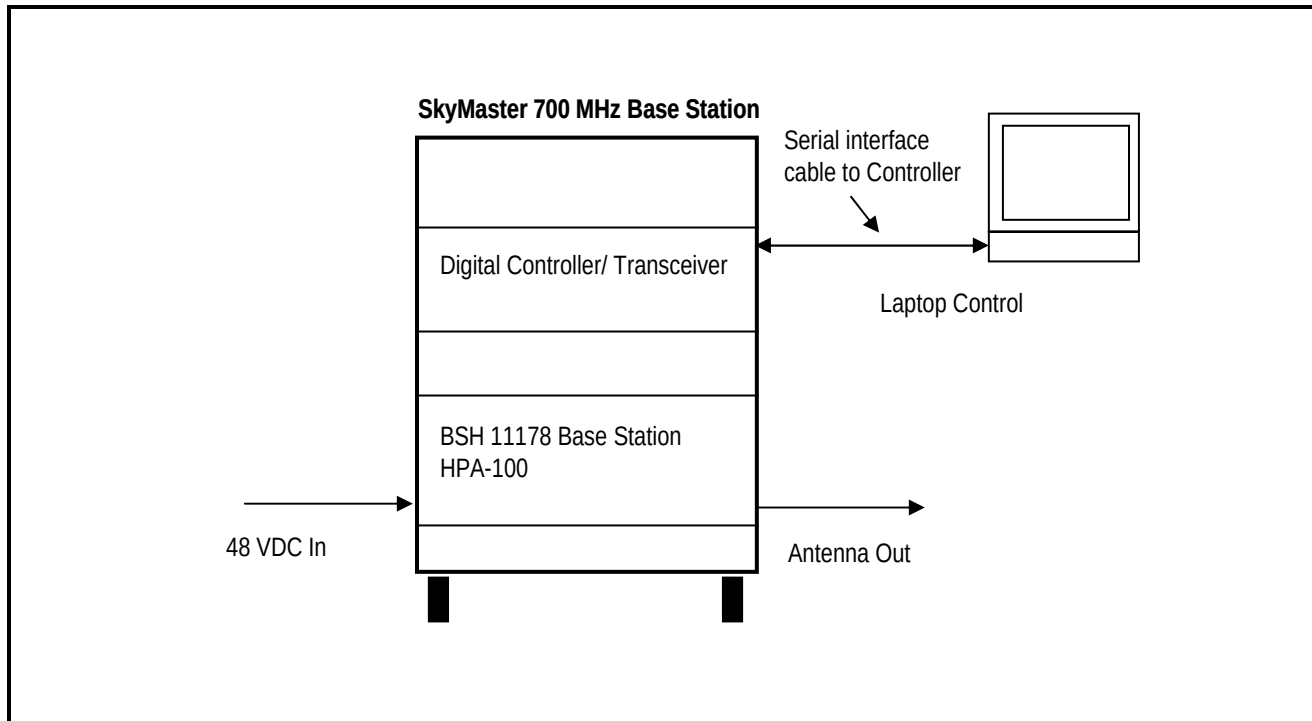

#### **4 FCC RULES AND REGULATIONS PART 2 §2.1033(C)(8) VOLTAGES AND CURRENTS THROUGH THE FINAL AMPLIFYING STAGE**

**Nominal DC Voltage:** 28.0 VDC

**Current:** 11.0 AMPS

#### **5 FCC RULES AND REGULATIONS PART 90 §90.541 AND PART 2 §2.1046 (A): RF POWER OUTPUT: CONDUCTED**

The transmitting power of base, mobile, portable, and control stations operating in the 764-776 MHz and 794-806 MHz frequency band must not exceed the maximum limits in this section, and must also comply with any applicable effective radiated power limits in Section 90.545:

- a) The transmitting power of base transmitters must not exceed the limits given in paragraphs (a), (b), and (c) of Sec. 90.635.
- b) The transmitter output power of mobile and control transmitters must not exceed 30 Watts.
- c) The transmitter output power of portable (hand-held) transmitters must not exceed 3 Watts.
- d) Transmitters operating on the narrowband low power channels listed in Secs. 90.531 (b)(3), 90.531(b)(4), must not exceed 2 Watts (ERP).

##### **5.1 TEST PROCEDURE**

ANSI/TIA/EIA-603-1992, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50Ω load impedance.

## 5.2 TEST DATA

The following channels (in MHz) were tested: 764.0125, 766.9875, 773.0125, and 775.9875.

**TABLE 5-1: RF POWER OUTPUT (HIGH POWER): CARRIER OUTPUT POWER (UNMODULATED)**

| Channel        | Frequency (MHz) | RF Power Measured (Watt)* |
|----------------|-----------------|---------------------------|
| 1 (High Power) | 764.0125        | 100.5                     |
| 2 (High Power) | 766.9875        | 100.5                     |
| 3 (High Power) | 773.0125        | 100.2                     |
| 4 (High Power) | 775.9875        | 99.8                      |
| 1 (Low Power)  | 764.0125        | 15.1                      |
| 2 (Low Power)  | 766.9875        | 15.1                      |
| 3 (Low Power)  | 773.0125        | 15.0                      |
| 4 (Low Power)  | 775.9875        | 15.0                      |

\* Measurement accuracy: +/- .02 dB (logarithmic mode)

**TABLE 5-2: RF POWER OUTPUT (RATED POWER)**

| Rated Power (W) |
|-----------------|
| 15-100          |

**TABLE 5-3: TEST EQUIPMENT USED FOR TESTING (RF POWER OUTPUT - CONDUCTED)**

| RTL Asset #   | Manufacturer | Model         | Part Type          | Serial Number             | Calibration Due |
|---------------|--------------|---------------|--------------------|---------------------------|-----------------|
| 901184/901186 | Agilent      | E4416A/E9323A | Power Meter/Sensor | GB41050573/US420.52510380 | 07/30/04        |

### TEST PERSONNEL:

|                          |                                                                                     |               |
|--------------------------|-------------------------------------------------------------------------------------|---------------|
| Daniel Biggs             |  | March 1, 2004 |
| Test Technician/Engineer | Signature                                                                           | Date Of Test  |

## **6 FCC RULES AND REGULATIONS PART 90 §90.543 (C) AND PART 2 §2.1051: SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

Out of band emission limit: On any frequency outside of the frequency ranges covered by the ACCP tables, the power of any emission must be reduced below the unmodulated carrier power (P) by at least  $43 + 10 \log (P)$  dB.

### **6.1 TEST PROCEDURE**

ANSI/TIA/EIA-603-1992, Section 2.2.13

The transmitter is terminated with a  $50 \Omega$  load and interfaced with a spectrum analyzer.

Device with digital modulation: Modulated to its maximum extent using a pseudo random data sequence – 19,200 bps

## 6.2 TEST DATA

Frequency range of measurement per Part 2.1057: 9 kHz to  $10 \times F_c$

Limits: Mask D (dBm):  $P(\text{dBm}) - (43 + 10 \times \log P(\text{W}))$

The following channels (in MHz) were investigated: 764.0125 and 775.9875. The worst case (unwanted emissions) channels are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

**TABLE 6-1: CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 764.0125 MHZ – HIGH POWER**

25 kHz channel spacing; Conducted power = 100.5W

| Frequency (MHz) | Level (dBc) | Limit (dBc) | Margin(dB) |
|-----------------|-------------|-------------|------------|
| 1528.025        | 102.16      | 63.02       | -39.16     |
| 2292.0375       | 90.00       | 63.02       | -27.00     |
| 3056.05         | 119.00      | 63.02       | -56.00     |
| 3820.0625       | 118.66      | 63.02       | -55.66     |
| 4584.075        | 117.50      | 63.02       | -54.50     |
| 5348.0875       | 113.50      | 63.02       | -50.50     |
| 6112.1          | 118.84      | 63.02       | -55.84     |
| 6876.1125       | 113.17      | 63.02       | -50.17     |
| 7640.125        | 119.37      | 63.02       | -56.37     |

**TABLE 6-2: CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 764.0125 MHZ – LOW POWER**

25 kHz channel spacing; Conducted power = 15.1W

| Frequency (MHz) | Level (dBc) | Limit (dBc) | Margin(dB) |
|-----------------|-------------|-------------|------------|
| 1528.025        | 108.46      | 54.82       | -53.66     |
| 2292.0375       | 100.47      | 54.82       | -45.67     |
| 3056.05         | 111.97      | 54.82       | -57.17     |
| 3820.0625       | 109.63      | 54.82       | -54.83     |
| 4584.075        | 109.47      | 54.82       | -54.67     |
| 5348.0875       | 107.30      | 54.82       | -52.50     |
| 6112.1          | 108.80      | 54.82       | -54.00     |
| 6876.1125       | 105.47      | 54.82       | -50.67     |
| 7640.125        | 111.50      | 54.82       | -56.70     |

**TABLE 6-3: CONDUCTED SPURIOUS EMISSIONS CHANNEL 4 – 775.9875 MHZ – HIGH POWER**

25 kHz channel spacing; Conducted power = 99.8W

| Frequency (MHz) | Level (dBc) | Limit (dBc) | Margin(dB) |
|-----------------|-------------|-------------|------------|
| 1551.975        | 107.66      | 62.99       | -44.66     |
| 2315.9875       | 91.16       | 62.99       | -28.16     |
| 3080            | 119.84      | 62.99       | -56.84     |
| 3844.0125       | 120.00      | 62.99       | -57.00     |
| 4608.025        | 115.50      | 62.99       | -52.50     |
| 5372.0375       | 106.37      | 62.99       | -43.37     |
| 6136.05         | 120.33      | 62.99       | -57.33     |
| 6900.0625       | 120.17      | 62.99       | -57.17     |
| 7664.075        | 120.00      | 62.99       | -57.00     |

**TABLE 6-4: CONDUCTED SPURIOUS EMISSIONS CHANNEL 4 – 775.9875 MHZ – LOW POWER**


25 kHz channel spacing; Conducted power = 15W

| Frequency (MHz) | Level (dBc) | Limit (dBc) | Margin(dB) |
|-----------------|-------------|-------------|------------|
| 1551.975        | 110.58      | 54.75       | -55.83     |
| 2315.9875       | 103.25      | 54.75       | -48.50     |
| 3080            | 111.92      | 54.75       | -57.17     |
| 3844.0125       | 112.42      | 54.75       | -57.67     |
| 4608.025        | 108.08      | 54.75       | -53.33     |
| 5372.0375       | 99.92       | 54.75       | -45.17     |
| 6136.05         | 111.58      | 54.75       | -56.83     |
| 6900.0625       | 111.75      | 54.75       | -57.00     |
| 7664.075        | 112.08      | 54.75       | -57.33     |

**TABLE 6-5: TEST EQUIPMENT (CONDUCTED SPURIOUS EMISSIONS)**

| RTL Asset # | Manufacturer    | Model    | Part Type                                   | Serial Number | Calibration Due |
|-------------|-----------------|----------|---------------------------------------------|---------------|-----------------|
| 901020      | Hewlett Packard | 8564E    | Portable Spectrum Analyzer (9 kHz - 40 GHz) | 3943A01719    | 07/15/04        |
| 901057      | Hewlett Packard | 3336B    | Synthesizer/Level Generator                 | 2514A02585    | 08/06/04        |
| 901054      | Hewlett Packard | HP 3586B | Selective Level Meter                       | 1928A01892    | 09/09/04        |

**TEST PERSONNEL:**

|                          |                                                                                     |                |
|--------------------------|-------------------------------------------------------------------------------------|----------------|
| Daniel Biggs             |  | March 18, 2004 |
| Test Technician/Engineer | Signature                                                                           | Date Of Test   |

## **7 FCC RULES AND REGULATIONS PART 90 §90.543 (C) AND PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION**

Out of band emission limit. On any frequency outside of the frequency ranges covered by the ACCP tables, the power of any emission must be reduced below the unmodulated carrier power (P) by at least  $43 + 10 \log (P)$  dB.

### **7.1 TEST PROCEDURE**

ANSI/TIA/EIA-603-1992, section 2.2.12

Device with digital modulation: Modulated to its maximum extent using a pseudo random data sequence – 19,200 bps

The spurious emissions levels were measured and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator and the gain of the antenna was further corrected to a half wave dipole.

### **7.2 TEST DATA**

#### **7.2.1 CFR 47 PART 90.210 REQUIREMENTS**

The worst-case emissions test data are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

**TABLE 7-1: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 1 – 764.0125 MHZ; WIDE BAND; HIGH POWER**

Limit =  $43 + 10 \log P = 63.02 \text{ dBc}$   
Conducted Power =  $50.02 \text{ dBm} = 100.5 \text{ W}$

| Frequency (MHz) | Spectrum Analyzer Level (dBuV) | Signal Generator Level (dBm) | Cable Loss* (dB) | Antenna Gain (dBd) | Corrected Signal Generator Level (dBc) | Margin (dB) |
|-----------------|--------------------------------|------------------------------|------------------|--------------------|----------------------------------------|-------------|
| 1528.025        | 57.00                          | -29.2                        | 1.6              | 4.65               | 76.1                                   | -13.1       |
| 2292.0375       | 50.17                          | -36.8                        | 2.1              | 5.86               | 83.1                                   | -20.1       |
| 3056.05         | 50.17                          | -31.2                        | 3.4              | 7.25               | 77.3                                   | -14.3       |
| 3820.0625       | 37.83                          | -46.2                        | 4.0              | 7.35               | 92.8                                   | -29.8       |
| 4584.075        | 22.67                          | -57.8                        | 5.2              | 7.95               | 105.1                                  | -42.1       |
| 5348.0875       | 30.67                          | -48.8                        | 5.0              | 7.85               | 96.0                                   | -33.0       |
| 6112.1          | 26.50                          | -52.7                        | 5.1              | 8.85               | 98.9                                   | -35.9       |
| 6876.1125       | 17.00                          | -62.8                        | 5.5              | 8.35               | 110.0                                  | -47.0       |
| 7640.125        | 17.00                          | -59.5                        | 5.8              | 8.85               | 106.5                                  | -43.4       |

\*This insertion loss corresponds to the cable connecting the RF Signal Generator to the  $\frac{1}{2}$  wave dipole antenna.

**TABLE 7-2: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 1 – 764.0125 MHZ; WIDE BAND; LOW POWER**

Limit =  $43 + 10 \log P = 54.82 \text{ dBc}$   
Conducted Power =  $41.82 \text{ dBm} = 15.2 \text{ W}$

| Frequency (MHz) | Spectrum Analyzer Level (dBuV) | Signal Generator Level (dBm) | Cable Loss* (dB) | Antenna Gain (dBd) | Corrected Signal Generator Level (dBc) | Margin (dB) |
|-----------------|--------------------------------|------------------------------|------------------|--------------------|----------------------------------------|-------------|
| 1528.025        | 58.00                          | -30.5                        | 1.6              | 4.65               | 77.5                                   | -22.7       |
| 2292.0375       | 27.00                          | -62.6                        | 2.1              | 5.86               | 108.8                                  | -54.0       |
| 3056.05         | 35.00                          | -50.3                        | 3.4              | 7.25               | 96.5                                   | -41.7       |
| 3820.0625       | 25.30                          | -59.8                        | 4.0              | 7.35               | 106.5                                  | -51.7       |
| 4584.075        | 18.70                          | -61.8                        | 5.2              | 7.95               | 109.1                                  | -54.3       |
| 5348.0875       | 18.70                          | -63.0                        | 5.0              | 7.85               | 110.2                                  | -55.4       |
| 6112.1          | 15.30                          | -62.0                        | 5.1              | 8.85               | 108.3                                  | -53.5       |
| 6876.1125       | 18.00                          | -62.2                        | 5.5              | 8.35               | 109.3                                  | -54.5       |
| 7640.125        | 17.50                          | -59.5                        | 5.8              | 8.85               | 106.5                                  | -51.7       |

\*This insertion loss corresponds to the cable connecting the RF Signal Generator to the  $\frac{1}{2}$  wave dipole antenna.

**TABLE 7-3: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 4 – 775.9875 MHZ; WIDE BAND; HIGH POWER**

Limit =  $43 + 10 \log P = 62.99 \text{ dBc}$   
Conducted Power =  $49.99 \text{ dBm} = 99.8 \text{ W}$

| Frequency (MHz) | Spectrum Analyzer Level (dBuV) | Signal Generator Level (dBm) | Cable Loss* (dB) | Antenna Gain (dBd) | Corrected Signal Generator Level (dBc) | Margin (dB) |
|-----------------|--------------------------------|------------------------------|------------------|--------------------|----------------------------------------|-------------|
| 1551.975        | 61.17                          | -23.3                        | 1.8              | 4.85               | 70.3                                   | -7.3        |
| 2315.9875       | 51.50                          | -38.5                        | 3.0              | 5.86               | 85.7                                   | -22.7       |
| 3080            | 51.67                          | -34.2                        | 4.2              | 7.25               | 81.1                                   | -18.1       |
| 3844.0125       | 38.00                          | -44.3                        | 4.5              | 7.25               | 91.6                                   | -28.6       |
| 4608.025        | 16.80                          | -63.7                        | 4.7              | 7.85               | 110.6                                  | -47.6       |
| 5372.0375       | 18.67                          | -62.3                        | 5.3              | 7.75               | 109.9                                  | -46.9       |
| 6136.05         | 17.50                          | -62.8                        | 5.5              | 8.75               | 109.6                                  | -46.6       |
| 6900.0625       | 17.17                          | -56.0                        | 6.0              | 8.25               | 103.8                                  | -40.8       |
| 7664.075        | 17.00                          | -61.0                        | 5.8              | 8.85               | 108.0                                  | -45.0       |

**TABLE 7-4: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 4 – 775.9875 MHZ; WIDE BAND; LOW POWER**

Limit =  $43 + 10 \log P = 54.75 \text{ dBc}$   
Conducted Power =  $41.75 \text{ dBm} = 14.96 \text{ W}$

| Frequency (MHz) | Spectrum Analyzer Level (dBuV) | Signal Generator Level (dBm) | Cable Loss* (dB) | Antenna Gain (dBd) | Corrected Signal Generator Level (dBc) | Margin (dB) |
|-----------------|--------------------------------|------------------------------|------------------|--------------------|----------------------------------------|-------------|
| 1551.975        | 32.3                           | -26.5                        | 1.8              | 4.85               | 73.5                                   | -18.7       |
| 2315.9875       | 42.7                           | -63.0                        | 3.0              | 5.86               | 110.2                                  | -55.4       |
| 3080            | 31.2                           | -50.8                        | 4.2              | 7.25               | 97.8                                   | -43.1       |
| 3844.0125       | 43.5                           | -56.7                        | 4.5              | 7.25               | 104.0                                  | -49.2       |
| 4608.025        | 41.7                           | -53.5                        | 4.7              | 7.85               | 100.3                                  | -45.6       |
| 5372.0375       | 37.2                           | -51.6                        | 5.3              | 7.75               | 99.2                                   | -44.5       |
| 6136.05         | 38.5                           | -57.0                        | 5.5              | 8.75               | 103.8                                  | -49.1       |
| 6900.0625       | 33.2                           | -55.2                        | 6.0              | 8.25               | 102.9                                  | -48.2       |
| 7664.075        | 31.0                           | -51.2                        | 5.8              | 8.85               | 98.1                                   | -43.4       |

**TABLE 7-5: TEST EQUIPMENT (FIELD STRENGTH OF SPURIOUS RADIATION)**

| RTL Asset # | Manufacturer    | Model         | Part Type                                           | Serial Number | Calibration Due |
|-------------|-----------------|---------------|-----------------------------------------------------|---------------|-----------------|
| 901053      | Schaffner-Chase | CBL6112       | Antenna (25 MHz – 2 GHz)                            | 2648          | 07/03/04        |
| 900932      | Hewlett Packard | 8449B OPT H02 | Preamplifier (1 - 26.5 GHz)                         | 3008A00505    | N/A             |
| 901020      | Hewlett Packard | 8564E         | Portable Spectrum Analyzer (9 kHz - 40 GHz)         | 3943A01719    | 07/15/04        |
| 900917      | Hewlett Packard | 8648C         | Synthesized. Signal Generator<br>(9 kHz - 3200 MHz) | 3537A01741    | 05/02/04        |
| 900928      | Hewlett Packard | HP 83752A     | Synthesized Sweeper (.01 – 20 GHz)                  | 3610A00866    | 08/05/04        |

**Test Personnel:**

|                          |                                                                                   |               |
|--------------------------|-----------------------------------------------------------------------------------|---------------|
| Daniel Biggs             |  | March 8, 2004 |
| Test Technician/Engineer | Signature                                                                         | Date Of Test  |

## 8 FCC RULES AND REGULATIONS PART 90 §90.543 (A): EMISSION LIMITATIONS: ACCP REQUIREMENTS

Transmitters designed to operate in the 764-776 MHz and 794-806 MHz frequency bands must meet the emission limitations of this section.

### 8.1 TEST PROCEDURE

Device with digital modulation: Modulated to its maximum extent using a pseudo random data sequence – 19,200 bps

For base transmitter designed to operate with a 25kHz channel bandwidth, the ACCP shall be in accordance to the following table:

| Offset from center frequency (kHz) | Measurement Bandwidth (kHz) | Maximum ACCP (dBc) |
|------------------------------------|-----------------------------|--------------------|
| 15.625                             | 6.25                        | -40                |
| 21.875                             | 6.25                        | -60                |
| 37.5                               | 25                          | -60                |
| 62.5                               | 25                          | -65                |
| 87.5                               | 25                          | -65                |
| 150                                | 100                         | -65                |
| 250                                | 100                         | -65                |
| >400 to receive band               | 30(s)                       | (1)                |
| In the receive band                | 30(s)                       | -100               |

1-80 (continues @-6dB/oct)

### FCC Rules and Regulations Part 90 §90.543 (b)

Setting Reference Level - Part 90 §90.543 (b) (1): Using a spectrum analyzer capable of ACCP measurements, set the measurement bandwidth to the channel size, 25 kHz. Set the frequency offset of the measurement to zero and adjust the center frequency of the spectrum analyzer to give the power level in the measurement bandwidth. Record this power as the reference power level.

Measuring the power level at the frequency offset <600 kHz - Part 90 §90.543 (b) (2): Using a spectrum analyzer capable of ACCP measurements, set the measurement bandwidth as shown in table. Measure ACCP in dBm. These measurements were made at maximum power. Calculate the coupled power by subtracting the measurements made in this step from the reference power level. The absolute ACCP values must be less than the values given in the table for each condition.

Measuring the power level at the frequency offset >600 kHz - Part 90 §90.543 (b) (3): Set the spectrum analyzer to 30 kHz resolution bandwidth, 1 MHz video bandwidth, and sample detection mode. Sweep +/- 6 MHz from the carrier frequency. Set the reference level to the RMS value of the transmitter power and note the power. The response at frequencies >600 kHz must be less than the values listed in the table.

## 8.2 TEST DATA

|                              |                    |             | 764.0125 MHz           |                         | 775.9875 MHz           |                         |
|------------------------------|--------------------|-------------|------------------------|-------------------------|------------------------|-------------------------|
| Offset from Center Freq. KHz | Measurement BW KHz | Max ACP dBc | Max ACP low offset dBc | Max ACP high offset dBc | Max ACP low offset dBc | Max ACP high offset dBc |
| (+/-)15.625                  | 6.25               | -40         | -41.64                 | -41.83                  | -40.40                 | -42.21                  |
| (+/-)21.875                  | 6.25               | -60         | -63.10                 | -61.26                  | -62.45                 | -62.94                  |
| (+/-)37.5                    | 25                 | -60         | -67.18                 | -62.16                  | -62.78                 | -61.24                  |
| (+/-)62.5                    | 25                 | -65         | -71.88                 | -68.02                  | -66.83                 | -66.32                  |
| (+/-)87.5                    | 25                 | -65         | -75.85                 | -74.22                  | -77.69                 | -72.86                  |
| (+/-)150                     | 100                | -65         | -76.96                 | -78.28                  | -76.29                 | -76.99                  |
| (+/-)250                     | 100                | -65         | -77.99                 | -78.18                  | -76.31                 | -81.00                  |

|                              |                    |             | 764.0125 MHz | 775.9875 MHz |
|------------------------------|--------------------|-------------|--------------|--------------|
| Offset from Center Freq. KHz | Measurement BW KHz | Max ACP dBc | Max ACP dBc  | Max ACP dBc  |
| <400 to receive band         | 30(s)              | -80         | <100         | <100         |
| In receive band              | 30(s)              | -100        | <100         | <100         |

TABLE 8-1: TEST EQUIPMENT (ACCP REQUIREMENTS)

| RTL Asset # | Manufacturer    | Model | Part Type                                      | Serial Number | Calibration Due |
|-------------|-----------------|-------|------------------------------------------------|---------------|-----------------|
| 901020      | Hewlett Packard | 8564E | Portable Spectrum Analyzer<br>(9 kHz - 40 GHz) | 3943A01719    | 07/15/04        |

### Test Personnel:

|                          |                                                                                     |               |
|--------------------------|-------------------------------------------------------------------------------------|---------------|
| Daniel Biggs             |  | March 9, 2004 |
| Test Technician/Engineer | Signature                                                                           | Date Of Test  |

## 9 FCC RULES AND REGULATIONS PART 90 §90.543 (A) AND PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH

Occupied Bandwidth - provided that the ACCP requirements are met, the applicants may request any authorized bandwidth that does not exceed the channel size.


### 9.1 TEST PROCEDURE

Device with digital modulation: Modulated to its maximum extent using a pseudo random data sequence – 19,200 bps


ANSI/TIA/EIA-603-1992, section 2.2.11

### 9.2 TEST DATA

**PLOT 9-1: OCCUPIED BANDWIDTH; WIDE BAND; 4-LEVEL OPENSKEY TDMA; CHANNEL 1**

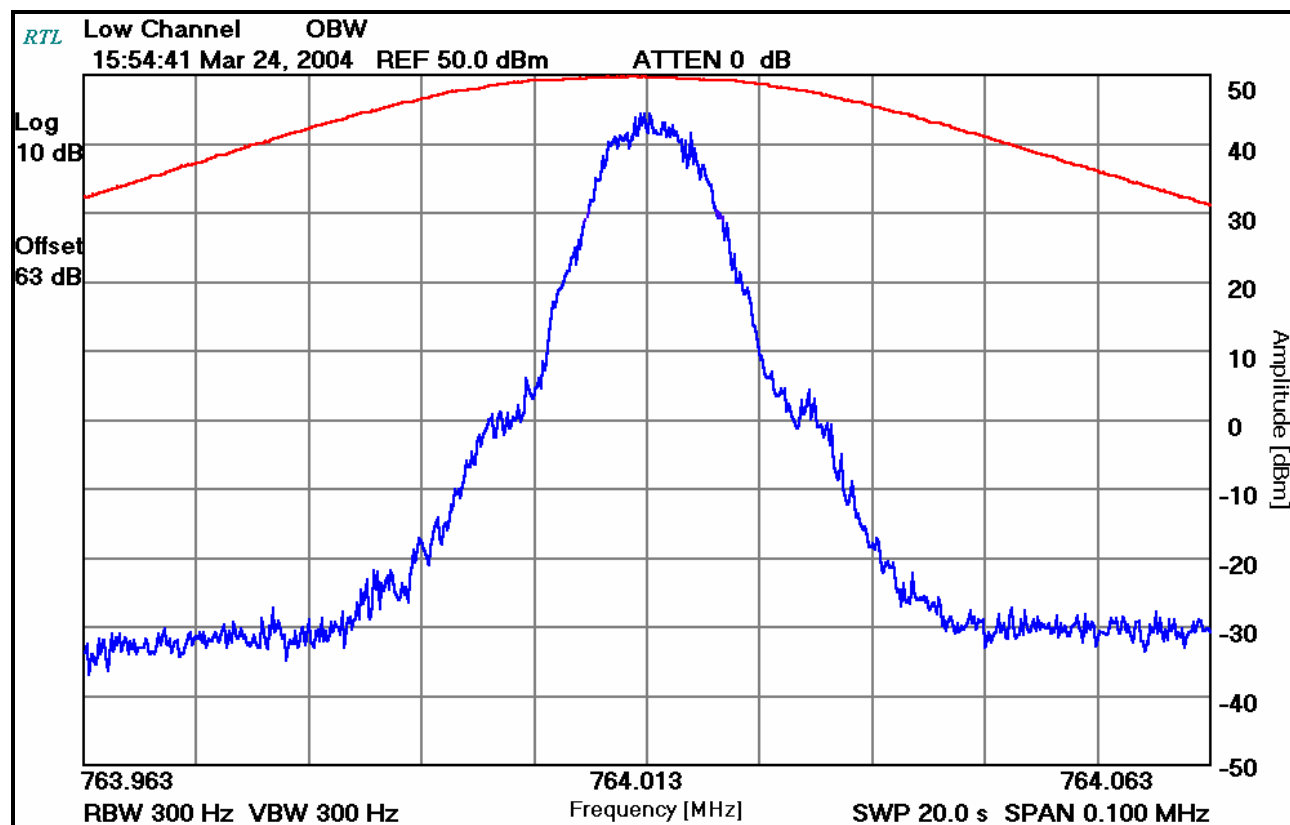

**PLOT 9-2: OCCUPIED BANDWIDTH; WIDE BAND; 4-LEVEL OPENSKY TDMA; CHANNEL 4**

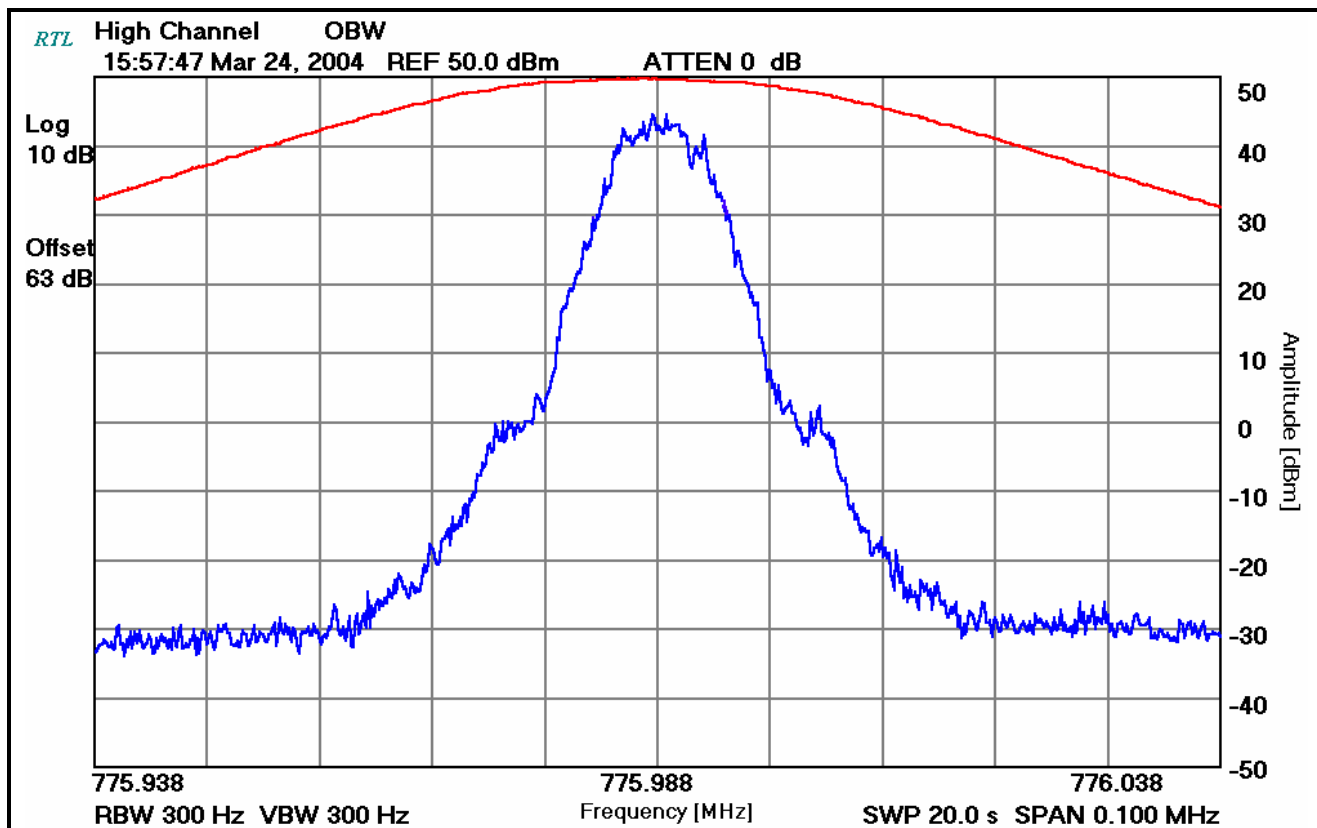

**TABLE 9-1: TEST EQUIPMENT (OCCUPIED BANDWIDTH)**

| RTL Asset # | Manufacturer    | Model              | Part Type                                      | Serial Number | Calibration Due |
|-------------|-----------------|--------------------|------------------------------------------------|---------------|-----------------|
| 901020      | Hewlett Packard | 8564E              | Portable Spectrum Analyzer<br>(9 kHz - 40 GHz) | 3943A01719    | 07/15/04        |
| 901118      | Hewlett Packard | 8901A Opt. 002-003 | Modulation Analyzer                            | 2406A00178    | 06/18/04        |

**Test Personnel:**

|                          |                                                                                     |                |
|--------------------------|-------------------------------------------------------------------------------------|----------------|
| Daniel Biggs             |  | March 24, 2004 |
| Test Technician/Engineer | Signature                                                                           | Date Of Test   |

## **10 FCC RULES AND REGULATION PART 90 §90.539 AND PART 2 §2.1055: FREQUENCY STABILITY**

Transmitters designed to operate in the 764-776 MHz and 794-806 MHz frequency band must meet the frequency stability requirements in this section.

- a) Mobile, portable, and control transmitters must normally use automatic frequency control (AFC) to lock on to the base station signal.
- b) The frequency stability of the base transmitters operating in the narrowband segment must be 100 parts per billion or better.
- c) The frequency stability of mobile, portable, and control transmitters operating in the narrowband segment must be 400 parts per billion or better when AFC is locked to the base station. When AFC is not locked to the base station, the frequency stability must be at least 1.0 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2 channel aggregate), and 2.5 ppm for 25kHz (4 channel aggregate).
- d) The frequency stability of base transmitters operating in the wideband segment must be 1 part per million or better.
- e) The frequency stability of mobile, portable, and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

### **10.1 TEST PROCEDURE**

ANSI/TIA/EIA-603-1992, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C.


The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½ hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage.

The worst-case test data are shown below in Table 10- 1 and Table 10-3.

## 10.2 TEST DATA

### 10.2.1 FREQUENCY STABILITY/TEMPERATURE VARIATION

**PLOT 10-1: TEMPERATURE FREQUENCY STABILITY**

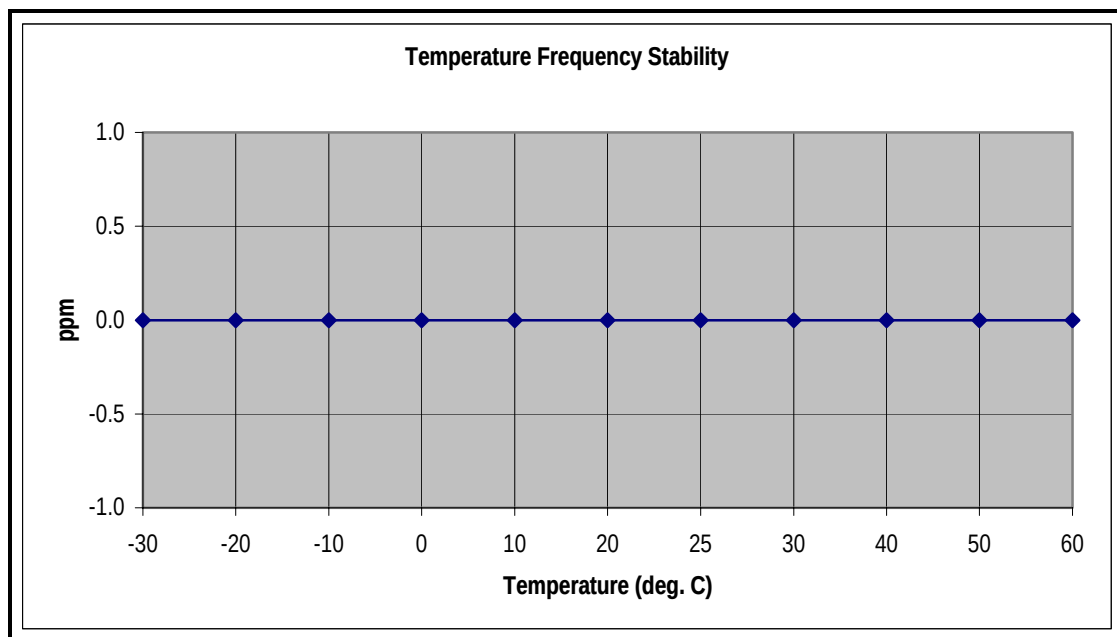

**TABLE 10-1: FREQUENCY STABILITY/TEMPERATURE VARIATION - 766.9875 MHZ**

| Temperature C | Measured Frequency (MHz) | ppm |
|---------------|--------------------------|-----|
| -30           | 766.987500               | 0.0 |
| -20           | 766.987500               | 0.0 |
| -10           | 766.987500               | 0.0 |
| 0             | 766.987500               | 0.0 |
| 10            | 766.987500               | 0.0 |
| 20            | 766.987500               | 0.0 |
| 25            | 766.987500               | 0.0 |
| 30            | 766.987500               | 0.0 |
| 40            | 766.987500               | 0.0 |
| 50            | 766.987500               | 0.0 |
| 60            | 766.987500               | 0.0 |

**TABLE 10-2: TEST EQUIPMENT (FREQUENCY STABILITY/TEMPERATURE)**


| RTL Asset # | Manufacturer             | Model              | Part Type                         | Serial Number | Calibration Due |
|-------------|--------------------------|--------------------|-----------------------------------|---------------|-----------------|
| 900946      | Tenney Engineering, Inc. | TH65               | Temperature Chamber with Humidity | 11380         | 02/03/05        |
| 901118      | Hewlett Packard          | 8901A Opt. 002-003 | Modulation Analyzer               | 2406A00178    | 06/18/04        |

**Test Personnel:**

|                          |                                                                                   |                |
|--------------------------|-----------------------------------------------------------------------------------|----------------|
| Daniel Biggs             |  | March 12, 2004 |
| Test Technician/Engineer | Signature                                                                         | Date Of Test   |

## 10.2.2 FREQUENCY STABILITY/VOLTAGE VARIATION

**PLOT 10-2: VOLTAGE FREQUENCY STABILITY**

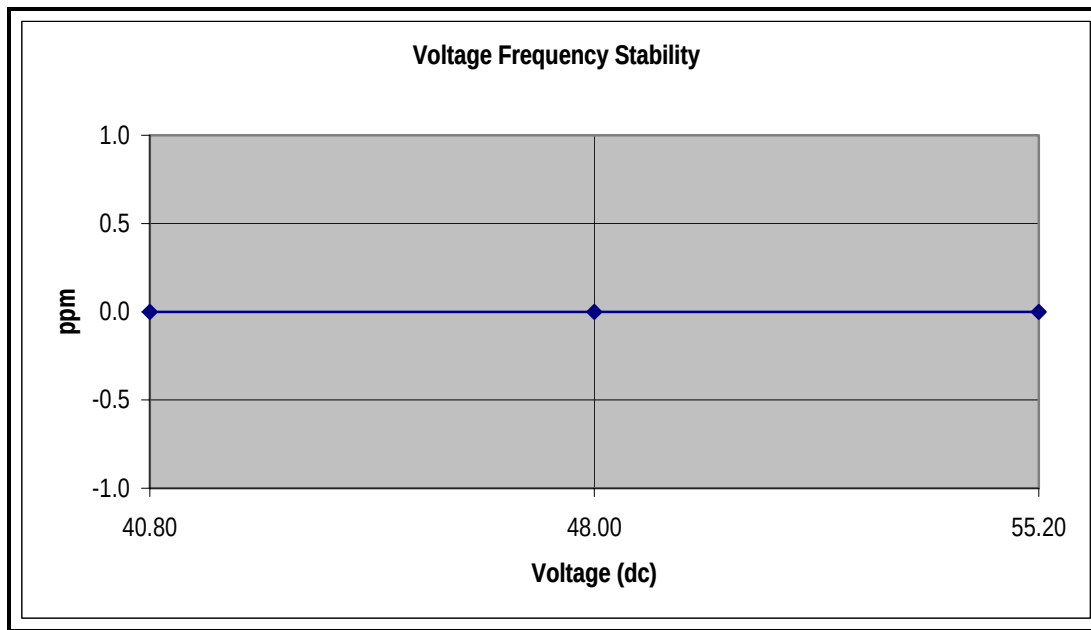

**TABLE 10-3: FREQUENCY STABILITY/VOLTAGE VARIATION - 766.9875 MHZ**

| Voltage (VDC) | Measured Frequency (MHz) | ppm |
|---------------|--------------------------|-----|
| 40.80         | 766.987500               | 0.0 |
| 48.00         | 766.987500               | 0.0 |
| 55.20         | 766.987500               | 0.0 |

**TABLE 10-4: TEST EQUIPMENT (FREQUENCY STABILITY/VOLTAGE)**

| RTL Asset # | Manufacturer    | Model              | Part Type                                      | Serial Number | Calibration Due |
|-------------|-----------------|--------------------|------------------------------------------------|---------------|-----------------|
| 901020      | Hewlett Packard | 8564E              | Portable Spectrum Analyzer<br>(9 kHz - 40 GHz) | 3943A01719    | 07/15/04        |
| 901118      | Hewlett Packard | 8901A Opt. 002-003 | Modulation Analyzer                            | 2406A00178    | 06/18/04        |

### Test Personnel:

|                          |                                                                                     |                |
|--------------------------|-------------------------------------------------------------------------------------|----------------|
| Daniel Biggs             |  | March 12, 2004 |
| Test Technician/Engineer | Signature                                                                           | Date Of Test   |

## 11 FCC RULES AND REGULATIONS PART 90 §90.543 (E): PROTECTION OF 1559-1610 MHZ BAND

For operations in the 764 to 776 MHz and 794 to 806 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

### 11.1 TEST PROCEDURE

#### Substitution Method:

The EUT was set up at an antenna-to-EUT distance of 3 meters on an open area test site. The EUT was placed on a nonconductive turntable 1.0 meter above the ground plane. The physical arrangement of the EUT was varied through three orthogonal planes in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The worst-case, maximum radiated emission was recorded and used as reference for the measurement. The EUT was then replaced by a  $\frac{1}{2}$  wave dipole antenna and polarized in accordance with the EUT's antenna polarization. The  $\frac{1}{2}$  wave dipole antenna was connected to a RF signal generator with a coaxial cable. The search antenna height, and search antenna polarity, were set to levels that produced the maximum reading obtained. The signal generator was adjusted to a level that produced that maximum radiated emission level. The signal generator level was recorded and corrected by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal  $\frac{1}{2}$  wave dipole antenna. The signal generator corrected level is the ERP level.

### 11.2 TEST DATA

Frequencies tested: 1559-1610 MHz

Carrier Frequencies: 764.0125, 775.9875 MHz

The worst-case Output Power (highest) levels are shown. No discrete or wideband signals were found in GNSS band.

**TABLE 11-1: TEST RESULTS - EIRP IN GNSS BAND**

| Frequency (MHz)  | Spectrum Analyzer Level (dBuV) | Signal Generator Level (dBm) | Cable Loss (dB)* | Antenna Factor (dBd) | EIRP (dBm) | EIRP (dBW) |
|------------------|--------------------------------|------------------------------|------------------|----------------------|------------|------------|
| 1590 (Channel 1) | 25.3                           | -54                          | 4.2              | 7.1                  | -51.1      | -81.1      |
| 1590 (Channel 4) | 25.4                           | -54.1                        | 4.5              | 7.1                  | -51.5      | -81.5      |

\*Cable loss from transmitting antenna to signal generator

\*Measurement accuracy is +/- .5 dB

**TABLE 11-2: TEST EQUIPMENT (EIRP IN GNSS BAND)**

| RTL Asset # | Manufacturer    | Model         | Part Type                                      | Serial Number   | Calibration Due |
|-------------|-----------------|---------------|------------------------------------------------|-----------------|-----------------|
| 900878      | Rhein Tech Labs | AM3-1197-0005 | 3 meter antenna mast, polarizing               | Outdoor Range 1 | not req'd       |
| 900917      | Hewlett Packard | 8648          | Signal Generator<br>(100 kHz - 3200 MHz)       |                 | 08/5/04         |
| 901020      | Hewlett Packard | 8564E         | Portable Spectrum Analyzer<br>(9 kHz - 40 GHz) | 3943A01719      | 07/15/04        |
| 900814      | Electrometrics  | RGA-60        | Double Ridge Horn (1 – 18 GHz)                 | 2310            | 02/17/06        |
| 901262      | ETS             | 3115          | Double Ridge Horn (1 – 18 GHz)                 | 6748            | N/A             |

**Test Personnel:**

|                          |                                                                                   |                |
|--------------------------|-----------------------------------------------------------------------------------|----------------|
| Daniel Biggs             |  | March 23, 2004 |
| Test Technician/Engineer | Signature                                                                         | Date Of Test   |

## 12 FCC RULES AND REGULATIONS PART 2 §2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH

Type of Emission: F9W

Necessary Bandwidth and Emission Bandwidth:

**Digital voice and data – 25 kHz separation**  
**19,200 BPS**

Calculation:

$$B(n) = (R/\text{Log}\{2\}S) + 2DK \quad (\text{Log}\{2\} \text{ is Log base 2})$$

where,

R = 19.2 kilobits per second (raw data rate)

S = 4 (4 level FSK)

D = 3.75KHz (FM deviation)

K = .334 (K is calculated as a best fit quadratic to occupied BW measurements; where  $K = -0.256*d*d + 1.066*d - 0.576$ , and where d = normalized deviation of factor of 1.2)

Therefore,

$$B(n) = 12.1 \text{ or } 12K1$$

FCC emission designator: 12K1F9W

## 13 CONCLUSION

The data in this measurement report shows that the **M/A-COM, Inc. Model SkyMaster 700 MHz Base Station; FCC ID: BV8MBS700A100** complies with all the requirements of Parts 90, 15 and 2 of the FCC Rules.