

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						46 of 336

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Face-Held with System Radio (Model No.: MAHROS0050)

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						47 of 336

Date Tested: 07/20/2005

Face-Held SAR - 766.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.96 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL767 ($\sigma = 0.86$ mho/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = 0.171 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.726 mW/g



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = 0.171 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.842 mW/g

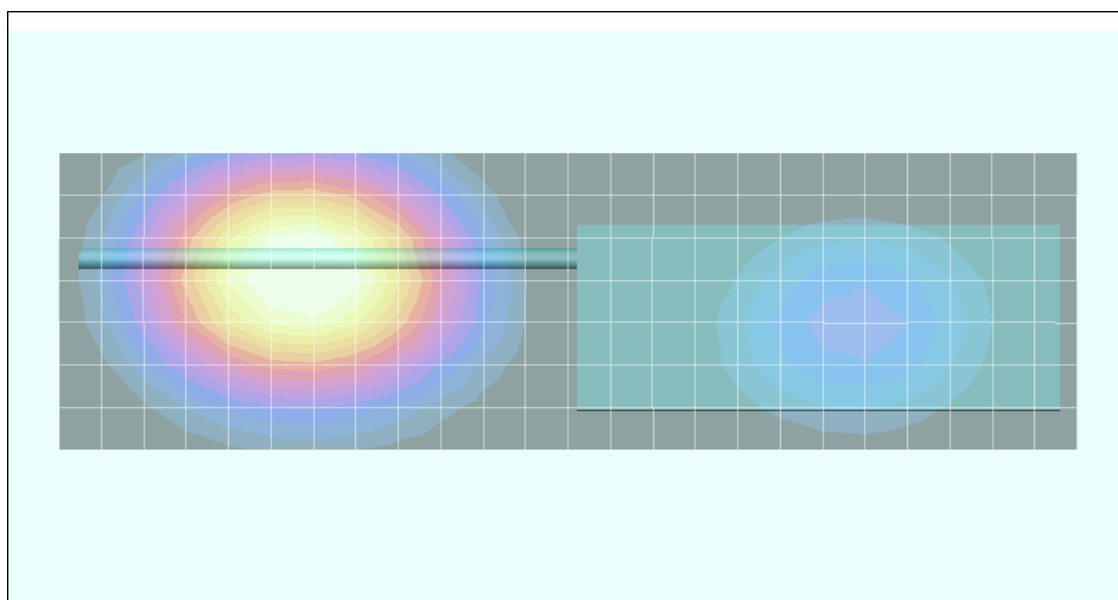

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/20/2005

Face-Held SAR - 766.9875 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.94 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: HSL767 ($\sigma = 0.86$ mho/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = 0.189 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.20 mW/g; SAR(10 g) = 0.878 mW/g

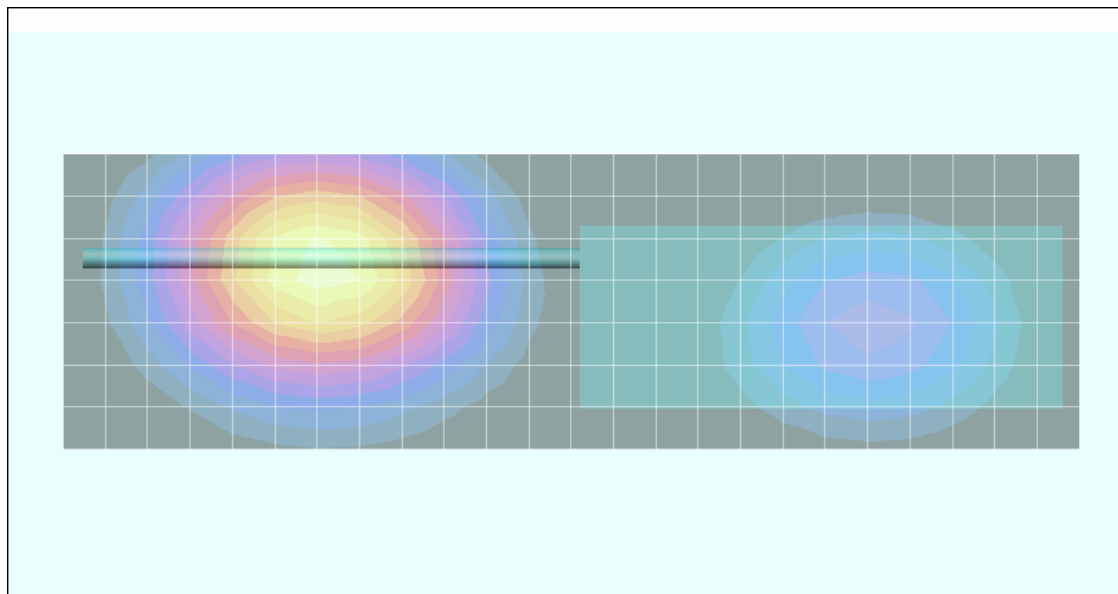

Date Tested: 07/21/2005

Face-Held SAR - 766.9875 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 23.5 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Conducted Power: 34.03 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL767 ($\sigma = 0.85$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.834 mW/g

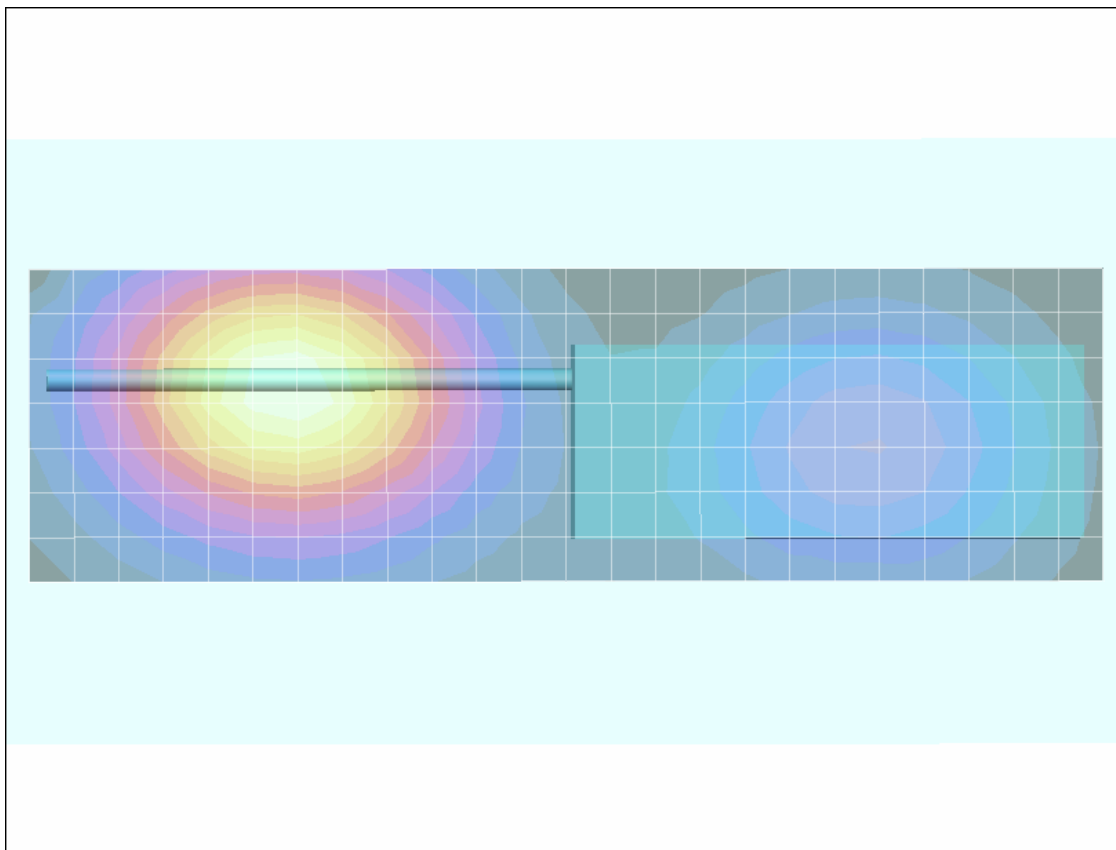

Date Tested: 07/21/2005

Face-Held SAR - 766.9875 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 23.5 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
RF Conducted Power: 34.27 dBm (Conducted)
Frequency: 766.9875 MHz; Duty Cycle: 1:1
NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)
Medium: HSL767 ($\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$)



- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 14.2 V/m; Power Drift = 0.0989 dB
Peak SAR (extrapolated) = 1.96 W/kg
SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.948 mW/g

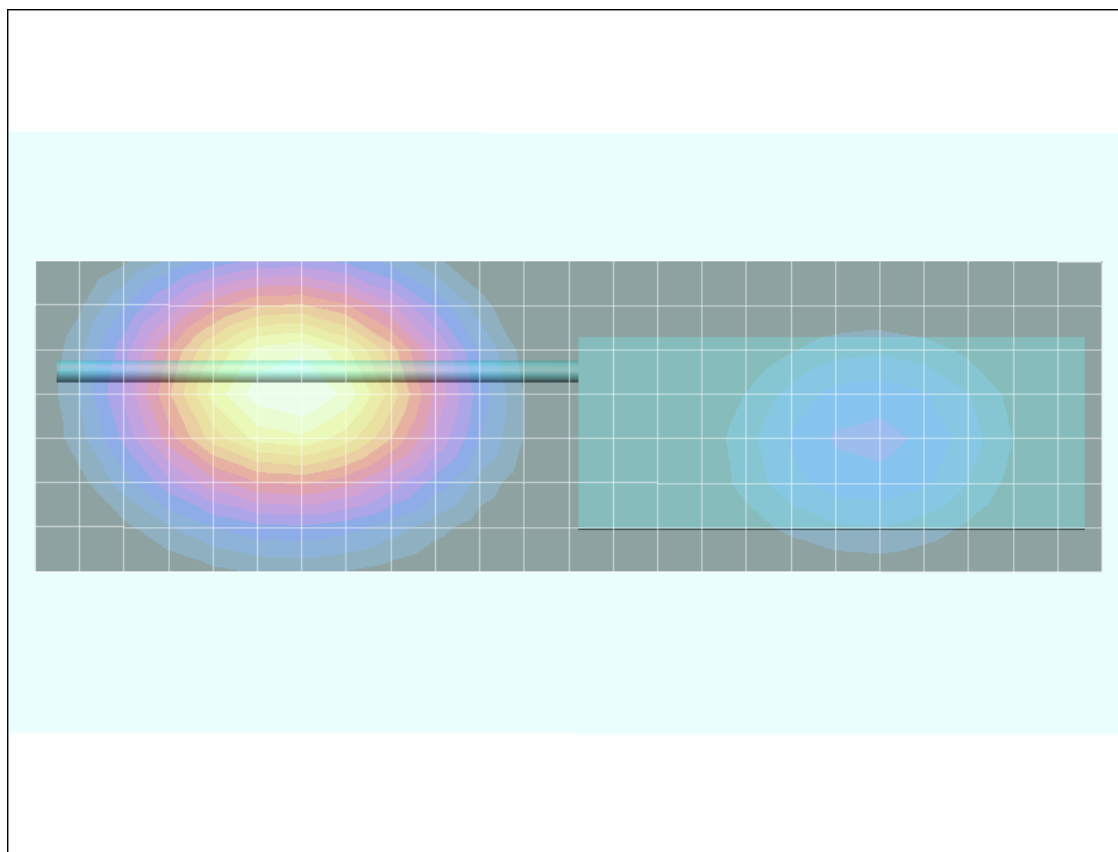

Date Tested: 07/21/2005

Face-Held SAR - 766.9875 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 23.5 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Conducted Power: 34.15 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL767 ($\sigma = 0.85$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 4.77 W/kg

SAR(1 g) = 3.22 mW/g; SAR(10 g) = 2.34 mW/g

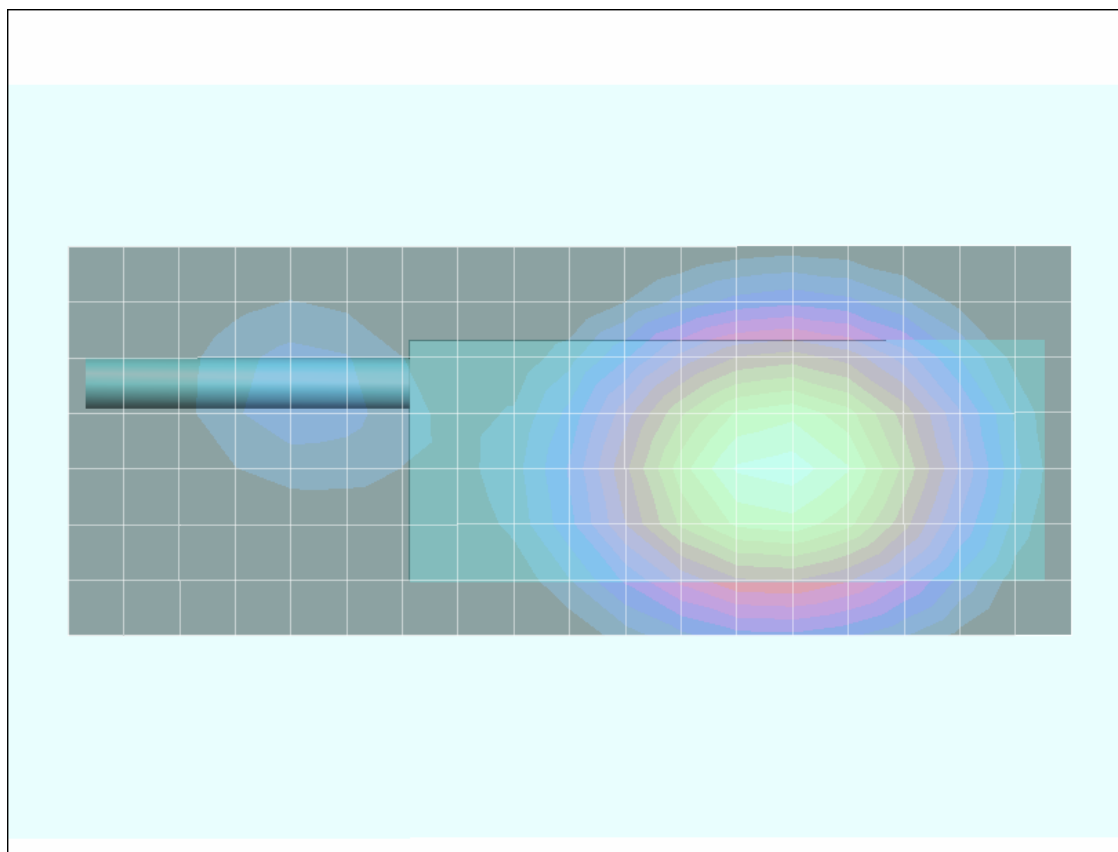

Date Tested: 07/21/2005

Face-Held SAR - 766.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 23.5 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
 RF Conducted Power: 34.22 dBm (Conducted)
 Frequency: 766.9875 MHz; Duty Cycle: 1:1
 NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)
 Medium: HSL767 ($\sigma = 0.85$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³)



- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):


Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 30.0 V/m; Power Drift = 0.0834 dB
 Peak SAR (extrapolated) = 5.10 W/kg
SAR(1 g) = 3.43 mW/g; SAR(10 g) = 2.49 mW/g

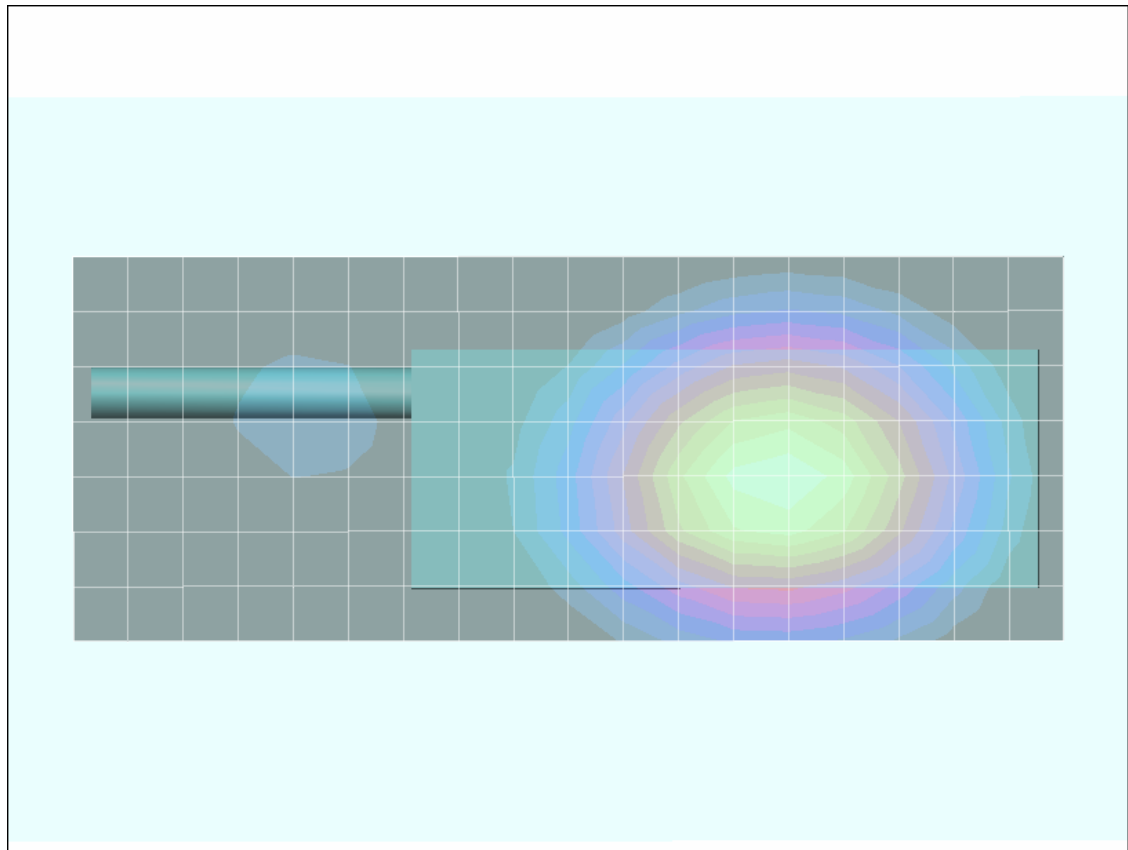

Z-Axis Scan

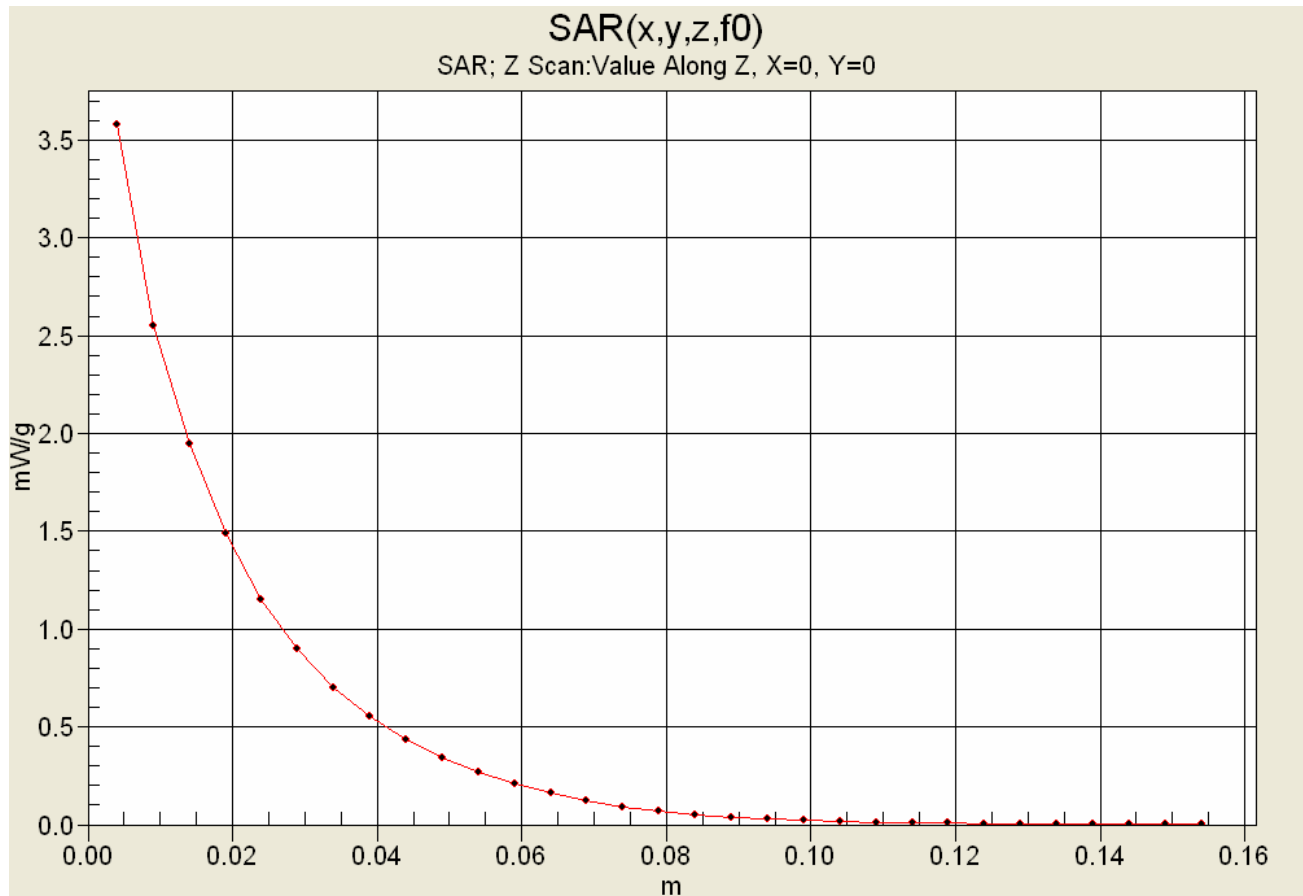

Date Tested: 07/21/2005

Face-Held SAR - 766.9875 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 23.5 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Conducted Power: 34.16 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL767 ($\sigma = 0.85$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 29.6 V/m; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 4.76 W/kg

SAR(1 g) = 3.22 mW/g; SAR(10 g) = 2.34 mW/g

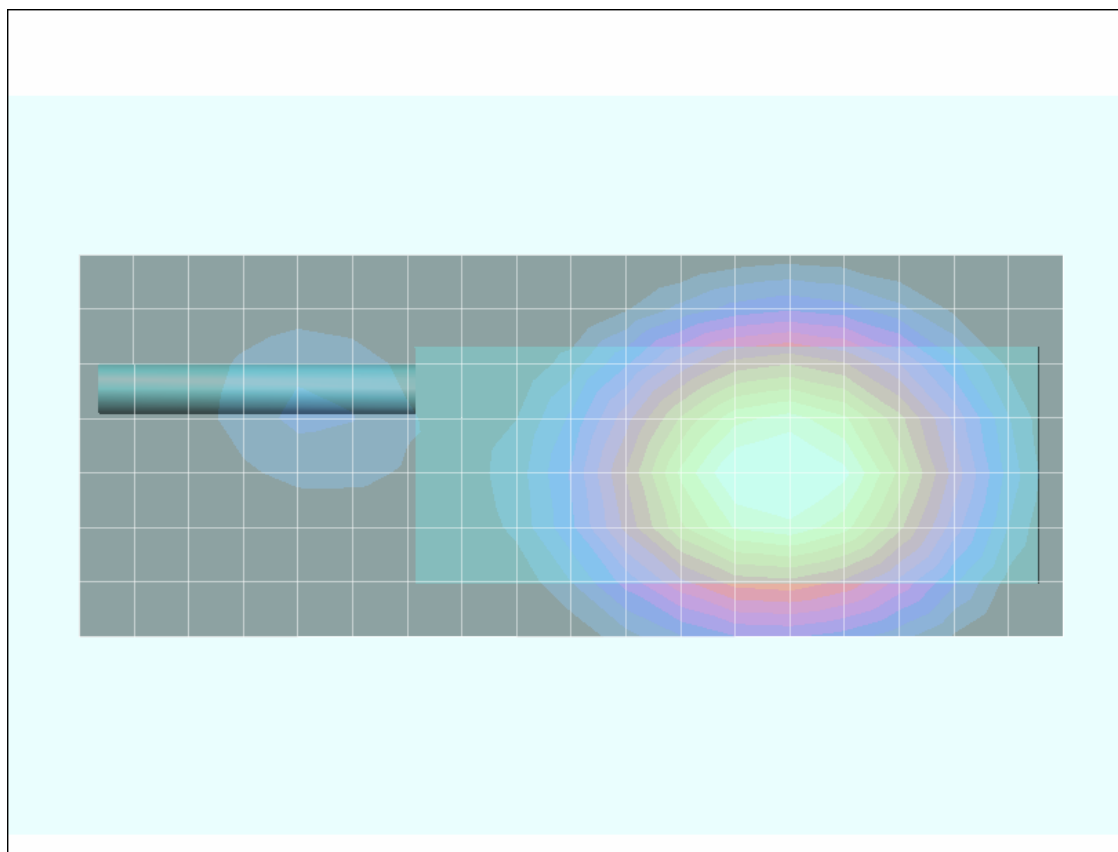

Date Tested: 07/21/2005

Face-Held SAR - 766.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 23.5 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
RF Conducted Power: 34.21 dBm (Conducted)
Frequency: 766.9875 MHz; Duty Cycle: 1:1
NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)
Medium: HSL767 ($\sigma = 0.85$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³)



- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 29.2 V/m; Power Drift = 0.0630 dB
Peak SAR (extrapolated) = 4.93 W/kg
SAR(1 g) = 3.32 mW/g; SAR(10 g) = 2.4 mW/g

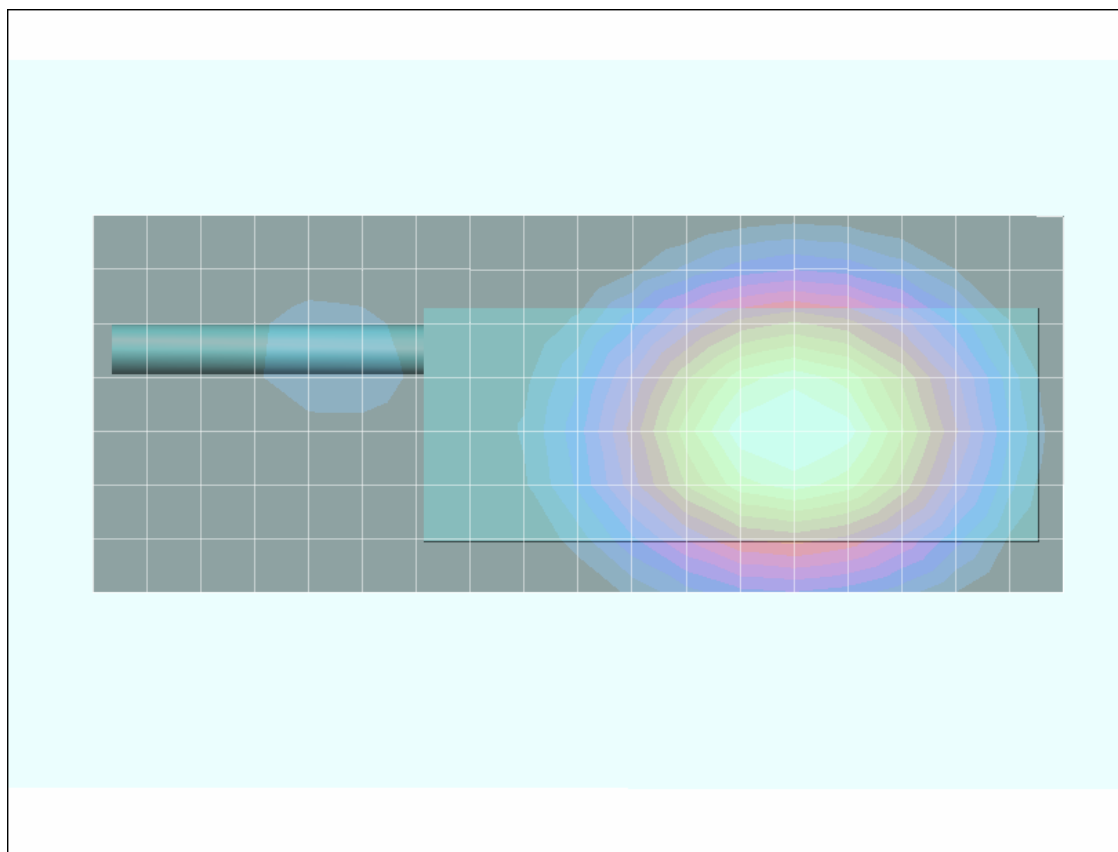

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.05 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = 0.0583 dB

Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 1.60 mW/g; SAR(10 g) = 1.15 mW/g

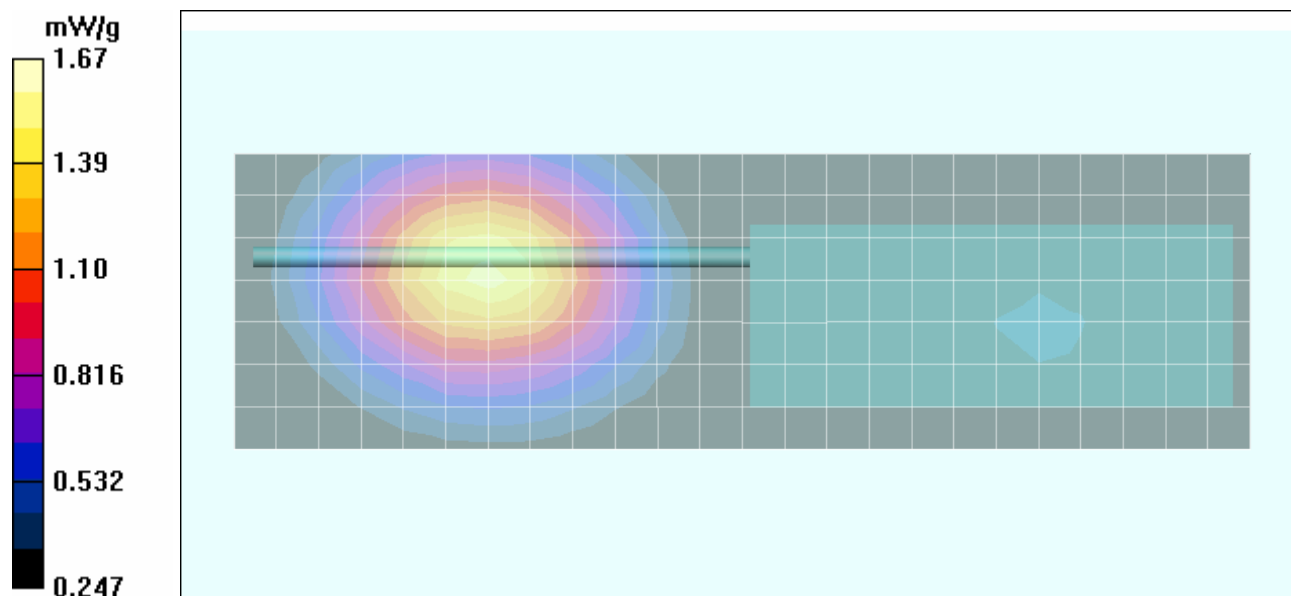

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.05 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1.46 mW/g; SAR(10 g) = 1.05 mW/g

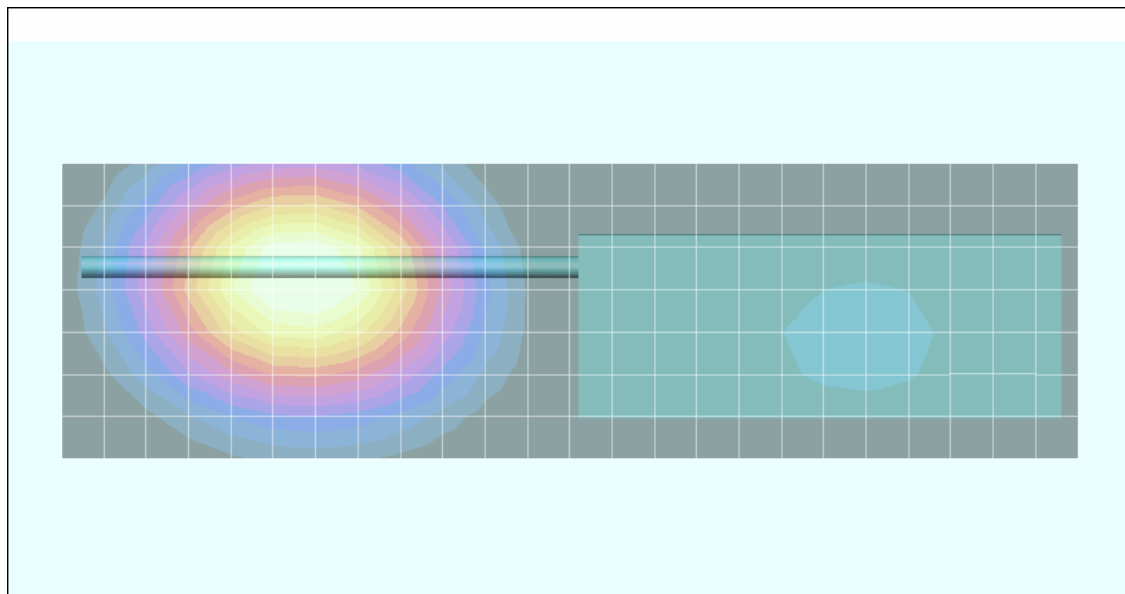

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.98 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.0975 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 1.48 mW/g; SAR(10 g) = 1.07 mW/g

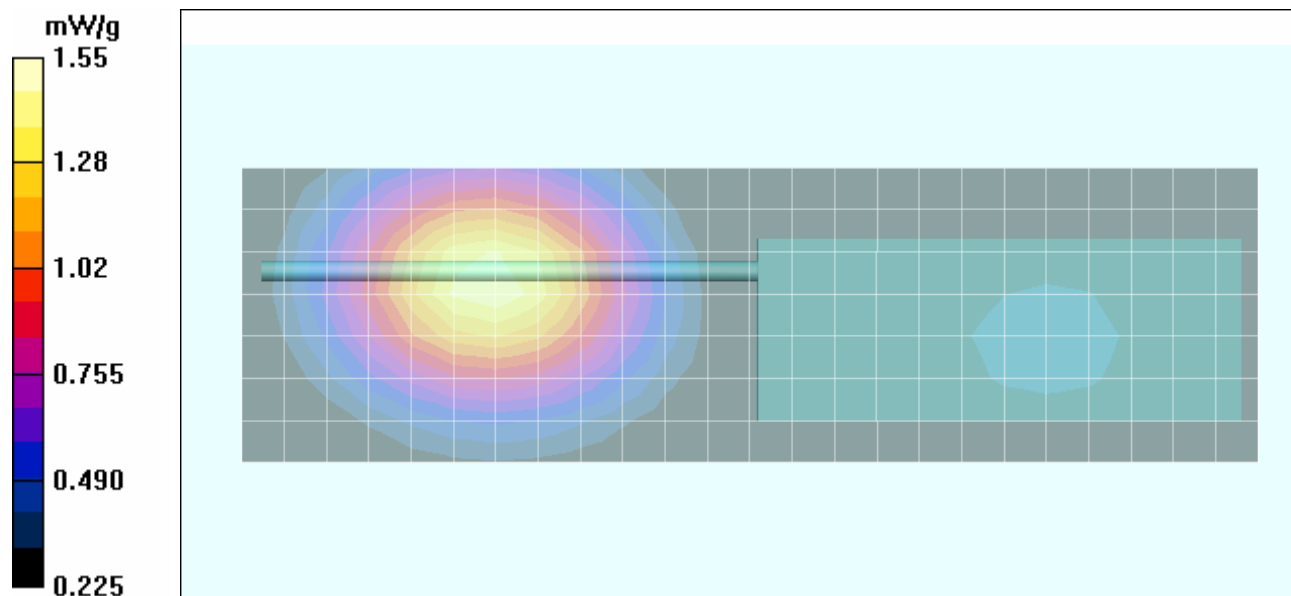

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.95 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = 0.121 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 1.43 mW/g; SAR(10 g) = 1.03 mW/g

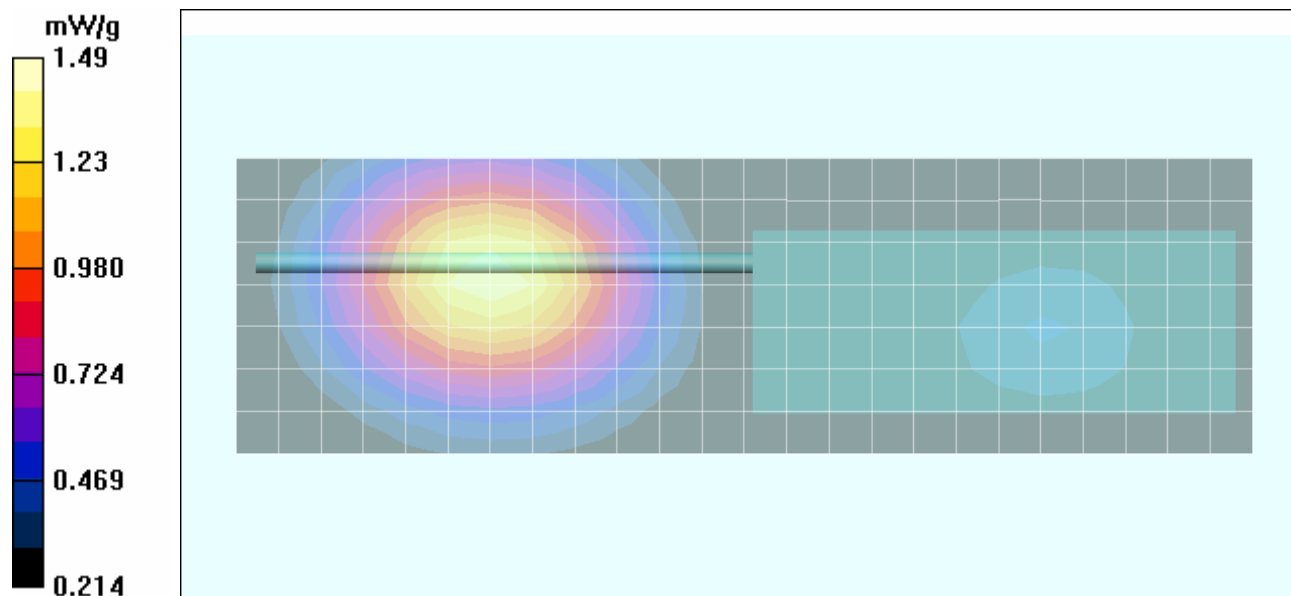

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.01 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 36.5 V/m; Power Drift = 0.227 dB

Peak SAR (extrapolated) = 4.94 W/kg

SAR(1 g) = 3.33 mW/g; SAR(10 g) = 2.41 mW/g

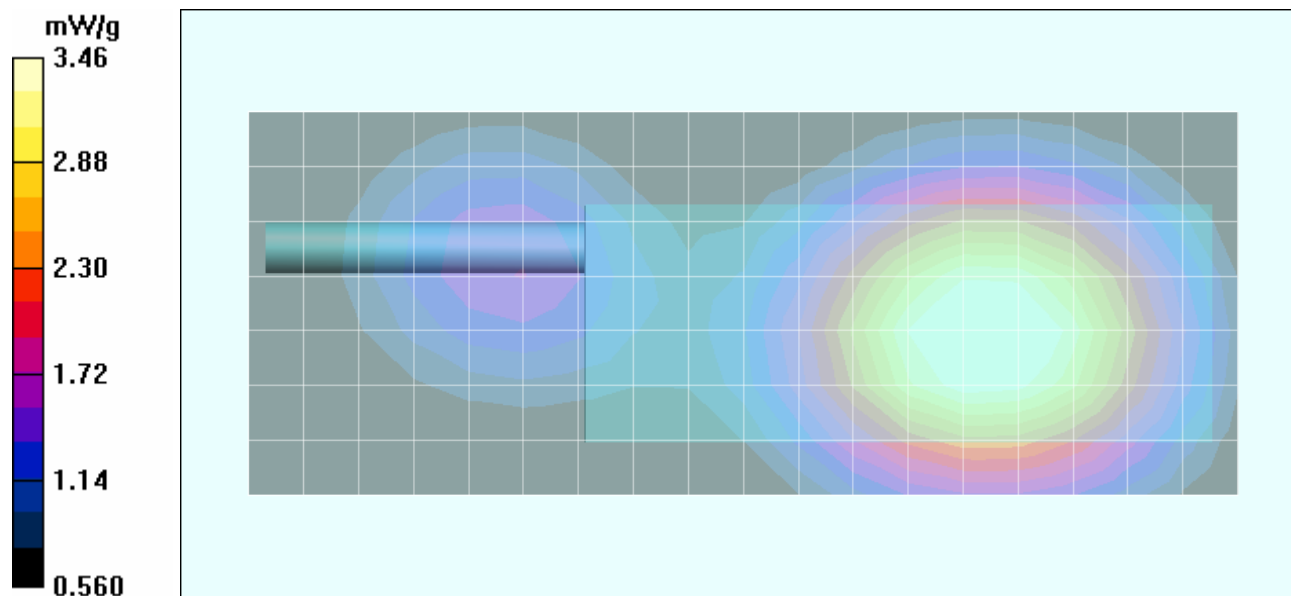

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.98 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 35.4 V/m; Power Drift = 0.179 dB

Peak SAR (extrapolated) = 5.21 W/kg

SAR(1 g) = 3.52 mW/g; SAR(10 g) = 2.56 mW/g

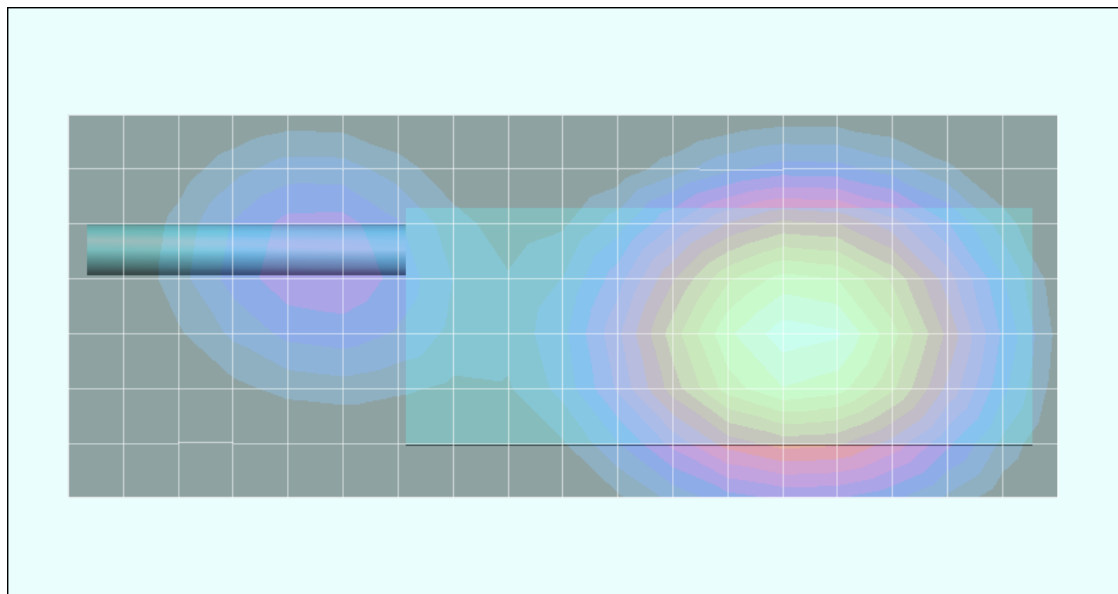

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.93 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 34.9 V/m; Power Drift = 0.164 dB

Peak SAR (extrapolated) = 5.23 W/kg

SAR(1 g) = 3.50 mW/g; SAR(10 g) = 2.53 mW/g

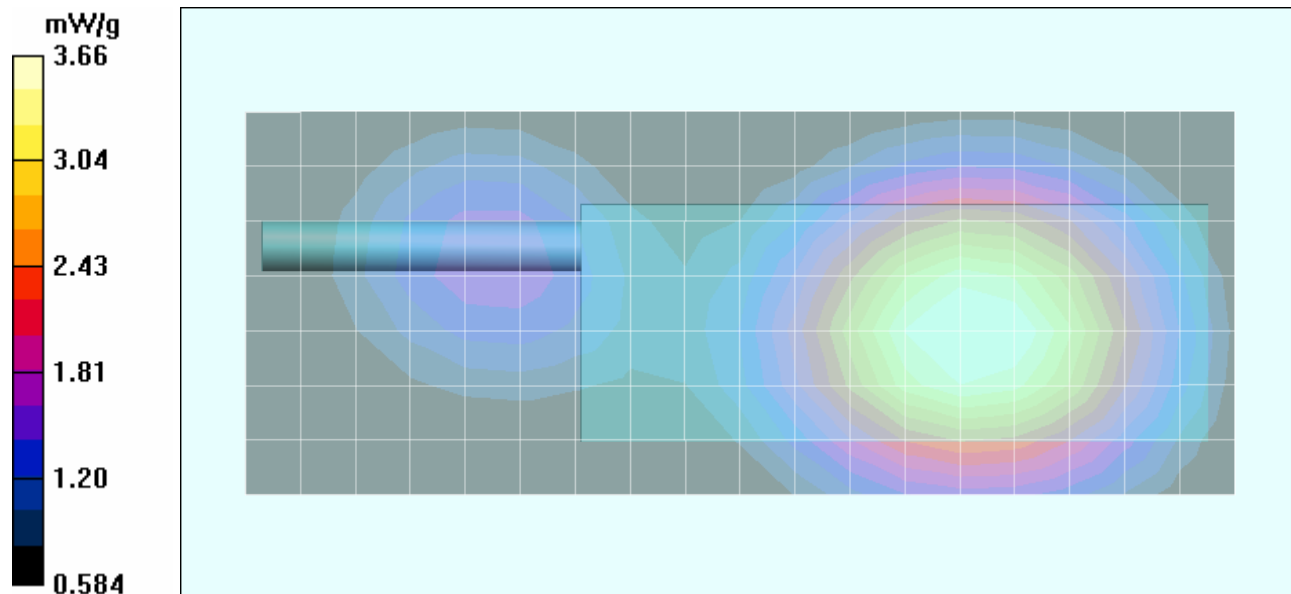

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.96 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 35.0 V/m; Power Drift = 0.185 dB

Peak SAR (extrapolated) = 5.48 W/kg

SAR(1 g) = 3.68 mW/g; SAR(10 g) = 2.66 mW/g

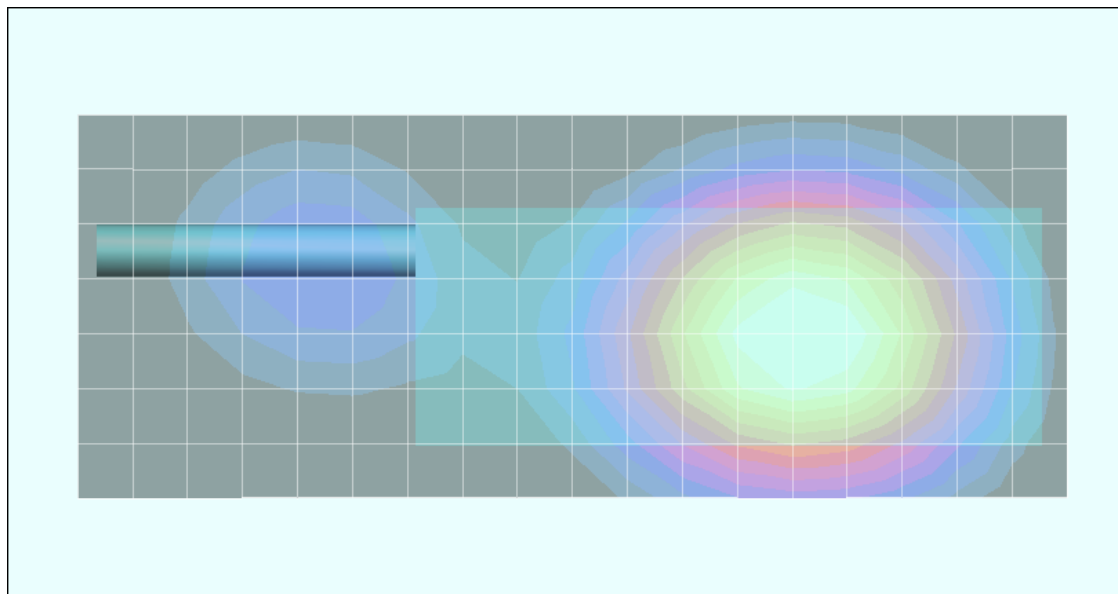

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.78 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):



Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Reference Value = 11.0 V/m; Power Drift = -0.00242 dB

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 1.99 mW/g; SAR(10 g) = 1.46 mW/g

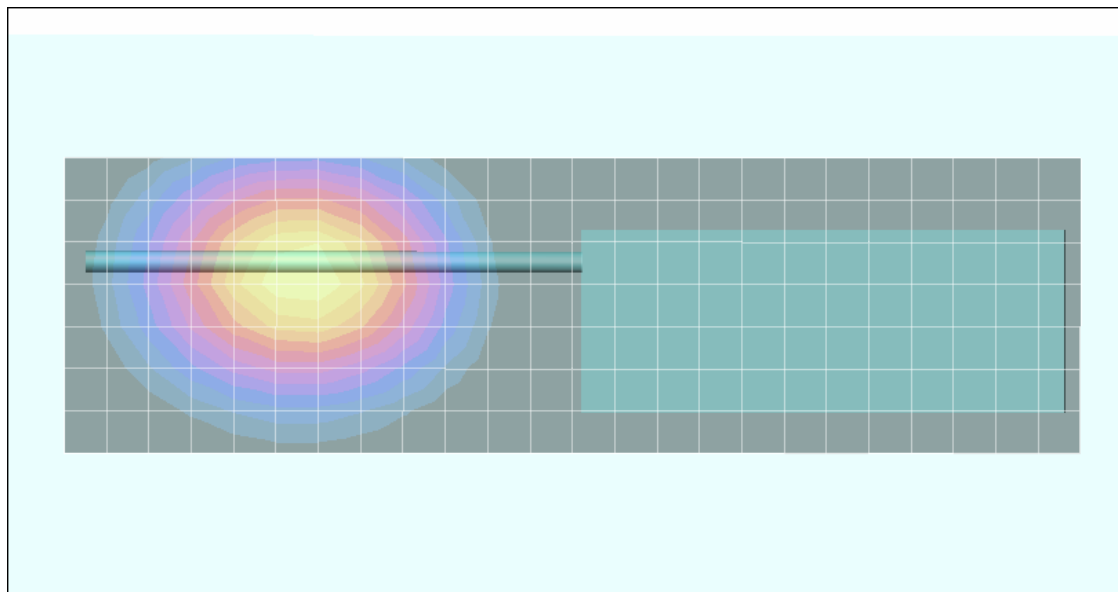

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
 RF Output Power: 34.79 dBm (Conducted)
 Frequency: 815.0000 MHz; Duty Cycle: 1:1
 NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)
 Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):


Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Reference Value = 12.1 V/m; Power Drift = 0.0871 dB

Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 2.19 mW/g; SAR(10 g) = 1.62 mW/g

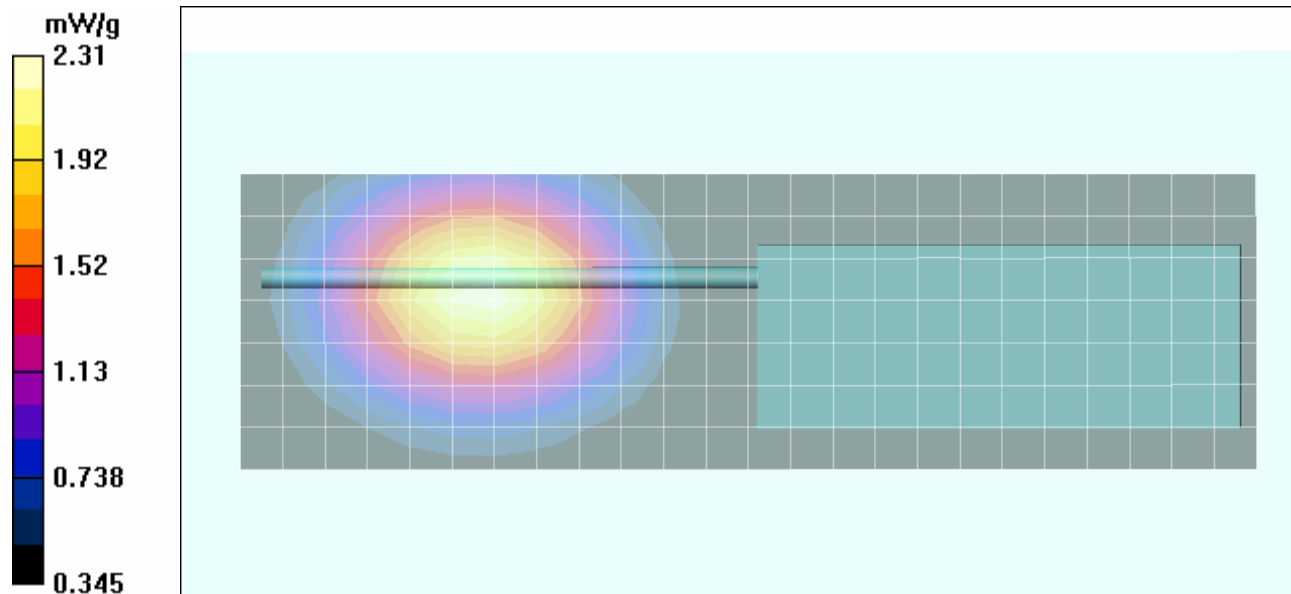

Date Tested: 08/04/2005

Face-Held SAR - 815.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1) **SAR Comparison - Scan Radio (Model No.: MAHROS0051)**

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0051); Serial: N/A

Ambient Temp: 24.0 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: FM
 RF Output Power: 34.65 dBm (Conducted)
 Frequency: 815.0000 MHz; Duty Cycle: 1:1
 NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)
 Medium: HSL815 ($\sigma = 0.90$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 11.3 V/m; Power Drift = 0.0854 dB
 Peak SAR (extrapolated) = 2.40 W/kg
SAR(1 g) = 1.85 mW/g; SAR(10 g) = 1.37 mW/g

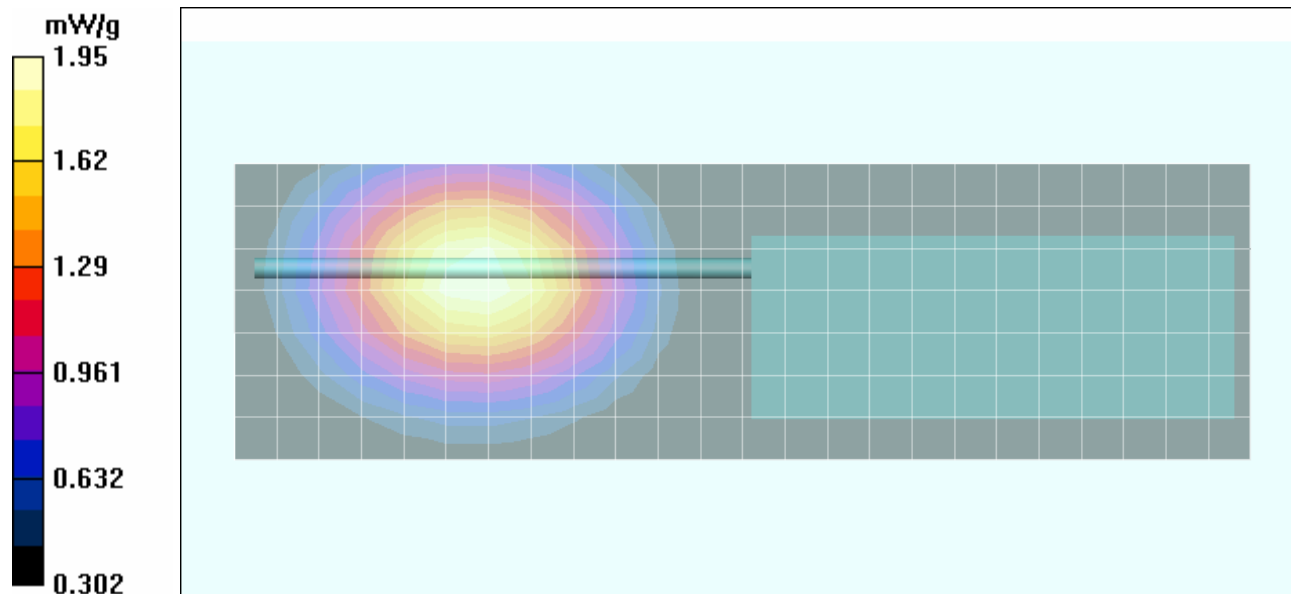

Date Tested: 08/04/2005

Face-Held SAR - 815.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1) SAR Comparison - Select Radio (Model No.: MAHROS0052)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0052); Serial: N/A

Ambient Temp: 24.0 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.59 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: HSL815 ($\sigma = 0.90$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = 0.0551 dB

Peak SAR (extrapolated) = 2.48 W/kg

SAR(1 g) = 1.91 mW/g; SAR(10 g) = 1.42 mW/g

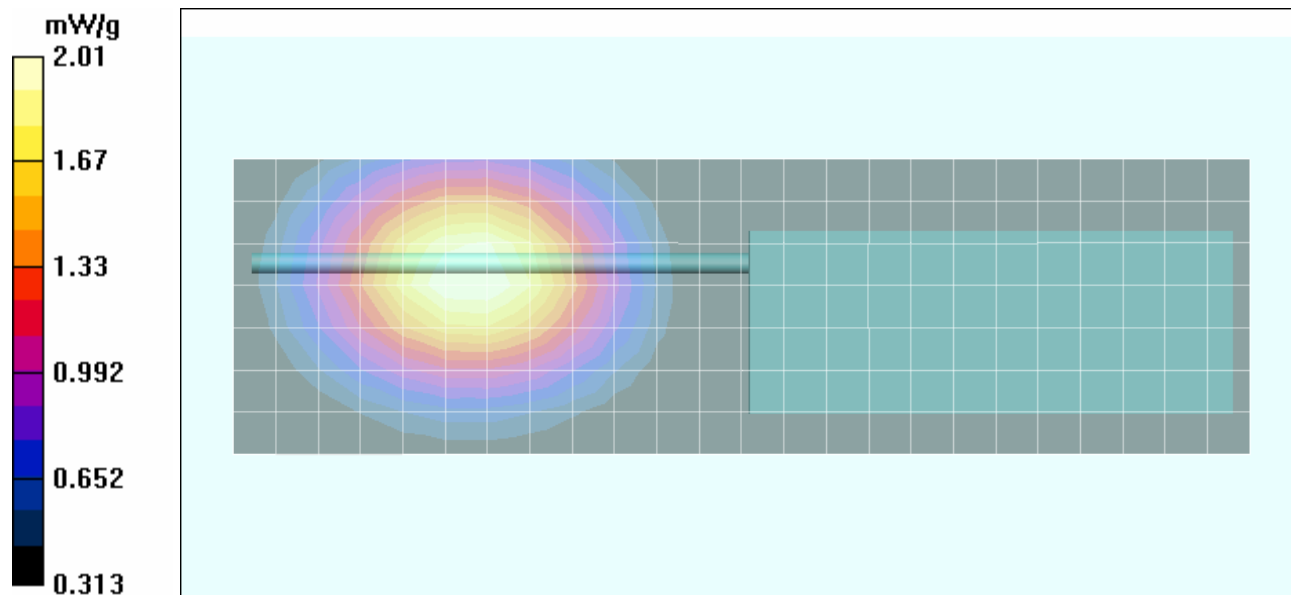

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.56 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = 0.0874 dB

Peak SAR (extrapolated) = 2.49 W/kg

SAR(1 g) = 1.91 mW/g; SAR(10 g) = 1.41 mW/g

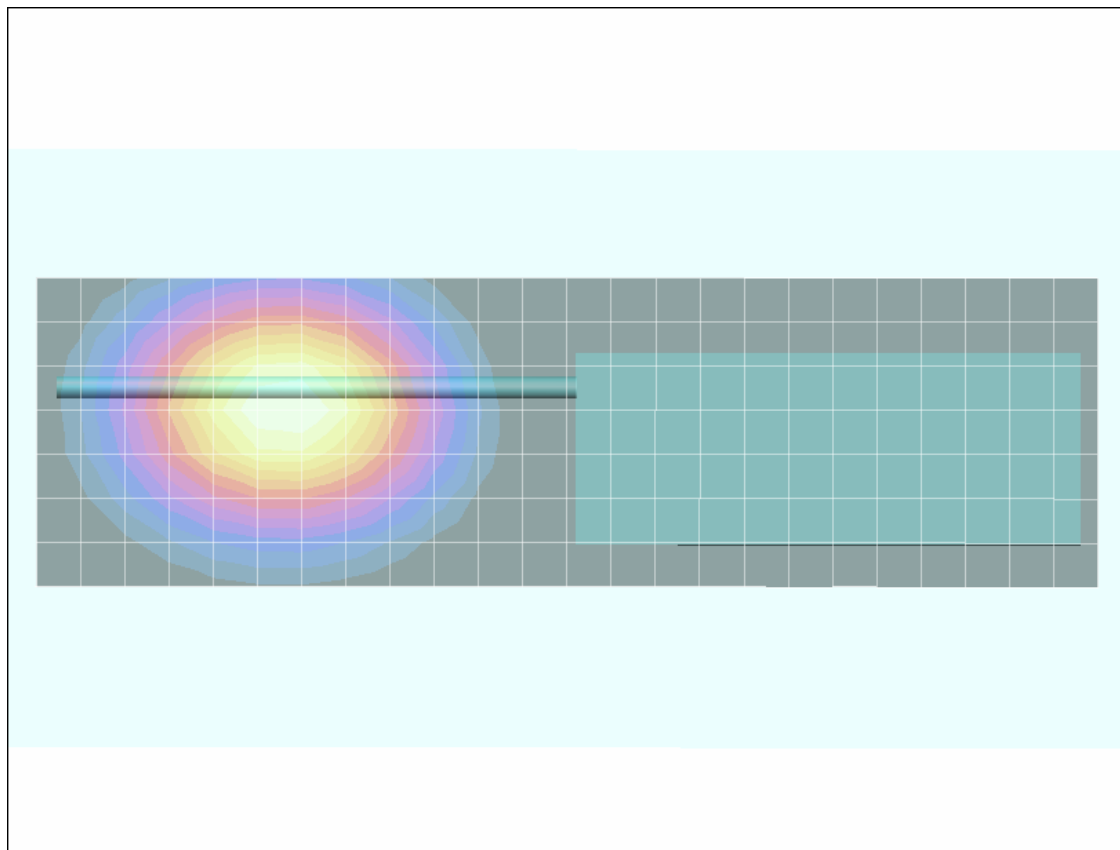

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
RF Output Power: 34.68 dBm (Conducted)
Frequency: 815.0000 MHz; Duty Cycle: 1:1
NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)
Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)



- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 10.4 V/m; Power Drift = 0.0966 dB
Peak SAR (extrapolated) = 2.46 W/kg
SAR(1 g) = 1.89 mW/g; SAR(10 g) = 1.4 mW/g

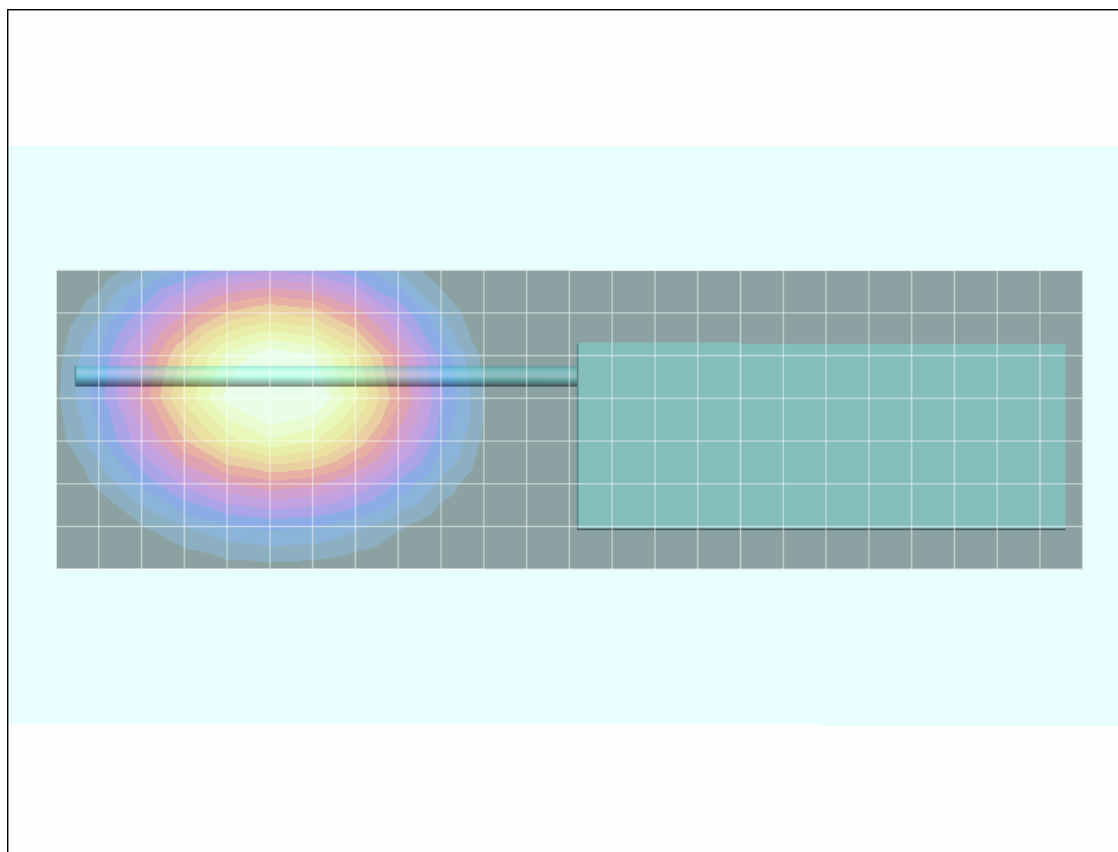

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.56 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.5 V/m; Power Drift = 0.0902 dB

Peak SAR (extrapolated) = 4.81 W/kg

SAR(1 g) = 3.71 mW/g; SAR(10 g) = 2.75 mW/g

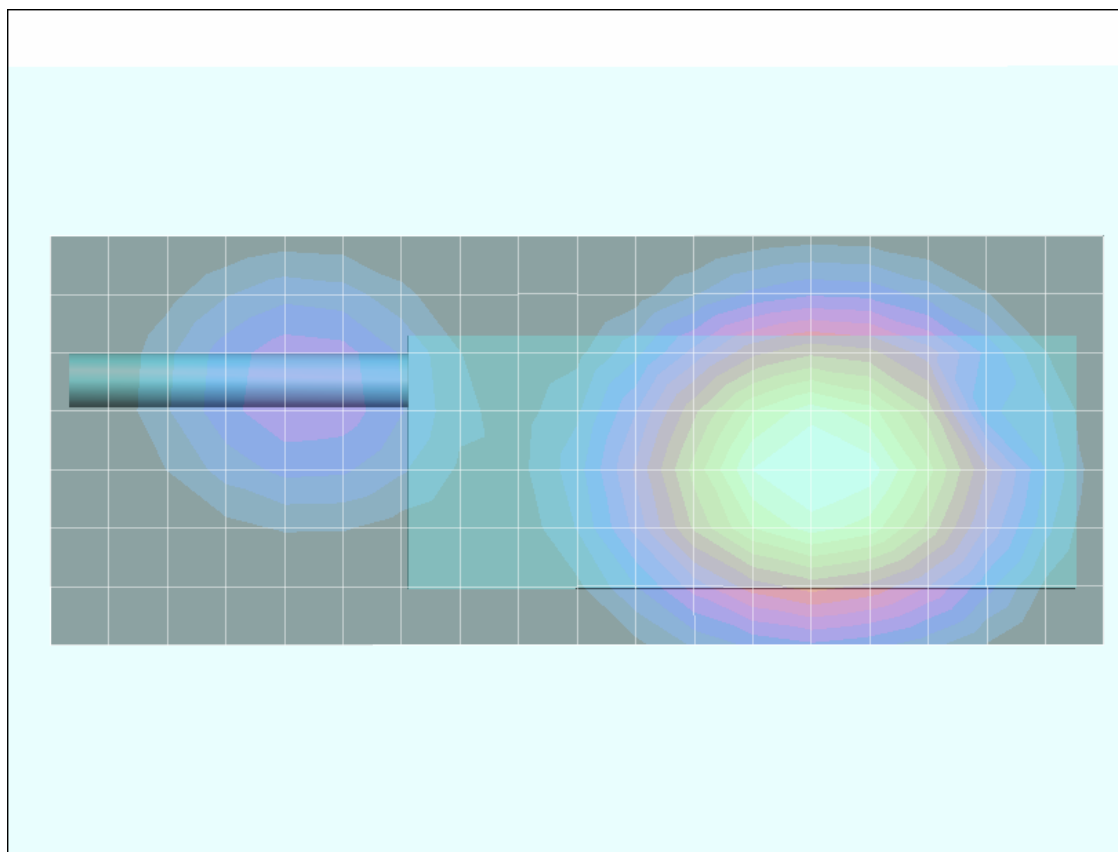

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
RF Output Power: 34.60 dBm (Conducted)
Frequency: 815.0000 MHz; Duty Cycle: 1:1
NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)
Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)



- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 37.7 V/m; Power Drift = 0.0928 dB
Peak SAR (extrapolated) = 4.89 W/kg
SAR(1 g) = 3.78 mW/g; SAR(10 g) = 2.8 mW/g

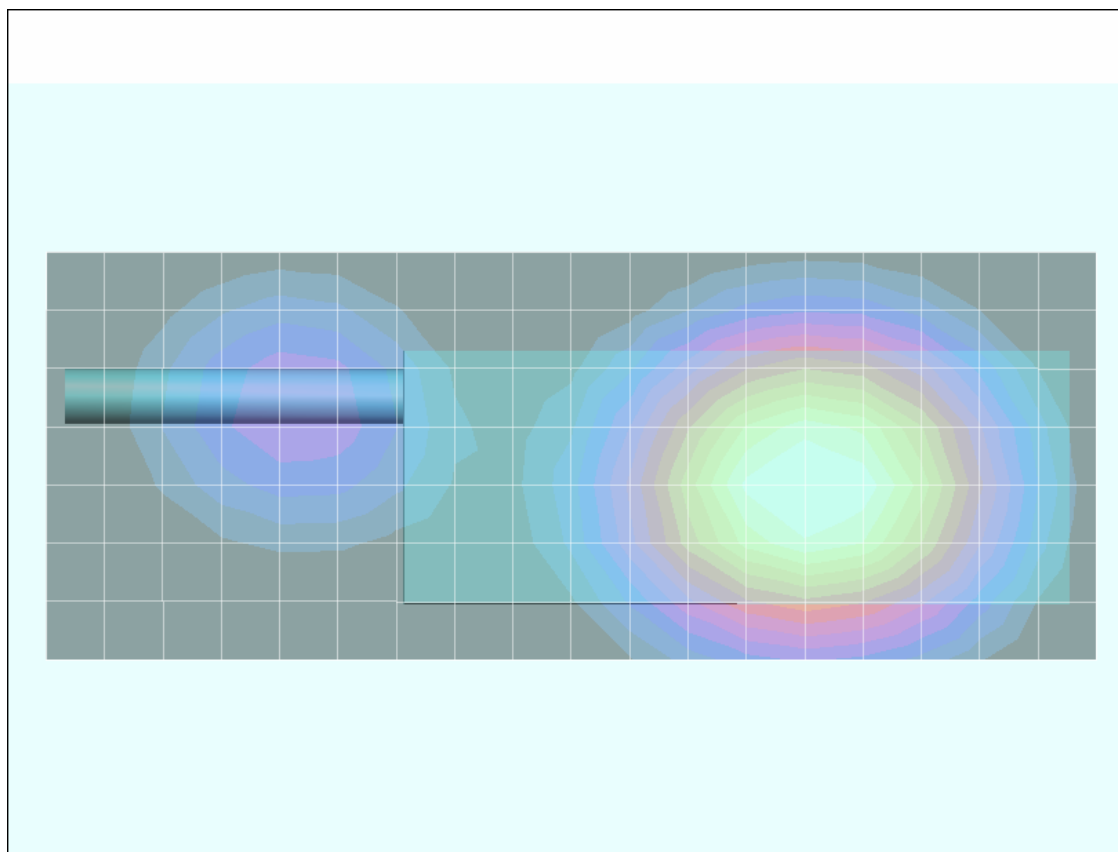

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.66 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 38.4 V/m; Power Drift = 0.108 dB

Peak SAR (extrapolated) = 5.01 W/kg

SAR(1 g) = 3.86 mW/g; SAR(10 g) = 2.86 mW/g

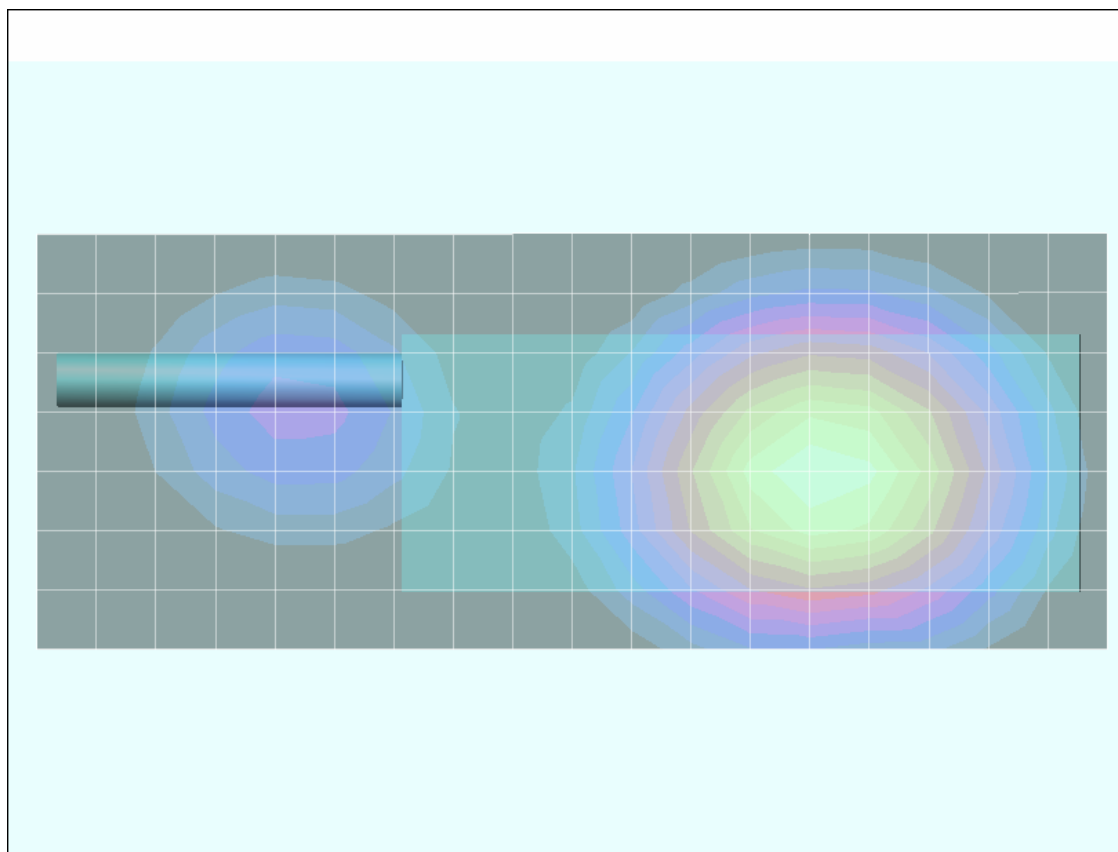

Z-Axis Scan

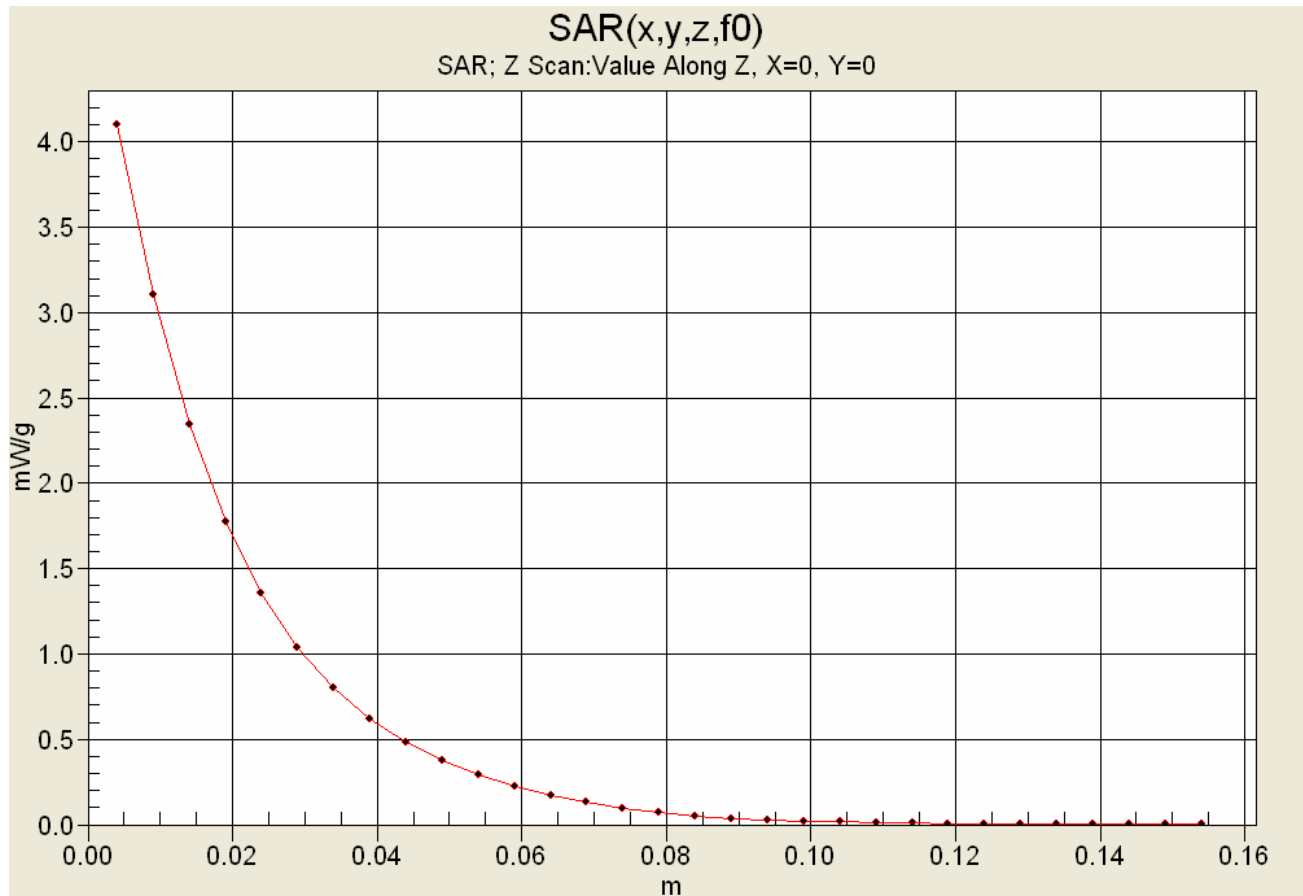

Date Tested: 08/04/2005

Face-Held SAR - 815.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2) SAR Comparison - Scan Radio (Model No.: MAHROS0051)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0051); Serial: N/A

Ambient Temp: 24.0 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.62 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL815 ($\sigma = 0.90$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.4 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 4.80 W/kg

SAR(1 g) = 3.72 mW/g; SAR(10 g) = 2.76 mW/g

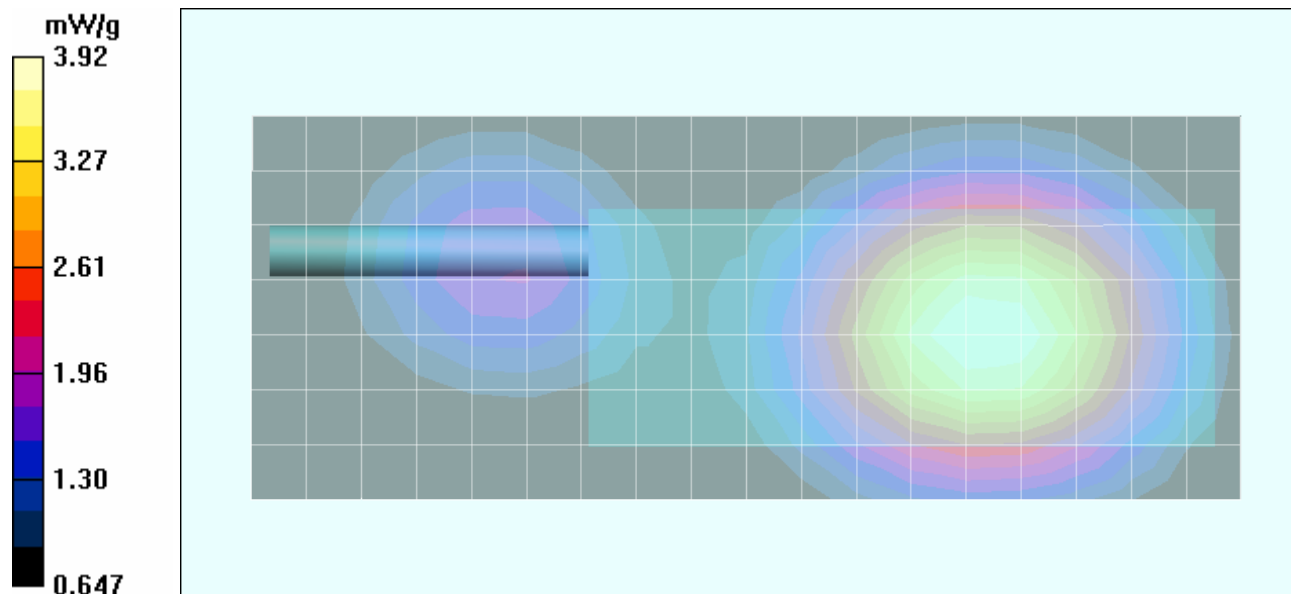

Date Tested: 08/04/2005

Face-Held SAR - 815.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2) SAR Comparison - Select Radio (Model No.: MAHROS0052)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No: MAHROS0052); Serial: N/A

Ambient Temp: 24.0 °C; Fluid Temp: 23.4 °C; Barometric Pressure: 101.8 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.69 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL815 ($\sigma = 0.90$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 37.9 V/m; Power Drift = 0.153 dB

Peak SAR (extrapolated) = 4.87 W/kg

SAR(1 g) = 3.79 mW/g; SAR(10 g) = 2.82 mW/g

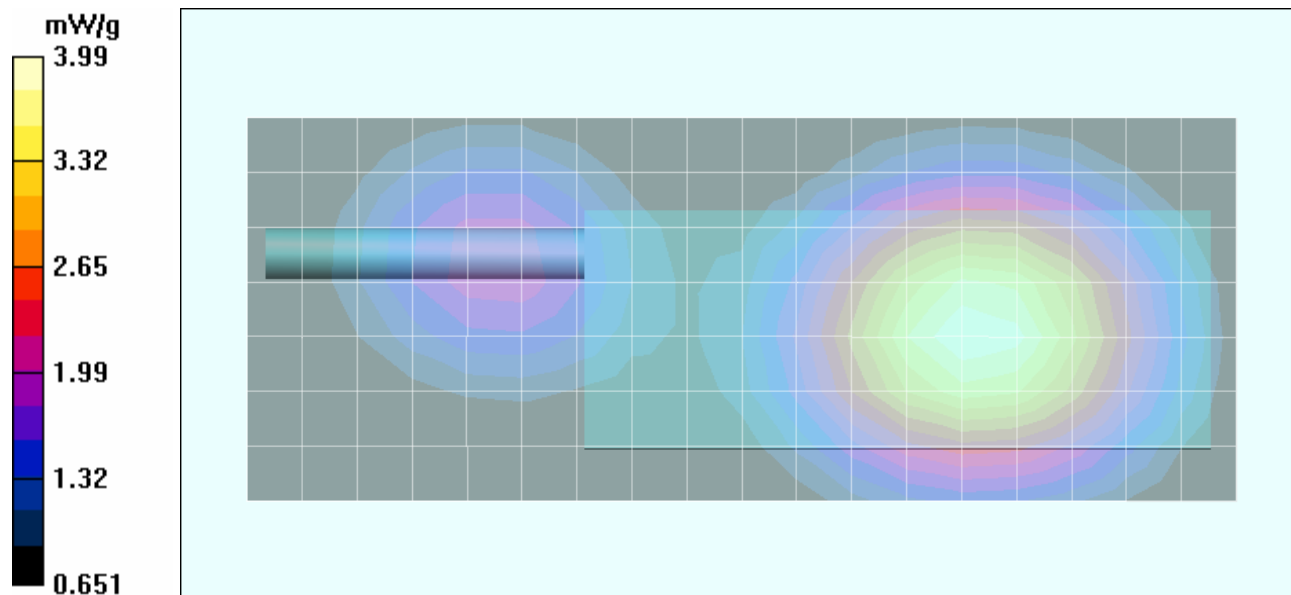

Z-Axis Scan

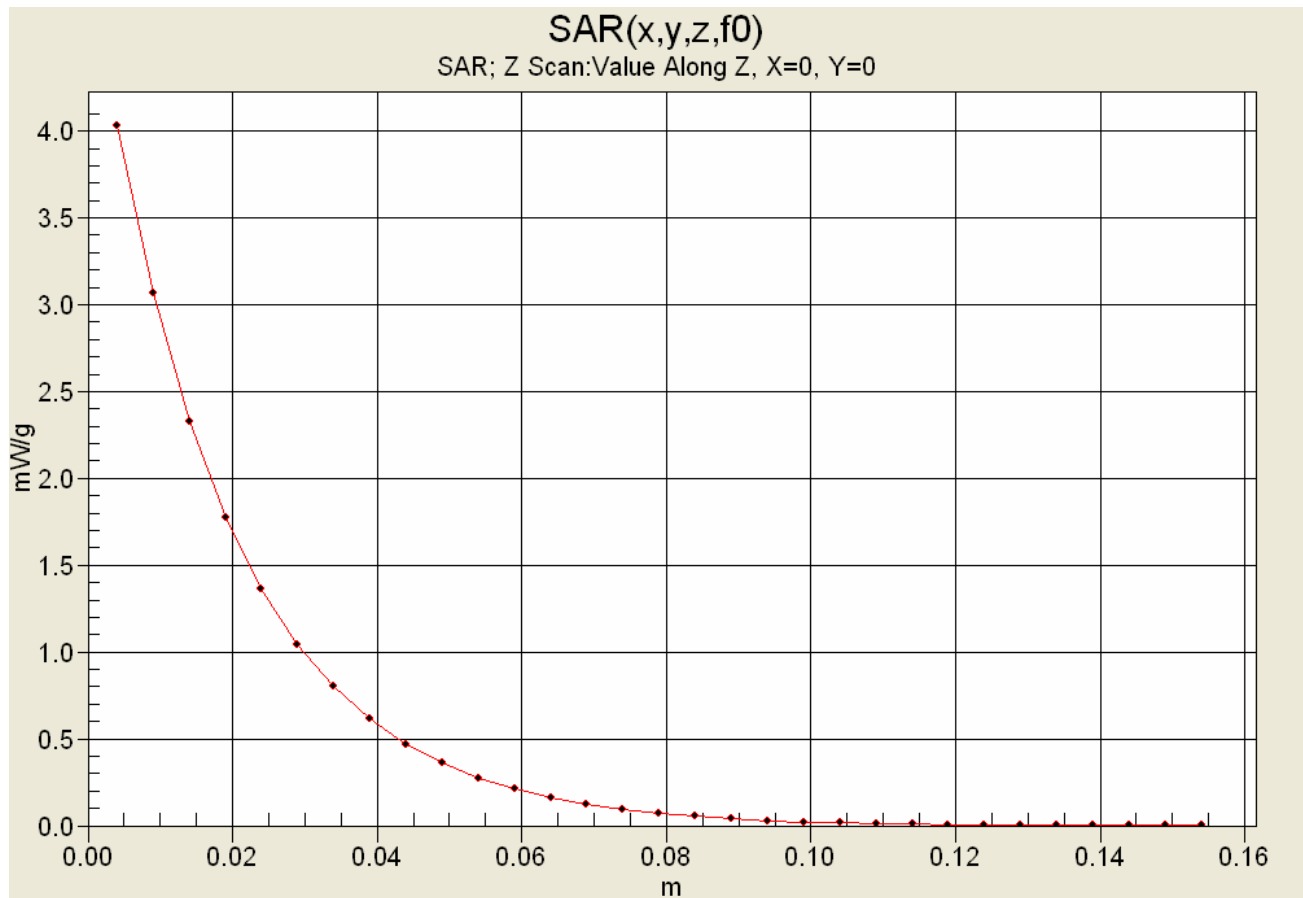

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.58 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 40.1 V/m; Power Drift = 0.233 dB

Peak SAR (extrapolated) = 4.47 W/kg

SAR(1 g) = 3.45 mW/g; SAR(10 g) = 2.56 mW/g

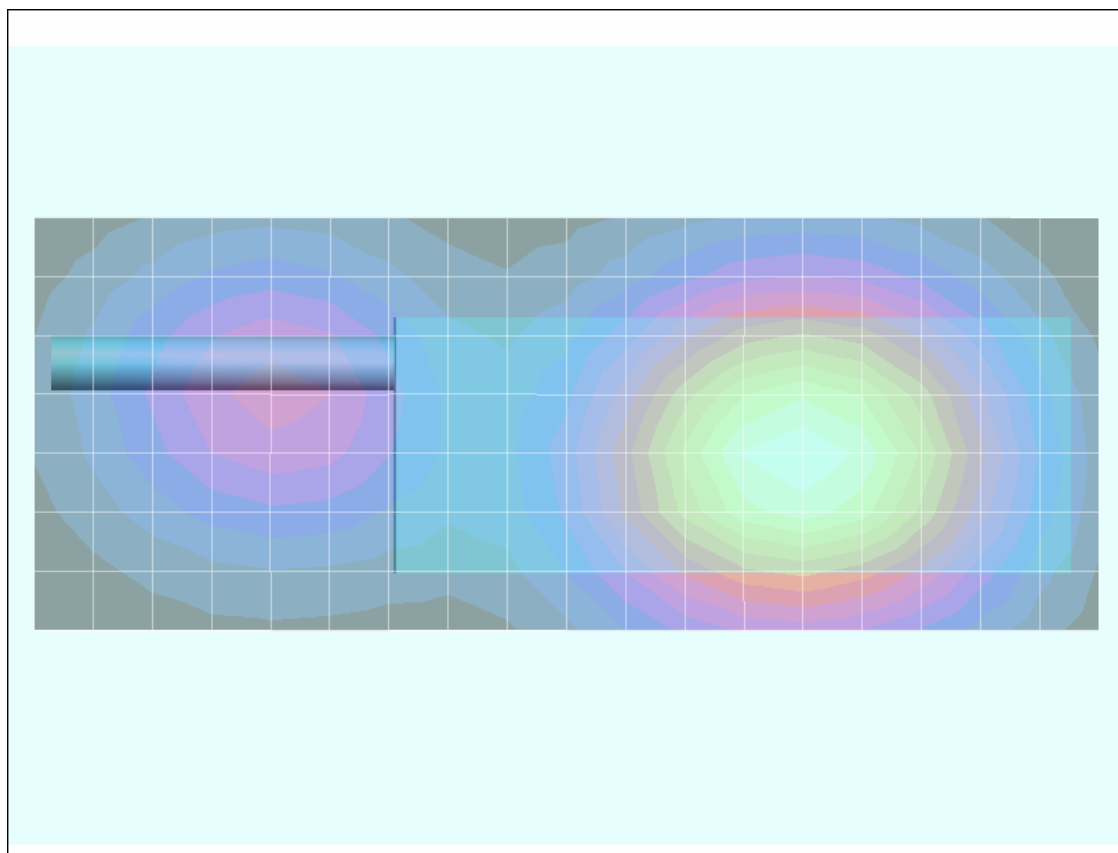

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.82 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.3 mW/g

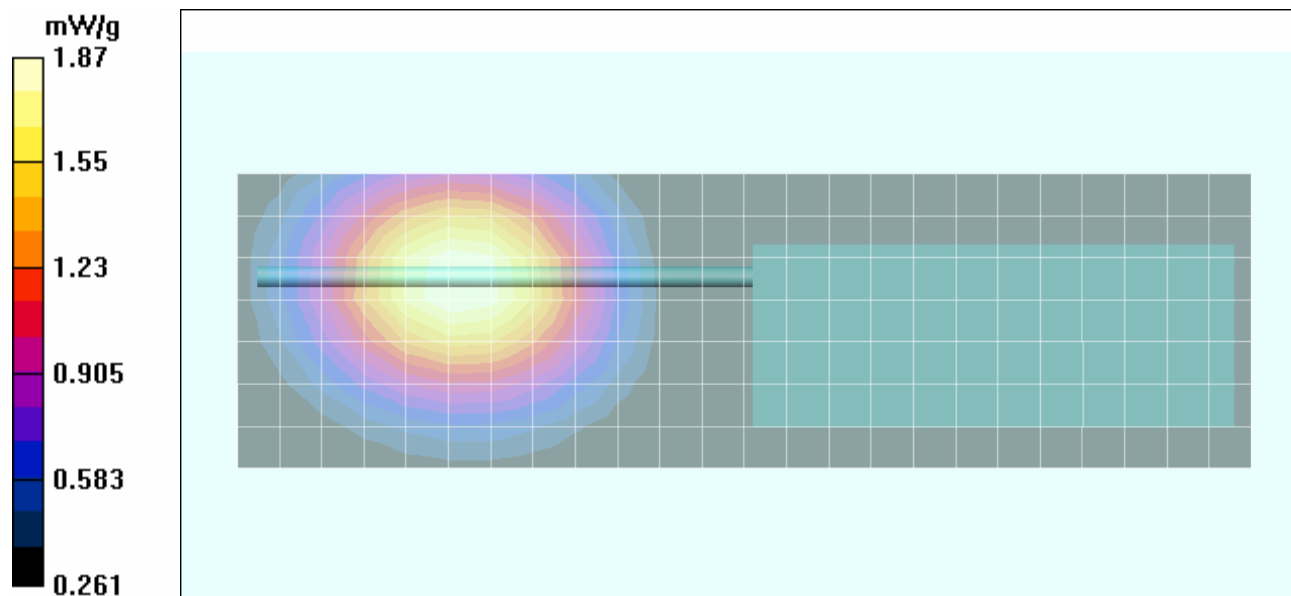

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.83 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.0297 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.31 mW/g

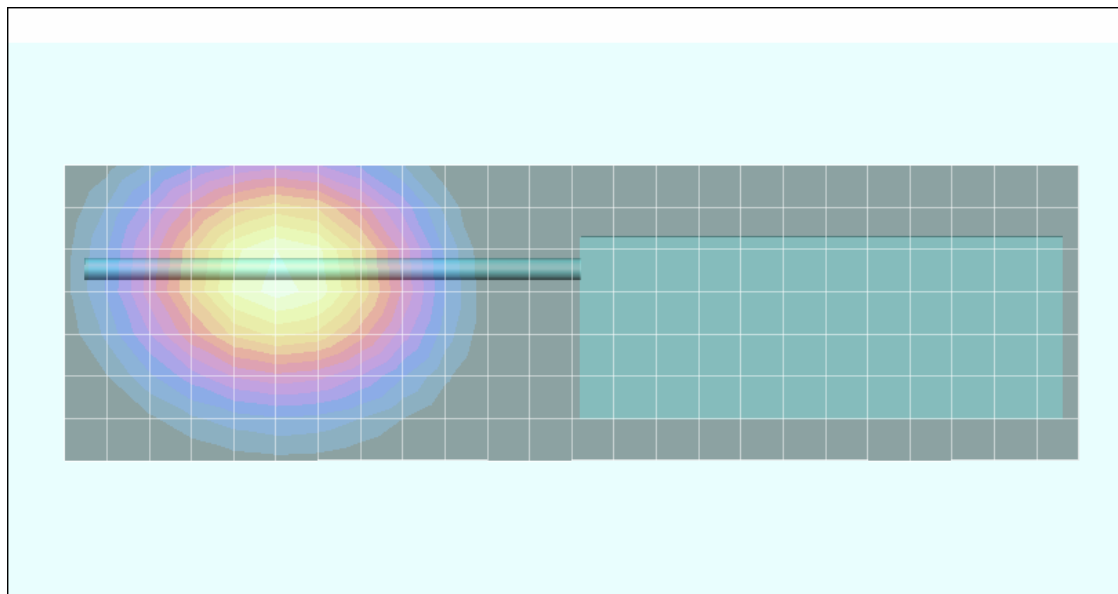

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.82 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.44 V/m; Power Drift = -0.132 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 1.66 mW/g; SAR(10 g) = 1.22 mW/g

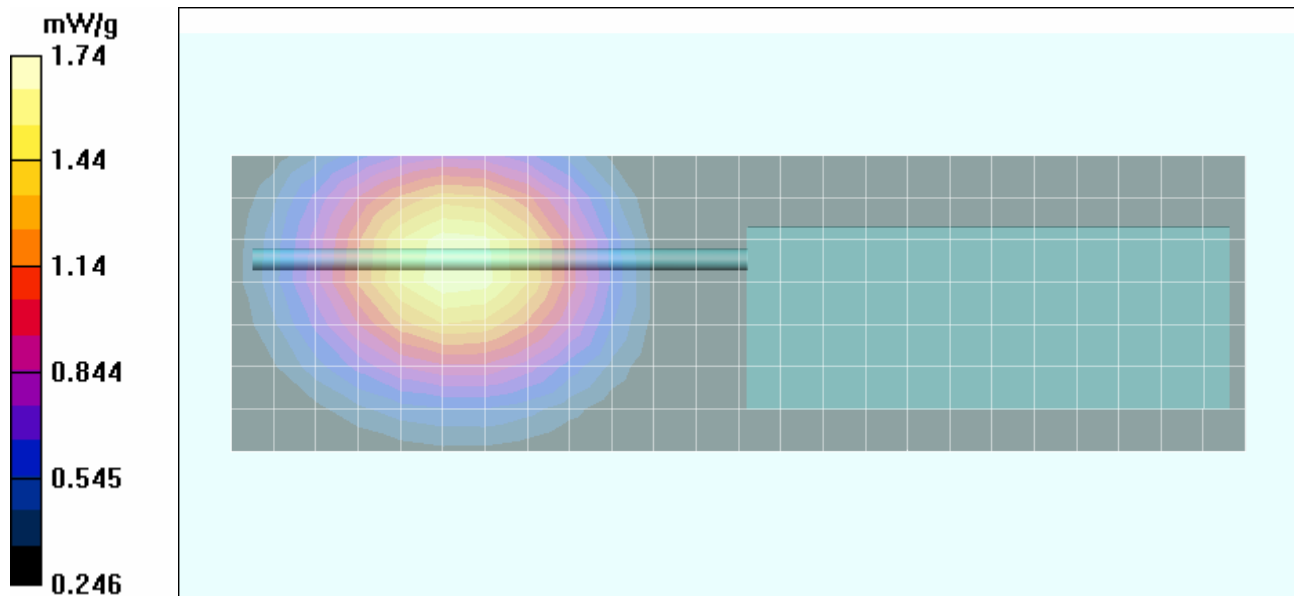

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.78 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.34 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 2.02 mW/g; SAR(10 g) = 1.48 mW/g

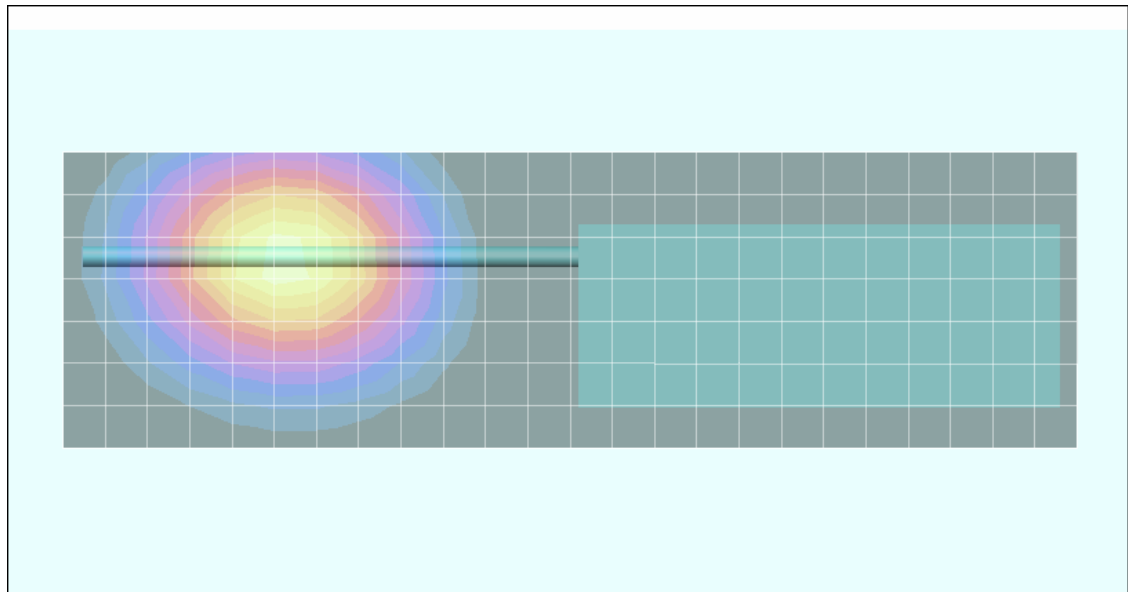

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.76 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 40.0 V/m; Power Drift = 0.0704 dB

Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 2.79 mW/g; SAR(10 g) = 2.04 mW/g

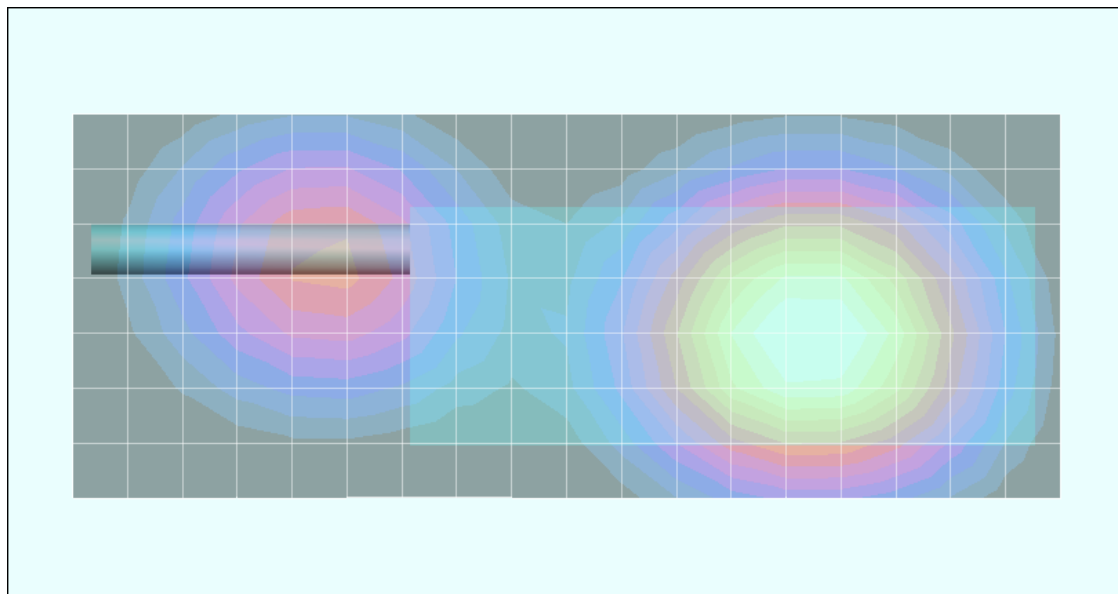

Z-Axis Scan

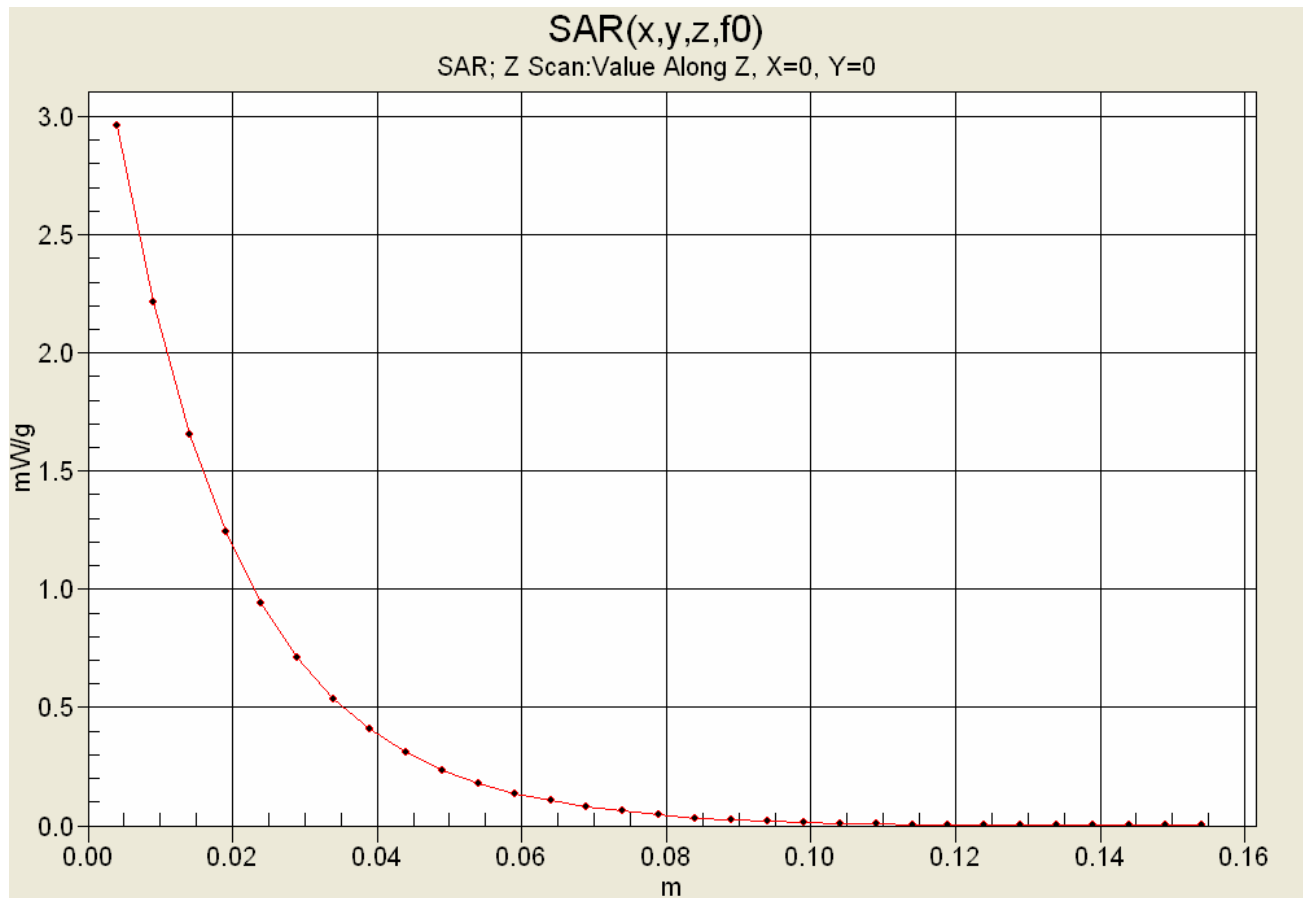

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.88 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 40.5 V/m; Power Drift = 0.00887 dB

Peak SAR (extrapolated) = 3.55 W/kg

SAR(1 g) = 2.72 mW/g; SAR(10 g) = 2 mW/g

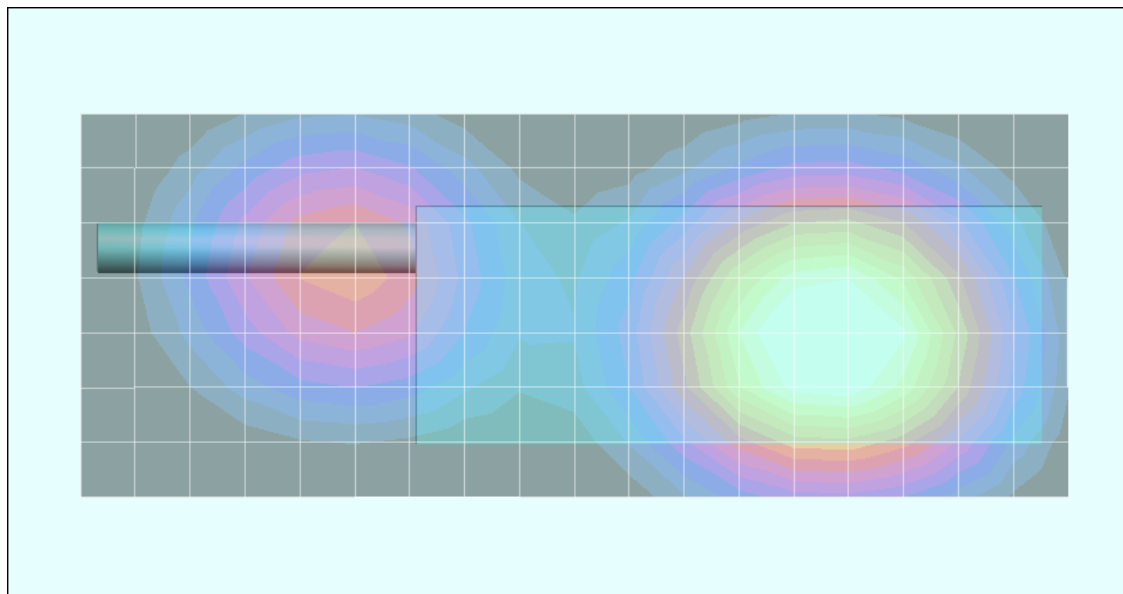

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.81 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL860 ($\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 39.5 V/m; Power Drift = 0.177 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.73 mW/g; SAR(10 g) = 2.01 mW/g


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 39.5 V/m; Power Drift = 0.177 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.29 mW/g

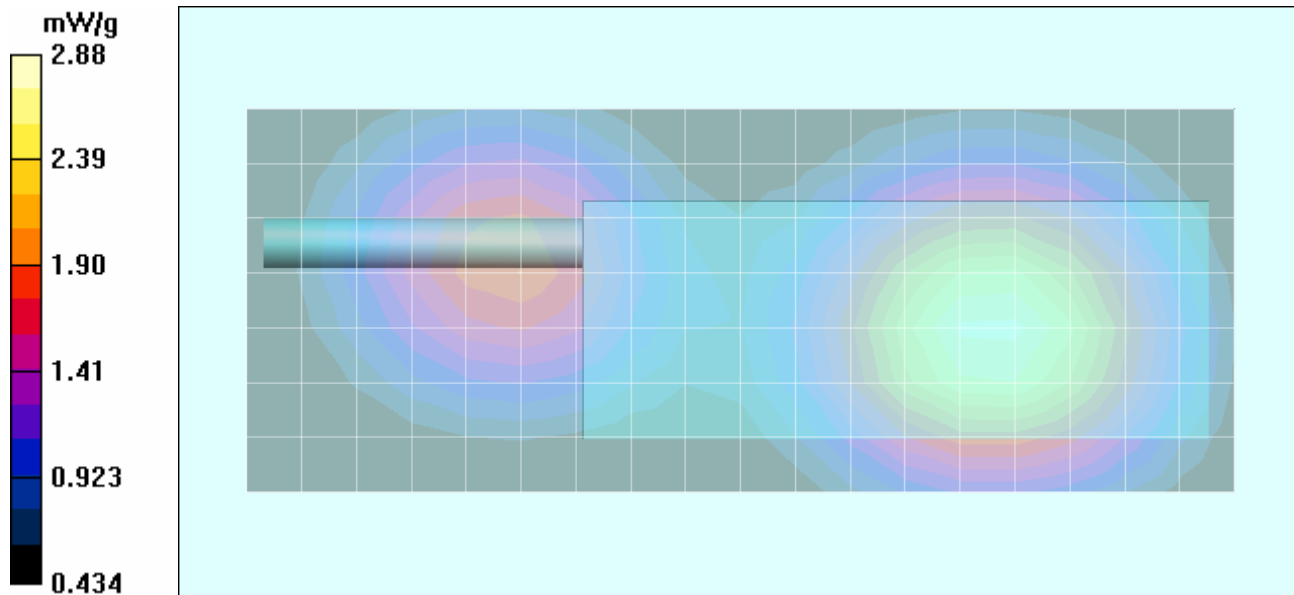

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.79 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 41.4 V/m; Power Drift = 0.0862 dB

Peak SAR (extrapolated) = 3.55 W/kg

SAR(1 g) = 2.72 mW/g; SAR(10 g) = 2 mW/g

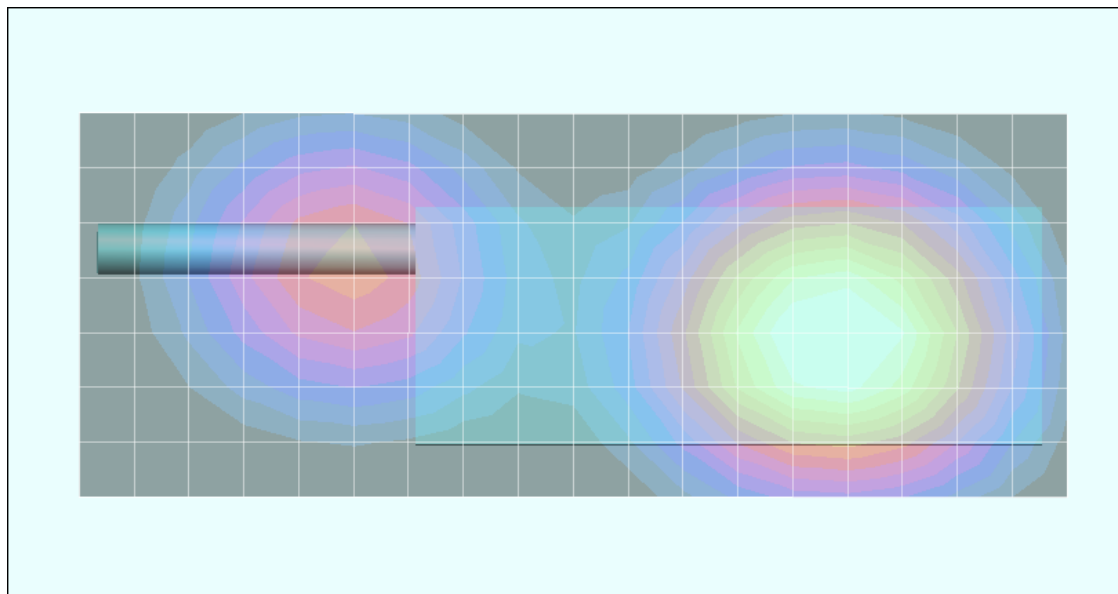

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Face-Held with Speaker-Microphone Antenna (P/N: KRY 101 1617/184)

Date Tested: 07/21/2005

Face-Held SAR - 766.9875 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Ambient Temp: 23.5 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.13 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: HSL767 ($\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x18x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = 0.0953 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.861 mW/g

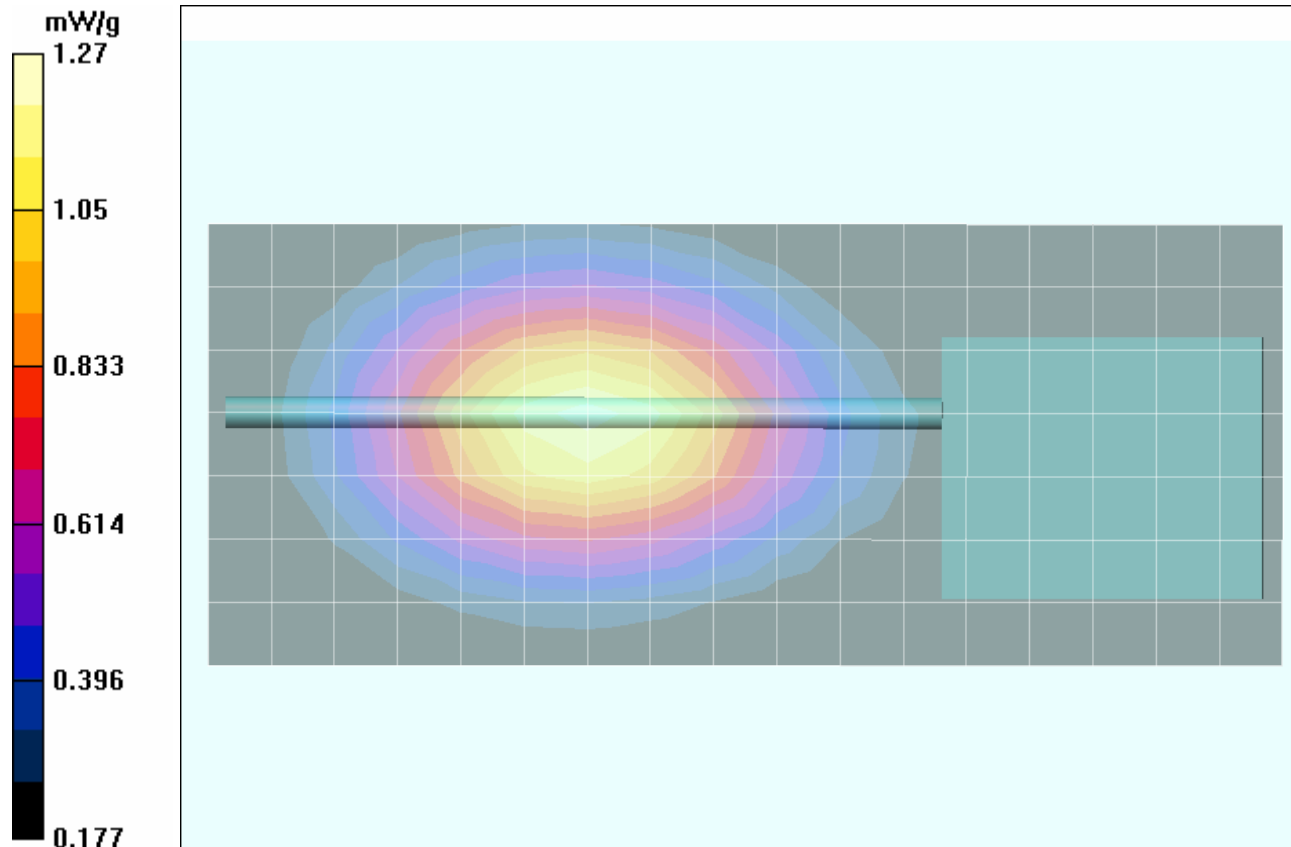

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/21/2005

Face-Held SAR - 766.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Ambient Temp: 23.5 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.09 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: HSL767 ($\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x12x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 52.8 V/m; Power Drift = 0.0949 dB

Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 2.29 mW/g; SAR(10 g) = 1.6 mW/g

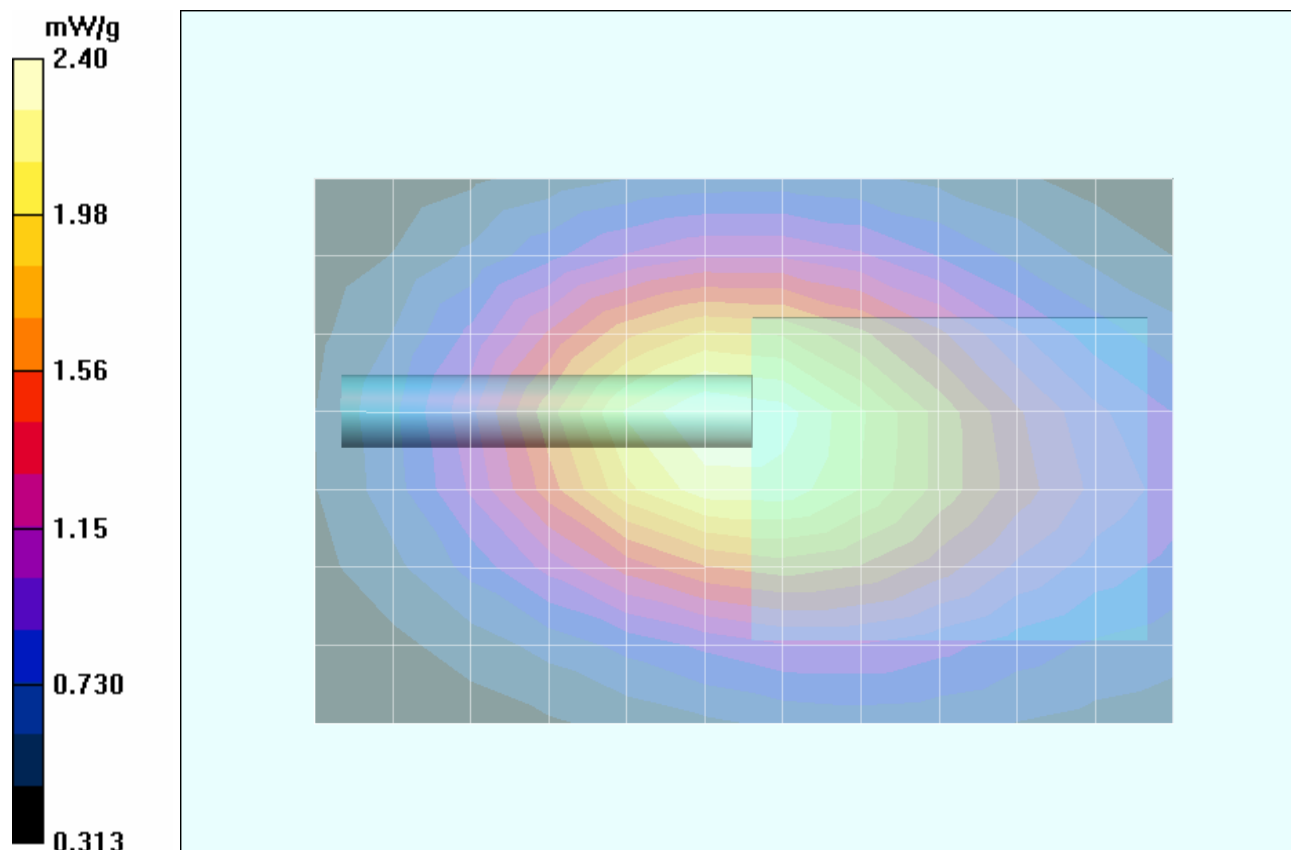

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						90 of 336

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.96 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x18x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = 0.115 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.18 mW/g; SAR(10 g) = 1.54 mW/g

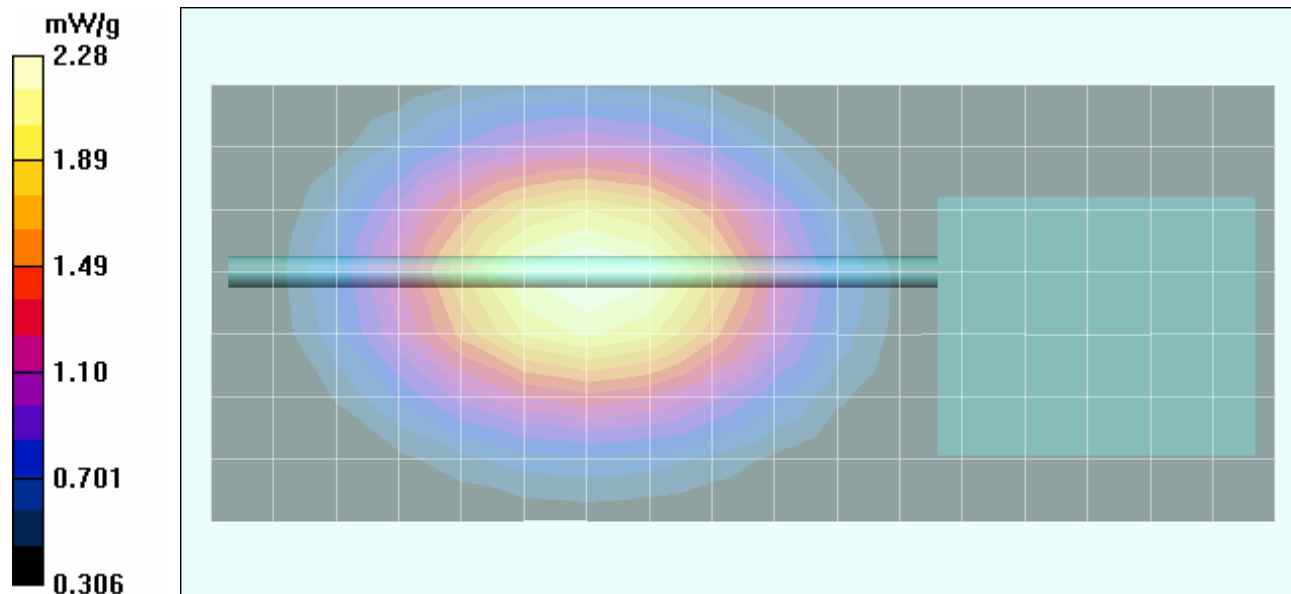

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.93 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: HSL797 ($\sigma = 0.87 \text{ mho/m}$; $\epsilon_r = 41.0$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x12x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 53.5 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 3.90 W/kg

SAR(1 g) = 2.53 mW/g; SAR(10 g) = 1.78 mW/g

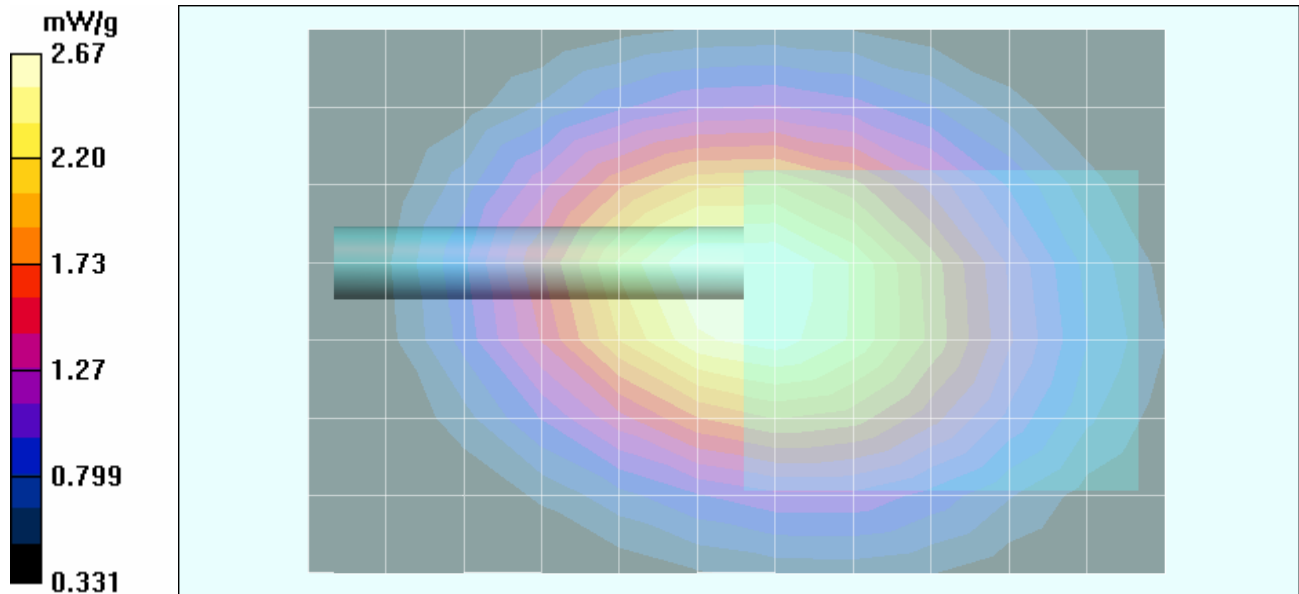

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
RF Output Power: 34.75 dBm (Conducted)
Frequency: 815.0000 MHz; Duty Cycle: 1:1
NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)
Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)



- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x18x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 15.3 V/m; Power Drift = 0.140 dB
Peak SAR (extrapolated) = 4.11 W/kg
SAR(1 g) = 3.10 mW/g; SAR(10 g) = 2.25 mW/g

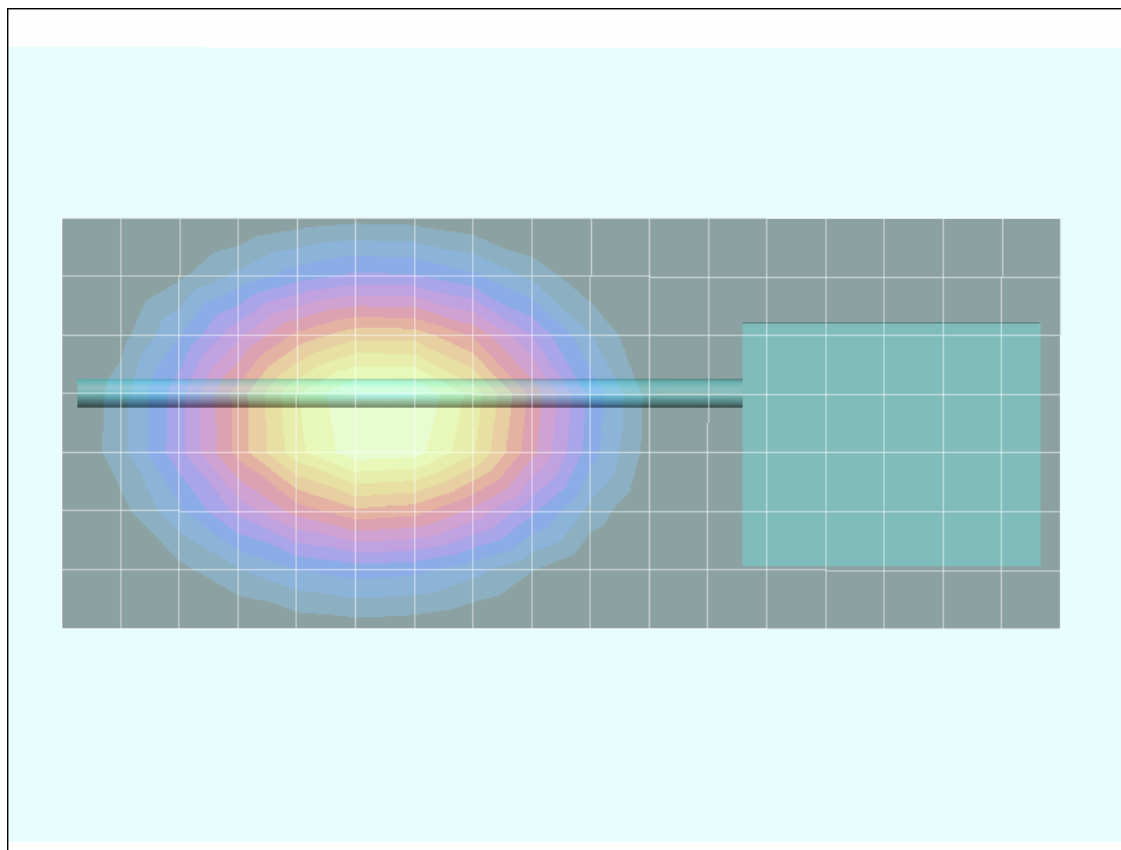

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
RF Output Power: 34.62 dBm (Conducted)
Frequency: 815.0000 MHz; Duty Cycle: 1:1
NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)
Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)



- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x12x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 59.3 V/m; Power Drift = 0.104 dB
Peak SAR (extrapolated) = 3.89 W/kg
SAR(1 g) = 2.89 mW/g; SAR(10 g) = 2.07 mW/g

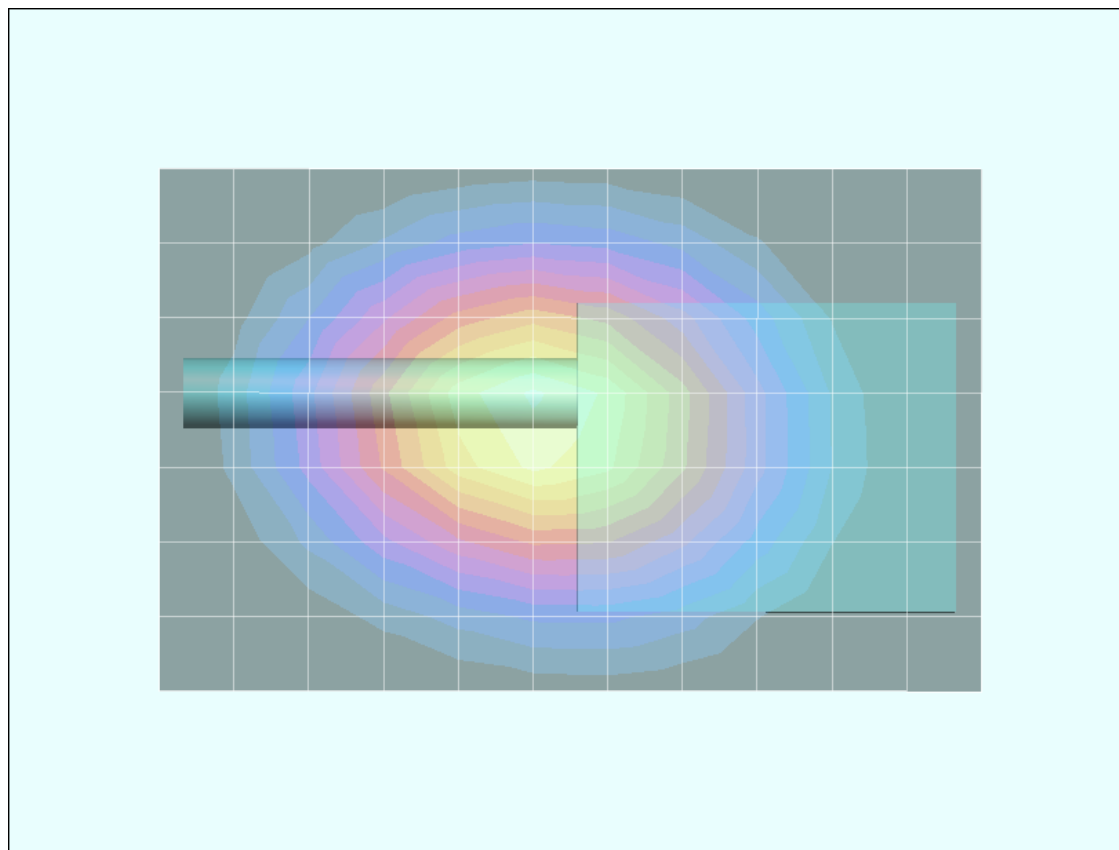

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM
RF Output Power: 34.86 dBm (Conducted)
Frequency: 860.0000 MHz; Duty Cycle: 1:1
NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)
Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x18x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 9.82 V/m; Power Drift = 0.0301 dB
Peak SAR (extrapolated) = 3.30 W/kg
SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.77 mW/g

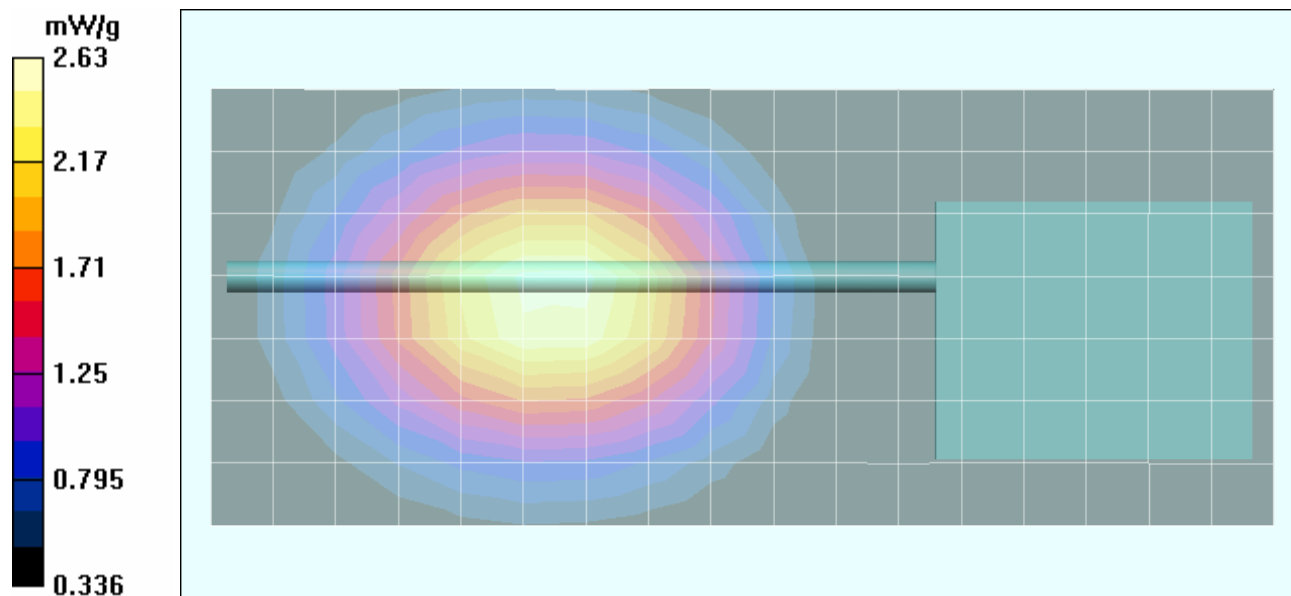

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.90 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x12x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 54.7 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 3.48 W/kg

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.81 mW/g

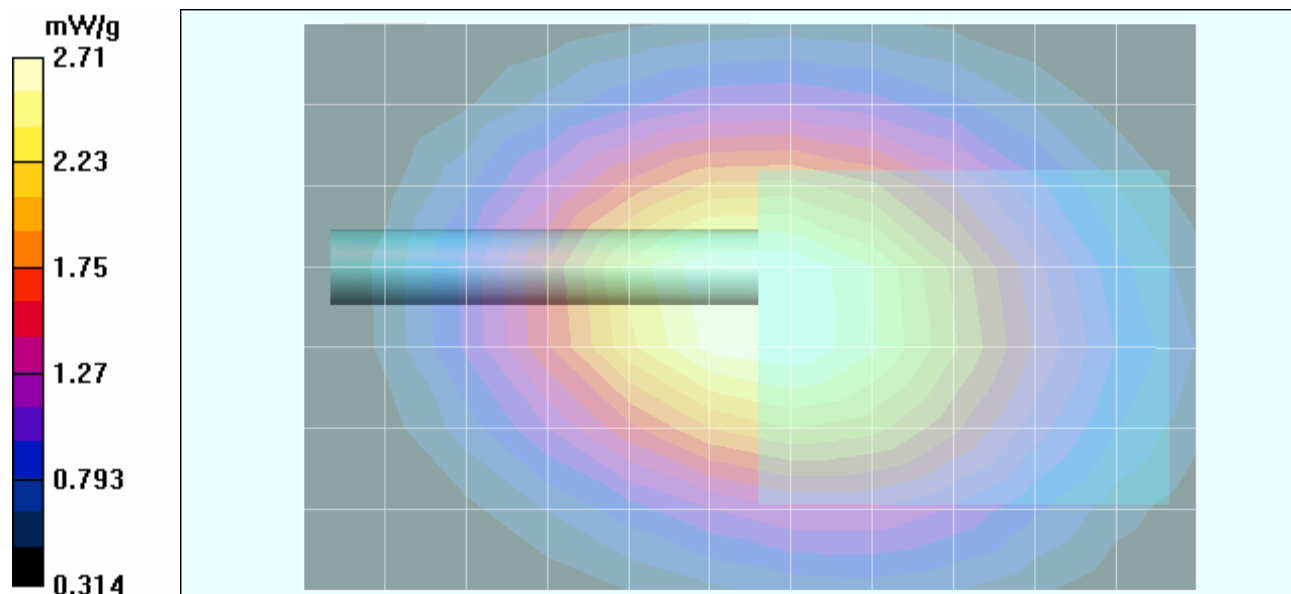

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						96 of 336

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Face-Held with Ruggedized Speaker-Microphone Antenna (P/N: KRY 101 1617/384)

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						97 of 336

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/21/2005

Face-Held SAR - 766.9875 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Ambient Temp: 23.5 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
RF Output Power: 34.12 dBm (Conducted)
Frequency: 766.9875 MHz; Duty Cycle: 1:1
NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)
Medium: HSL767 ($\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$)



- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 14.4 V/m; Power Drift = 0.0732 dB
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.786 mW/g; SAR(10 g) = 0.563 mW/g

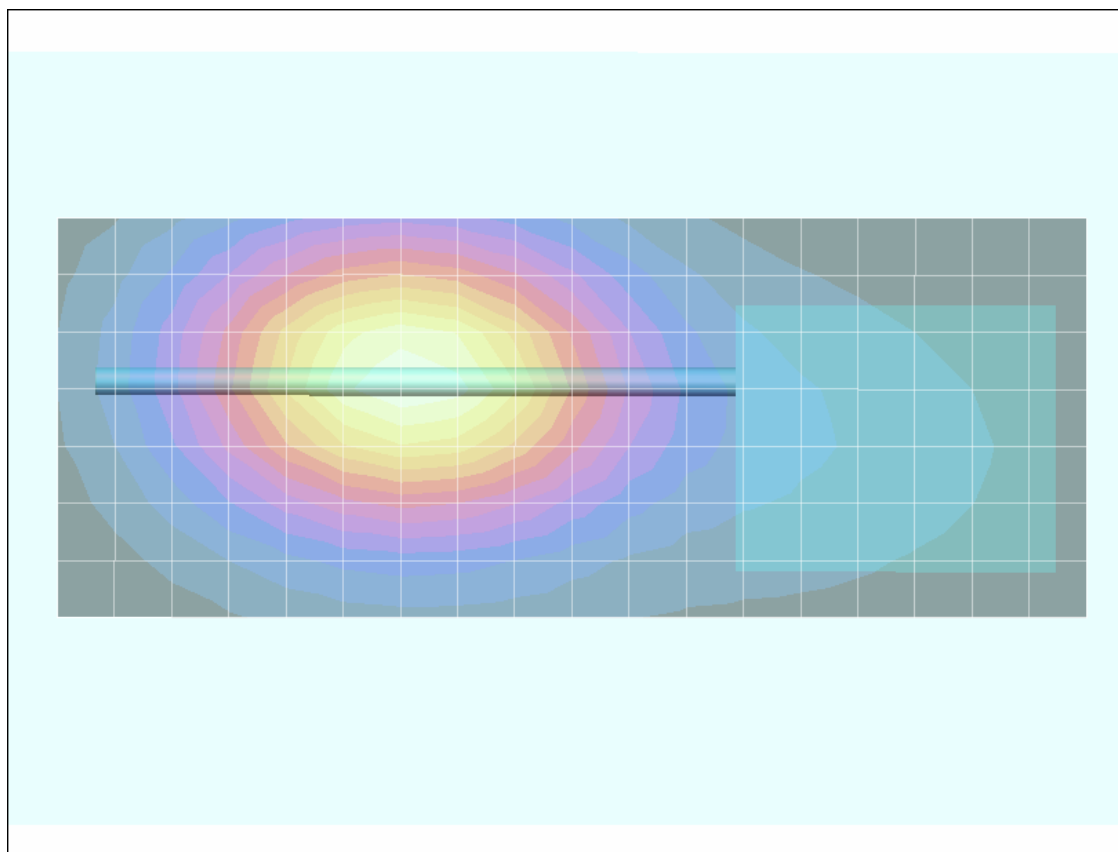

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						98 of 336

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/21/2005

Face-Held SAR - 766.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Ambient Temp: 23.5 °C; Fluid Temp: 22.2 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.26 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: HSL767 ($\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 45.1 V/m; Power Drift = 0.166 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.73 mW/g; SAR(10 g) = 1.23 mW/g

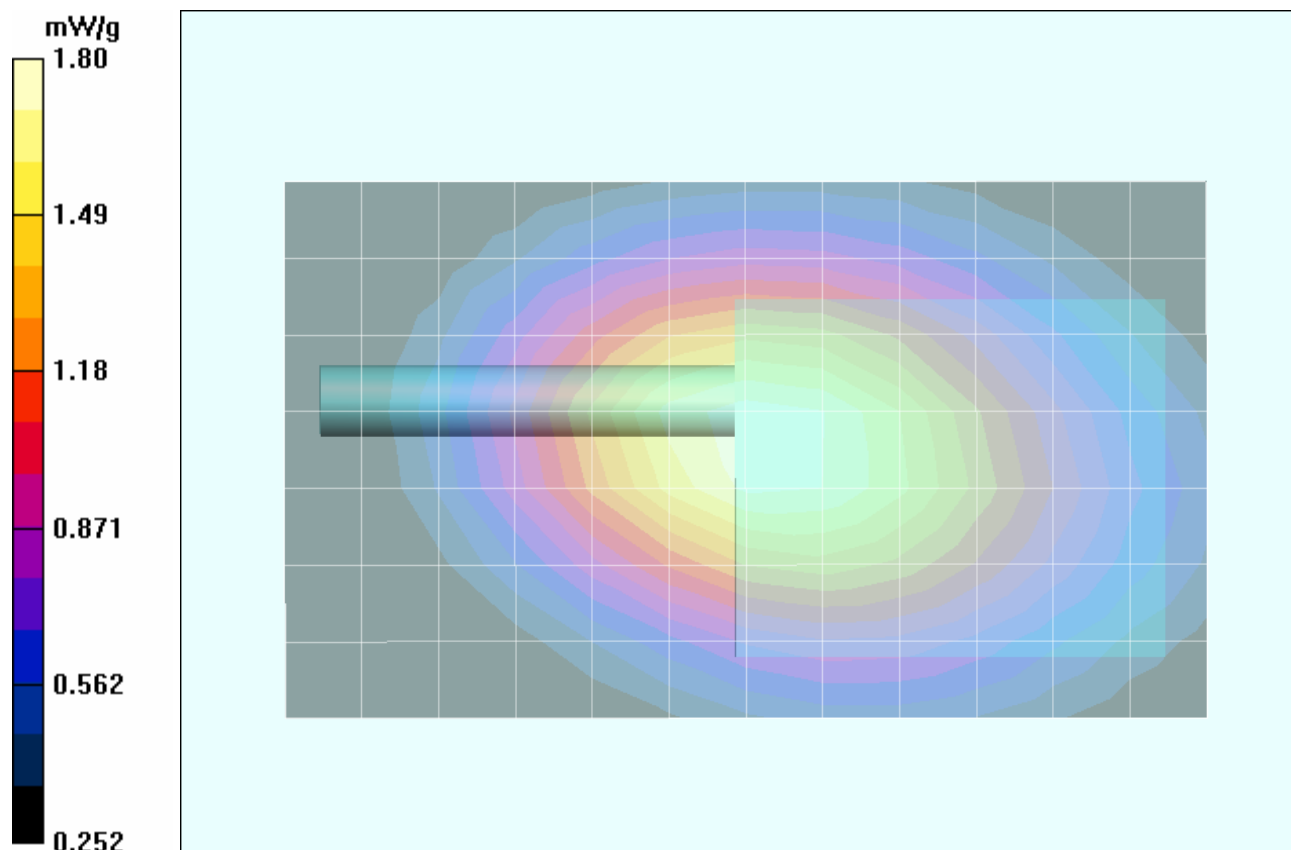

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						99 of 336

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 33.98 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = 0.117 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.84 mW/g; SAR(10 g) = 1.31 mW/g

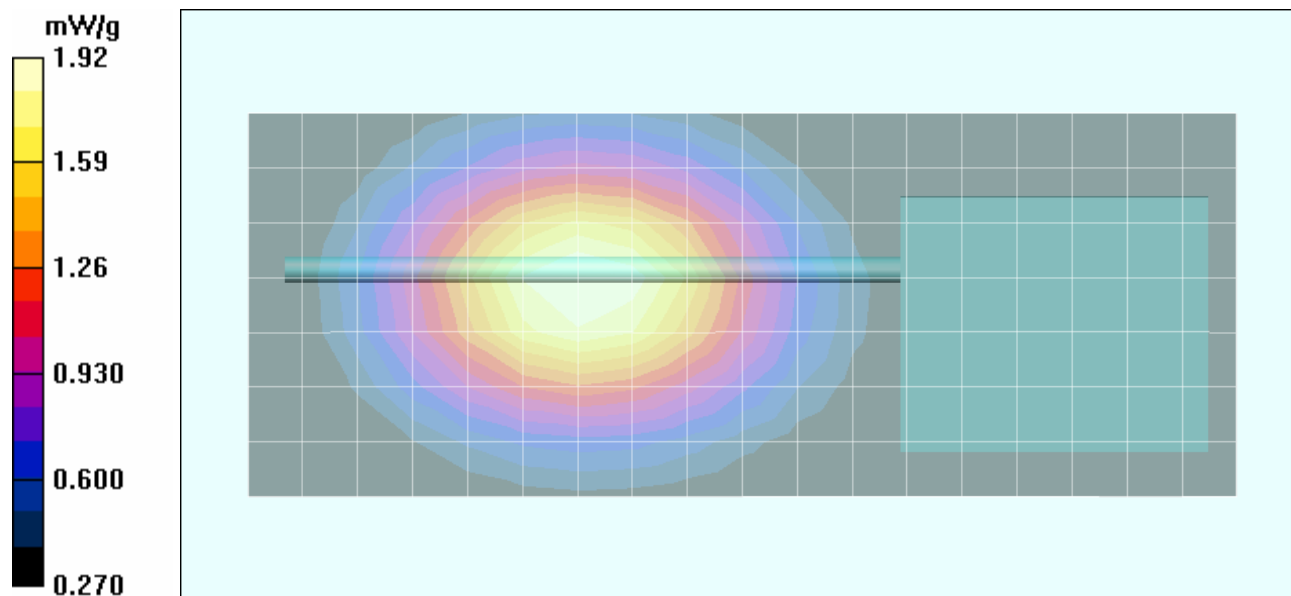

Date Tested: 07/20/2005

Face-Held SAR - 796.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Ambient Temp: 25.7 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
 RF Output Power: 33.95 dBm (Conducted)
 Frequency: 796.9875 MHz; Duty Cycle: 1:1
 NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)
 Medium: HSL797 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.0$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(6.8, 6.8, 6.8); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 46.4 V/m; Power Drift = 0.136 dB
 Peak SAR (extrapolated) = 2.94 W/kg
SAR(1 g) = 1.95 mW/g; SAR(10 g) = 1.39 mW/g

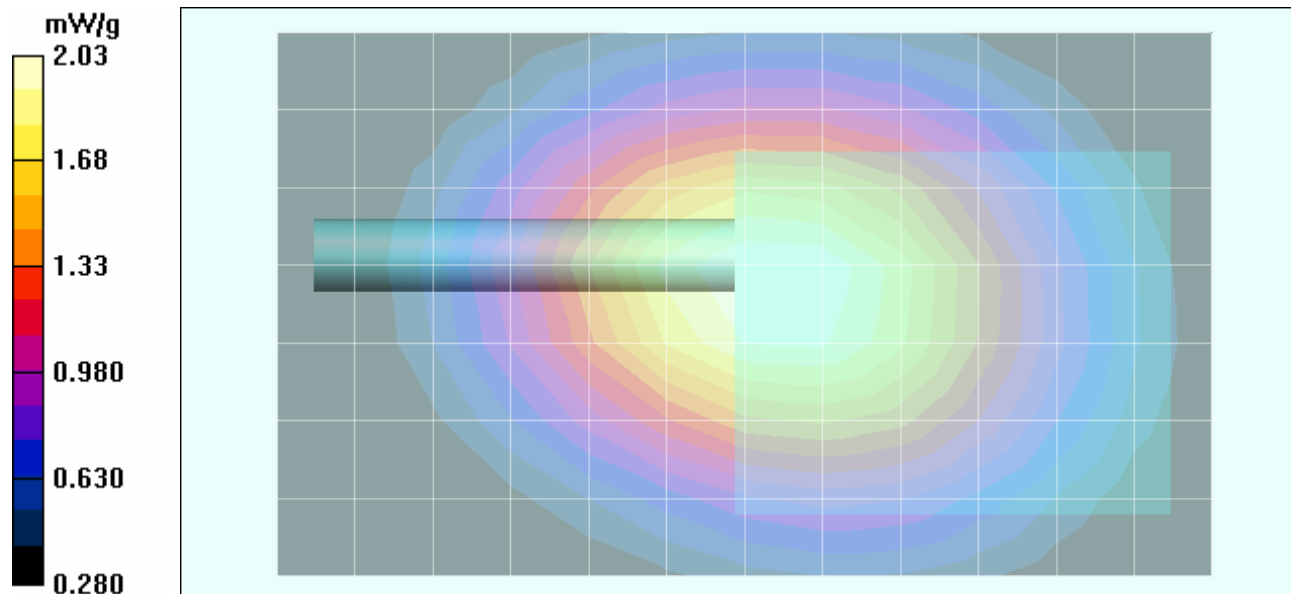

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
RF Output Power: 34.77 dBm (Conducted)
Frequency: 815.0000 MHz; Duty Cycle: 1:1
NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)
Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)



- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 14.6 V/m; Power Drift = -0.152 dB
Peak SAR (extrapolated) = 2.92 W/kg
SAR(1 g) = 2.22 mW/g; SAR(10 g) = 1.63 mW/g

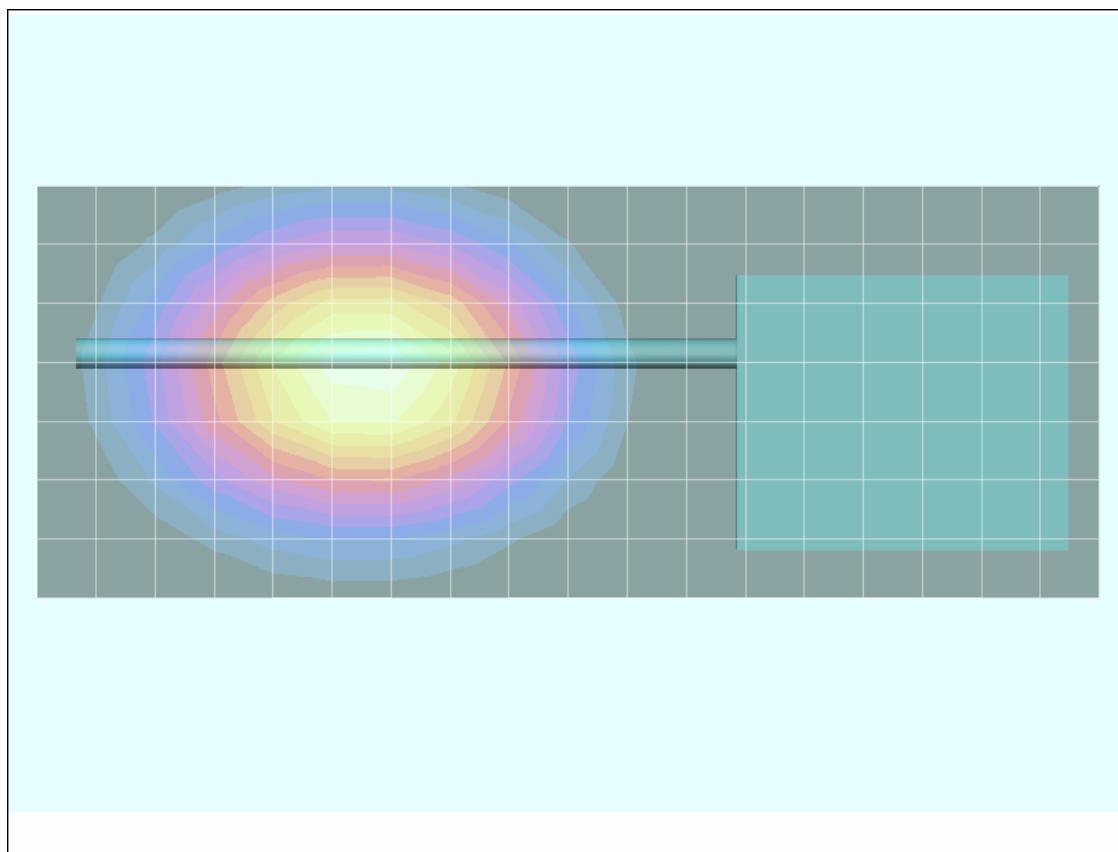

Date Tested: 07/20/2005

Face-Held SAR - 815.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Ambient Temp: 24.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.68 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: HSL815 ($\sigma = 0.87$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm



Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 49.1 V/m; Power Drift = 0.0772 dB

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.90 mW/g; SAR(10 g) = 1.37 mW/g

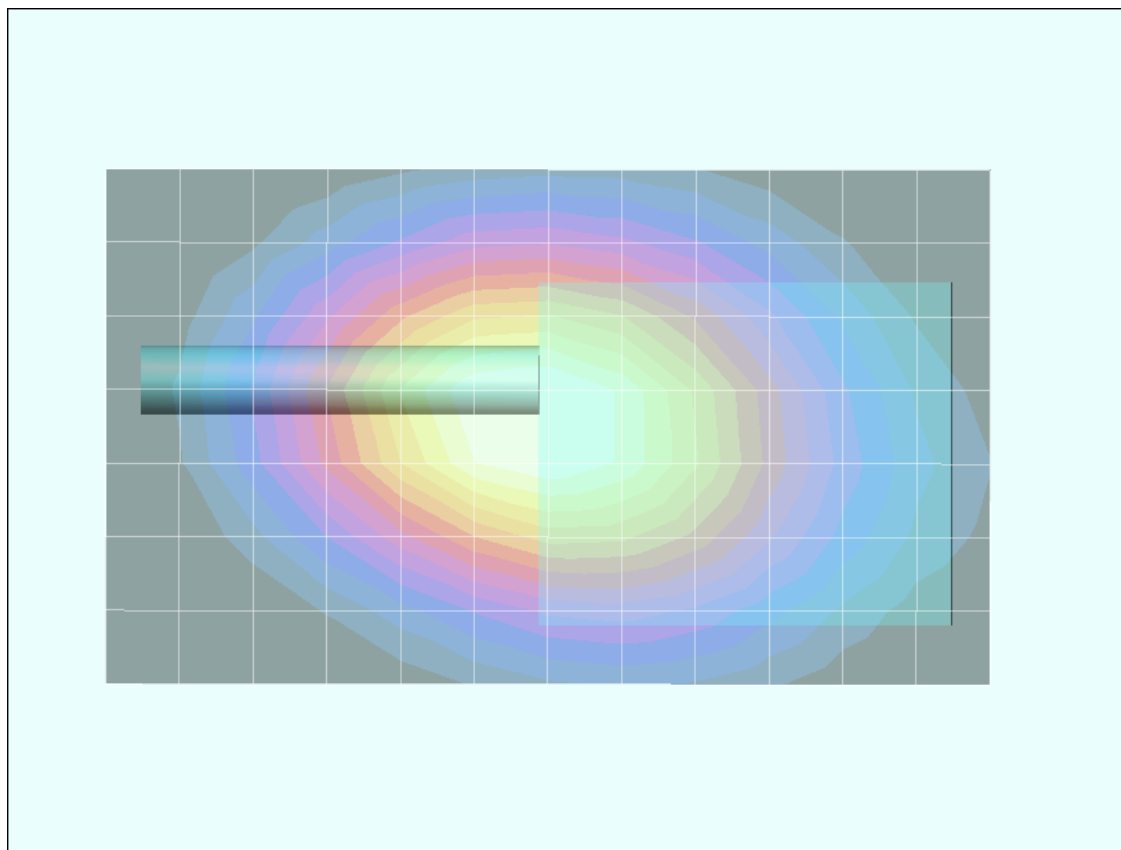

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.88 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.0688 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 1.60 mW/g; SAR(10 g) = 1.17 mW/g

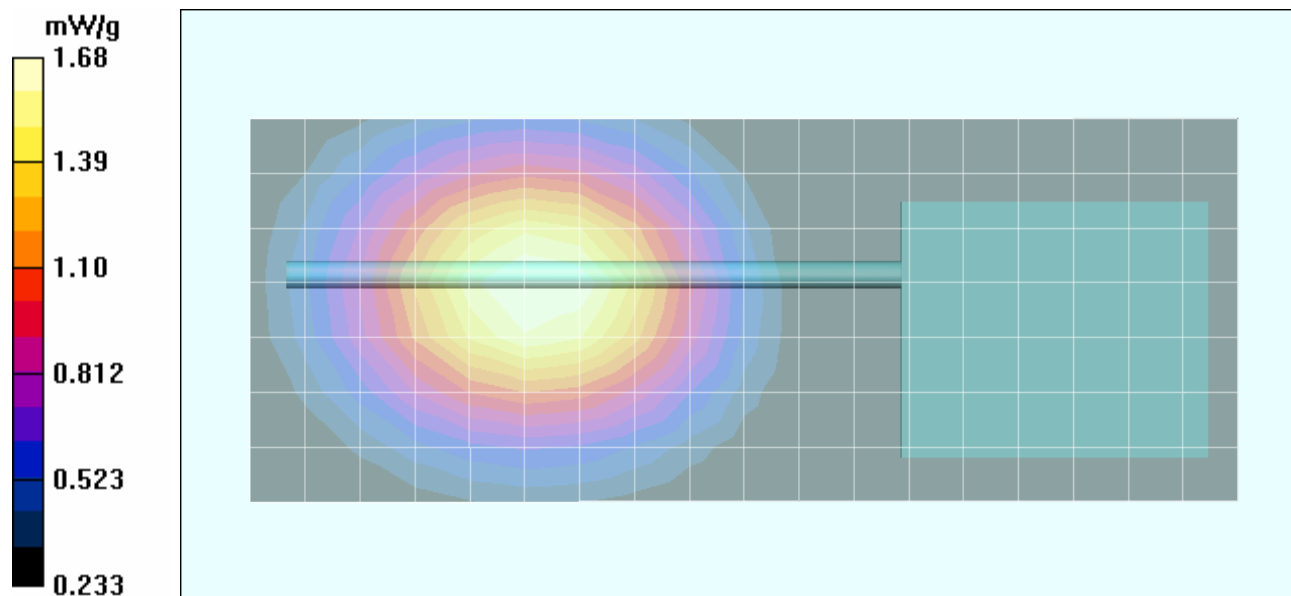

Date Tested: 07/19/2005

Face-Held SAR - 860.0000 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Ambient Temp: 24.2 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.83 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: HSL860 ($\sigma = 0.92$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.47, 6.47, 6.47); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 42.6 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.31 mW/g

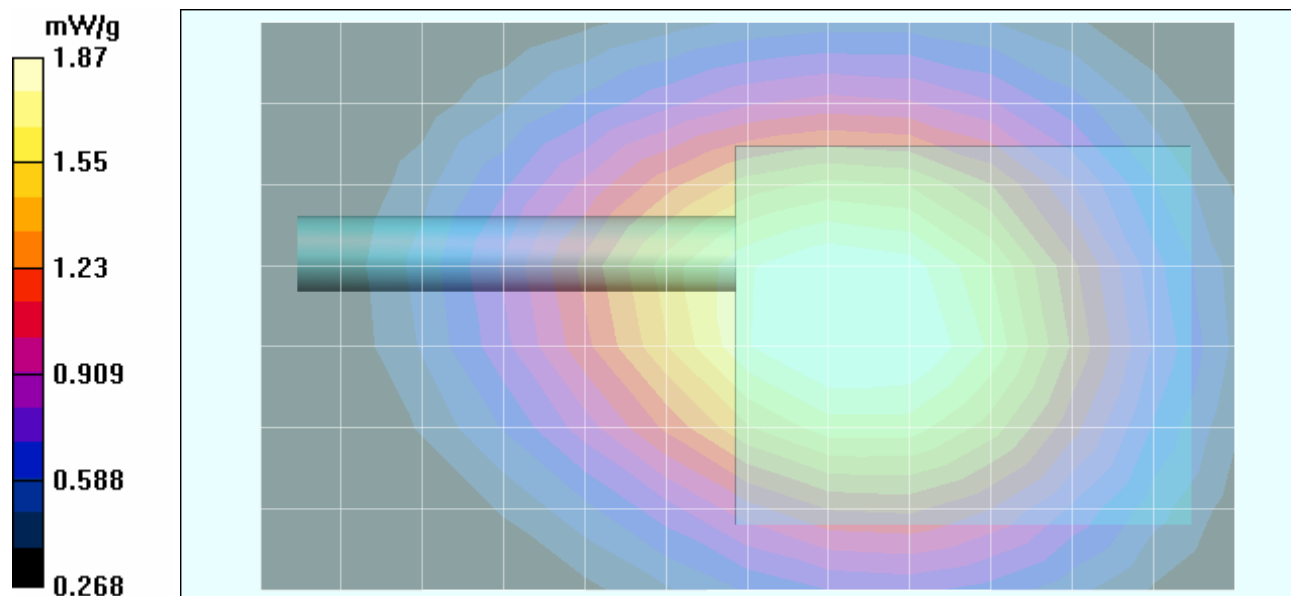

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

BODY-WORN with Speaker-Microphone Antenna (P/N: KRY 101 1617/184)

Audio Accessory: Earphone (P/N: OT-V1-10234)

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Earphone (P/N: OT-V1-10234)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.02 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x18x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 2.33 mW/g; SAR(10 g) = 1.61 mW/g

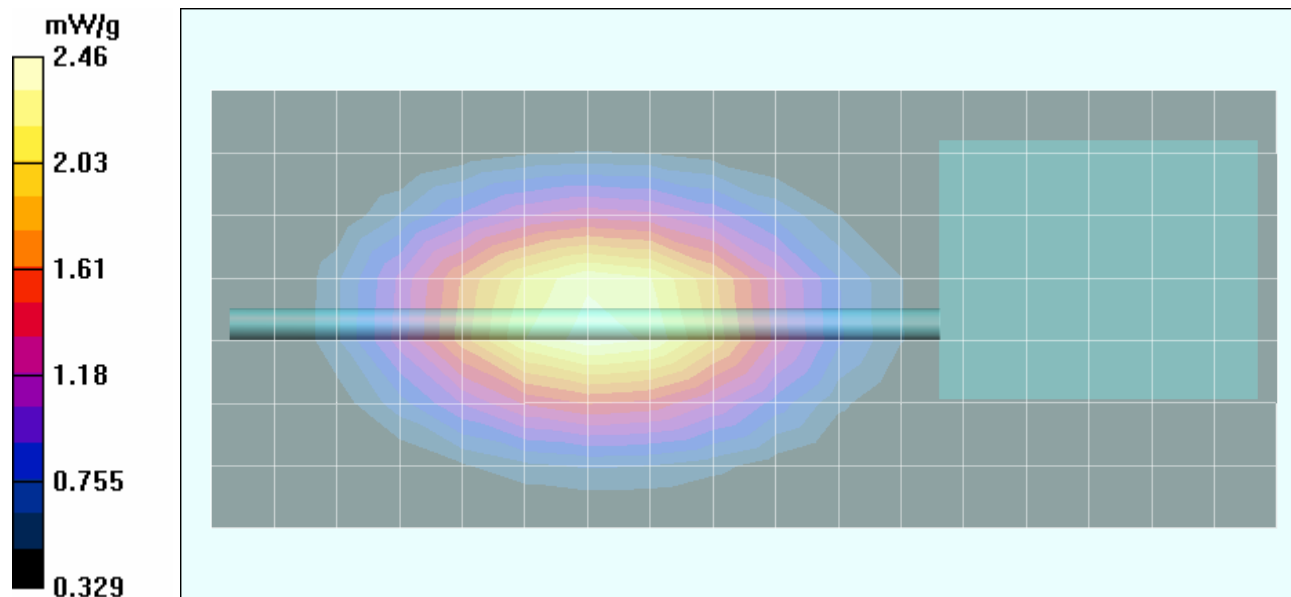

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Earphone (P/N: OT-V1-10234)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.12 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x12x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 76.5 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 9.51 W/kg

SAR(1 g) = 6.12 mW/g; SAR(10 g) = 4.22 mW/g

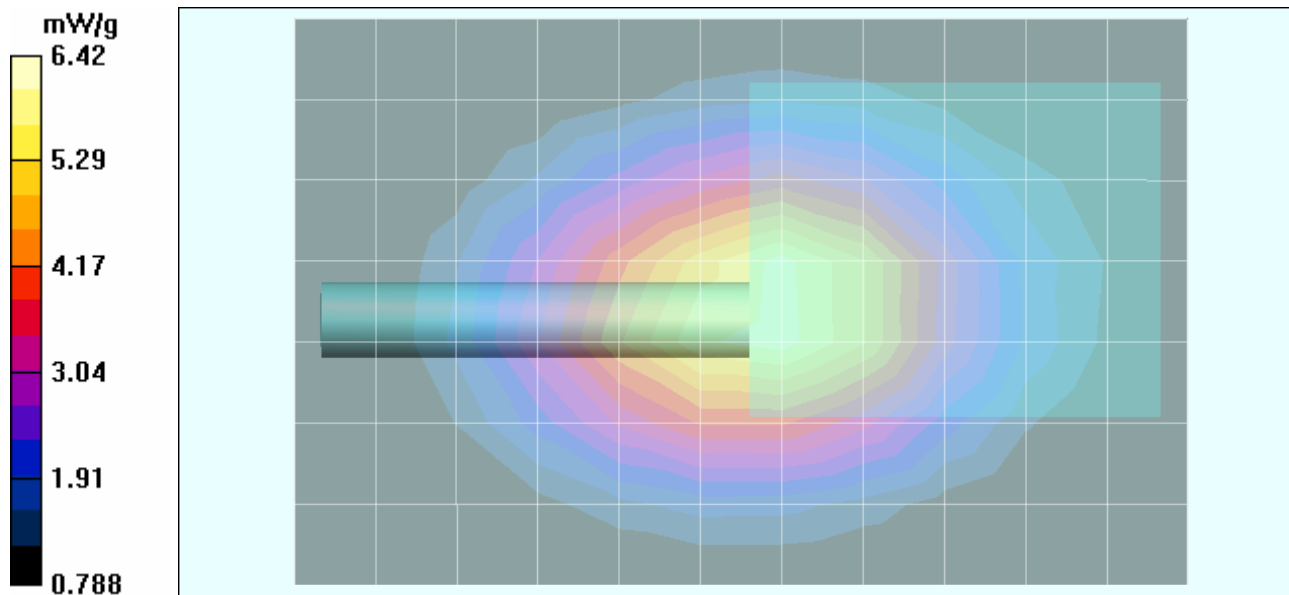

Date Tested: 07/26/2005

Body-Worn SAR - 796.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Earphone (P/N: OT-V1-10234)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.09 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x18x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = 0.144 dB

Peak SAR (extrapolated) = 6.38 W/kg

SAR(1 g) = 4.12 mW/g; SAR(10 g) = 2.84 mW/g

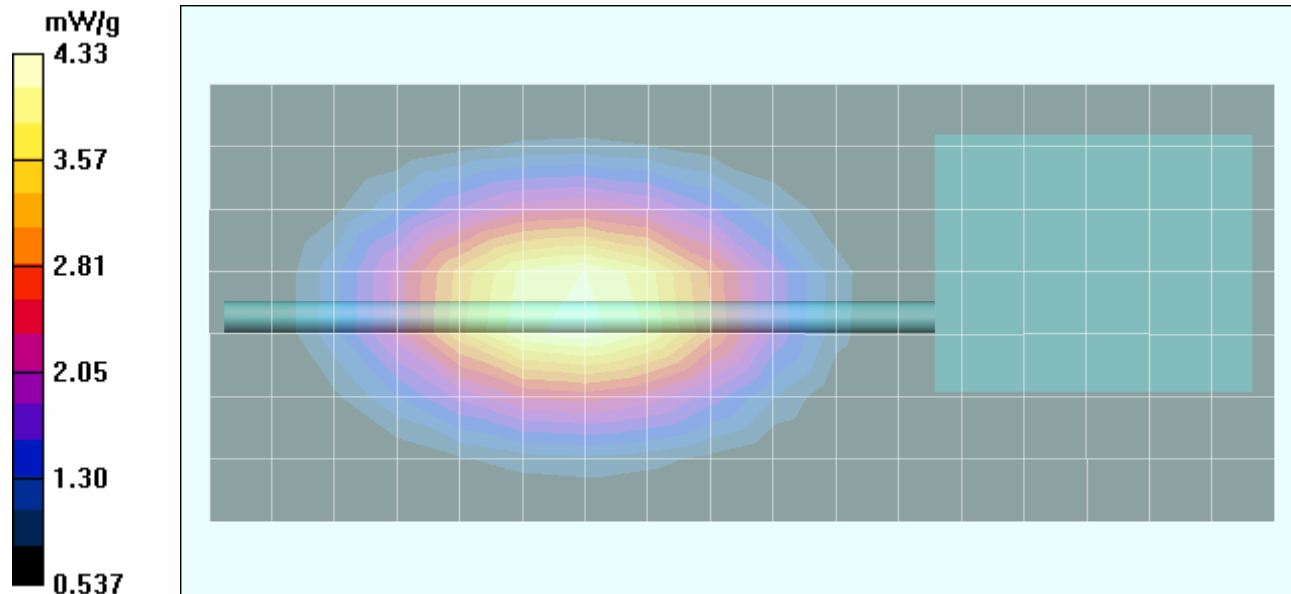

Date Tested: 07/26/2005

Body-Worn SAR - 796.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Earphone (P/N: OT-V1-10234)

Ambient Temp: 25.5 °C; Fluid Temp: 23.3 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM
RF Output Power: 34.13 dBm (Conducted)
Frequency: 796.9875 MHz; Duty Cycle: 1:1
NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)
Medium: M797 ($\sigma = 0.91$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x12x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 76.6 V/m; Power Drift = 0.0948 dB
Peak SAR (extrapolated) = 8.50 W/kg
SAR(1 g) = 5.63 mW/g; SAR(10 g) = 3.91 mW/g

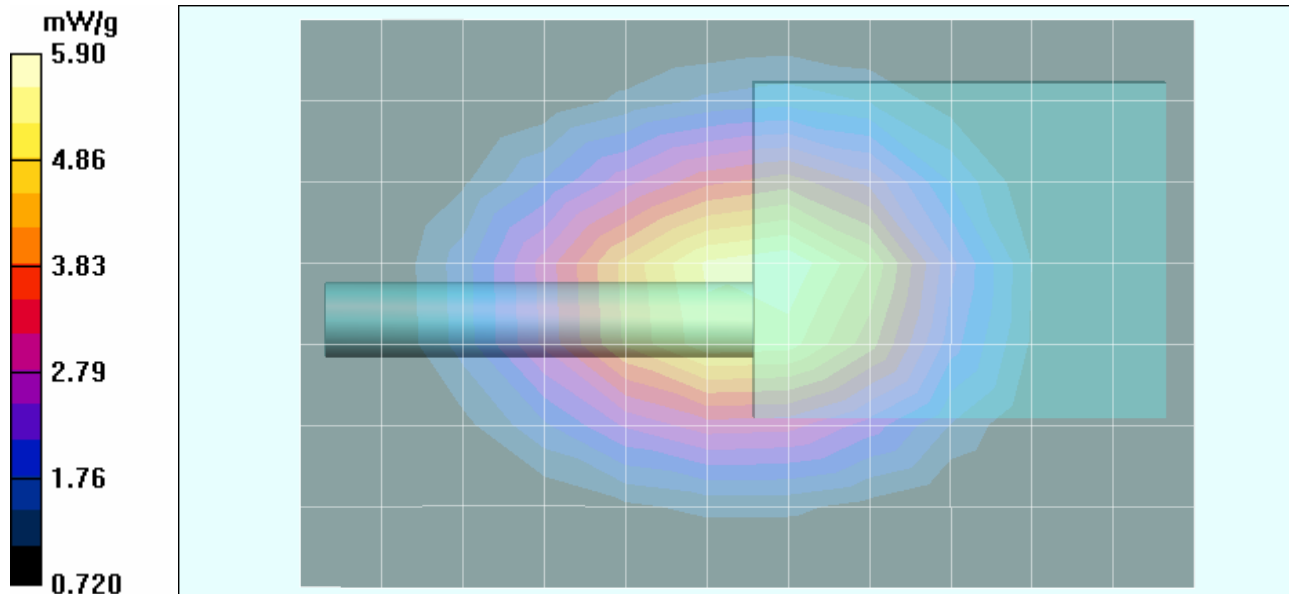

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Earphone (P/N: OT-V1-10234)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.83 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x18x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.8 V/m; Power Drift = -0.0404 dB

Peak SAR (extrapolated) = 6.71 W/kg

SAR(1 g) = 5.14 mW/g; SAR(10 g) = 3.67 mW/g

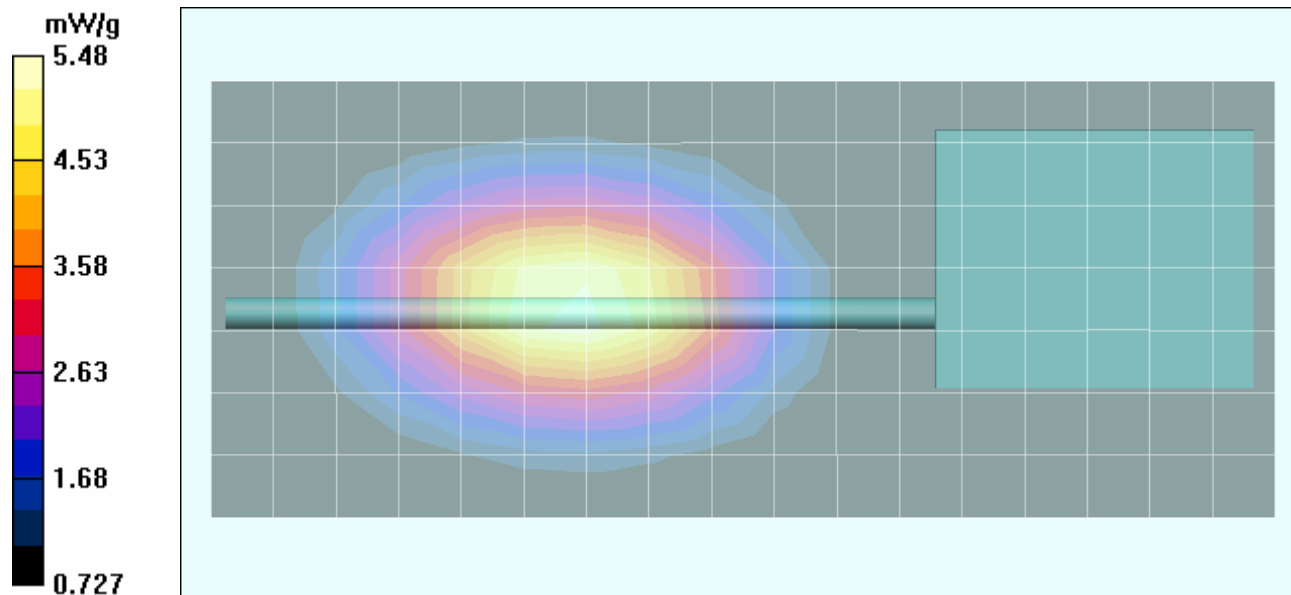

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Earphone (P/N: OT-V1-10234)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM
RF Output Power: 34.81 dBm (Conducted)
Frequency: 815.0000 MHz; Duty Cycle: 1:1
NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)
Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x12x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 79.4 V/m; Power Drift = 0.161 dB
Peak SAR (extrapolated) = 7.69 W/kg
SAR(1 g) = 6.02 mW/g; SAR(10 g) = 4.33 mW/g

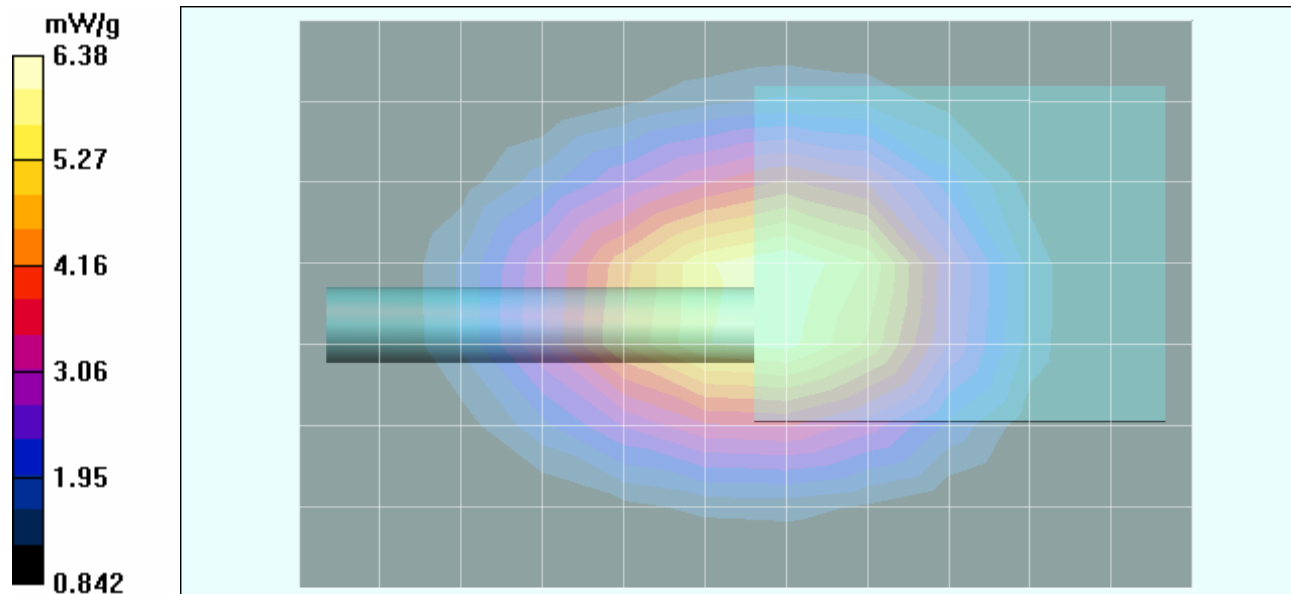

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Earphone (P/N: OT-V1-10234)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.89 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M860 ($\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x18x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.0536 dB

Peak SAR (extrapolated) = 7.33 W/kg

SAR(1 g) = 5.52 mW/g; SAR(10 g) = 3.87 mW/g

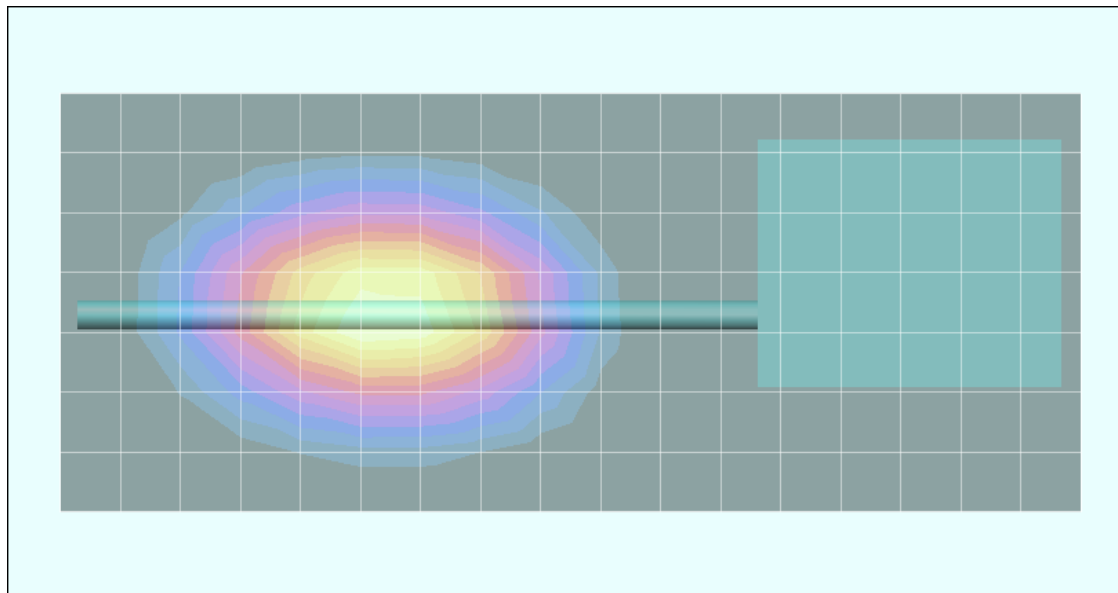

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version (P/N: KRY 101 1617/184)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Earphone (P/N: OT-V1-10234)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM

RF Output Power: 34.91 dBm (Conducted)

Frequency: 860.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M860 ($\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x12x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 78.5 V/m; Power Drift = 0.0725 dB

Peak SAR (extrapolated) = 8.37 W/kg

SAR(1 g) = 6.38 mW/g; SAR(10 g) = 4.49 mW/g

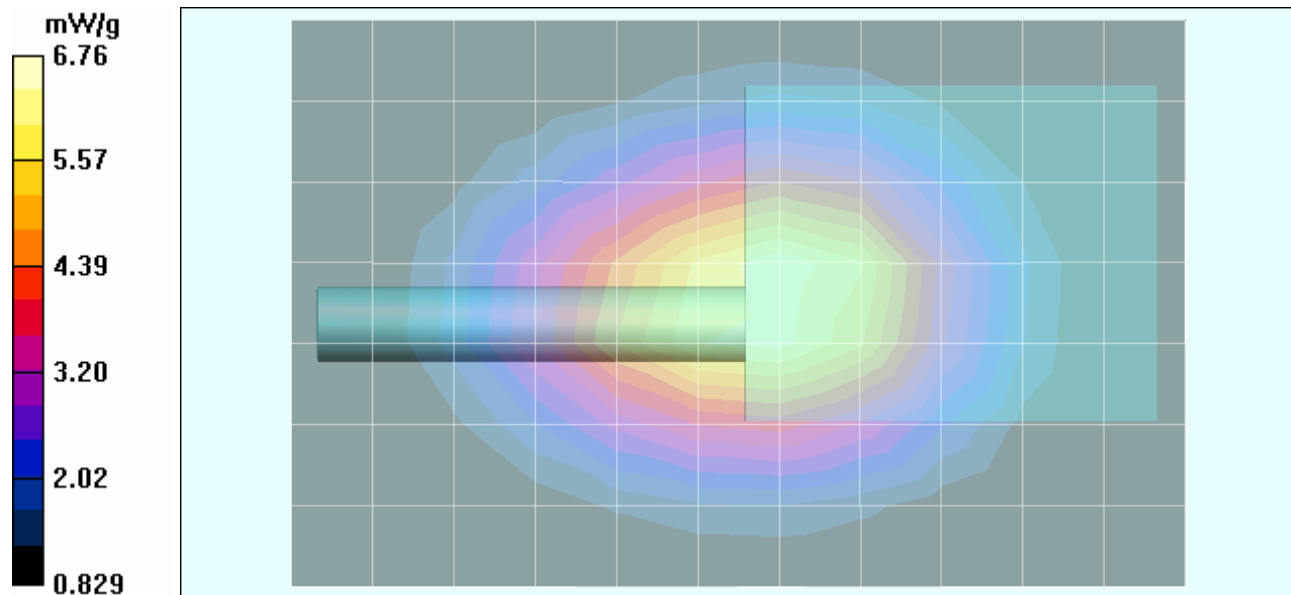

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

BODY-WORN with Ruggedized Speaker-Microphone Antenna (P/N: KRY 101 1617/384)

Audio Accessory: Ranger Headset (P/N: OT-V1-V4-10421)

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Ranger Headset (P/N: OT-V4-10421)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.06 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = 0.0999 dB

Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 1.97 mW/g; SAR(10 g) = 1.37 mW/g

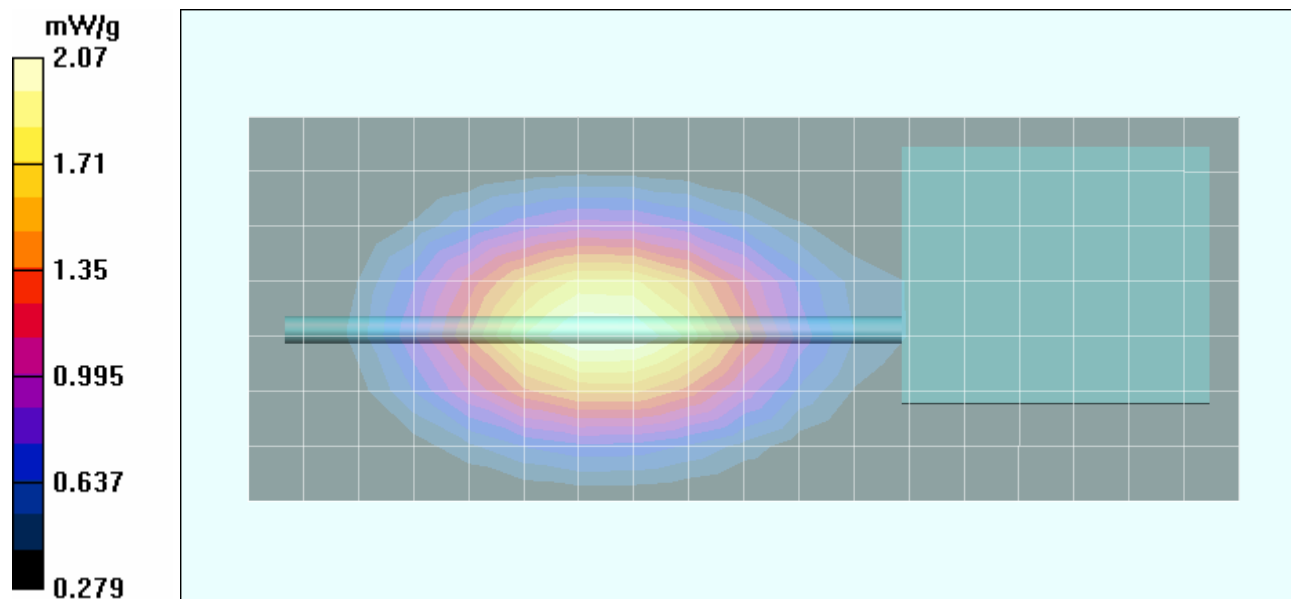

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiMH NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Ranger Headset (P/N: OT-V4-10421)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.16 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 69.8 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 8.45 W/kg

SAR(1 g) = 5.48 mW/g; SAR(10 g) = 3.77 mW/g

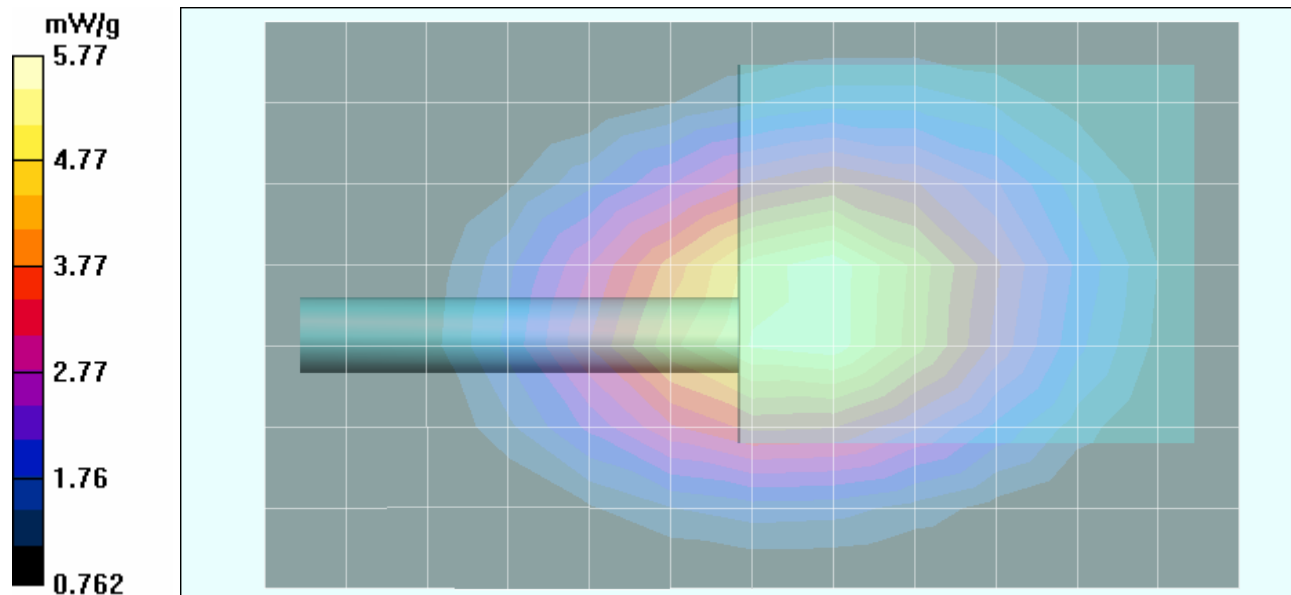

Date Tested: 07/27/2005

Body-Worn SAR - 796.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Ranger Headset (P/N: OT-V4-10421)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.47 dBm (Conducted)

Frequency: 796.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M797 ($\sigma = 0.94$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = -0.00433 dB

Peak SAR (extrapolated) = 5.80 W/kg

SAR(1 g) = 3.77 mW/g; SAR(10 g) = 2.62 mW/g

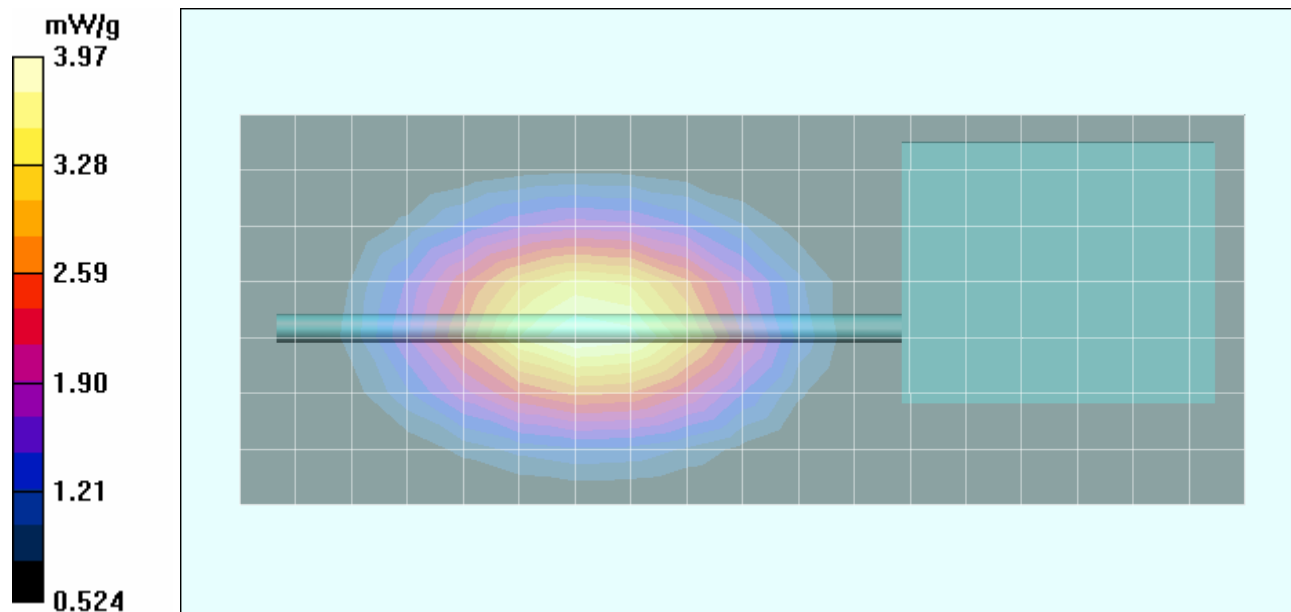

Date Tested: 07/27/2005

Body-Worn SAR - 796.9875 MHz - NiCd NIS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Ranger Headset (P/N: OT-V4-10421)

Ambient Temp: 24.8 °C; Fluid Temp: 22.3 °C; Barometric Pressure: 102.2 kPa; Humidity: 31%

Communication System: FM
RF Output Power: 34.35 dBm (Conducted)
Frequency: 796.9875 MHz; Duty Cycle: 1:1
NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)
Medium: M797 ($\sigma = 0.94$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³)



- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 64.7 V/m; Power Drift = 0.114 dB
Peak SAR (extrapolated) = 6.82 W/kg
SAR(1 g) = 4.38 mW/g; SAR(10 g) = 3.03 mW/g

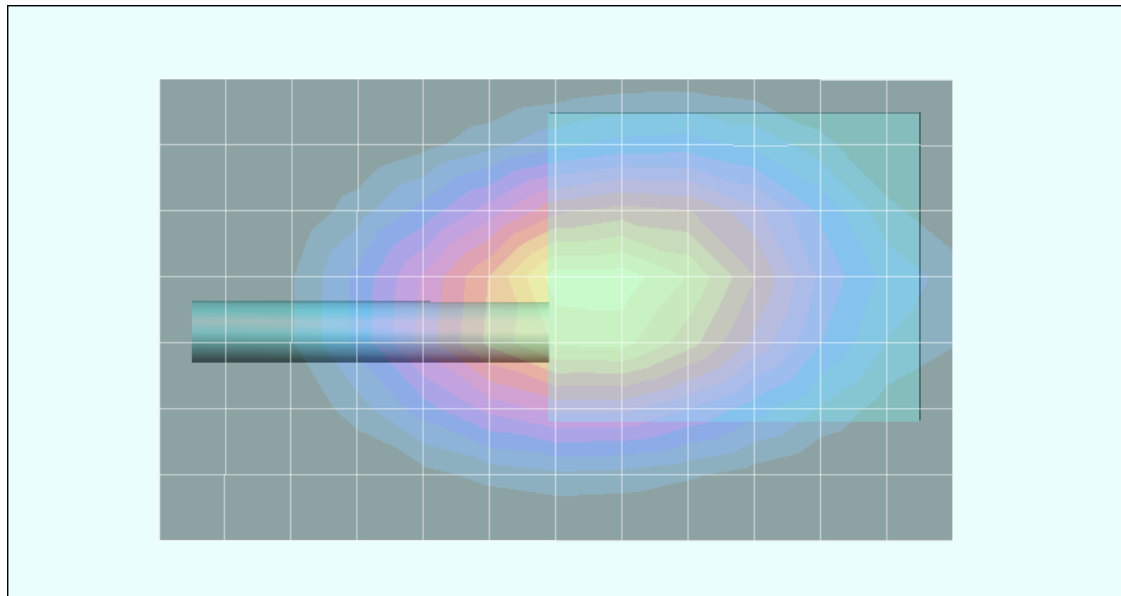

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Ranger Headset (P/N: OT-V4-10421)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.80 dBm (Conducted)

Frequency: 815.0000 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.3 V/m; Power Drift = -0.0533 dB

Peak SAR (extrapolated) = 6.44 W/kg

SAR(1 g) = 4.94 mW/g; SAR(10 g) = 3.53 mW/g

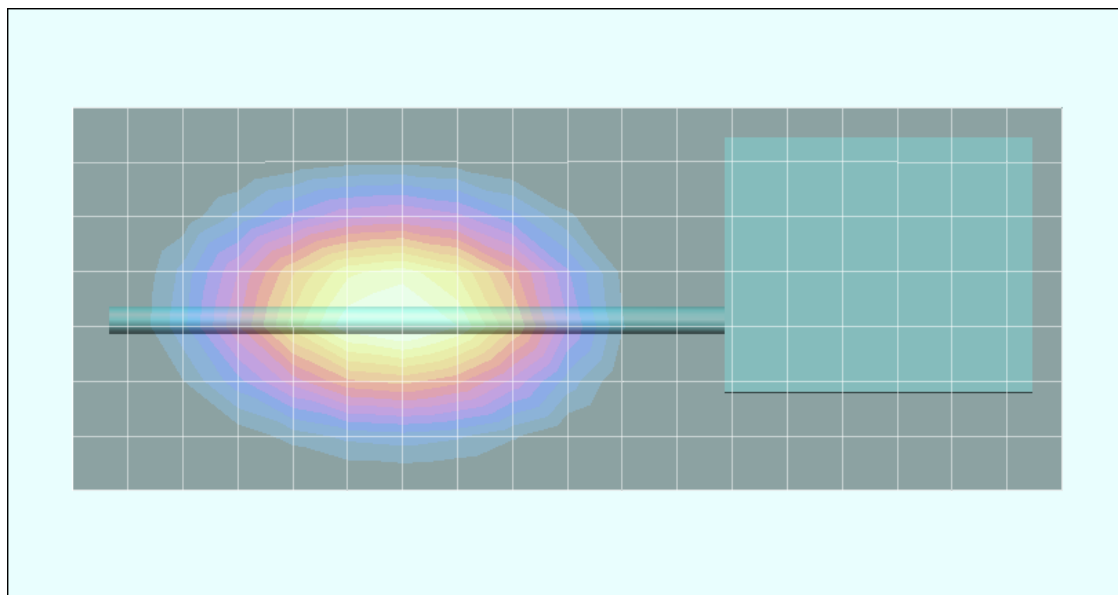

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093
			IC RSS-102

Date Tested: 07/22/2005

Body-Worn SAR - 815.0000 MHz - NiCd IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Ranger Headset (P/N: OT-V4-10421)

Ambient Temp: 24.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: FM
RF Output Power: 34.82 dBm (Conducted)
Frequency: 815.0000 MHz; Duty Cycle: 1:1
NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)
Medium: M815 ($\sigma = 0.97$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 75.4 V/m; Power Drift = 0.134 dB
Peak SAR (extrapolated) = 7.37 W/kg
SAR(1 g) = 5.64 mW/g; SAR(10 g) = 4.02 mW/g

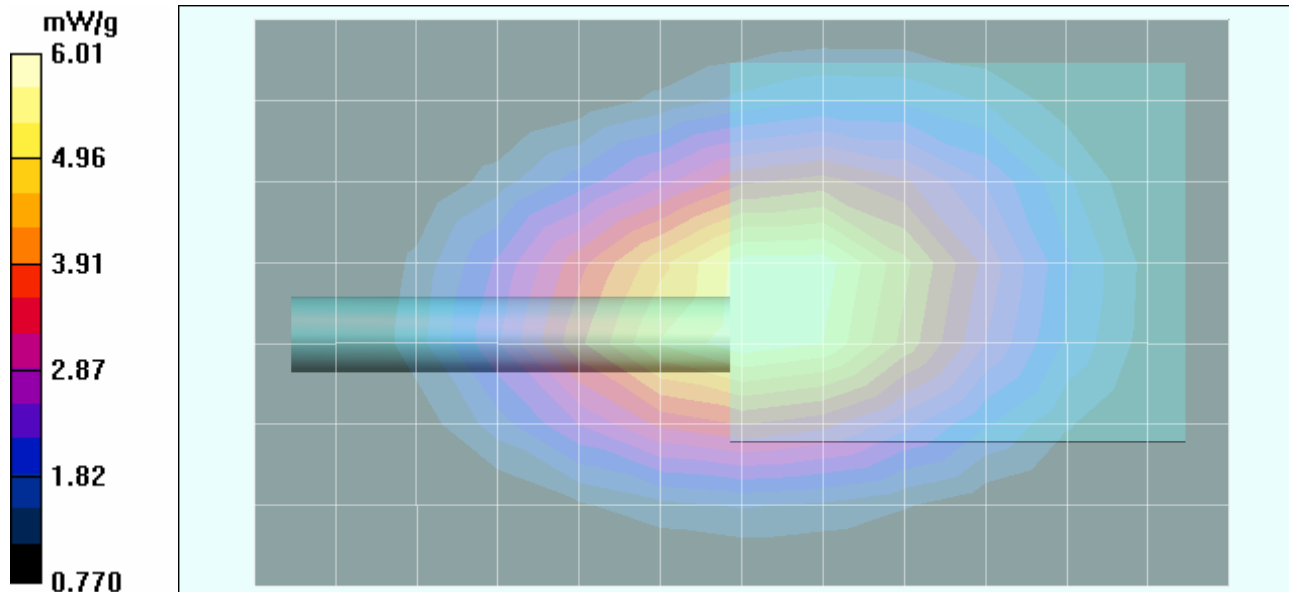

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						121 of 336

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Ranger Headset (P/N: OT-V4-10421)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
RF Output Power: 34.89 dBm (Conducted)
Frequency: 860.0000 MHz; Duty Cycle: 1:1
NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)
Medium: M860 ($\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x19x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 13.6 V/m; Power Drift = 0.0527 dB
Peak SAR (extrapolated) = 6.89 W/kg
SAR(1 g) = 5.24 mW/g; SAR(10 g) = 3.7 mW/g

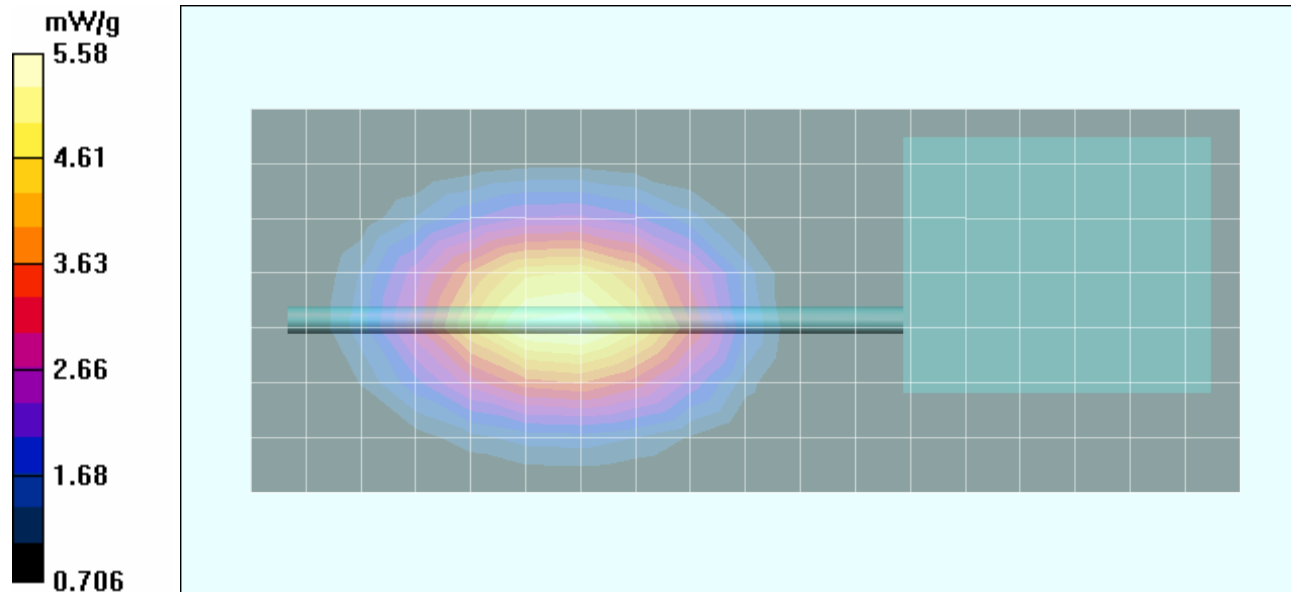

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

Date Tested: 07/21/2005

Body-Worn SAR - 860.0000 MHz - NiMH IS Battery - Quarter-Wave Antenna (P/N: KRE 101 1506/2)

DUT: M/A-COM Model: P7200; Type: FM PTT Speaker-Microphone Antenna Version Ruggedized (P/N: KRY 101 1617/384)

Body-Worn Accessories: Lapel Clip; Audio Accessories: Ranger Headset (P/N: OT-V4-10421)

Ambient Temp: 25.3 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: FM
RF Output Power: 34.83 dBm (Conducted)
Frequency: 860.0000 MHz; Duty Cycle: 1:1
NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)
Medium: M860 ($\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1387; ConvF(6.1, 6.1, 6.1); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.3 cm Lapel-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 71.4 V/m; Power Drift = -0.0553 dB
Peak SAR (extrapolated) = 7.23 W/kg
SAR(1 g) = 5.47 mW/g; SAR(10 g) = 3.84 mW/g

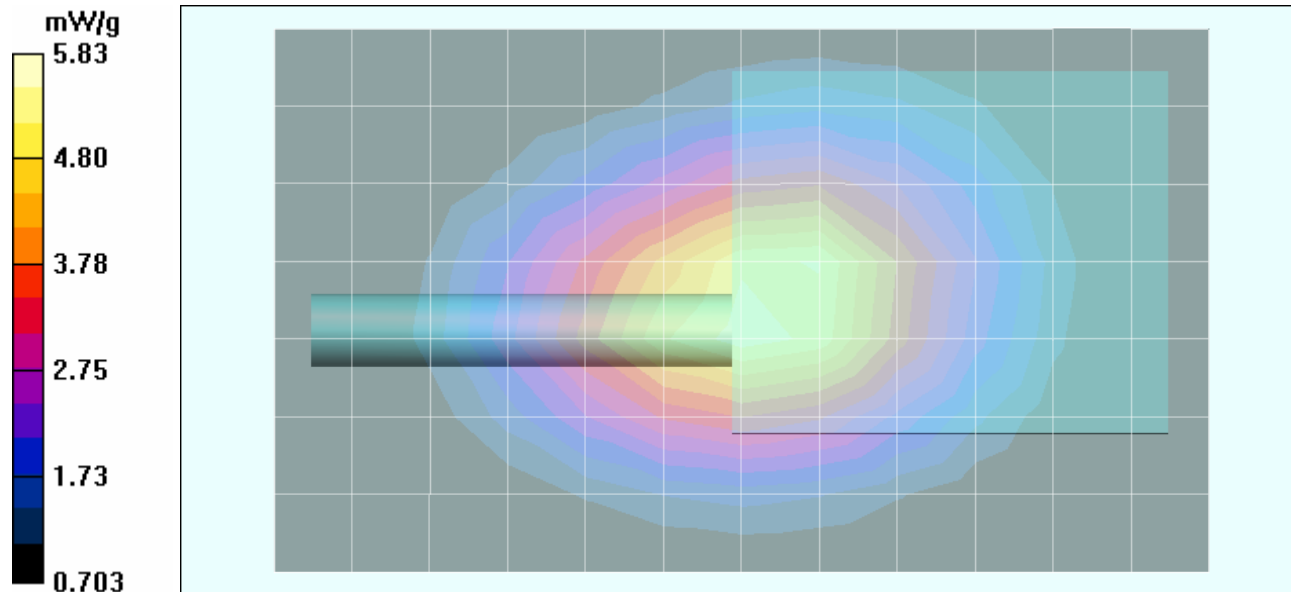

Applicant:	M/A-COM, Inc.	Model:	P7200	FCC ID:	BV8P7200	IC ID:	3670A-P7200	
DUT Type:	Portable FM PTT Radio Transceiver			764-776MHz / 794-806MHz / 806-824MHz / 851-869MHz				
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						123 of 336

Test Report Serial No.:	071105BV8-T656-S90F	TR Issue Date:	August 25, 2005
Dates of Evaluation:	July 19-22, 25-28, August 02-04, 2005		Issue 1 Rev. 3
Description of Test:	RF Exposure	SAR	FCC 2.1093 IC RSS-102

BODY-WORN with System Radio (Model No.: MAHROS0050)

Body-worn Accessory: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessory: Speaker-Microphone (P/N: KRY 101 1617/183)

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiMH IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.25 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Intrinsically Safe Battery (P/N: BKB191210/36)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = 0.0173 dB

Peak SAR (extrapolated) = 3.38 W/kg

SAR(1 g) = 2.25 mW/g; SAR(10 g) = 1.61 mW/g


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = 0.0173 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 1.38 mW/g; SAR(10 g) = 0.905 mW/g

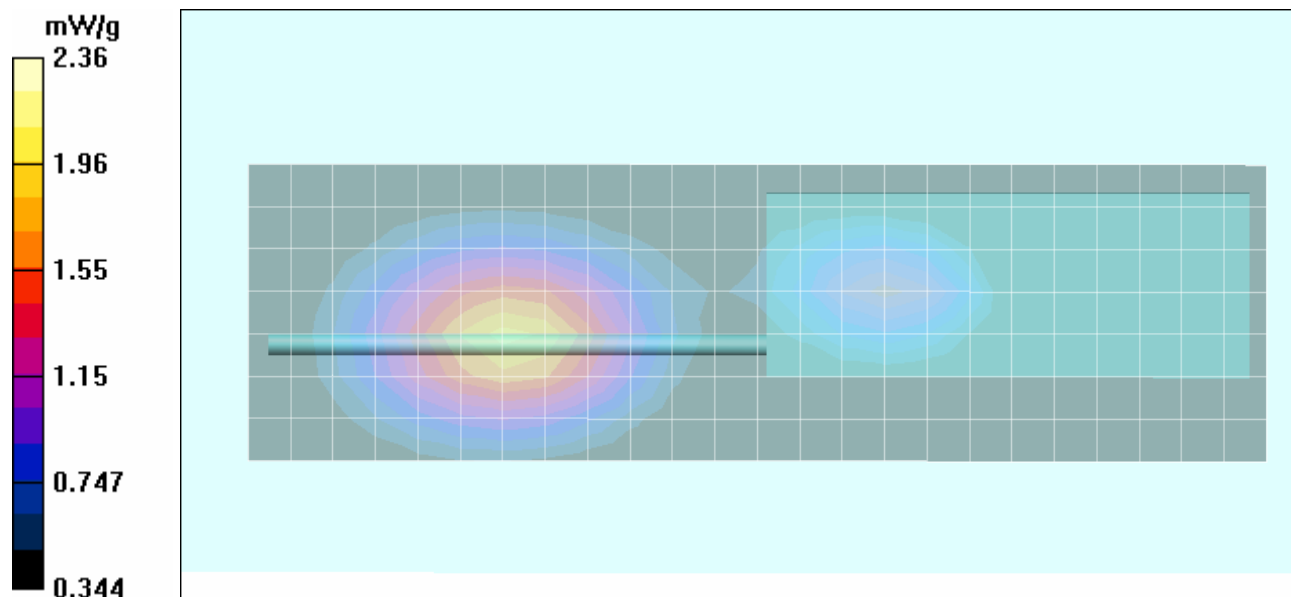

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiMH NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.08 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiMH 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/34)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = 0.172 dB

Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 2.14 mW/g; SAR(10 g) = 1.53 mW/g


Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = 0.172 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.818 mW/g

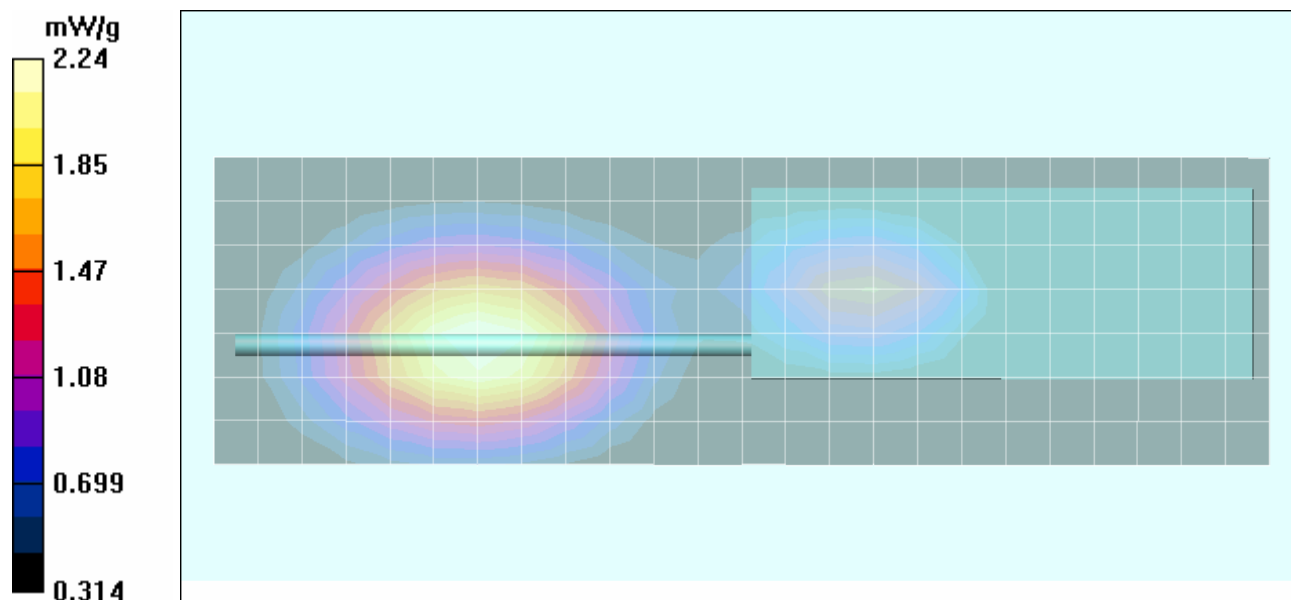

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiCd IS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.21 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Intrinsically Safe Battery (P/N: BKB191210/35)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm



Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.6 V/m; Power Drift = 0.0646 dB

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 2.06 mW/g; SAR(10 g) = 1.48 mW/g

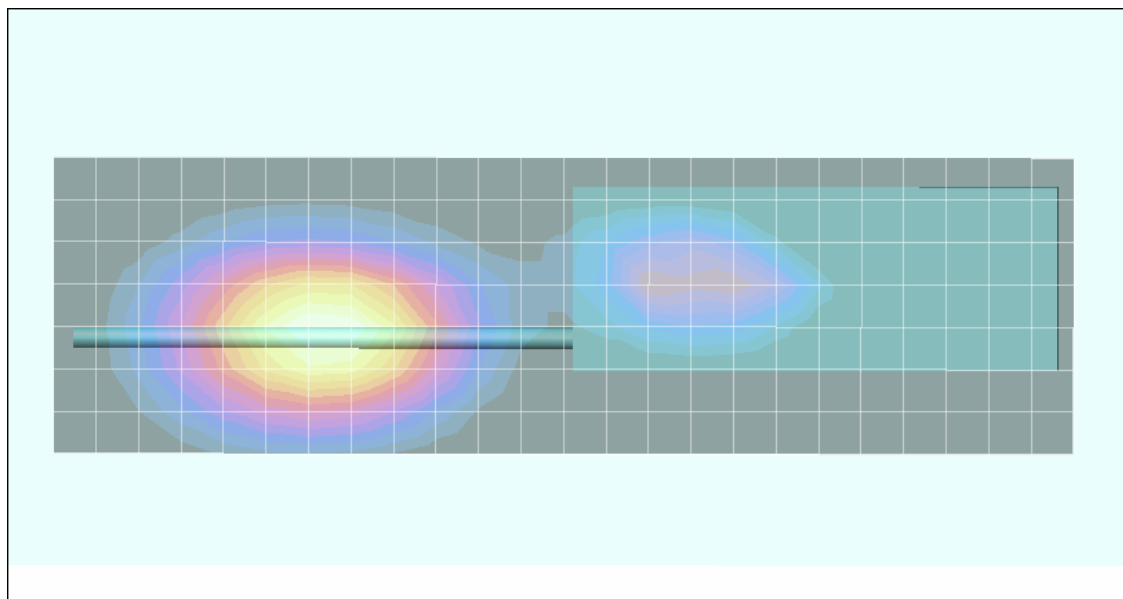

Date Tested: 07/28/2005

Body-Worn SAR - 766.9875 MHz - NiCd NIS Battery - Half-Wave Antenna (P/N: KRE 101 1506/1)

DUT: M/A-COM Model: P7200; Type: Portable FM PTT Radio Transceiver (Model No.: MAHROS0050); Serial: A40041001002

Body-Worn Accessories: Metal Belt-Clip (P/N: KRY 101 1647/1)

Audio Accessories: Speaker-Microphone (P/N: KRY 101 1617/183)

Ambient Temp: 25.0 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.6 kPa; Humidity: 31%

Communication System: FM

RF Output Power: 34.33 dBm (Conducted)

Frequency: 766.9875 MHz; Duty Cycle: 1:1

NiCd 7.5V Non-Intrinsically Safe Battery (P/N: BKB191210/33)

Medium: M767 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(6.5, 6.5, 6.5); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Area Scan (8x25x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.3 V/m; Power Drift = 0.0151 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 2.14 mW/g; SAR(10 g) = 1.53 mW/g

Body-Worn - 1.1 cm Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.3 V/m; Power Drift = 0.0151 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.792 mW/g

