

EXHIBIT B

Measurement Report

MEASUREMENT REPORT of CORDLESS TELEPHONE

Applicant : DBTEL INCORPORATED
Model : DB-8128
EUT : 900MHz Analog Cordless Phone with DTAD
FCC ID : BW3DB-8128
Report No. : D0415729

Test by :

Training Research Co., Ltd.

TEL : 886-2-26935155

FAX : 886-2-26934440

2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by *Training Research Co., Ltd.*, 2, Lane 194, Huan-Ho Street, Hsichi, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.249.

Applicant : DBTEL INCORPORATED
Model : DB-8128
EUT : 900MHz Analog Cordless Phone with DTAD
FCC ID : BW3DB-8128
Report No. : D0415729
Test Date : Jan. 20, 1999

Prepared by:


JACK TSAI

Approved by:


FRANK TSAI

Test by :

Training Research Co., Ltd.

TEL : 886-2-26935155

FAX : 886-2-26934440

2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan, R.O.C.

Tables of Contents

I. GENERAL

1.1 Introduction.....	6
1.2 Description of EUT.....	6
1.3 Description of Support Equipment.....	6
1.4 Configuration of System Under Test.....	7
1.5 Test Procedure.....	7
1.6 Location of the Test Site.....	7
1.7 General Test Condition.....	8

II. Conducted Emissions Measurements

2.1 Test Condition & Setup.....	9
2.2 List of Test Instruments.....	9
2.3 Test configuration.....	10
2.4 Test Result of Conducted Emissions.....	11

III. Radiated Emissions Measurements

3.1 Test Condition & Setup.....	15
3.2 List of Test Instruments.....	16
3.3 Test Instruments Configuration.....	17
3.4 Test Result of Radiated Emissions.....	19
3.5 Test Result of Spurious Radiated Emissions.....	20

V. Verify Frequencies and Channels..... 40

TABLES

Table 1 Power Line Conducted Emissions [Charge Mode].....	11
Table 2 Power Line Conducted Emissions [Play Mode].....	12
Table 3 Power Line Conducted Emissions [Channel 01].....	13
Table 4 Power Line Conducted Emissions [Channel 20].....	14
Table 5 Open Field Fundamental Emissions.....	19

Table 6	Open Field Radiated Emissions [Charge Mode Horizontal 30MHz – 1GHz].....	20
Table 7	Open Field Radiated Emissions [Charge Mode Vertical 30MHz – 1GHz].....	21
Table 8	Open Field Radiated Emissions [Play Mode Horizontal 30MHz – 1GHz].....	22
Table 9	Open Field Radiated Emissions [Play Mode Vertical 30MHz – 1GHz].....	23
Table 10	Open Field Radiated Emissions [Base Channel 01 Horizontal 30MHz – 1GHz].....	24
Table 11	Open Field Radiated Emissions [Base Channel 01 Horizontal 1GHz – 18GHz].....	25
Table 12	Open Field Radiated Emissions [Base Channel 01 Vertical 30MHz – 1GHz].....	26
Table 13	Open Field Radiated Emissions [Base Channel 01 Vertical 1GHz – 18GHz].....	27
Table 14	Open Field Radiated Emissions [Base Channel 20 Horizontal 30MHz – 1GHz].....	28
Table 15	Open Field Radiated Emissions [Base Channel 20 Horizontal 1GHz – 18GHz].....	29
Table 16	Open Field Radiated Emissions [Base Channel 20 Vertical 30MHz – 1GHz].....	30
Table 17	Open Field Radiated Emissions [Base Channel 20 Vertical 1GHz – 18GHz].....	31
Table 18	Open Field Radiated Emissions [Handset Channel 01 Horizontal 30MHz – 1GHz].....	32
Table 19	Open Field Radiated Emissions [Handset Channel 01 Horizontal 1GHz – 18GHz].....	33
Table 20	Open Field Radiated Emissions [Handset Channel 01 Vertical 30MHz – 1GHz].....	34
Table 21	Open Field Radiated Emissions [Handset Channel 01 Vertical 1GHz – 18GHz].....	35

Appendix A

36	Table 22 Open Field Radiated Emissions [Handset Channel 20 Horizontal 30MHz - 1GHz]
37	Table 23 Open Field Radiated Emissions [Handset Channel 20 Horizontal 1GHz - 18GHz]
38	Table 24 Open Field Radiated Emissions [Handset Channel 20 Vertical 30MHz - 1GHz]
39	Table 25 Open Field Radiated Emissions [Handset Channel 20 Vertical 1GHz - 18GHz]
40	Table 26 Verify the Frequency Pairs
41	

I. GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of Applicant in support of a Cordless Telephone certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

1.2 Description of EUT

EUT : 900MHz Analog Cordless Phone with DTAD
Model : DB-8128
FCC ID : BW3DB-8128
Frequency Range : Base: 902.3 – 906.1 MHz
Handset: 923.9 – 927.7 MHz
Support Channel : 20 Channel
Power Type : Base Powered by 120 Vac 60 Hz / 9 Vdc 300 mA
Handset powered by 3.6 V / 600 mAh.
Power Cord : Non-shielded
Data Cable : RJ-11C x 1 => Non-shielded, 7' long, Plastic hoods, No bead
Headset & MIC. => Non-shielded, 217cm long, Plastic hoods,
No bead
Applicant : DBTEL INCORPORATED
29 Tzu Chiang Street, Tu-Cheng, Taipei Hsien, Taiwan,
R.O.C.

1.3 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PABX : **King Design**
Model No. : KD8705-A
Serial No. : GV101101186
Power type : 110 VAC 50/60Hz
Power cord : Non - Shielded

1.4 Configuration of System Under Test

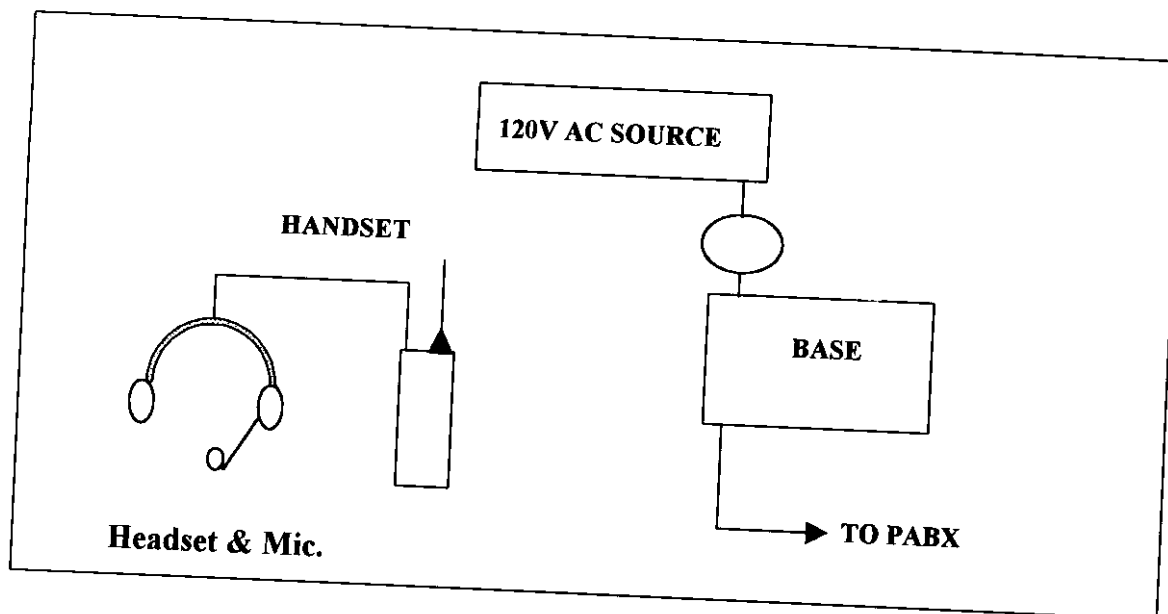


Fig. 1 Configuration of system under test

During testing the EUT was connected to PABX. A diagram of the complete test configuration was shown in Fig 1.

1.5 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in Measurement procedure ANSI C63.4 (1992).

1.6 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the three-meter, open-field test site maintained by Training Research Co., Ltd. No. 5-3, Lane 21, Yen-Chiu-Yuan Rd., Sec. 4, Taipei, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a shielded enclosure also located at Training Research Co., Ltd. 2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan, R.O.C. Training Research Co., Ltd. is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.7 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests was chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated.

In test, the base and handset are tested separately. They were set in Ch01, Ch20 of EUT and continuously transmitting mode that controlled by test mode of EUT.

II. Conducted Emissions Measurements

2.1 Test Condition & Setup

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3825/2 Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 450 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4.

There are three test conditions that apply in this test item, the test procedure description as the following:

2.2 List of Test Instruments

Manufacturer	Device	Model	Input impedance
Hewlett Packard	100Hz-1.5GHz Spectrum Analyzer	HP8591EM	50.00
EMCO	Line Impedance Stabilization Network	3825/2	50.00
TRC	Shielded Room	TRC-SR1	N/A

2.4 Test Result of Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the HOT and NATURAL conductors of the EUT power cord.

Model No. : DB-8128

EUT : 900MHz Analog Cordless Phone with DTAD

Table 1 Power Line Conducted Emissions (Charge Mode)

Power	Connected	Emissions	FCC	Class B
Conductor	Frequency (KHz)	Peak Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
Line 1	464.00	36.66	48.00	-11.34
	489.00	35.17	48.00	-12.83
	499.00	35.24	48.00	-12.76
	527.00	32.61	48.00	-15.39
	701.00	31.14	48.00	-16.86
	719.00	31.18	48.00	-16.82
	754.00	31.50	48.00	-16.50
	803.00	30.99	48.00	-17.01
	15930.00	32.50	48.00	-15.50
	29390.00	35.59	48.00	-12.41
LINE 2	788.00	24.35	48.00	-23.65
	823.00	24.61	48.00	-23.39
	862.00	24.77	48.00	-23.23
	12010.00	24.42	48.00	-23.58
	14020.00	24.59	48.00	-23.41
	15930.00	33.67	48.00	-14.33
	16910.00	29.21	48.00	-18.79
	20000.00	28.13	48.00	-19.87
	24120.00	25.75	48.00	-22.25
	29390.00	34.65	48.00	-13.35

NOTE:

1. Margin = Peak Amplitude - Limit
2. A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit.

Table 2 Power Line Conducted Emissions (Play Mode)

Power	Connected	Emissions	FCC	Class B
Conductor	Frequency (KHz)	Peak Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
Line 1	461.00	36.38	48.00	-11.62
	486.00	34.40	48.00	-13.60
	524.00	30.95	48.00	-17.05
	684.00	30.60	48.00	-17.40
	724.00	30.41	48.00	-17.59
	744.00	31.74	48.00	-16.26
	769.00	31.32	48.00	-16.68
	803.00	31.39	48.00	-16.61
	833.00	31.27	48.00	-16.73
	15930.00	36.07	48.00	-11.93
LINE 2	778.00	25.81	48.00	-22.19
	833.00	25.20	48.00	-22.80
	868.00	24.63	48.00	-23.37
	891.00	25.04	48.00	-22.96
	947.00	22.82	48.00	-25.18
	15930.00	36.38	48.00	-11.62
	17950.00	26.80	48.00	-21.20
	20000.00	23.23	48.00	-24.77
	24120.00	24.28	48.00	-23.72
	28160.00	23.46	48.00	-24.54

Table 3 Power Line Conducted Emissions (Channel 01)

Power	Connected	Emissions	FCC	Class B
Conductor	Frequency (KHz)	Peak Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
Line 1	452.00	37.00	48.00	-11.00
	470.00	35.89	48.00	-12.11
	493.00	35.12	48.00	-12.88
	524.00	32.97	48.00	-15.03
	542.00	32.26	48.00	-15.74
	788.00	30.35	48.00	-17.65
	828.00	30.76	48.00	-17.24
	880.00	30.11	48.00	-17.89
	15930.00	35.85	48.00	-12.15
	16910.00	31.42	48.00	-16.58
LINE 2	467.00	24.16	48.00	-23.84
	857.00	25.19	48.00	-22.81
	891.00	25.93	48.00	-22.07
	935.00	24.29	48.00	-23.71
	960.00	24.22	48.00	-23.78
	15930.00	36.67	48.00	-11.33
	16910.00	31.69	48.00	-16.31
	17950.00	27.20	48.00	-20.80
	19110.00	27.08	48.00	-20.92
	24120.00	24.43	48.00	-23.57

Table 4 Power Line Conducted Emissions (Channel 20)

Power	Connected	Emissions	FCC	Class B
Conductor	Frequency (KHz)	Peak Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
Line 1	457.00	36.89	48.00	-11.11
	467.00	36.70	48.00	-11.30
	483.00	35.68	48.00	-12.32
	502.00	35.02	48.00	-12.98
	521.00	33.60	48.00	-14.40
	542.00	31.67	48.00	-16.33
	769.00	29.77	48.00	-18.23
	818.00	30.55	48.00	-17.45
	862.00	30.38	48.00	-17.62
	15930.00	37.50	48.00	-10.50
LINE 2	467.00	24.65	48.00	-23.35
	862.00	25.71	48.00	-22.29
	929.00	25.78	48.00	-22.22
	1009.00	23.81	48.00	-24.19
	15930.00	36.30	48.00	-11.70
	16910.00	31.88	48.00	-16.12
	17950.00	27.55	48.00	-20.45
	19110.00	26.19	48.00	-21.81
	20000.00	24.55	48.00	-23.45
	24120.00	25.33	48.00	-22.67

III. Radiated Emissions Measurements

3.1 Test Condition & Setup

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8594EM Spectrum Analyzer, EMCO whole range Antenna is used to measure frequency from 30 MHz to 1GHz. The final test is used the spectrum HP 8594EM and spectrum was examined from 1 GHz to 18GHz using an Hewlett Packard 8592A Spectrum Analyzer, EMCO Horn Antenna (Model 3115) for 1 G - 18 GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP8568b for frequency 30MHz to 1000MHz, and HP8592A for frequency 1 GHz to 18 GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6 dB bandwidth was set to 120 KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1 GHz to 18GHz) and the analyzer was operated in the maximum hold mode.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dBuV/m)} = F_{Ir} \text{ (dBuV)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss}$$

For frequency between 1 GHz to 18 GHz

$$F_{Ia} \text{ (dBuV/m)} = F_{Ir} \text{ (dBuV)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss} - \text{Distance Factor (9.54dB)} - \text{Amplifier Gain}$$

3.2 List of Test Instruments

Manufacturer	Device	Model	Input Impedance
Hewlett Packard	.100Hz – 1.5GHz Spectrum Analyzer	HP8568B	50.00
Hewlett Packard	.10KHz – 1GHz Quasi-peak Adapter	HP85650A	50.00
Hewlett Packard	.20Hz – 2GHz RF Preselector	HP85685A	50.00
Hewlett Packard	.50KHz – 22GHz Spectrum Analyzer	HP8592A	50.00
Hewlett Packard	.9KHz – 2.9GHz Spectrum Analyzer	HP8594EM	50.00

3.4 Test Result of Radiated Emissions

The peak values of fundamental emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Model No. : DB-8128
EUT : 900MHz Analog Cordless Phone with DTAD

Table5 Open Field Fundamental Emissions

Channel	Frequency (MHz)	A.P. (H/V)	A.H. (CM)	Table (degree)	Amplitude (Peak) (dBuV/m)	Limit (dBuV)	Margin (dBuV)
Base 01	902.285	H	100.00	321.00	81.65	94.00	-12.35
		V	100.00	10.00	83.25	94.00	-10.75
Base 20	906.100	H	100.00	180.00	80.12	94.00	-13.88
		V	100.00	219.00	81.72	94.00	-12.28
Handset 01	923.910	H	100.00	45.00	84.68	94.00	-9.32
		V	100.00	132.00	92.98	94.00	-1.02
Handset 20	927.700	H	100.00	259.00	88.68	94.00	-5.32
		V	100.00	7.00	91.58	94.00	-2.42

Note:

1. A. P. means antenna polarization, horizontal and vertical.
2. A. H. means antenna height.
3. Table means turntable turning position.
4. Amplitude means the fundamental emission measured.
5. Margin = Amplitude-limit

3.5 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

Model No. : DB-8128
EUT : 900MHz Analog Cordless Phone with DTAD

Table 6. Open Field Radiated Emissions for 30MHz ~ 1GHz [Charge, Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
36.000	30.20	1.00	148	-10.28	19.92	40.00	-20.08
38.700	31.30	1.00	171	-11.31	19.99	40.00	-20.01
40.550	33.50	1.00	137	-11.96	21.54	40.00	-18.46
130.870	33.00	1.00	220	-15.54	17.46	43.50	-26.04
186.170	42.40	4.00	113	-12.67	29.73	43.50	-13.77
204.600	34.00	4.00	194	-12.02	21.98	43.50	-21.52
208.290	46.30	4.00	324	-11.87	34.43	43.50	-9.07
423.950	29.00	1.00	41	-3.83	25.17	46.00	-20.83
442.380	31.40	1.00	275	-3.25	28.15	46.00	-17.85
479.250	30.10	1.00	195	-2.01	28.09	46.00	-17.91

Note:

1. Margin = Corrected - Limit
2. Peak Amplitude + Correction Factors = Corrected

Table 7. Open Field Radiated Emissions for 30MHz ~ 1GHz [Charge, Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)		Limit (dBuV/m)	Margin (dB)
36.000	41.60	1.00	153	-10.28	31.32	40.00	-8.68
38.700	46.30	1.00	27	-11.31	34.99	40.00	-5.01
40.550	46.70	1.00	90	-11.96	34.74	40.00	-5.26
130.870	37.30	1.00	110	-15.54	21.76	43.50	-21.74
186.170	49.50	4.00	1	-12.67	36.83	43.50	-6.67
204.600	42.40	4.00	248	-12.02	30.38	43.50	-13.12
208.290	36.80	4.00	326	-11.87	24.93	43.50	-18.57
423.950	29.40	1.00	114	-3.83	25.57	46.00	-20.43
442.380	34.50	1.00	219	-3.25	31.25	46.00	-14.75
479.250	31.70	1.00	60	-2.01	29.69	46.00	-16.31

Table 8. Open Field Radiated Emissions for 30MHz ~ 1GHz [Play, Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)			Limit (dBuV/m)	Margin (dB)
294.920	36.90	1.00	138	-7.08	29.82	46.00	-16.18
479.250	31.20	1.00	162	-2.01	29.19	46.00	-16.81

Table 9. Open Field Radiated Emissions for 30MHz ~ 1GHz [Play, Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)		Limit (dBuV/m)	Margin (dB)
423.950	27.60	1.00	38	-3.83	23.77	46.00	-22.23
442.380	33.30	1.00	266	-3.25	30.05	46.00	-15.95
936.000	32.20	1.00	270	7.80	40.00	46.00	-6.00

Table 10. Open Field Radiated Emissions for 30MHz ~ 1GHz [Channel 01, Base Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
38.700	29.80	1.00	123	-11.31	18.49	40.00	-21.51
40.550	31.00	1.00	161	-11.96	19.04	40.00	-20.96
278.570	41.80	4.00	194	-8.16	33.64	46.00	-12.36
405.520	33.20	1.00	36	-4.33	28.87	46.00	-17.13
450.600	31.90	4.00	41	-3.07	28.83	46.00	-17.17

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factors = Corrected

Table 11. Open Field Radiated Emissions for 1GHz ~ 18GHz [Channel 01, Base Horizontal]

Radiated Emission				Correction Factors	Distance	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
1.804	48.80	100.00	169	-8.67	-9.54	30.59	54	-23.41
2.333	59.14	100.00	28	-8.67	-9.54	40.93	54	-13.07
2.798	54.64	100.00	129	-6.84	-9.54	38.26	54	-15.74
3.270	57.97	100.00	298	-6.84	-9.54	41.59	54	-12.41

Note:

1. Margin = Corrected - Limit.
2. Peak amplitude + Correction Factor + Distance = Corrected

Table 12. Open Field Radiated Emissions for 30MHz ~ 1GHz [Channel 01, Base Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)		Limit (dBuV/m)	Margin (dB)
38.700	43.70	1.00	251	-11.31	32.39	40.00	-7.61
40.550	47.40	1.00	3	-11.96	35.44	40.00	-4.56
278.570	40.60	4.00	60	-8.16	32.44	46.00	-13.56
405.520	34.80	1.00	107	-4.33	30.47	46.00	-15.53
450.600	36.70	4.00	52	-3.07	33.63	46.00	-12.37

Table 13. Open Field Radiated Emissions for 1GHz ~ 18GHz [Channel 01, Base Vertical]

Radiated Emission				Correction Factors	Distance	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
1.804	51.80	100.00	19	-8.67	-9.54	33.59	54	-20.41
2.333	62.64	100.00	228	-8.67	-9.54	44.43	54	-9.57
2.798	56.81	100.00	154	-6.84	-9.54	40.43	54	-13.57
3.270	63.97	100.00	221	-6.84	-9.54	47.59	54	-6.41

Table 14. Open Field Radiated Emissions for 30MHz ~ 1GHz [Channel 20, Base Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)		Limit (dBuV/m)	Margin (dB)
38.710	30.00	1.00	139	-11.31	18.69	40.00	-21.31
130.880	40.70	1.00	299	-15.54	25.16	43.50	-18.34
405.530	34.40	1.00	283	-4.33	30.07	46.00	-15.93
453.450	30.80	1.00	122	-2.93	27.87	46.00	-18.13

Table 15. Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 20, Base Horizontal]

Radiated Emission				Correction Factors	Distance	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
1.877	48.97	100.00	69	-8.67	-9.54	30.76	54	-23.24
2.349	58.49	100.00	287	-8.67	-9.54	40.28	54	-13.72
2.807	55.16	100.00	198	-6.84	-9.54	38.78	54	-15.22
3.281	57.00	100.00	326	-6.84	-9.54	40.62	54	-13.38

Table 16. Open Field Radiated Emissions for 30MHz ~ 1GHz [Channel 20, Base Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)		Limit (dBuV/m)	Margin (dB)
38.710	45.10	1.00	24	-11.31	33.79	40.00	-6.21
130.880	45.00	1.00	119	-15.54	29.46	43.50	-14.04
405.530	35.30	1.00	197	-4.33	30.97	46.00	-15.03
453.450	36.20	1.00	61	-2.93	33.27	46.00	-12.73

Table 17. Open Field Radiated Emissions for 1GHz ~ 18GHz [Channel 20, Base Vertical]

Radiated Emission				Correction Factors (dB)	Distance (dB)	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)				Limit (dBuV/m)	Margin (dB)
1.877	56.14	100.00	69	-8.67	-9.54	37.93	54	-16.07
2.349	61.30	100.00	287	-8.67	-9.54	43.09	54	-10.91
2.807	58.31	100.00	198	-6.84	-9.54	41.93	54	-12.07
3.281	62.81	100.00	326	-6.84	-9.54	46.43	54	-7.57

Table 18. Open Field Radiated Emissions for 30MHz ~ 1GHz [Channel 01, Handset Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)		Limit (dBuV/m)	Margin (dB)
84.000	37.00	1.00	267	-15.74	21.26	40.00	-18.74
231.000	26.70	1.00	276	-10.75	15.95	46.00	-30.05
461.950	30.20	1.00	96	-2.53	27.67	46.00	-18.33

Table 19. Open Field Radiated Emissions for 1GHz ~ 18GHz [Channel 01, Handset Horizontal]

Radiated Emission				Correction Factors	Distance	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
1.805	52.97	100.00	9	-8.67	-9.54	34.76	54	-19.24
2.223	54.80	100.00	27	-8.67	-9.54	36.59	54	-17.41
2.673	52.30	100.00	119	-8.67	-9.54	34.09	54	-19.91
2.766	51.47	100.00	316	-6.84	-9.54	35.09	54	-18.91
3.122	48.81	100.00	219	-6.84	-9.54	32.43	54	-21.57
3.699	50.44	100.00	136	-5.64	-9.54	35.26	54	-18.74
***							54	-18.74

Table 20. Open Field Radiated Emissions for 30MHz ~ 1GHz [Channel 01, Handset Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)		Limit (dBuV/m)	Margin (dB)
84.000	40.00	1.00	319	-15.74	24.26	40.00	-15.74
231.000	26.40	1.00	100	-10.75	15.65	46.00	-30.35
461.950	30.00	1.00	93	-2.53	27.47	46.00	-18.53

Table 21. Open Field Radiated Emissions for 1GHz ~ 18GHz [Channel 01, Handset Vertical]

Radiated Emission				Correction Factors (dB)	Distance (dB)	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)				Limit (dBuV/m)	Margin (dB)
1.805	59.97	100.00	60	-8.67	-9.54	41.76	54	-12.24
2.223	60.47	100.00	217	-8.67	-9.54	42.26	54	-11.74
2.673	56.47	100.00	98	-8.67	-9.54	38.26	54	-15.74
2.766	50.81	100.00	136	-6.84	-9.54	34.43	54	-19.57
3.122	52.47	100.00	18	-6.84	-9.54	36.09	54	-17.91
3.699	53.27	100.00	266	-5.64	-9.54	38.09	54	-15.91

Table 22. Open Field Radiated Emissions for 30MHz ~ 1GHz [Channel 20, Handset Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
85.910	31.60	1.00	31	-15.57	16.03	40.00	-23.97
338.760	27.60	1.00	41	-6.27	21.33	46.00	-24.67
463.870	28.80	1.00	214	-2.43	26.37	46.00	-19.63

Table 23. Open Field Radiated Emissions for 1GHz ~ 18GHz [Channel 20, Handset Horizontal]

Radiated Emission				Correction Factors	Distance	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
1.855	47.30	100.00	260	-8.67	-9.54	29.09	54	-24.91
2.239	55.14	100.00	27	-8.67	-9.54	36.93	54	-17.07
2.686	51.14	100.00	298	-8.67	-9.54	32.93	54	-21.07
2.783	47.81	100.00	133	-6.84	-9.54	31.43	54	-22.57
3.134	48.81	100.00	185	-6.84	-9.54	32.43	54	-21.57
3.711	47.61	100.00	275	-5.64	-9.54	32.43	54	-21.57
***							54	-21.57

Table 24. Open Field Radiated Emissions for 30MHz ~ 1GHz [Channel 20, Handset Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)		Limit (dBuV/m)	Margin (dB)
85.910	41.50	1.00	1	-15.57	25.93	40.00	-14.07
338.760	32.10	1.00	54	-6.27	25.83	46.00	-20.17
463.870	29.60	1.00	22	-2.43	27.17	46.00	-18.83

Table 25. Open Field Radiated Emissions for 1GHz ~ 18GHz [Channel 20, Handset Vertical]

Radiated Emission				Correction Factors	Distance	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant. H. (cm)	Table (°)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin (dB)
1.855	48.64	100.00	250	-8.67	-9.54	30.43	54	-23.57
2.239	61.14	100.00	247	-8.67	-9.54	42.93	54	-11.07
2.686	56.97	100.00	318	-8.67	-9.54	38.76	54	-15.24
2.783	49.81	100.00	13	-6.84	-9.54	33.43	54	-20.57
3.134	53.81	100.00	168	-6.84	-9.54	37.43	54	-16.57
3.711	52.27	100.00	75	-5.64	-9.54	37.09	54	-16.91

V. Verify Frequencies and Channels

Table 26. Verify the Frequency Pairs

Channel	Handset (MHz)	Base (MHz)	Channel	Handset (MHz)	Base (MHz)
1	923.9	902.3	11	925.9	904.3
2	924.1	902.5	12	926.1	904.5
3	924.3	902.7	13	926.3	904.7
4	924.5	902.9	14	926.5	904.9
5	924.7	903.1	15	926.7	905.1
6	924.9	903.3	16	926.9	905.3
7	925.1	903.5	17	927.1	905.5
8	925.3	903.7	18	927.3	905.7
9	925.5	903.9	19	927.5	905.9
10	925.7	904.1	20	927.7	906.1

Note:

1. This is for sure that all frequencies are in 902 MHz to 928 MHz.

Section 15.214(d) The security code is set automatic :

Every time when you place the handset in the base, your cordless will randomly select one of 65,530 possible security codes.

Appendix A

The antenna of the device is screwed inside the device, the user can not remove it freely without any tools from outside the device. This is comply with the FCC rules part 15.203




Connector Pane



900MZa.vi

Front Panel

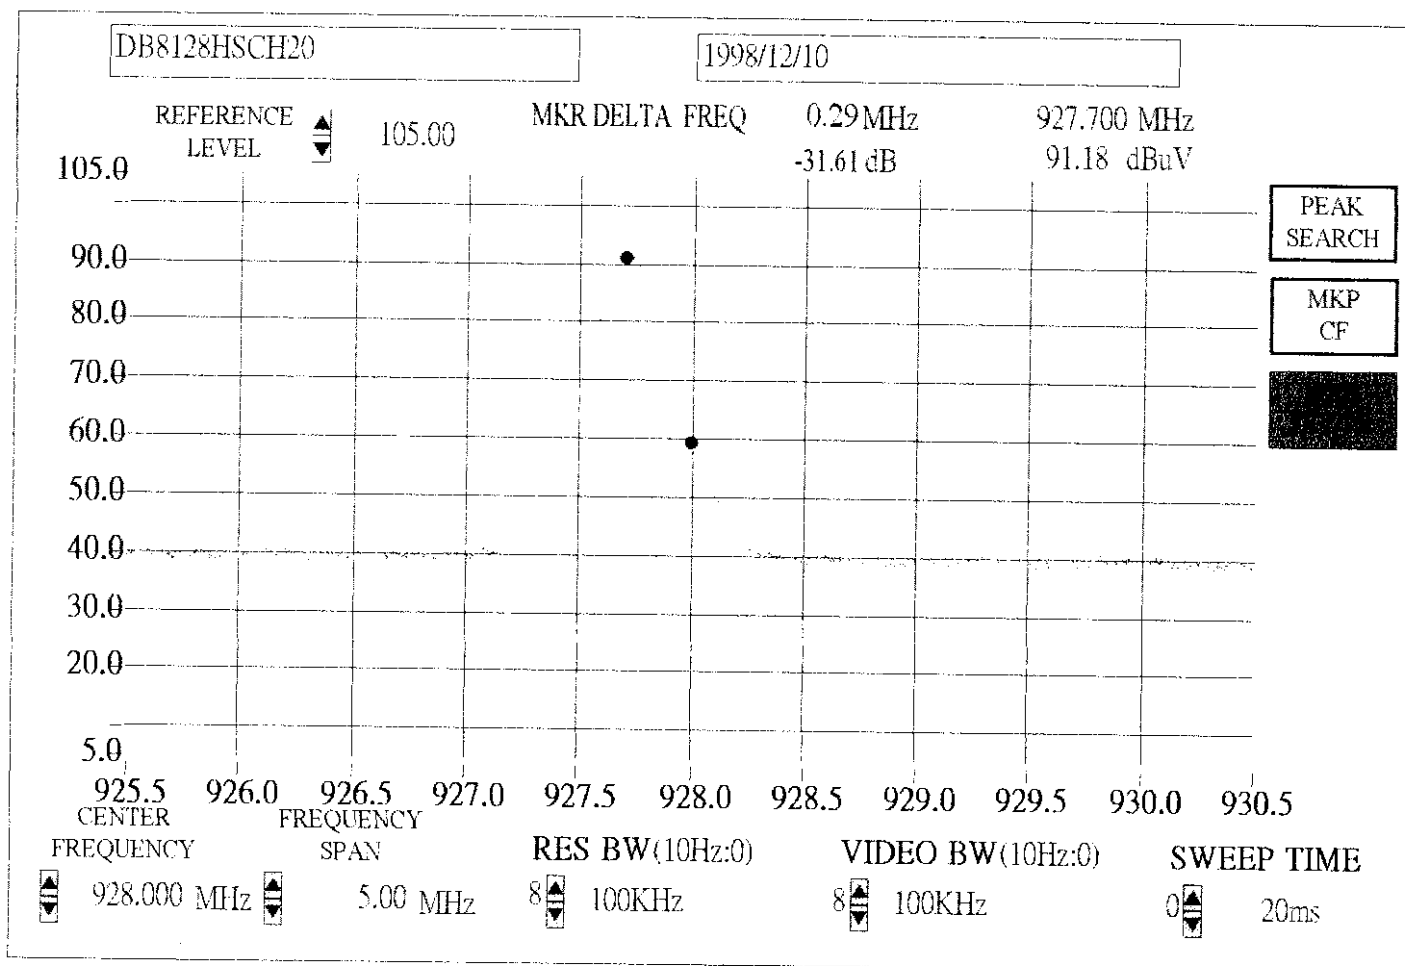



Connector Pane



900MZA.vi

Front Panel

