

P/N S181TC-2450R

Alternative Connectors

.SMA Reverse Polarity Plug(female)


P/N: S181TR-2450R

Electrical Properties:


Frequency Range: 2.4~2.5 GHz
 Impedance: 50Ω nominal
 VSWR: <2.0:1
 Gain: 2 dBi
 Radiation: Omni
 Polarization: Vertical
 Wave: Half Wave Dipole

Mechanical Properties:


Connector: TNC Plug(male)
 Material:
 Whip: Polyurethane(Black)
 Base: Polycarbonate(Black)
 Connector: Brass with black chrome plating
 Operation Temp.: -20°C to +65°C
 Storage Temp.: -30°C to +75°C

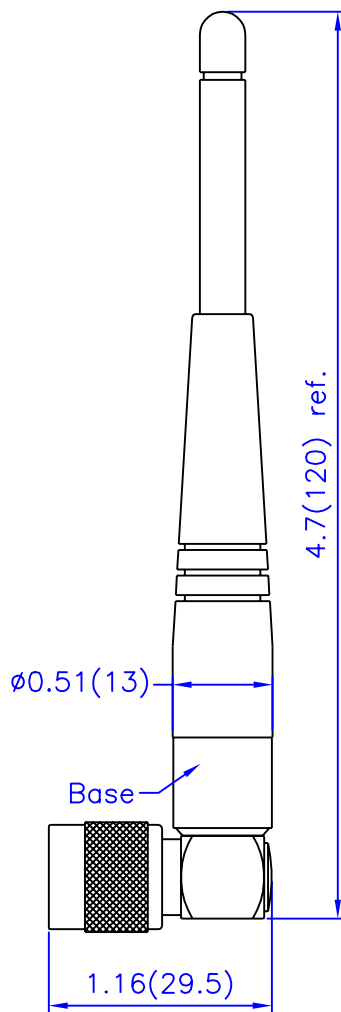

E-Plane Pattern @ 2.45GHz

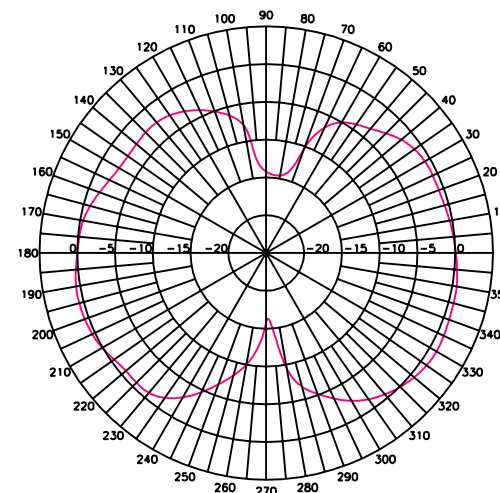


H-Plane Pattern @ 2.45GHz

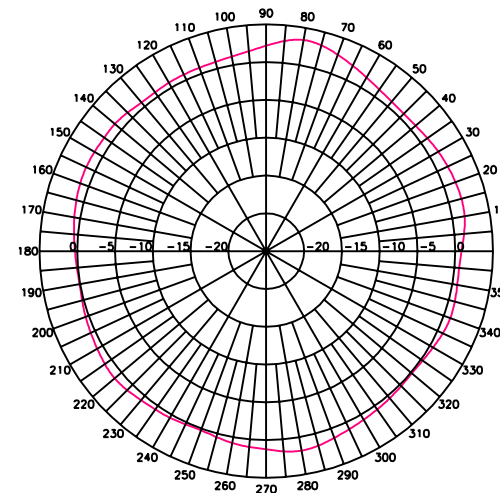

TITLE	2.4GHz Right Angle Antenna 181 Model		VER
UNIT	DWG. NO.	S181TC-2450R	
in.(mm)			
SCALE			
1:1			

Selection Guide

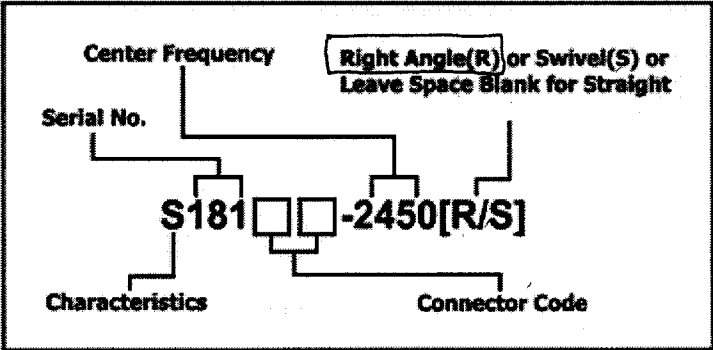

EXAMPLE: S181AH-2450S

Description: ISM band, 181 Series swivel, SMA reverse polarity plug connector at 2.45 GHz central frequency

Search Our Existing Products:
Start from the Antennas Types:

... Select Antennas Type ...

Characteristics Code

- M SMR (806~866MHz)
- S** ISM (902~928MHz, 2.4~2.5GHz)
- C Cellular (824~896MHz, 890~960MHz)
- P PCS/DCS (1850~1990MHz, 1710~1880MHz)
- L Land Mobile (VHF and UHF)
- X Dual Band (VHF and UHF)
- D Dual Band (Cellular/PCS)

Connector Code

- TC TNC Plug
- TR** TNC Reverse Polarity Plug
- AM SMA Plug
- AF SMA Jack
- AH SMA Reverse Polarity Plug
- AT SMA Reverse Thread Plug
- BC BNC Plug
- N N Plug
- MX MCX Plug
- MM MMCX Plug
- MU Mini-UHF Plug
- NC No Connector

If you have any special requirement, please contact us
OEM and ODM welcome in quantity.