



*Nemko USA, Inc.
11696 Sorrento Valley Rd., Suite F
San Diego, CA 92121-1024
Phone (858) 755-5525 Fax (858) 452-1810*



CERTIFICATION TEST REPORT

PART 15.247, SUBPART C

RSS-210 - LOW POWER LICENSE EXEMPT RADIO-
COMMUNICATION DEVICES (ALL FREQUENCY BANDS)

DECLARATION OF CONFORMANCE PROCEDURES TEST REPORT

For The **Rack Mount System**

Model: **DX200**

PREPARED FOR:

HME
14110 Stowe Drive
Poway, CA 92064

PREPARED ON **4-7-05**

REPORT NUMBER: **2005 030172-FCC**

PROJECT NUMBER: **25-172-HME**

Total Pages: 36

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	2 of 36

DOCUMENT HISTORY

REVISION	DATE	COMMENTS
-	4-7-05	Prepared By: A. LAUDANI
-	4-7-05	Initial Release: F. Fleury

NOTE: Nemko USA, Inc. hereby makes the following statements so as to conform to Chapter 10 (Test Reports) Requirements of ANSI C63.4 (1992) "Methods and Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz":

- The unit described in this report was received at Nemko USA, Inc.'s facilities on March 11, 2004. Testing was performed on the unit described in this report on March 11, 2004 to March 16, 2004.
- The Test Results reported herein apply only to the Unit actually tested, and to substantially identical Units.
- This report does not imply the endorsement of the Federal Communications Commission (FCC), NVLAP or any other government agency.

This Report is the property of Nemko USA, Inc., and shall not be reproduced, except in full, without prior written approval of Nemko USA, Inc. However, all ownership rights are hereby returned unconditionally to HME, and approval is hereby granted to HME and its employees and agents to reproduce all or part of this report for any legitimate business purpose without further reference to Nemko USA, Inc.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	3 of 36

TABLE OF CONTENTS

DOCUMENT HISTORY	2
CERTIFICATION	5
1. ADMINISTRATIVE DATA AND TEST SUMMARY	6
1.1.ADMINISTRATIVE DATA	6
1.2.TEST SUMMARY	6
2. SYSTEM CONFIGURATION	7
2.1.SYSTEM COMPONENTS AND POWER CABLES	7
2.2.DEVICE INTERCONNECTION AND I/O CABLES	7
2.3.DESIGN MODIFICATIONS FOR COMPLIANCE	8
2.4.DESIGN MODIFICATIONS FOR COMPLIANCE	8
3. DESCRIPTION OF TEST SITE AND EQUIPMENT	9
3.1.DESRIPTION OF TEST SITE.....	9
4. DESCRIPTION OF TESTING METHODS	10
4.1.INTRODUCTION	10
4.2.CONFIGURATION AND METHODS OF MEASUREMENTS FOR CONDUCTED EMISSIONS.....	12
4.3.CONFIGURATION AND METHODS OF MEASUREMENTS FOR FREQUENCY IDENTIFICATION	14
4.4.CONFIGURATION AND METHODS OF MEASUREMENTS FOR RADIATED EMISSIONS	16
4.5.SPREAD SPECTRUM DEVICES	18
5. TEST RESULTS	19
5.1.CONDUCTED EMISSIONS TEST DATA	19
5.2.RADIATED EMISSIONS TEST DATA	21
5.3.CFR 47 PART 15C §15.247 TEST RESULTS.....	22
TEST SETUP DIAGRAMS	
Figure 1. General EUT Test Setup Diagram	11
Figure 2. Conducted Emissions Test Setup Diagram.....	13
Figure 3. Frequency ID of Radiated Emissions Test Setup Diagram.....	15
Figure 4. Radiated Emissions Test Setup Diagram.....	17

<i>Nemko USA, Inc.</i>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	4 of 36

TEST CONFIGURATION PHOTOGRAPHS

Photograph 1. Conducted Emissions Test Configuration	24
Photograph 2. Radiated Emissions Test Configuration	25

APPENDICES

A. ADDITION CONDUCTED SPURIOUS PLOTS	
B. CONDUCTED & RADIATED EMISSIONS MEASUREMENT UNCERTAINTIES	26
C. NEMKO USA, INC.'S TEST EQUIPMENT & FACILITIES CALIBRATION PROGRAM	28
D. FCC AND NVLAP ACCREDITATION.....	30

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	5 of 36

CERTIFICATION

Nemko USA, Inc., an independent Electromagnetic Compatibility (EMC) Test Laboratory, produced this Test Report and performed the Radio Frequency Interference (RFI) testing and data evaluation contained herein.

Nemko USA, Inc.'s measurement facility is currently registered with the United States Federal Communications Commission (FCC) in accordance with the provisions of 47 United States Code (CFR) Part 2, Subpart I, Section 2.948(a). A current description of Nemko USA, Inc.'s measurement facility is on file with the FCC. Nemko USA Inc. has additionally satisfied the FCC that it complies with the requirements set forth in 47 CFR Part 2, Subpart I, Section 2.948(d) regarding the accreditation of EMC laboratories.

The RFI testing, test data collection and test data evaluation were accomplished in accordance with the ANSI C63.4-1992 Standard, and in accordance with the applicable sections of the FCC rules (47 CFR Parts 2 and 15). The testing was also accomplished in accordance with Industry Canada's ICES-003 standard for unintentional radiating device per EMCAB-3, Issue 3 (May 1998). The administrative summary of this test report provides a description of the test sample.

I hereby certify that the test data, test data evaluation, and equipment configurations used to compile this test report are a true and accurate representation of the test sample's radio frequency interference characteristics as of the test date(s), and, for the design of the test sample.

Test Supervisor: Chip Fleury

Chip Fleury, Frontline Manager Nemko USA, Inc.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	6 of 36

ADMINISTRATIVE DATA AND TEST SUMMARY

1.1. Administrative Data

CLIENT: **HME**
14110 Stowe Drive
Poway, CA 92064

CONTACT: Nirosh Wijayaratne

DATE (S) OF TEST: March 21, 2005 to March 23, 2005

EQUIPMENT UNDER TEST (EUT): **Rack Mount System**

FCCID# **BYMBS200**

Model **DX200**

Condition Upon Receipt Suitable for Test

TEST SPECIFICATION: FCC, Part 15.247, Subpart C,

Test Summary

<i>Specification</i>	<i>Frequency Range</i>	<i>Compliance Status</i>
FCC, CFR 47, Section 15.207	0.15 MHz - 30.00 MHz	PASS
FCC, CFR 47, Section 15.209	30 MHz – 10 th Harmonic	PASS
FCC CFR 47, §15.247 Plus Bandedge	2400-2483.5 MHz	PASS
RSS-210 - Low Power License Exempt Radio-communication Devices (All Frequency Bands)	2400-2483.5 MHz	PASS

Test Supervisor: Chip Fleury
Chip Fleury, Frontline Manager Nemko USA, Inc.

Refer to the test results section for further details.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	7 of 36

2. SYSTEM CONFIGURATION

The DX200 is a Rack Mount System.

2.1. System Components and Power Cables

DEVICE	MANUFACTURER	POWER CABLE
	MODEL # SERIAL #	
EUT - Rack Mount System	HME Rack Mount System Serial #:	Twin lead from Power Supply
Power supply	HME Power Supply Model # Serial #	3-conductor power cord

2.2. Device Interconnection and I/O Cables

CONNECTION	I/O CABLE
No connections	

<i>Nemko USA, Inc.</i>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	8 of 36

3. DESCRIPTION OF TEST SITE AND EQUIPMENT

3.1. Description of Test Site

The test site is located at 11696 Sorrento Valley Road, Suite F, San Diego, CA 92121. The site is physically located 18 miles Northwest of downtown San Diego. The general area is a valley 1.5 miles east of the Pacific Ocean. This particular part of the valley tends to minimize ambient levels, i.e. radio and TV broadcast stations and land mobile communications. The three and ten-meter Open Area Test Site (OATS) is located behind the office/lab building. It conforms to the normalized site attenuation limits and construction specifications as set in the EN 55022 (1987), CISPR 16 and 22 (1985) and ANSI C63.4-1992 documents. The OATS normalized site attenuation characteristics are verified for compliance every year.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	9 of 36

4. DESCRIPTION OF TESTING METHODS

4.1. Introduction


As required in 47 CFR, Parts 2 and 15, the methods employed to test the radiated and conducted emissions (as applicable) of the EUT are those contained within the American National Standards Institute (ANSI) document C63.4-1992, titled "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz." All applicable FCC Rule Sections that provide further guidance for performance of such testing are also observed.

For General Test Configuration please refer to Figure 1 on the following page.

Digital devices sold in Canada are required to comply with the Interference Causing Equipment Standard for Digital Apparatus, ICES-003. These test methods and limits are specified in the Canadian Standards Association's (CSA) Standard C108.8-M1983 (1-1-94 version) and are "essentially equivalent" with FCC, Part 15 and CISPR 22 (EN55022) rules for unintentional radiators per EMCAB-3, Issue 3 (May 1998). No further testing is required for compliance to ICES-003.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	10 of 36

Figure 1. General EUT Test Setup Diagram

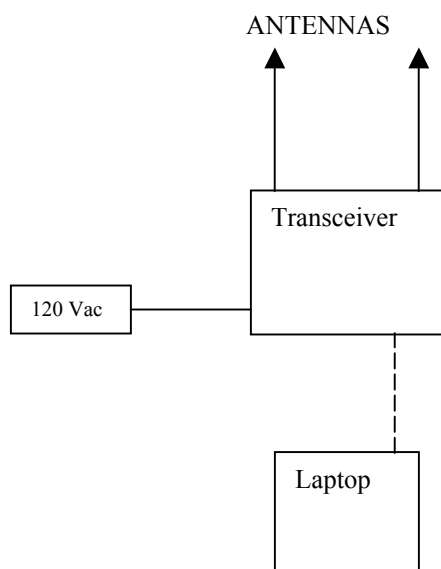

NOT TO SCALE

CONFIGURATION LEGEND

1. Test Laboratory
2. AC Power for Peripheral Devices (120V, 60 cycles, single phase)

<i>Nemko USA, Inc.</i>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	11 of 36


4.2. Configuration and Methods of Measurements for Conducted Emissions

Section 7 of ANSI C63.4 determines the general configuration of the EUT and associated equipment, as well as the test platform for conducted emissions testing. Tabletop devices are placed on a non-conducting surface 80 centimeters above the ground plane floor and 40 centimeters from the ground plane wall. The EUT and associated system are configured to operate continuously, representing a “normally operating” mode. The EUT is powered via a Line Impedance Stabilization Network (LISN). The emissions are recorded using the required bandwidth of 9 kHz in the quasi-peak mode. The average amplitude is also observed employing a 10 kHz bandwidth to determine the presence of broadband RFI. When such interference is caused by broadband sources (as defined by the FCC and ANSI Rules), the deviation guidelines contained in Section 11.3.1 of ANSI C63.4 are employed, which allows a correction factor of 13 dB to be subtracted from the quasi-peak reading. The emission levels are then compared to the applicable FCC limits to determine compliance.

For Conducted Emissions Test Configuration please refer to Figure 2 on the following page.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	12 of 36

Figure 2. Conducted Emissions Test Setup Diagram

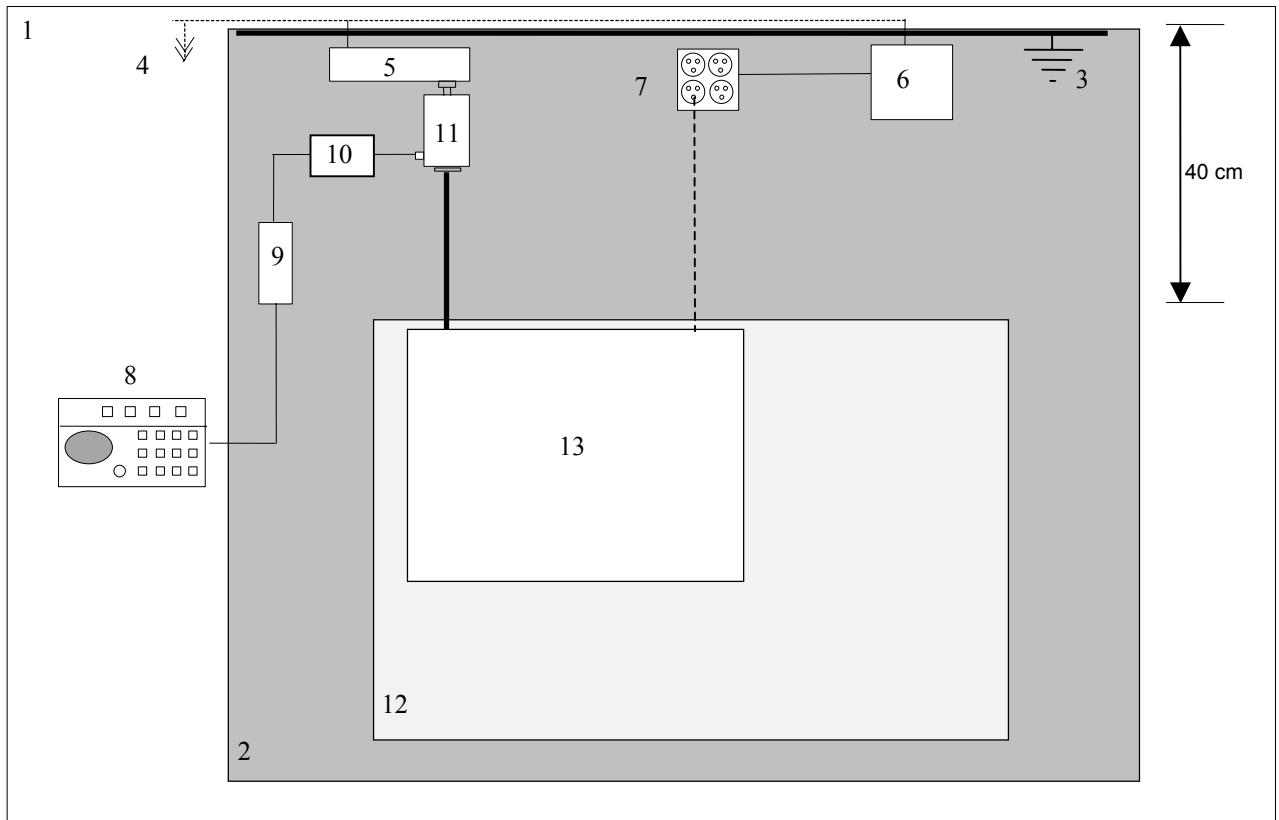

NOT TO SCALE

CONFIGURATION LEGEND

1. Test Laboratory (6 X 6 meters)
2. Ground Plane (15 square meters)
3. Vertical Conducting Wall (Grounded through Ground Plane via 10' ground rod)
4. AC Power for Devices
5. Power Line Filter, Lindgren, 120 dB, 30 amp
6. Line Impedance Stabilization Network (LISN) for peripheral devices
7. Power Distribution Box for peripheral devices
8. Spectrum Analyzer with Quasi-Peak Adapter
9. High Pass Filter
10. Transient Limiter
11. LISN for EUT
12. Non-Conducting table 80 cm above ground plane

<i>Nemko USA, Inc.</i>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	13 of 36


4.3. Configuration and Methods of Measurements for Frequency Identification

When performing all testing of equipment, the actual emissions of the EUT are segregated from ambient signals present within the laboratory or the open-field test range. Preliminary testing is performed to ensure that ambient signals are sufficiently low to allow for proper observation of the emissions from the EUT. Incoming power lines are filtered using a 120 dB, 30-ampere; 115/208-volt filter to assist in reducing ambient signals for tests of levels of conducted emissions. Ambients within the laboratory are compared to those noted at the nearby open-field site to discriminate between signals produced from the EUT and ambient signals. In the event that a significant emission is produced by the EUT at a frequency which is also demonstrating significant ambient signals, the spectrum analyzer is placed in the peak mode, the bandwidth is narrowed, the EUT's signal is centered on the analyzer, the scan width is expanded to 50 kHz while monitoring the audio to ensure that only the EUT signal is present, the analyzer is switched to quasi-peak mode, and the level of the EUT signal is recorded.

For Frequency ID Test Configuration please refer to Figure 3 on the following page.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	14 of 36

Figure 3. Frequency ID of Radiated Emissions Test Setup Diagram

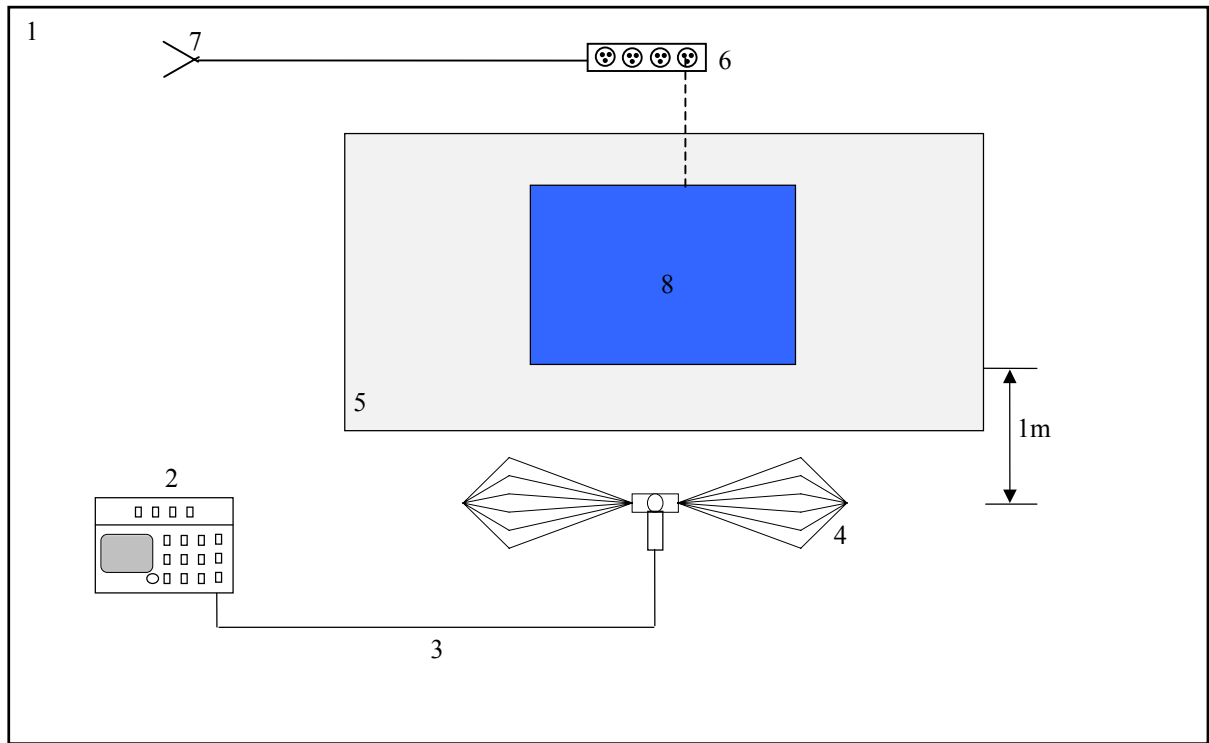

NOT TO SCALE

CONFIGURATION LEGEND

1. Test Laboratory
2. Spectrum Analyzer with Quasi-Peak Adapter
3. Coax interconnect from Antenna to Spectrum Analyzer
4. Receive Antenna (basic relative position)
5. Non-Conducting table 80 cm above ground plane
6. Power strip for EUT and peripherals
7. AC power for devices
8. EUT Wireless Base Station and Associated System

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	15 of 36

4.4. Configuration and Methods of Measurements for Radiated Emissions

Section 8 of ANSI C63.4 determines the general configuration and procedures for measuring the radiated emissions of equipment under test. Initially, the primary emission frequencies are identified inside the test lab by positioning a broadband receive antenna one meter from the EUT to locate frequencies of significant radiation. Next, the EUT and associated system are placed on a turntable on a ten meter open area test site (registered with the FCC in accord with its Rules and ANSI C63.4) and the receive antenna is located at a distance of ten meters from the EUT.

The EUT and associated system are configured to operate continuously, representing a “normally operating” mode. All significant radiated emissions are recorded when maximum radiation on each frequency is observed, in accordance with part 8 of ANSI C63.4-1992 and Section 15.33 of the FCC Rules. To ensure that the maximum emission at each discrete frequency of interest is observed, the receive antenna is varied in height from one to four meters and rotated to horizontal and vertical polarities, and the turntable is also rotated to determine the worst emitting configuration. The numerical results of the test are included herein to demonstrate compliance.

The numerical results that are applied to the emissions limits are arrived at by the following method:

Example: $A = RR + CL + AF$

A = Amplitude dBuV/M

RR = Receiver Reading dBuV

CL = cable loss dB

AF = antenna factor dBm-1

Example Frequency = 110MHz

18.5 dBuV (spectrum analyzer reading)

+3.0 dB (cable loss @ frequency)

21.5 dBuV

+15.4 dBm-1 (antenna factor @ frequency)


36.9 dBuV/M Final adjusted value

The final adjusted value is then compared to the appropriate emission limit to determine compliance.

For Radiated Emissions Test Configuration please refer to Figure 4 on the following page.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	16 of 36

Figure 4. Radiated Emissions Test Setup Diagram

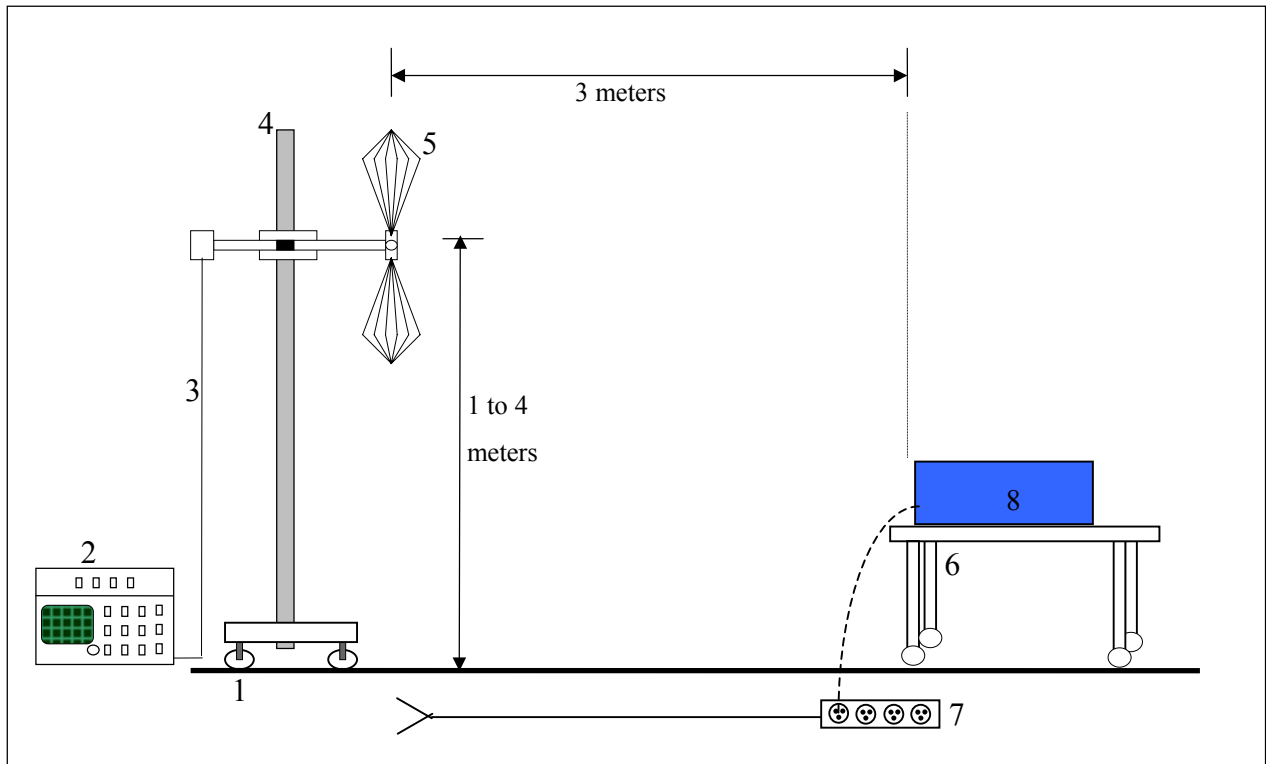

NOT TO SCALE



CONFIGURATION LEGEND

1. Ground plane (11 X 17 meters)
2. Spectrum Analyzer with Quasi-Peak Adapter
3. Coax interconnect from Receive Antenna to Spectrum Analyzer
4. Antenna Mast with motorized mounting assembly
5. Receive Antenna (basic relative position)
6. Non-Conducting table 80 cm above ground plane
7. AC power for devices
8. EUT: Wireless Base Station and Associated System

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	17 of 36

5. TEST RESULTS –Emissions Test Data

Client	HME	Temperature	71	°F
PAN #	25-172-HME	Relative Humidity	49	%
EUT Name	Rack Mount System	Barometric Pressure	30.2	Hg
EUT Model	DX200	Test Location	Enclosure 1	
Governing Doc	CFR 47, Part 15B	Test Engineer	Mike Krumweide	
Basic Standard	Sec. 15.207	Date	3-23-05	

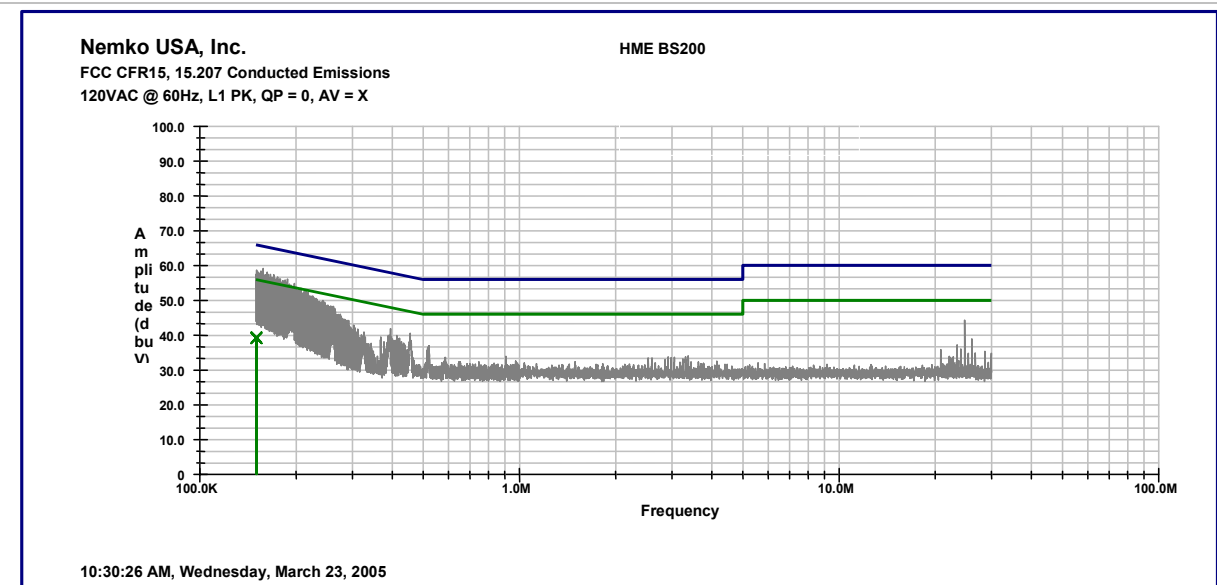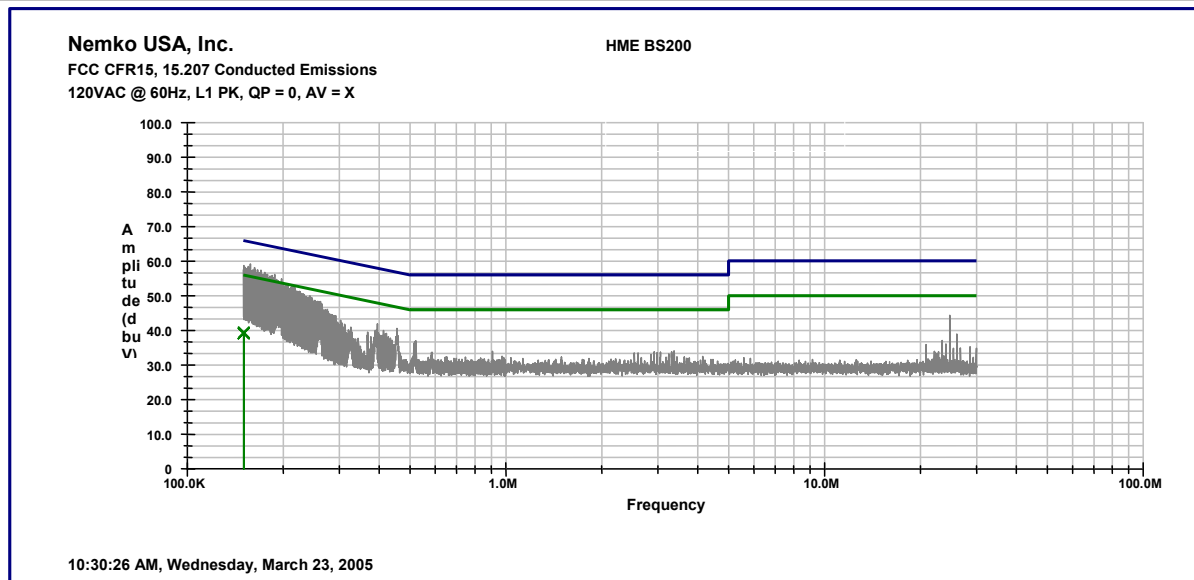

Radiated Emissions

Job #: 25-172-HME Test #:
Page 1 of 2

Specification :	CFR47 Part 15, Subpart B, Class B		Reference :	
Rod. Ant. #:	NA	Temp. (deg. C) :	72	Date : 3/22/2005
Bicon Ant.#:	116	Humidity (%) :	55	Time :
Log Ant.#:	110	EUT Voltage :	120	Staff : MK
DRG Ant. #	NA	EUT Frequency :	60	Photo ID:
Dipole Ant.#:	NA	Phase:	1	Peak Bandwidth: 100 kHz
Cable#:	SOATS2	Location:	SOATS	Video Bandwidth 100 kHz
Preamp#:	827	Distance:	3	
Spec An.#:	107			
QP #:	438			
PreSelect#:	NA			

[illegible]

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	21 of 36

CFR 47 Part 15c §15.247 Test Results

15.247 Testing was initiated by the ELECTRONIC TECHNOLOGY SYSTEMS test report G0M20306-7970-P-15 published in three parts for the BYMBASE6000 for use with two antennas, Model 181 and resumed at Nemko with the addition of the two 7dBi gain antennas, Model 171. Nemko Tests show the radiated spurious restricted bands and the band edge emissions still comply using the 7dBi gain antennas. The difference between the BYMBASE6000 and BYMBS200 were in regard to the analog audio circuit boards, with no changes to the RF boards. This summary lists the test results done by ELECTRONIC TECHNOLOGY SYSTEMS.

Antenna 1: 2 dBi gain -- Nearson Model 181

Antenna 2: 7 dBi gain – Nearson Model 171 – tested by Nemko

Base 6000 TestRpt1.pdf

Page 6 Use of an unique antenna connector

Page 7 Test Environment

Pages 8-14 Test Equipment

Page 17 Conductive and Radiated ERP/Peak Output Power

Pages 19--22 Out of Band Spurious Radiated Emissions, Radiated Emissions in Restricted bands

Page 23 Carrier Frequency Separation

Page 24 Number of Hopping Frequencies

Page 25 Time of Occupancy

Page 26 20 dB Bandwidth

Page 27 Band-edge Compliance

Base 6000 TestRpt2-1.pdf

Plots for Peak Output Power and Carrier Power for Antennas 1 & 2

Base 6000 TestRpt2-2.pdf

Plots for field strength of spurious emissions

Plots for Carrier frequency separation

Plots for Number of hopping frequencies

Plots for Time of Occupancy

Plots for 20 dB Bandwidth

Plots for Band-edge Compliance

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	22 of 36


Conducted RF Peak Output Power levels

Frequency	Conducted Power Level	ANT. GAIN*	ERP	ERP
GHz	dBm	DBi	dBm	W
2.401920	18.24	7	25.24	0.33
2.441664	18.68	7	25.68	0.37
2.481408	18.60	7	25.60	0.36

* Of antenna type with the most gain – Nearson Model 171

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	23 of 36


BANDEDGE PLOTS –Antenna 2

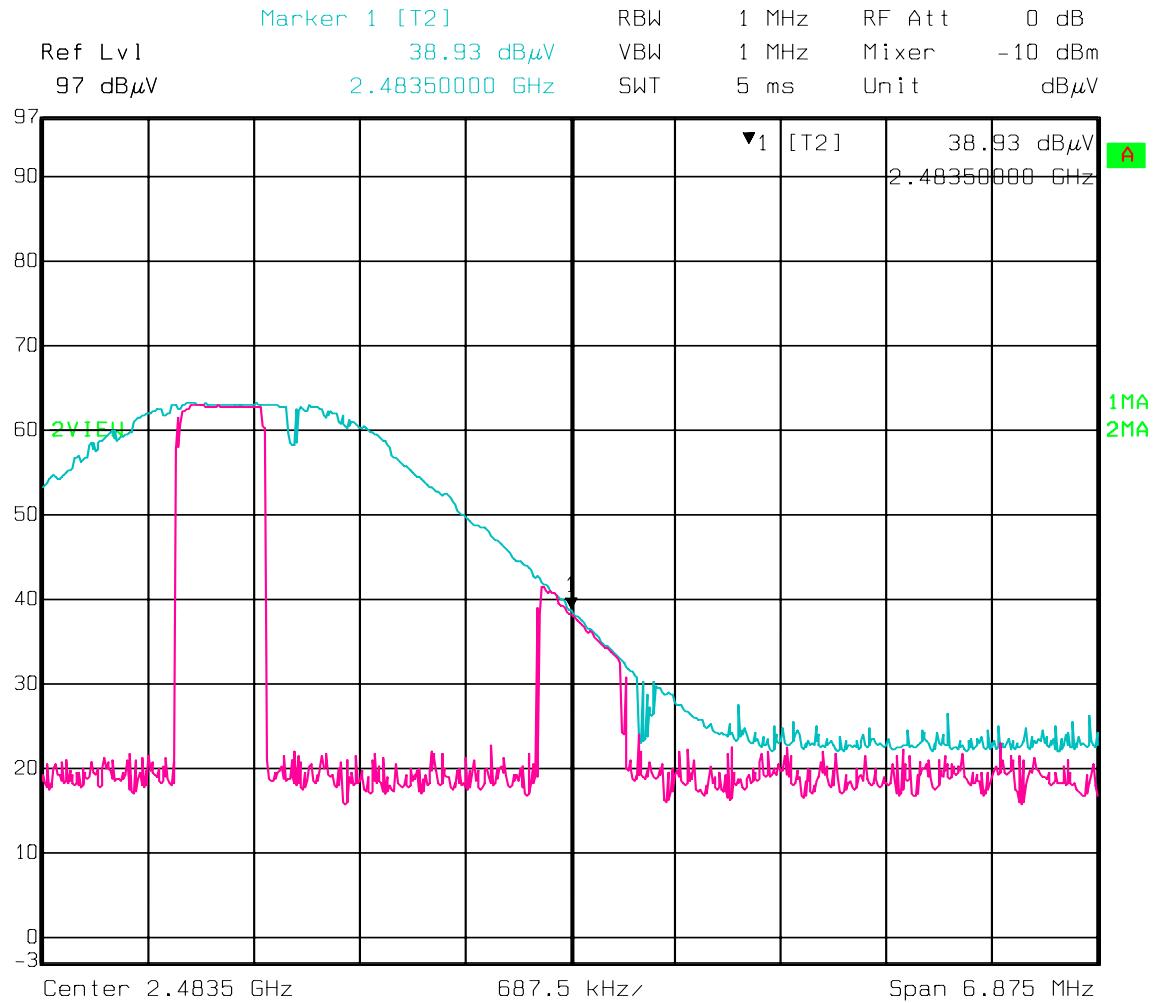

Date: 23.MAR.2005 15:16:42

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	24 of 36

BANDEGE PLOT—AVERAGE —Antenna 2

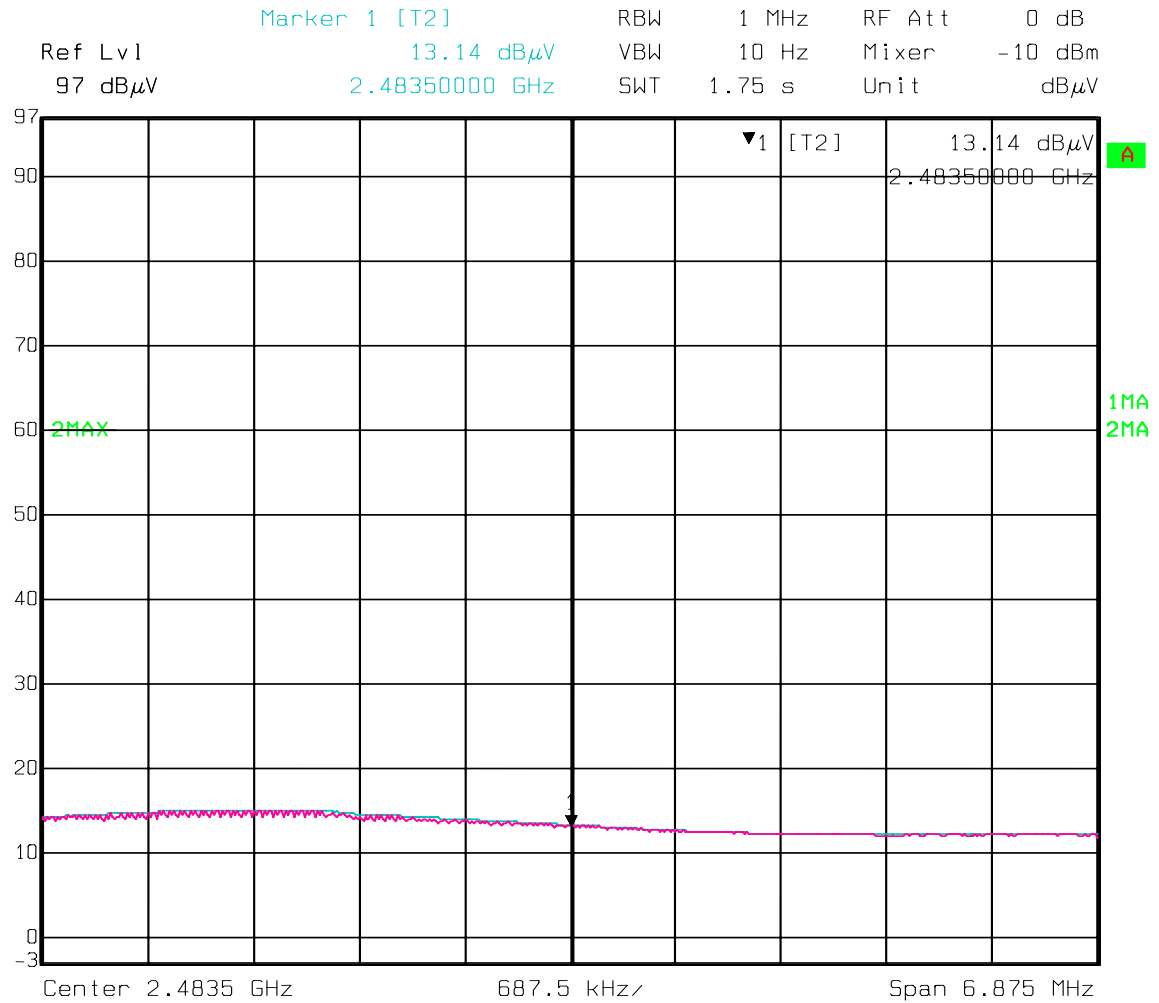

Date: 23.MAR.2005 15:17:50

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	25 of 36

Restricted band 2310—2390 MHz was also noted as having no emissions to be measured.



San Diego Headquarters:
11696 Sorrento Valley Rd.
San Diego, CA 92121
Tel: (858) 755-5525
Fax: (858) 452-1810


Radiated Emissions Data													
Complete	YES			Job # : 25-172-HME				Test # : 1					
Preliminary				Page 1				of 1					
Client Name :	HM Electronics												
EUT Name :	Rack Mount System												
EUT Model # :	DX200												
EUT ANTENNA Part # :	Nearson S171XX-2450S												
EUT Serial # :													
EUT Config. :	Continuous TX												
Specification :	EMISSIONS SEARCHED BETWEEN 1000 MHz AND 24,500 MHz.												
Rod. Ant. # :	NA			Temp. (deg. C) :		13		Reference :		Date : 3/23/2005			
Bicon Ant. # :	NA			Humidity (%) :		77				Time :			
Log Ant. # :	NA			EUT Voltage :		120 Vac				Staff : A. Laudani			
DRG Ant. # :	529			EUT Frequency :		60 Hz				Photo ID :			
Dipole Ant. # :	NA			Phase :		1				Peak Res Bandwidth: 1 MHz			
Cable# :	40ft			Location :		SOATS				Peak Video Bandwidth: 1 MHz			
Preamp# :	842			Distance :		3M				AVE Res Bandwidth: 1 MHz			
Spec An. # :	NA									AVE Video Bandwidth: 10 Hz			
QP # :	NA												
PreSelect# :	NA												

Meas. Freq. (MHz)	Vertical (dBuV)		Horizontal (dBuV)		CF (db)	Max Level (dBuV/m)		Spec. Limit (dBuV/m)		Margin dB		EUT Rotation	Ant. Height	Pass Fail Unc.	Comment
	pk	av	pk	av		pk	av	pk	av	pk	av				
4804.0	53.2	44.3	53.7	43	-1.2	52.5	43.1	74.0	54.0	-21.5	-10.9		1.5	Pass	lowest channel
4962.6	55.4	47.4	53	45.4	-1.2	54.2	46.2	74.0	54.0	-19.8	-7.8		1.5	Pass	mid channel
7443.9	51.2	43.6	52.9	45.1	5.8	58.7	50.9	74.0	54.0	-15.3	-3.1		1.5	Pass	mid channel
4883.2	53.8	44.4	54.7	50.5	-1.2	53.5	49.3	74.0	54.0	-20.5	-4.7		1.5	Pass	highest channel
7324.8	56.1	47.8	51.1	39.9	5.8	61.9	53.6	74.0	54.0	-12.1	-0.4		1.5	Pass	highest channel
Bandedge Measurement															
RBW:	1MHz	100 kHz	1MHz	100 kHz											Upper bandedge
2481.3	77.5	76.9	66.3	65.1	32.1	109.6	109						1.5		baseline peak power
		0.6		1.2											delta of peak power measured
2483.5	38.9		36.7		32.1	71	32.1	74.0		-3.0			1.5	Pass	1MHz/1MHz
2483.5		13.7		14.38	32.1	33.1	46.48		54.0		-7.5		1.5	Pass	1MHz/10Hz + delta
2483.5	17.9	8.7	17.3	8.8	32.1	50	40.9	74.0	54.0	-24.0	-13.1		1.5	Pass	Lower bandedge
2481.6	82.6		76.14		32.1	114.7	32.1						1.5		100 kHz/100 kHz
2400	28.4		19.89		32.1	60.5	32.1	94.7		-34.2			1.5	Pass	limit -20 dBc (peak)

BANDEDGE PLOT
OF PREVIOUS

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	27 of 36

Photograph 1. Conducted Emissions Test Configuration

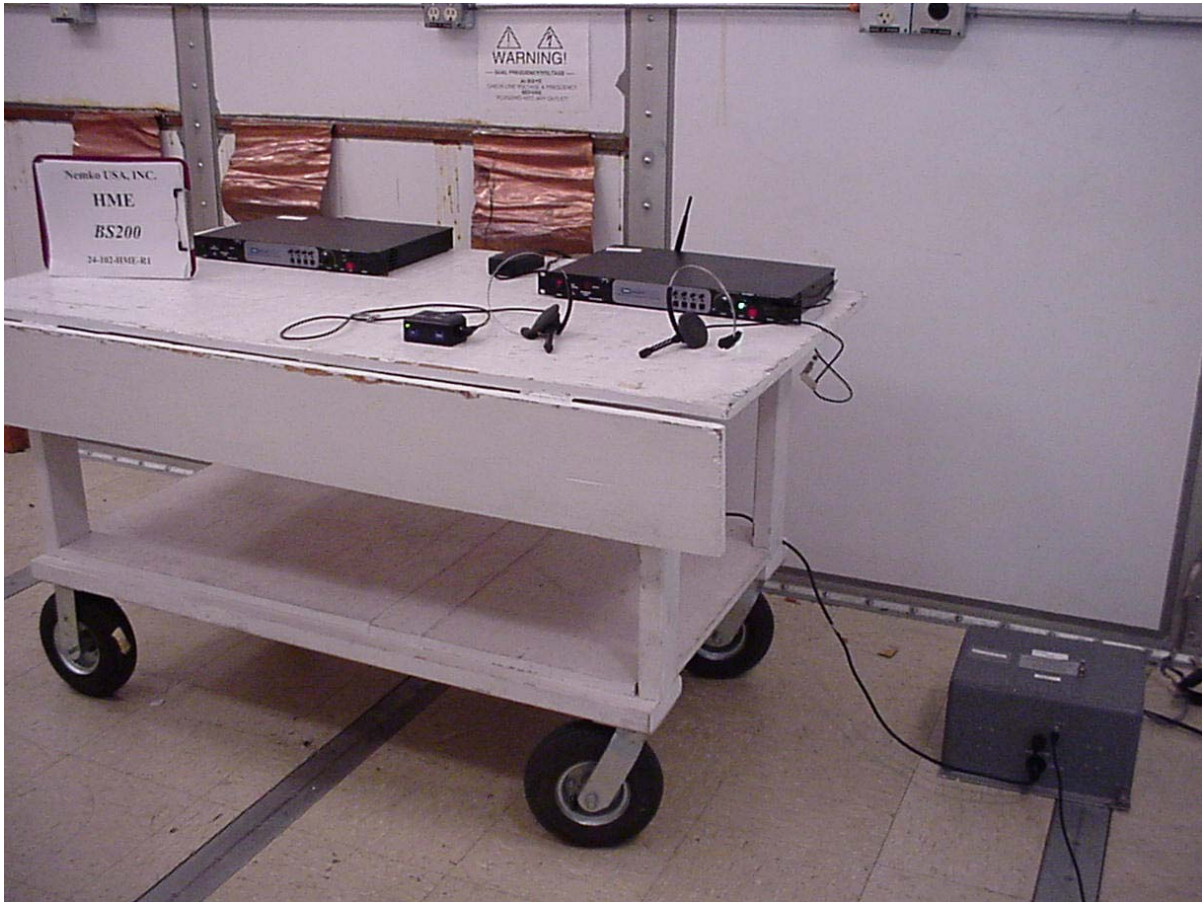

<i>Nemko USA, Inc.</i>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	28 of 36

Photograph 2. Radiated Emissions Test Configuration



Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	29 of 36

APPENDIX A

A Conducted & Radiated Emissions Measurement Uncertainties

1. Introduction

ISO Standard 17025 and ANSI/NCSL Z540-1(1994) require that all measurements contained in a test report be “traceable”. “Traceability” is defined in the *International Vocabulary of Basic and General Terms in Metrology* (ISO: 1993) as: “the property of the result of a measurement... whereby it can be related to stated references, usually national or international standards, through an unbroken chain of comparisons, *all having stated uncertainties*”.

The purposes of this Appendix are to “state the *Measurement Uncertainties*” of the conducted emissions and radiated emissions measurements contained in Section 5 of this Test Report, and to provide a practical explanation of the meaning of these measurement uncertainties.

2. Statement of the Worst-Case Measurement Uncertainties for the Conducted and Radiated Emissions Measurements Contained in This Test Report

Table 1: Worst-Case Expanded Uncertainty "U" of Measurement for a k=2 Coverage Factor

Conducted Emissions Measurement Detection Systems	Applicable Frequency Range	"U" for a k=2 Coverage Factor
HP8568B Spectrum Analyzer with QPA and HP8447F Preamplifier	150 kHz - 30 MHz	+/- 3.0 dB
HP8566B Spectrum Analyzer with QPA and Preselector	9 kHz - 30 MHz	+/- 2.9 dB
Radiated Emissions Measurement Detection Systems	Applicable Frequency Range	"U" for a k=2 Coverage Factor
HP8568B Spectrum Analyzer with QPA & HP8447F Preamplifier	30 MHz - 200 MHz	+4.0 dB, -4.1 dB
HP8568B Spectrum Analyzer with QPA & HP8447F Preamplifier	200 MHz-1000 MHz	+/- 3.5 dB
HP8566B Spectrum Analyzer with QPA & Preselector	30 MHz - 200 MHz	+3.9 dB, -4.0 dB
HP8566B Spectrum Analyzer with QPA & Preselector	200 MHz-1000 MHz	+/- 3.4 dB
HP8566B Spectrum Analyzer with QPA & HP 8449A Preamplifier	1 GHz - 18 GHz	+2.5 dB, -2.6 dB
HP8566B Spectrum Analyzer with QPA & HP8449A Preamplifier	18 GHz - 40 GHz	+/- 3.4 dB

NOTES:

1. Applies to 3 and 10 meter measurement distances
2. Applies to all valid combinations of Transducers (i.e. LISNs, Line Voltage Probes, and Antennas, as appropriate)
3. Excludes the Repeatability of the EUT

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	30 of 36

3. Practical Explanation of the Meaning of the Conducted and Radiated Emissions Measurement Uncertainties

In general, a “Statement of Measurement Uncertainty” means that with a certain (specified) confidence level, the “true” value of a measurand will be between a (stated) upper bound and a (stated) lower bound.

In the specific case of EMC Measurements in this test report, the measurement uncertainties of the conducted emissions measurements and the radiated emissions measurements have been calculated in accordance with the method detailed in the following documents:

- *ISO Guide to the Expression of Uncertainty in Measurement* (ISO, 1993)
- NIS 81:1994, *The Treatment of Uncertainty in EMC Measurements* (NAMAS, 1994)
- NIST Technical Note 1297(1994), *Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results* (NIST, 1994)

The calculation method used in these documents requires that the stated uncertainty of the measurements be expressed as an “*expanded uncertainty*”, U , with a $k=2$ coverage factor. The practical interpretation of this method of expressing measurement uncertainty is shown in the following example:

EXAMPLE: Assume that at 39.51 MHz, the (measured) radiated emissions level was equal to +26.5 dBuV/m, and that the +/- 2 standard deviations (i.e. 95% confidence level) measurement uncertainty was +/- 3.4 dB.

In the example above, the phrase “ $k = 2$ Coverage Factor” simply means that the measurement uncertainty is stated to cover +/-2 standard deviations (i.e. a 95% confidence interval) about the measurand. The measurand is the radiated emissions measurement of +26.5 dBuV/m at 39.51 MHz, and the 95% bounds for the uncertainty are -3.4 dB to + 3.4 dB. One can thus be 95% confident that the “true” value of the radiated emissions measurement is between +23.1 dBuV/m and +29.5 dBuV/m. *In effect, this means that in the above example there is only a 2.5% chance that the “true” radiated emissions value exceeds +29.5 dBuV/m.*

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	31 of 36

APPENDIX B

Nemko USA, Inc.'s Test Equipment & Facilities Calibration Program

Nemko USA, Inc. operates a comprehensive Periodic Calibration Program in order to ensure the validity of all test data. Nemko USA's Periodic Calibration Program is fully compliant to the requirements of NVLAP Policy Guide PG-1-1988, ANSI/NCSL Z540-1 (1994), ISO 10012-1 (1993-05-01), ISO Standard 17025, ISO-9000 and EN 45001. Nemko USA, Inc.'s calibrations program therefore meets or exceed the US national commercial and military requirements [N.B. ANSI/NCSL Z540-1 (1994) replaces MIL-STD-45662A].

Specifically, all of Nemko USA's *primary reference standard devices* (e.g. vector voltmeters, multimeters, attenuators and terminations, RF power meters and their detector heads, oscilloscope mainframes and plug-ins, spectrum analyzers, RF preselectors, quasi-peak adapters, interference analyzers, impulse generators, signal generators and pulse/function generators, field-strength meters and their detector heads, etc.) and certain *secondary standard devices* (e.g. RF Preamplifiers used in CISPR 11/22 and FCC Part 15/18 tests) are periodically recalibrated by:

- A Nemko USA-approved independent (third party) metrology laboratory that uses NIST-traceable standards and that is ISO Guide 25-accredited as a calibration laboratories by NIST; or,
- A Nemko USA-approved independent (third party) metrology laboratory that uses NIST-traceable standards and that is ISO Guide 25-accredited as a calibration laboratory by another accreditation body (such as A2LA) that is mutually recognized by NIST; or,
- A manufacturer of Measurement and Test Equipment (M&TE), if the manufacturer uses NIST-traceable standards and is ISO Guide 25-accredited as calibration laboratory either by NIST or by another accreditation body (such as A2LA) that is mutually recognized by NIST; or
- A manufacturer of M&TE (or by a Nemko USA-approved independent third party metrology laboratory) that is not ISO Guide 25-accredited. (In these cases, Nemko USA conducts an annual audit of the manufacturer or metrology laboratory for the purposes of proving traceability to NIST, ensuring that adequate and repeatable calibration procedures are being applied, and verifying conformity with the other requirements of ISO Guide 25).

<i>Nemko USA, Inc.</i>		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	32 of 36

In all cases, the entity performing the Calibration is required to furnish Nemko USA with a calibration test report and/or certificate of calibration, and a “calibration sticker” on each item of M&TE that is successfully calibrated.

Calibration intervals are normally one year, except when the manufacture advises a shorter interval (e.g. the HP 8568B Spectrum Analyzer is recalibrated every six months) or if US Government directives or client requirements demand a shorter interval. Items of instrumentation/related equipment which fail during routine use, or which suffer visible mechanical damage (during use or while in transit), are sidelined pending repair and recalibration. (Repairs are carried out either in-house [if minor] or by a Nemko USA-approved independent [third party] metrology laboratory, or by the manufacturer of the item of M&TE).


Each antenna used for CISPR 11 and CISPR 22 and FCC Part 15 and Part 18 radiated emissions testing (and for testing to the equivalent European Norms) is calibrated annually by either a NIST (or A2LA) ISO Standard 17025-Accredited third-party Antenna Calibration Laboratory or by the antenna’s OEM if the OEM is NIST or A2LA ISO Standard 17025-accredited as an antenna calibration laboratory. The antenna calibrations are performed using the methods specified in Annex G.5 of CISPR 16-1(1993) or ANSI C63.5-1991, including the “Three-Antenna Method”. Certain other kinds of antennas (e.g. magnetic-shielded loop antennas) are calibrated annually by either a NIST (or A2LA) ISO Standard 17025-accredited third-party antenna calibration laboratory, or by the antenna’s OEM if the OEM is NIST or A2LA ISO Standard 17025-accredited as an antenna calibration laboratory using the procedures specified in the latest version of SAE ARP-958.

In accordance with FCC and other regulations, Nemko USA recalibrates its suite of antennas used for radiated emissions tests on an annual basis. These calibrations are performed as a precursor to the FCC-required annual revalidation of the Normalized Site Attenuation properties of Nemko USA’s Open Area Test Site. Nemko USA, Inc. uses the procedures given in both Subclause 16.6 and Annex G.2 of CISPR 16-1 (1993), and, ANSI C63.4-1992 when performing the normalized site attenuation measurements.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	33 of 36


APPENDIX C

FCC and NVLAP Accreditation

United States Department of Commerce National Institute of Standards and Technology	 Certificate of Accreditation	NEMKO USA, INC. - SAN DIEGO EMC DIVISION SAN DIEGO, CA is recognized by the National Voluntary Laboratory Accreditation Program for satisfactory compliance with criteria set forth in NIST Handbook 150-2001, all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994. Accreditation is awarded for specific services, listed on the Scope of Accreditation, for: ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS
ISO/IEC 17025:1999 ISO 9002:1994	December 31, 2004 Effective through	 For the National Institute of Standards and Technology NVLAP Lab Code: 200116-0

NVLAP-01C (06-01)

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	34 of 36

National Institute of Standards and Technology		National Voluntary Laboratory Accreditation Program
Scope of Accreditation		
ISO/IEC 17025:1999 ISO 9002:1994	 Page: 1 of 3	
ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS		
NVLAP LAB CODE 200116-0		
NEMKO USA, INC. - SAN DIEGO EMC DIVISION 11696 Sorrento Valley Road, Suite F San Diego, CA 92121 Mr. Ricky Hill Phone: 858-755-5525 x207 Fax: 858-793-9914 E-Mail: rick.hill@nemko.com URL: http://www.nemko.com		
NVLAP Code Designation / Description		
Emissions Test Methods:		
12/CIS14 12/CIS14a 12/CIS14b 12/CIS14c 12/CIS22 12/CIS22a	CISPR 14-1 (March 30, 2000): Limits and Methods of Measurement of Radio interference Characteristics of Household Electrical Appliances, Portable Tools and Similiar Electrical Apparatus - Part 1: Emissions EN 55014-1 (1993) with Amendments A1 (1997) & A2 (1999) AS/NZS 1044 (1995) CNS 13783-1 IEC/CISPR 22 (1997) and EN 55022 (1998): Limits and methods of measurement of radio disturbance characteristics of information technology equipment IEC/CISPR 22 (1993): Limits and methods of measurement of radio disturbance characteristics of information technology equipment, Amendment 1 (1995) and Amendment 2 (1996)	
December 31, 2004 <i>Effective through</i>  <i>For the National Institute of Standards and Technology</i>		

NVLAP-01S (06-01)

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	35 of 36



ISO/IEC 17025:1999
ISO 9002:1994

Scope of Accreditation



Page: 2 of 3

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

NVLAP LAB CODE 200116-0

NEMKO USA, INC. - SAN DIEGO EMC DIVISION

NVLAP Code Designation / Description

12/CIS22b	CNS 13438 (1997): Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment
12/EM02a	IEC 61000-3-2, Edition 2.1 (2001-10), EN 61000-3-2 (2000), and AS/NZS 2279.1 (2000): Electromagnetic compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions (equipment input current ≤ 16 A)
12/EM03b	IEC 61000-3-3 (2002-03), edition 1.1: EMC - Part 3-3: Limits - Limitations of voltage changes, voltage fluctuations and flicker, in public low-voltage supply-systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connections
12/F18	FCC OST/MP-5 (1986): FCC Methods of Measurement of Radio Noise Emissions for ISM Equipment (cited in FCC Method 47 CFR Part 18 - Industrial, Scientific, and Medical Equipment)
12/FCC15b	ANSI C63.4 (2001) with FCC Method - 47 CFR Part 15, Subpart B: Unintentional Radiators
12/T51	AS/NZS CISPR 22 (2002) and AS/NZS 3548 (1997): Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment

December 31, 2004

Effective through

For the National Institute of Standards and Technology

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
Mar 15, 2005	BS200 for the DX200 System FCC Test Report	2005 030174 FCC	36 of 36

National Institute
of Standards and Technology



National Voluntary
Laboratory Accreditation Program

ISO/IEC 17025:1999
ISO 9002:1994

Scope of Accreditation



Page: 3 of 3

**ELECTROMAGNETIC COMPATIBILITY
AND TELECOMMUNICATIONS**

NVLAP LAB CODE 200116-0

NEMKO USA, INC. - SAN DIEGO EMC DIVISION

NVLAP Code Designation / Description

Immunity Test Methods:

12/I01	IEC 61000-4-2, Edition 2.1 (2001) including Amds. 1 & 2 and EN 61000-4-2: Electrostatic Discharge Immunity Test
12/I02	IEC 61000-4-3 (2002) and EN 61000-4-3: Radiated Radio-Frequency Electromagnetic Field Immunity Test
12/I03	IEC 61000-4-4 (1995) + Amd. 1 (2000) & Amd. 2 (2001) and EN 61000-4-4: Electrical Fast Transient/Burst Immunity Test
12/I04	IEC 61000-4-5 (1995) + Amd. 1 (2000) and EN 61000-4-5: Surge Immunity Test
12/I05	IEC 61000-4-6, Edition 2.0 (2003) and EN 61000-4-6: Immunity to Conducted Disturbances, Induced by Radio-Frequency Fields
12/I06	IEC 61000-4-8, Edition 1.1 (2001) and EN 61000-4-8: Power Frequency Magnetic Field Immunity Test
12/I07	IEC 61000-4-11 (1994) + Amd. 1 (2000) and EN 61000-4-11: Voltage Dips, Short Interruptions and Voltage Variations Immunity Tests

December 31, 2004

Effective through

For the National Institute of Standards and Technology