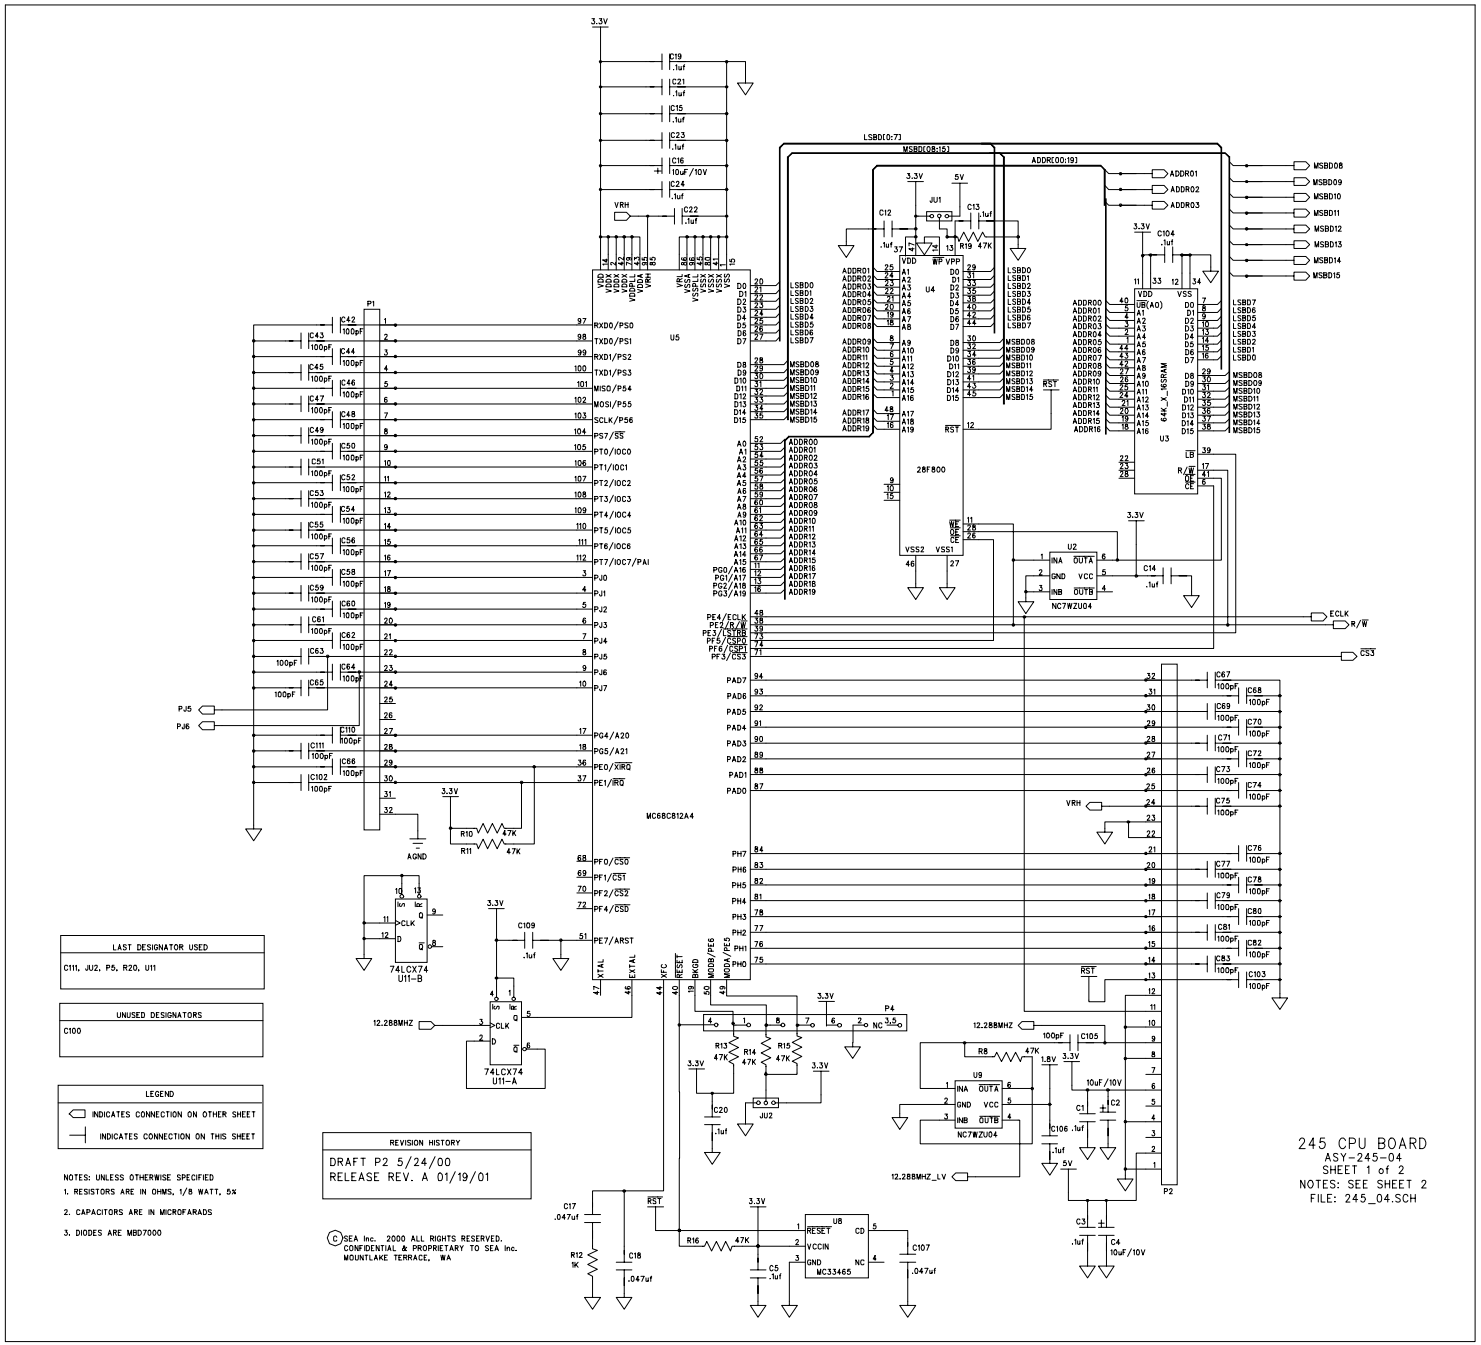
MC68CB12A4
U5
28F800
U4
64K_X_16SRAM
U3
NC7WZU04
U2
U9
MC33465
U8
74LCX74
U11-B
U11-A
P1
P2
P4
P5
P6
ECLK
R/W
CS3
12.288MHZ
12.288MHZ_LV
AGND
VRH
LSBD[0:7]
MSBD[08:15]
ADDR[00:19]
LAST DESIGNATOR USED
C111, JU2, P5, R20, U11
UNUSED DESIGNATORS
C100
LEGEND
INDICATES CONNECTION ON OTHER SHEET
INDICATES CONNECTION ON THIS SHEET
REVISION HISTORY
DRAFT P2 5/24/00
RELEASE REV. A 01/19/01
NOTES: UNLESS OTHERWISE SPECIFIED
1. RESISTORS ARE IN OHMS, 1/8 WATT, 5%
2. CAPACITORS ARE IN MICROFARADS
3. DIODES ARE MBD7000
©SEA Inc. 2000 ALL RIGHTS RESERVED.
CONFIDENTIAL & PROPRIETARY TO SEA Inc.
MOUNTLAKE TERRACE, WA
245 CPU BOARD
ASY-245-04
SHEET 1 of 2
NOTES: SEE SHEET 2
FILE: 245_04.SCH

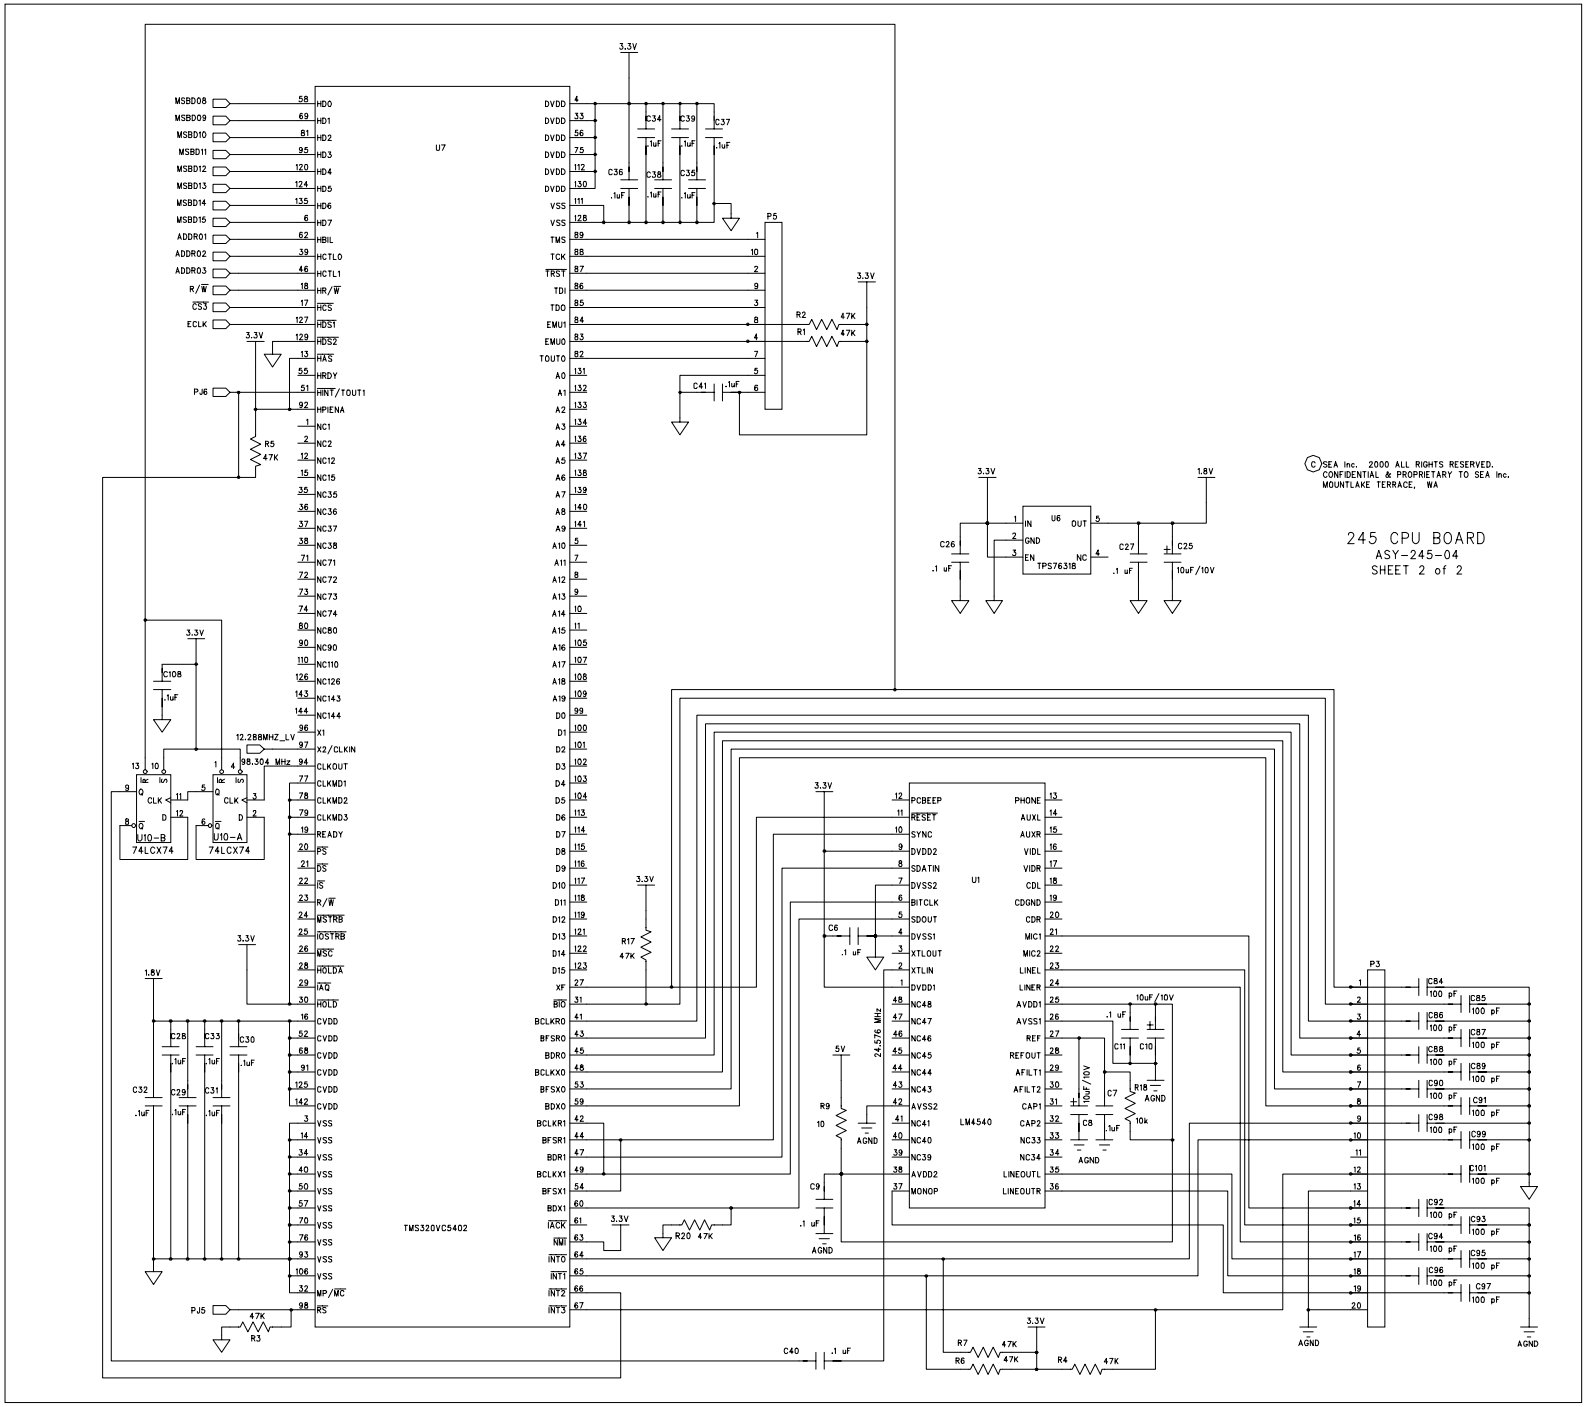


© SEA Inc. 2000 ALL RIGHTS RESERVED.
CONFIDENTIAL & PROPRIETARY TO SEA Inc.
MOUNTLAKE TERRACE, WA

245 CPU BOARD
ASY-245-04
SHEET 2 of 2