



Test Report

Date : 2022-04-28

No. : HMD22040015

Page 1 of 52

Applicant : Hip Shing Electronics Limited
Units 1.2&3,20/F., New Treasure Centre, 10., Ng Fong Street, San Po Kong, Kowloon, Hong Kong

Supplier / Manufacturer : Dongguan Zhi Cheng Electronic Products Co., Ltd.
No.32 Shangbao Road, 188 Industrial Zone, Pingshan, Tangxia, Dongguan, Guangdong, China

Description of Sample(s) : Submitted sample(s) said to be
Product: Internet, DAB/DAB+ and FM Digital Radio With Bluetooth and CD
Brand Name: REVO
Model No.: SUPERCD
FCC ID: BZAIDFB2215H5X

Date Samples Received : 2022-04-08

Date Tested : 2022-04-08 to 2022-04-24

Investigation Requested : Perform Electro Magnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.10:2013 for FCC Certification.

Conclusions : The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remarks : WIFI (802.11a/n20/n40)


Dr.CHAN Kwok Hung, Brian
Authorized Signatory



The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taiipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 2 of 52

CONTENT:

Cover	Page 1 of 52
Content	Page 2 of 52
<u>1.0 General Details</u>	
1.1 Test Laboratory	Page 3 of 52
1.2 Equipment Under Test [EUT] Description of EUT operation	Page 3 of 52
1.3 Antenna Details	Page 3 of 52
1.4 Date of Order	Page 3 of 52
1.5 Submitted Sample(s)	Page 3 of 52
1.6 Test Duration	Page 3 of 52
1.7 Country of Origin	Page 3 of 52
<u>2.0 Technical Details</u>	
2.1 Investigations Requested	Page 4-5 of 52
2.2 Test Standards and Results Summary	Page 6 of 52
<u>3.0 Test Results</u>	
3.1 Emission	Page 7-46 of 52
<u>Appendix A</u>	
List of Measurement Equipment	Page 47 of 52
<u>Appendix B</u>	
Photograph(s) of Product	Page 48-52 of 52

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taiipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 3 of 52

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd.
EMC Laboratory
10 Dai Wang Street, Taipo Industrial Estate, New Territories, Hong Kong
Telephone: 852 2666 1888
Fax: 852 2664 4353

1.2 Equipment Under Test [EUT]

Description of Sample(s)

Product: Internet, DAB/DAB+ and FM Digital Radio With Bluetooth and CD
Manufacturer: Dongguan Zhi Cheng Electronic Products Co., Ltd.
No.32 Shangbao Road, 188 Industrial Zone, Pingshan, Tangxia, Dongguan, Guangdong, China
Brand Name: REVO
Model Number: SUPERCD
Rating: 20.0Vd.c. by adapter
The AC/DC adapter was provided by the applicant with following details:
Brand name: REVO, Model no.: BQ60A-2003000-D
Input: 100-240Va.c. 50/60Hz 1500mA, Output: 20.0Vd.c. 3.0A 60.0W

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is an Internet, DAB/DAB+ and FM Digital Radio With Bluetooth and CD. The transmission signal is digital modulated with channel frequency range 5150-5250MHz.

1.3 Antenna Details

Antenna Type: PCB antenna
Antenna Gain: 3.5dBi

1.4 Date of Order

2022-04-08

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2022-04-08 to 2022-04-24

1.7 Country of Origin

China

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 4 of 52

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 Regulations and ANSI C63.10:2013 for FCC Certification.
According FCC KDB 789033D02 Measurement Guidance, Duty cycle $\geq 98\%$.
The test mode sample is provided by manufacturer.

2.1.0 Operating conditions for the EUT

The sample went into test mode handled by the manufacturer using the software.



The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015


Page 5 of 52

2.1.1 EUT Duty cycle

The EUT shall be configured or modified to transmit continuously. The intent is to test at 100% duty cycle; however, a small reduction in duty cycle (to no lower than 98%) is permitted if required by the EUT for amplitude control purposes.

The test mode sample is provided by manufacturer.

Test setup

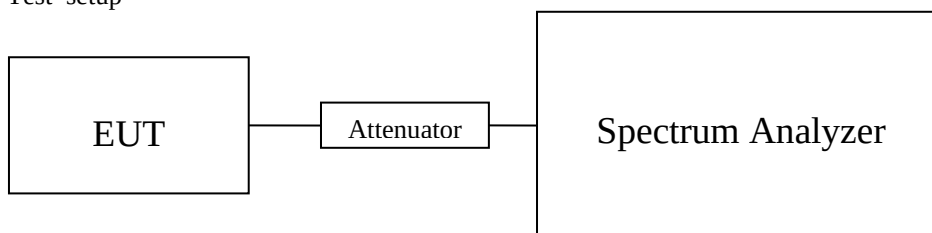


Results

Mode	On Time (msec)	Period (msec)	Duty Cycle X (Linear)	Duty Cycle (%)*
802.11a	1	1	1	100
802.11n20	1	1	1	100
802.11n40	1	1	1	100

-*: If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Duty cycle: 802.11a

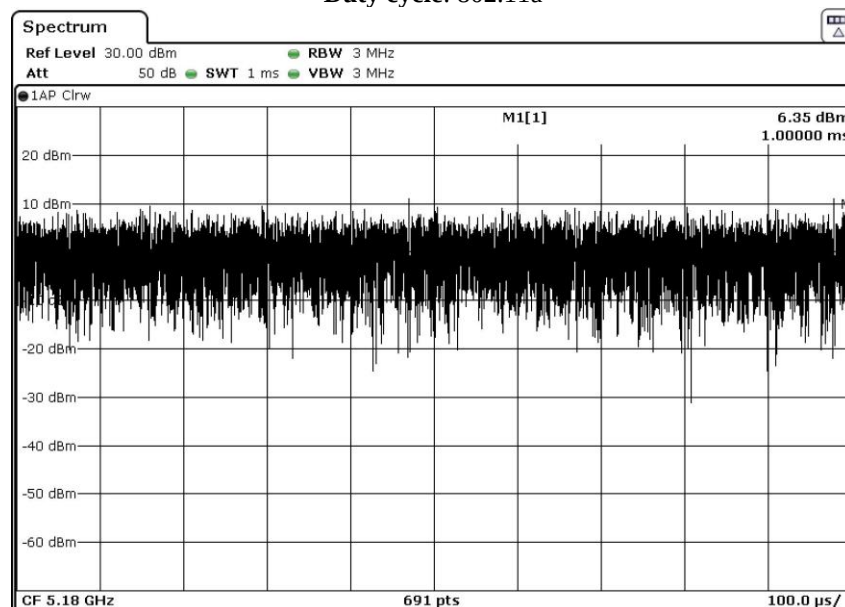



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 6 of 52

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Failed	N/A
Maximum Peak Output Power	15.407(a)(1)	ANSI C63.10:2013	N/A	☒	☐	☐
Radiated Emissions	15.205(a) 15.209 15.407(b)	ANSI C63.10:2013	N/A	☒	☐	☐
Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10:2013	N/A	☒	☐	☐
Power Spectral Density	15.407(a)	ANSI C63.10:2013	N/A	☒	☐	☐
26 dB Bandwidth and 99%Occupied Bandwidth	15.407(a)	ANSI C63.10:2013	N/A	☒	☐	☐
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	☒	☐	☐

Note: N/A - Not Applicable

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 7 of 52

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Output Power


Test Requirement:	FCC 47CFR 15.407(a)(1)
Test Method:	ANSI C63.10: 2013/ KDB 789033D02
Test Date:	2022-04-18
Mode of Operation:	WIFI Tx mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Test Method:

The RF output of the EUT was connected to the peak power meter. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

Test Setup:

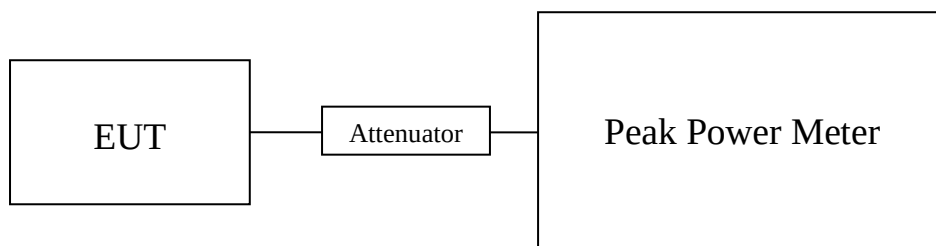

Note: a temporary antenna connector was soldered to the RF output.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 8 of 52

Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

For Digital Transmission systems in 5150-5250 MHz Band: 0.25 Watt (24dBm)

Results of WiFi mode 802.11 a, (5150MHz to 5250MHz) : Pass (TX Unit) Maximum conducted output power

Channel	Frequency (MHz)	Output Power (Watt)
Low	5180	0.01263
Middle	5200	0.01013
High	5240	0.01193

Results of WiFi mode 802.11 n20, (5150MHz to 5250MHz) : Pass (TX Unit) Maximum conducted output power

Channel	Frequency (MHz)	Output Power (Watt)
Low	5180	0.01308
Middle	5200	0.01056
High	5240	0.01265

Results of WiFi mode 802.11 n40, (5190MHz to 5230MHz): Pass (TX Unit) Maximum conducted output power

Channel	Frequency (MHz)	Output Power (Watt)
Low	5190	0.01158
High	5230	0.01148

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB
1GHz to 26GHz 1.7dB

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 9 of 52

3.1.2 Radiated Emissions

Test Requirement:	FCC 47CFR 15.209 & 15.407(b)
Test Method:	ANSI C63.10:2013/ KDB 789033D02
Test Date:	2022-04-19
Mode of Operation:	WIFI Tx mode

Ambient Temperature: 24°C Relative Humidity: 52% Atmospheric Pressure: 101 kPa

Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015

Page 10 of 52

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av)

RBW: 10kHz
VBW: 30kHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold

30MHz – 1GHz (QP)

RBW: 120kHz
VBW: 120kHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold


Above 1GHz (Pk)

RBW: 1MHz
VBW: 1MHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold

Above 1GHz (Av)

RBW: 1MHz
VBW: 10Hz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold

Test Setup:

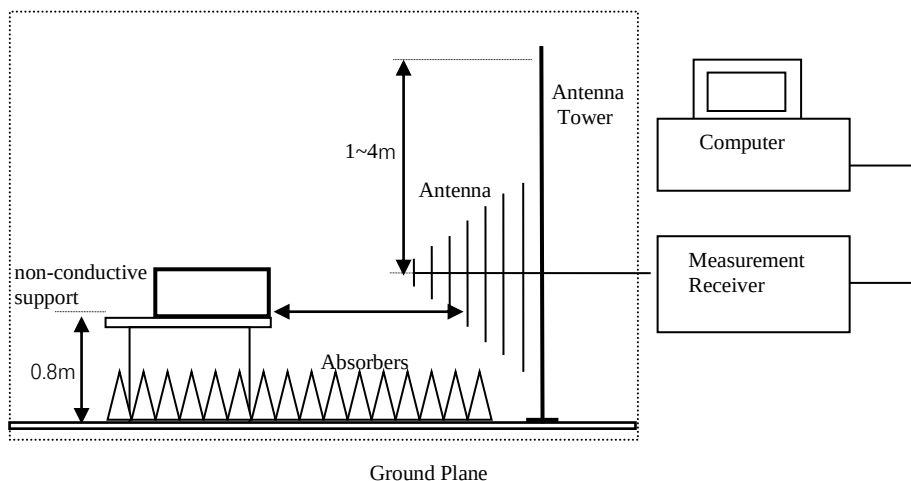

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 11 of 52

Limits for Radiated Emissions FCC 47 CFR 15.407]:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
(2) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further.
(3) The provisions of §15.205 apply to intentional radiators operating under this section.

Frequency Range	Quasi-Peak Limits
[MHz]	[μV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (5180.0 MHz) (802.11a) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured Level	Correction Factor	Field Strength	Field Strength	Limit	E-Field Polarity
MHz	dBμV	dB/m	dBμV/m	μV/m	μV/m	
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (5180.0 MHz) (802.11a) (1GHz-40GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Limit @3m	Margin	E-Field Polarity
MHz	dBμV	dB/m	dBμV/m	dBμV/m	dB	
10360.0	48.8	8.90	57.7	68.2	10.5	Vertical
10360.0	47.6	8.70	56.3	68.2	11.9	Horizontal
15540.0	45.5	11.80	57.3	68.2	10.9	Vertical
15540.0	44.6	11.90	56.5	68.2	11.7	Horizontal
20720.0	44.3	12.20	56.5	68.2	11.7	Vertical
20720.0	43.6	12.40	56.0	68.2	12.2	Horizontal
25900.0	42.9	13.10	56.0	68.2	12.2	Vertical
25900.0	43.2	13.30	56.5	68.2	11.8	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28

Page 12 of 52

No. : HMD22040015

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
10360.0	31.9	8.90	40.8	54.0	13.2	Vertical
10360.0	32.0	8.70	40.7	54.0	13.3	Horizontal
15540.0	30.5	11.80	42.3	54.0	11.7	Vertical
15540.0	31.4	11.90	43.3	54.0	10.7	Horizontal
20720.0	30.2	12.20	42.4	54.0	11.6	Vertical
20720.0	30.6	12.40	43.0	54.0	11.0	Horizontal
25900.0	30.5	13.10	43.6	54.0	10.4	Vertical
25900.0	31.2	13.30	44.5	54.0	9.5	Horizontal

Result of Tx mode (5200 MHz) (802.11a) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (5200 MHz) (802.11a) (1GHz-40GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
10400.0	48.5	8.90	57.4	68.2	10.8	Vertical
10400.0	47.3	8.70	56.0	68.2	12.2	Horizontal
15600.0	45.6	11.80	57.4	68.2	10.8	Vertical
15600.0	44.1	11.90	56.0	68.2	12.2	Horizontal
20800.0	43.9	12.20	56.1	68.2	12.1	Vertical
20800.0	43.7	12.40	56.1	68.2	12.1	Horizontal
26000.0	42.1	13.10	55.2	68.2	13.0	Vertical
26000.0	41.0	13.30	54.3	68.2	13.9	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28

Page 13 of 52

No. : HMD22040015

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
10400.0	32.6	8.90	41.5	54.0	12.5	Vertical
10400.0	30.6	8.70	39.3	54.0	14.7	Horizontal
15600.0	31.4	11.80	43.2	54.0	10.8	Vertical
15600.0	30.5	11.90	42.4	54.0	11.6	Horizontal
20800.0	30.2	12.20	42.4	54.0	11.6	Vertical
20800.0	29.3	12.40	41.7	54.0	12.3	Horizontal
26000.0	28.4	13.10	41.5	54.0	12.5	Vertical
26000.0	28.1	13.30	41.4	54.0	12.6	Horizontal

Result of Tx mode (5240 MHz) (802.11a) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBμV	Correction Factor dB/m	Field Strength dBμV/m	Field Strength μV/m	Limit μV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (5240 MHz) (802.11a) (1GHz-25GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
10480.0	49.5	8.90	58.4	68.2	9.8	Vertical
10480.0	48.9	8.70	57.6	68.2	10.6	Horizontal
17520.0	45.1	11.80	56.9	68.2	11.3	Vertical
17520.0	44.7	11.90	56.6	68.2	11.6	Horizontal
20960.0	43.6	12.20	55.8	68.2	12.4	Vertical
20960.0	44.2	12.40	56.6	68.2	11.6	Horizontal
26200.0	43.9	13.10	57.0	68.2	11.2	Vertical
26200.0	43.4	13.30	56.7	68.2	11.5	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28

Page 14 of 52

No. : HMD22040015

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
10480.0	31.5	8.90	40.4	54.0	13.6	Vertical
10480.0	32.3	8.70	41.0	54.0	13.0	Horizontal
17520.0	30.5	11.80	42.3	54.0	11.7	Vertical
17520.0	30.4	11.90	42.3	54.0	11.7	Horizontal
20960.0	29.2	12.20	41.4	54.0	12.6	Vertical
20960.0	29.0	12.40	41.4	54.0	12.6	Horizontal
26200.0	27.4	13.10	40.5	54.0	13.5	Vertical
26200.0	27.5	13.30	40.8	54.0	13.2	Horizontal

Result of Tx mode (5180 MHz) (802.11n20) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (5180 MHz) (802.11n20) (1GHz-40GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
10360.0	48.2	8.90	57.1	68.2	11.1	Vertical
10360.0	47.9	8.70	56.6	68.2	11.6	Horizontal
15540.0	43.2	11.80	55.0	68.2	13.2	Vertical
15540.0	44.1	11.90	56.0	68.2	12.2	Horizontal
20720.0	42.9	12.20	55.1	68.2	13.1	Vertical
20720.0	44.1	12.40	56.5	68.2	11.7	Horizontal
25900.0	42.2	13.10	55.3	68.2	13.0	Vertical
25900.0	42.3	13.30	55.6	68.2	12.7	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 15 of 52

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
10360.0	33.2	8.90	42.1	54.0	11.9	Vertical
10360.0	32.6	8.70	41.3	54.0	12.7	Horizontal
15540.0	30.7	11.80	42.5	54.0	11.5	Vertical
15540.0	30.2	11.90	42.1	54.0	11.9	Horizontal
20720.0	28.9	12.20	41.1	54.0	12.9	Vertical
20720.0	28.3	12.40	40.7	54.0	13.3	Horizontal
25900.0	28.1	13.10	41.2	54.0	12.8	Vertical
25900.0	29.0	13.30	42.3	54.0	11.7	Horizontal

Result of Tx mode (5200 MHz) (802.11n20) (1GHz-40GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dBμV	Correction Factor dB/m	Field Strength dBμV/m	Field Strength μV/m	Limit μV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (5200 MHz) (802.11n20) (1GHz-40GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
10400.0	47.6	8.90	56.5	68.2	11.7	Vertical
10400.0	46.3	8.70	55.0	68.2	13.2	Horizontal
15600.0	42.2	11.80	54.0	68.2	14.2	Vertical
15600.0	43.1	11.90	55.0	68.2	13.2	Horizontal
20800.0	44.2	12.20	56.4	68.2	11.8	Vertical
20800.0	43.6	12.40	56.0	68.2	12.2	Horizontal
26000.0	41.9	13.10	55.0	68.2	13.2	Vertical
26000.0	42.3	13.30	55.6	68.2	12.6	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28

Page 16 of 52

No. : HMD22040015

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
10400.0	33.2	8.90	42.1	54.0	11.9	Vertical
10400.0	32.1	8.70	40.8	54.0	13.2	Horizontal
15600.0	31.6	11.80	43.4	54.0	10.6	Vertical
15600.0	30.5	11.90	42.4	54.0	11.6	Horizontal
20800.0	29.5	12.20	41.7	54.0	12.3	Vertical
20800.0	29.3	12.40	41.7	54.0	12.3	Horizontal
26000.0	27.9	13.10	41.0	54.0	13.0	Vertical
26000.0	27.7	13.10	40.8	54.0	13.2	Horizontal

Result of Tx mode (5240 MHz) (802.11n20) (1GHz-40GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (5240 MHz) (802.11n20) (1GHz-40GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
10480.0	47.2	8.90	56.1	68.2	12.1	Vertical
10480.0	47.4	8.70	56.1	68.2	12.1	Horizontal
17520.0	44.3	11.80	56.1	68.2	12.1	Vertical
17520.0	44.2	11.90	56.1	68.2	12.1	Horizontal
20960.0	43.9	12.20	56.1	68.2	12.1	Vertical
20960.0	43.2	12.40	55.6	68.2	12.6	Horizontal
26200.0	44.1	13.10	57.2	68.2	11.0	Vertical
26200.0	43.6	13.30	56.9	68.2	11.3	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 17 of 52

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
10480.0	33.1	8.90	42.0	54.0	12.0	Vertical
10480.0	32.6	8.70	41.3	54.0	12.7	Horizontal
17520.0	29.5	11.80	41.3	54.0	12.7	Vertical
17520.0	28.9	11.90	40.8	54.0	13.2	Horizontal
20960.0	29.6	12.40	42.0	54.0	12.0	Vertical
20960.0	29.4	12.40	41.8	54.0	12.2	Horizontal
26200.0	29.3	13.10	42.4	54.0	11.6	Vertical
26200.0	28.3	13.30	41.6	54.0	12.4	Horizontal

Result of Tx mode (5190.0 MHz) (802.11n40) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dBμV	Correction Factor dB/m	Field Strength dBμV/m	Field Strength μV/m	Limit μV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (5190 MHz) (802.11n40) (1GHz-40GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
10380.0	47.5	8.90	56.4	68.2	11.8	Vertical
10380.0	46.9	8.70	55.6	68.2	12.6	Horizontal
15570.0	43.6	11.80	55.4	68.2	12.8	Vertical
15570.0	44.1	11.90	56.0	68.2	12.2	Horizontal
20760.0	43.2	12.20	55.4	68.2	12.8	Vertical
20760.0	44.3	12.40	56.7	68.2	11.5	Horizontal
25950.0	44.2	13.10	57.3	68.2	11.0	Vertical
25950.0	44.3	13.30	57.6	68.2	10.6	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 18 of 52

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
10380.0	33.1	8.90	42.0	54.0	12.0	Vertical
10380.0	32.9	8.70	41.6	54.0	12.4	Horizontal
15570.0	30.5	11.80	42.3	54.0	11.7	Vertical
15570.0	30.4	11.90	42.3	54.0	11.7	Horizontal
20760.0	31.1	12.20	43.3	54.0	10.7	Vertical
20760.0	30.5	12.40	42.9	54.0	11.1	Horizontal
25950.0	30.3	13.10	43.4	54.0	10.6	Vertical
25950.0	29.2	13.30	42.5	54.0	11.5	Horizontal

Result of Tx mode (5230 MHz) (802.11n40) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dBμV	Correction Factor dB/m	Field Strength dBμV/m	Field Strength μV/m	Limit μV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (5230 MHz) (802.11n40) (1GHz-40GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dBμV	Correction Factor dB/m	Field Strength dBμV/m	Limit @3m dBμV/m	Margin dB	E-Field Polarity
10460.0	47.6	8.90	56.5	68.2	11.7	Vertical
10460.0	46.2	8.70	54.9	68.2	13.3	Horizontal
15690.0	44.2	11.80	56.0	68.2	12.2	Vertical
15690.0	43.1	11.90	55.0	68.2	13.2	Horizontal
20920.0	44.3	12.20	56.5	68.2	11.7	Vertical
20920.0	44.9	12.40	57.3	68.2	10.9	Horizontal
26150.0	44.1	13.10	57.2	68.2	11.0	Vertical
26150.0	43.6	13.30	56.9	68.2	11.4	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28

Page 19 of 52

No. : HMD22040015

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
10460.0	33.2	8.90	42.1	54.0	11.9	Vertical
10460.0	32.9	8.70	41.6	54.0	12.4	Horizontal
15690.0	31.1	11.80	42.9	54.0	11.1	Vertical
15690.0	32.0	11.90	43.9	54.0	10.1	Horizontal
20920.0	31.5	12.20	43.7	54.0	10.3	Vertical
20920.0	30.5	12.40	42.9	54.0	11.1	Horizontal
26150.0	29.3	13.10	42.4	54.0	11.6	Vertical
26150.0	29.0	13.30	42.3	54.0	11.7	Horizontal

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement (9kHz-30MHz): 2.0dB

uncertainty (30MHz -1GHz): 4.9dB

(1GHz -26GHz): 4.02dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015

Page 20 of 52


Undesirable emission:

Result: (Lowest)-802.11a 5180MHz, Undesirable emission of Band-edge Compliance

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5140.250000	-36.3	9.3	-27.0	PASS
5147.250000	-36.8	9.8	-27.0	PASS
5148.250000	-37.2	10.2	-27.0	PASS
5149.750000	-37.2	10.2	-27.0	PASS
4802.750000	-37.3	10.2	-27.0	PASS
5149.250000	-37.3	10.3	-27.0	PASS
5146.750000	-37.4	10.4	-27.0	PASS
5144.750000	-37.6	10.6	-27.0	PASS
5143.250000	-37.7	10.7	-27.0	PASS
5145.750000	-37.7	10.7	-27.0	PASS
5145.250000	-37.7	10.7	-27.0	PASS
5142.750000	-37.8	10.8	-27.0	PASS
5148.750000	-38.0	11.0	-27.0	PASS
5139.250000	-38.0	11.0	-27.0	PASS
5147.750000	-38.1	11.1	-27.0	PASS

Band Edge

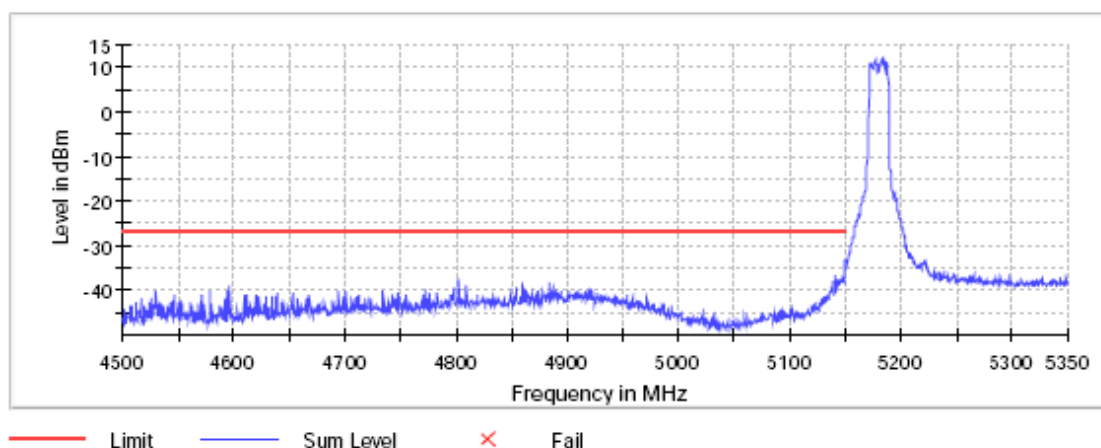

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28

Page 21 of 52


No. : HMD22040015

Result: (High)-802.11a 5240MHz, Undesirable emission of Band-edge Compliance

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5451.750000	-43.1	16.1	-27.0	PASS
5445.750000	-43.4	16.4	-27.0	PASS
5455.250000	-43.5	16.5	-27.0	PASS
5455.750000	-43.6	16.6	-27.0	PASS
5452.250000	-43.6	16.6	-27.0	PASS
5456.250000	-43.8	16.8	-27.0	PASS
5446.250000	-43.8	16.8	-27.0	PASS
5447.250000	-44.0	17.0	-27.0	PASS
5350.250000	-44.0	17.0	-27.0	PASS
5453.250000	-44.0	17.0	-27.0	PASS
5454.750000	-44.0	17.0	-27.0	PASS
5460.000000	-44.0	17.0	-27.0	PASS
5459.750000	-44.0	17.0	-27.0	PASS
5458.750000	-44.1	17.1	-27.0	PASS
5442.250000	-44.1	17.1	-27.0	PASS

Band Edge

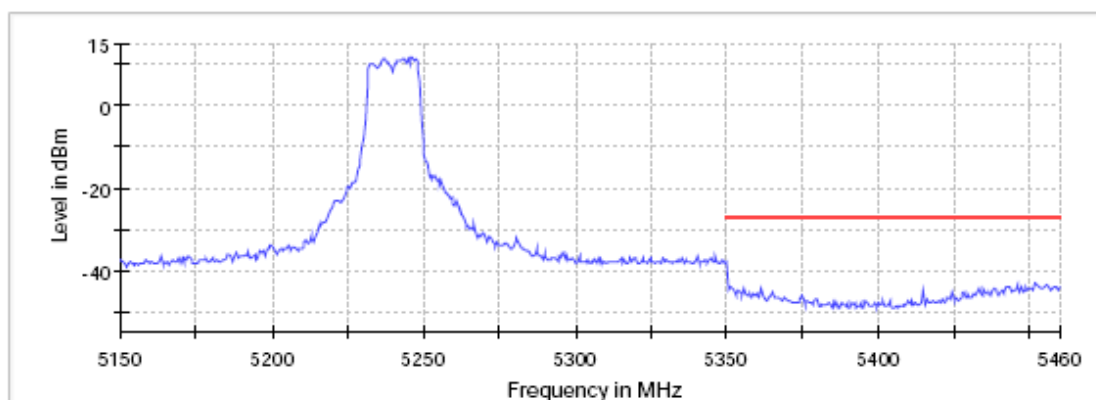

— Limit — Sum Level × Fail

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28

Page 22 of 52


No. : HMD22040015

Result: (Lowest)-802.11n20 5180MHz,Undesirable emission of Band-edge Compliance

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5148.250000	-36.1	8.9	-27.0	PASS
5148.750000	-37.1	10.1	-27.0	PASS
5147.750000	-37.2	10.2	-27.0	PASS
5149.750000	-37.2	10.2	-27.0	PASS
5146.750000	-37.3	10.3	-27.0	PASS
5145.750000	-37.3	10.3	-27.0	PASS
5147.250000	-37.4	10.4	-27.0	PASS
4848.250000	-37.7	10.7	-27.0	PASS
5149.250000	-37.7	10.7	-27.0	PASS
5142.750000	-37.8	10.8	-27.0	PASS
5145.250000	-37.8	10.8	-27.0	PASS
5139.250000	-37.9	10.9	-27.0	PASS
5143.250000	-38.0	11.0	-27.0	PASS
5144.750000	-38.1	11.1	-27.0	PASS
5146.250000	-38.4	11.4	-27.0	PASS

Band Edge

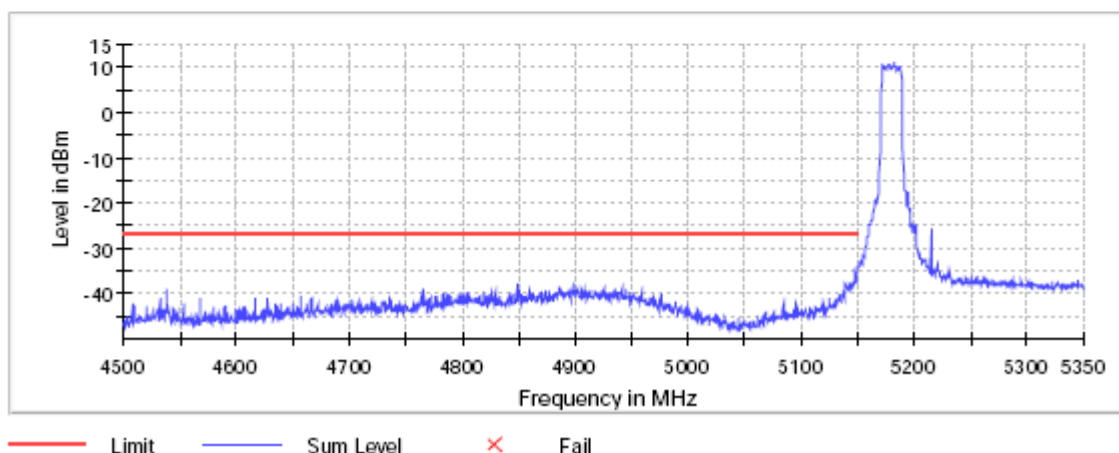

— Limit — Sum Level × Fail

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015


Page 23 of 52

Result: (High)-802.11n20 5240MHz, Undesirable emission of Band-edge Compliance

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5458.750000	-41.8	14.8	-27.0	PASS
5460.000000	-41.8	14.8	-27.0	PASS
5459.750000	-41.8	14.8	-27.0	PASS
5454.250000	-41.9	14.9	-27.0	PASS
5455.250000	-41.9	14.9	-27.0	PASS
5455.750000	-42.3	15.3	-27.0	PASS
5440.250000	-42.3	15.3	-27.0	PASS
5453.250000	-42.3	15.3	-27.0	PASS
5452.250000	-42.3	15.3	-27.0	PASS
5457.250000	-42.4	15.4	-27.0	PASS
5442.750000	-42.4	15.4	-27.0	PASS
5454.750000	-42.5	15.5	-27.0	PASS
5457.750000	-42.7	15.7	-27.0	PASS
5445.750000	-42.7	15.7	-27.0	PASS
5459.250000	-42.8	15.8	-27.0	PASS

Band Edge

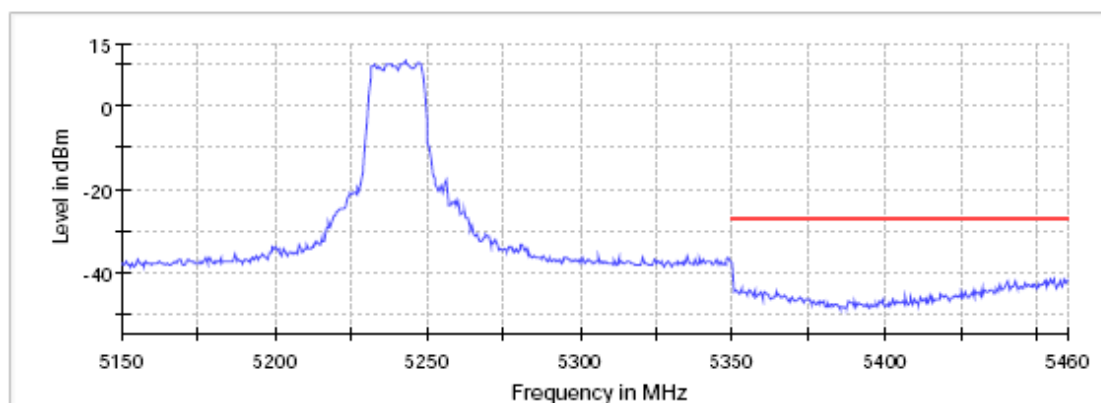

— Limit — Sum Level × Fail

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28

Page 24 of 52


No. : HMD22040015

Result: (Lowest)-802.11n40 5190MHz,Undesirable emission of Band-edge Compliance

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5149.250000	-27.2	0.2	-27.0	PASS
5142.750000	-27.6	0.6	-27.0	PASS
5149.750000	-27.7	0.7	-27.0	PASS
5147.750000	-27.9	0.9	-27.0	PASS
5148.750000	-28.4	1.4	-27.0	PASS
5148.250000	-28.8	1.8	-27.0	PASS
5147.250000	-29.7	2.7	-27.0	PASS
5146.250000	-29.9	2.9	-27.0	PASS
5145.250000	-29.9	2.9	-27.0	PASS
5146.750000	-30.2	3.2	-27.0	PASS
5145.750000	-30.2	3.2	-27.0	PASS
5144.750000	-30.5	3.5	-27.0	PASS
5143.750000	-30.7	3.7	-27.0	PASS
5143.250000	-30.9	3.9	-27.0	PASS
5144.250000	-31.5	4.5	-27.0	PASS

Band Edge

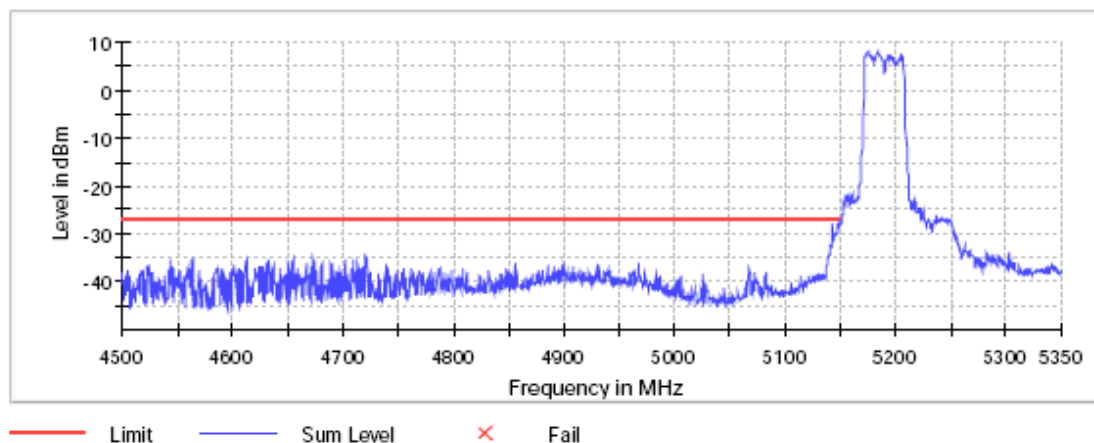

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28

Page 25 of 52


No. : HMD22040015

Result: (High)-802.11n40 5230MHz, Undesirable emission of Band-edge Compliance

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5456.250000	-37.7	10.7	-27.0	PASS
5354.250000	-38.7	11.7	-27.0	PASS
5353.750000	-38.9	11.9	-27.0	PASS
5443.250000	-39.0	12.0	-27.0	PASS
5437.750000	-39.2	12.2	-27.0	PASS
5436.750000	-39.7	12.7	-27.0	PASS
5440.250000	-39.8	12.8	-27.0	PASS
5430.250000	-40.3	13.3	-27.0	PASS
5366.750000	-40.5	13.5	-27.0	PASS
5367.250000	-40.4	13.5	-27.0	PASS
5389.750000	-40.6	13.6	-27.0	PASS
5375.750000	-40.8	13.8	-27.0	PASS
5377.750000	-40.8	13.8	-27.0	PASS
5366.250000	-40.9	13.9	-27.0	PASS
5367.750000	-41.0	14.0	-27.0	PASS

Band Edge

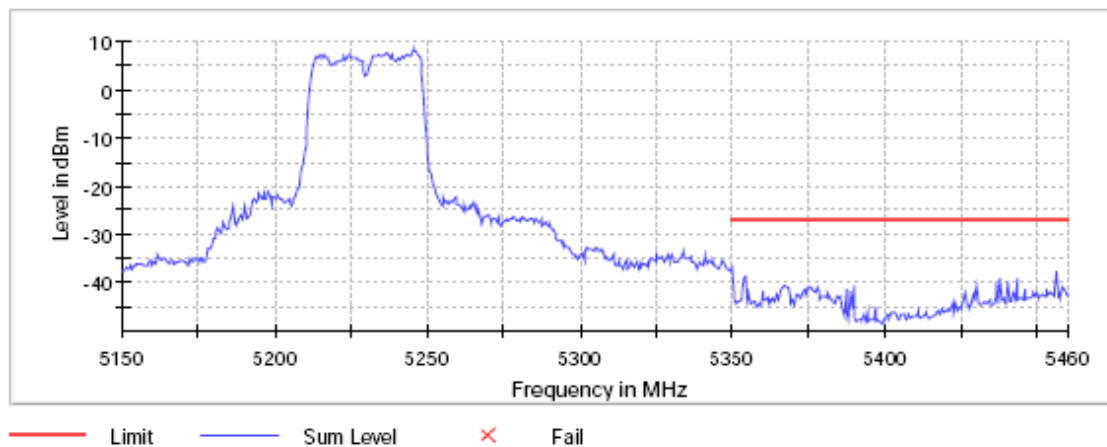

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015

Page 26 of 52

Limits for Radiated Emissions FCC 47 CFR 15.247]:


Frequency Range	Quasi-Peak Limits
[MHz]	[$\mu\text{V/m}$]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of WIFI TX mode: Pass

Please refer to the following table for result details (The data is the worst cases)

Horizontal

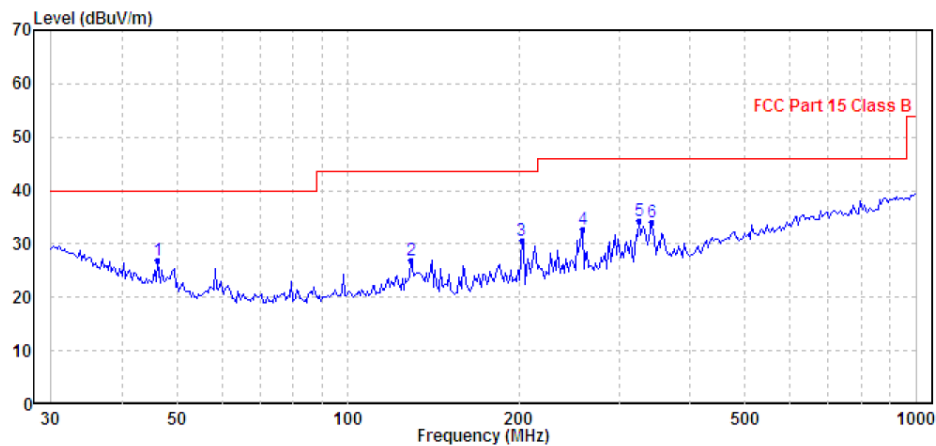

Ambient Temperature: 25C

Relative Humidity : 50%

	Freq	Level	Limit	Over		
	MHz	dBuV/m	Line	Limit	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB		
1	46.340	26.97	40.00	-13.03	QP	Horizontal
2	129.015	26.99	43.50	-16.51	QP	Horizontal
3	202.100	30.67	43.50	-12.83	QP	Horizontal
4	258.326	32.78	46.00	-13.22	QP	Horizontal
5	325.596	34.22	46.00	-11.78	QP	Horizontal
6	341.979	34.08	46.00	-11.92	QP	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015

Page 27 of 52

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B):


Frequency Range	Quasi-Peak Limits
[MHz]	[μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of WIFI TX mode: Pass

Please refer to the following table for result details (The data is the worst cases)

Vertical

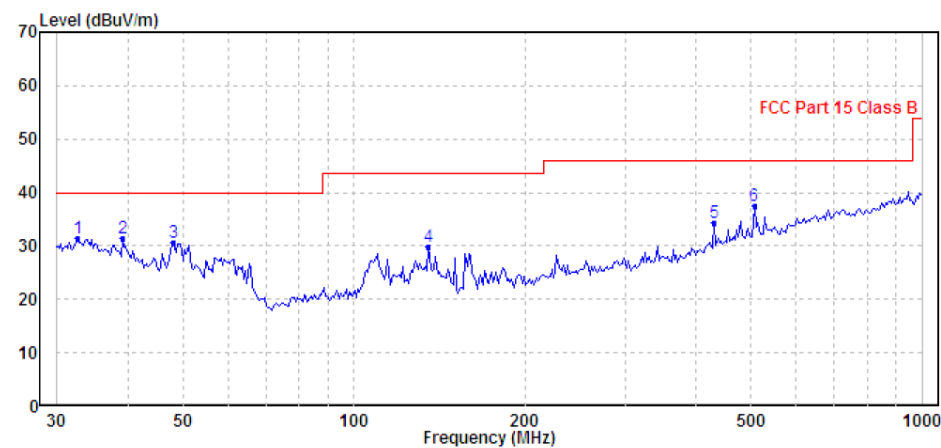

Ambient Temperature: 25C

Relative Humidity : 50%

	Freq	Level	Limit	Over		
	MHz	dBuV/m	Line	Limit	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB		
1	32.634	31.46	40.00	-8.54	QP	Vertical
2	39.162	31.48	40.00	-8.52	QP	Vertical
3	47.994	30.64	40.00	-9.36	QP	Vertical
4	135.506	29.73	43.50	-13.77	QP	Vertical
5	431.032	34.38	46.00	-11.62	QP	Vertical
6	506.479	37.62	46.00	-8.38	QP	Vertical

Remarks: Calculated measurement uncertainty (30MHz – 1GHz): 4.9dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015

Page 28 of 52

3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.10:2013
Test Date:	2022-04-11
Mode of Operation:	WIFI TX mode
Test Voltage:	120Va.c. 60Hz

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa


Test Method:

The test was performed in accordance with ANSI C63.10:2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Receiver Setting:

Bandw. = 9 kHz, Meas. Time= 10.0 ms, Step Width = 5.0kHz
 Detector = MaxPeak and CISPR AV

Test Setup:

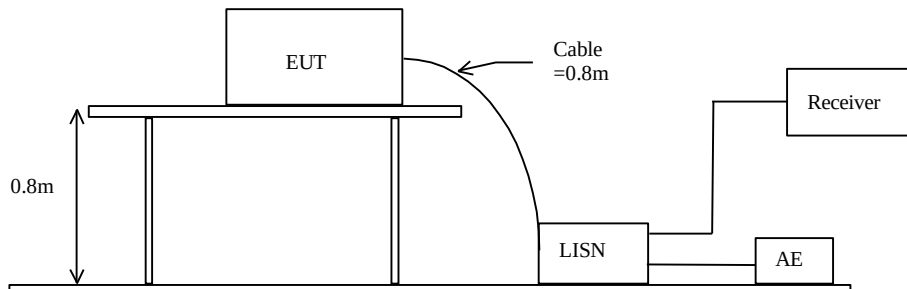

Limits for Conducted Emissions (FCC 47 CFR 15.207):

Frequency Range [MHz]	Quasi-Peak Limits [dBμV]	Average [dBμV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Remarks:

Calculated measurement uncertainty (0.15MHz – 30MHz): 3.25dB

-*- Emission(s) that is far below the corresponding limit line.

Test Report


Date : 2022-04-28

Page 29 of 52

No. : HMD22040015

Results of WIFI TX mode (L): PASS

Please refer to the following diagram for individual results.

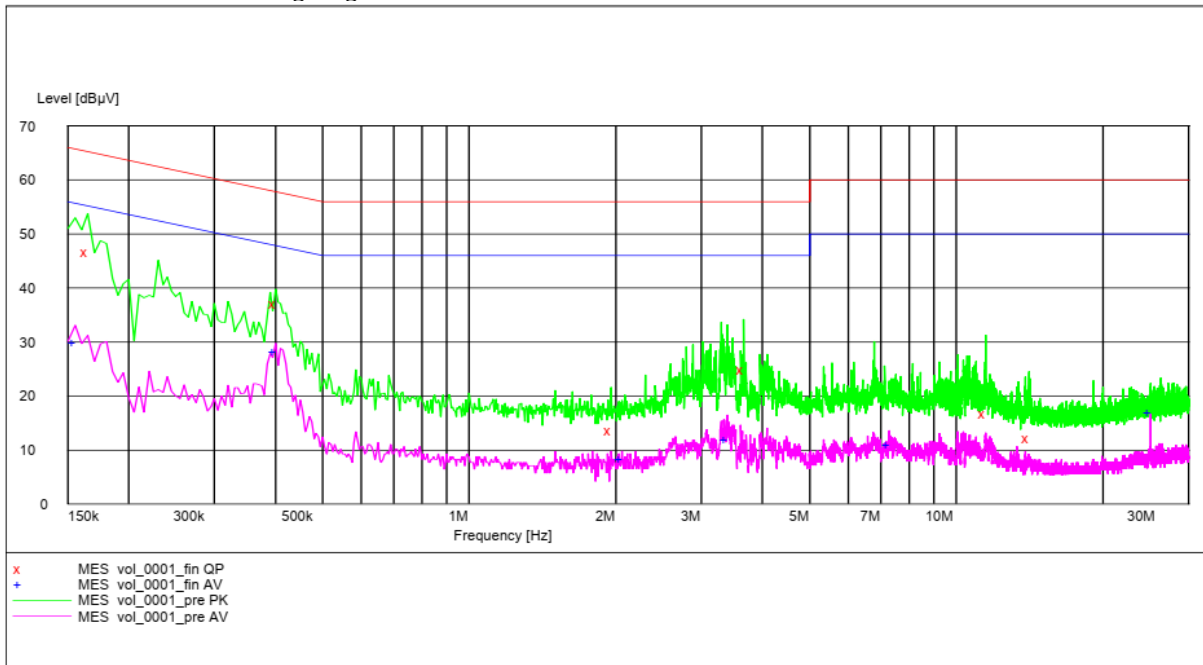

MEASUREMENT RESULT: "vol_0001_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.165000	46.6	9.7	65.2	18.6	L1	GND
0.400000	37.2	9.7	57.9	20.7	L1	GND
1.955000	13.7	9.8	56.0	42.3	L1	GND
3.660000	24.8	9.8	56.0	31.2	L1	GND
11.490000	16.8	10.1	60.0	43.2	L1	GND
14.090000	12.2	10.2	60.0	47.8	L1	GND

MEASUREMENT RESULT: "vol_0001_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.155000	30.0	9.7	55.7	25.7	L1	GND
0.400000	28.1	9.7	47.9	19.8	L1	GND
2.060000	8.3	9.8	46.0	37.7	L1	GND
3.390000	12.0	9.8	46.0	34.0	L1	GND
7.280000	11.0	9.9	50.0	39.0	L1	GND
25.060000	17.1	10.7	50.0	32.9	L1	GND

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report


Date : 2022-04-28

Page 30 of 52

No. : HMD22040015

Results of WIFI TX mode (N): PASS

Please refer to the following diagram for individual results.

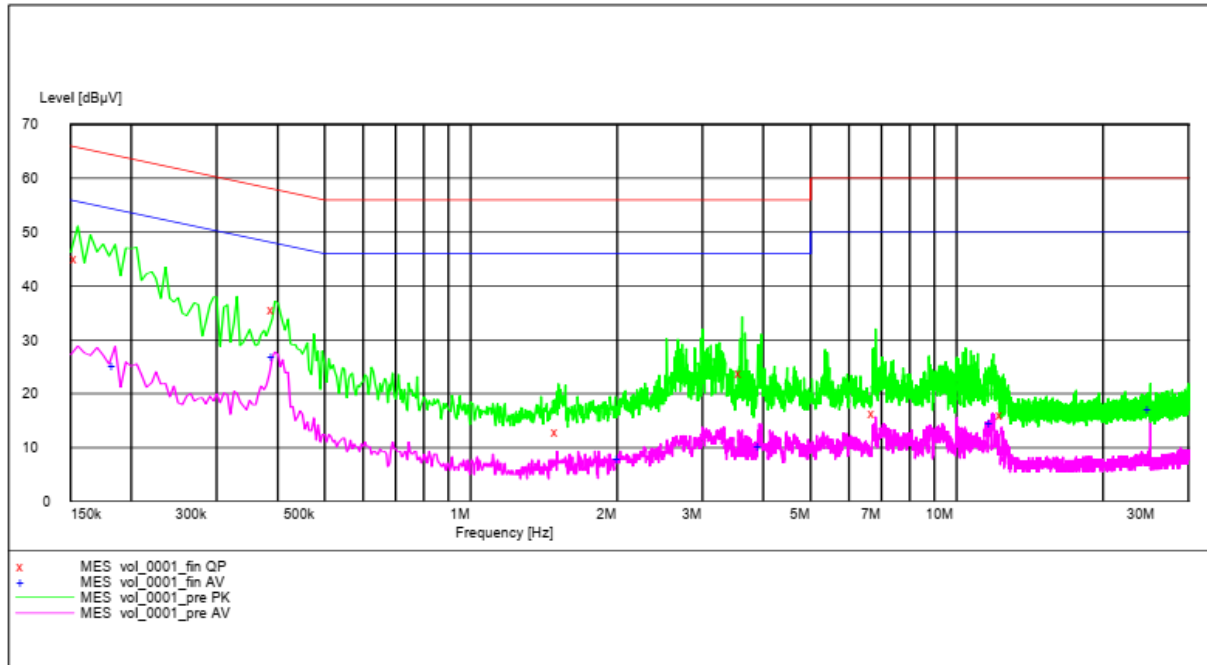

MEASUREMENT RESULT: "vol_0001 fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.155000	45.2	9.7	65.7	20.5	N	GND
0.395000	35.5	9.7	58.0	22.5	N	GND
1.515000	12.8	9.8	56.0	43.2	N	GND
3.615000	23.8	9.8	56.0	32.2	N	GND
6.815000	16.4	9.9	60.0	43.6	N	GND
12.480000	16.1	10.1	60.0	43.9	N	GND

MEASUREMENT RESULT: "vol_0001 fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.185000	25.4	9.7	54.3	28.9	N	GND
0.395000	26.9	9.7	48.0	21.1	N	GND
2.030000	7.9	9.8	46.0	38.1	N	GND
3.960000	10.2	9.8	46.0	35.8	N	GND
11.860000	14.6	10.1	50.0	35.4	N	GND
25.060000	17.3	10.7	50.0	32.7	N	GND

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 31 of 52

3.1.4 Power Spectral Density

Test Requirement: FCC 47CFR 15.407(a)
Test Method: ANSI C63.10:2013/ KDB 789033D02
Test Date: 2022-04-21
Mode of Operation: WIFI TX mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Test Method:

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=1000kHz , VBW= 3000KHz , Set the span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal. . Detector = rms, Sweep time = auto couple . Measure the Power Spectral Density (PSD) and record the results in dBm.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Test Limit:

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28

Page 32 of 52

No. : HMD22040015

Results of WIFI TX Mode 802.11 a (Tx:5150MHz to 5250MHz): Pass (TX Unit)

Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 1MHz band (dBm)	Maximum Power spectral density / 1MHz band limit
5150.0	0.991	11dBm
5220.0	0.304	11dBm
5240.0	1.292	11dBm

Results of WIFI TX Mode 802.11 n20 (Tx:5150MHz to 5250MHz): Pass (TX Unit)

Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 1MHz band (dBm)	Maximum Power spectral density / 1MHz band limit
5150.0	0.289	11dBm
5220.0	-0.437	11dBm
5240.0	0.182	11dBm

Results of WIFI TX Mode 802.11 n40 (Tx:5190MHz to 5230MHz): Pass (TX Unit)

Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 1MHz band (dBm)	Maximum Power spectral density / 1MHz band limit
5190.0	-2.659	11dBm
5230.0	-2.642	11dBm

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taiipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015


Page 33 of 52

WiFi mode 802.11 a
CH 36 (5180.0 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5180.000000	5183.366332	0.991	11.0	PASS

Power Spectral Density

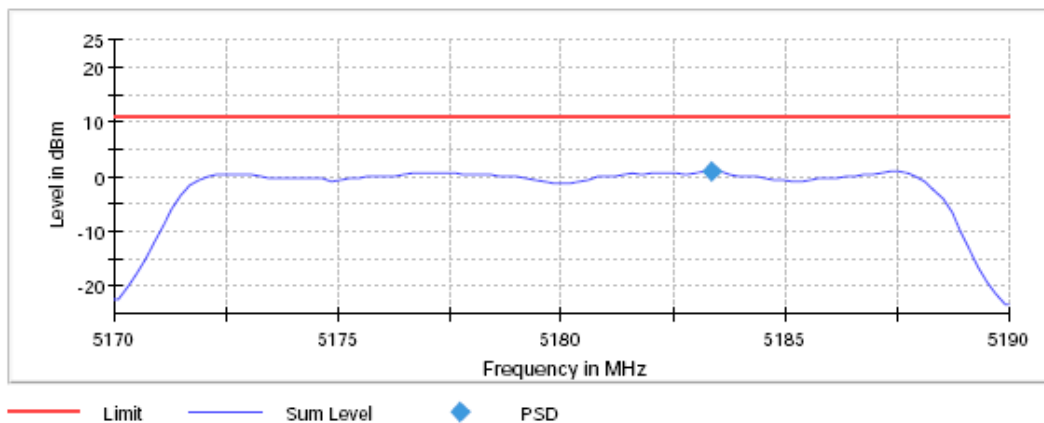


CH 40 (5200.0 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5200.000000	5203.366335	0.304	11.0	PASS

Power Spectral Density

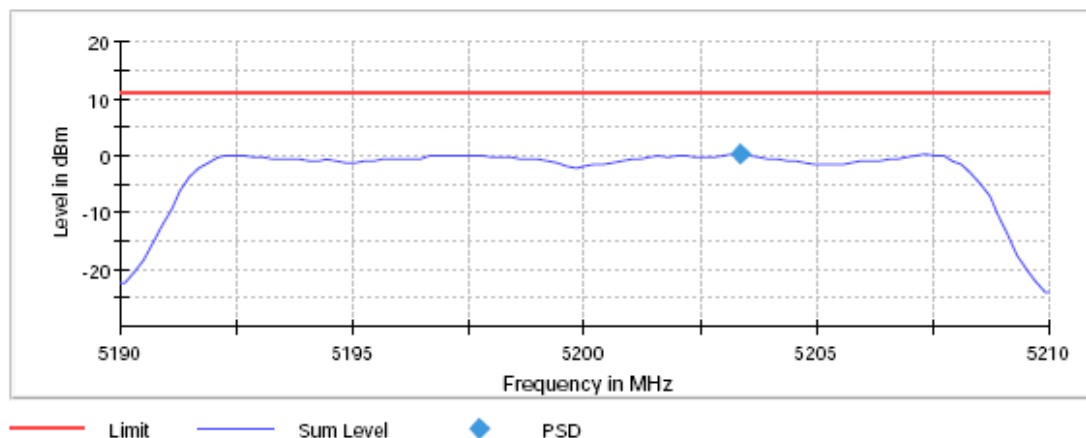

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015


Page 34 of 52

CH 48 (5240.0 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5240.000000	5247.326732	1.292	11.0	PASS

Power Spectral Density

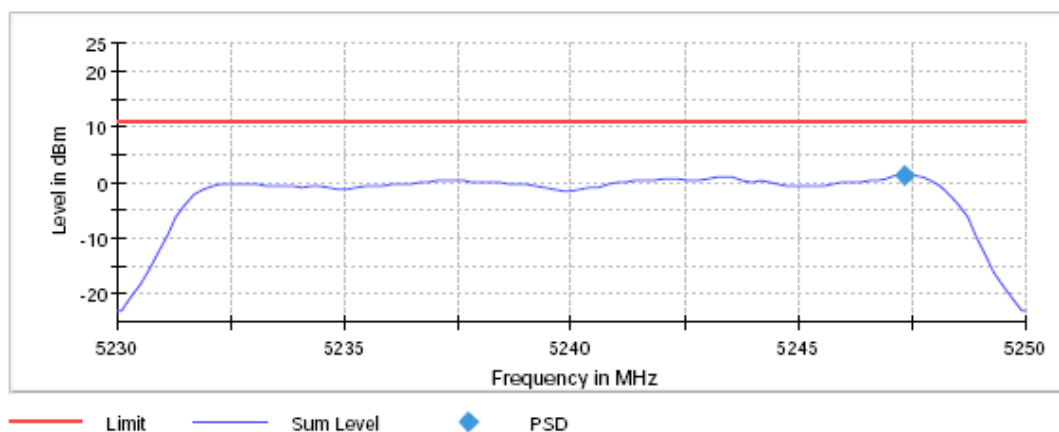


WiFi mode 802.11 n20
CH 36 (5180.0 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5180.000000	5177.425744	0.289	11.0	PASS

Power Spectral Density

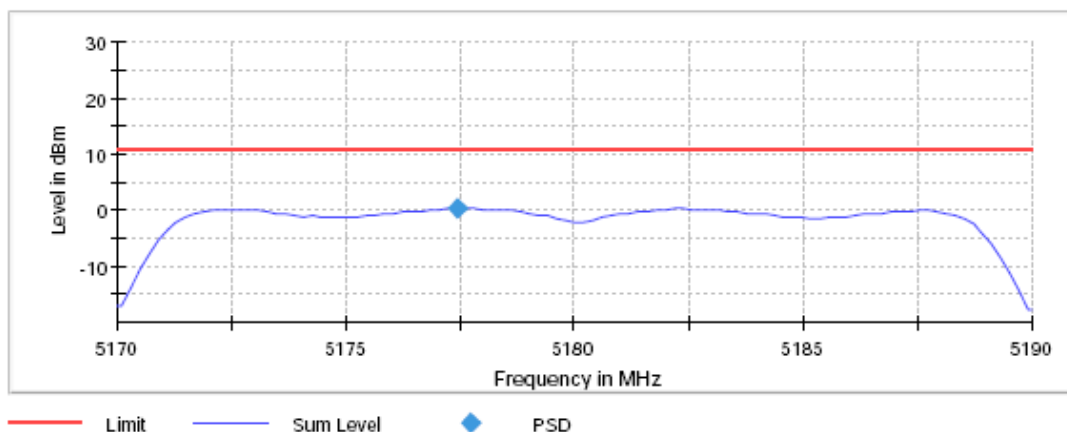

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015


Page 35 of 52

CH 40 (5200.0 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5200.000000	5192.673259	-0.437	11.0	PASS

Power Spectral Density

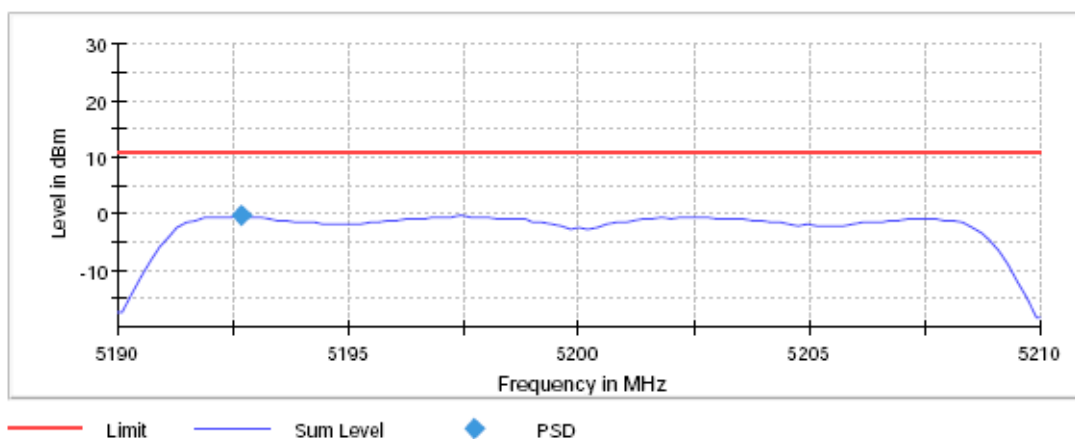


CH 48 (5240.0 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5240.000000	5242.376234	0.182	11.0	PASS

Power Spectral Density

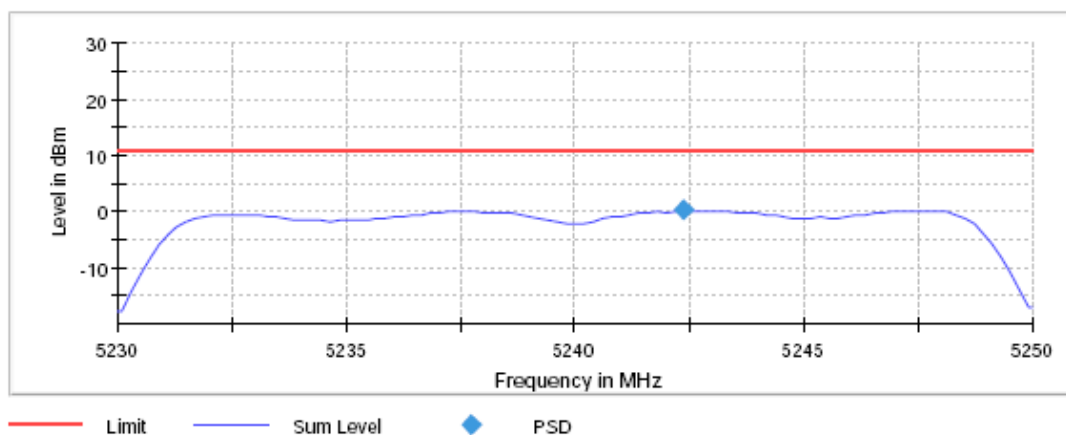

Test Report

Date : 2022-04-28
No. : HMD22040015


Page 36 of 52

WiFi mode 802.11 n40
CH 38 (5190.0 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5190.000000	5173.762358	-2.659	11.0	PASS

Power Spectral Density

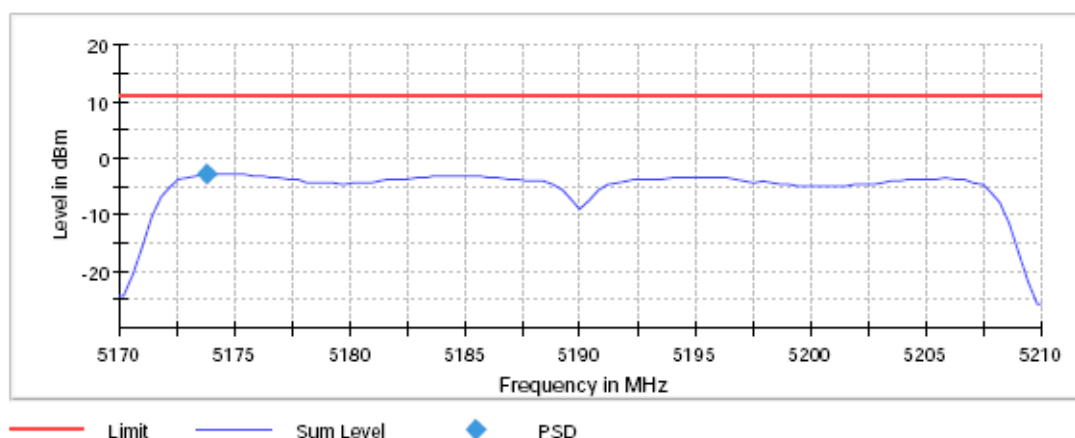


CH 46 (5230.0 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5230.000000	5245.445539	-2.642	11.0	PASS

Power Spectral Density

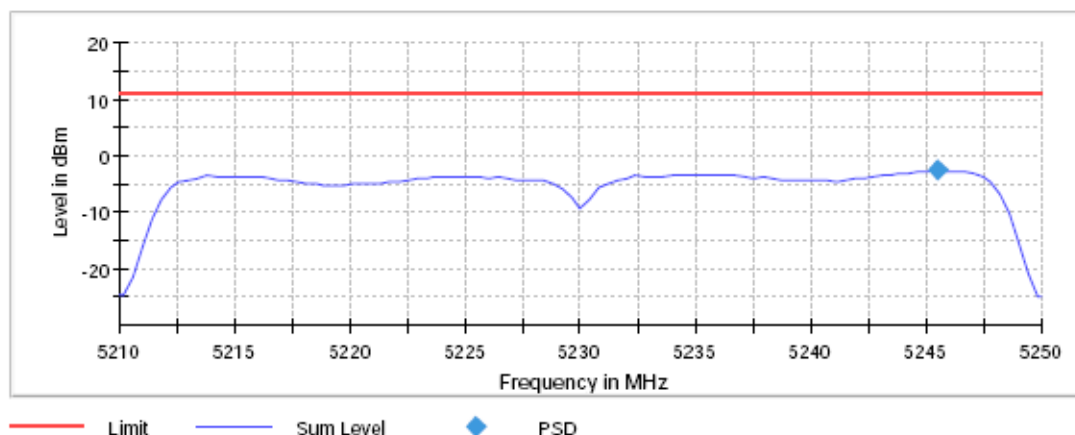

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 37 of 52

3.1.5 26 dB Bandwidth and 99% Occupied Bandwidth Measurement

Test Requirement: FCC 47CFR 15.407(a) / KDB 789033D02
Test Method: ANSI C63.10:2013
Test Date: 2022-04-22
Mode of Operation: WIFI TX mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Spectrum Analyzer Setting:

RBW = 1% to 5% of the OBW
VBW $\geq 3 \times$ RBW, Sweep = Auto couple
Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2022-04-28
No. : HMD22040015

Page 38 of 52

26 dB Bandwidth and 99% Occupied Bandwidth Measurement:

Center Frequency [MHz]	26dB Bandwidth [MHz]	99% Bandwidth [MHz]
5180.0	19.53	16.555

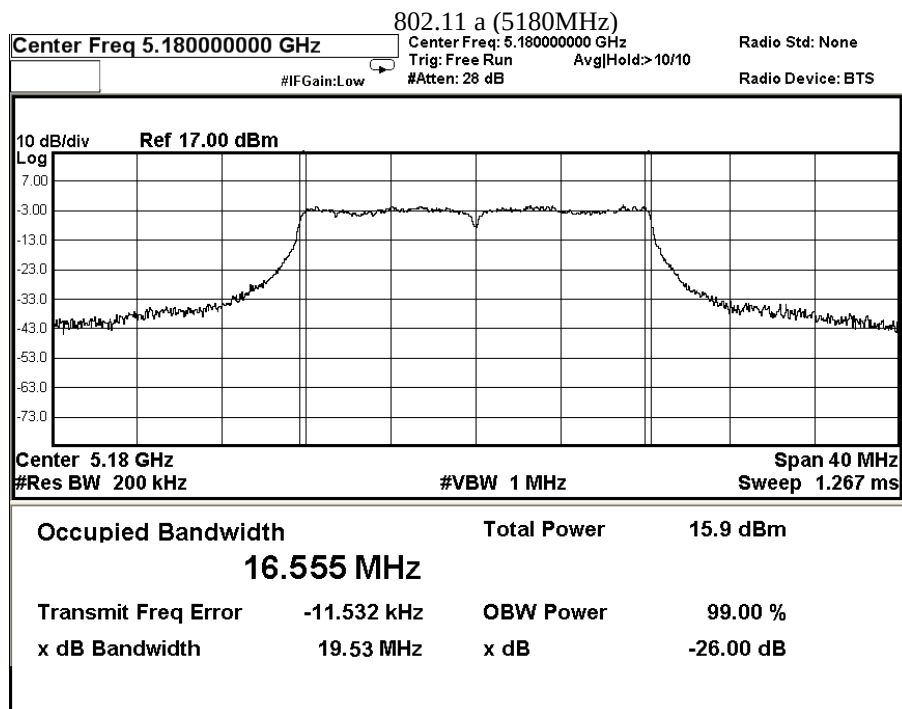

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2022-04-28
No. : HMD22040015

Page 39 of 52

26 dB Bandwidth and 99% Occupied Bandwidth Measurement:

Center Frequency [MHz]	26dB Bandwidth [MHz]	99% Bandwidth [MHz]
5200.0	19.53	16.553

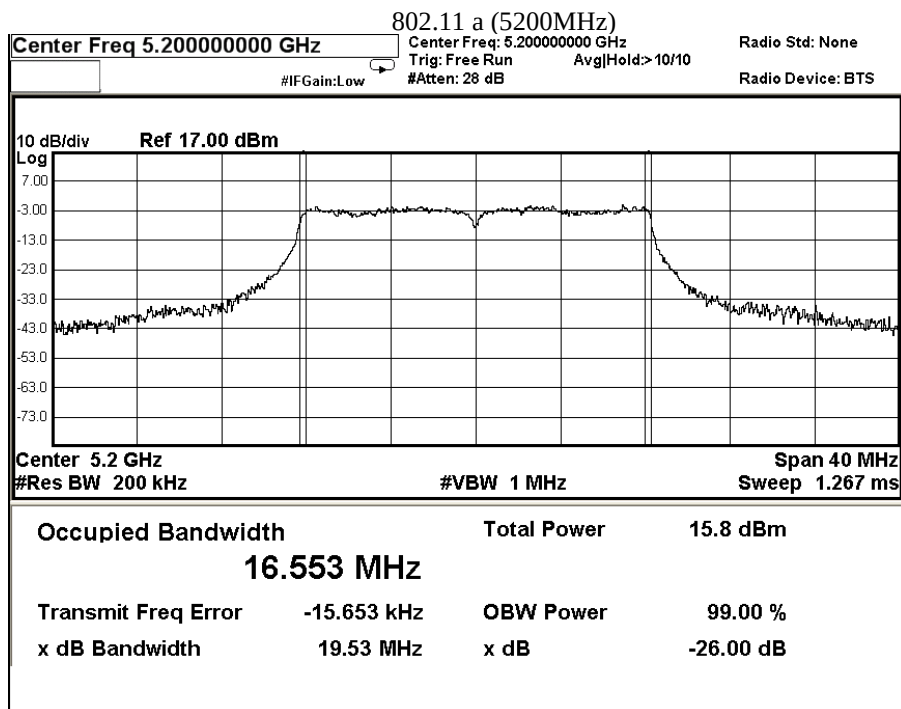

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2022-04-28
No. : HMD22040015

Page 40 of 52

26 dB Bandwidth and 99% Occupied Bandwidth Measurement:

Center Frequency [MHz]	26dB Bandwidth [MHz]	99% Bandwidth [MHz]
5240.0	19.33	16.553

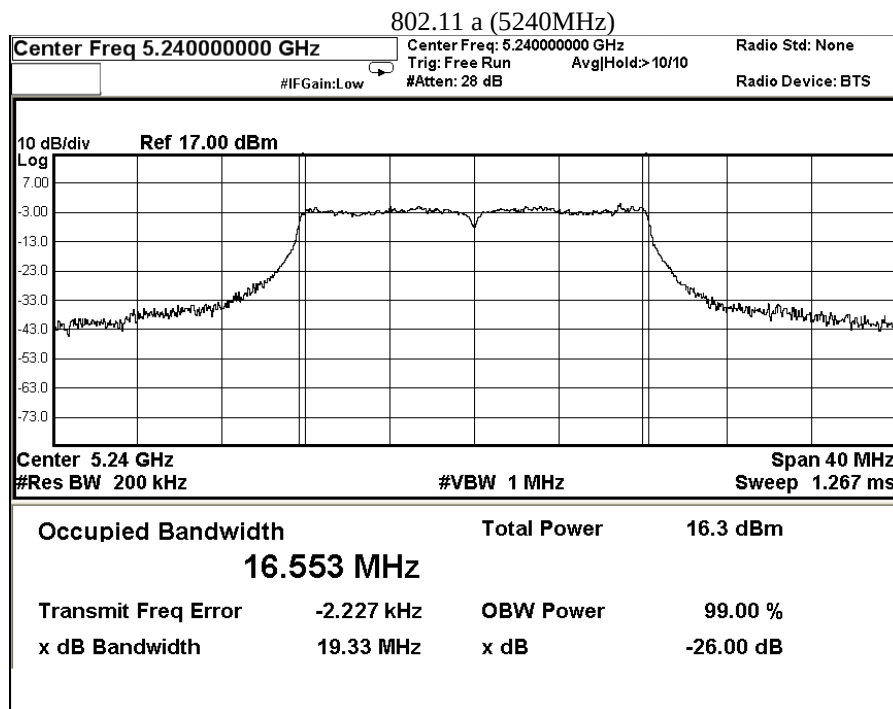

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2022-04-28
No. : HMD22040015

Page 41 of 52

26 dB Bandwidth and 99% Occupied Bandwidth Measurement:

Center Frequency [MHz]	26dB Bandwidth [MHz]	99% Bandwidth [MHz]
5180.0	20.43	17.666

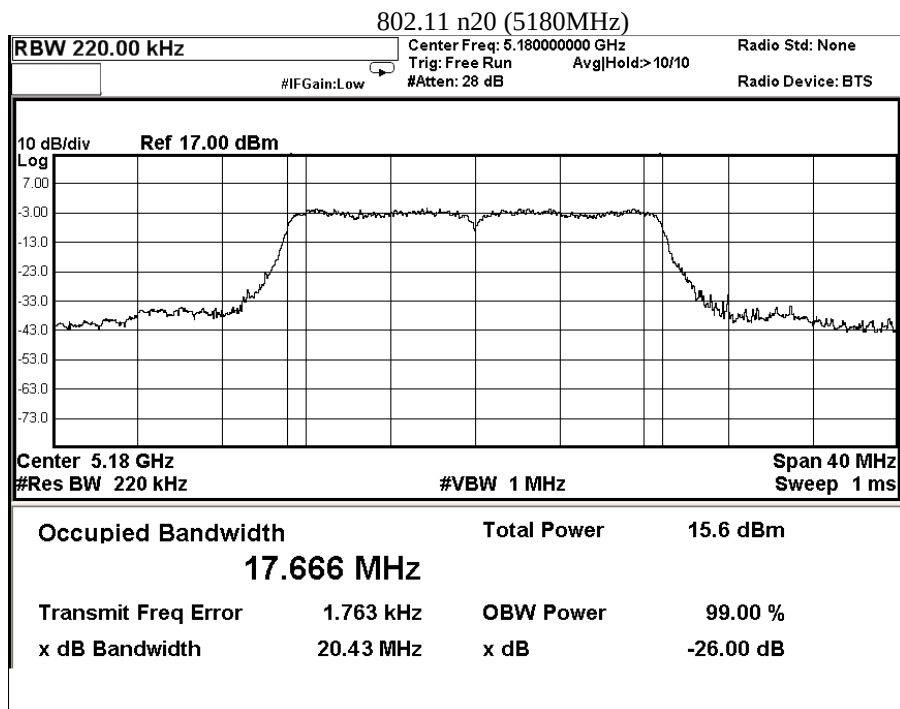

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2022-04-28
No. : HMD22040015

Page 42 of 52

26 dB Bandwidth and 99% Occupied Bandwidth Measurement:

Center Frequency [MHz]	26dB Bandwidth [MHz]	99% Bandwidth [MHz]
5200.0	20.20	17.666

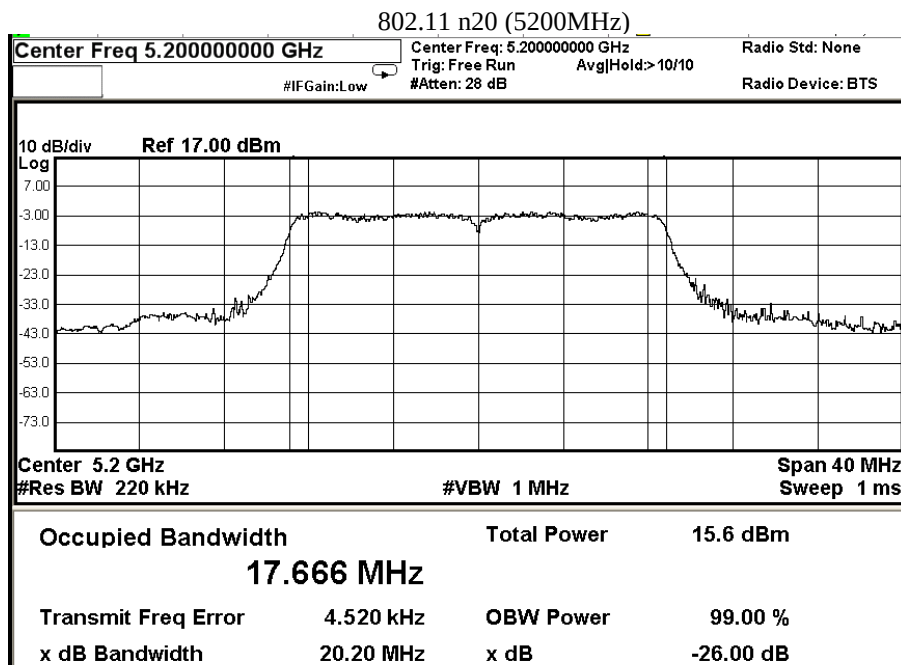

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2022-04-28
No. : HMD22040015

Page 43 of 52

26 dB Bandwidth and 99% Occupied Bandwidth Measurement:

Center Frequency [MHz]	26dB Bandwidth [MHz]	99% Bandwidth [MHz]
5240.0	20.20	17.664

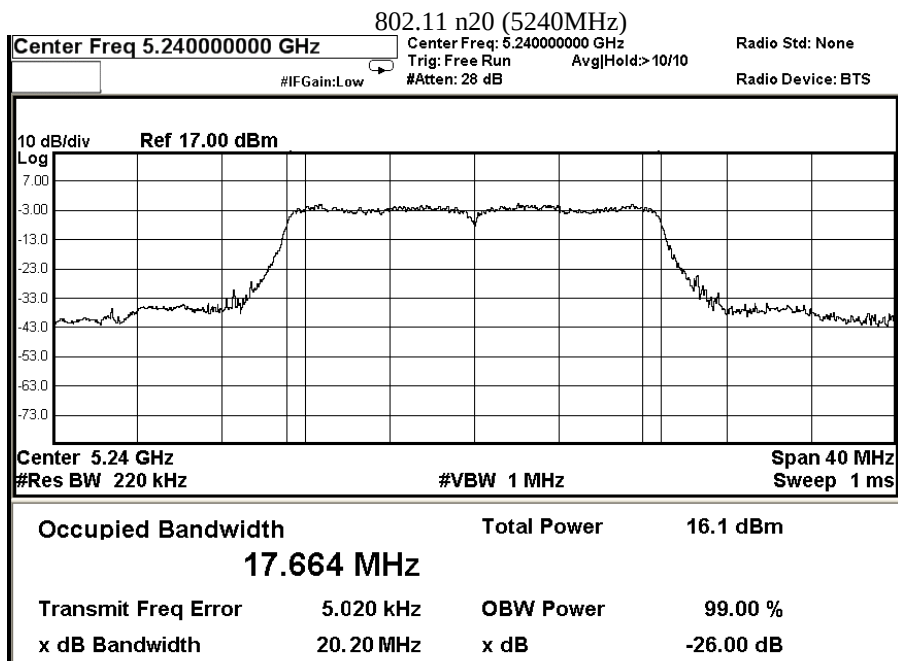

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2022-04-28
No. : HMD22040015

Page 44 of 52

26 dB Bandwidth and 99% Occupied Bandwidth Measurement:

Center Frequency [MHz]	26dB Bandwidth [MHz]	99% Bandwidth [MHz]
5190.0	42.35	36.464

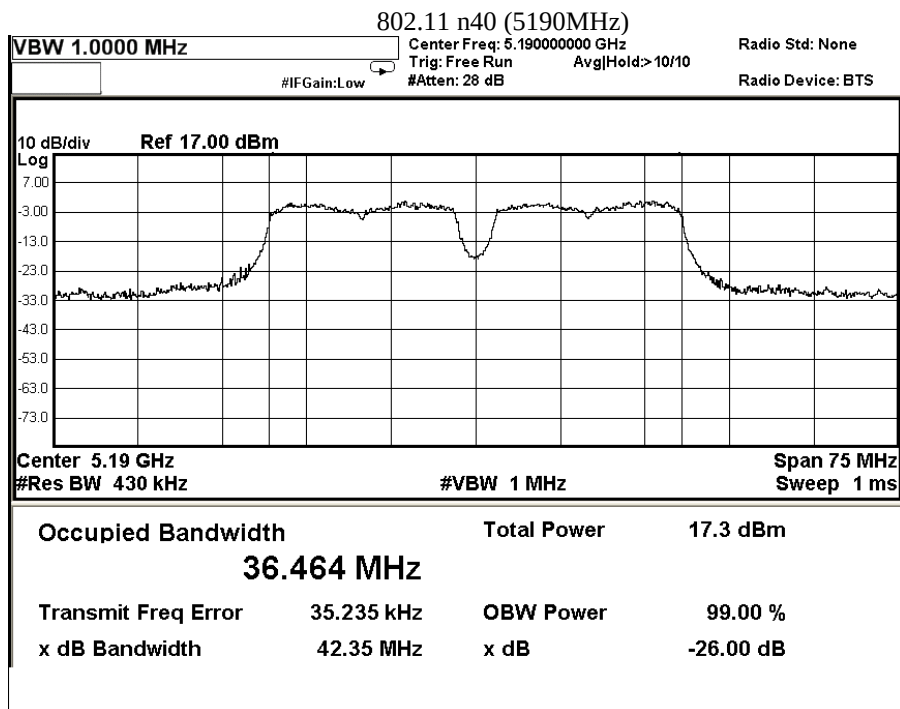

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2022-04-28
No. : HMD22040015

Page 45 of 52

26 dB Bandwidth and 99% Occupied Bandwidth Measurement:

Center Frequency [MHz]	26dB Bandwidth [MHz]	99% Bandwidth [MHz]
5230.0	43.02	36.436

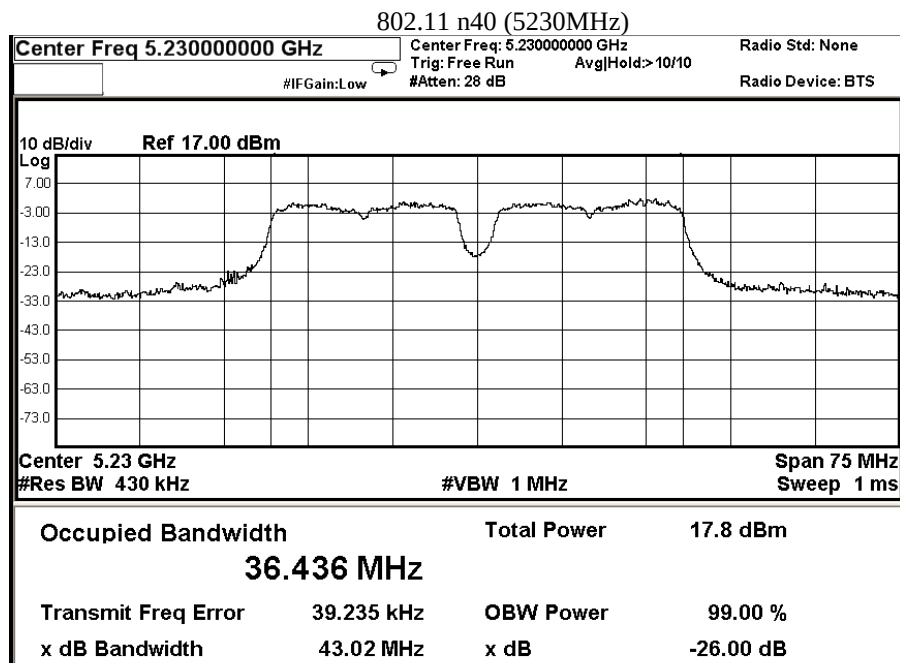

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 46 of 52

3.1.6 Antenna Requirement

Ambient Temperature: 25°C

Relative Humidity: 51%

Atmospheric Pressure: 101 kPa

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is monopole antenna. There is no external antenna, the antenna gain = 3.5dBi. User is unable to remove or changed the Antenna.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2022-04-28
No. : HMD22040015

Page 47 of 52

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM215	MULTIDevice CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM217	ELECTRIC POWERED TURN TABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECCHOIC CHAMBER	ETS-LINDGREN	FACT-3	--	2019/04/16	2024/04/16
EM356	ANTENNA POSITIONING TOWER	ETS-LINDGREN	2171B	00150346	N/A	N/A
EM336	PRECISION CONICAL DIPOLE	SEIBERSDORF LABORATORIES	PCD 3100	6236/M	2020/05/30	2022/05/30
EM229	EMI TEST RECEIVER	R&S	ESIB40	100248	2020/05/13	2022/05/13
EM299	BROADBAND HORN ANTENNA	ETS-LINDGREN	3115	00114120	2020/11/24	2022/11/24
EM300	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-09	00130130	2020/11/25	2022/11/25
EM301	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-10	00130988	2020/11/25	2022/11/25
EM353	LOOP ANTENNA	ETS_LINDGREN	6502	00206533	2020/06/10	2022/06/10
EM355	Biconilog Antenna	ETS-Lindgren	3143B	00094856	2020/06/17	2022/06/17
EM200	DUAL CHANNEL POWER METER	R & S	NRVD	100592	2019/10/11	2022/10/11
EM012	PRE-AMPLIFIER	HP	HP8448B	3008A00262	2019/11/08	2022/11/08

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM119	LISN	R & S	ESH3-Z5	0831.5518.52	2020/06/30	2022/06/30
EM145	EMI TEST RECEIVER	R & S	ESIB7	100072	2020/05/13	2022/05/13
EM233	PULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	100314	2021/01/18	2023/01/18
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	2022/02/02	2027/02/02
N/A	MEASUREMENT AND EVALUATION SOFTWARE	ROHDE & SCHWARZ	BSIB-K1	V1.20	N/A	N/A

Remarks:-

CM Corrective Maintenance
N/A Not Applicable
TBD To Be Determined

Test Report

Date : 2022-04-28
No. : HMD22040015

Page 48 of 52

Appendix B

Photographs of EUT

View of the product



View of the product




Inner Circuit Top View




Inner Circuit Bottom View



Inner Circuit Top View

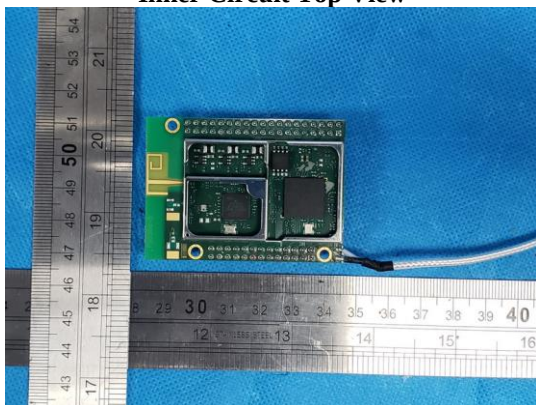

Inner Circuit Bottom View

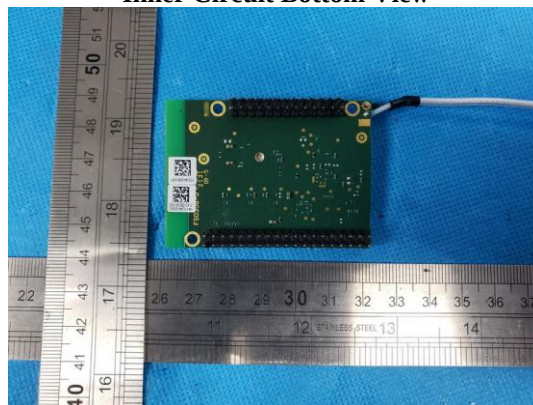


Test Report

Date : 2022-04-28
No. : HMD22040015


Page 49 of 52

Photographs of EUT


Inner Circuit Top View

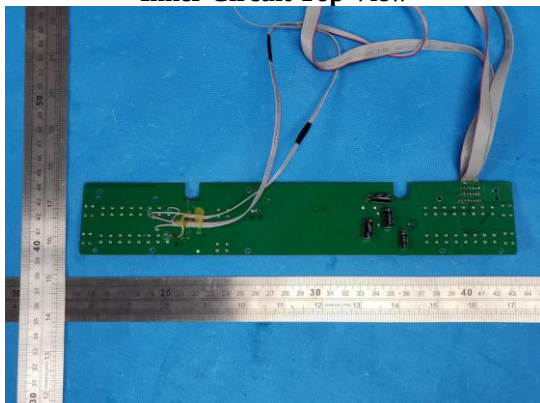


Inner Circuit Bottom View

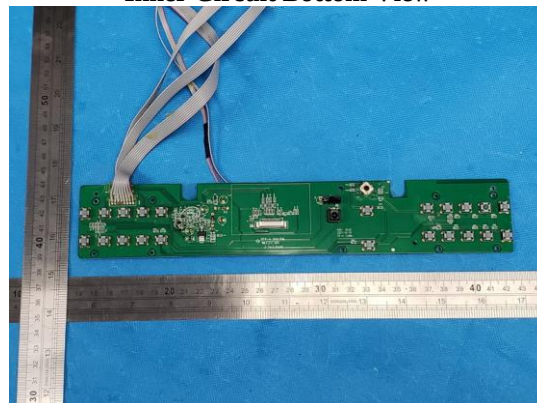


Inner Circuit Top View

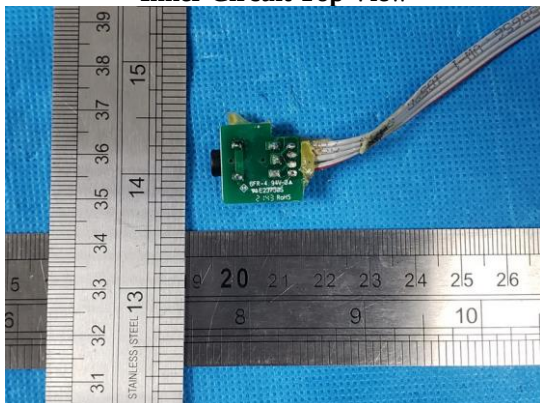


Inner Circuit Bottom View

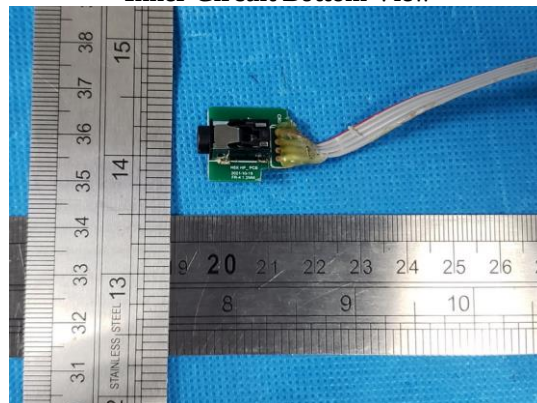

Inner Circuit Top View

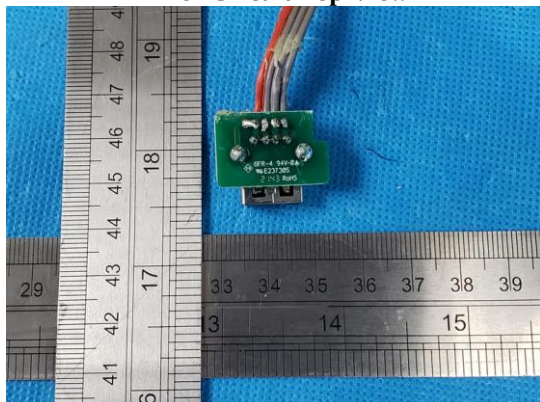

Inner Circuit Bottom View

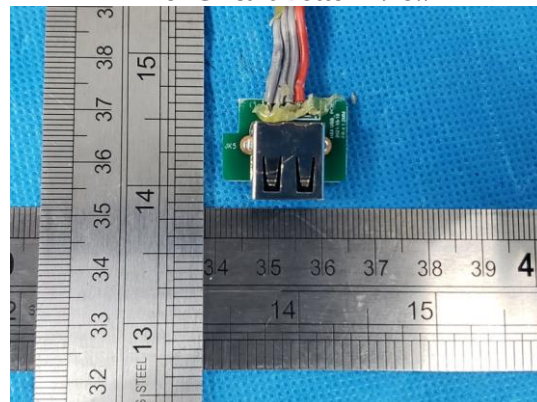


Test Report

Date : 2022-04-28
No. : HMD22040015


Page 50 of 52

Photographs of EUT


Inner Circuit Top View

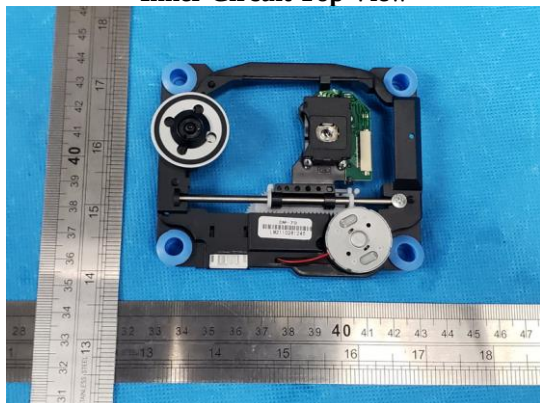


Inner Circuit Bottom View

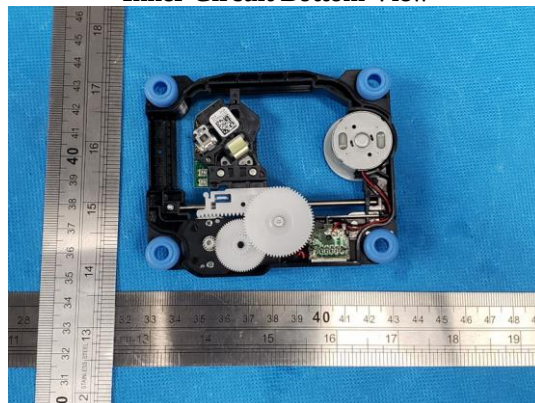


Inner Circuit Top View

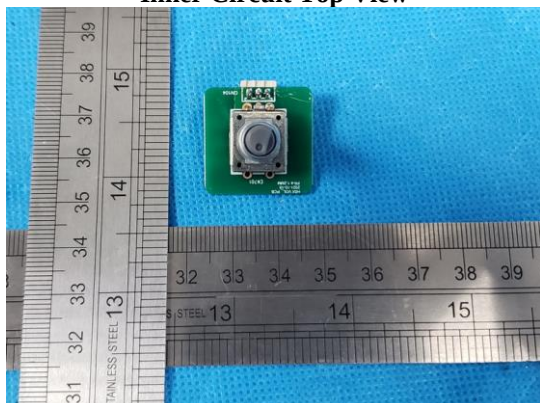


Inner Circuit Bottom View

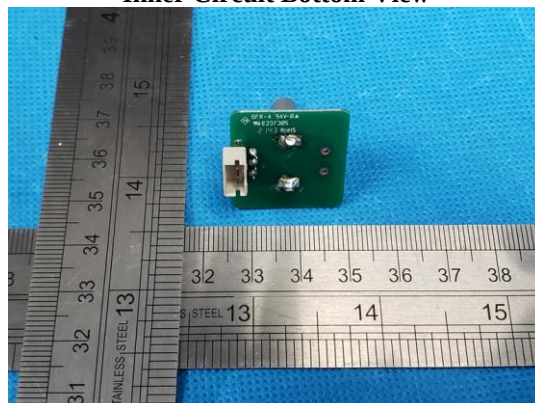

Inner Circuit Top View

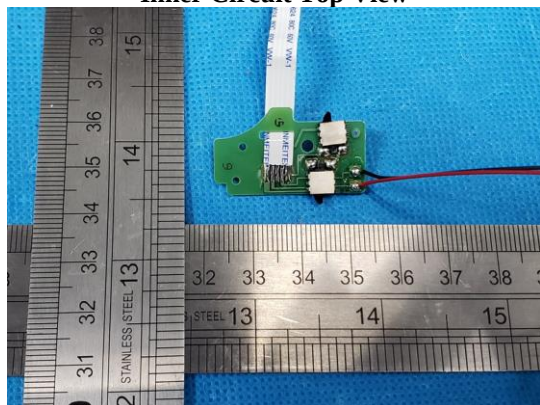

Inner Circuit Bottom View

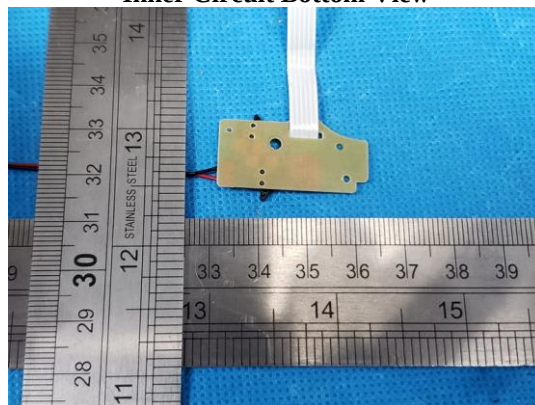


Test Report

Date : 2022-04-28
No. : HMD22040015


Page 51 of 52

Photographs of EUT

Measurement of Radiated Emission Test Set Up (9kHz – 30MHz)

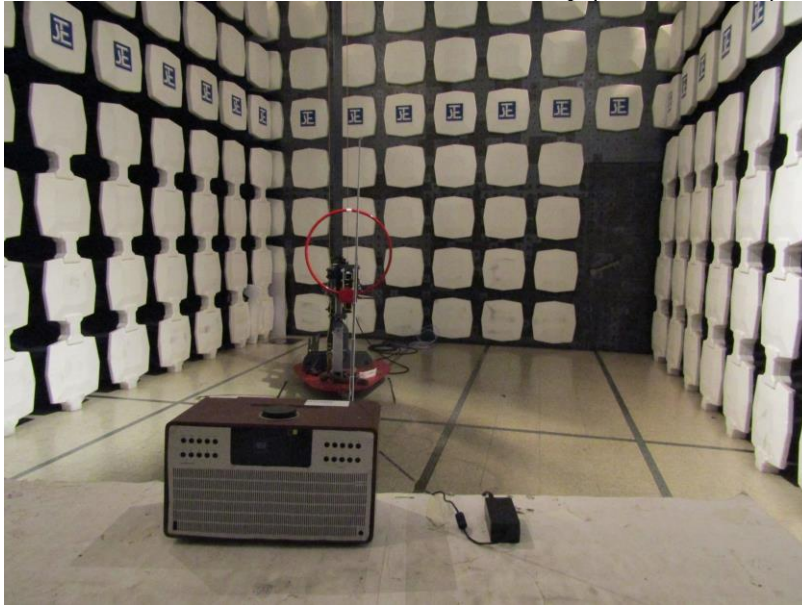

Measurement of Radiated Emission Test Set Up (30MHz – 1000MHz)

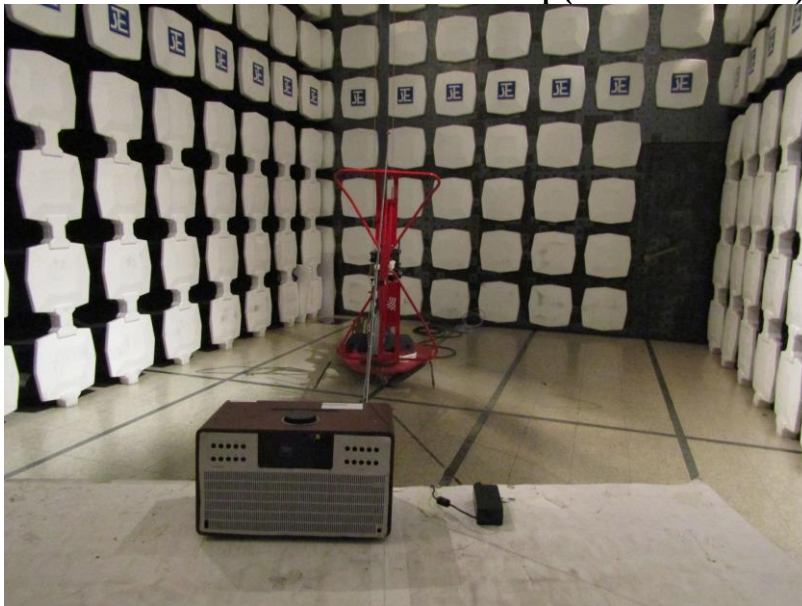

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2022-04-28
No. : HMD22040015

Page 52 of 52

Photographs of EUT

Measurement of Radiated Emission Test Set Up (above 1000MHz)



Measurement of Conducted Emission Test Set Up



******* End of Test Report *******

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by The Hong Kong Standards & Testing Centre Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. Subject to clause 3, the Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall be at liberty to disclose the testing-related documents and/or files anytime to any third-party accreditation and/or recognition bodies for audit or other related purposes. No liabilities whatsoever shall attach to the Company's act of disclosure.
4. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
5. The results in Report apply only to the sample as received and do not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
6. When a statement of conformity to a specification or standard is provided, the ILAC-G8 Guidance document (and/or IEC Guide 115 in the electrotechnical sector) will be adopted as a decision rule for the determination of conformity unless it is inherent in the requested specification or standard, or otherwise specified in the Report.
7. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
8. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
9. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
10. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
11. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
12. Issuance records of the Report are available on the internet at www.stc.group. Further enquiry of validity or verification of the Reports should be addressed to the Company.