

APPLICANT: AZDEN CORPORATION

FCC ID: BZB10BT

TABLE OF CONTENTS LIST

TEST REPORT CONTAINING:

PAGE 1.....	GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2.....	TECHNICAL DESCRIPTION CONTINUED
	RF POWER TEST PROCEDURE
PAGE 3.....	AUDIO FREQUENCY RESPONSE GRAPH
PAGE 4.....	MODULATION LIMITING PLOT
PAGE 5.....	OCCUPIED BANDWIDTH
PAGE 6.....	OCCUPIED BANDWIDTH PLOT
PAGE 7-8.....	RADIATED EMISSIONS TEST DATA
PAGE 9.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 10.....	FREQUENCY STABILITY TEST DATA
PAGE 11-14.....	TEST EQUIPMENT LIST

EXHIBITS CONTAINING:

EXHIBIT 1.....	BLOCK DIAGRAM
EXHIBIT 2.....	SCHEMATIC
EXHIBIT 3.....	USERS MANUAL
EXHIBIT 4.....	LABEL SAMPLE
EXHIBIT 5.....	LABEL LOCATION
EXHIBIT 6.....	EXTERNAL PHOTOGRAPHS
EXHIBIT 7.....	INTERNAL PHOTOGRAPHS
EXHIBIT 8.....	PART LIST
EXHIBIT 9.....	ALIGNMENT PROCEDURE
EXHIBIT 10.....	OPERATIONAL DESCRIPTION
EXHIBIT 11.....	TEST SET UP PHOTOGRAPH

APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

TABLE OF CONTENTS LIST

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

- 2.1033(c)(1) AZDEN CORPORATION will manufacture the BZB10BT in
2.1033(c)(2) quantity, for use under FCC RULES PART 74.801,
LOW POWER AUXILIARY STATIONS.

AZDEN CORPORATION
1-12-17 KAMI-RENJAKU
MITAKA, TOKYO, 181, JAPAN

2.1033 TECHNICAL DESCRIPTION

- (c)(3) Instruction book. The instruction manual is included as Exhibit 3.

- (c)(4) Type of Emission: 80K0F3E

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 10000 \\ D &= 30 \text{ kHz (Peak Deviation)} \\ K &= 1 \\ B_n &= 2(10k) + 2(30k)(1) = 80k \end{aligned}$$

ALLOWED AUTHORIZED BANDWIDTH = 200 kHz.
74.861(e)(5)

- (c)(5) Frequency Range: Part 74: 793.750 – 805.875 MHz
TEST FREQ = 793.75, 800.000, 805.75 MHz

- (c)(6) Power Range and Controls: UNIT has no controls.

- (c)(7) Maximum Output Power Rating: .030 Watts ERP

- (c)(8) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY
9.0V BATTERY
Vce = 9.0 Volts
Ice = 28 mA.

- (c)(9) Tune-up procedure. The tune-up procedure is given in page 9.

- (c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT # 2. The block diagram is included as EXHIBIT #1.

- 2.1033(c)(11) Photo or Drawing of Label and sketch of location:
See EXHIBIT # 4-5.

APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 1 of 14

2.1033(c)12) Photos of Equipment:
See EXHIBIT #'S 6-7.

(c)(13) Description of all circuitry and devices provided for determining and stabilizing frequency.

Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power.

This circuitry is described on page 10.

Limiting Modulation:
The transmitter audio circuitry is contained in IC101, IC102 and IC103.

Limiting Power:
There is no provision for limiting power.

(13) Digital modulation. This unit does not use digital modulation.


2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.

2.1046 RF power output.

RF power is measured by the substitution ERP METHOD. With a nominal battery voltage of 9.0V, and the transmitter properly adjusted the RF output measures:

MAXIMUM OUTPUT POWER: .030 WATTS ERP

R.F. POWER OUTPUT TEST PROCEDURE

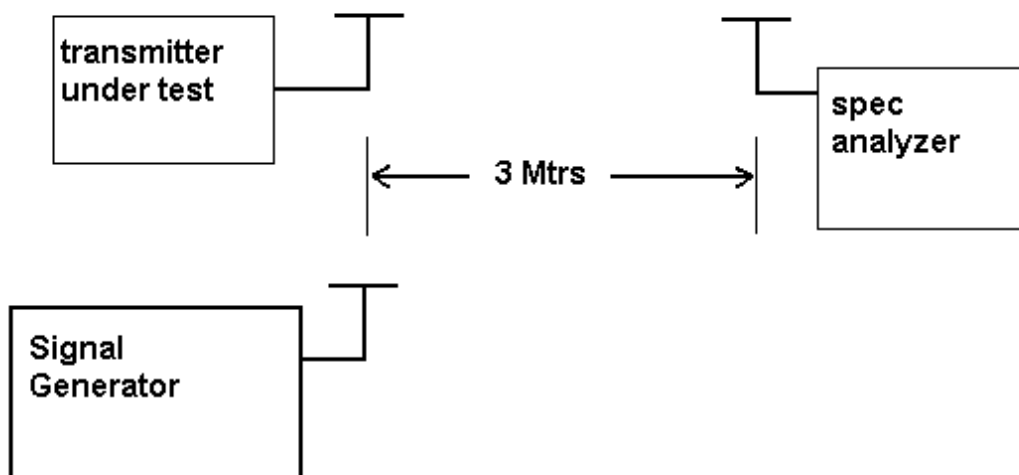


2.1047(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown below.

Audio Frequency Response

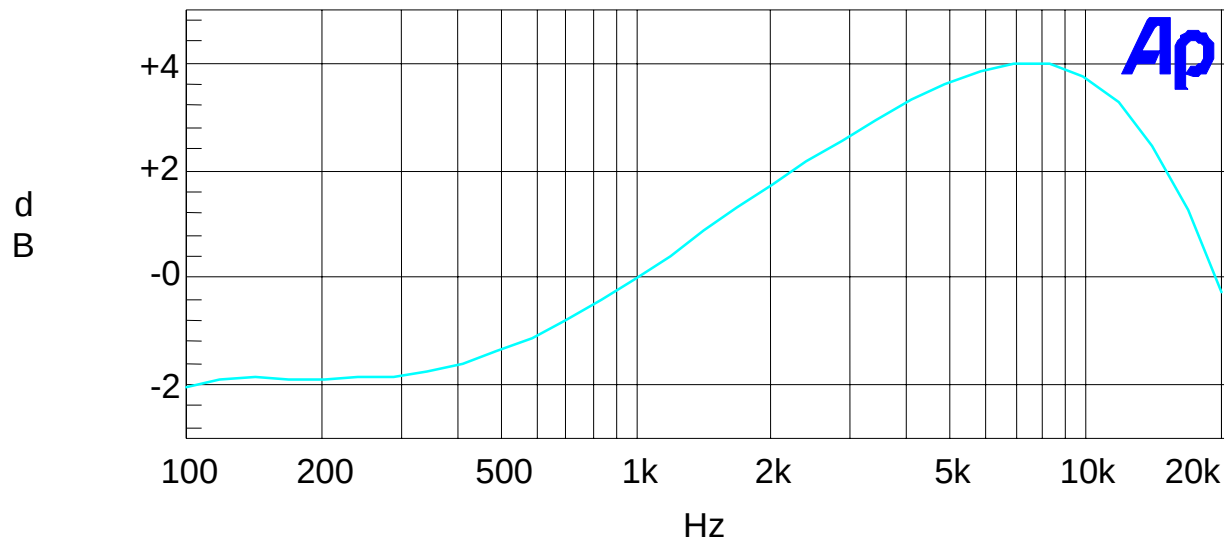


APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 3 of 14

Modulation Limiting: 15KHz, 2.5KHz, 1.0KHz, 300Hz

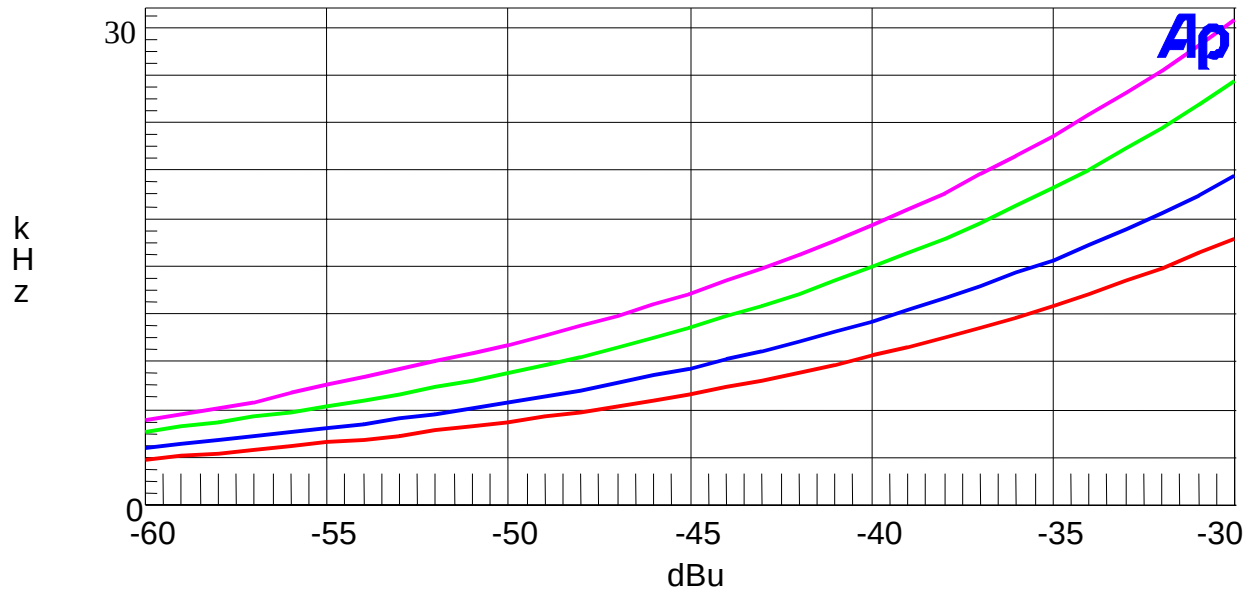

Magenta	15KHz Modulation
Green	2.5KHz Modulation
Blue	1.0KHz Modulation
Red	300Hz Modulation

APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 4 of 14


2.1049(c) Occupied Bandwidth:

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35dB and beyond 250% $43 \log(P_o)$ dB. The plot shows the transmitter modulated with 15000 Hz (the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the un-modulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

Wireless Microphone transmitter:

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

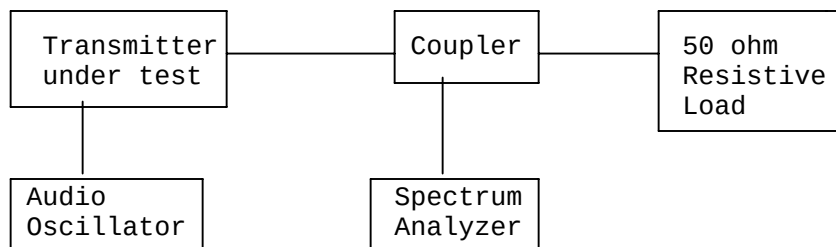


REQUIREMENT: PART 74: 200 kHz EMISSION BANDWIDTH.

OCCUPIED BANDWIDTH

NOTES:

FCC 74.535 Mask A

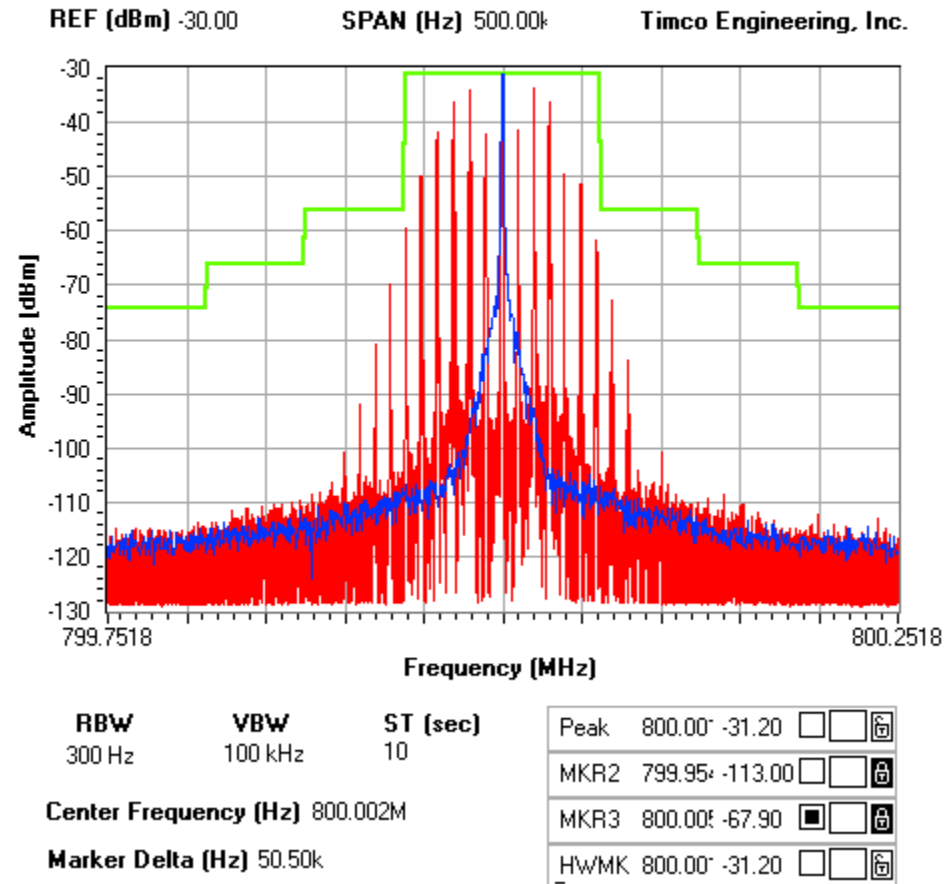

APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 6 of 14

2.1051 Spurious emissions at antenna terminals (conducted):
Not Applicable no antenna connector.

2.1053(a)(b) Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be 43 +10log(Po) dB below the
mean power output of the transmitter.

TEST DATA:

Ch 20: 793.75 MHz: $43 + 10 \log(0.025) = 26.98$ dB

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
793.75	V	14.00	0	0	0.00
1587.50	V	-16.10	1.1	-5.04	34.04
2381.25	V	-14.20	1.3	-6.44	33.34
3175.00	V	-13.70	1.35	-7.32	33.67
3968.75	H	-21.50	1.45	-7.45	41.50
4762.50	H	-22.00	1.6	-8.1	42.50
5556.25	H	-36.90	1.7	-8.72	57.92
6350.00	V	-33.80	1.95	-8.95	54.80
7143.75	H	-42.10	2	-8.32	62.42
7937.50	H	-41.40	2.1	-7.24	60.54

APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 7 of 14

CH 55: 800.00 MHz: $43 + 10 \log(0.028) = 27.47$ dB

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
800.00	V	14.4	0	0.00	0.00
1600.00	V	-16.4	1.1	-5.04	34.74
2400.00	V	-10.0	1.3	-6.44	29.54
3200.00	V	-15.1	1.35	-7.32	35.47
4000.00	H	-22.1	1.45	-7.45	42.50
4800.00	H	-23.7	1.6	-8.10	44.60
5600.00	H	-37.4	1.7	-8.72	58.82
6400.00	H	-38.0	1.95	-8.95	59.40
7200.00	H	-43.3	2	-8.32	64.02
8000.00	H	-39.5	2.1	-7.24	59.04

Ch 18: 805.75 MHz: $43 + 10 \log(0.030) = 27.77$ dB

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
805.75	V	14.80	0	0	0.00
1611.50	V	-16.80	1.1	-5.04	35.54
2417.25	V	-9.60	1.3	-6.44	29.54
3223.00	V	-12.60	1.35	-7.32	33.37
4028.75	H	-21.50	1.45	-7.45	42.30
4834.50	H	-22.00	1.6	-8.1	43.30
5640.25	V	-40.00	1.7	-8.72	61.82
6446.00	V	-33.80	1.95	-8.95	55.60
7251.75	H	-42.10	2	-8.32	63.22
8057.50	H	-41.40	2.1	-7.24	61.34

METHOD OF MEASUREMENT: The procedure used was TIA/EIA STANDARD 603. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a Agilent model 8566B spectrum analyzer and an appropriate antenna. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 849 NW SR 45 Newberry, FL 32669.


APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 8 of 14

Method of Measuring Radiated Spurious Emissions

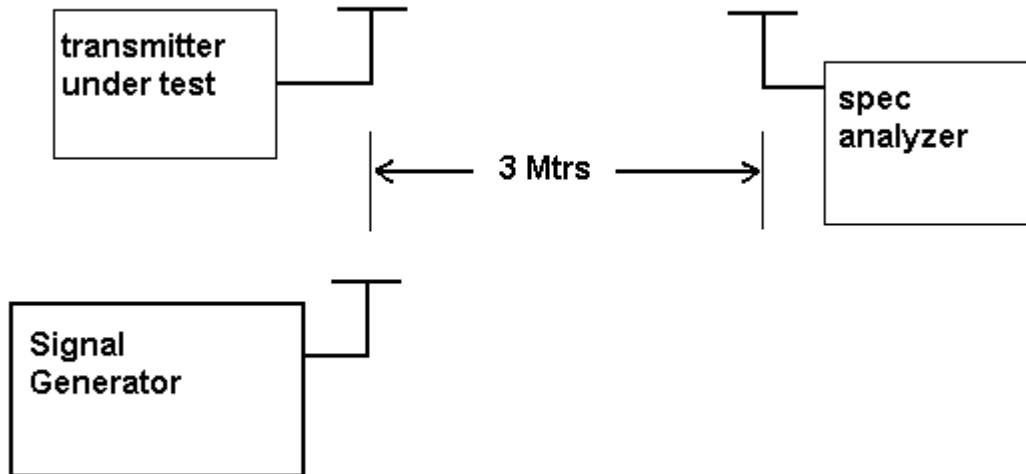

RF power is measured by the substitution method as outlined in TIA/EIA - 603. With a nominal battery voltage of 9.0 V, and the transmitter properly adjusted, the RF output measures:

.030 WATTS ERP

2.1055 Frequency stability:
S74.861(e)(4)

Temperature and voltage tests were performed to verify that the frequency remains within the .0050%, (50 ppm)(74.861 e.4) specification limit.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was recorded for temperature plotting. This procedure was repeated in 10-degree increments up to + 50 degrees C.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 799.997 975

TEMPERATURE °C	FREQUENCY MHz	PPM
-30C	800.002692	5.90
-20C	800.002698	5.90
-10C	800.001879	4.88
0C	800.000868	3.62
10C	799.999406	1.79
20C	799.997975	0.00
30C	799.997010	-1.21
40C	799.996211	-2.21
50C	799.996143	-2.29

25c END BATT. Volt(7.65)= 7.65VDC 799.999 272 + 1.62

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -2.29 to +5.90 ppm. The maximum frequency variation over the voltage range was +1.62 ppm.

APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 10 of 14

EMC Equipment List

Last Update: 7/8/03

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
X	3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/13/06
	3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
X	Receiver, Beige Tower Spectrum Analyzer RF Preselector Quasi-Peak Adapter Preamplifier	HP	8566B Opt 462	3138A07786 3144A20661 3221A01400 3303A01690 3008A00372	CAL 8/31/01 CAL 8/31/01 CAL 8/31/01 CHAR 3/4/01	8/31/03 8/31/03 8/31/03 3/4/03
X						
X						
X						
X						
	Receiver, Blue Tower Spectrum Analyzer RF Preselector Quasi-Peak Adapter	HP	8568B 85685A 85650A	2928A04729 2848A18049 2926A00983 2811A01279	CAL 4/15/03 CAL 4/15/03 CAL 4/15/03	4/15/05 4/15/05 4/15/05
	Receiver, Silver/Grey Tower Spectrum Analyzer RF Preselector Quasi-Peak Adapter Preamplifier	HP	8566B Opt 462	3552A22064 3638A08608 2620A00294 3303A01844 3008A01075	CAL 10/14/02 CAL 10/14/02 CAL 10/14/02 CHAR 1/28/02	10/14/04 10/14/04 10/14/04 1/28/04
	Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
	Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
	Biconnical Antenna	Eaton	94455-1	1057	CAL 3/18/03	3/18/05
	BiconiLog Antenna	EMCO	3143	9409-1043		
X	Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
	Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
	Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CAL 3/4/03	3/4/05
	Log-Periodic Antenna	Eaton	96005	1243	CAL 5/8/03	5/8/05

APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 11 of 14

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
X	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CAL 9/26/02	9/26/05
X	Double-Ridged Horn Antenna	Electro-Metrics	RGA-180	2319	CAL 2/17/03	2/17/05
	Horn Antenna *(at 3 meters)	Electro-Metrics	EM-6961	6246	CAL 3/31/03	3/31/05
	Horn Antenna *(at 10 meters)	Electro-Metrics	EM-6961	6246	CAL 6/4/03	6/4/05
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	
	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
	Harmonic Mixer with Horn Antenna	Oleson Microwave Labs	M08HW/A	F30425-1	CHAR 4/25/03	4/25/05
	Harmonic Mixer with Horn Antenna	Oleson Microwave Labs	M12HW/A	E30425-1	CHAR 4/25/03	4/25/05
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
	Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/12/03	3/12/05
	Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	5/25/01
	Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CHAR 9/7/01	9/7/03
	Oscilloscope	Tektronix	2230	300572	CAL 7/3/03	7/3/05
X	System One	Audio Precision	System One	SYS1-45868	CHAR 4/25/02	4/25/04
X	Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
X	AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
	AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
	AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
	Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
	Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/04
	Digital Multimeter	HP	E2377A	2927J05849	CHAR 1/8/02	1/8/04
X	Multimeter	Fluke	FLUKE-77-3	79510405	CHAR 9/26/01	9/26/03
	Peak Power Meter	HP	8900C	2131A00545	CAL 7/2/03	7/2/05

APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 12 of 14

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 7/2/03	7/2/05
	Power Meter	HP	432A	1141A07655	CAL 4/15/03	4/15/05
	Power Sensor	HP	478A	72129	CAL 4/15/03	4/15/05
	Power Meter And Sensor	Bird	4421-107 4022	0166 0218	CAL 4/16/03	4/16/05
	Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02	1/16/04
	Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/04
	Thermometer	Extech	4028	14871-2	CAL 3/7/03	3/7/05
X	Hygro-Thermometer	Extech	445703	0602	CAL 10/4/02	10/4/04
	Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/03
X	Frequency Counter	HP	5385A	2730A03025	CAL 3/7/03	3/7/05
	Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	11/22/02
	Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 5/12/02	5/12/04
	Signal Generator	HP	8640B	2308A21464	CAL 2/15/02	2/15/04
	Sweep Generator	Wiltron	6648	101009	CAL 4/15/03	4/15/05
	Sweep Generator	Wiltron	6669M	007005	CAL 3/3/03	3/3/05
X	Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
	Modulation Meter	Boonton	8220	10901AB	CAL 4/15/03	4/15/05
	Near Field Probe	HP	HP11940A	2650A02748	CHAR 2/1/01	2/1/03
	BandReject Filter	Lorch Microwave	5BR4-2400/ 60-N	Z1	CHAR 4/17/03	4/17/05
	BandReject Filter	Lorch Microwave	6BR6-2442/ 300-N	Z1	CHAR 4/17/03	4/17/05
	BandReject Filter	Lorch Microwave	5BR4-10525/ 900-S	Z1	CHAR 4/12/03	4/12/05
	Notch Filter	Lorch Microwave	5BRX-850/ X100-N	AD-1	CHAR 4/17/03	4/17/05
	High Pass Filter	Unk	3768(5)-400	041	CHAR 12/17/02	12/17/04
	High Pass Filter	Microlab	HA-10N		CHAR 11/17/02	11/17/04

APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 13 of 14

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	High Pass Filter	Microlab	HA-20N		CHAR 12/17/02	12/17/04
	Audio Oscillator	HP	653A	832-00260	CHAR 12/1/02	12/1/04
	Audio Generator	B&K Precision	3010	8739686	CHAR 12/1/02	12/1/04
	Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/03
	Frequency Counter	HP	5385A	3242A07460	CAL 3/7/03	3/7/05
	Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/03
	Egg Timer	Unk			CHAR 2/1/02	2/1/04
	Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
X	Measuring Tape, 7.5M	Kraftixx	7.5M PROFI		2/1/02	2/1/04
	Coaxial Cable #51	Insulated Wire Inc.	NPS 2251-2880	Timco #51	CHAR 1/23/02	1/23/04
X	Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
	Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
	Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04

APPLICANT: AZDEN CORPORATION

FCCID: BZB10BT

REPORT #: A\AZDEN\1166AUT3\1166AUT3TestReport.doc

Page 14 of 14