



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

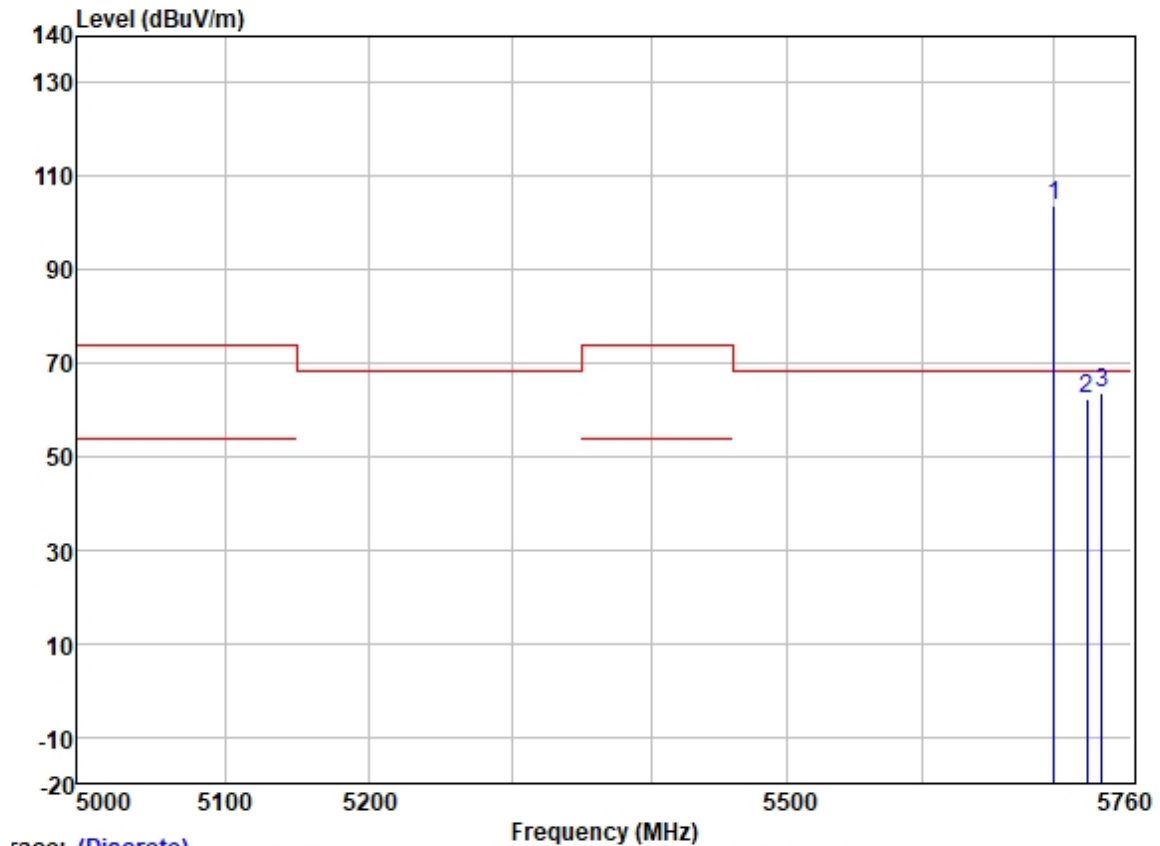


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	* 5700.000	102.35	32.01	6.40	36.89	103.87	68.20	35.67	HORIZONTAL	Peak
2	5725.000	60.87	32.07	6.25	36.89	62.30	68.20	-5.90	HORIZONTAL	Peak
3	5736.686	62.39	32.07	6.25	36.89	63.82	68.20	-4.38	HORIZONTAL	Peak

Test Mode: 03; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

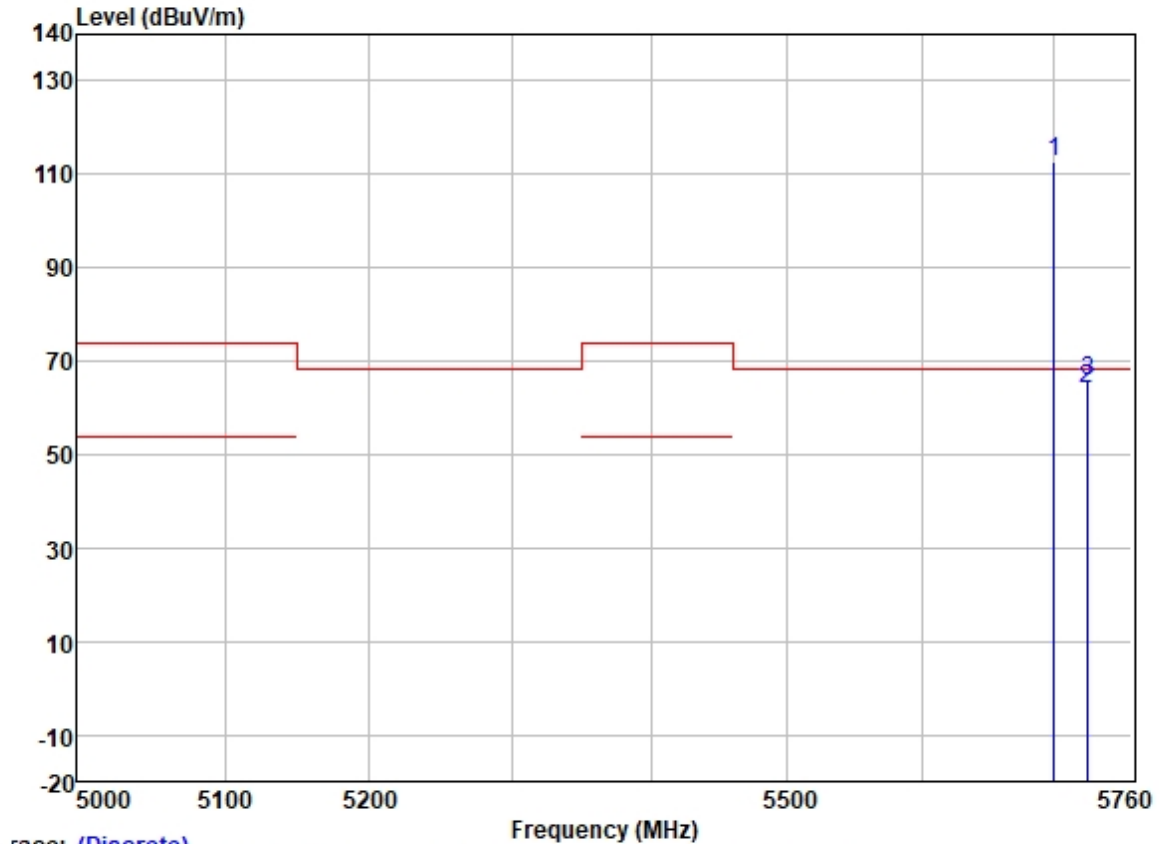


	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5700.000	111.01	32.01	6.40	36.89	112.53	68.20	44.33	VERTICAL Peak
2	5725.000	62.61	32.07	6.25	36.89	64.04	68.20	-4.16	VERTICAL Peak
3	5726.183	64.24	32.07	6.25	36.89	65.67	68.20	-2.53	VERTICAL Peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

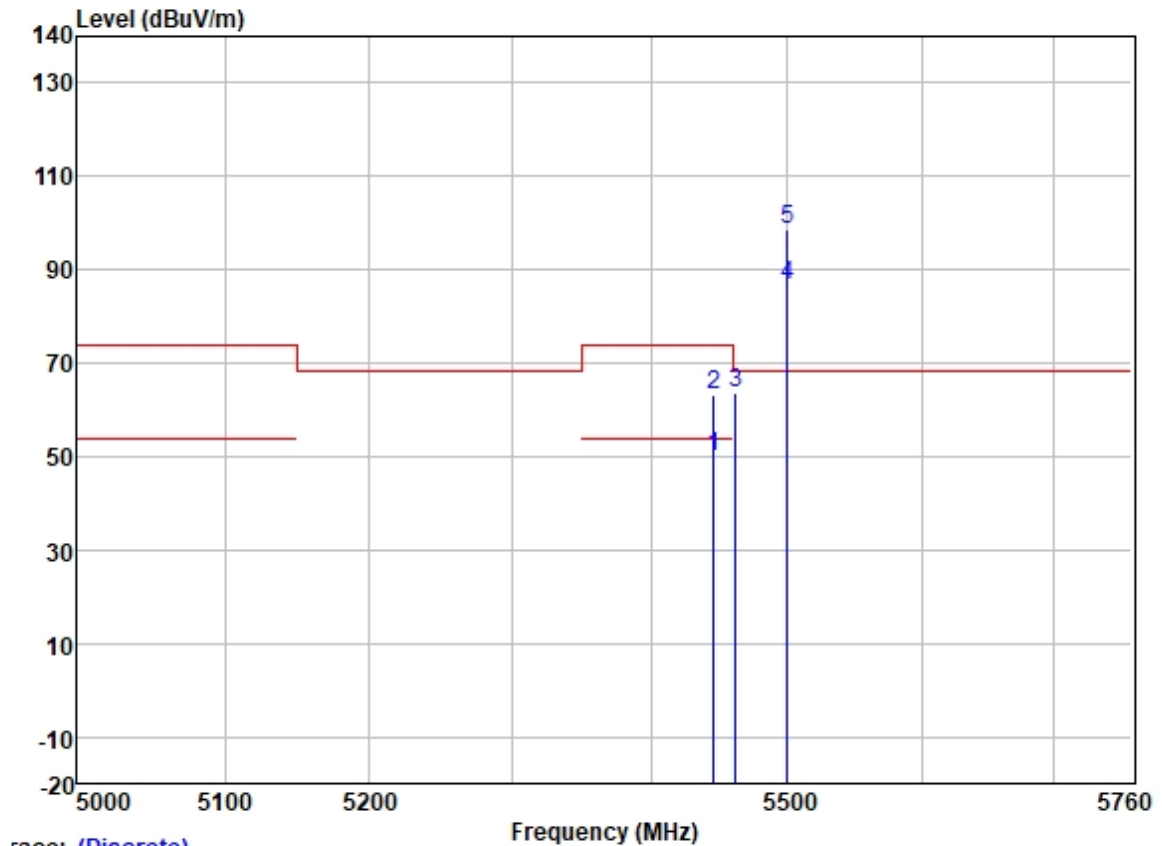


race: (Discrete)	Frequency (MHz)								
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark
		Level	Factor	Loss	Factor	Level	Line		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5445.529	48.67	31.79	6.20	36.88	49.78	54.00	-4.22	HORIZONTAL Average
2	5445.529	61.92	31.79	6.20	36.88	63.03	74.00	-10.97	HORIZONTAL Peak
3	5461.351	62.27	31.79	6.26	36.88	63.44	68.20	-4.76	HORIZONTAL Peak
4	5500.000	85.54	31.80	6.40	36.88	86.86	-----	-----	HORIZONTAL Average
5 *	5500.000	97.48	31.80	6.40	36.88	98.80	68.20	30.60	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

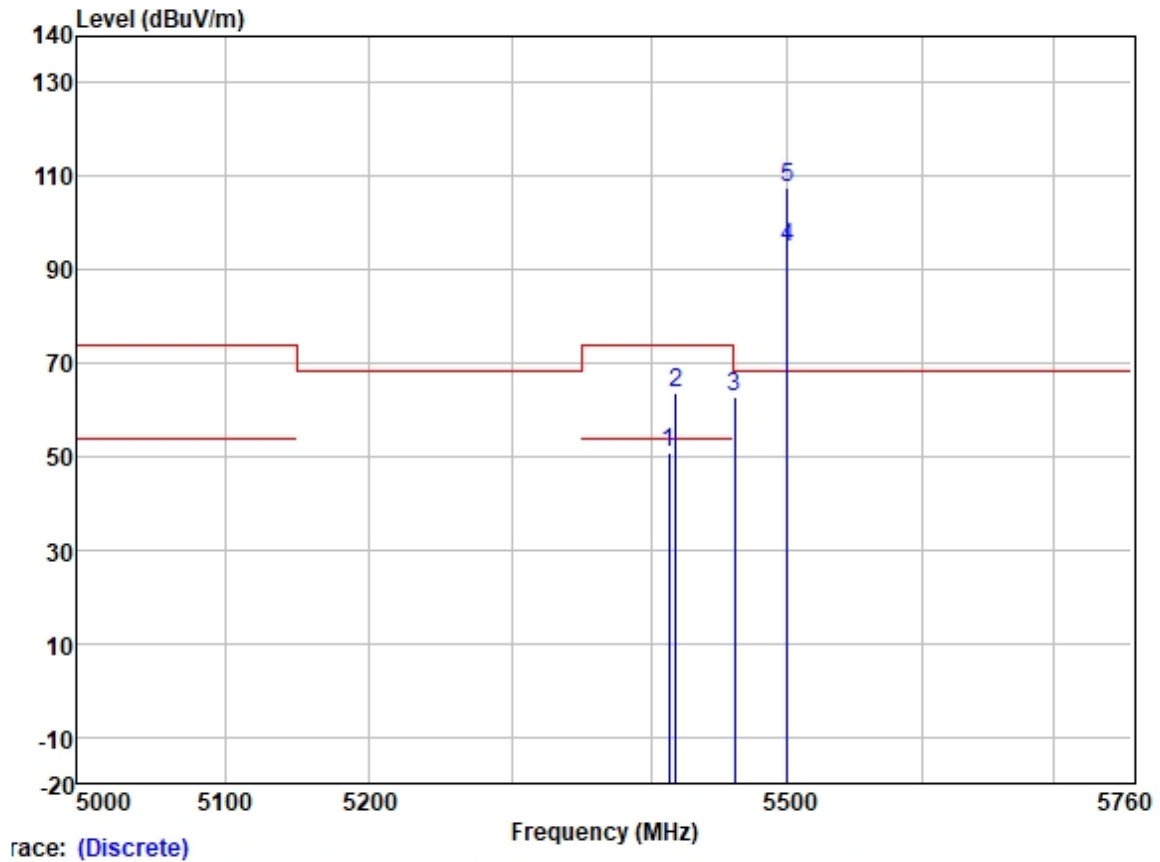

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5413.309	49.66	31.79	6.06	36.88	50.63	54.00	-3.37	VERTICAL	Average
2	5418.070	62.43	31.79	6.13	36.88	63.47	74.00	-10.53	VERTICAL	Peak
3	5460.630	61.78	31.79	6.26	36.88	62.95	68.20	-5.25	VERTICAL	Peak
4	5500.000	93.63	31.80	6.40	36.88	94.95	-----	-----	VERTICAL	Average
5 *	5500.000	106.16	31.80	6.40	36.88	107.48	68.20	39.28	VERTICAL	Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

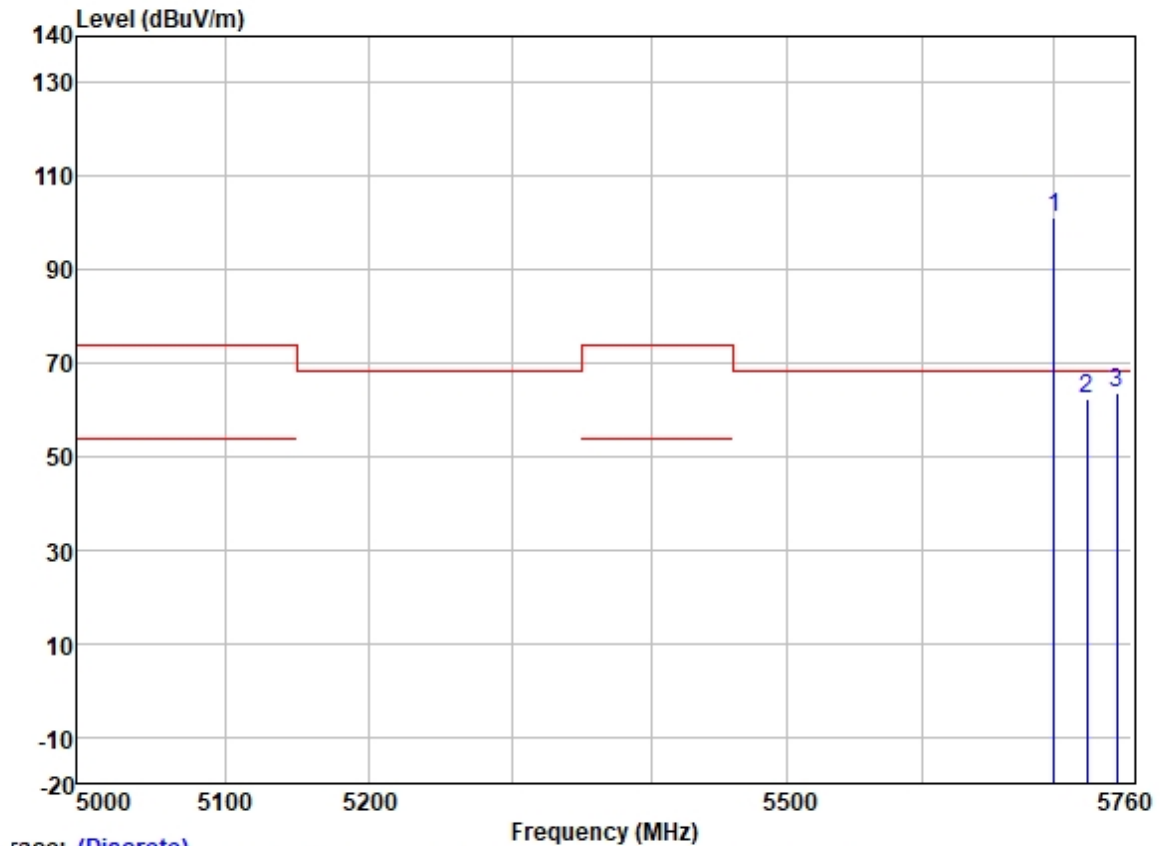

Trace: (Discrete)


	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5700.000	99.86	32.01	6.40	36.89	101.38	68.20	33.18	HORIZONTAL Peak
2	5725.000	60.85	32.07	6.25	36.89	62.28	68.20	-5.92	HORIZONTAL Peak
3	5748.312	62.20	32.10	6.20	36.89	63.61	68.20	-4.59	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

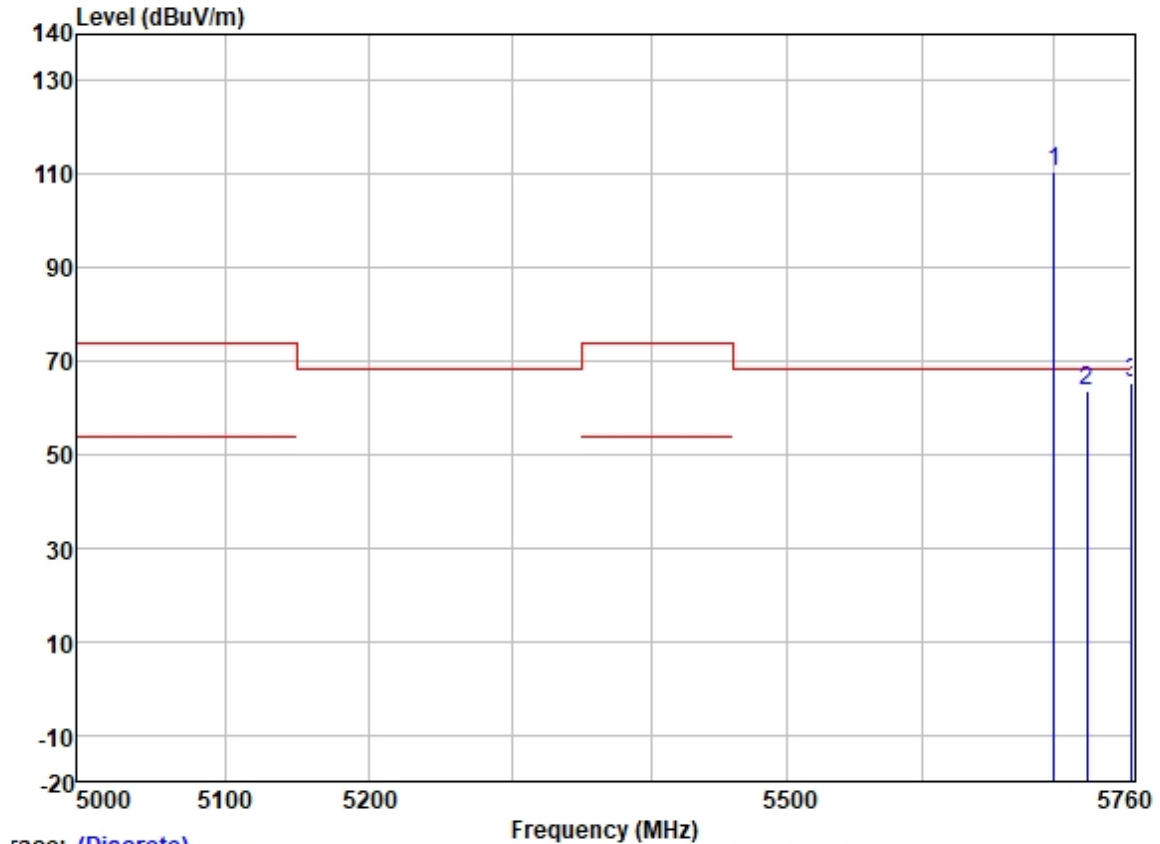

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5700.000	108.96	32.01	6.40	36.89	110.48	68.20	42.28	VERTICAL Peak
2	5725.000	62.36	32.07	6.25	36.89	63.79	68.20	-4.41	VERTICAL Peak
3	5759.559	64.15	32.13	6.15	36.89	65.54	68.20	-2.66	VERTICAL Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

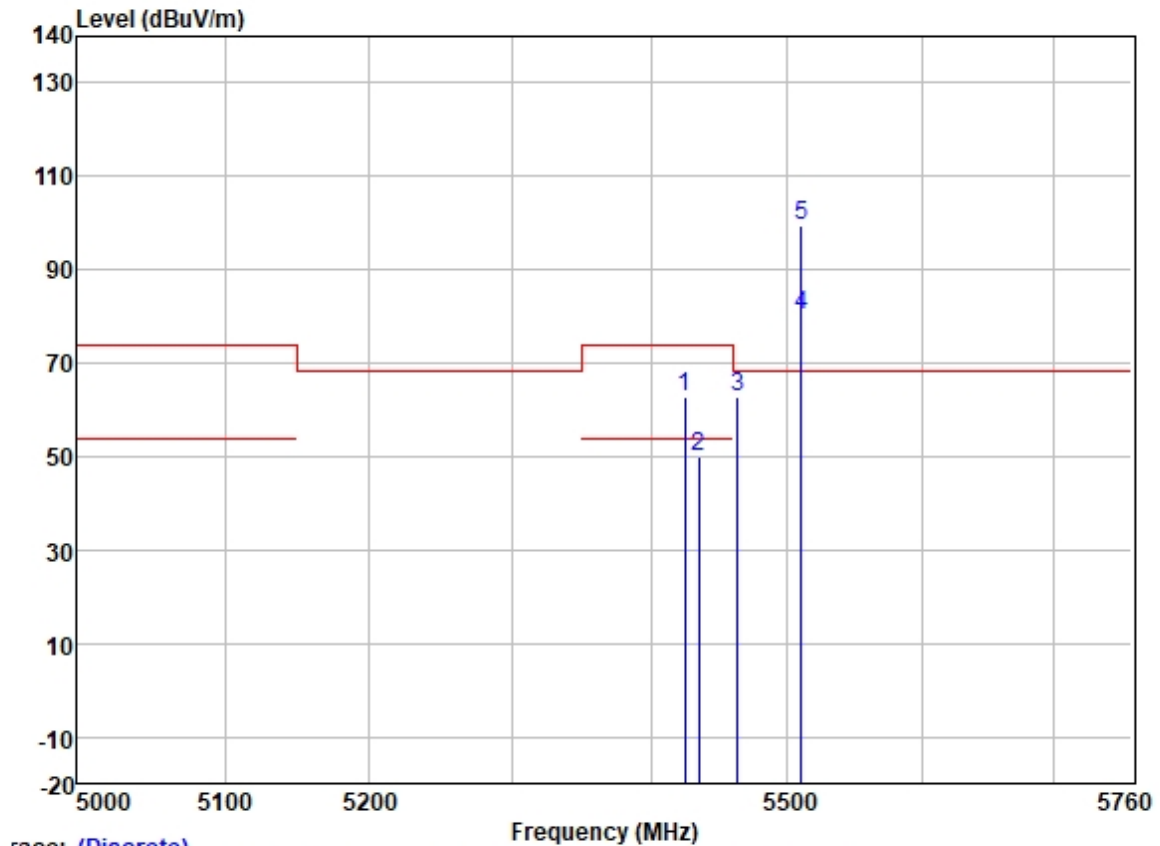

Trace: (Discrete)

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5424.797	61.70	31.79	6.13	36.88	62.74	74.00	-11.26	HORIZONTAL Peak
2	5434.665	48.68	31.79	6.20	36.88	49.79	54.00	-4.21	HORIZONTAL Average
3	5463.396	61.47	31.79	6.26	36.88	62.64	68.20	-5.56	HORIZONTAL Peak
4	5510.000	79.01	31.80	6.40	36.88	80.33	-----	-----	HORIZONTAL Average
5 *	5510.000	97.98	31.80	6.40	36.88	99.30	68.20	31.10	HORIZONTAL Peak


Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

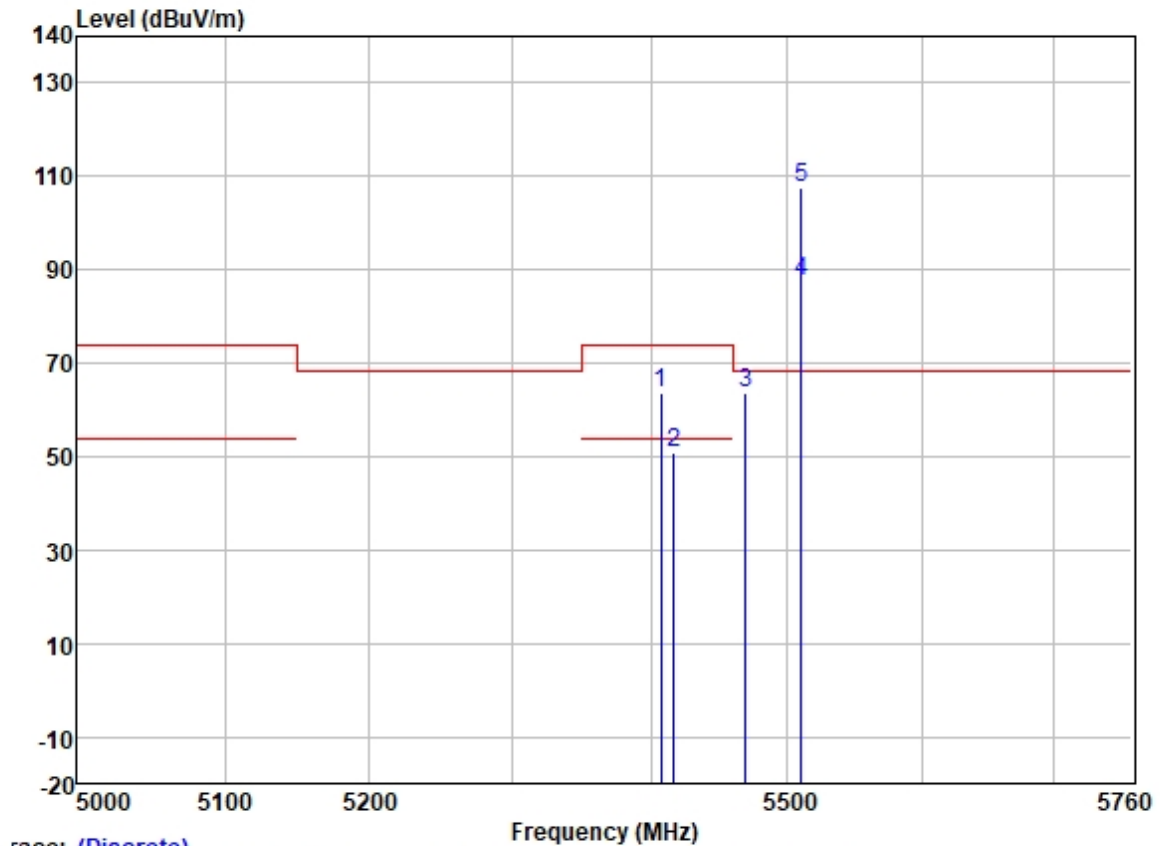

Trace: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5407.054	62.70	31.79	6.06	36.88	63.67	74.00	-10.33	VERTICAL	Peak
2	5416.750	49.97	31.79	6.13	36.88	51.01	54.00	-2.99	VERTICAL	Average
3	5468.852	62.30	31.80	6.31	36.88	63.53	68.20	-4.67	VERTICAL	Peak
4	5510.000	86.14	31.80	6.40	36.88	87.46	-----	-----	VERTICAL	Average
5 *	5510.000	106.06	31.80	6.40	36.88	107.38	68.20	39.18	VERTICAL	Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

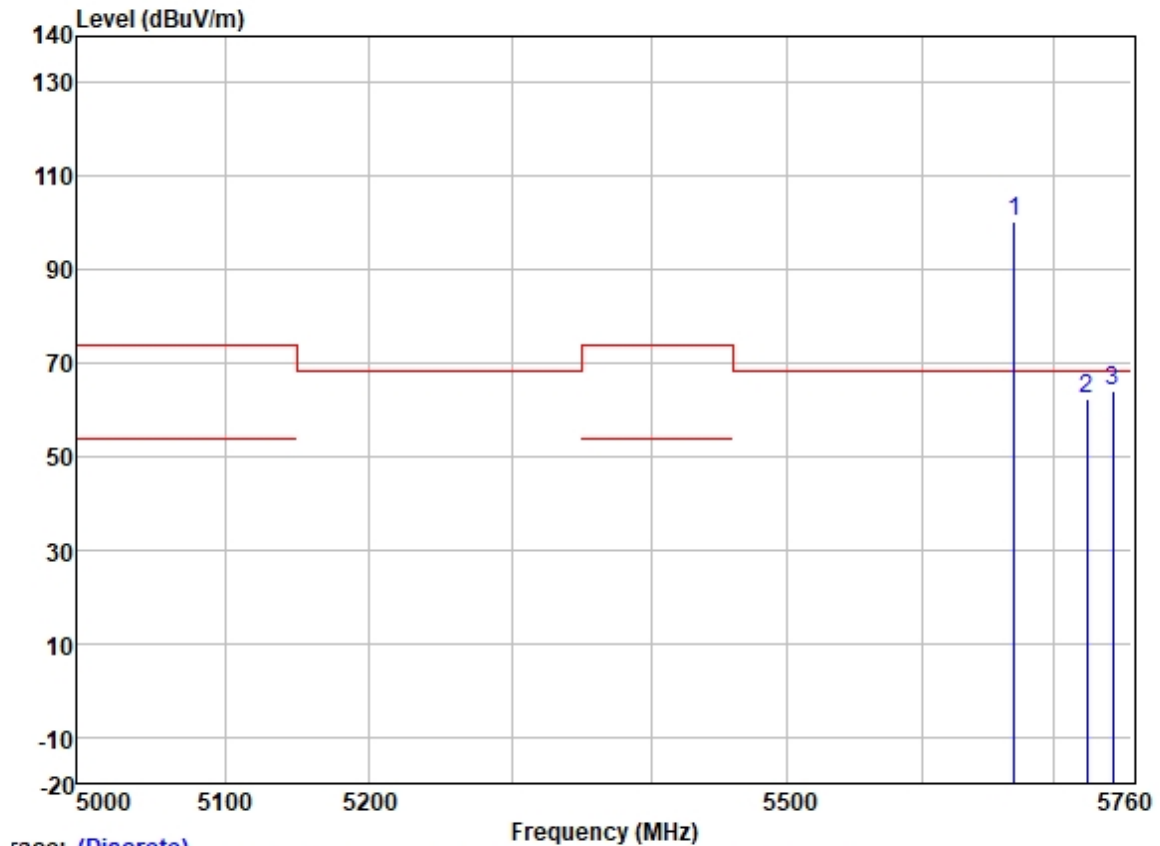

Trace: (Discrete)


	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5670.000	98.98	31.97	6.37	36.89	100.43	68.20	32.23	HORIZONTAL Peak
2	5725.000	60.76	32.07	6.25	36.89	62.19	68.20	-6.01	HORIZONTAL Peak
3	5745.100	62.67	32.10	6.20	36.89	64.08	68.20	-4.12	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 40MHz; Channel: High

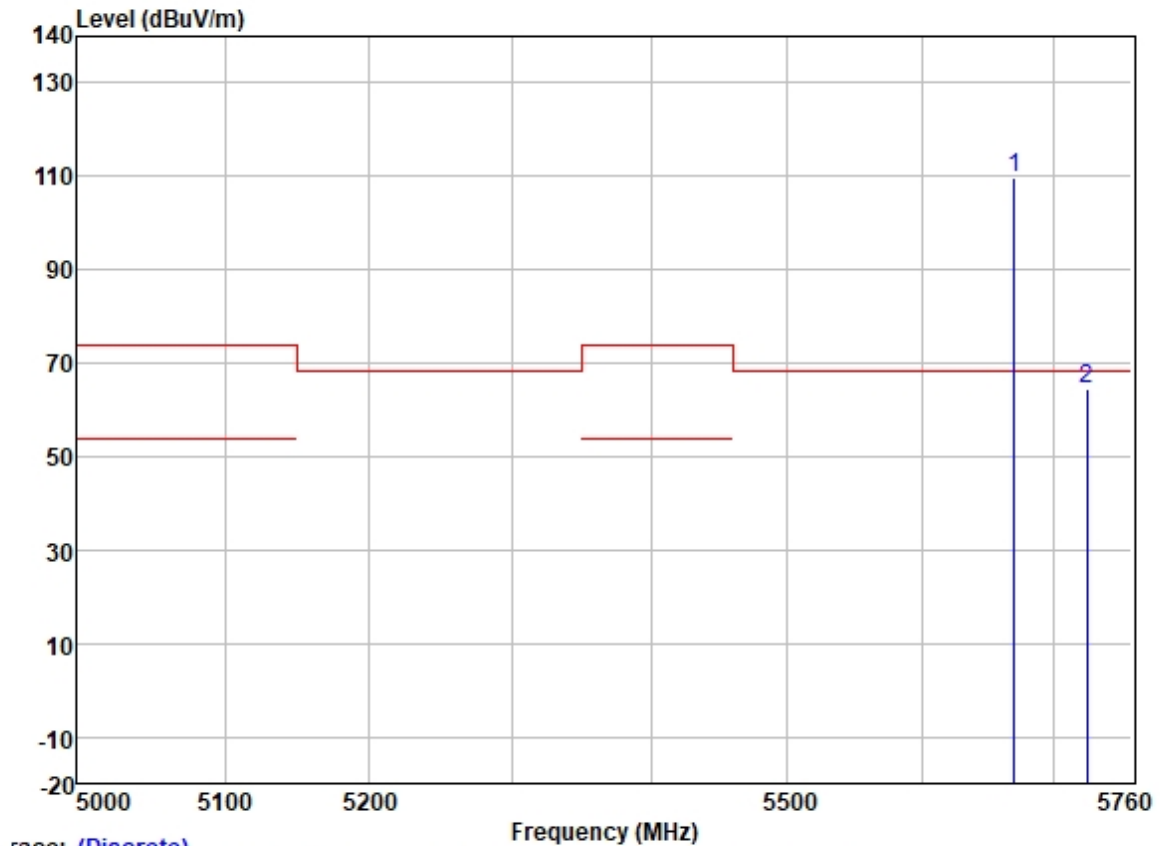


	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5670.000	108.40	31.97	6.37	36.89	109.85	68.20	41.65	VERTICAL	Peak
2	5725.000	63.10	32.07	6.25	36.89	64.53	68.20	-3.67	VERTICAL	Peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

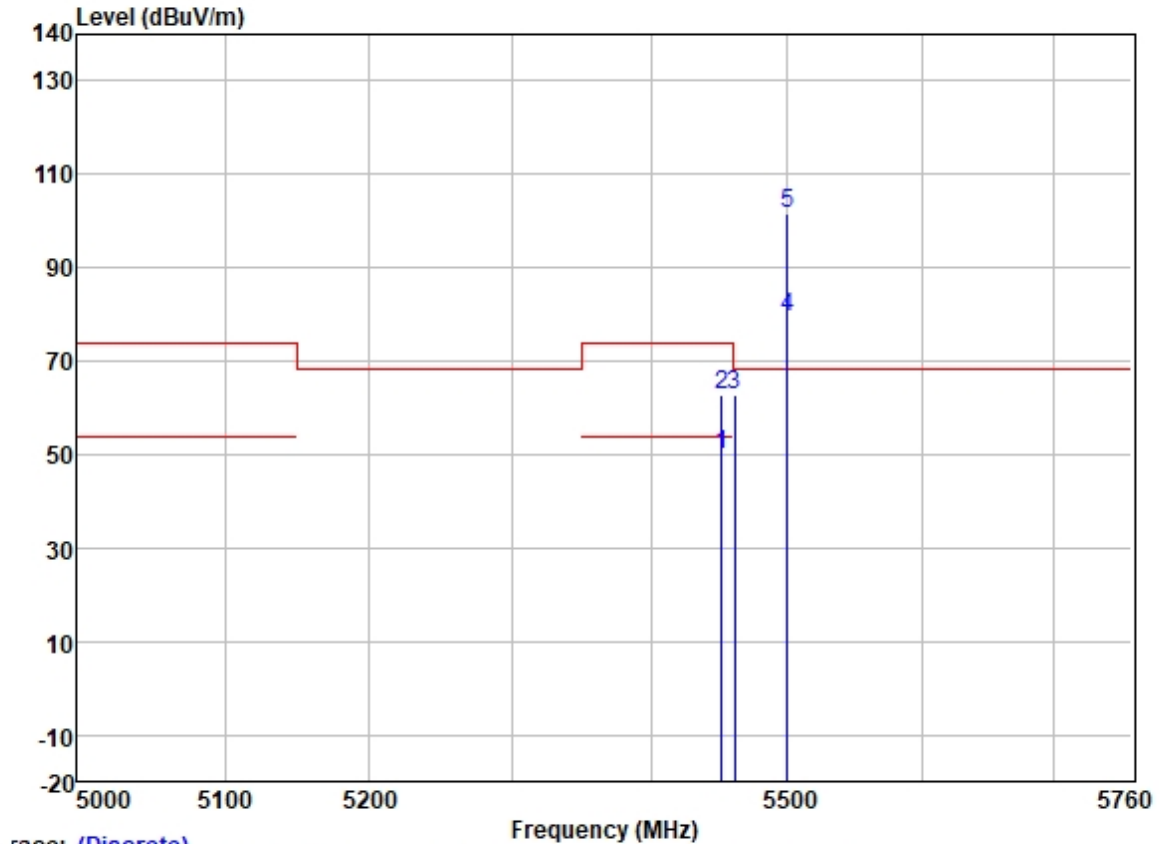


race: (Discrete)	Frequency (MHz)								
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark
		Level	Factor	Loss	Factor	Level	Line		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5451.756	48.60	31.79	6.26	36.88	49.77	54.00	-4.23	HORIZONTAL Average
2	5451.756	61.75	31.79	6.26	36.88	62.92	74.00	-11.08	HORIZONTAL Peak
3	5461.110	61.68	31.79	6.26	36.88	62.85	68.20	-5.35	HORIZONTAL Peak
4	5500.000	78.10	31.80	6.40	36.88	79.42	-----	-----	HORIZONTAL Average
5 *	5500.000	100.32	31.80	6.40	36.88	101.64	68.20	33.44	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: Low

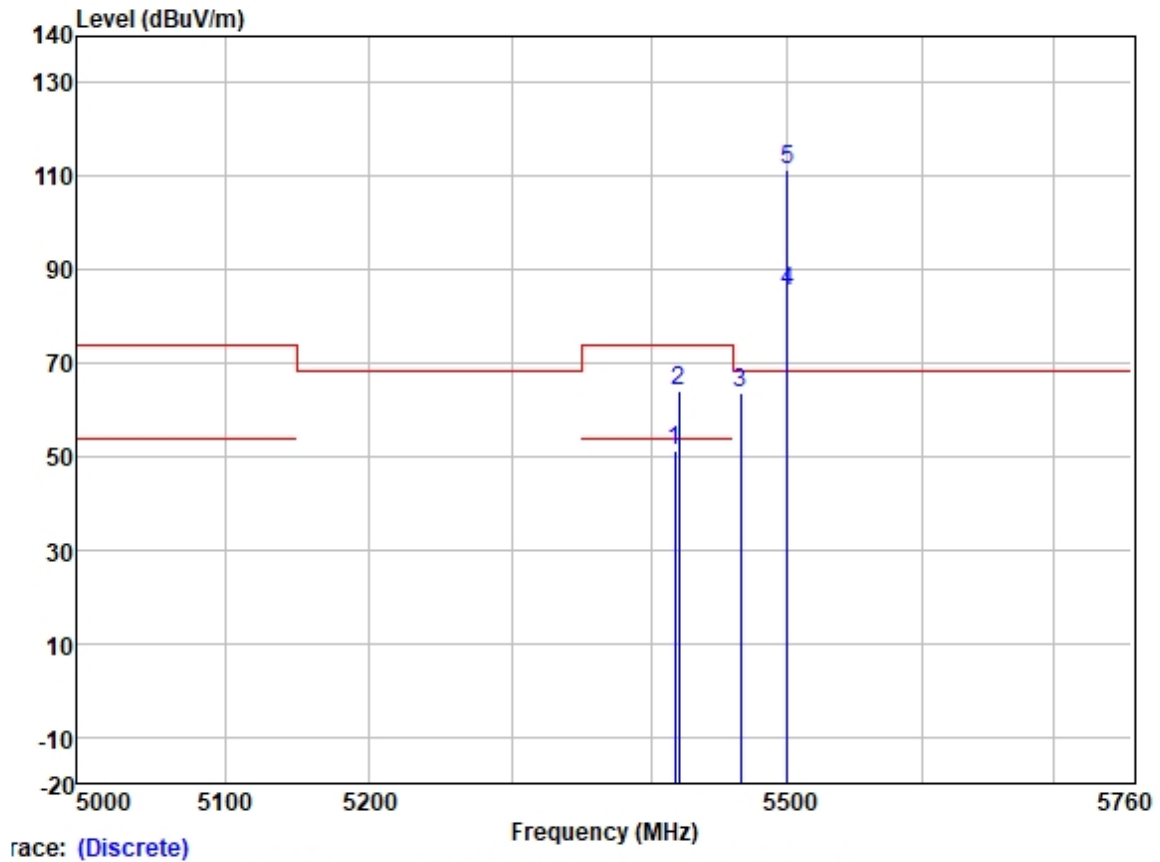

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5417.237	50.03	31.79	6.13	36.88	51.07	54.00	-2.93	VERTICAL	Average
2	5419.857	62.85	31.79	6.13	36.88	63.89	74.00	-10.11	VERTICAL	Peak
3	5464.953	62.27	31.80	6.31	36.88	63.50	68.20	-4.70	VERTICAL	Peak
4	5500.000	84.28	31.80	6.40	36.88	85.60	-----	-----	VERTICAL	Average
5 *	5500.000	110.07	31.80	6.40	36.88	111.39	68.20	43.19	VERTICAL	Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

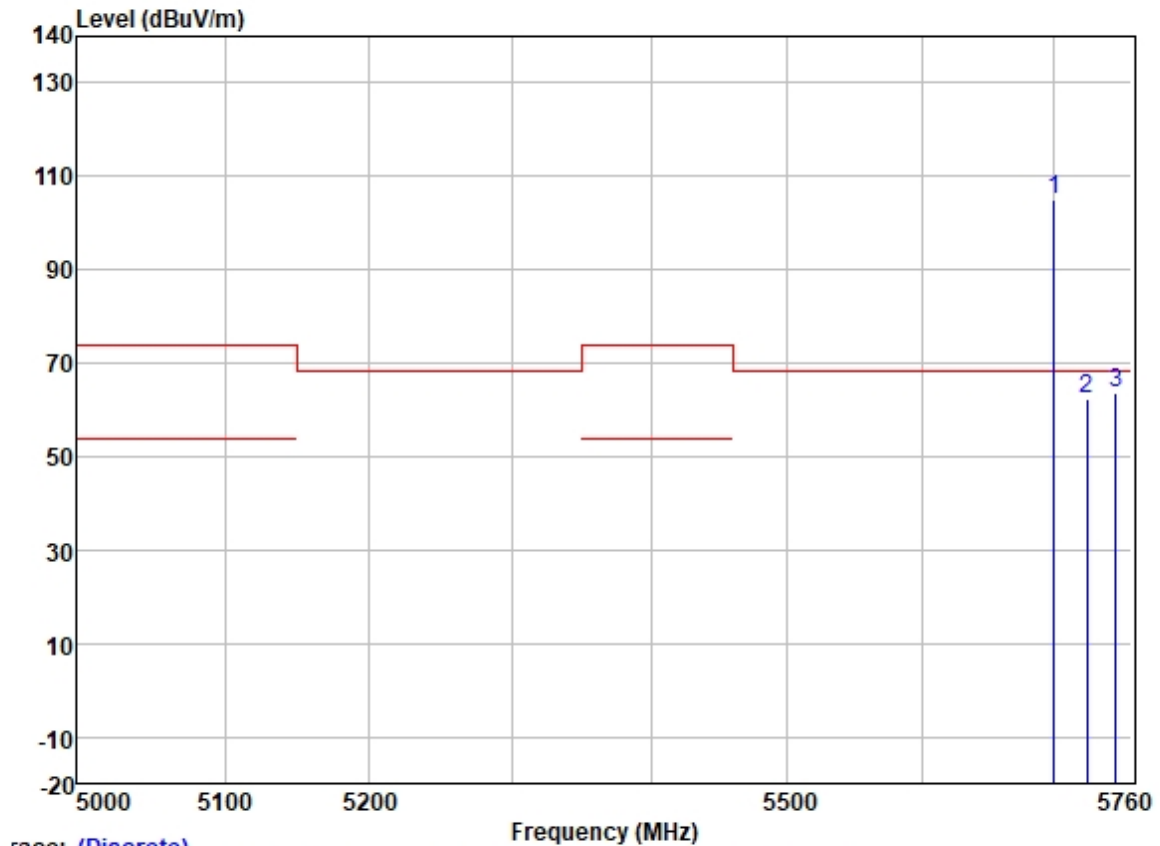

Trace: (Discrete)


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1 *	5700.000	103.50	32.01	6.40	36.89	105.02	68.20	36.82	HORIZONTAL Peak
2	5725.000	60.99	32.07	6.25	36.89	62.42	68.20	-5.78	HORIZONTAL Peak
3	5747.609	62.12	32.10	6.20	36.89	63.53	68.20	-4.67	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: High

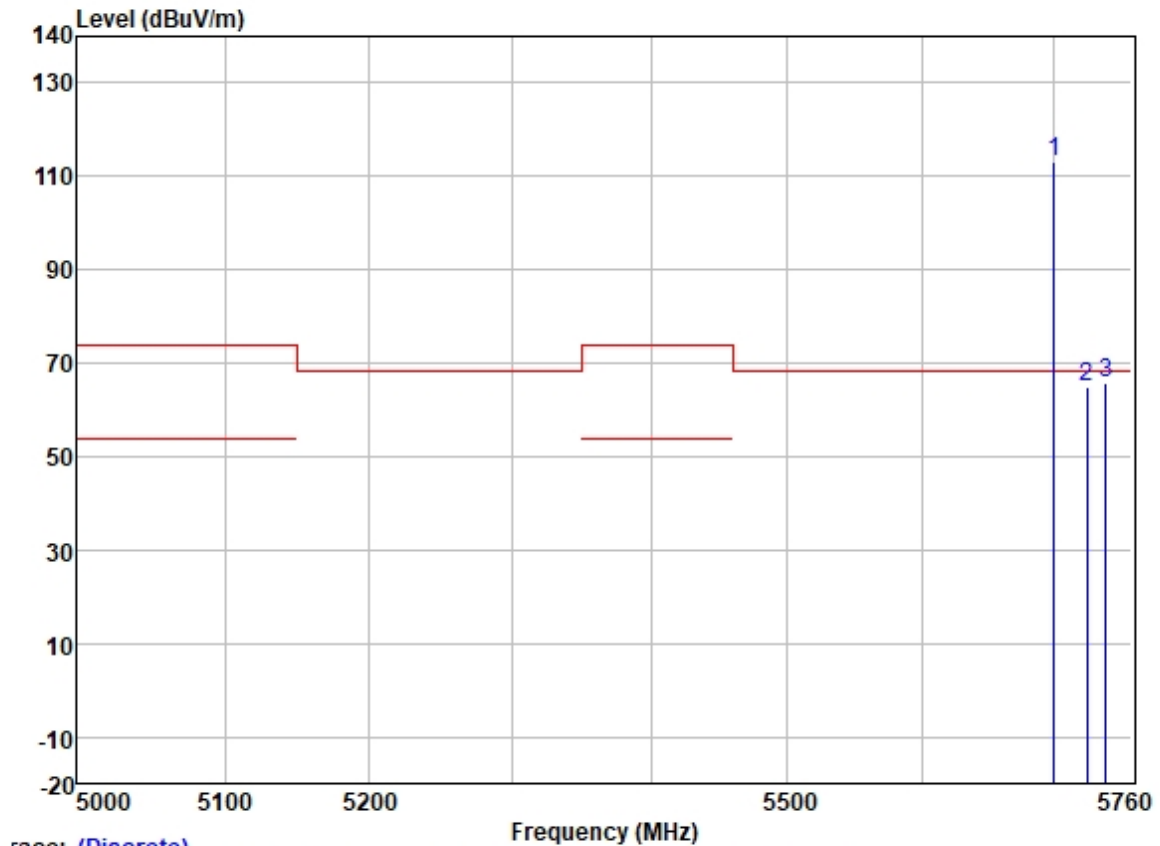

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5700.000	111.41	32.01	6.40	36.89	112.93	68.20	44.73	VERTICAL Peak
2	5725.000	63.68	32.07	6.25	36.89	65.11	68.20	-3.09	VERTICAL Peak
3	5739.690	64.43	32.10	6.20	36.89	65.84	68.20	-2.36	VERTICAL Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

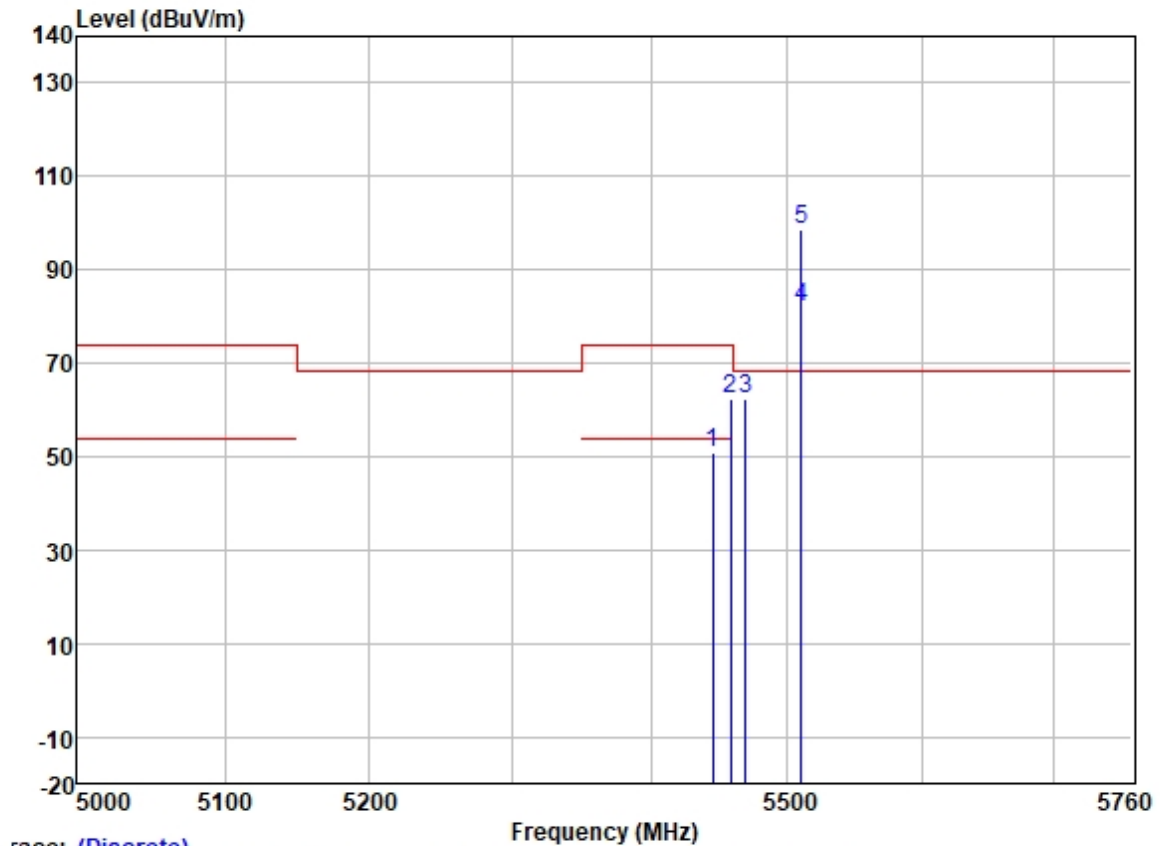

Trace: (Discrete)


	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5444.968	49.81	31.79	6.20	36.88	50.92	54.00	-3.08	HORIZONTAL Average
2	5457.666	61.16	31.79	6.26	36.88	62.33	74.00	-11.67	HORIZONTAL Peak
3	5468.572	61.25	31.80	6.31	36.88	62.48	68.20	-5.72	HORIZONTAL Peak
4	5510.000	80.51	31.80	6.40	36.88	81.83	-----	-----	HORIZONTAL Average
5 *	5510.000	97.33	31.80	6.40	36.88	98.65	68.20	30.45	HORIZONTAL Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

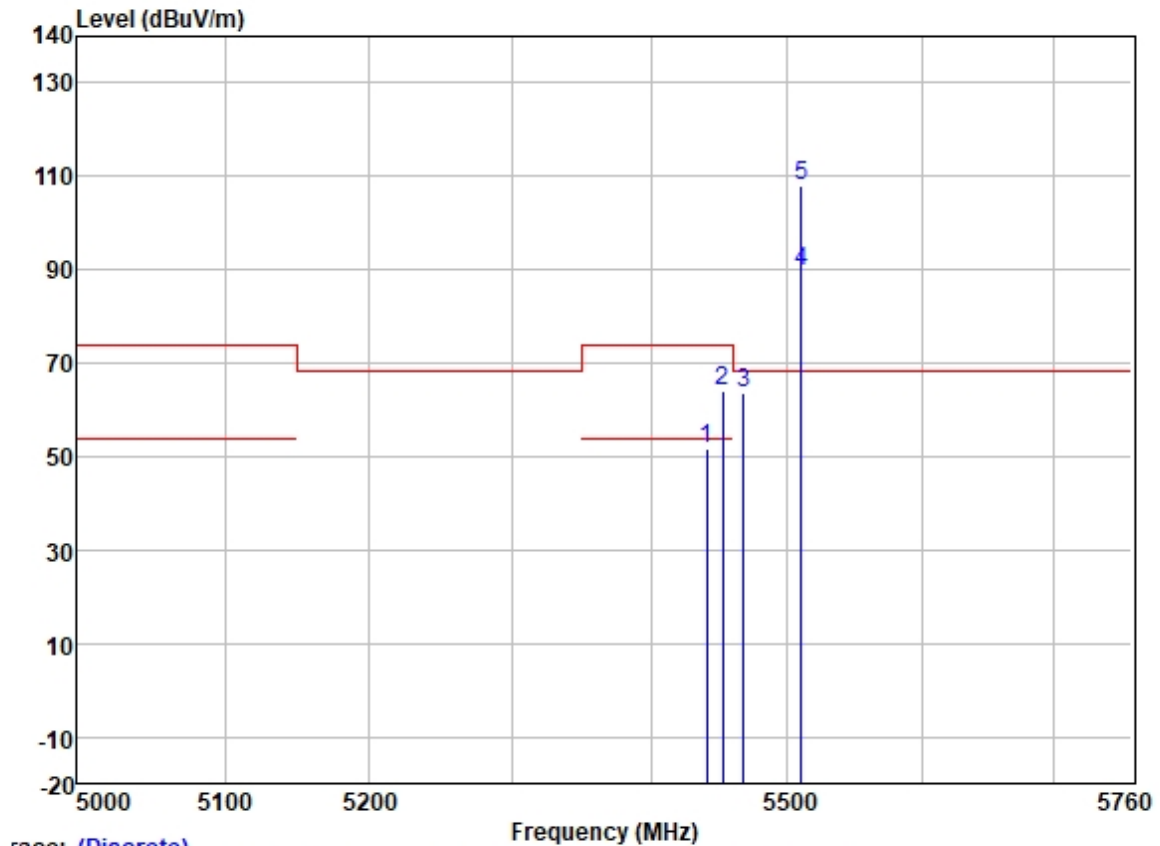


race: (Discrete)	Frequency (MHz)									
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark	
		Level	Factor	Loss	Factor	Level	Line			Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5440.510	50.63	31.79	6.20	36.88	51.74	54.00	-2.26	VERTICAL	Average
2	5452.081	62.71	31.79	6.26	36.88	63.88	74.00	-10.12	VERTICAL	Peak
3	5467.313	62.38	31.80	6.31	36.88	63.61	68.20	-4.59	VERTICAL	Peak
4	5510.000	88.30	31.80	6.40	36.88	89.62	-----	-----	VERTICAL	Average
5 *	5510.000	106.52	31.80	6.40	36.88	107.84	68.20	39.64	VERTICAL	Peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

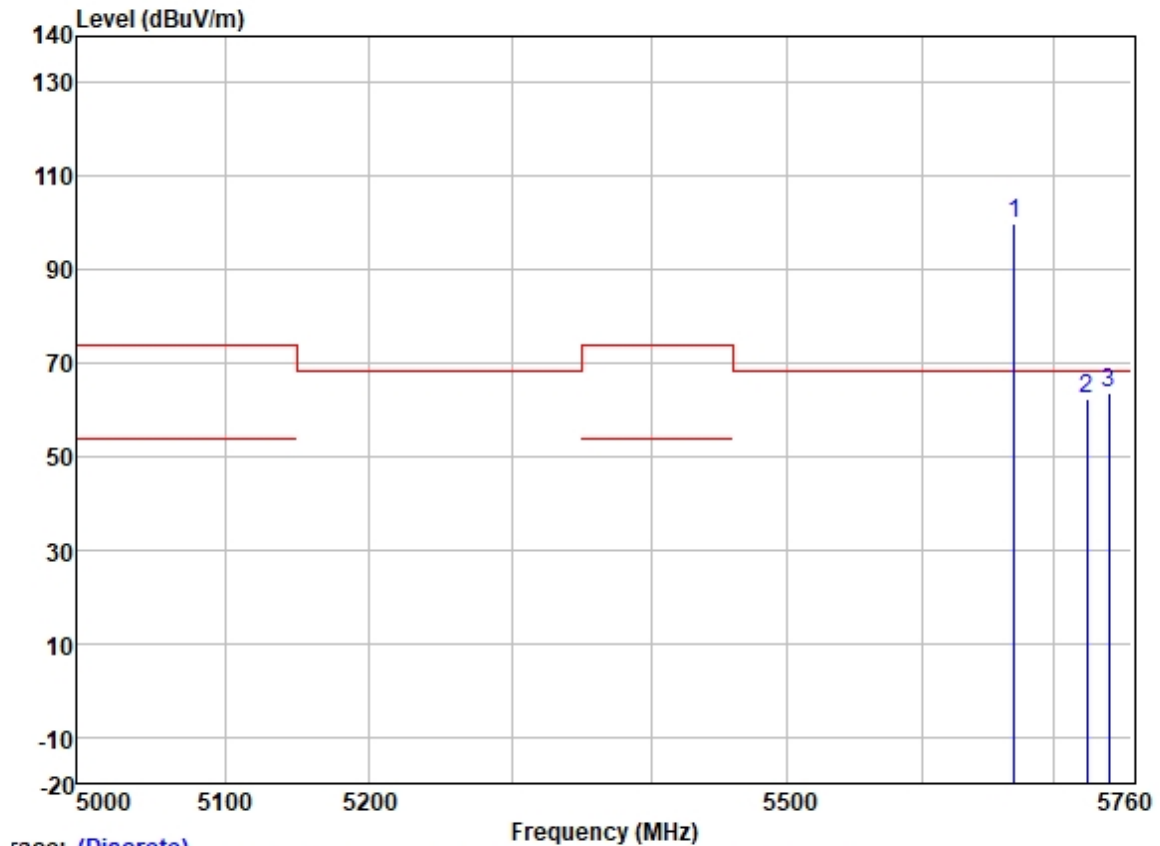

	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5670.000	98.51	31.97	6.37	36.89	99.96	68.20	31.76	HORIZONTAL Peak
2	5725.000	60.90	32.07	6.25	36.89	62.33	68.20	-5.87	HORIZONTAL Peak
3	5742.002	62.38	32.10	6.20	36.89	63.79	68.20	-4.41	HORIZONTAL Peak


Test Mode: 03; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: High

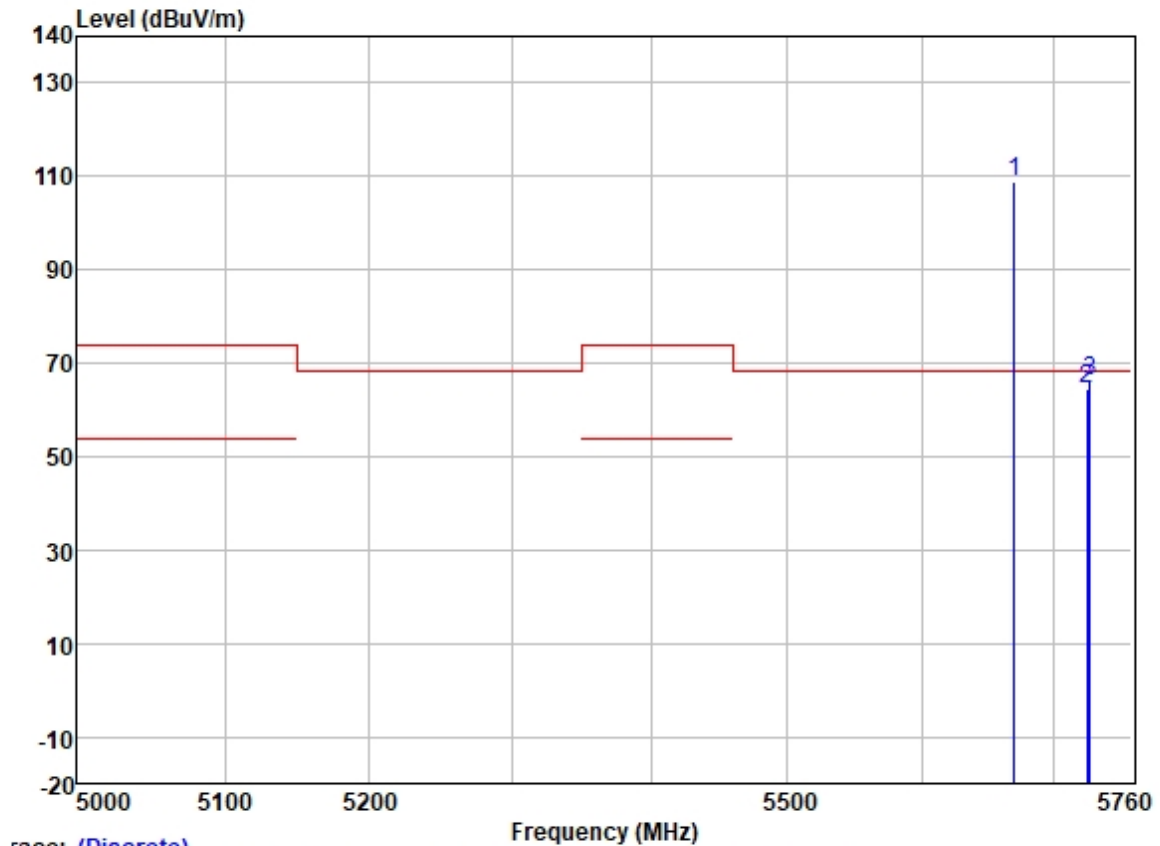

Trace: (Discrete)

	Read Freq	Antenna Level	Cable Factor	Preamp Loss	Preamp Factor	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1 *	5670.000	107.23	31.97	6.37	36.89	108.68	68.20	40.48 VERTICAL	Peak
2	5725.000	62.96	32.07	6.25	36.89	64.39	68.20	-3.81 VERTICAL	Peak
3	5727.659	64.73	32.07	6.25	36.89	66.16	68.20	-2.04 VERTICAL	Peak


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

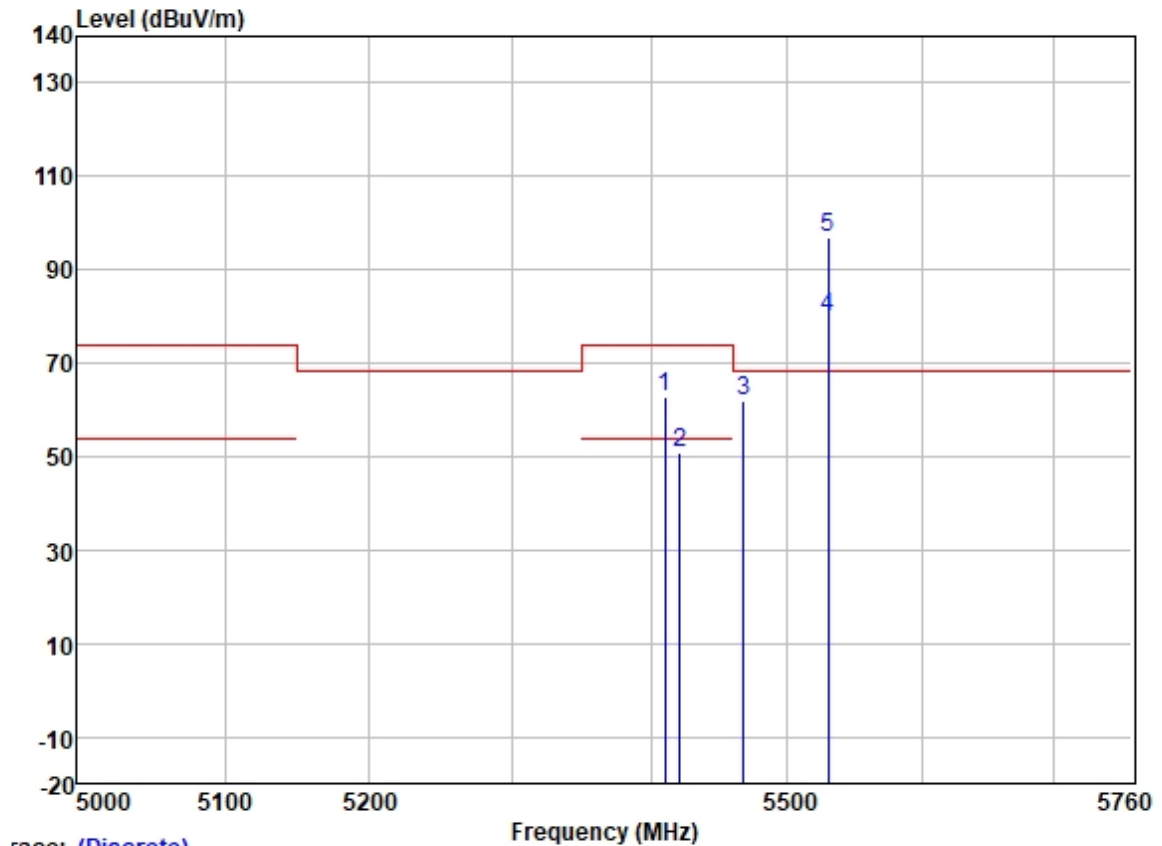

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5409.748	61.75	31.79	6.06	36.88	62.72	74.00	-11.28	HORIZONTAL	Peak
2	5421.290	49.67	31.79	6.13	36.88	50.71	54.00	-3.29	HORIZONTAL	Average
3	5467.347	60.81	31.80	6.31	36.88	62.04	68.20	-6.16	HORIZONTAL	Peak
4	5530.000	78.59	31.83	6.37	36.89	79.90	-----	-----	HORIZONTAL	Average
5 *	5530.000	95.54	31.83	6.37	36.89	96.85	68.20	28.65	HORIZONTAL	Peak

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

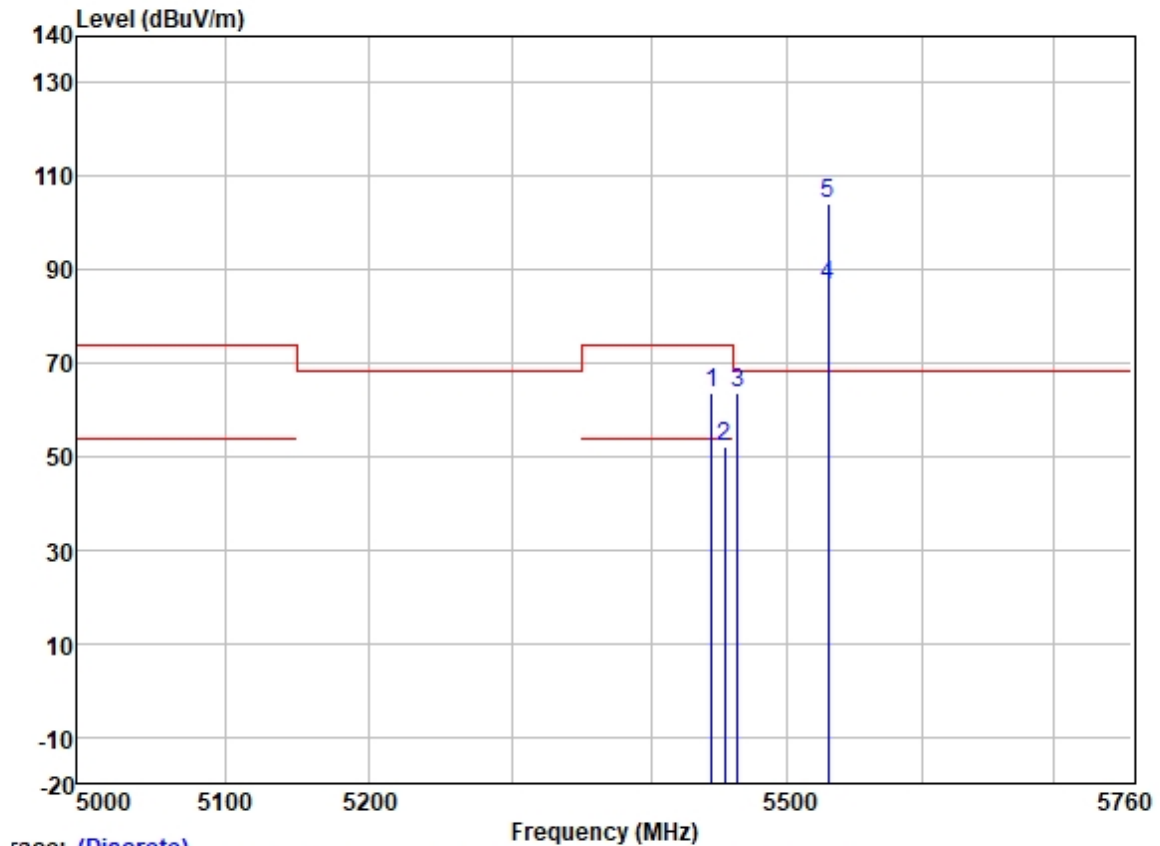


Race: (Discrete)	Frequency (MHz)									
	Freq	ReadAntenna	Cable	Preamp		Limit	Over	Pol/Phase	Remark	
		Level	Factor	Loss	Factor	Level	Line			Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5444.270	62.52	31.79	6.20	36.88	63.63	74.00	-10.37	VERTICAL	Peak
2	5453.561	51.01	31.79	6.26	36.88	52.18	54.00	-1.82	VERTICAL	Average
3	5463.404	62.65	31.79	6.26	36.88	63.82	68.20	-4.38	VERTICAL	Peak
4	5530.000	85.44	31.83	6.37	36.89	86.75	-----	-----	VERTICAL	Average
5 *	5530.000	102.82	31.83	6.37	36.89	104.13	68.20	35.93	VERTICAL	Peak

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

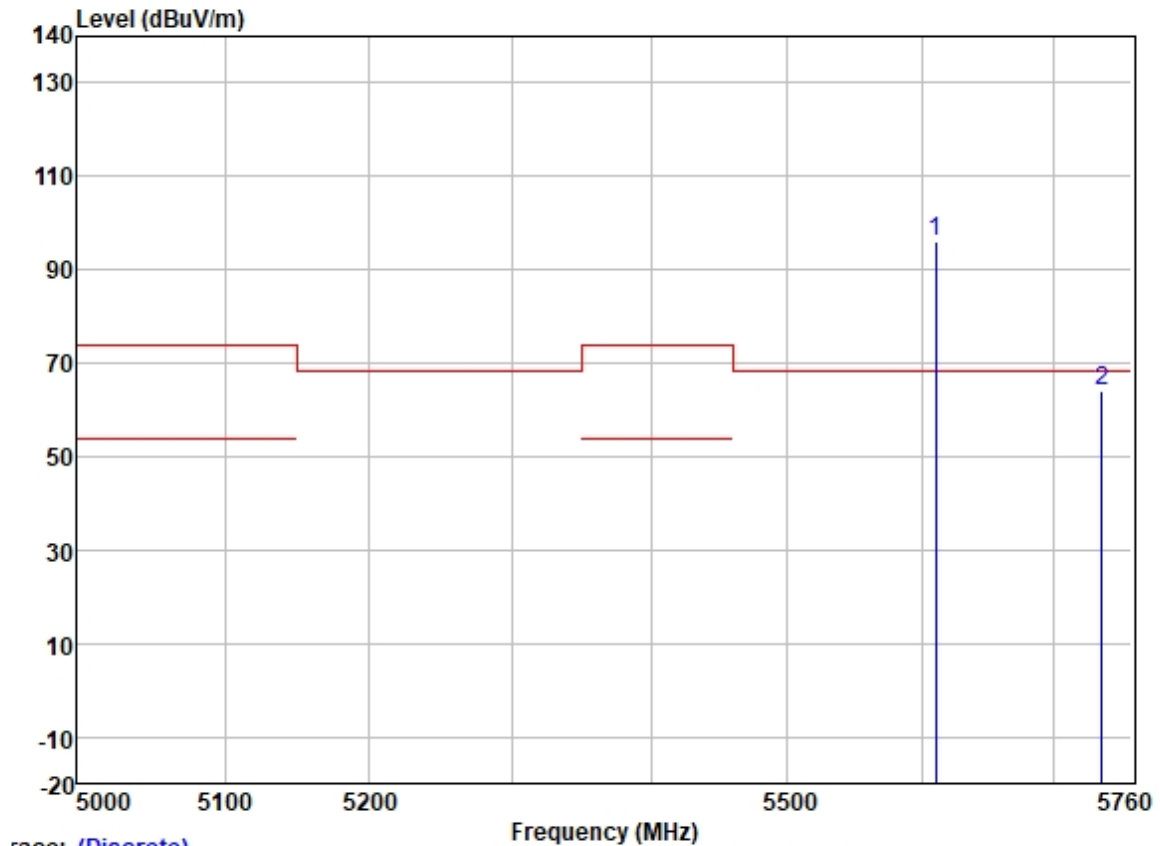

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	* 5610.000	94.87	31.91	6.32	36.89	96.21	68.20	28.01	HORIZONTAL	Peak
2	5736.639	62.52	32.07	6.25	36.89	63.95	68.20	-4.25	HORIZONTAL	Peak


Test Mode: 03; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: High

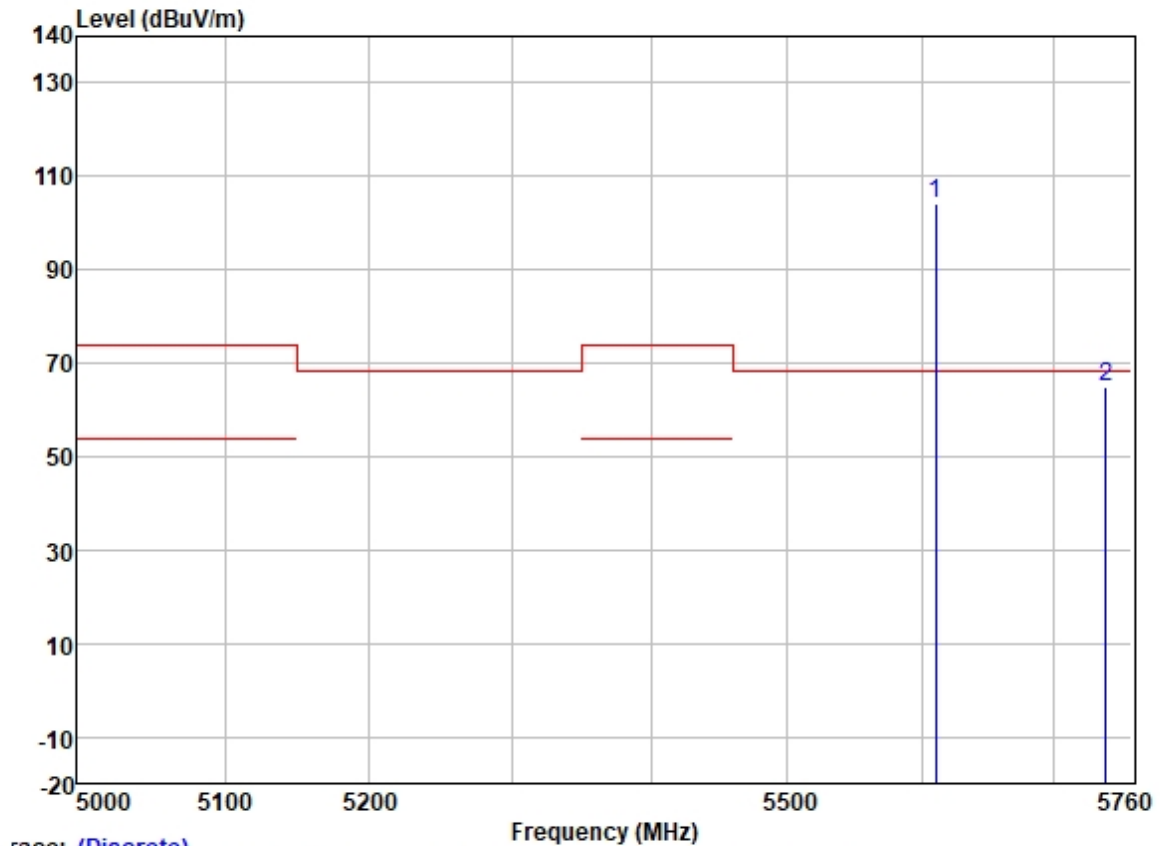

Trace: (Discrete)


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1 *	5610.000	102.87	31.91	6.32	36.89	104.21	68.20	36.01 VERTICAL	Peak
2	5740.086	63.31	32.10	6.20	36.89	64.72	68.20	-3.48 VERTICAL	Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

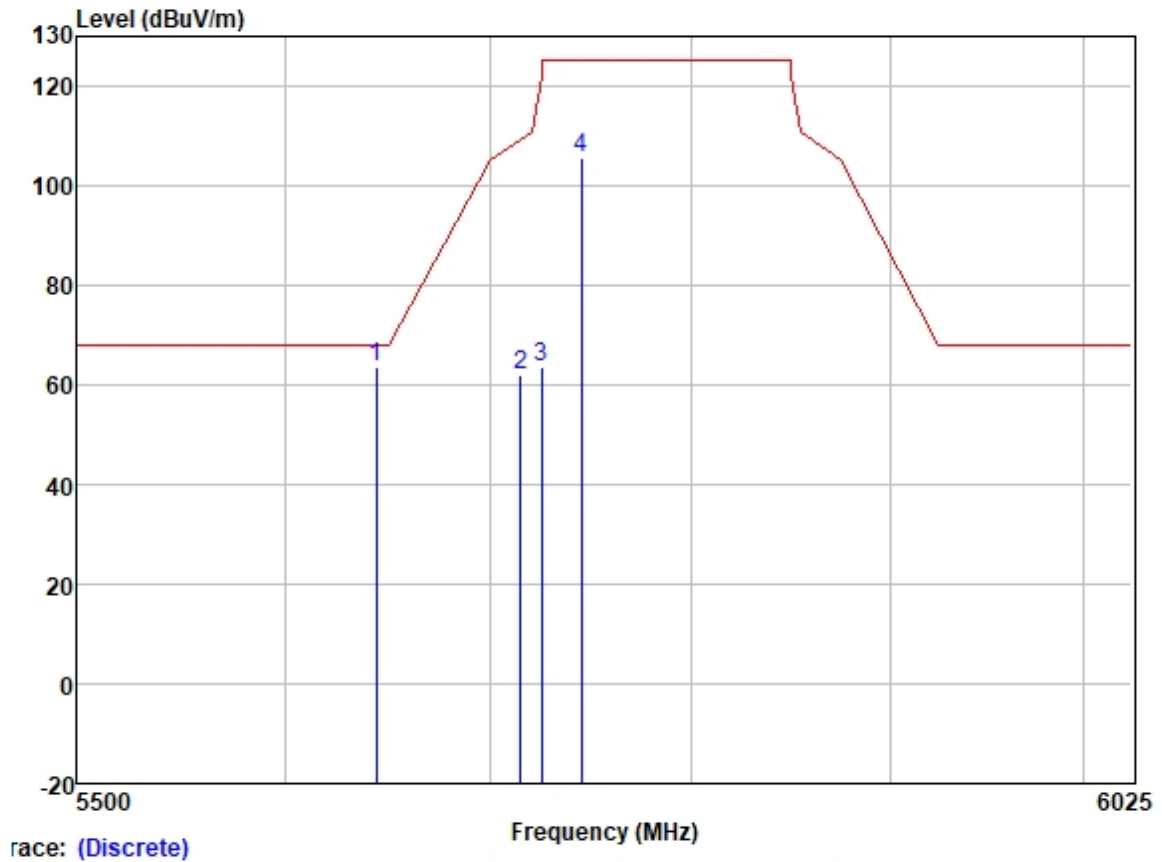

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5644.012	62.01	31.95	6.35	36.89	63.42	68.20	-4.78	HORIZONTAL	Peak
2	5715.000	60.64	32.04	6.33	36.89	62.12	109.40	-47.28	HORIZONTAL	Peak
3	5725.000	61.99	32.07	6.25	36.89	63.42	122.20	-58.78	HORIZONTAL	Peak
4	5745.000	103.99	32.10	6.20	36.89	105.40	125.20	-19.80	HORIZONTAL	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

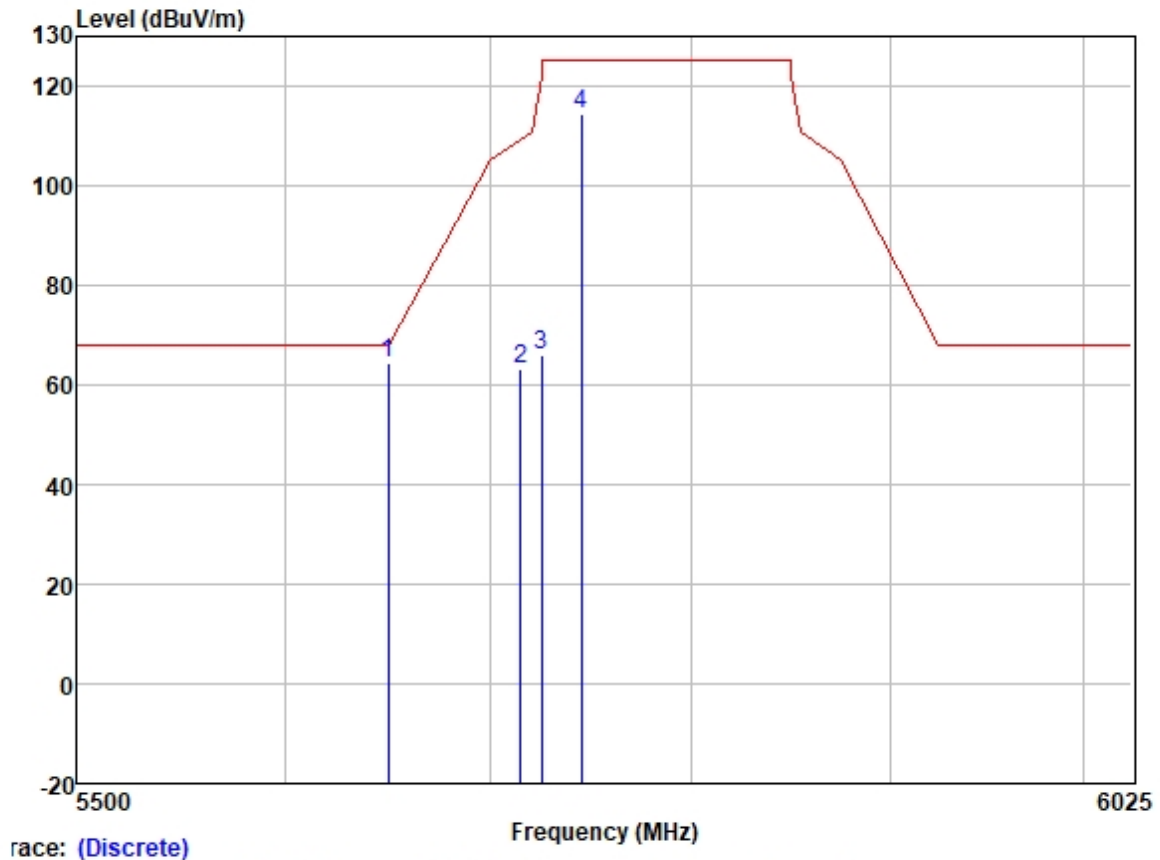

Trace: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5649.966	63.12	31.95	6.35	36.89	64.53	68.20	-3.67	VERTICAL	Peak
2	5715.000	61.54	32.04	6.33	36.89	63.02	109.40	-46.38	VERTICAL	Peak
3	5725.000	64.50	32.07	6.25	36.89	65.93	122.20	-56.27	VERTICAL	Peak
4	5745.000	113.05	32.10	6.20	36.89	114.46	125.20	-10.74	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

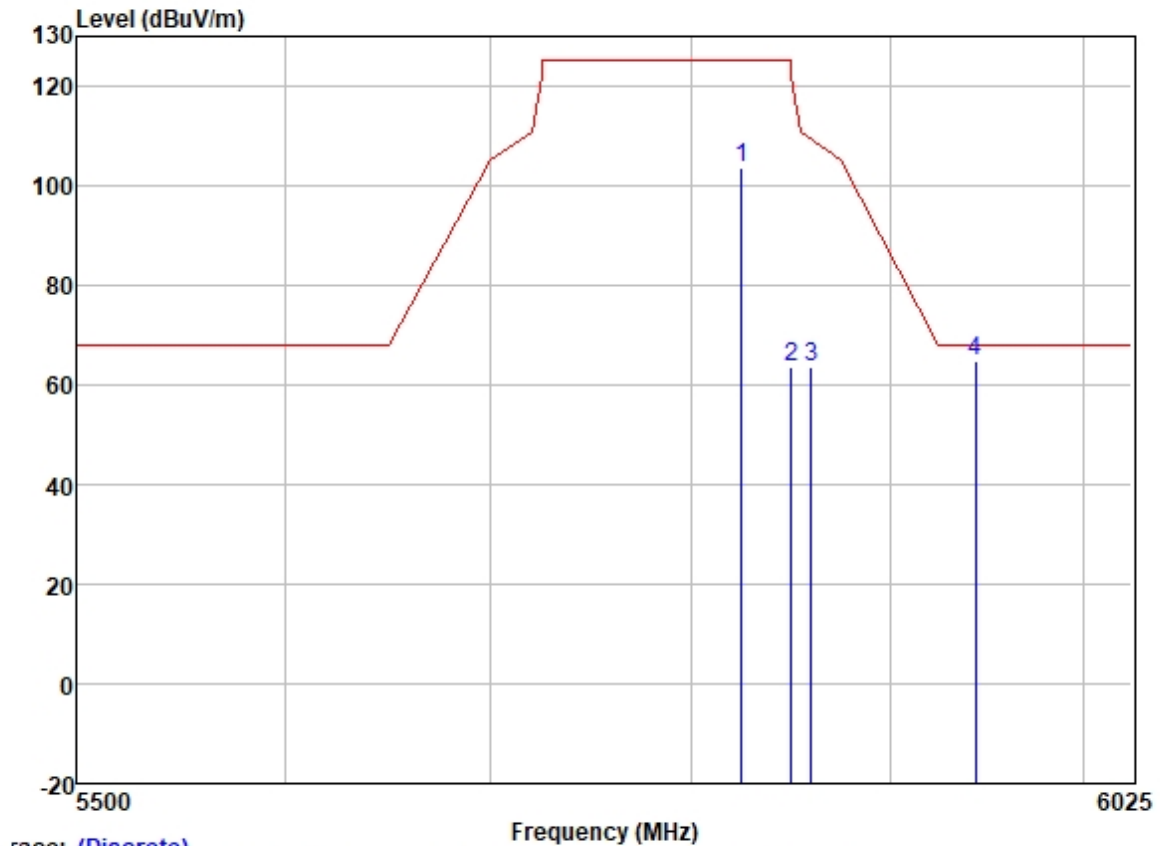

Trace: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5825.000	102.12	32.23	6.04	36.90	103.49	125.20	-21.71	HORIZONTAL	Peak
2	5850.000	62.12	32.25	6.00	36.90	63.47	122.20	-58.73	HORIZONTAL	Peak
3	5860.000	62.13	32.27	5.96	36.90	63.46	109.40	-45.94	HORIZONTAL	Peak
4	5943.744	63.27	32.36	6.05	36.90	64.78	68.20	-3.42	HORIZONTAL	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

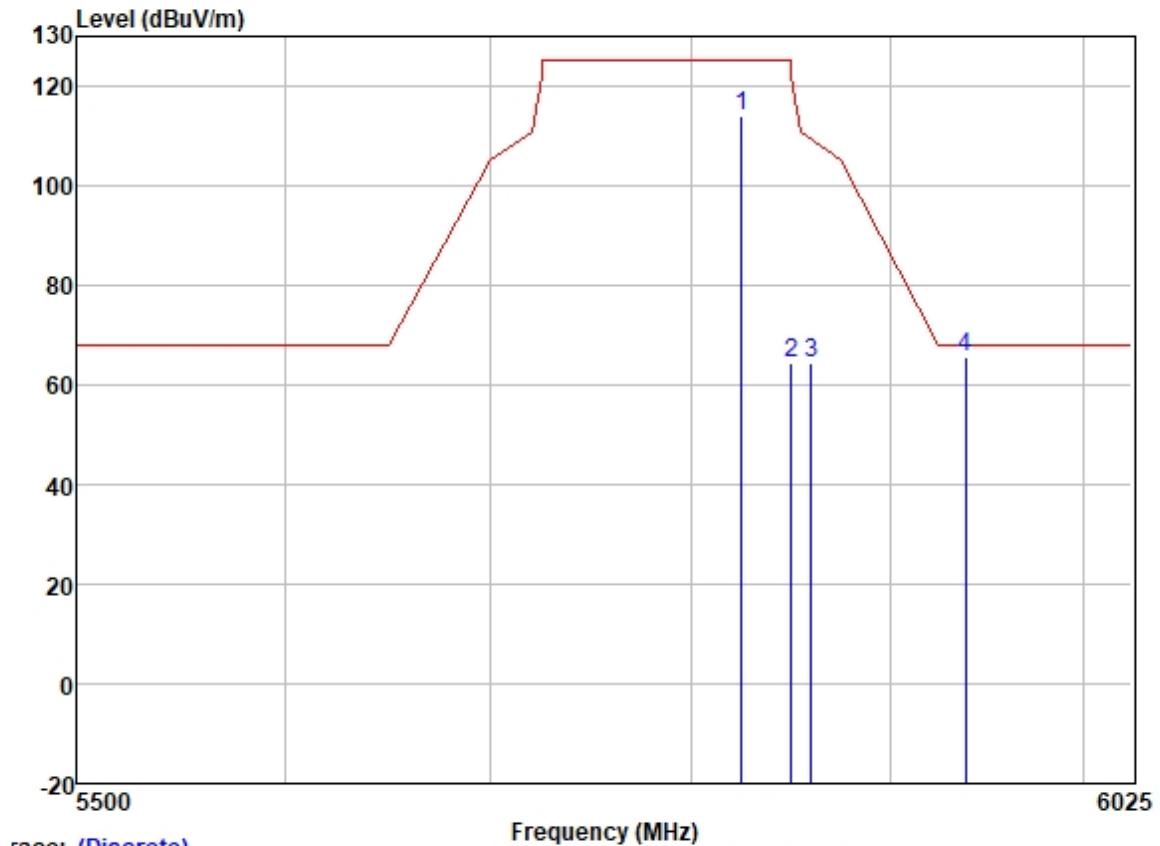


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5825.000	112.57	32.23	6.04	36.90	113.94	125.20	-11.26	VERTICAL	Peak
2	5850.000	63.13	32.25	6.00	36.90	64.48	122.20	-57.72	VERTICAL	Peak
3	5860.000	63.15	32.27	5.96	36.90	64.48	109.40	-44.92	VERTICAL	Peak
4	5938.878	64.21	32.34	6.00	36.90	65.65	68.20	-2.55	VERTICAL	Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

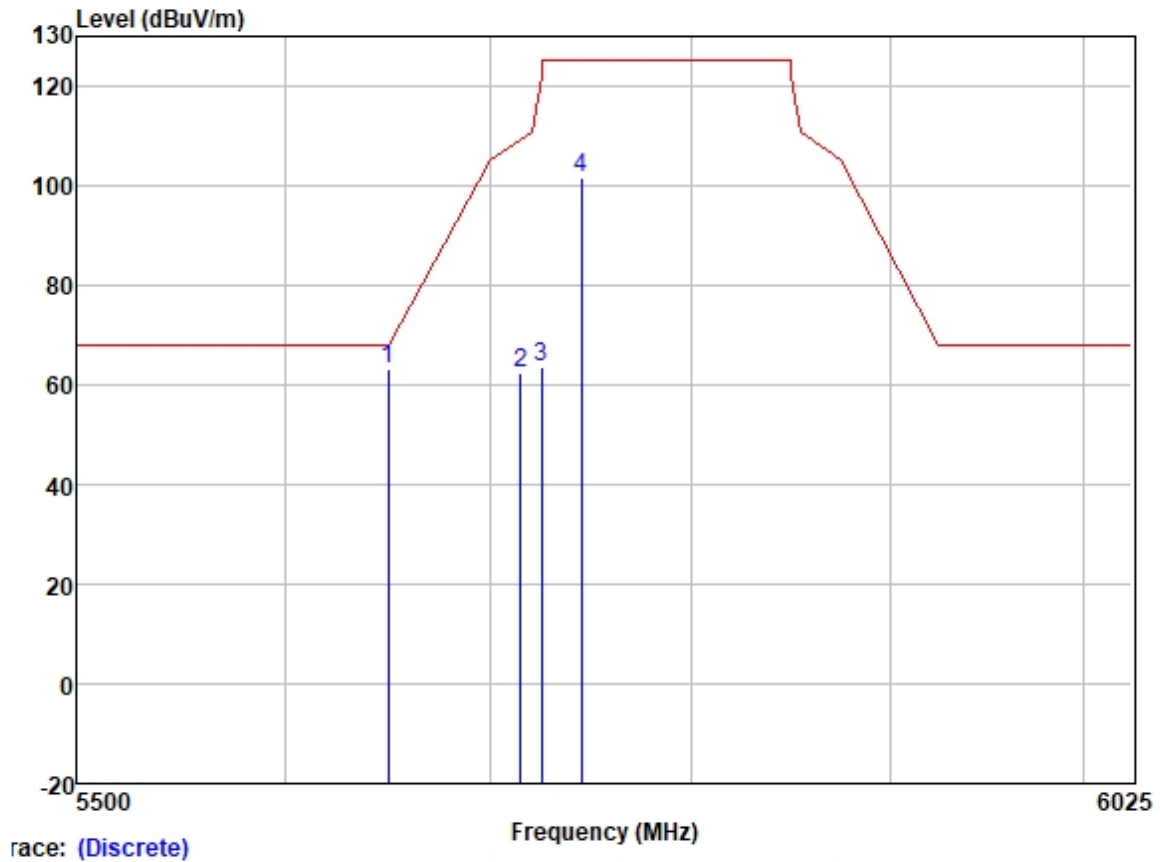


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5649.827	61.95	31.95	6.35	36.89	63.36	68.20	-4.84	HORIZONTAL	Peak
2	5715.000	60.80	32.04	6.33	36.89	62.28	109.40	-47.12	HORIZONTAL	Peak
3	5725.000	61.98	32.07	6.25	36.89	63.41	122.20	-58.79	HORIZONTAL	Peak
4	5745.000	100.33	32.10	6.20	36.89	101.74	125.20	-23.46	HORIZONTAL	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

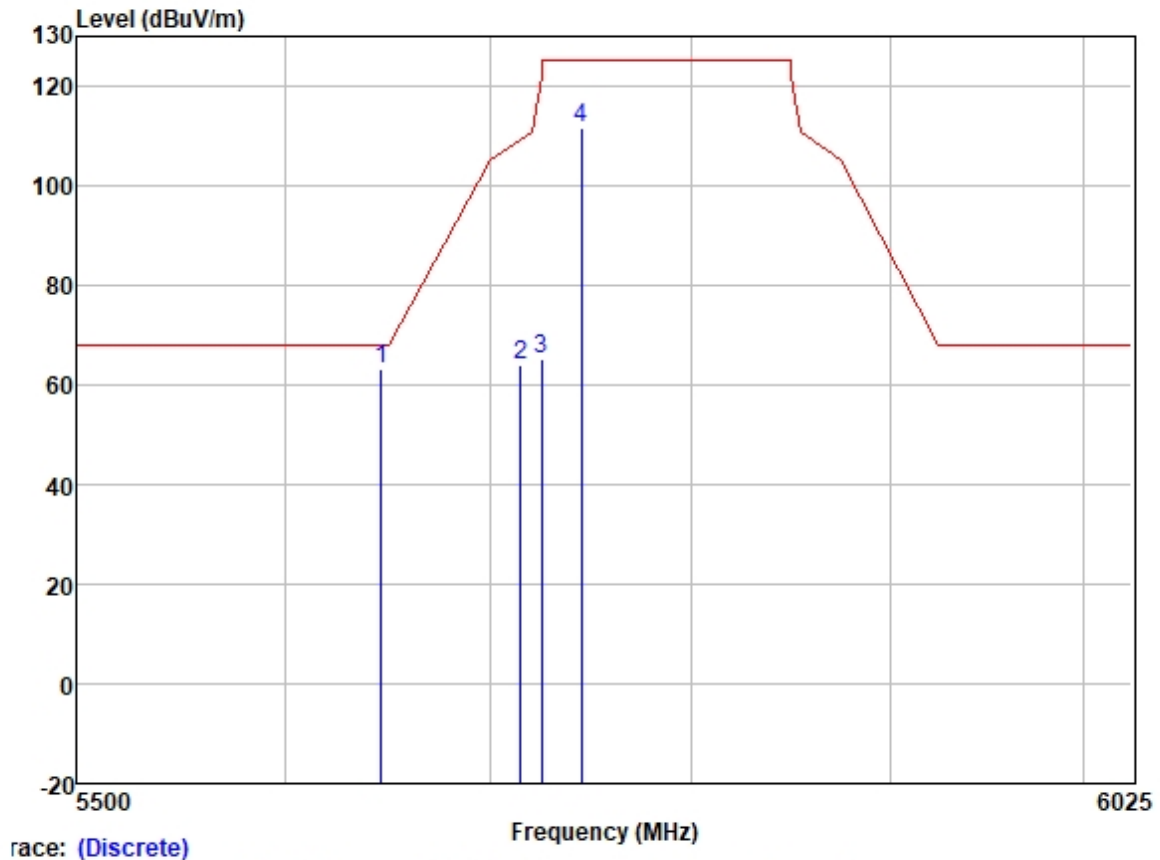

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5646.503	61.85	31.95	6.35	36.89	63.26	68.20	-4.94	VERTICAL	Peak
2	5715.000	62.36	32.04	6.33	36.89	63.84	109.40	-45.56	VERTICAL	Peak
3	5725.000	63.90	32.07	6.25	36.89	65.33	122.20	-56.87	VERTICAL	Peak
4	5745.000	110.00	32.10	6.20	36.89	111.41	125.20	-13.79	VERTICAL	Peak


Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

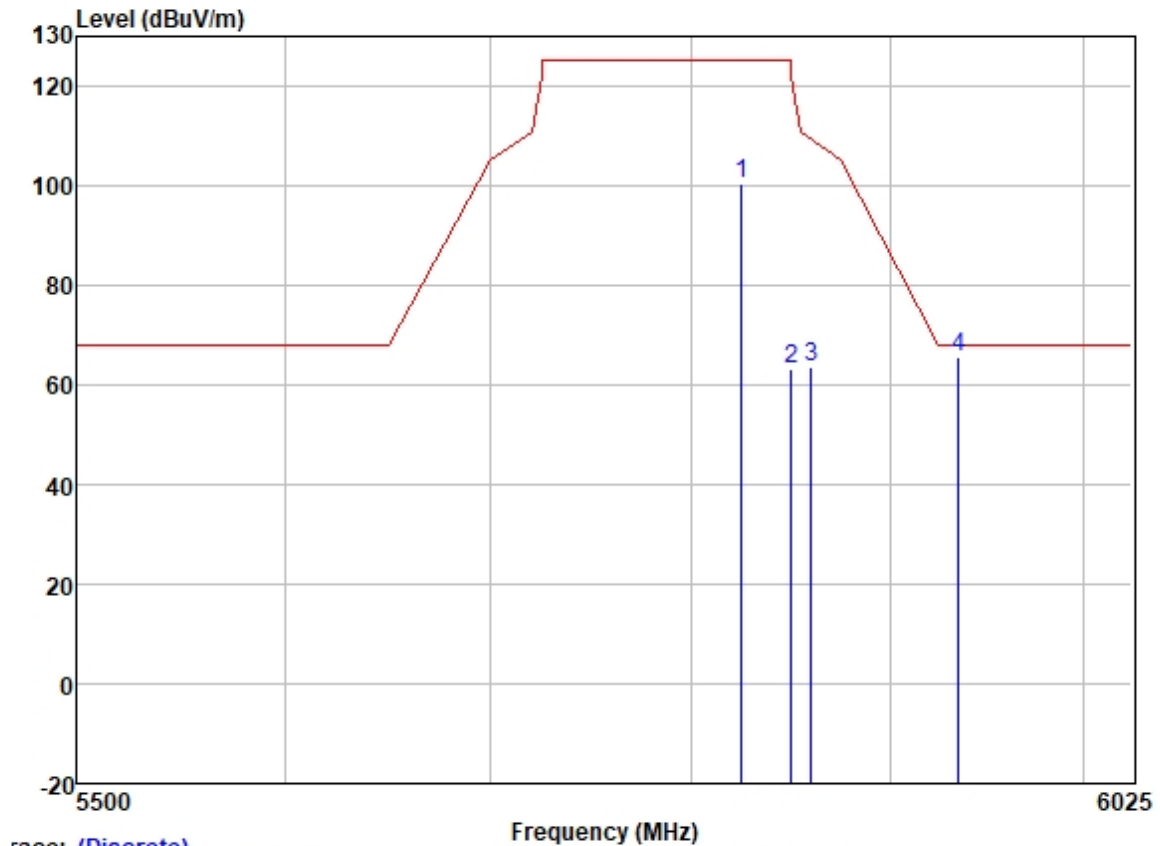

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5825.000	99.20	32.23	6.04	36.90	100.57	125.20	-24.63	HORIZONTAL	Peak
2	5850.000	61.68	32.25	6.00	36.90	63.03	122.20	-59.17	HORIZONTAL	Peak
3	5860.000	62.28	32.27	5.96	36.90	63.61	109.40	-45.79	HORIZONTAL	Peak
4	5935.427	64.06	32.34	6.00	36.90	65.50	68.20	-2.70	HORIZONTAL	Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

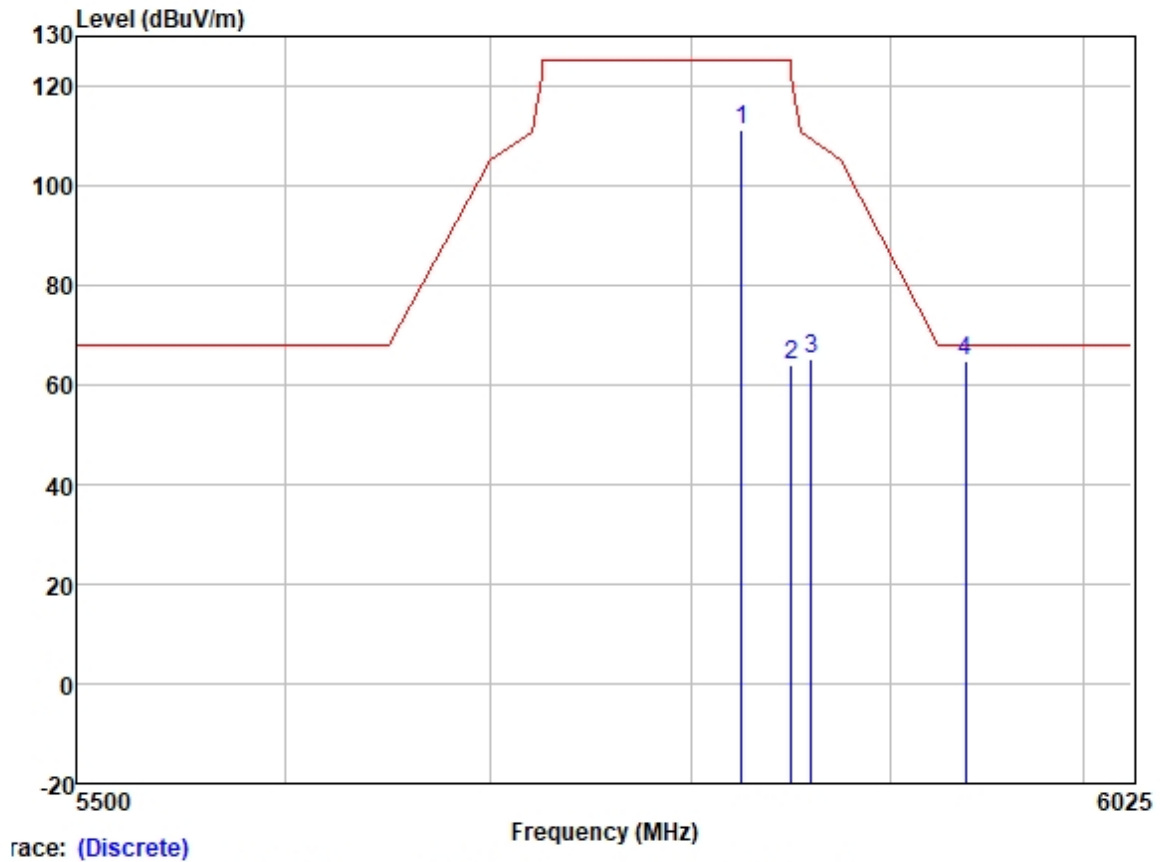

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5825.000	109.73	32.23	6.04	36.90	111.10	125.20	-14.10	VERTICAL	Peak
2	5850.000	62.67	32.25	6.00	36.90	64.02	122.20	-58.18	VERTICAL	Peak
3	5860.000	63.80	32.27	5.96	36.90	65.13	109.40	-44.27	VERTICAL	Peak
4	5938.878	63.48	32.34	6.00	36.90	64.92	68.20	-3.28	VERTICAL	Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

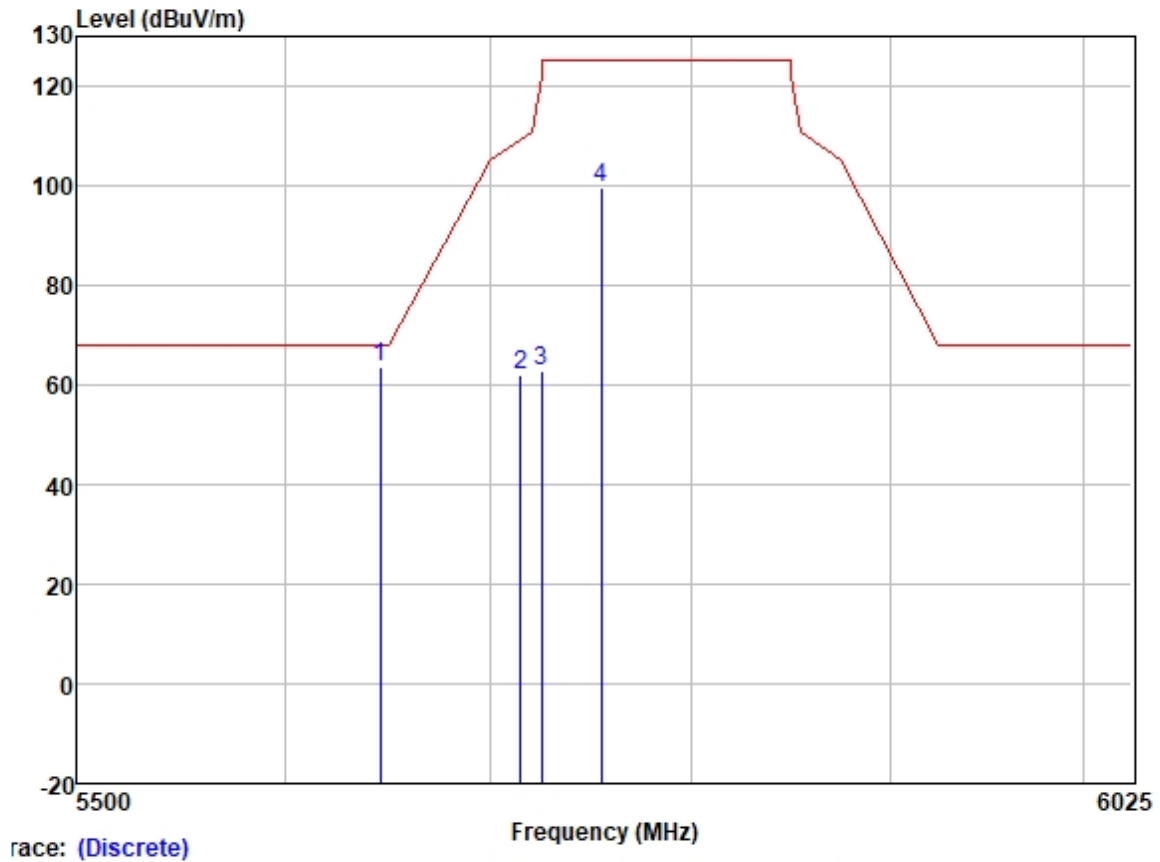

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5646.120	62.12	31.95	6.35	36.89	63.53	68.20	-4.67	HORIZONTAL	Peak
2	5715.000	60.50	32.04	6.33	36.89	61.98	109.40	-47.42	HORIZONTAL	Peak
3	5725.000	61.28	32.07	6.25	36.89	62.71	122.20	-59.49	HORIZONTAL	Peak
4	5755.000	98.14	32.10	6.20	36.89	99.55	125.20	-25.65	HORIZONTAL	Peak