



Test Mode: 00; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

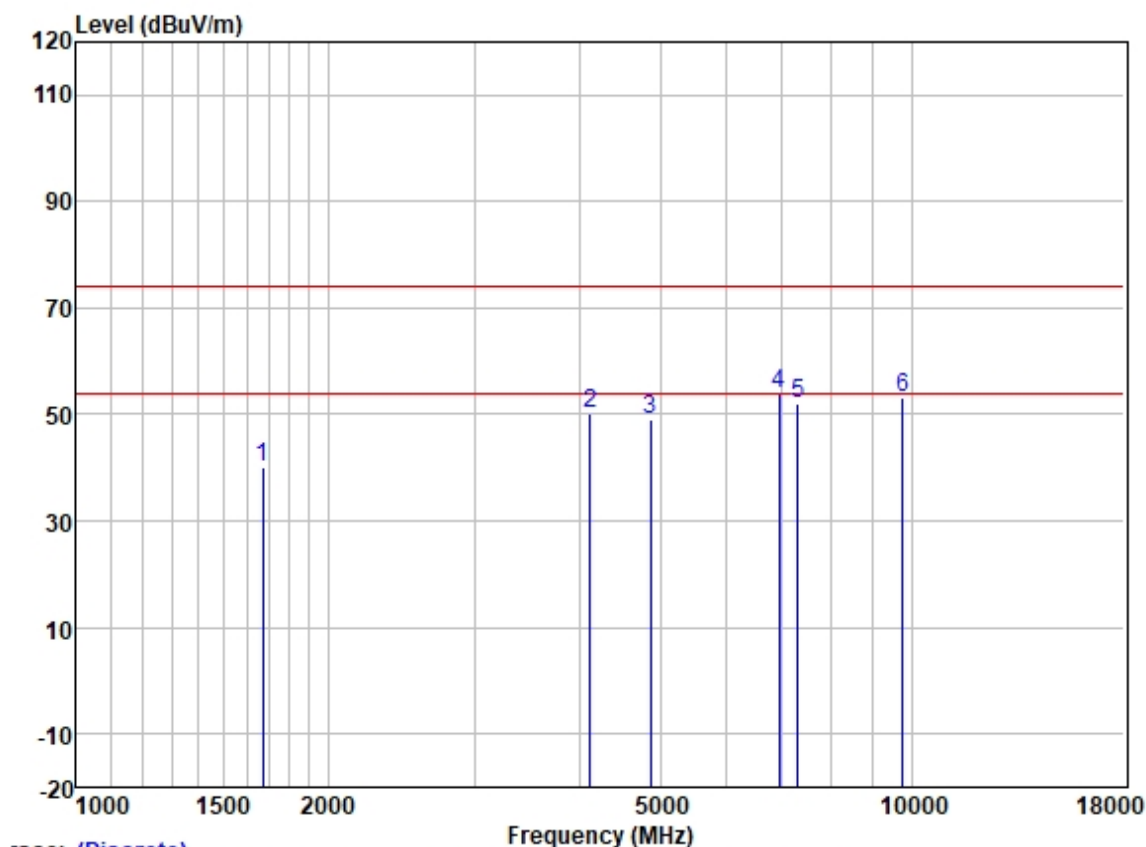

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1672.779	49.58	25.67	2.80	37.91	40.14	74.00	-33.86	HORIZONTAL	Peak
2	4121.768	52.26	29.98	4.60	36.80	50.04	74.00	-23.96	HORIZONTAL	Peak
3	4874.000	48.78	31.54	5.50	36.84	48.98	74.00	-25.02	HORIZONTAL	Peak
4	6934.778	50.38	34.92	5.81	37.19	53.92	74.00	-20.08	HORIZONTAL	Peak
5	7311.000	47.55	35.93	6.11	37.42	52.17	74.00	-21.83	HORIZONTAL	Peak
6	9748.000	45.23	38.50	7.02	37.41	53.34	74.00	-20.66	HORIZONTAL	Peak

Test Mode: 00; Polarity: Vertical; Modulation: 802.11g; Bandwidth: 20MHz; Channel: middle

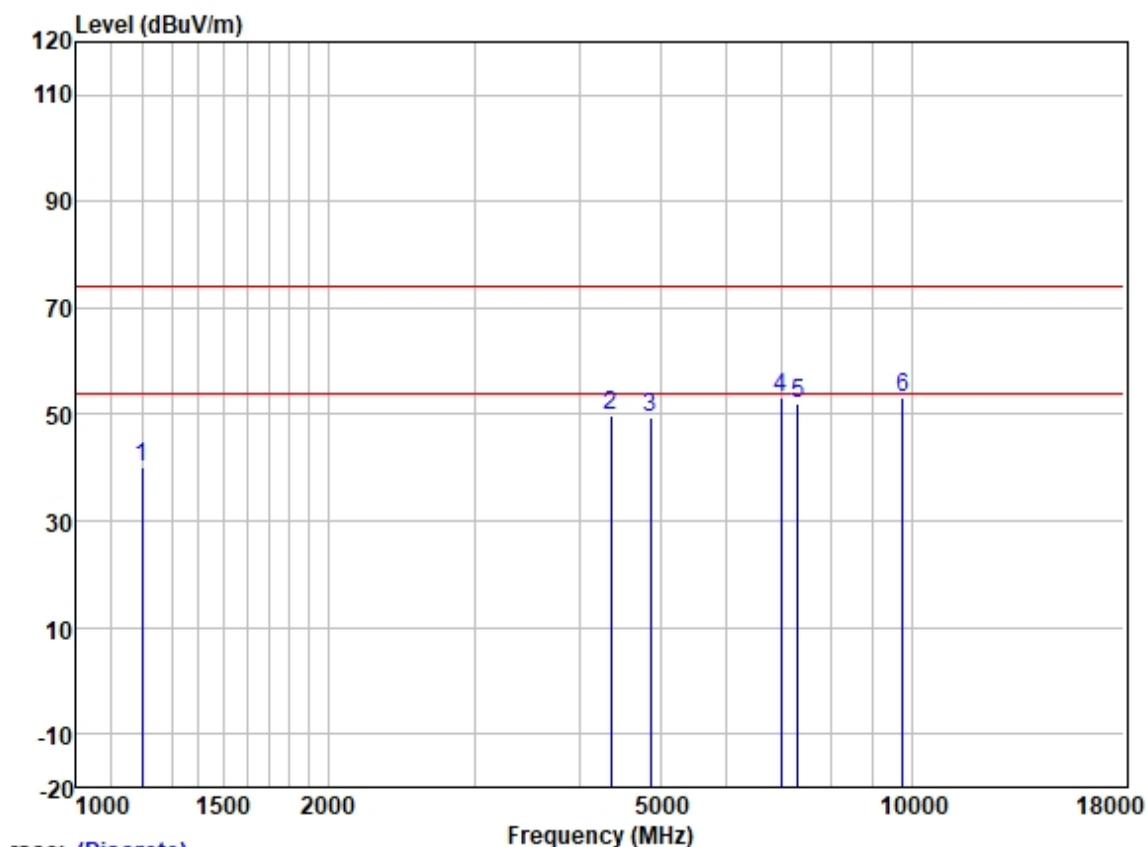


Trace: (Discrete)

	Read	Antenna	Cable	Preamplifier	Level	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1199.726	51.42	24.68	2.34	38.39	40.05	74.00	-33.95	VERTICAL
2	4367.058	51.46	30.62	4.68	36.81	49.95	74.00	-24.05	VERTICAL
3	4874.000	49.25	31.54	5.50	36.84	49.45	74.00	-24.55	VERTICAL
4	6974.982	49.70	34.97	5.81	37.23	53.25	74.00	-20.75	VERTICAL
5	7311.000	47.53	35.93	6.11	37.42	52.15	74.00	-21.85	VERTICAL
6	9748.000	45.03	38.50	7.02	37.41	53.14	74.00	-20.86	VERTICAL



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 00; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

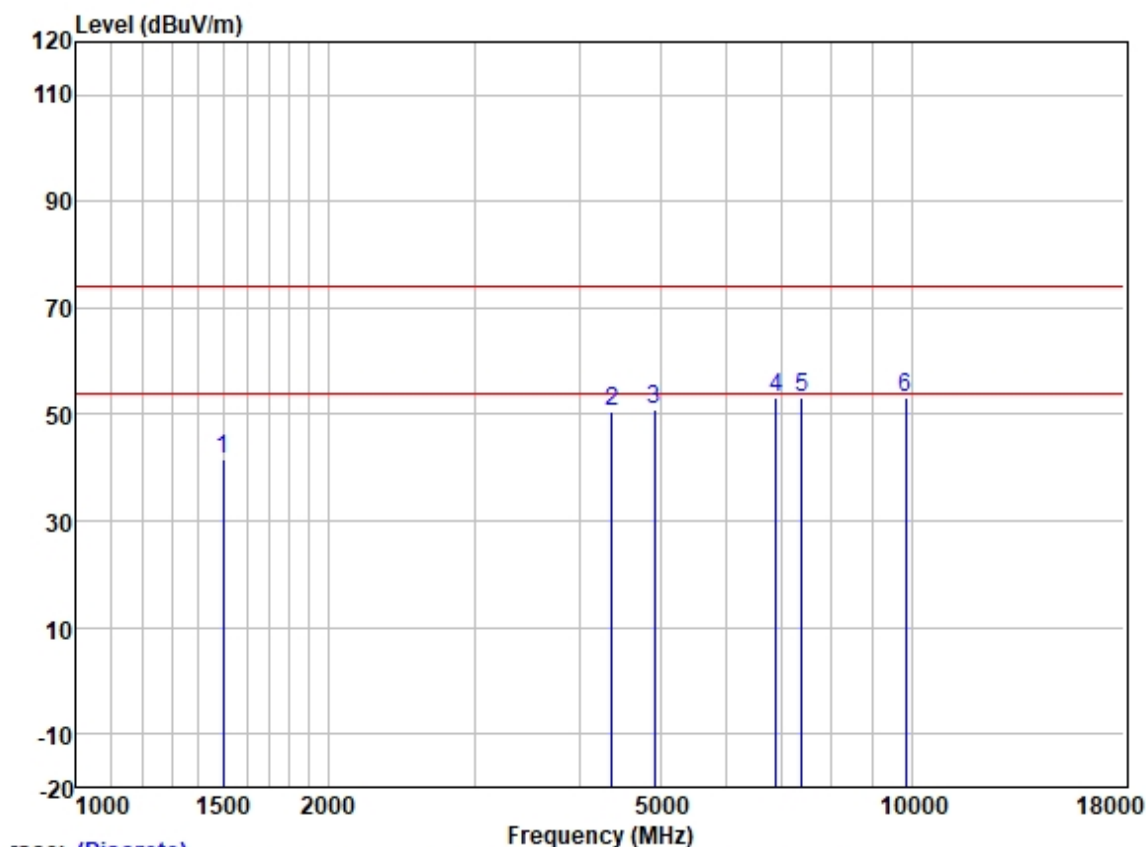


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1498.781	51.38	25.50	2.80	38.10	41.58	74.00	-32.42	HORIZONTAL	Peak
2	4379.699	52.21	30.64	4.69	36.81	50.73	74.00	-23.27	HORIZONTAL	Peak
3	4924.000	50.58	31.62	5.60	36.84	50.96	74.00	-23.04	HORIZONTAL	Peak
4	6874.906	49.64	34.82	5.82	37.16	53.12	74.00	-20.88	HORIZONTAL	Peak
5	7386.000	48.29	36.17	6.19	37.45	53.20	74.00	-20.80	HORIZONTAL	Peak
6	9848.000	44.88	38.58	6.99	37.41	53.04	74.00	-20.96	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 00; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

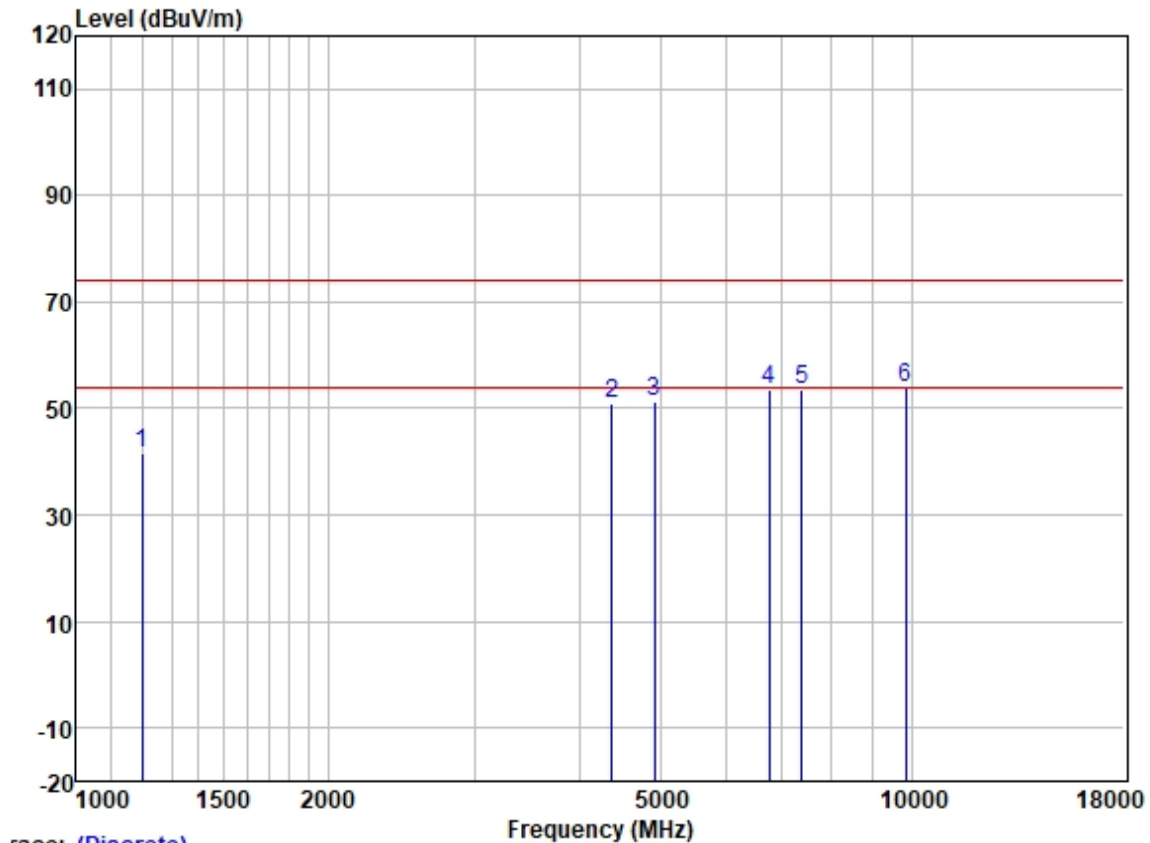

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1199.726	52.93	24.68	2.34	38.39	41.56	74.00	-32.44	VERTICAL	Peak
2	4379.699	52.42	30.64	4.69	36.81	50.94	74.00	-23.06	VERTICAL	Peak
3	4924.000	50.95	31.62	5.60	36.84	51.33	74.00	-22.67	VERTICAL	Peak
4	6756.708	50.40	34.56	5.82	37.10	53.68	74.00	-20.32	VERTICAL	Peak
5	7386.000	48.80	36.17	6.19	37.45	53.71	74.00	-20.29	VERTICAL	Peak
6	9848.000	45.68	38.58	6.99	37.41	53.84	74.00	-20.16	VERTICAL	Peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

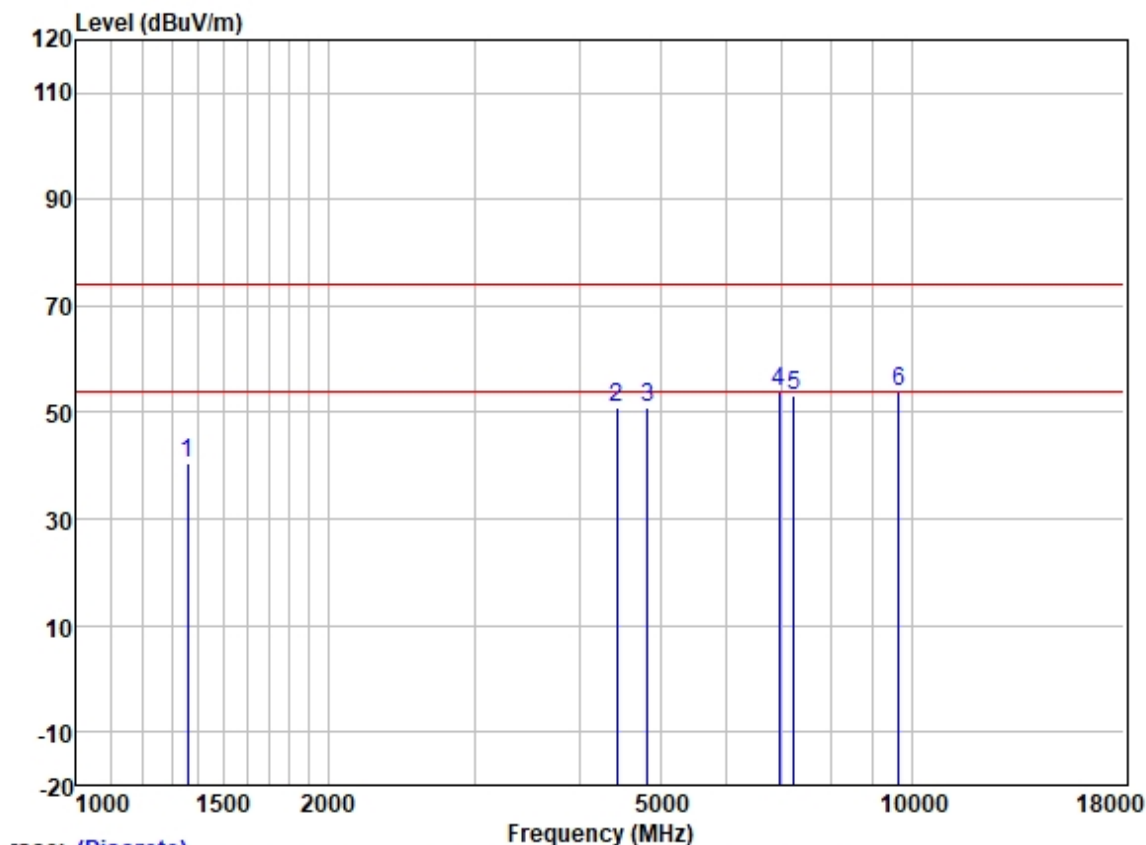


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1358.498	50.67	25.33	2.60	38.27	40.33	74.00	-33.67	HORIZONTAL	Peak
2	4443.453	52.01	30.73	4.83	36.81	50.76	74.00	-23.24	HORIZONTAL	Peak
3	4824.000	50.71	31.45	5.42	36.83	50.75	74.00	-23.25	HORIZONTAL	Peak
4	6934.778	50.31	34.92	5.81	37.19	53.85	74.00	-20.15	HORIZONTAL	Peak
5	7236.000	48.76	35.70	6.03	37.39	53.10	74.00	-20.90	HORIZONTAL	Peak
6	9648.000	45.83	38.40	7.06	37.42	53.87	74.00	-20.13	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

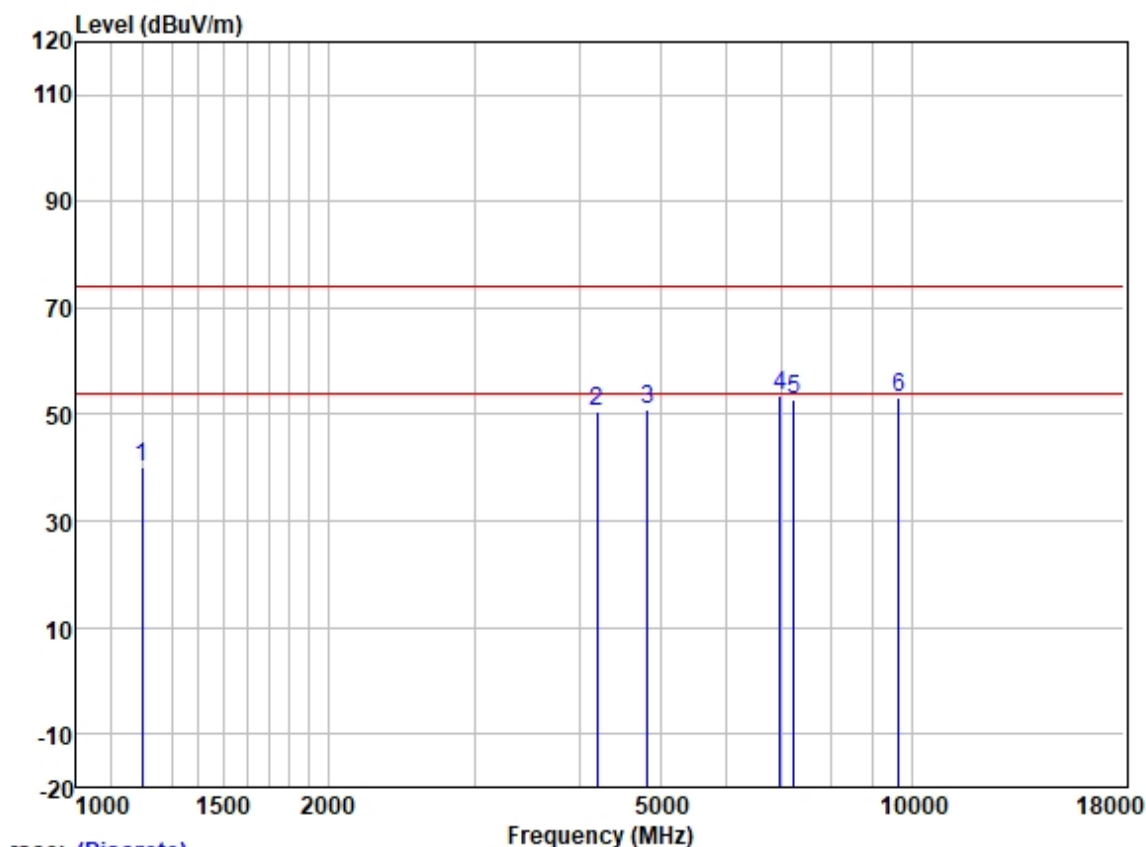

Trace: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1199.726	51.66	24.68	2.34	38.39	40.29	74.00	-33.71	VERTICAL	Peak
2	4206.011	52.72	30.18	4.60	36.81	50.69	74.00	-23.31	VERTICAL	Peak
3	4824.000	50.74	31.45	5.42	36.83	50.78	74.00	-23.22	VERTICAL	Peak
4	6954.852	50.09	34.95	5.81	37.21	53.64	74.00	-20.36	VERTICAL	Peak
5	7236.000	48.64	35.70	6.03	37.39	52.98	74.00	-21.02	VERTICAL	Peak
6	9648.000	45.14	38.40	7.06	37.42	53.18	74.00	-20.82	VERTICAL	Peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

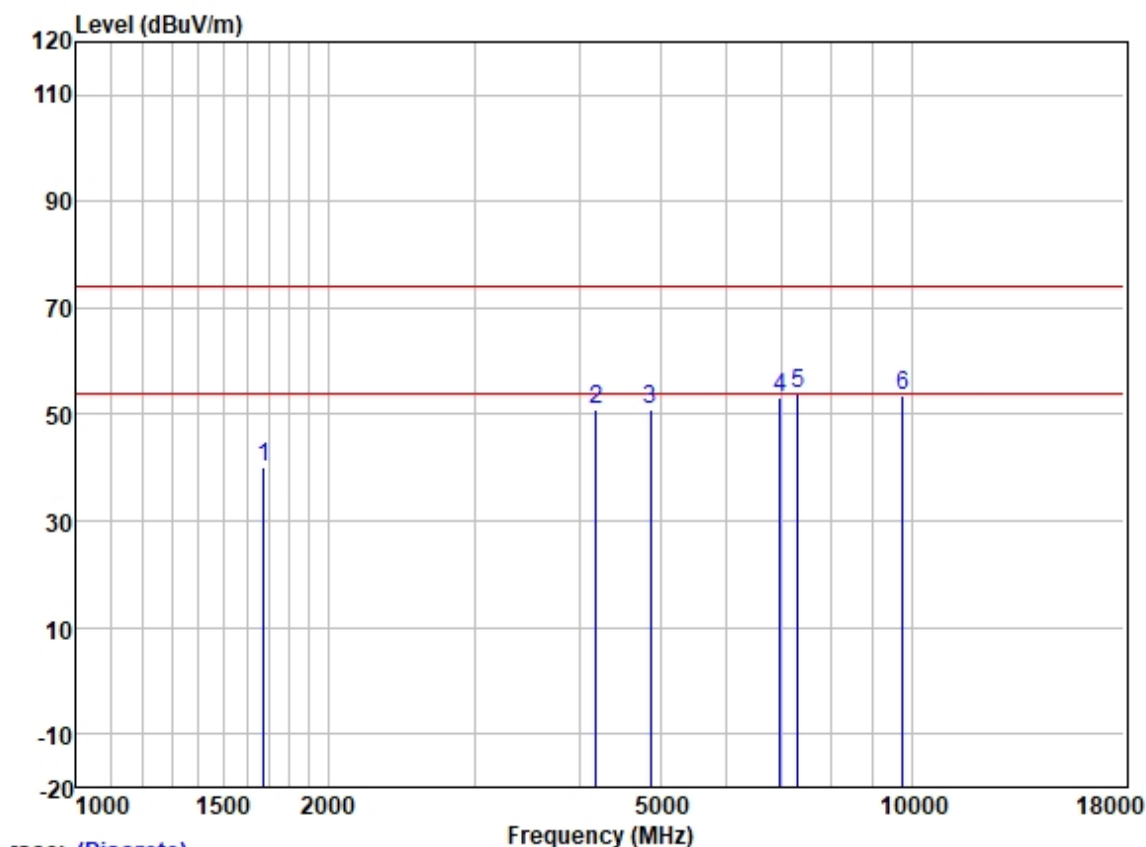

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1677.621	49.47	25.68	2.80	37.91	40.04	74.00	-33.96	HORIZONTAL	Peak
2	4193.872	52.84	30.15	4.60	36.81	50.78	74.00	-23.22	HORIZONTAL	Peak
3	4874.000	50.84	31.54	5.50	36.84	51.04	74.00	-22.96	HORIZONTAL	Peak
4	6954.852	49.54	34.95	5.81	37.21	53.09	74.00	-20.91	HORIZONTAL	Peak
5	7311.000	49.21	35.93	6.11	37.42	53.83	74.00	-20.17	HORIZONTAL	Peak
6	9748.000	45.39	38.50	7.02	37.41	53.50	74.00	-20.50	HORIZONTAL	Peak

Test Mode: 00; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: middle

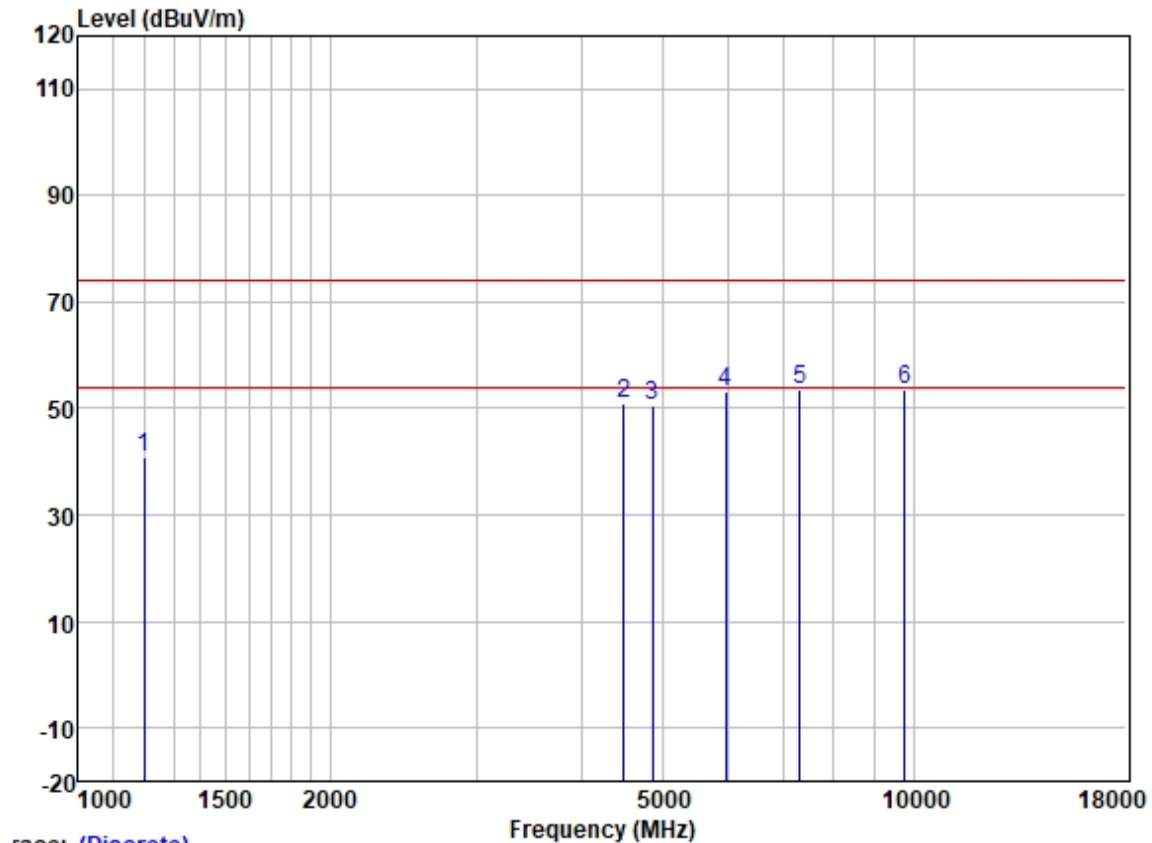


	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1199.726	52.28	24.68	2.34	38.39	40.91	74.00	-33.09	VERTICAL	Peak
2	4495.125	51.89	30.80	5.05	36.82	50.92	74.00	-23.08	VERTICAL	Peak
3	4874.000	50.54	31.54	5.50	36.84	50.74	74.00	-23.26	VERTICAL	Peak
4	5949.811	51.62	32.36	6.05	36.90	53.13	74.00	-20.87	VERTICAL	Peak
5	7311.000	49.05	35.93	6.11	37.42	53.67	74.00	-20.33	VERTICAL	Peak
6	9748.000	45.62	38.50	7.02	37.41	53.73	74.00	-20.27	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

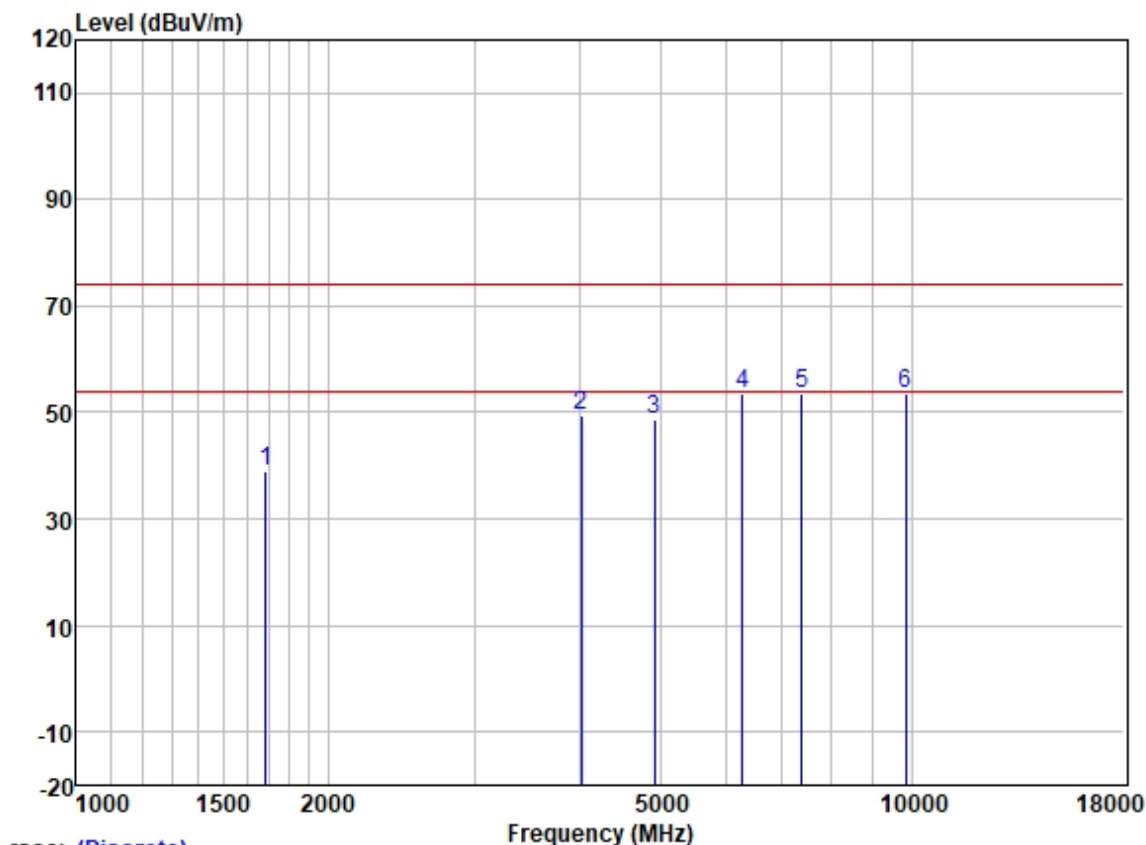


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1687.347	48.56	25.69	2.80	37.91	39.14	74.00	-34.86	HORIZONTAL	Peak
2	4027.554	51.83	29.83	4.60	36.80	49.46	74.00	-24.54	HORIZONTAL	Peak
3	4924.000	48.26	31.62	5.60	36.84	48.64	74.00	-25.36	HORIZONTAL	Peak
4	6267.553	51.05	33.29	6.00	36.95	53.39	74.00	-20.61	HORIZONTAL	Peak
5	7386.000	48.53	36.17	6.19	37.45	53.44	74.00	-20.56	HORIZONTAL	Peak
6	9848.000	45.45	38.58	6.99	37.41	53.61	74.00	-20.39	HORIZONTAL	Peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

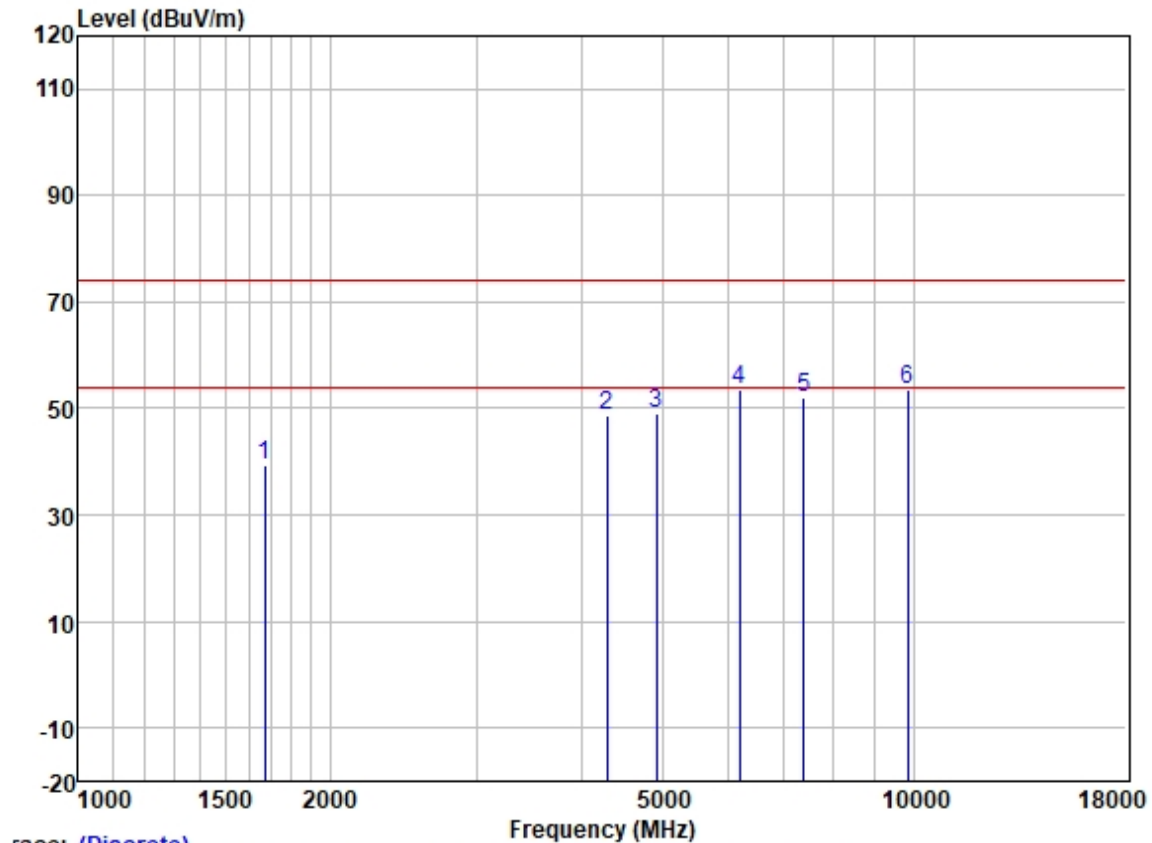


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1672.779	48.85	25.67	2.80	37.91	39.41	74.00	-34.59	VERTICAL	Peak
2	4291.977	50.43	30.45	4.64	36.81	48.71	74.00	-25.29	VERTICAL	Peak
3	4924.000	48.64	31.62	5.60	36.84	49.02	74.00	-24.98	VERTICAL	Peak
4	6195.508	51.60	32.96	6.07	36.94	53.69	74.00	-20.31	VERTICAL	Peak
5	7386.000	47.18	36.17	6.19	37.45	52.09	74.00	-21.91	VERTICAL	Peak
6	9848.000	45.34	38.58	6.99	37.41	53.50	74.00	-20.50	VERTICAL	Peak

Test Mode: 00; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 40MHz; Channel: Low

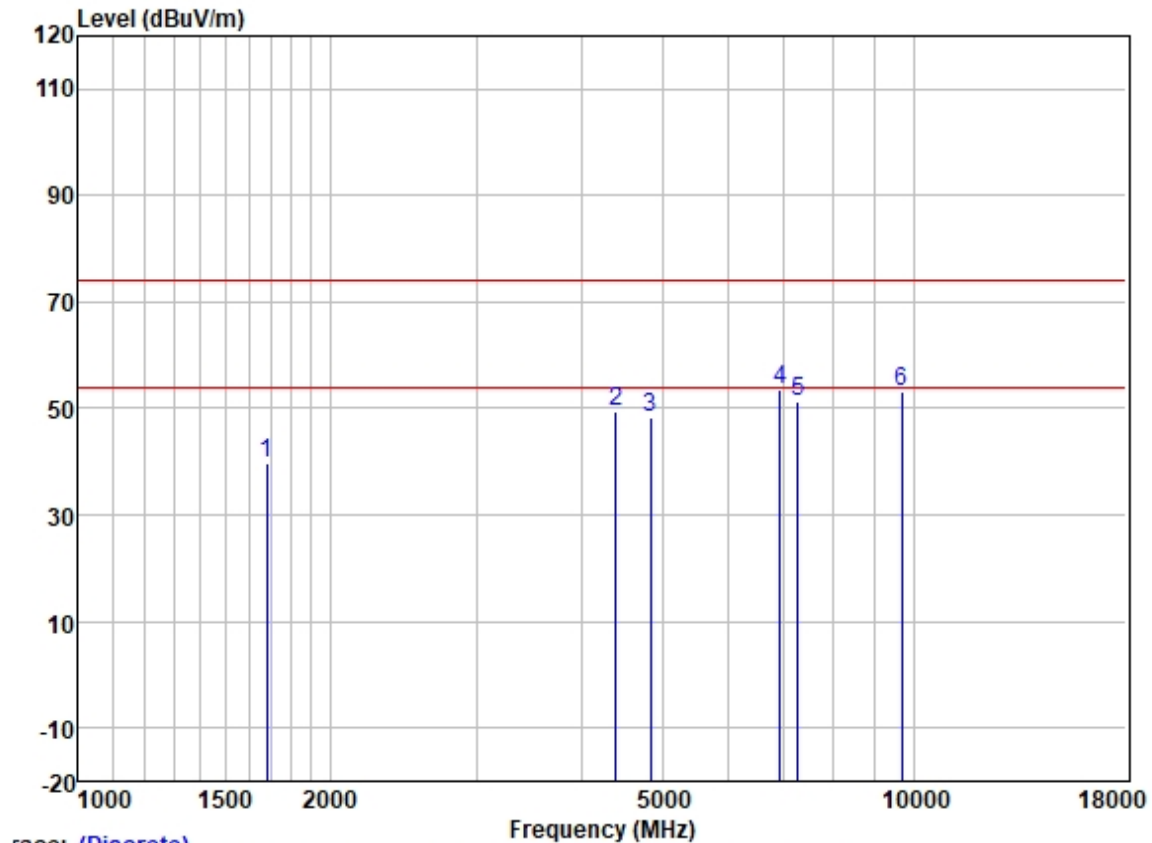

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1682.477	49.19	25.68	2.80	37.91	39.76	74.00	-34.24	HORIZONTAL	Peak
2	4405.090	50.94	30.68	4.70	36.81	49.51	74.00	-24.49	HORIZONTAL	Peak
3	4844.000	48.22	31.50	5.45	36.84	48.33	74.00	-25.67	HORIZONTAL	Peak
4	6914.763	50.02	34.89	5.81	37.19	53.53	74.00	-20.47	HORIZONTAL	Peak
5	7266.000	47.04	35.78	6.06	37.41	51.47	74.00	-22.53	HORIZONTAL	Peak
6	9688.000	45.13	38.44	7.04	37.42	53.19	74.00	-20.81	HORIZONTAL	Peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

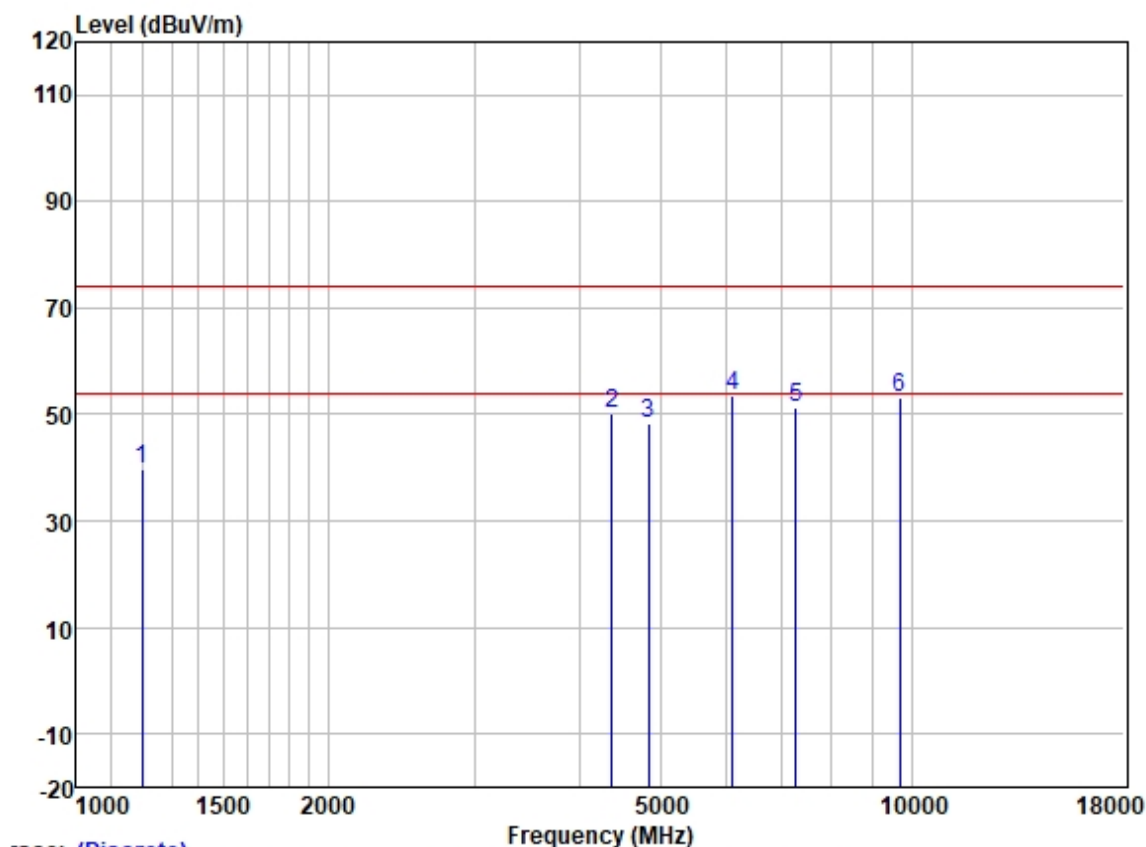


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1199.726	51.26	24.68	2.34	38.39	39.89	74.00	-34.11	VERTICAL	Peak
2	4379.699	51.78	30.64	4.69	36.81	50.30	74.00	-23.70	VERTICAL	Peak
3	4844.000	48.27	31.50	5.45	36.84	48.38	74.00	-25.62	VERTICAL	Peak
4	6106.616	51.82	32.66	6.14	36.92	53.70	74.00	-20.30	VERTICAL	Peak
5	7266.000	46.73	35.78	6.06	37.41	51.16	74.00	-22.84	VERTICAL	Peak
6	9688.000	45.15	38.44	7.04	37.42	53.21	74.00	-20.79	VERTICAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

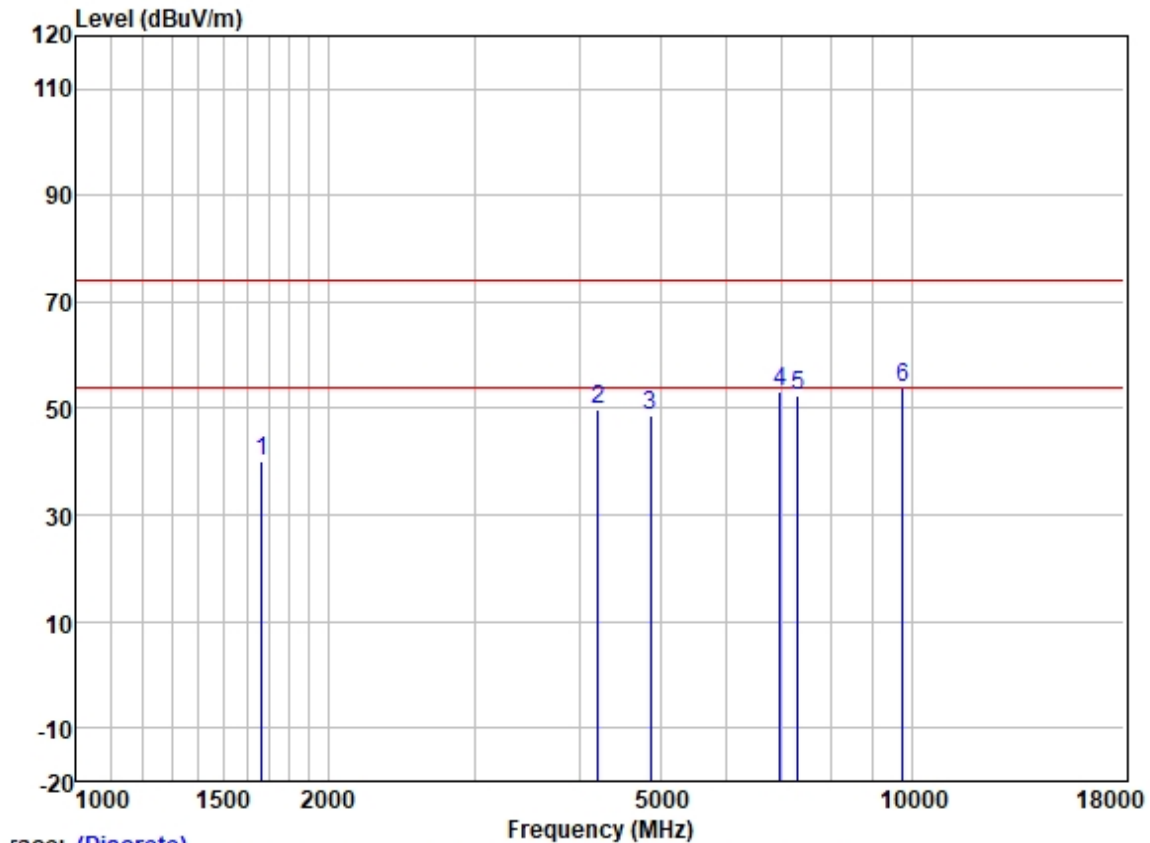

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1667.951	49.52	25.66	2.80	37.91	40.07	74.00	-33.93	HORIZONTAL	Peak
2	4218.186	51.62	30.22	4.60	36.81	49.63	74.00	-24.37	HORIZONTAL	Peak
3	4874.000	48.62	31.54	5.50	36.84	48.82	74.00	-25.18	HORIZONTAL	Peak
4	6954.852	49.68	34.95	5.81	37.21	53.23	74.00	-20.77	HORIZONTAL	Peak
5	7311.000	47.87	35.93	6.11	37.42	52.49	74.00	-21.51	HORIZONTAL	Peak
6	9748.000	45.76	38.50	7.02	37.41	53.87	74.00	-20.13	HORIZONTAL	Peak


Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

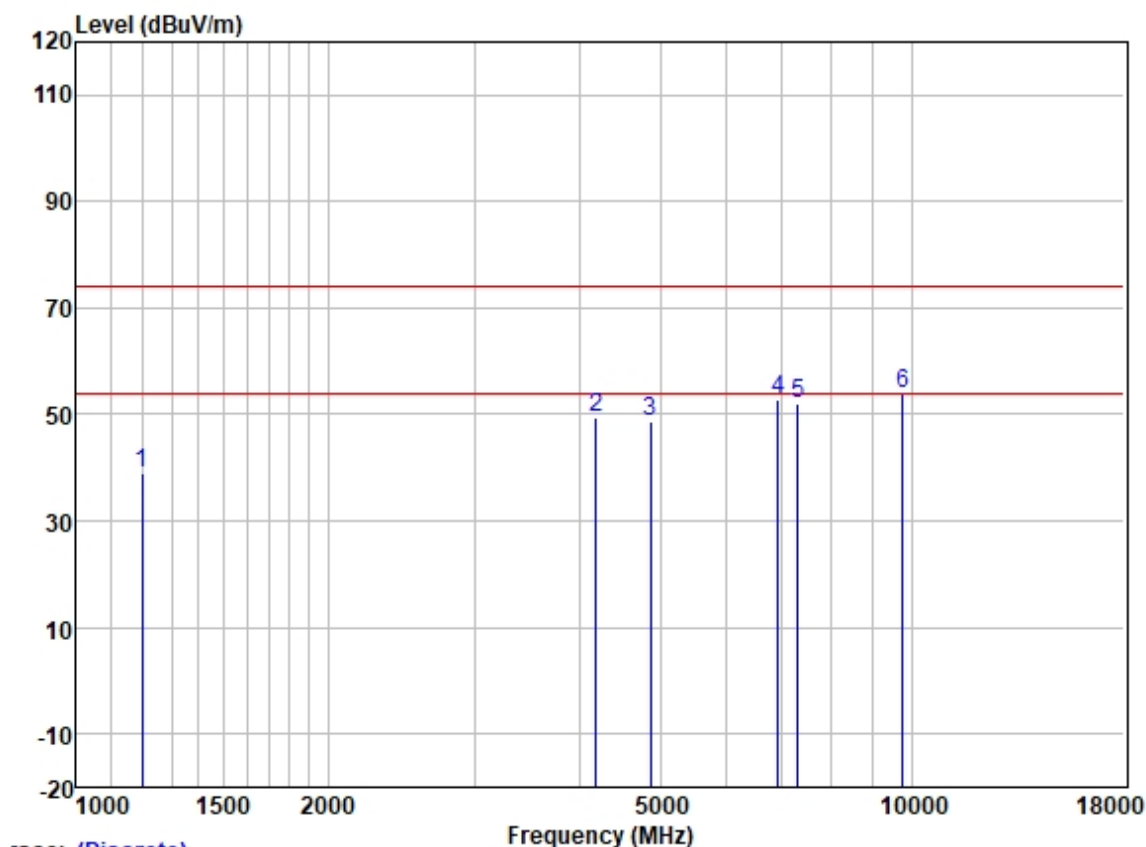

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1199.726	50.47	24.68	2.34	38.39	39.10	74.00	-34.90	VERTICAL	Peak
2	4193.872	51.44	30.15	4.60	36.81	49.38	74.00	-24.62	VERTICAL	Peak
3	4874.000	48.43	31.54	5.50	36.84	48.63	74.00	-25.37	VERTICAL	Peak
4	6914.763	49.45	34.89	5.81	37.19	52.96	74.00	-21.04	VERTICAL	Peak
5	7311.000	47.27	35.93	6.11	37.42	51.89	74.00	-22.11	VERTICAL	Peak
6	9748.000	45.63	38.50	7.02	37.41	53.74	74.00	-20.26	VERTICAL	Peak


Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

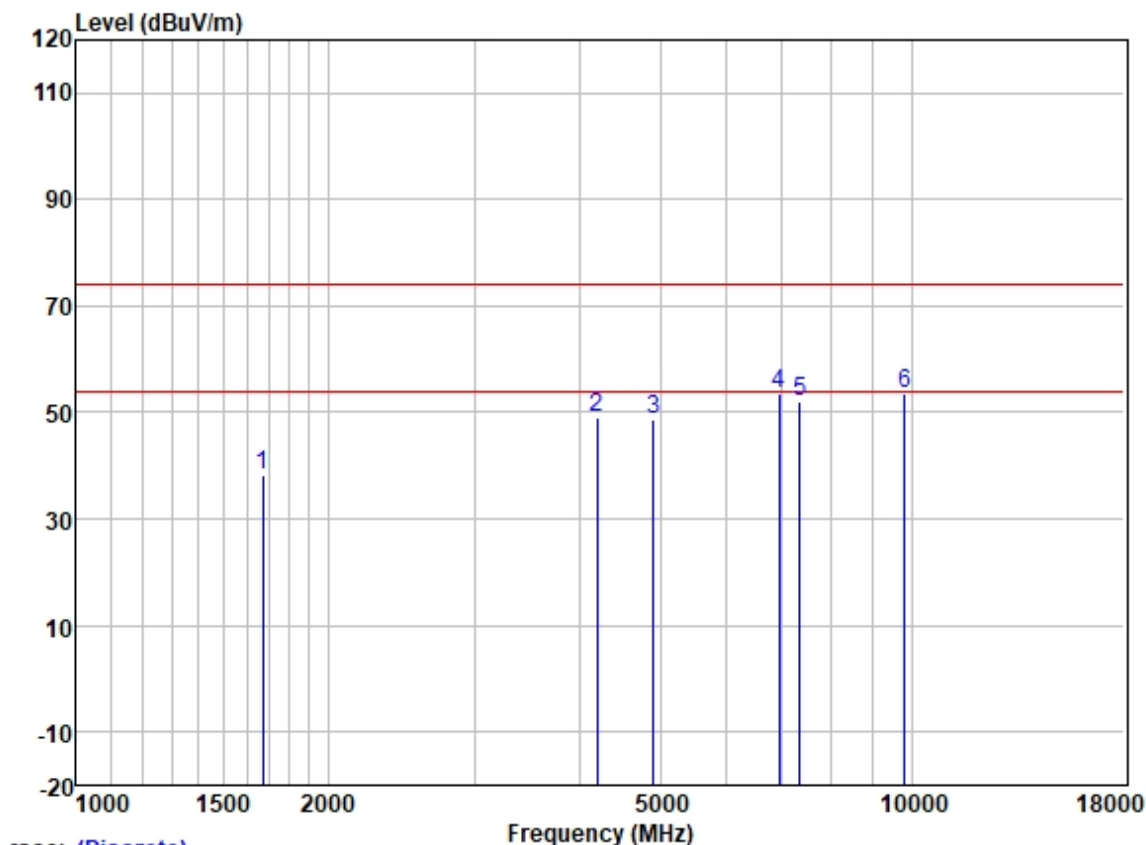

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1672.779	47.74	25.67	2.80	37.91	38.30	74.00	-35.70	HORIZONTAL	Peak
2	4206.011	51.03	30.18	4.60	36.81	49.00	74.00	-25.00	HORIZONTAL	Peak
3	4904.000	48.24	31.58	5.55	36.84	48.53	74.00	-25.47	HORIZONTAL	Peak
4	6934.778	49.93	34.92	5.81	37.19	53.47	74.00	-20.53	HORIZONTAL	Peak
5	7356.000	47.33	36.06	6.15	37.44	52.10	74.00	-21.90	HORIZONTAL	Peak
6	9808.000	45.23	38.56	7.00	37.41	53.38	74.00	-20.62	HORIZONTAL	Peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

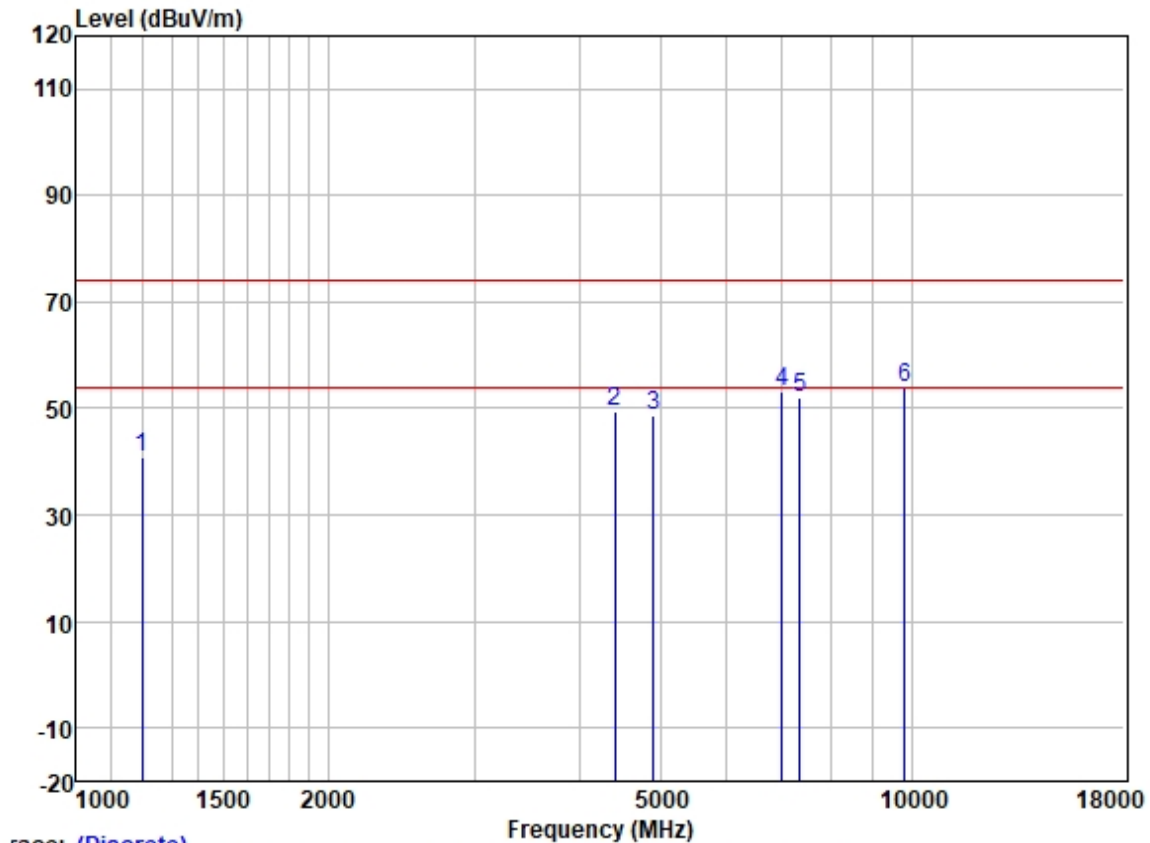


Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1199.726	52.37	24.68	2.34	38.39	41.00	74.00	-33.00	VERTICAL	Peak
2	4417.841	50.98	30.70	4.74	36.81	49.61	74.00	-24.39	VERTICAL	Peak
3	4904.000	48.28	31.58	5.55	36.84	48.57	74.00	-25.43	VERTICAL	Peak
4	6995.172	49.67	35.00	5.81	37.25	53.23	74.00	-20.77	VERTICAL	Peak
5	7356.000	47.23	36.06	6.15	37.44	52.00	74.00	-22.00	VERTICAL	Peak
6	9808.000	45.82	38.56	7.00	37.41	53.97	74.00	-20.03	VERTICAL	Peak

Test data for GW-5G01

Test Mode: 00; Polarity: Horizontal; Modulation: 802.11b; Bandwidth: 20MHz; Channel: Low

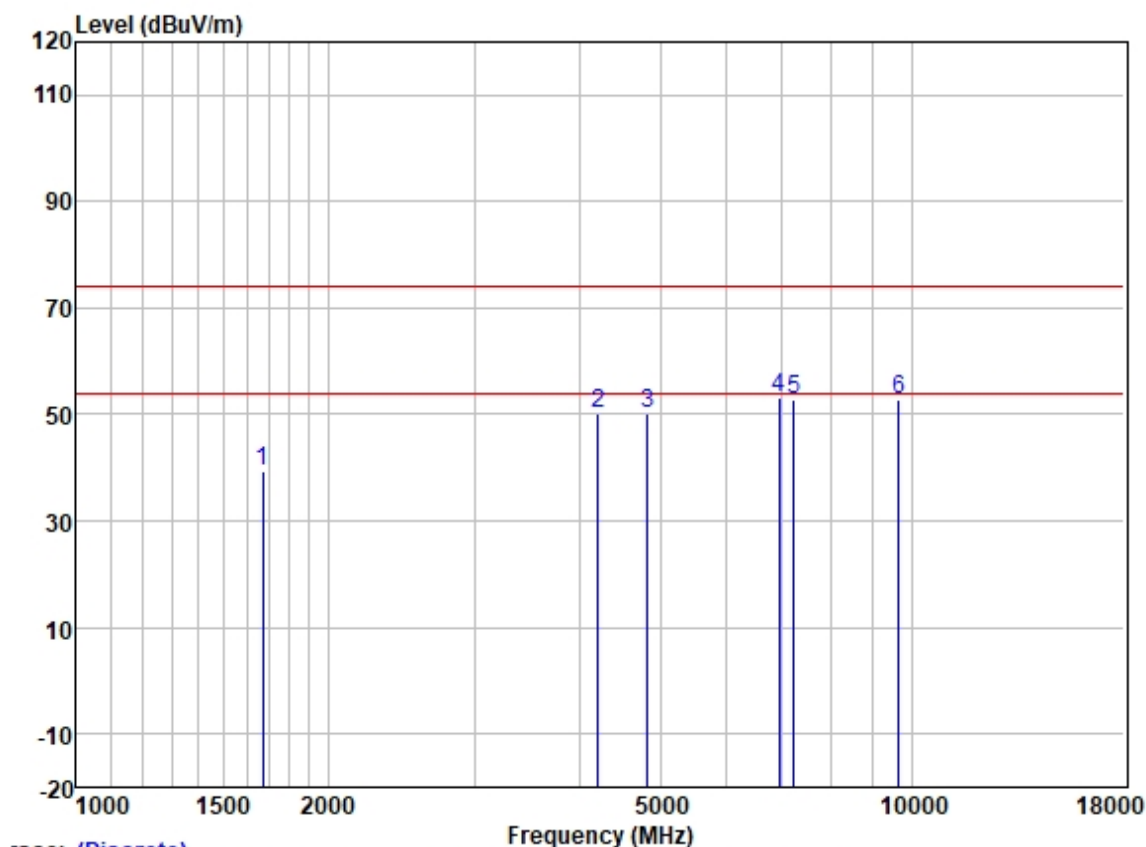

Trace: (Discrete)


	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1672.779	48.96	25.67	2.80	37.91	39.52	74.00	-34.48	HORIZONTAL Peak
2	4218.186	52.01	30.22	4.60	36.81	50.02	74.00	-23.98	HORIZONTAL Peak
3	4824.000	50.23	31.45	5.42	36.83	50.27	74.00	-23.73	HORIZONTAL Peak
4	6934.778	49.74	34.92	5.81	37.19	53.28	74.00	-20.72	HORIZONTAL Peak
5	7236.000	48.30	35.70	6.03	37.39	52.64	74.00	-21.36	HORIZONTAL Peak
6	9648.000	44.91	38.40	7.06	37.42	52.95	74.00	-21.05	HORIZONTAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

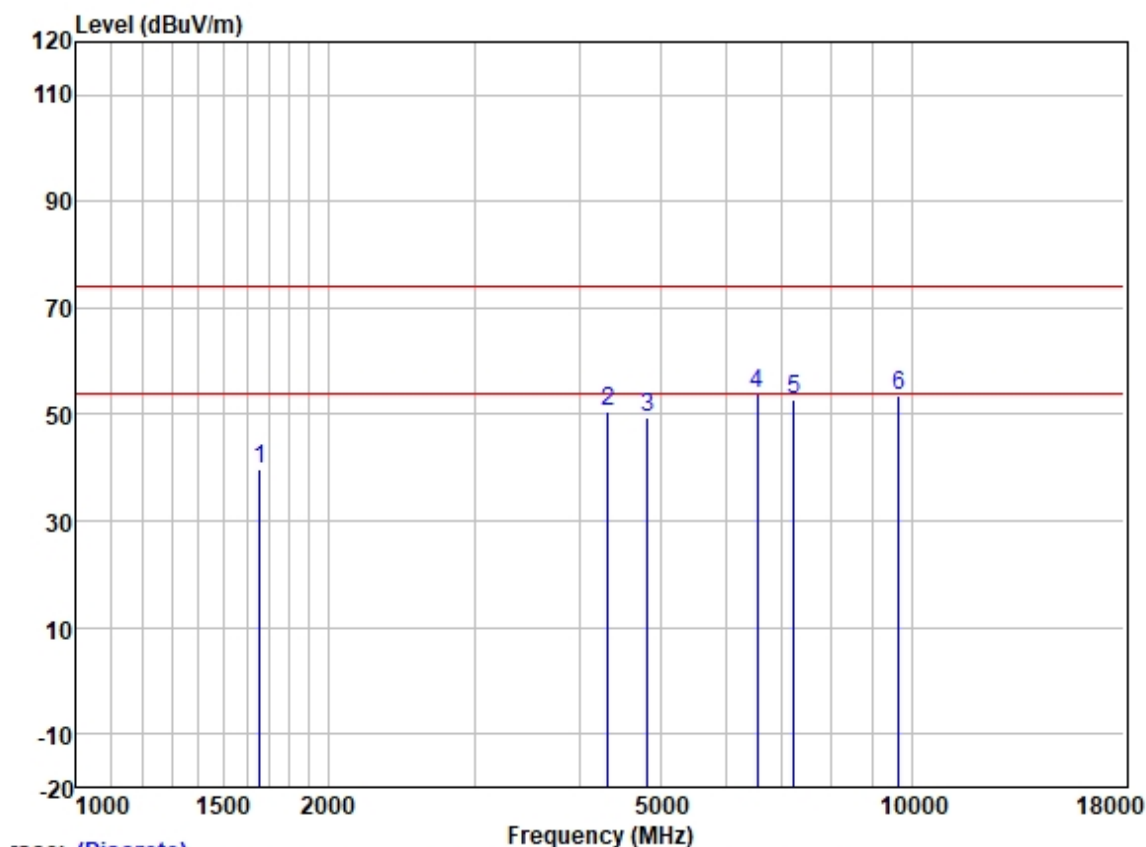

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1658.337	49.33	25.65	2.80	37.93	39.85	74.00	-34.15	VERTICAL	Peak
2	4329.354	52.21	30.54	4.67	36.81	50.61	74.00	-23.39	VERTICAL	Peak
3	4824.000	49.52	31.45	5.42	36.83	49.56	74.00	-24.44	VERTICAL	Peak
4	6545.263	51.04	34.06	5.84	37.03	53.91	74.00	-20.09	VERTICAL	Peak
5	7236.000	48.34	35.70	6.03	37.39	52.68	74.00	-21.32	VERTICAL	Peak
6	9648.000	45.34	38.40	7.06	37.42	53.38	74.00	-20.62	VERTICAL	Peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

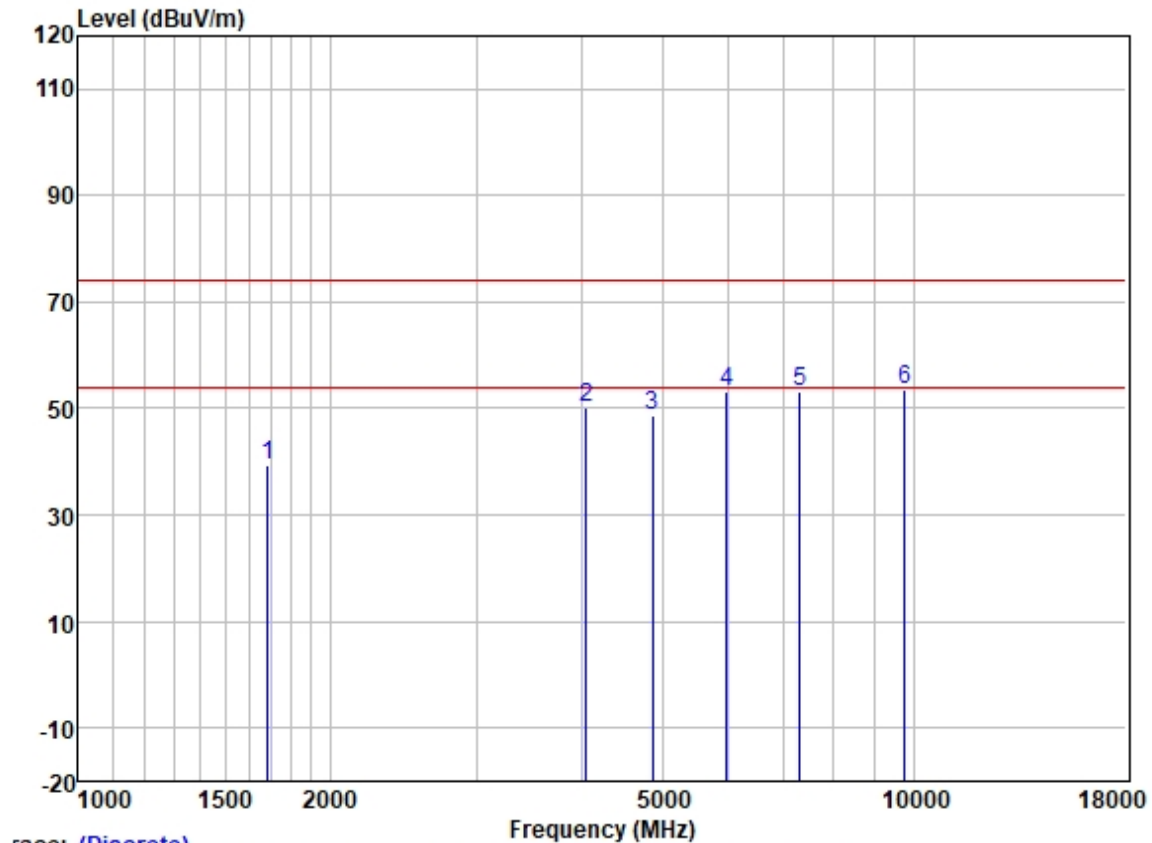

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1687.347	48.79	25.69	2.80	37.91	39.37	74.00	-34.63	HORIZONTAL	Peak
2	4050.904	52.52	29.87	4.60	36.80	50.19	74.00	-23.81	HORIZONTAL	Peak
3	4874.000	48.58	31.54	5.50	36.84	48.78	74.00	-25.22	HORIZONTAL	Peak
4	5967.033	51.77	32.37	6.10	36.90	53.34	74.00	-20.66	HORIZONTAL	Peak
5	7311.000	48.53	35.93	6.11	37.42	53.15	74.00	-20.85	HORIZONTAL	Peak
6	9748.000	45.50	38.50	7.02	37.41	53.61	74.00	-20.39	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 00; Polarity: Vertical; Modulation: 802.11b; Bandwidth: 20MHz; Channel: middle

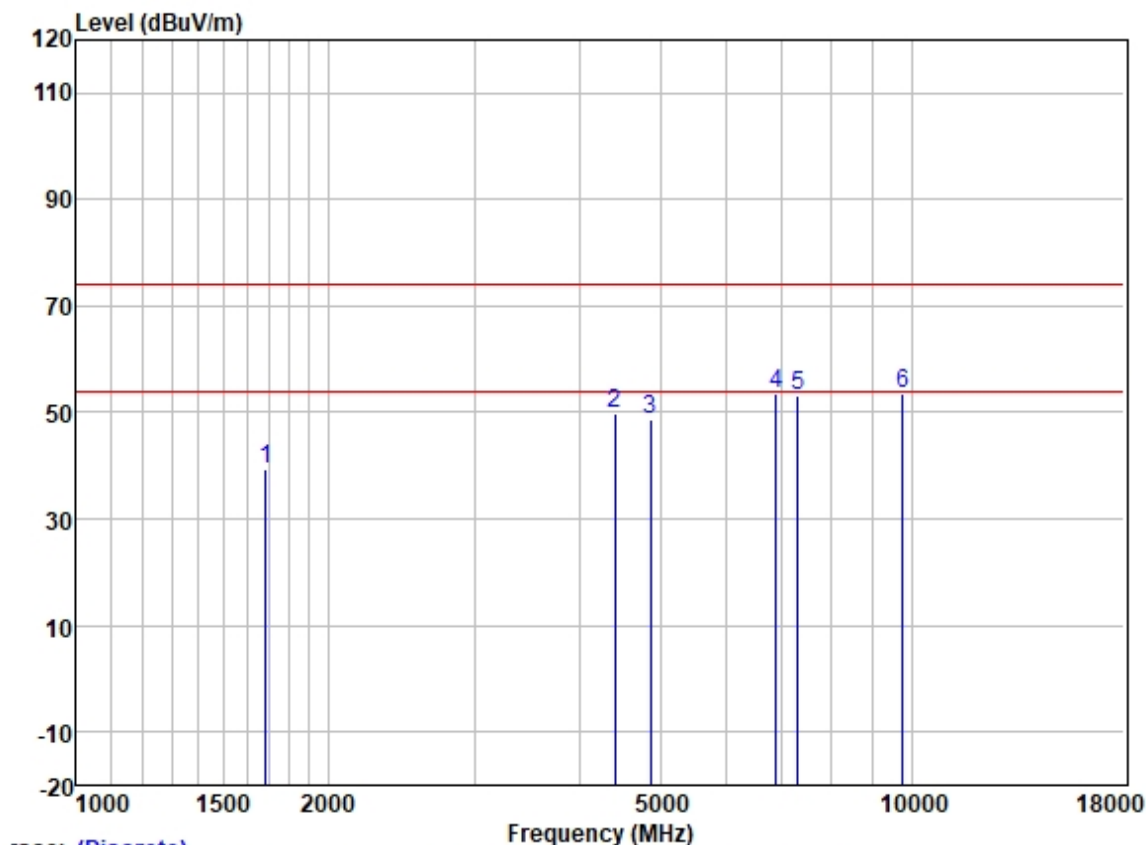


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1687.347	48.83	25.69	2.80	37.91	39.41	74.00	-34.59	VERTICAL	Peak
2	4417.841	51.18	30.70	4.74	36.81	49.81	74.00	-24.19	VERTICAL	Peak
3	4874.000	48.60	31.54	5.50	36.84	48.80	74.00	-25.20	VERTICAL	Peak
4	6874.906	50.19	34.82	5.82	37.16	53.67	74.00	-20.33	VERTICAL	Peak
5	7311.000	48.68	35.93	6.11	37.42	53.30	74.00	-20.70	VERTICAL	Peak
6	9748.000	45.59	38.50	7.02	37.41	53.70	74.00	-20.30	VERTICAL	Peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

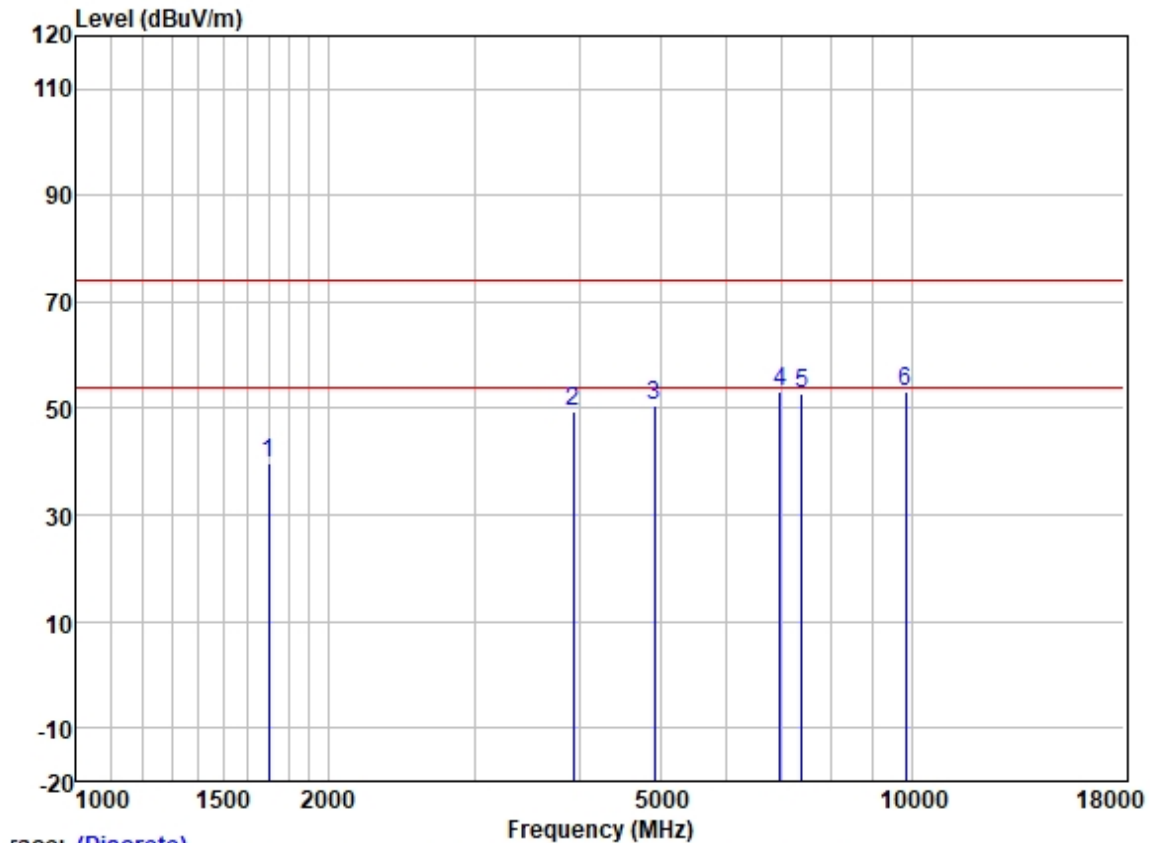

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1697.129	49.18	25.71	2.80	37.89	39.80	74.00	-34.20	HORIZONTAL	Peak
2	3935.493	52.11	29.73	4.60	36.82	49.62	74.00	-24.38	HORIZONTAL	Peak
3	4924.000	50.22	31.62	5.60	36.84	50.60	74.00	-23.40	HORIZONTAL	Peak
4	6954.852	49.52	34.95	5.81	37.21	53.07	74.00	-20.93	HORIZONTAL	Peak
5	7386.000	48.06	36.17	6.19	37.45	52.97	74.00	-21.03	HORIZONTAL	Peak
6	9848.000	45.12	38.58	6.99	37.41	53.28	74.00	-20.72	HORIZONTAL	Peak


Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

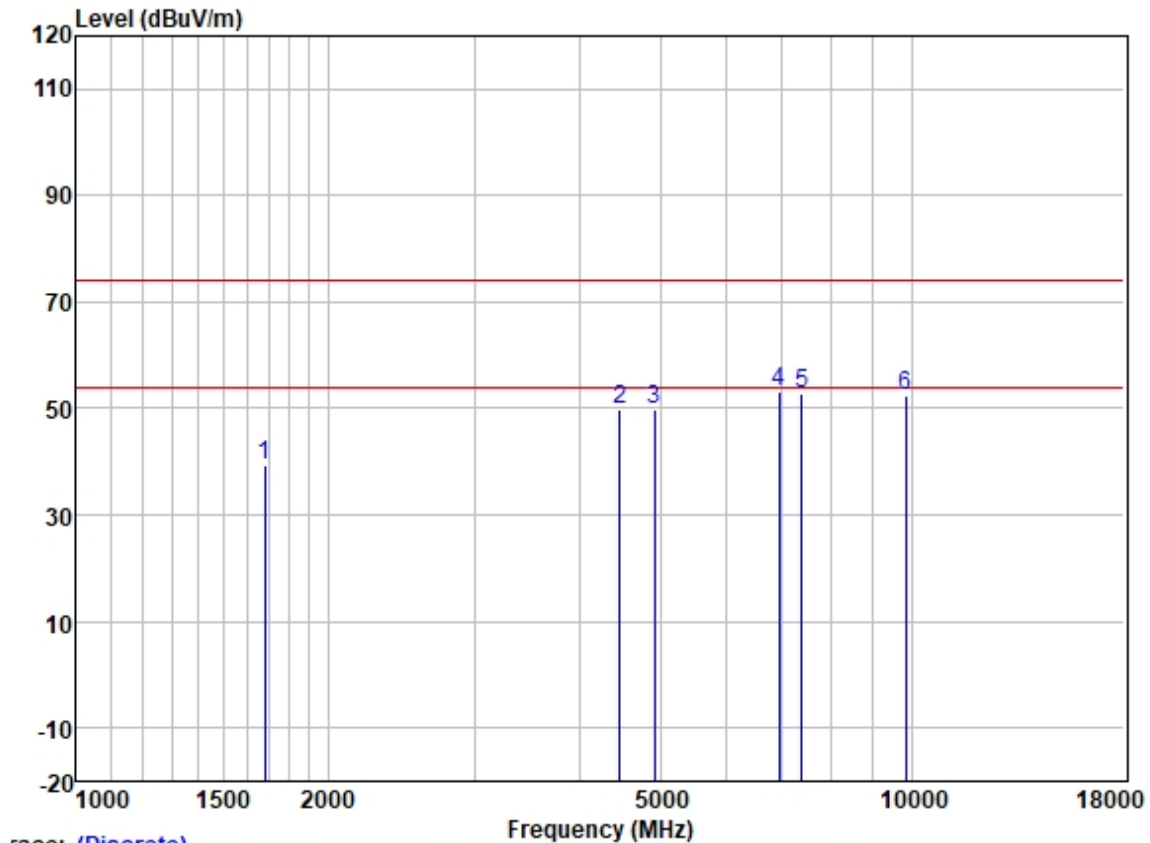

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1682.477	48.91	25.68	2.80	37.91	39.48	74.00	-34.52	VERTICAL	Peak
2	4469.214	50.78	30.77	4.93	36.81	49.67	74.00	-24.33	VERTICAL	Peak
3	4924.000	49.48	31.62	5.60	36.84	49.86	74.00	-24.14	VERTICAL	Peak
4	6934.778	49.61	34.92	5.81	37.19	53.15	74.00	-20.85	VERTICAL	Peak
5	7386.000	47.87	36.17	6.19	37.45	52.78	74.00	-21.22	VERTICAL	Peak
6	9848.000	44.38	38.58	6.99	37.41	52.54	74.00	-21.46	VERTICAL	Peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

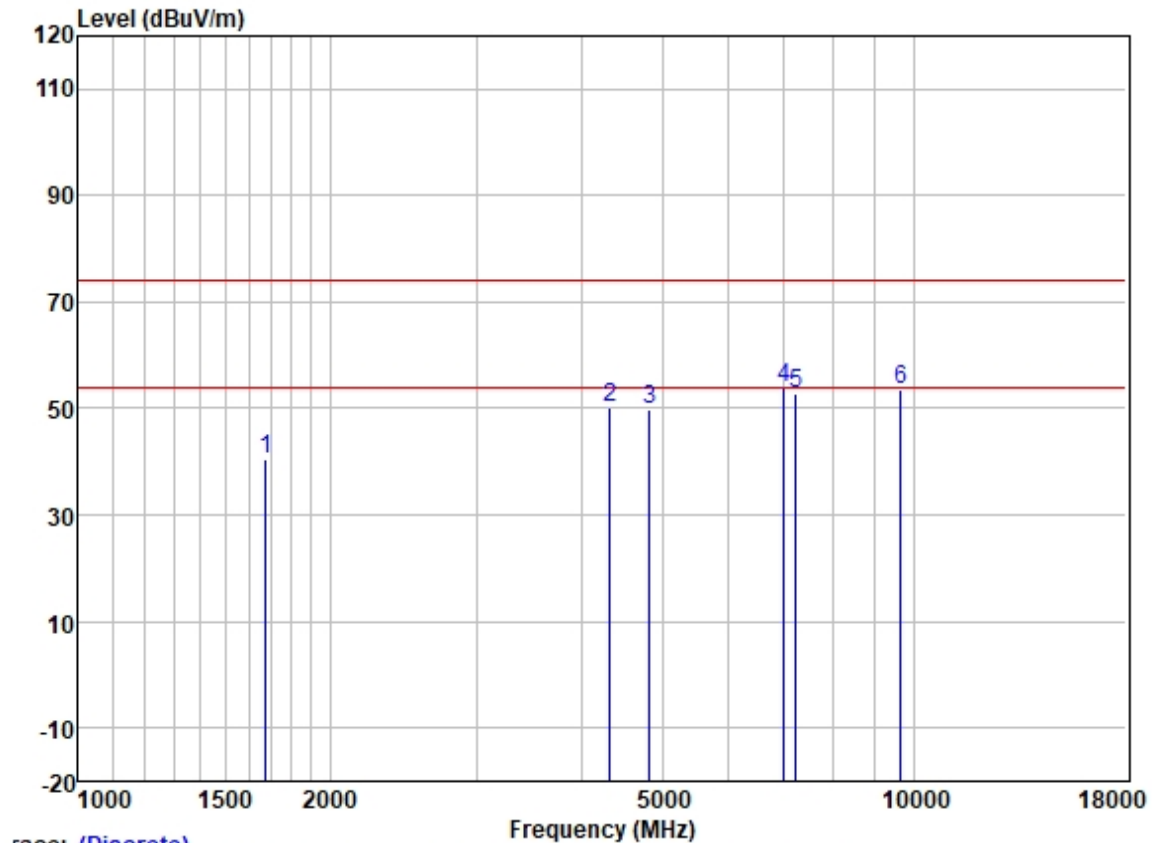

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1677.621	49.90	25.68	2.80	37.91	40.47	74.00	-33.53	HORIZONTAL	Peak
2	4329.354	51.74	30.54	4.67	36.81	50.14	74.00	-23.86	HORIZONTAL	Peak
3	4824.000	49.78	31.45	5.42	36.83	49.82	74.00	-24.18	HORIZONTAL	Peak
4	6995.172	50.20	35.00	5.81	37.25	53.76	74.00	-20.24	HORIZONTAL	Peak
5	7236.000	48.56	35.70	6.03	37.39	52.90	74.00	-21.10	HORIZONTAL	Peak
6	9648.000	45.42	38.40	7.06	37.42	53.46	74.00	-20.54	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com