




Engineering Test Report No. 2300550-01

Report Date	June 16, 2023	
Manufacturer Name	Winegard Company	
Manufacturer Address	2736 Mt Pleasant St Burlington, IA 52601	
Product Name Model No.	BLE sensor HS-SSET	
Date Received	June 12, 2023	
Test Dates	June 12, 2023 through June 16, 2023	
Specifications	FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B Innovation, Science, and Economic Development Canada, ICES-003 FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 Innovation, Science, and Economic Development Canada, RSS-GEN Innovation, Science, and Economic Development Canada, RSS-247	
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature		
Tested by	Javier Cardenas	
Signature		
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894	
PO Number	P539046-00	

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247 test specifications. The data presented in this test report pertains to the EUT on the test dates specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Table of Contents

1.	Report Revision History	3
2.	Introduction	4
2.1.	Scope of Tests	4
2.2.	Purpose	4
2.3.	Identification of the EUT	4
3.	Power Input	4
4.	Grounding	4
5.	Support Equipment	4
6.	Interconnect Leads	5
7.	Modifications Made to the EUT	5
8.	Modes of Operation	5
9.	Test Specifications	5
10.	Test Plan	5
11.	Deviation, Additions to, or Exclusions from Test Specifications	6
12.	Laboratory Conditions	6
13.	Summary	6
14.	Sample Calculations	6
15.	Statement of Conformity	7
16.	Certification	7
17.	Photographs of EUT	8
18.	Equipment List	10
19.	Block Diagram of Test Setup	11
20.	Part 15B Radiated Emissions	12
22.	DTS Bandwidth – 6dB Bandwidth	23
23.	Occupied Bandwidth (99%)	27
24.	Effective Isotropic Radiated Power (EIRP)	31
25.	Case Spurious Radiated Emissions	33
26.	Band-Edge Compliance	48
27.	Power Spectral Density	54
28.	Scope of Accreditation	62

**This report shall not be reproduced, except in full,
without the written approval of Elite Electronic Engineering Inc.**

1. Report Revision History

Revision	Date	Description
–	20 JUN 2023	Initial Release of Engineering Test Report No. 2300550-01

2. Introduction

2.1. Scope of Tests

This document presents the results of a series of RF emissions tests that were performed on the Winegard Company BLE sensor (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was manufactured and submitted for testing by Winegard Company located in Burlington, IA.

2.2. Purpose

The test series was performed to determine if the EUT meets the RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, §15.109 and Subpart C, §15.247 for a Digital Modulation intentional radiator operating within the 2400 – 2483.5MHz band.

The test series was also performed to determine if the EUT meets the RF emission requirements of the ICES-003 specification, Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen and Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-247 for a Digital Modulation intentional radiator operating within the 2400 – 2483.5MHz band.

Testing was performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

2.3. Identification of the EUT

The EUT was identified as follows:

EUT Identification	
Product Description	BLE sensor
Model/Part No.	HS-SSET
Serial No.	Parent
Size of EUT	4.5cm Length x 6.0cm Width x 2.0cm depth
Software/Firmware Version	Version 20230606
Device Type	Digitally Modulated Transmission Device
Band of Operation	2400 – 2483.5MHz
Modulation Type	GFSK
Antenna Type	Trace antenna
EIRP	5.5mW (7.4dBm)
6dB Bandwidth	749.3kHz
Occupied Bandwidth (99% CBW)	1.175MHz
Emission Classification	1M17F1D

The EUT listed above was used throughout the test series.

3. Power Input

The EUT was powered by 3VDC from an internal lithium battery.

4. Grounding

The EUT was not connected to ground.

5. Support Equipment

The EUT was submitted for testing along with the following support equipment:

Description	Model #	S/N
Laptop	NA	NA

6. Interconnect Leads

The following interconnect cables were submitted with the test item:

Item	Description
UART to USB	Connects laptop to EUT for radio configuration

7. Modifications Made to the EUT

No modifications were made to the EUT during the testing.

8. Modes of Operation

The EUT and all peripheral equipment were energized. The unit was programmed to transmit in one of the following modes:

Mode	Description
Tx	Bluetooth: - Continuous Tx at 2402MHz, Power Setting = 4dBm - Continuous Tx at 2440MHz, Power Setting = 4dBm - Continuous Tx at 2480MHz, Power Setting = 4dBm
Standby	EUT was powered and the Bluetooth radio was configured to receive across the 2.4GHz to 2.4835GHz range.

9. Test Specifications

The tests were performed to selected portions of, and in accordance with, the test specifications.

- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart B
- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart C
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- Federal Communications Commission Office of Engineering and Technology Laboratory Division, Guidance For Compliance Measurements On Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 April 2, 2019 KDB 558074 D01v05r02
- RSS-Gen Issue 5, February 2020, Amendment 2, Innovation, Science, and Economic Development Canada, "General Requirements for Compliance of Radio Apparatus"
- RSS-247 Issue 2, February 2017, "Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices"

10. Test Plan

No test plan was provided. Instructions were provided by personnel from Winegard Company and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B and Innovation, Science, and Economic Development Canada, ICES-003, FCC "Code of Federal Regulations" Title 47 Part 15, Subpart

C, Section 15.247, Innovation, Science, and Economic Development Canada, RSS-247, and ANSI C63.4-2014 specifications.

11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

12. Laboratory Conditions

The ambient parameters of the laboratory during testing were as follows:

Ambient Parameters	Value
Temperature	23°C
Relative Humidity	29%
Atmospheric Pressure	1005mb

13. Summary

The following EMC tests were performed, and the results are shown below:

Test Description	Requirements	Test Method	S/N	Results
Part 15B Radiated Emissions	FCC 15.109 ICES-003	ANSI C63.4:2014	Parent	Conforms
Occupied Bandwidth (99%)	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	Parent	Conforms
Effective Isotropic Radiated Power (EIRP)	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	Parent	Conforms
Case Spurious Radiated Emissions	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	Parent	Conforms
Band-Edge Compliance	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	Parent	Conforms
Power Spectral Density	FCC 15.247 ISED RSS-247	ANSI C63.10:2013	Parent	Conforms

14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dB}\mu\text{V)} = \text{MTR (dB}\mu\text{V)} + \text{CF (dB)}.$$

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

$$\text{Formula 1: } FS \text{ (dB}\mu\text{V/m)} = \text{MTR (dB}\mu\text{V)} + \text{AF (dB/m)} + \text{CF (dB)} + (-\text{PA (dB)}) + \text{DC (dB)}$$

To convert the Field Strength dB μ V/m term to μ V/m, the dB μ V/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in μ V/m terms.

$$\text{Formula 2: } FS \text{ (}\mu\text{V/m)} = \text{AntiLog} [(FS \text{ (dB}\mu\text{V/m)})/20]$$

15. Statement of Conformity

The Winegard Company BLE sensor, Model No. HS-SSET, Serial No. Parent did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247.

16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247 test specifications. The data presented in this test report pertains to the EUT as received by the customer on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

17. Photographs of EUT

Photo removed for short-term confidentiality purposes.

Photo removed for short-term confidentiality purposes.

Photo removed for short-term confidentiality purposes.

Photo removed for short-term confidentiality purposes.

18. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW0	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-30-20G20R6G	PL2926/0646	20GHZ-26.5GHZ	9/21/2022	9/21/2023
APW14	PREAMPLIFIER	PLANAR	PE2-35-120-5R0-10-12-SFF	PL22671	1-20GHz	9/21/2022	9/21/2023
GSF0	VECTOR SIGNAL GENERATOR	ROHDE & SCHWARZ	SMBV100A	260452	9kHz to 6GHz	9/2/2022	9/2/2024
NHG1	STANDARD GAIN HORN ANTENNA	NARDA	638	---	18-26.5GHZ	NOTE 1	
NTA3	BILOG ANTENNA	TESEQ	6112D	32853	25-1000MHz	11/17/2022	11/17/2024
NWQ1	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS-LINDGREN	3117	66655	1GHZ-18GHZ	5/26/2022	5/26/2024
NWQ2	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66659	1GHZ-18GHZ	4/27/2022	4/27/2024
RBG2	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101591	2HZ-44GHZ	4/10/2023	4/10/2024
RBG4	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	103007	2HZ-44GHZ	12/8/2022	12/8/2023
SES0	24VDC POWER SUPPLY	P-TRANS	FS-32024-1M	001	18-27VDC	NOTE 1	
T1E19	10DB 25W ATTENUATOR	WEINSCHL	46-10-43	CM5687	DC-18GHZ	5/18/2022	5/18/2024
T2SG	20DB 25W ATTENUATOR	WEINSCHL	46-20-34	CD5016	DC-18GHZ	1/4/2022	1/4/2024
VBV2	CISPR EN FCC ICES RE.EXE	ELITE	CISPR EN FCC ICES RE.EXE	---	---	N/A	
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	
XPQ4	HIGH PASS FILTER	K&L MICROWAVE	11SH10-4800/X20000-O/O	1	4.8-20GHZ	9/7/2021	9/7/2023


N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

19. Block Diagram of Test Setup

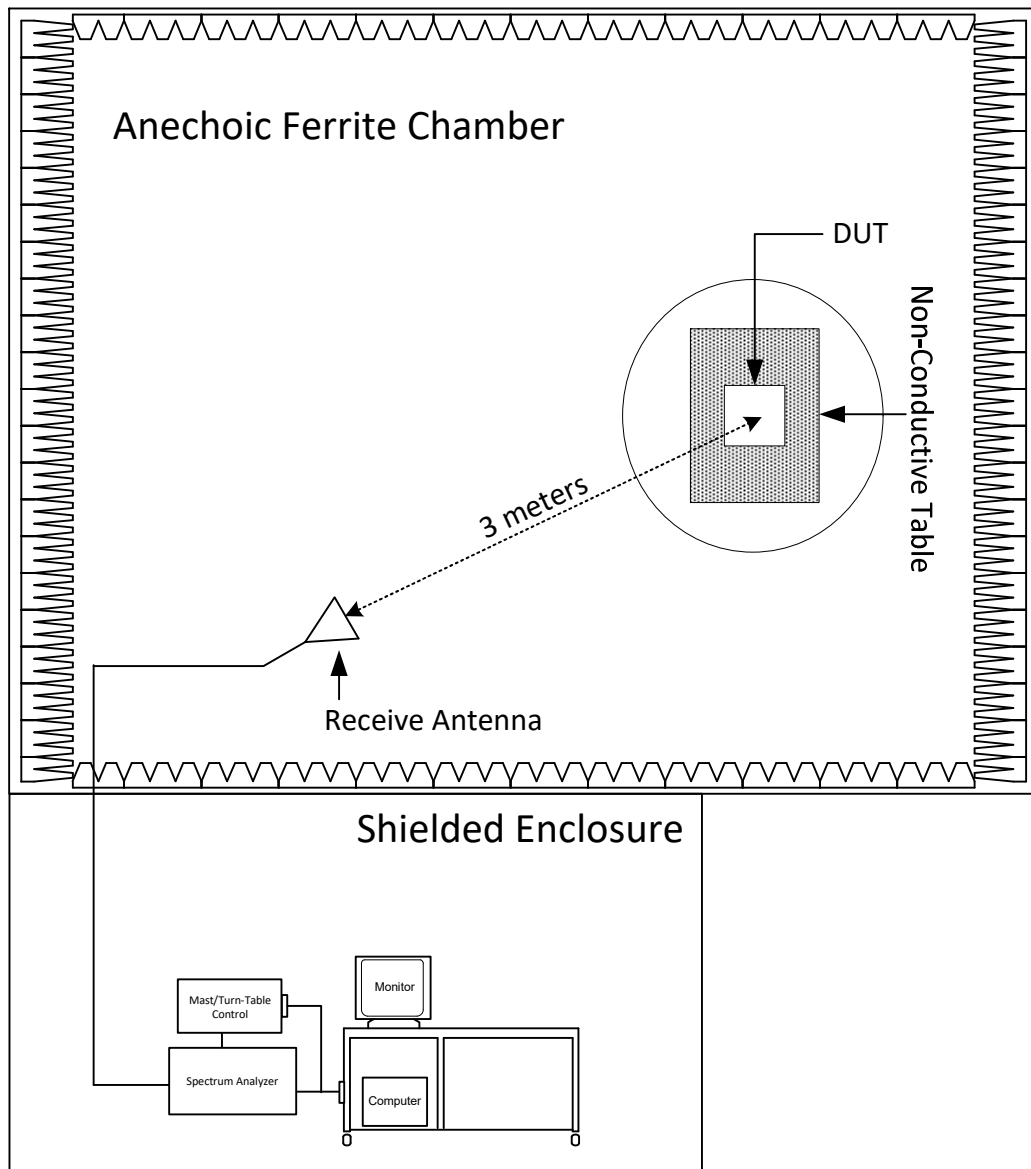

Radiated Measurements Test Setup

20. Part 15B Radiated Emissions

EUT Information	
Manufacturer	Winegard Company
Product	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Standby

Test Site Information	
Setup Format	Tabletop
Height of Support	NA
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	R29F
Type of Antennas Used	Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent)
Highest Internal Frequency	2.4GHz
Highest Measurement Frequency	13GHz
Notes	The cables were manually maximized during the preliminary emissions sweeps. The cable arrangement which resulted in the worst-case emissions was utilized.

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements
The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the values in the following tables.

FCC Part 15 Class B Radiated Emissions Limits (30MHz to 1GHz)		
Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)
30 – 88	100	40
88 – 216	150	43.5
216 – 960	200	46
Above 960	500	54
FCC Part 15 Class B Radiated Emissions Limits (Above 1GHz)		
Frequency of Emission (MHz)	Peak Limit ($\text{dB}\mu\text{V/m}$)	Average Limit ($\text{dB}\mu\text{V/m}$)
Above 1000	74	54

ICES-003 Class B Radiated Emissions Limits (30MHz to 1GHz)		
Frequency Range (MHz)	Field Strength at 3 meters ($\text{dB}\mu\text{V/m}$)	Field Strength at 10 meters ($\text{dB}\mu\text{V/m}$)
30 – 88	40	30
88 – 216	43.5	33.1
216 – 230	46	35.6
230 – 960	47	37
960 – 1000	54	43.5
ICES-003 Class B Radiated Emissions Limits (At and Above 1GHz)		
Frequency Range (GHz)	Average ($\text{dB}\mu\text{V/m}$)	Peak ($\text{dB}\mu\text{V/m}$)
1 – F_M	54	74
F_M = highest measurement frequency		


Procedure

Since a quasi-peak detector and an average detector requires long integration times, it is not practical to automatically sweep through the quasi-peak and average levels. Therefore, radiated emissions from the EUT were first scanned using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured using the quasi-peak detector or average detector.


The EUT and all peripheral equipment were placed on an 80cm high non-conductive stand. The broadband measuring antenna was positioned at a 3-meter distance from the EUT. The frequency range from 30MHz to 1GHz was investigated using a peak detector function with the bilog antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The frequency range from 1GHz to 13GHz was investigated using a peak detector function with the double ridged waveguide antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The maximum levels for each antenna polarization were plotted.

Final radiated emissions were performed on all significant broadband and narrowband emissions found in the exploratory sweeps using the following methods:


- 1) Measurements from 30MHz to 1GHz were made using a quasi-peak detector and a broadband bilog antenna. Measurements above 1GHz were made using an average detector and a broadband double ridged waveguide antenna.
- 2) To ensure that maximum or worst case, emission levels were measured, the following steps were taken:
 - a) The EUT was rotated so that all sides were exposed to the receiving antenna.
 - b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - c) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
 - d) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

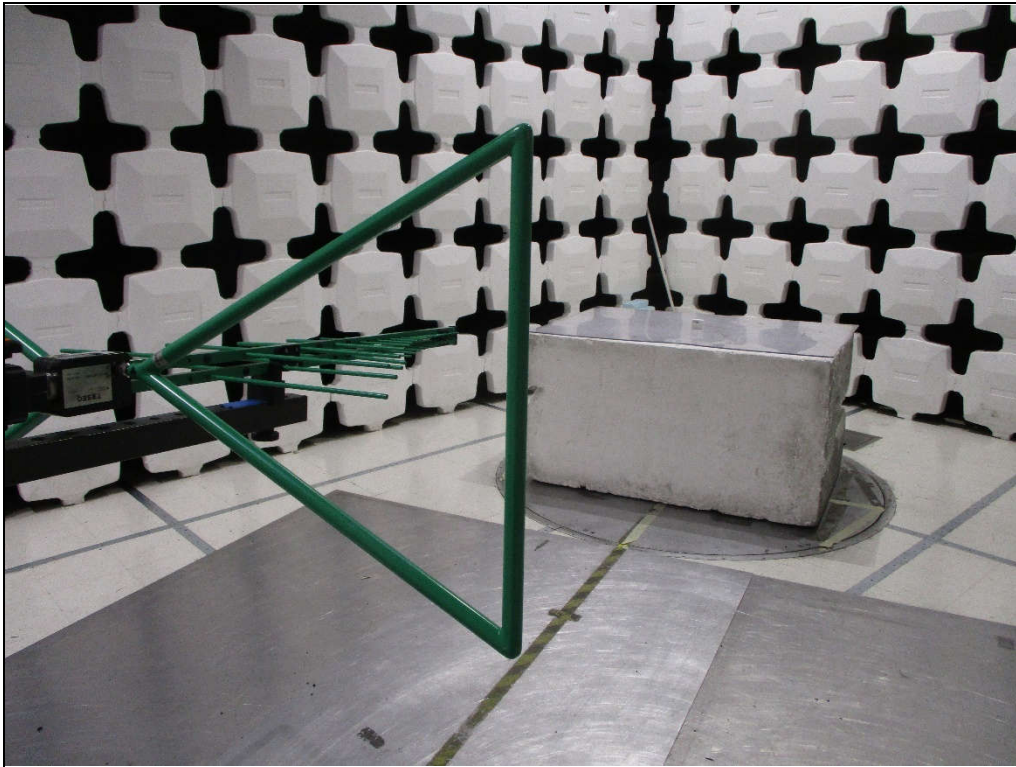


Test Setup for Radiated Emissions: 30MHz to 1GHz, Horizontal Polarization

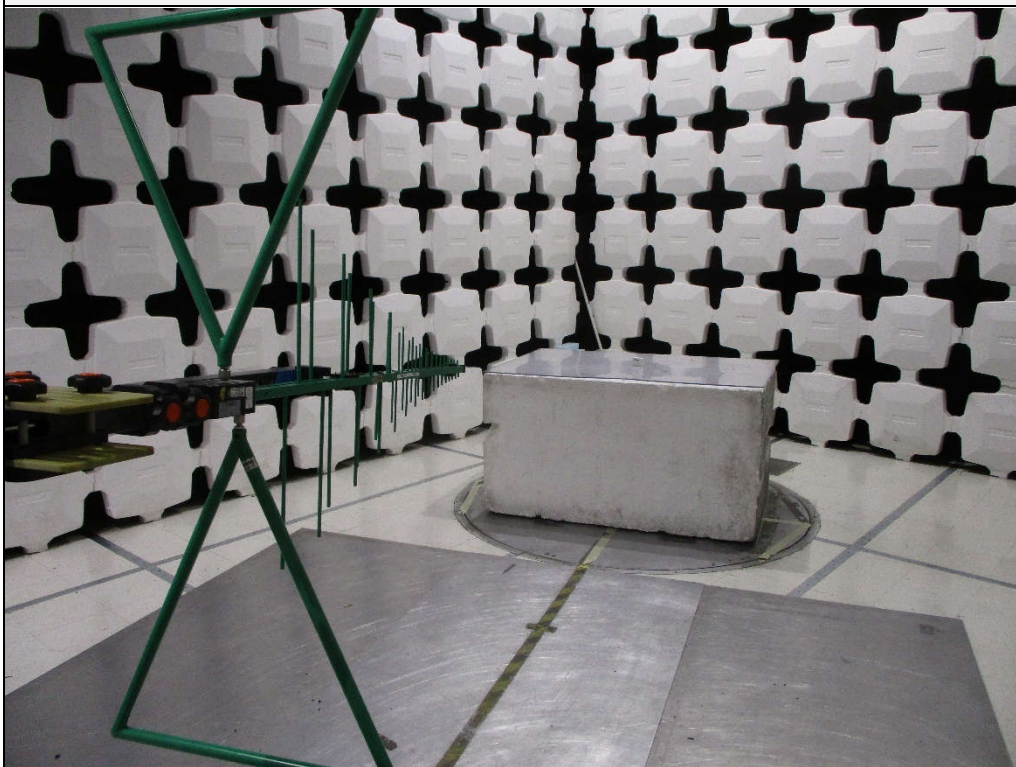

Test Setup for Radiated Emissions: 30MHz to 1GHz, Vertical Polarization

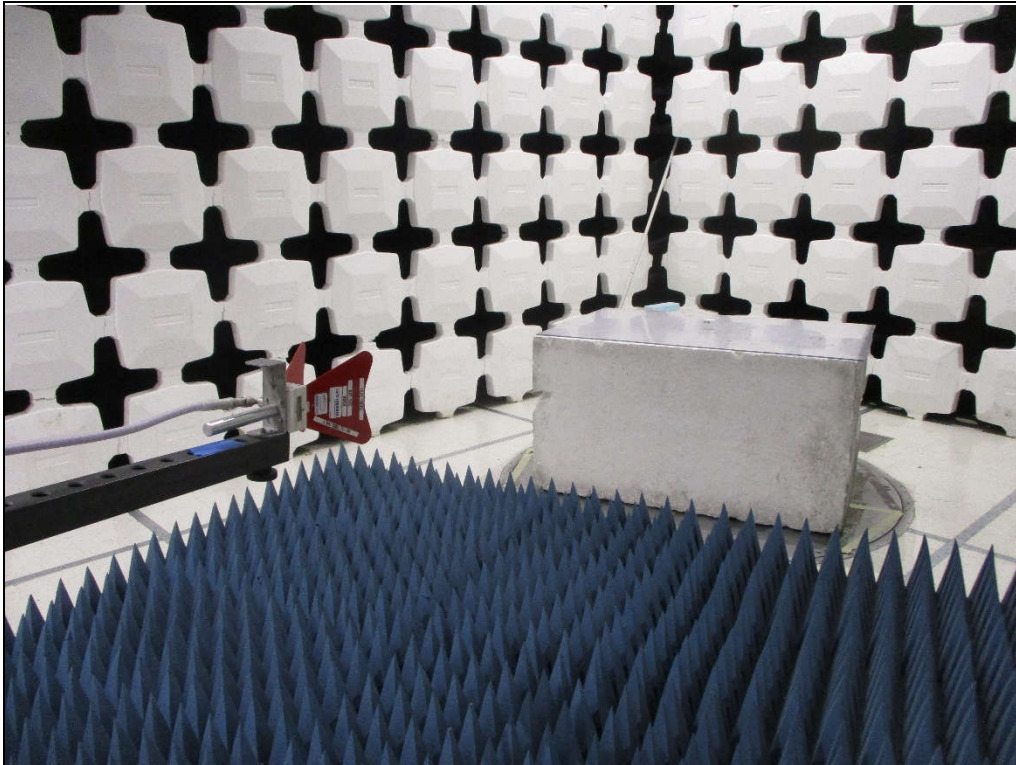

Test Setup for Radiated Emissions: Above 1GHz, Horizontal Polarization

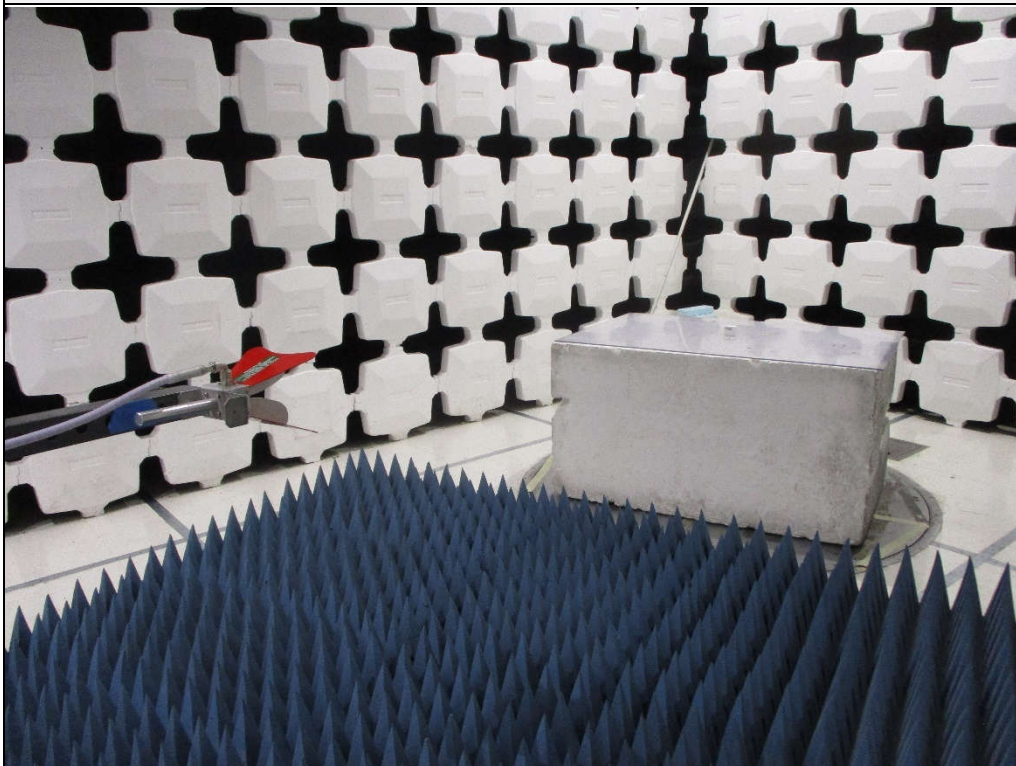

Test Setup for Radiated Emissions: Above 1GHz, Vertical Polarization

FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 04/24/2023


Manufacturer : Winegard Company
 Model : HS-SSET
 Serial Number : Parent
 DUT Mode : Standby
 Turntable Step Angle (°): 45
 Mast Positions (cm) : 120, 200, 340
 Scan Type : Stepped Scan
 Test RBW : 120 kHz
 Prelim Dwell Time (s) : 0.0001
 Notes : Rx - Sweep
 Test Engineer : J. Cardenas
 Test Date : Jun 16, 2023 08:06:56 AM

Freq MHz	Peak Mtr Rdg dBuV	QP Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Peak Total dBuV/m	QP Total dBuV/m	QP Limit dBuV/m	QP Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive QP Level
30.540	5.3	-4.1	24.2	0.0	0.4	0.0	29.9	20.4	40.0	-19.6	Horizontal	200	180	
85.080	2.2	-6.6	13.8	0.0	0.4	0.0	16.4	7.6	40.0	-32.4	Vertical	120	90	
107.920	4.1	-2.7	17.8	0.0	0.4	0.0	22.4	15.5	43.5	-28.0	Horizontal	340	270	
255.120	2.8	-6.3	19.0	0.0	0.8	0.0	22.6	13.5	46.0	-32.5	Horizontal	200	135	
554.640	3.3	-6.0	24.7	0.0	1.1	0.0	29.2	19.8	46.0	-26.2	Vertical	120	225	
922.620	4.1	-5.4	26.5	0.0	1.5	0.0	32.1	22.6	46.0	-23.4	Vertical	340	225	

FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 04/24/2023


Manufacturer : Winegard Company
 Model : HS-SSET
 Serial Number : Parent
 DUT Mode : Standby
 Turntable Step Angle (°): 45
 Mast Positions (cm) : 120, 200, 340
 Antenna Polarization : Horizontal
 Scan Type : Stepped Scan
 Test RBW : 120 kHz
 Prelim Dwell Time (s) : 0.0001
 Notes : Rx - Sweep
 Test Engineer : J. Cardenas
 Test Date : Jun 16, 2023 08:06:56 AM

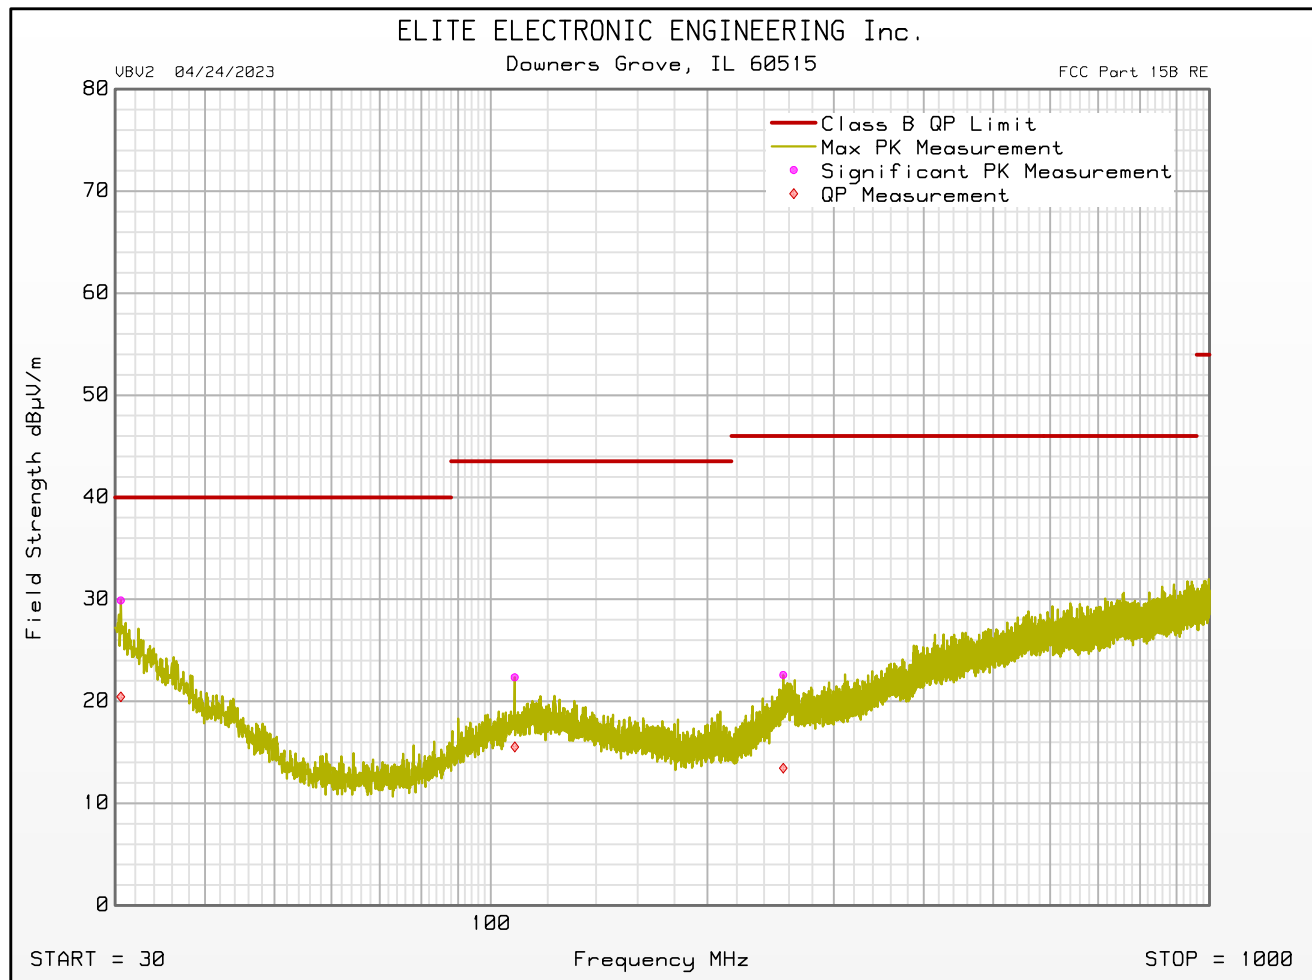

FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 04/24/2023

Manufacturer : Winegard Company
 Model : HS-SSET
 Serial Number : Parent
 DUT Mode : Standby
 Turntable Step Angle (°): 45
 Mast Positions (cm) : 120, 200, 340
 Antenna Polarization : Vertical
 Scan Type : Stepped Scan
 Test RBW : 120 kHz
 Prelim Dwell Time (s) : 0.0001
 Notes : Rx - Sweep
 Test Engineer : J. Cardenas
 Test Date : Jun 16, 2023 08:06:56 AM

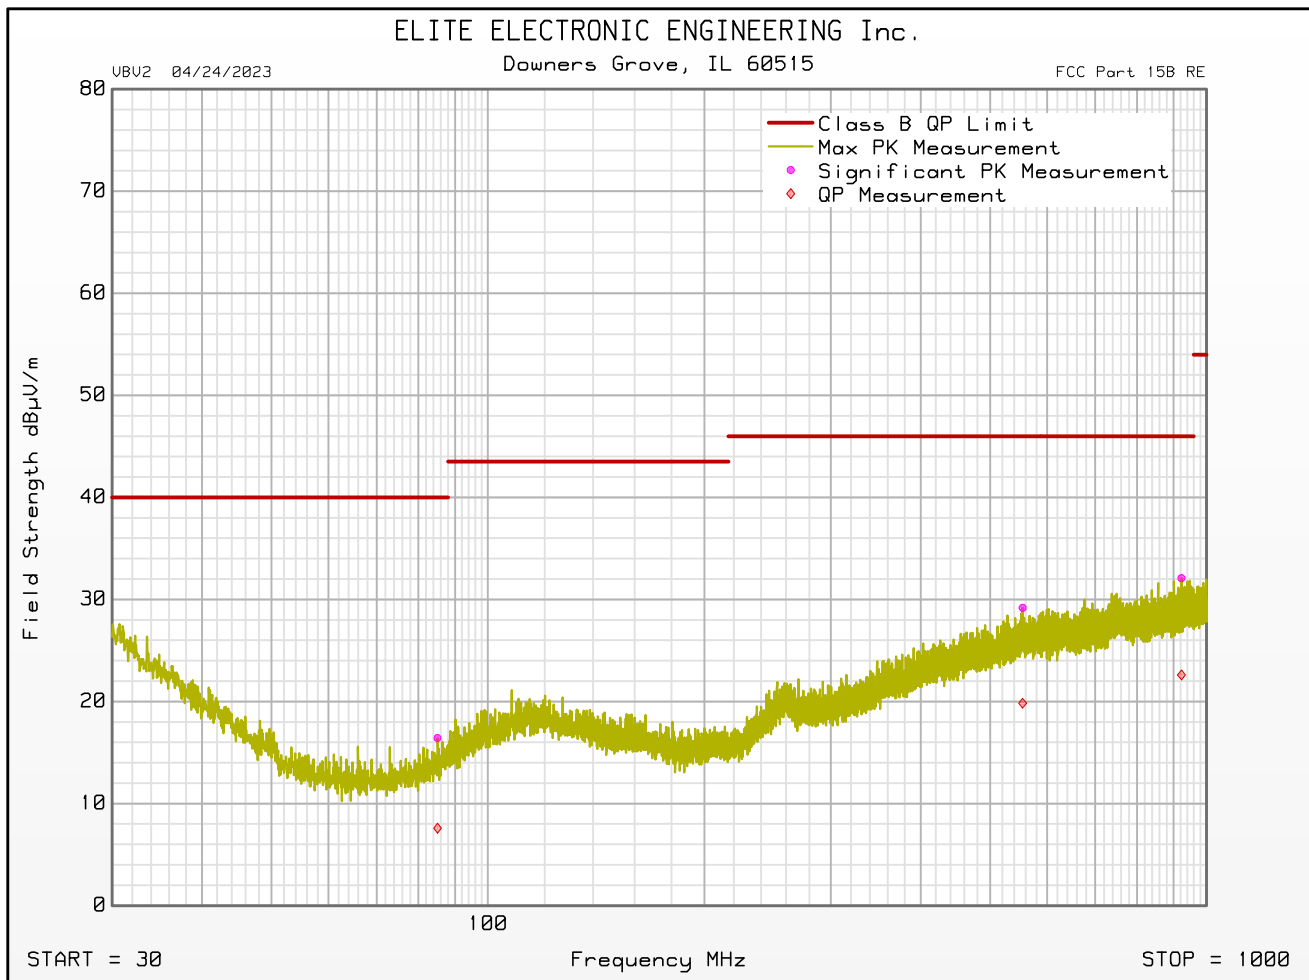



FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 04/24/2023

Manufacturer : Winegard Company
Model : HS-SSET
Serial Number : Parent
DUT Mode : Standby
Turntable Step Angle (°): 45
Mast Positions (cm) : 120, 200, 340
Scan Type : Stepped Scan
Test RBW : 1 MHz
Prelim Dwell Time (s) : 0.0001
Notes : Rx - Sweep
Test Engineer : J. Cardenas
Test Date : Jun 15, 2023 01:07:34 PM


Freq MHz	Peak Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Peak Total dBuV/m	Peak Limit dBuV/m	Peak Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive Peak Level
1394.500	49.3	28.7	-40.3	1.9	0.0	39.6	74.0	-34.4	Horizontal	340	225	
2311.000	47.8	32.4	-40.1	2.5	0.0	42.7	74.0	-31.3	Vertical	340	135	
3408.500	47.5	33.2	-39.6	3.2	0.0	44.2	74.0	-29.7	Horizontal	340	315	
5487.000	46.1	34.8	-39.4	4.0	0.0	45.5	74.0	-28.5	Vertical	340	0	
7759.500	47.2	36.5	-39.5	4.9	0.0	49.1	74.0	-24.9	Vertical	120	315	
12834.000	46.8	39.2	-38.5	6.1	0.0	53.6	74.0	-20.4	Vertical	340	90	

Freq MHz	Average Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Average Total dBuV/m	Average Limit dBuV/m	Average Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive Average Level
1394.500	35.5	28.7	-40.3	1.9	0.0	25.8	54.0	-28.2	Horizontal	340	225	
2311.000	34.7	32.4	-40.1	2.5	0.0	29.6	54.0	-24.4	Vertical	340	135	
3408.500	33.8	33.2	-39.6	3.2	0.0	30.6	54.0	-23.4	Horizontal	340	315	
5487.000	32.9	34.8	-39.4	4.0	0.0	32.3	54.0	-21.7	Vertical	340	0	
7759.500	32.8	36.5	-39.5	4.9	0.0	34.7	54.0	-19.3	Vertical	120	315	
12834.000	33.3	39.2	-38.5	6.1	0.0	40.0	54.0	-14.0	Vertical	340	90	

FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 04/24/2023


Manufacturer : Winegard Company
 Model : HS-SSET
 Serial Number : Parent
 DUT Mode : Standby
 Turntable Step Angle (°): 45
 Mast Positions (cm) : 120, 200, 340
 Antenna Polarization : Horizontal
 Scan Type : Stepped Scan
 Test RBW : 1 MHz
 Prelim Dwell Time (s) : 0.0001
 Notes : Rx - Sweep
 Test Engineer : J. Cardenas
 Test Date : Jun 15, 2023 01:07:34 PM

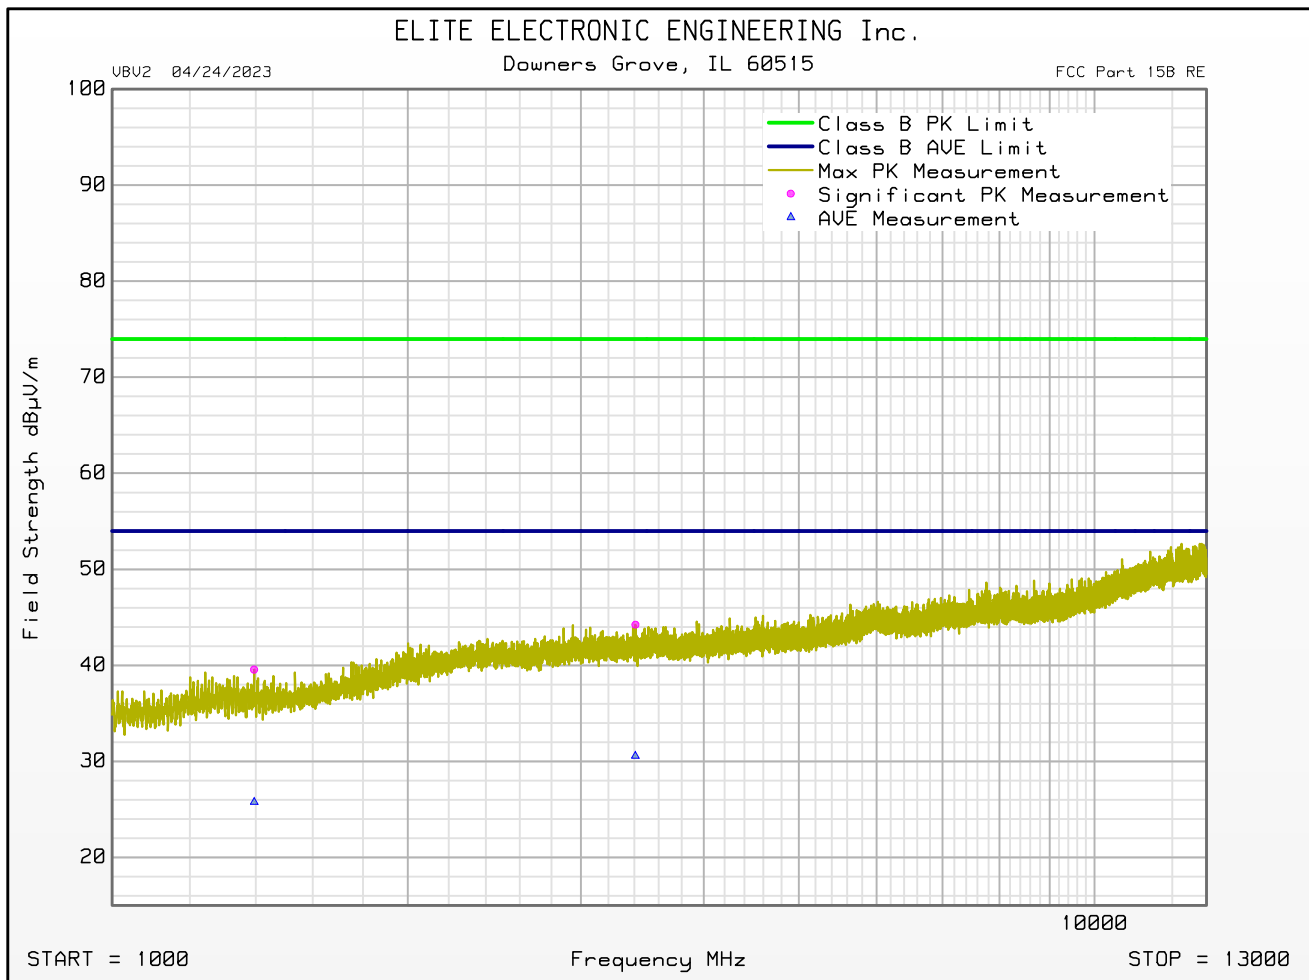

FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 04/24/2023

Manufacturer : Winegard Company
 Model : HS-SSET
 Serial Number : Parent
 DUT Mode : Standby
 Turntable Step Angle (°): 45
 Mast Positions (cm) : 120, 200, 340
 Antenna Polarization : Vertical
 Scan Type : Stepped Scan
 Test RBW : 1 MHz
 Prelim Dwell Time (s) : 0.0001
 Notes : Rx - Sweep
 Test Engineer : J. Cardenas
 Test Date : Jun 15, 2023 01:07:34 PM

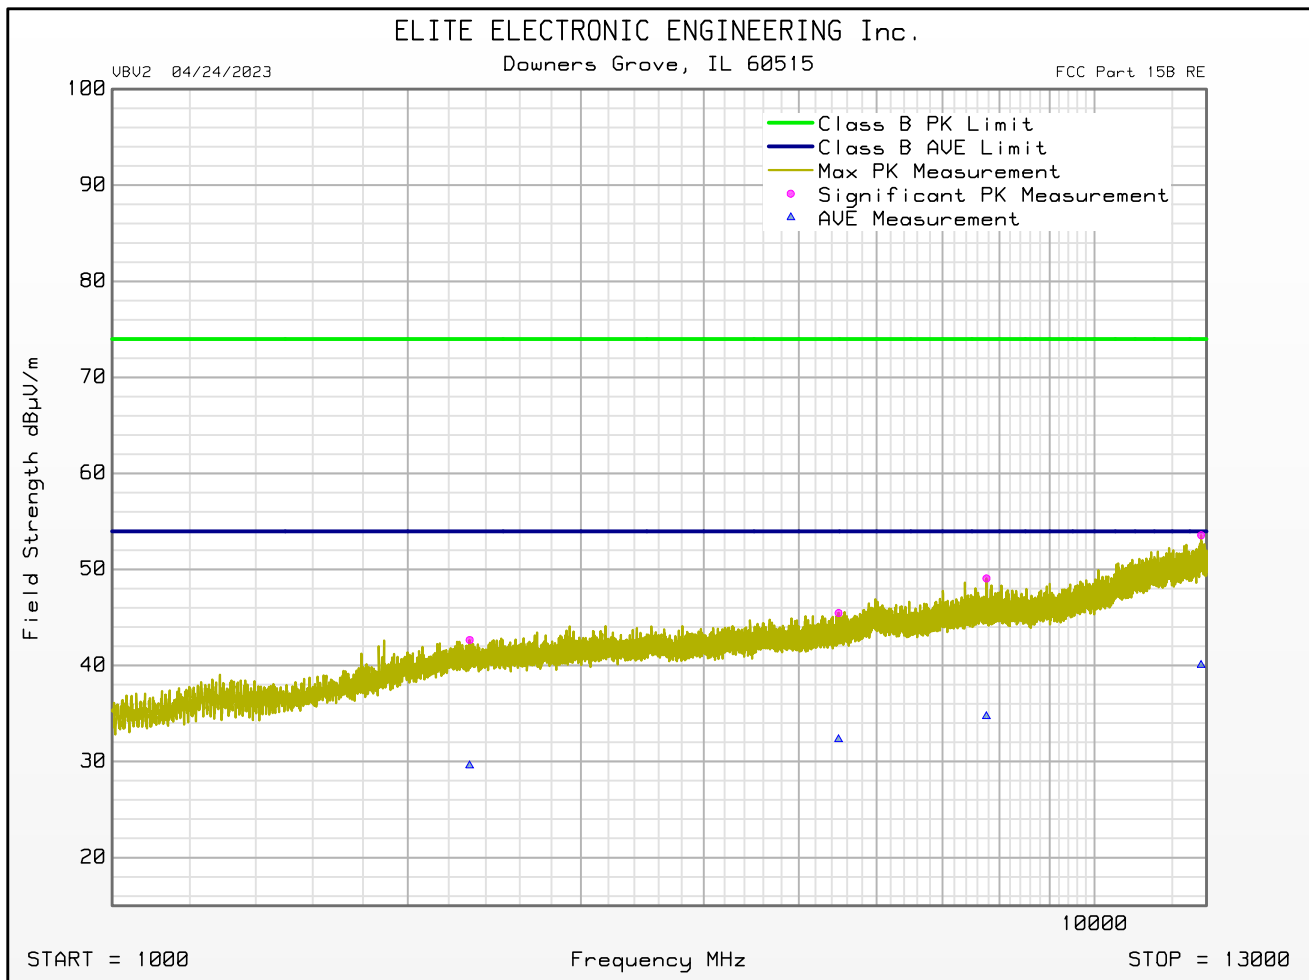

22. DTS Bandwidth – 6dB Bandwidth

EUT Information	
Manufacturer	Winegard Company
Product	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Radiated
Type of Test Site	Tabletop
Test Site Used	N/A
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1


Requirements
Systems using digital modulation techniques shall have a minimum 6dB bandwidth of 500kHz

Procedure
The EUT was allowed to transmit continuously. The transmit channel was set separately to low, middle, and high channels. The resolution bandwidth (RBW) was set to 100kHz, the video bandwidth (VBW) was set to the same as or 3 times greater than the RBW, and the span was set to 3 times the RBW. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was then screenshot and saved.




DTS Bandwidth

Manufacturer : Winegard Company
 Model Number : HS-SSET
 Serial Number : Parent
 Mode : Tx
 Line Tested : NA
 Parameters : Carrier Freq = 2402MHz, PWR Setting 4dBm
 DTS BW : **674.3kHz**
 Date : 6/12/2023 9:15:37 AM
 Notes : None

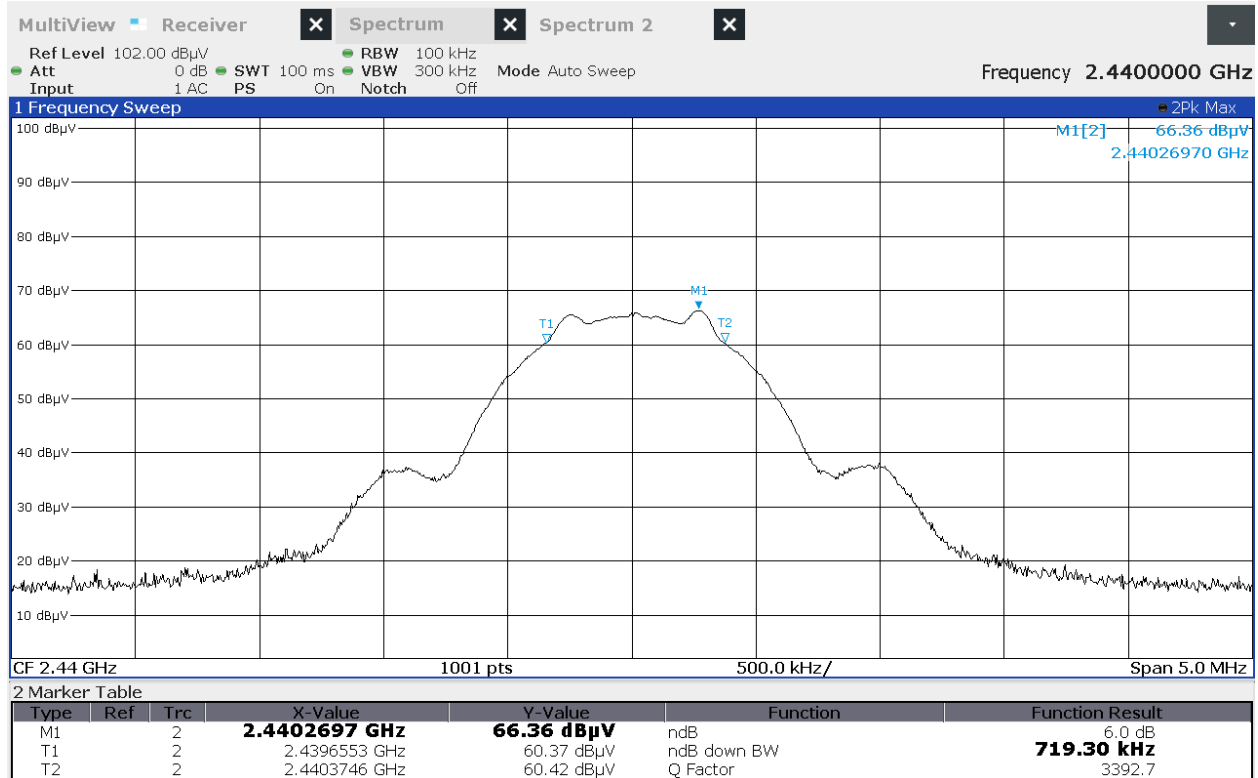

DTS Bandwidth

Manufacturer : Winegard Company
 Model Number : HS-SSET
 Serial Number : Parent
 Mode : Tx
 Line Tested : NA
 Parameters : Carrier Freq = 2402MHz, PWR Setting 4dBm
 DTS BW : **719.3kHz**
 Date : 6/12/2023 9:53:40 AM
 Notes : None

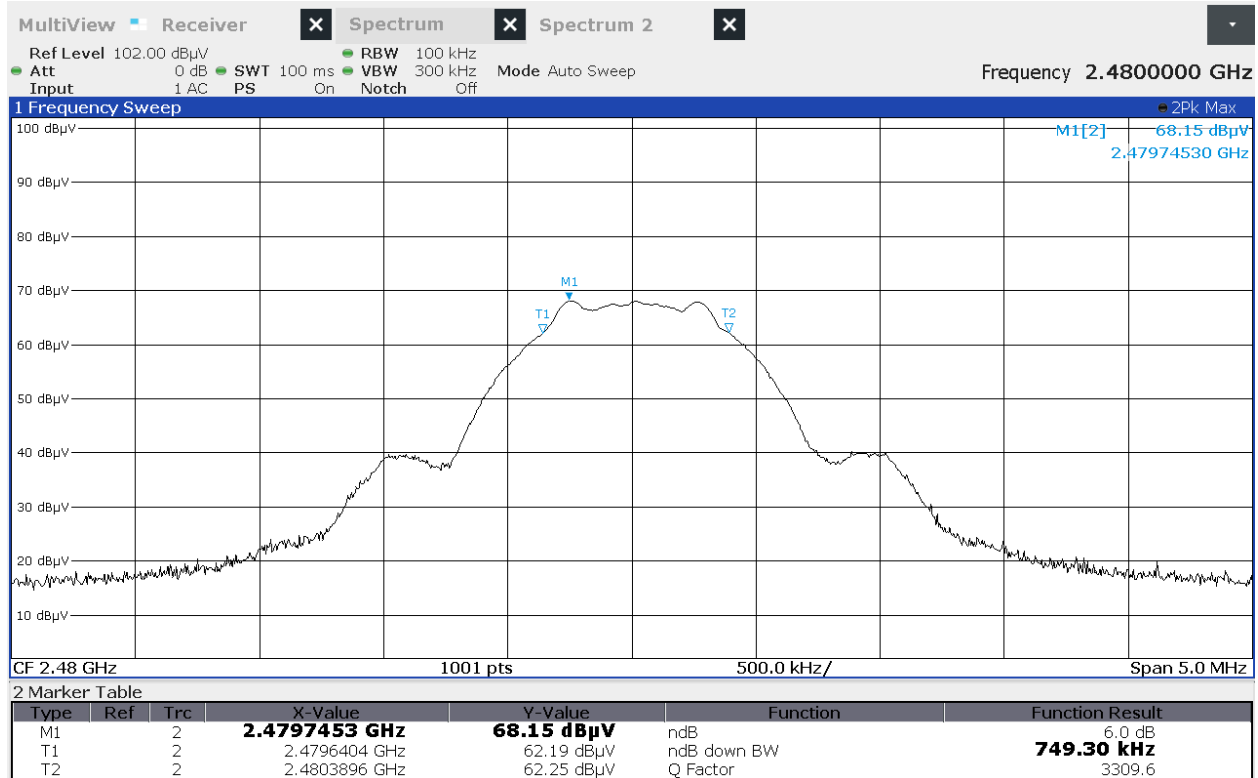

DTS Bandwidth

Manufacturer : Winegard Company
 Model Number : HS-SSET
 Serial Number : Parent
 Mode : Tx
 Line Tested : NA
 Parameters : Carrier Freq = 2402MHz, PWR Setting 4dBm
 DTS BW : **749.3kHz**
 Date : 6/12/2023 9:57:15 AM
 Notes : None


23. Occupied Bandwidth (99%)

EUT Information	
Manufacturer	Winegard Company
Product	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Radiated
Type of Test Site	Tabletop
Test Site Used	N/A
Notes	None


Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1

Procedure
The EUT was allowed to transmit continuously. The transmit channel was set separately to low, middle, and high channels. The resolution bandwidth (RBW) was set to 1% to 5% of the actual occupied / x dB bandwidth, the video bandwidth (VBW) was set to at least 3 times greater than the RBW, and the span was set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.

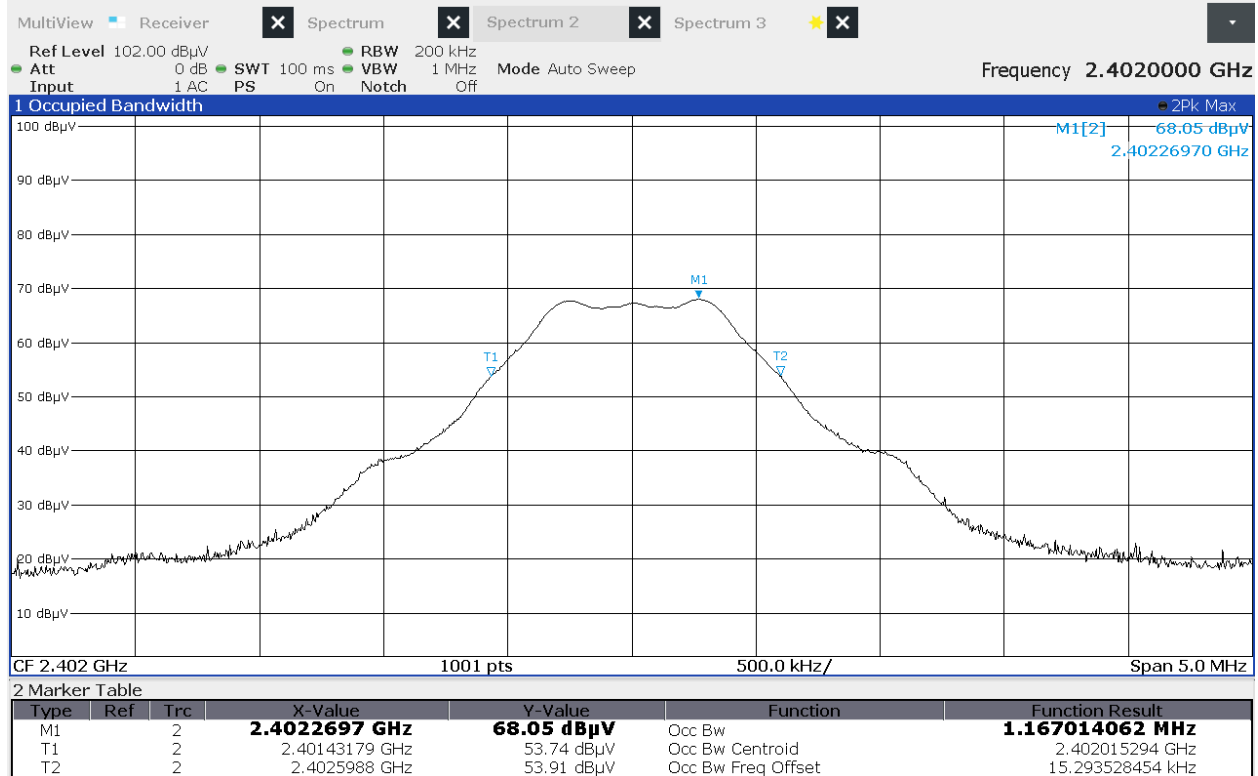


99% Occ Bandwidth

Manufacturer : Winegard Company
 Model Number : HS-SSET
 Serial Number : Parent
 Mode : Tx
 Line Tested : NA
 Parameters : Carrier Freq = 2402MHz, PWR Setting 4dBm
 99% BW : **1.167MHz**
 Date : 6/12/2023 9:16:08 AM
 Notes : None

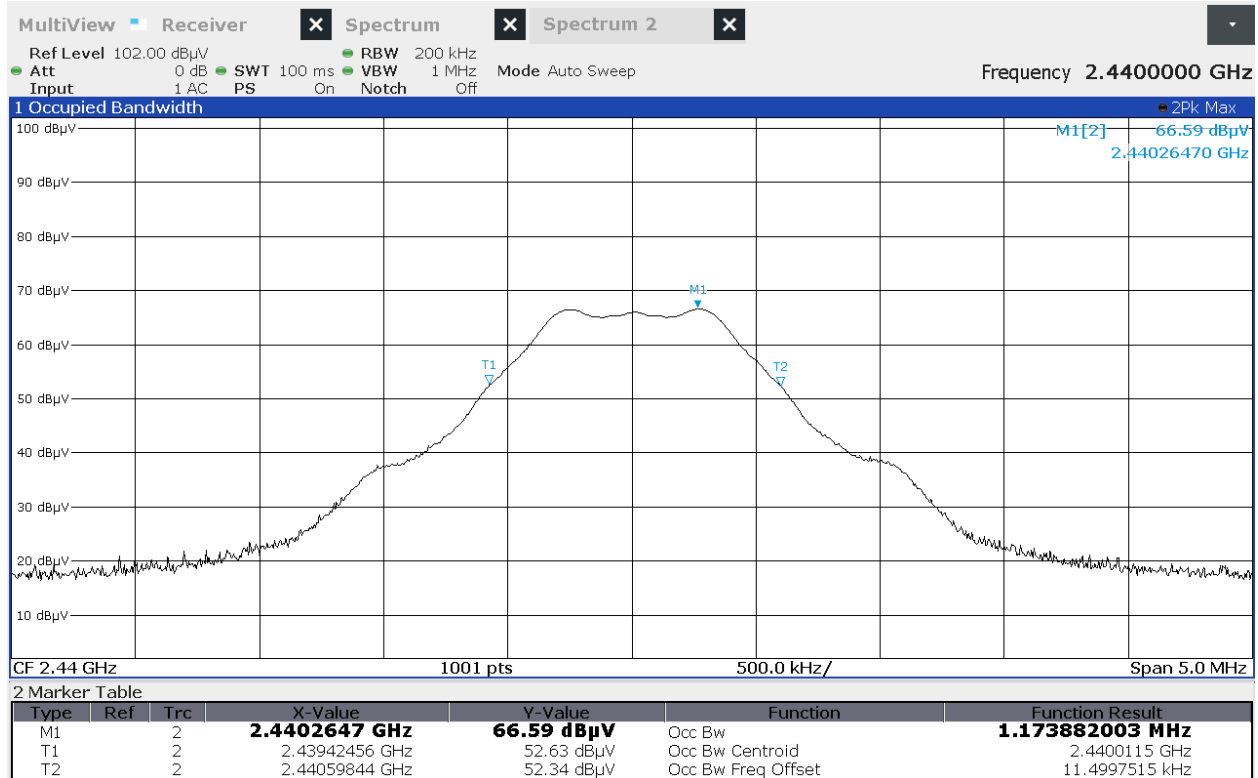

99% Occ Bandwidth

Manufacturer : Winegard Company
 Model Number : HS-SSET
 Serial Number : Parent
 Mode : Tx
 Line Tested : NA
 Parameters : Carrier Freq = 2402MHz, PWR Setting 4dBm
 99% BW : **1.173MHz**
 Date : 6/12/2023 9:54:13 AM
 Notes : None

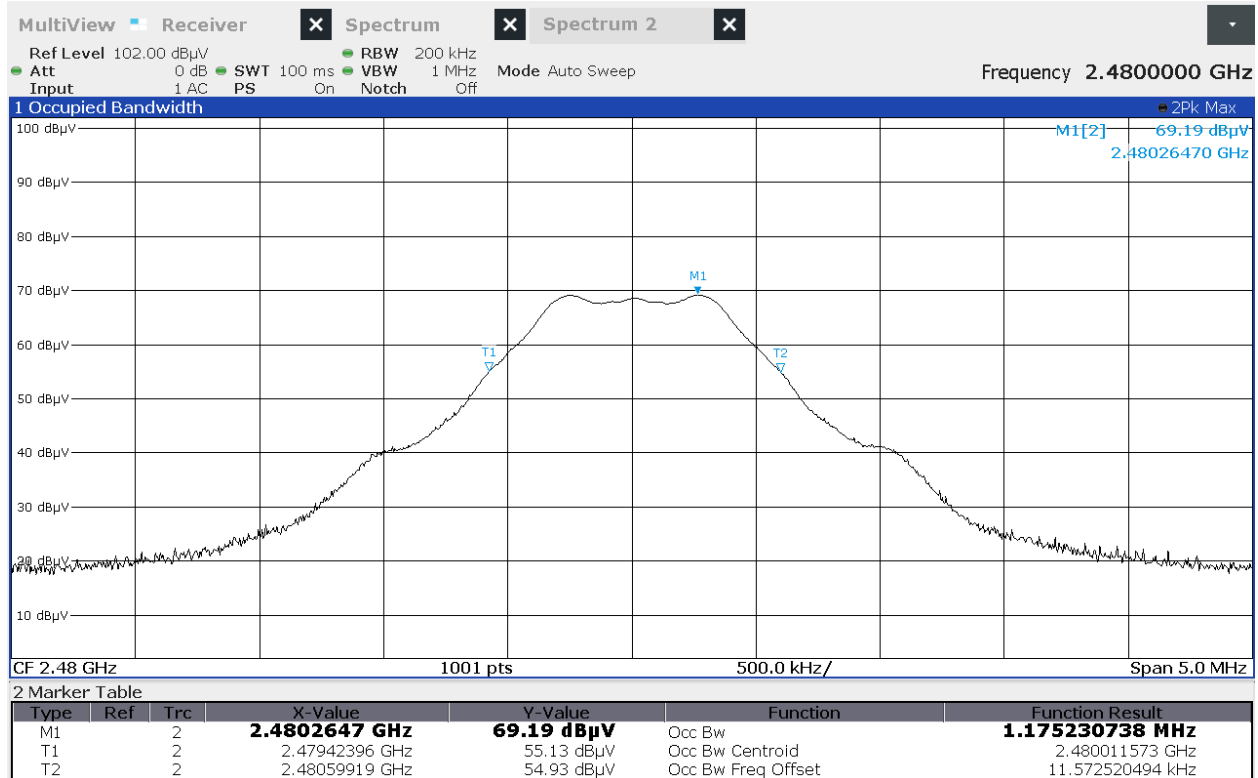

99% Occ Bandwidth

Manufacturer : Winegard Company
 Model Number : HS-SSET
 Serial Number : Parent
 Mode : Tx
 Line Tested : NA
 Parameters : Carrier Freq = 2402MHz, PWR Setting 4dBm
 99% BW : **1.175MHz**
 Date : 6/12/2023 9:56:33 AM
 Notes : None

24. Effective Isotropic Radiated Power (EIRP)

EUT Information	
Manufacturer	Winegard Company
Product	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Radiated
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	R29F
Type of Antennas Used	Double-ridged waveguide (or equivalent)
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1

Requirements
The output power shall not exceed 4W (36dBm).

Procedure
The EUT was placed on the non-conductive stand and set to transmit. A double ridged waveguide antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 6dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle, and high channels. The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a dipole antenna (double ridged waveguide antenna for all measurements above 1GHz) was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss (and antenna gain for all measurements above 1GHz), as required. The peak power output was calculated for low, middle, and high hopping frequencies.

Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Result	Max EIRP = 5.5mW (7.4dBm)
Notes	None

Freq (MHz)	Ant Pol	Wide BW Meter Reading (dBμV)	Matched Sig Gen Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2402.00	H	67.1	4.9	5.3	3.4	6.7	36.0	-29.3
	V	62.4	1.4	5.3	3.4	3.2	36.0	-32.8
2440.00	H	67.2	5.7	5.2	3.5	7.4	36.0	-28.6
	V	61.9	0.8	5.2	3.5	2.6	36.0	-33.4
2480.00	H	66.9	4.3	5.2	3.5	6.0	36.0	-30.0
	V	61.0	-0.8	5.2	3.5	0.9	36.0	-35.1

25. Case Spurious Radiated Emissions

EUT Information	
Manufacturer	Winegard Company
Product	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx

Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	R29F
Type of Antennas Used	Below 1GHz: Bilog (or equivalent) 1 – 18GHz: Double-Ridged Waveguide (or equivalent) Above 18GHz: Horn (or equivalent)
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Procedure

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3-meter distance from the EUT. The entire frequency range from 30MHz to 25GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 25GHz.

1) For all harmonics not in the restricted bands, the following procedure was used:


- a) The field strength of the fundamental was measured using a double ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5-meter-high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5-meter-high non-conductive stand. A peak detector with a resolution bandwidth of 100kHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst-case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead, the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
- d) All harmonics not in the restricted bands must be at least 20dB below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.

2) For all emissions in the restricted bands, the following procedure was used:


- a) The field strengths of all emissions below 1GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- b) The field strengths of all emissions above 1GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5-meter-high non-conductive stand. A peak detector with a resolution bandwidth of 1MHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst-case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components

were measured.


- iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
- iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead, the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
- d) For all radiated emissions measurements below 1GHz, if the peak reading is below the limits listed in §15.209(a), no further measurements are required. If, however, the peak readings exceed the limits listed in §15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1GHz, the peak readings must comply with the §15.35(b) limits. §15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1GHz must be no greater than 20dB above the limits specified in §15.209(a).
- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken.

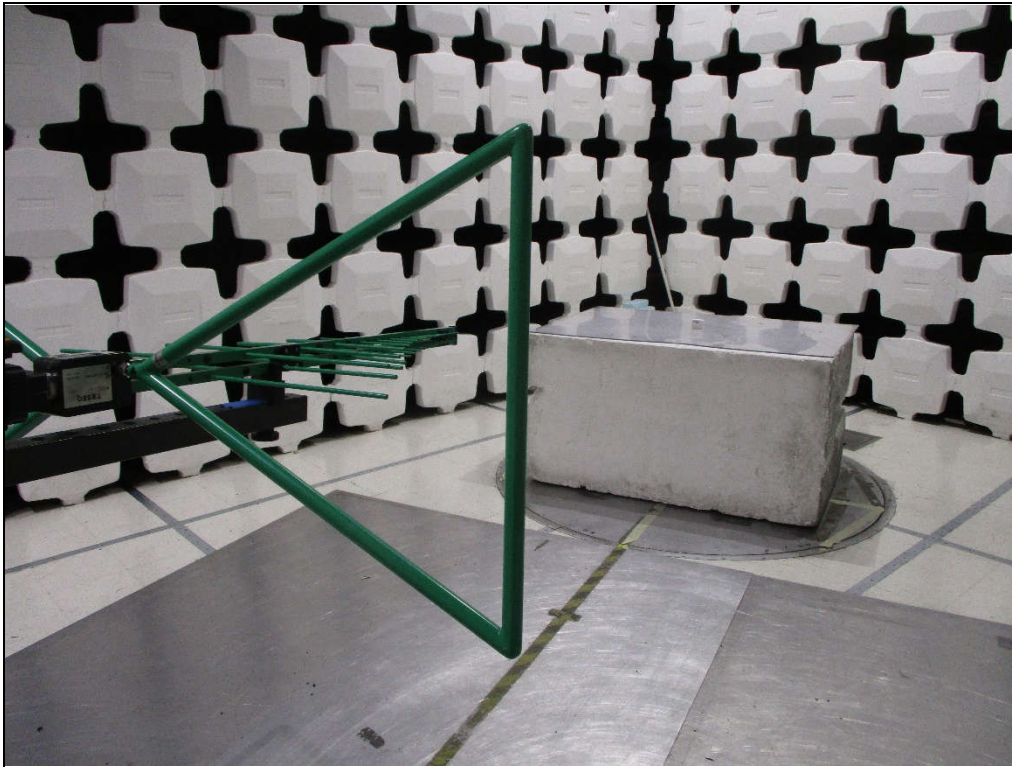


Test Setup for Spurious Radiated Emissions, 30MHz – 1GHz – Antenna
Polarization Horizontal

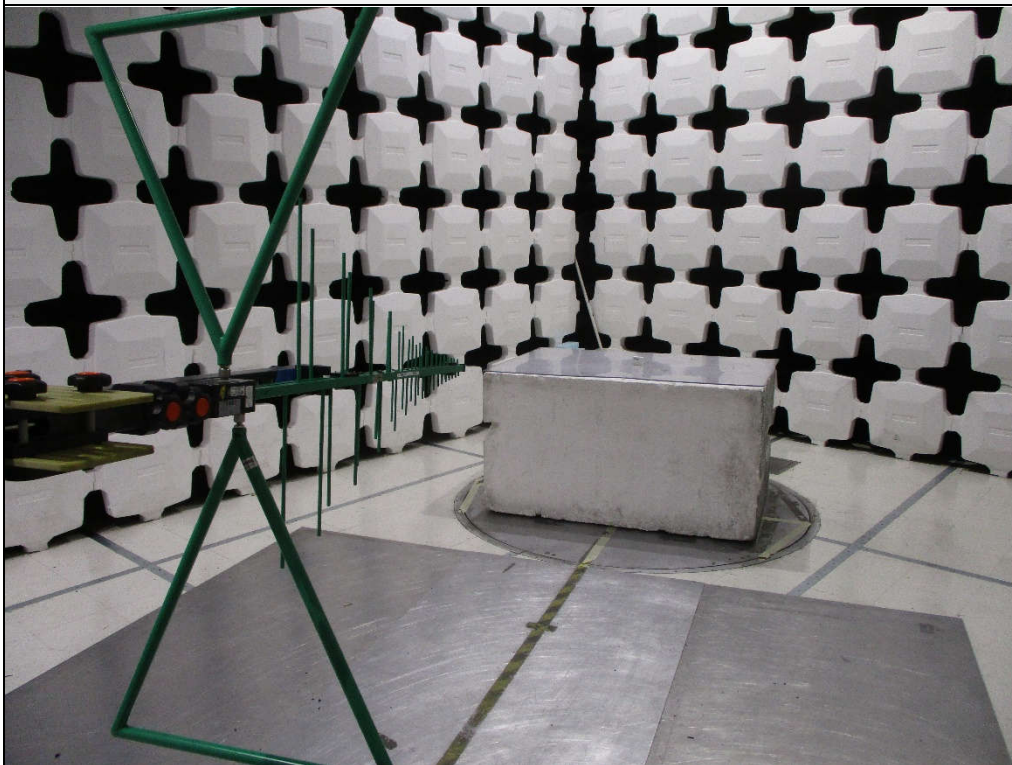


Test Setup for Spurious Radiated Emissions, 30MHz – 1GHz – Antenna
Polarization Vertical

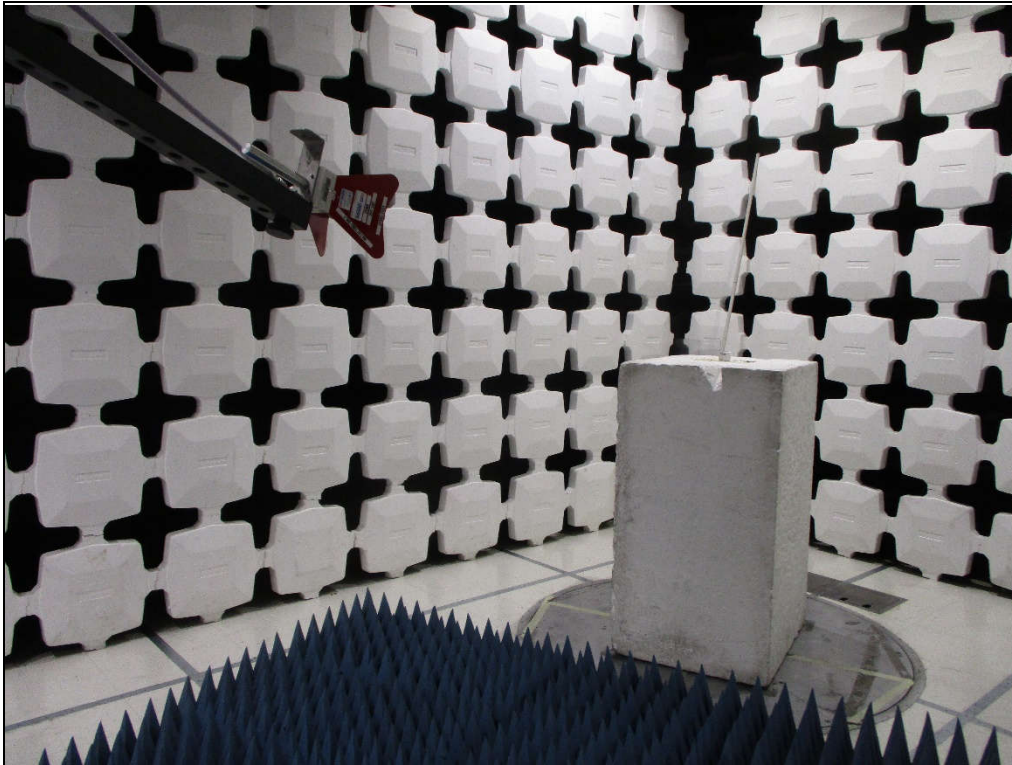


Test Setup for Spurious Radiated Emissions, 1 – 18GHz – Antenna Polarization
Horizontal

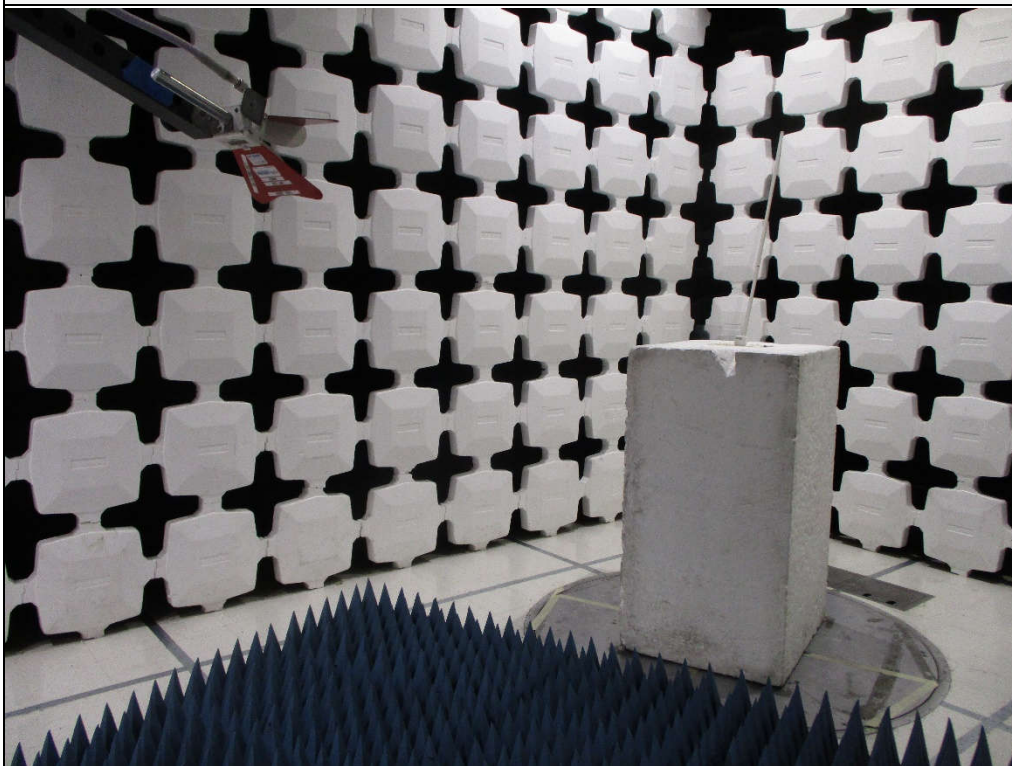

Test Setup for Spurious Radiated Emissions, 1 – 18GHz – Antenna Polarization
Vertical

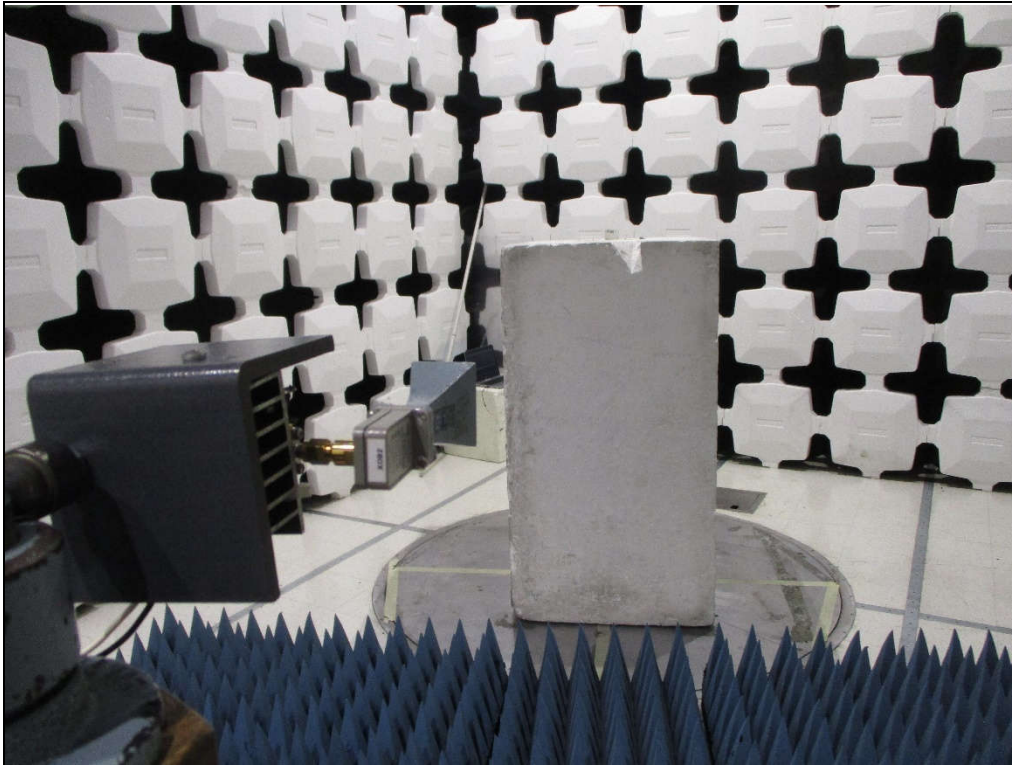

Test Setup for Spurious Radiated Emissions, Above 18GHz – Antenna Polarization Horizontal

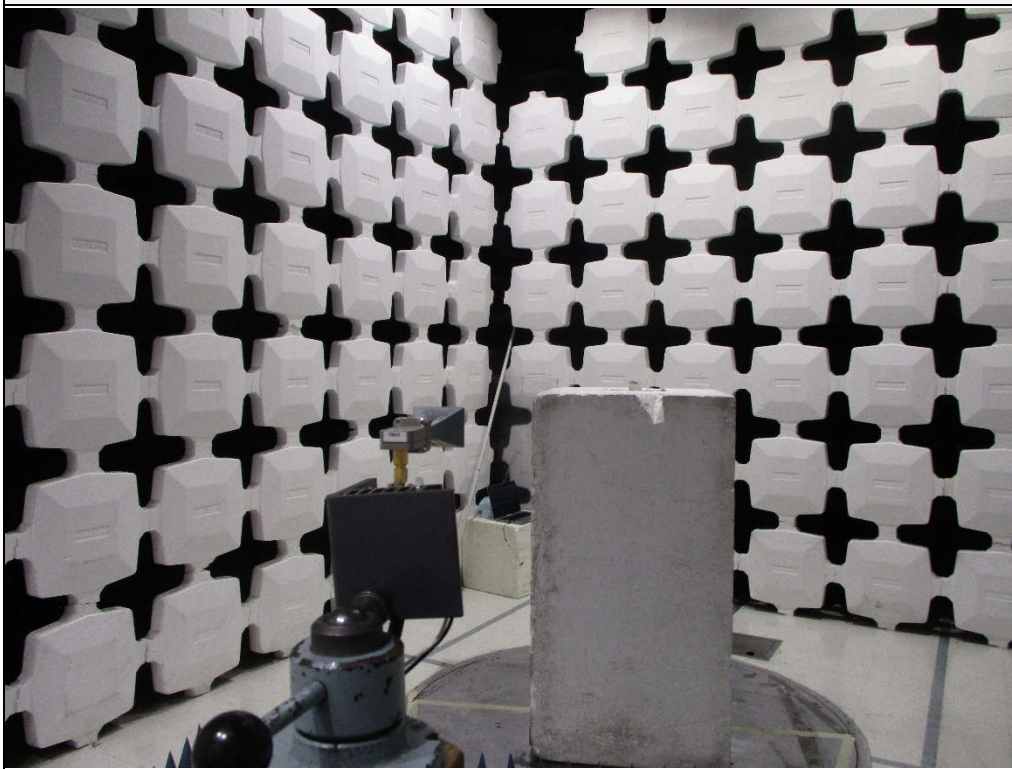

Test Setup for Spurious Radiated Emissions, Above 18GHz – Antenna Polarization Vertical

Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2402MHz
Notes	Peak Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
4804.00	H	48.6	*	3.7	34.3	-39.7	46.9	221.6	5000.0	-27.1
	V	49.3	*	3.7	34.3	-39.7	47.5	238.0	5000.0	-26.4
12010.00	H	48.4	*	6.1	38.8	-39.0	54.3	518.0	5000.0	-19.7
	V	48.8	*	6.1	38.8	-39.0	54.7	543.6	5000.0	-19.3
19216.00	H	32.0	*	2.2	40.4	-28.2	46.4	208.3	5000.0	-27.6
	V	32.1	*	2.2	40.4	-28.2	46.5	210.5	5000.0	-27.5

Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2402MHz
Notes	Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBμV/m)	Average Total at 3m (μV/m)	Average Limit at 3m (μV/m)	Margin (dB)
4804.00	H	33.28	*	3.7	34.3	-39.7	0.0	31.6	37.8	500.0	-22.4
	V	33.79	*	3.7	34.3	-39.7	0.0	32.1	40.1	500.0	-21.9
12010.00	H	33.69	*	6.1	38.8	-39.0	0.0	39.6	95.5	500.0	-14.4
	V	33.72	*	6.1	38.8	-39.0	0.0	39.6	95.8	500.0	-14.4
19216.00	H	16.14	*	2.2	40.4	-28.2	0.0	30.5	33.5	500.0	-23.5
	V	15.98	*	2.2	40.4	-28.2	0.0	30.3	32.9	500.0	-23.6

Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2402MHz
Notes	Peak Measurements in Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2402.00	H	66.01		2.6	32.6	0.0	101.2	114763.5	NA	NA
	V	60.62		2.6	32.6	0.0	95.8	61702.6	NA	NA
7206.00	H	38.46		4.6	36.3	-39.7	39.7	96.9	11476.3	-41.5
	V	39.30		4.6	36.3	-39.7	40.6	106.8	11476.3	-40.6
9608.00	H	39.09		5.2	37.1	-39.3	42.1	127.3	11476.3	-39.1
	V	37.62		5.2	37.1	-39.3	40.6	107.5	11476.3	-40.6
14412.00	H	37.85	*	6.6	39.4	-38.6	45.3	184.3	11476.3	-35.9
	V	38.03	*	6.6	39.4	-38.6	45.5	188.1	11476.3	-35.7
16814.00	H	36.81	*	7.2	42.2	-37.4	48.8	276.4	11476.3	-32.4
	V	37.17	*	7.2	42.2	-37.4	49.2	288.1	11476.3	-32.0
21618.00	H	20.97	*	2.2	40.6	-28.5	35.3	58.1	11476.3	-45.9
	V	21.13	*	2.2	40.6	-28.5	35.4	59.2	11476.3	-45.8
24020.00	H	21.74	*	2.2	40.6	-29.3	35.3	58.4	11476.3	-45.9
	V	21.95	*	2.2	40.6	-29.3	35.5	59.9	11476.3	-45.7

Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2440MHz
Notes	Peak Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
4880.00	H	48.1	*	3.7	34.2	-39.6	46.4	208.7	5000.0	-27.6
	V	49.0	*	3.7	34.2	-39.6	47.3	230.7	5000.0	-26.7
7320.00	H	48.4	*	4.7	36.3	-39.6	49.7	307.0	5000.0	-24.2
	V	48.4	*	4.7	36.3	-39.6	49.7	304.9	5000.0	-24.3
12200.00	H	47.9	*	6.1	38.9	-38.9	54.0	499.3	5000.0	-20.0
	V	48.2	*	6.1	38.9	-38.9	54.2	515.6	5000.0	-19.7
19520.00	H	32.4	*	2.2	40.4	-27.8	47.3	231.2	5000.0	-26.7
	V	31.4	*	2.2	40.4	-27.8	46.2	205.2	5000.0	-27.7

Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2440MHz
Notes	Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBμV/m)	Average Total at 3m (μV/m)	Average Limit at 3m (μV/m)	Margin (dB)
4880.00	H	33.97	*	3.7	34.2	-39.6	0.0	32.3	41.0	500.0	-21.7
	V	33.63	*	3.7	34.2	-39.6	0.0	31.9	39.4	500.0	-22.1
7320.00	H	33.26	*	4.7	36.3	-39.6	0.0	34.6	53.7	500.0	-19.4
	V	32.96	*	4.7	36.3	-39.6	0.0	34.3	51.8	500.0	-19.7
12200.00	H	33.17	*	6.1	38.9	-38.9	0.0	39.2	91.4	500.0	-14.8
	V	33.25	*	6.1	38.9	-38.9	0.0	39.3	92.2	500.0	-14.7
19520.00	H	15.41	*	2.2	40.4	-27.8	0.0	30.3	32.6	500.0	-23.7
	V	15.18	*	2.2	40.4	-27.8	0.0	30.0	31.7	500.0	-23.9

Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2440MHz
Notes	Peak Measurements in Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2440.00	H	66.74		2.6	32.6	0.0	102.0	125965.2	NA	NA
	V	60.85		2.6	32.6	0.0	96.1	63936.8	NA	NA
9760.00	H	38.62		5.2	37.2	-39.3	41.8	123.1	12596.5	-40.2
	V	37.29		5.2	37.2	-39.3	40.5	105.6	12596.5	-41.5
14640.00	H	37.60	*	6.7	39.5	-38.6	45.2	181.8	12596.5	-36.8
	V	37.44	*	6.7	39.5	-38.6	45.0	178.4	12596.5	-37.0
17080.00	H	37.16	*	7.3	42.4	-37.4	49.5	297.6	12596.5	-32.5
	V	36.96	*	7.3	42.4	-37.4	49.3	290.8	12596.5	-32.7
21960.00	H	22.09	*	2.2	40.6	-28.9	36.0	63.1	12596.5	-46.0
	V	22.40	*	2.2	40.6	-28.9	36.3	65.3	12596.5	-45.7
24400.00	H	22.13	*	2.2	40.6	-29.3	35.7	60.9	12596.5	-46.3
	V	21.94	*	2.2	40.6	-29.3	35.5	59.6	12596.5	-46.5

Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2480MHz
Notes	Peak Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
4960.00	H	48.8		3.7	34.1	-39.6	47.1	225.3	5000.0	-26.9
	V	48.1		3.7	34.1	-39.6	46.3	206.7	5000.0	-27.7
7440.00	H	47..37	*	4.7	36.3	-39.6	1.5	1.2	5000.0	-72.5
	V	47.5	*	4.7	36.3	-39.6	49.0	282.4	5000.0	-25.0
12400.00	H	47.4	*	6.1	38.9	-38.8	53.6	478.9	5000.0	-20.4
	V	47.2	*	6.1	38.9	-38.8	53.4	466.4	5000.0	-20.6
19840.00	H	32.1	*	2.2	40.4	-28.0	46.7	217.2	5000.0	-27.2
	V	32.2	*	2.2	40.4	-28.0	46.8	219.7	5000.0	-27.1
22320.00	H	32.4	*	2.2	40.6	-28.8	46.4	208.5	5000.0	-27.6
	V	32.1	*	2.2	40.6	-28.8	46.1	201.5	5000.0	-27.9
2483.50	H	25.5	*	2.7	32.7	0.0	60.8	1101.2	5000.0	-13.1
	V	25.0	*	2.7	32.7	0.0	60.3	1040.8	5000.0	-13.6

Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2480MHz
Notes	Average Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBμV/m)	Average Total at 3m (μV/m)	Average Limit at 3m (μV/m)	Margin (dB)
4960.00	H	35.57		3.7	34.1	-39.6	0.0	33.8	49.0	500.0	-20.2
	V	34.86		3.7	34.1	-39.6	0.0	33.1	45.1	500.0	-20.9
7440.00	H	33.14	*	4.7	36.3	-39.6	0.0	34.6	53.9	500.0	-19.4
	V	32.79	*	4.7	36.3	-39.6	0.0	34.3	51.7	500.0	-19.7
12400.00	H	32.46	*	6.1	38.9	-38.8	0.0	38.7	85.7	500.0	-15.3
	V	32.34	*	6.1	38.9	-38.8	0.0	38.5	84.6	500.0	-15.4
19840.00	H	14.56	*	2.2	40.4	-28.0	0.0	29.2	28.7	500.0	-24.8
	V	15.12	*	2.2	40.4	-28.0	0.0	29.7	30.6	500.0	-24.3
22320.00	H	15.20	*	2.2	40.6	-28.8	0.0	29.2	28.8	500.0	-24.8
	V	15.31	*	2.2	40.6	-28.8	0.0	29.3	29.1	500.0	-24.7
2483.50	H	8.14	*	2.7	32.7	0.0	0.0	43.5	149.9	500.0	-10.5
	V	7.66	*	2.7	32.7	0.0	0.0	43.0	141.9	500.0	-10.9

Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2480MHz
Notes	Peak Measurements in Non-Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2480.00	H	65.49		2.7	32.7	0.0	100.9	110383.3	NA	NA
	V	59.95		2.7	32.7	0.0	95.3	58331.6	NA	NA
9920.00	H	39.05	*	5.3	37.2	-39.2	42.3	130.0	11038.3	-38.6
	V	37.53	*	5.3	37.2	-39.2	40.8	109.1	11038.3	-40.1
14880.00	H	37.17	*	6.8	39.9	-38.5	45.3	184.0	11038.3	-35.6
	V	37.43	*	6.8	39.9	-38.5	45.6	189.6	11038.3	-35.3
17360.00	H	37.21	*	7.4	42.5	-37.4	49.6	303.7	11038.3	-31.2
	V	37.47	*	7.4	42.5	-37.4	49.9	312.9	11038.3	-31.0
24800.00	H	22.16	*	2.2	40.6	-29.3	35.7	60.9	11038.3	-45.2
	V	22.11	*	2.2	40.6	-29.3	35.6	60.5	11038.3	-45.2

26. Band-Edge Compliance

EUT Information	
Manufacturer	Winegard Company
Product	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx

Test Setup Details	
Setup Format	Tabletop Floor Standing
Height of Support	N/A
Measurement Method	Radiated Antenna Conducted
Type of Test Site	Semi-Anechoic Chamber Elite Test Bench
Type of Antennas Used	Above 1GHz: Double-Ridged Waveguide (or equivalent)
Notes	None


Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1

Procedure
1) Low Band Edge: - The EUT was set to transmit continuously at the channel closest to the low band-edge. - The EUT was maximized for worst case emissions at the measuring antenna and the maximum meter reading was recorded. - To determine the band edge compliance, the following spectrum analyzer settings were used: - Center Frequency = 2400MHz (low band-edge frequency). - Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation. - Resolution Bandwidth (RBW) = $\geq 1\%$ of the span. 'Max-Hold' function was engaged. - The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. - The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.) - The analyzer's display was then screenshot and saved.

2) High Band Edge:

- a) The EUT was setup inside the test chamber on a non-conductive stand and set to transmit continuously at the channel closest to the high band-edge.
- b) A broadband measuring antenna was placed at a test distance of 3 meters from the EUT. The antenna was connected to the input of a spectrum analyzer.
- c) The center frequency of the analyzer was set to the high band edge (2483.5MHz).
- d) The Resolution Bandwidth was set to 1MHz.
- e) To ensure that the maximum or worst-case emission level was measured, the following steps were taken:
 - o The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - o Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - o The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - o The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
 - o The highest measured peak reading and the highest measured average reading were recorded.


Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2402MHz
Notes	Low Band Edge

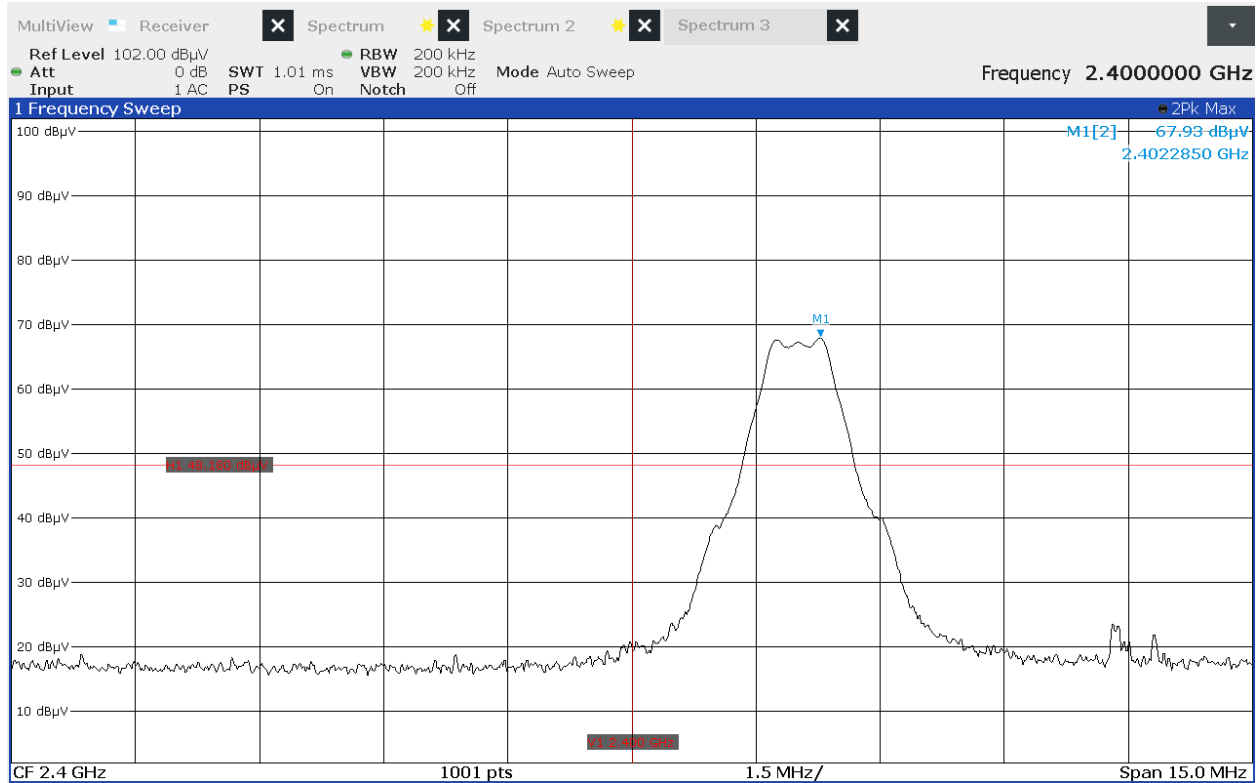


Test Details	
Manufacturer	Winegard Company
EUT	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx
Frequency Tested	2480MHz
Notes	High Band Edge – Peak and Average Measurements

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dBμV/m)	Peak Total at 3m (μV/m)	Peak Limit at 3m (μV/m)	Margin (dBm)
2483.50	H	25.5	*	2.7	32.7	0.0	60.8	1101.2	5000.0	-13.1
	V	25.0	*	2.7	32.7	0.0	60.3	1040.8	5000.0	-13.6

Freq (MHz)	Ant Pol	Meter Reading (dBμV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dBμV/m)	Average Total at 3m (μV/m)	Average Limit at 3m (μV/m)	Margin (dB)
2483.50	H	8.14	*	2.7	32.7	0.0	0.0	43.5	149.9	500.0	-10.5
	V	7.66	*	2.7	32.7	0.0	0.0	43.0	141.9	500.0	-10.9

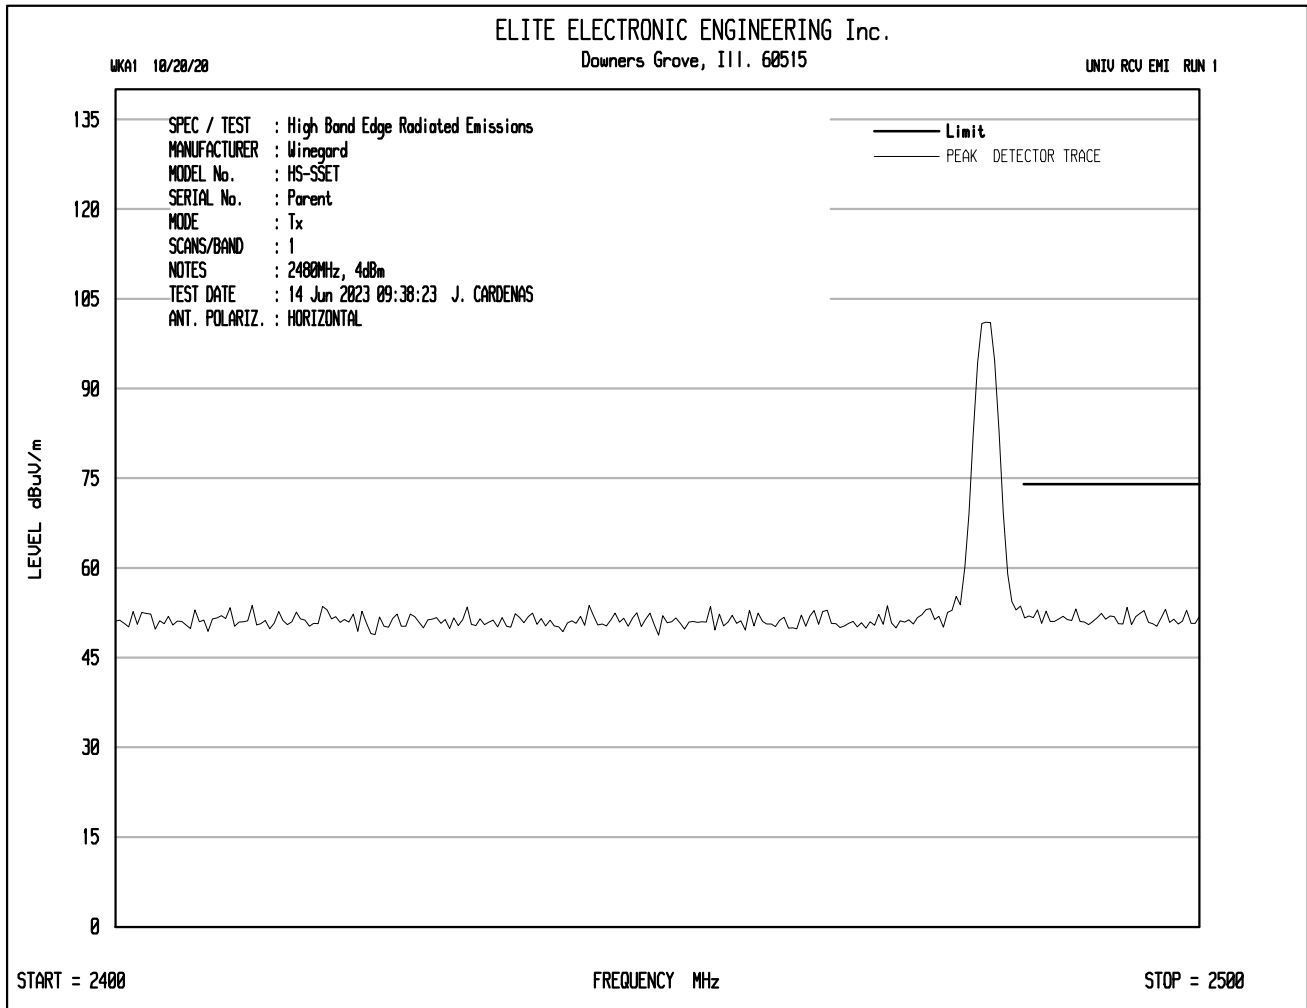

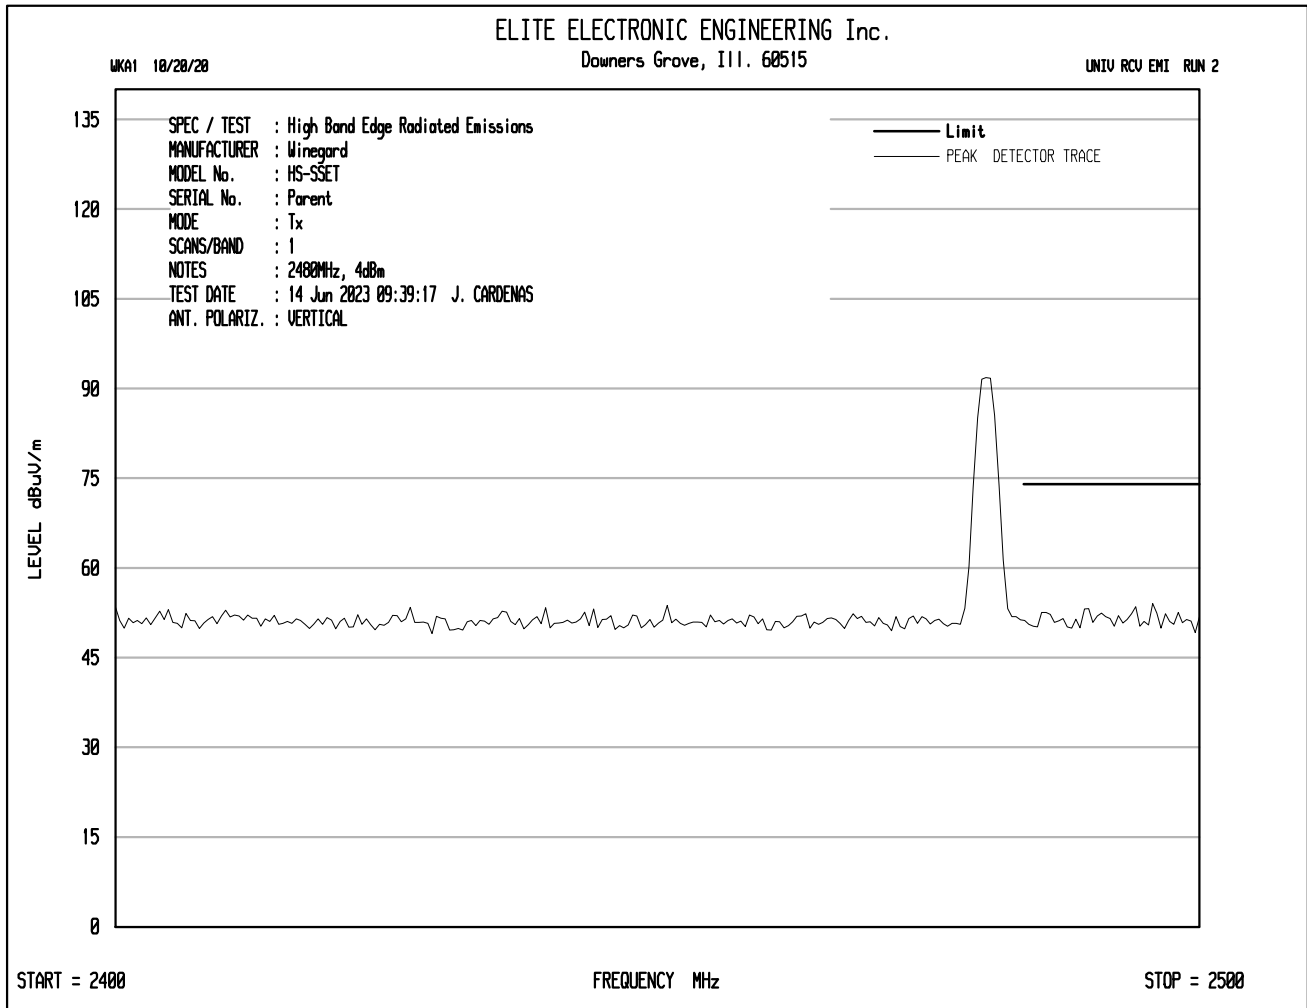

27. Power Spectral Density

EUT Information	
Manufacturer	Winegard Company
Product	BLE sensor
Model No.	HS-SSET
Serial No.	Parent
Mode	Tx


Test Setup Details	
Setup Format	Tabletop
Height of Support	N/A
Measurement Method	Radiated
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	R29F
Type of Antennas Used	Above 1GHz: Double-Ridged Waveguide (or equivalent)
Notes	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1

Requirement
The power spectral density from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Procedure
1) The EUT was setup inside the test chamber on a non-conductive stand and set to transmit. 2) A broadband measuring antenna was placed 3m from the EUT. 3) The EUT was rotated, and the antenna was moved up and down from 1 to 4m to maximize the field strength. 4) To determine the power spectral density, the following spectrum analyzer settings were used for Channel 1: a) Center Frequency = Transmit Frequency b) Span = 1.5 × the DTS (6dB) bandwidth c) Resolution Bandwidth (RBW) = > DTS (6dB) bandwidth d) Sweep time = Auto e) Detector = Peak f) Trace Function = Max-Hold 5) The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. (This reading corresponds to the peak output power measured for the mid channel.) 6) A display line was then placed on the corresponding +8dBm level. 7) The analyzers display was then screenshot and saved.


- 8) The analyzers display was then screenshot and saved.
- 9) The equivalent power of the highest measured emission was then determined using the substitution method.

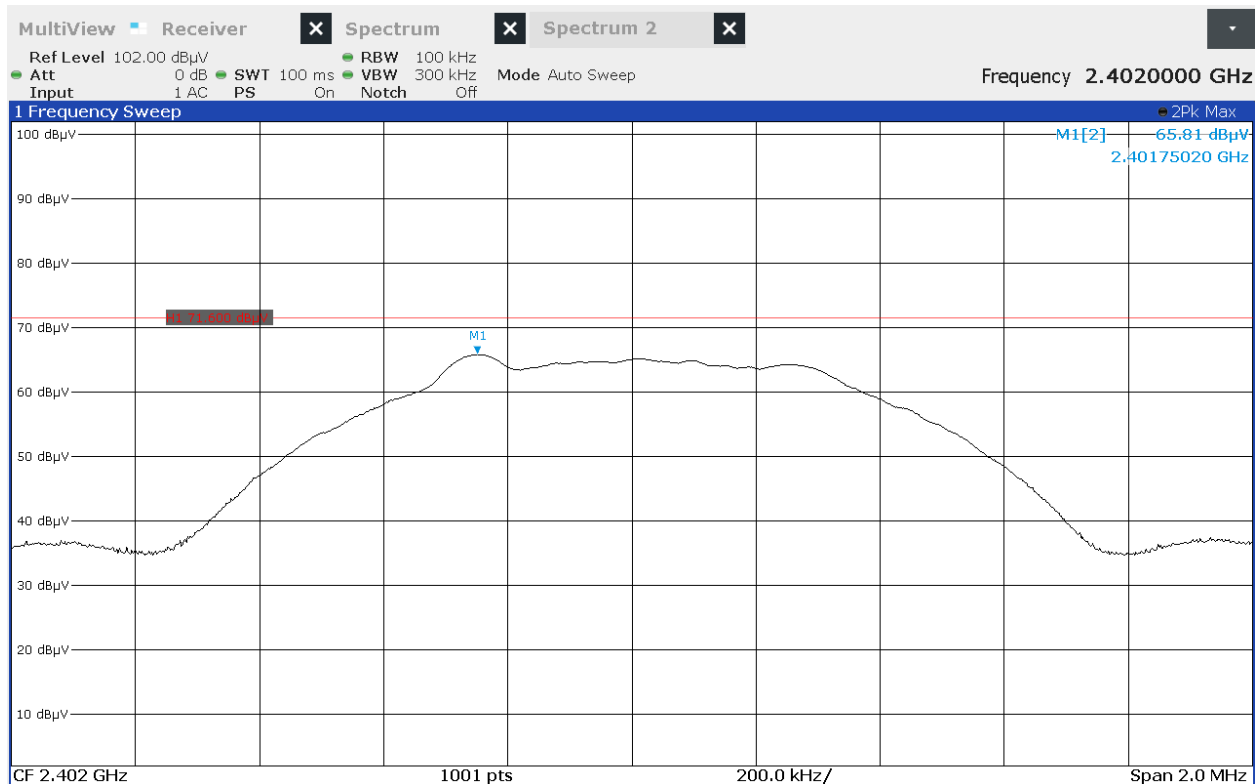

Peak Power Spectral Density

Manufacturer : Winegard Company
 Model Number : HS-SSET
 Serial Number : Parent
 Mode : Tx
 Line Tested : Horizontal Antenna Polarization
 Parameters : Power Spectral Density Plot
 Date : 6/14/2023 6:55:47 AM
 Notes : Limit line on the plot was placed at a level equivalent to 8dBm


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	Peak Power (dBm)	Limit dBm	Margin dB
2401.75	H	65.8	0.5	5.3	3.4	2.4	8.0	-5.6

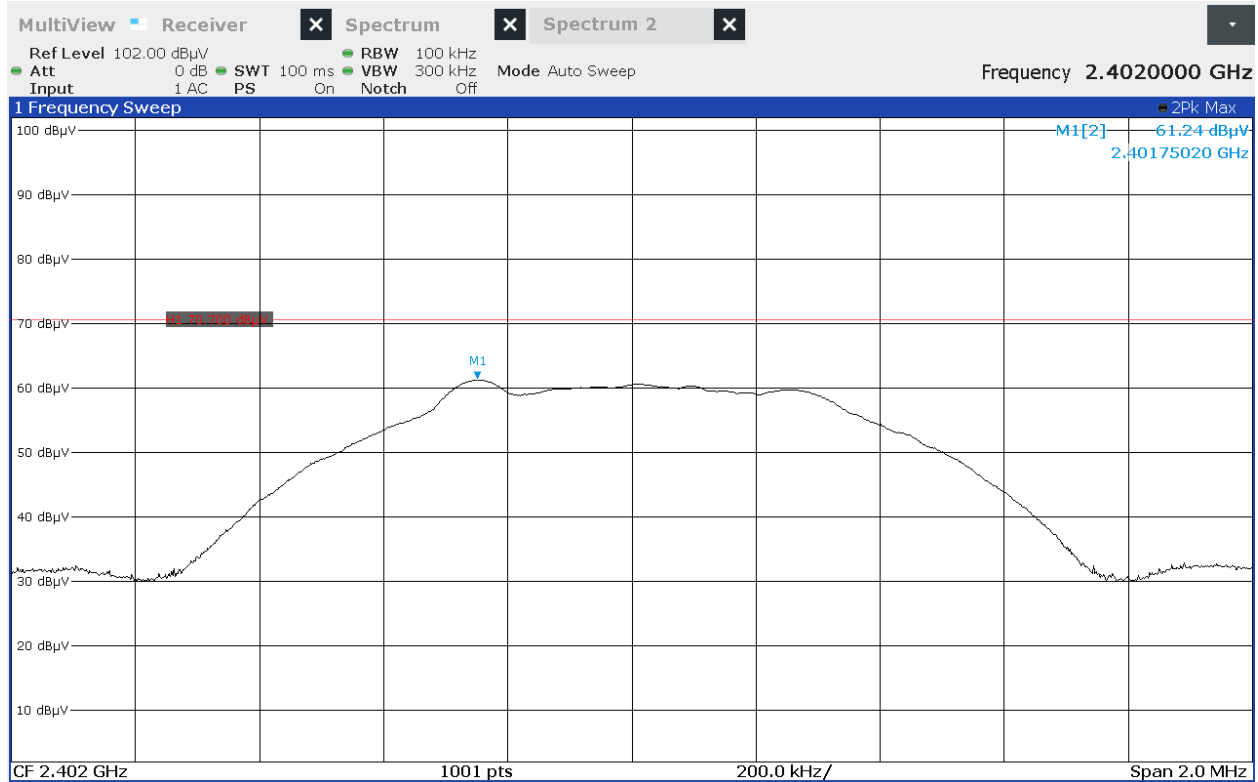

Peak Power Spectral Density

Manufacturer : Winegard Company
Model Number : HS-SSET
Serial Number : Parent
Mode : Tx
Line Tested : Vertical Antenna Polarization
Parameters : Power Spectral Density Plot
Date : 6/14/2023 6:59:22 AM
Notes : Limit line on the plot was placed at a level equivalent to 8dBm


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	Peak Power (dBm)	Limit dBm	Margin dB
2401.75	V	61.2	-3.2	5.3	3.4	-1.3	8.0	-9.3

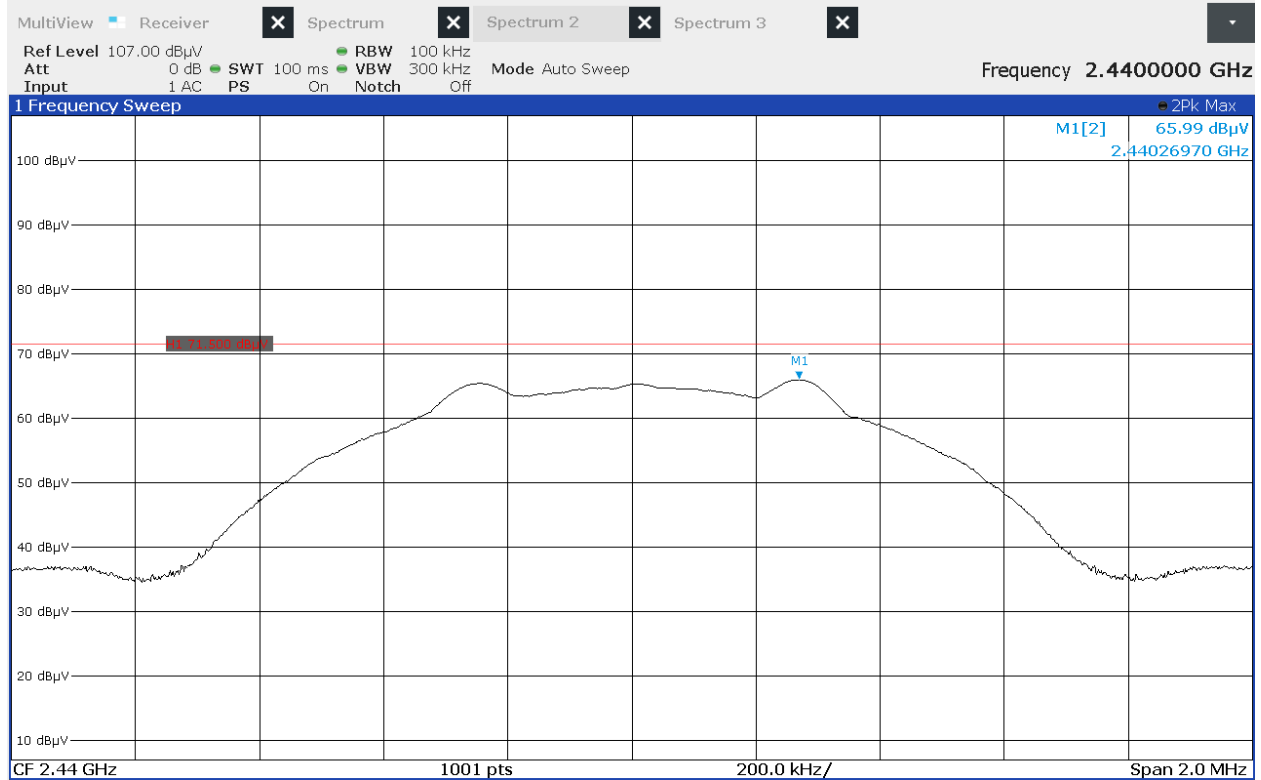

Peak Power Spectral Density

Manufacturer : Winegard Company
Model Number : HS-SSET
Serial Number : Parent
Mode : Tx
Line Tested : Horizontal Antenna Polarization
Parameters : Power Spectral Density Plot
Date : 6/14/2023 7:14:38 AM
Notes : Limit line on the plot was placed at a level equivalent to 8dBm


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	Peak Power (dBm)	Limit dBm	Margin dB
2440.26	H	66.0	0.7	5.5	3.4	2.7	8.0	-5.3

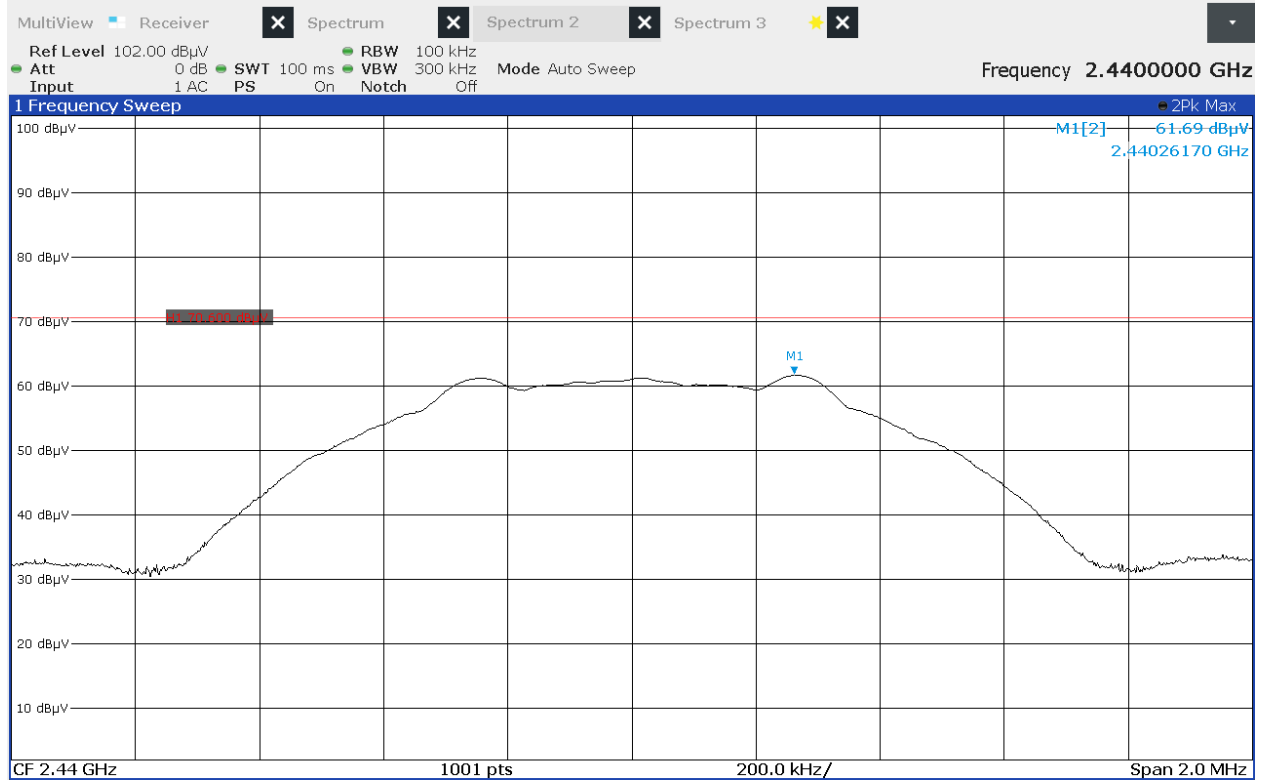

Peak Power Spectral Density

Manufacturer : Winegard Company
Model Number : HS-SSET
Serial Number : Parent
Mode : Tx
Line Tested : Vertical Antenna Polarization
Parameters : Power Spectral Density Plot
Date : 6/14/2023 7:54:49 AM
Notes : Limit line on the plot was placed at a level equivalent to 8dBm


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	Peak Power (dBm)	Limit dBm	Margin dB
2440.27	V	61.7	-2.7	5.5	3.4	-0.7	8.0	-8.7

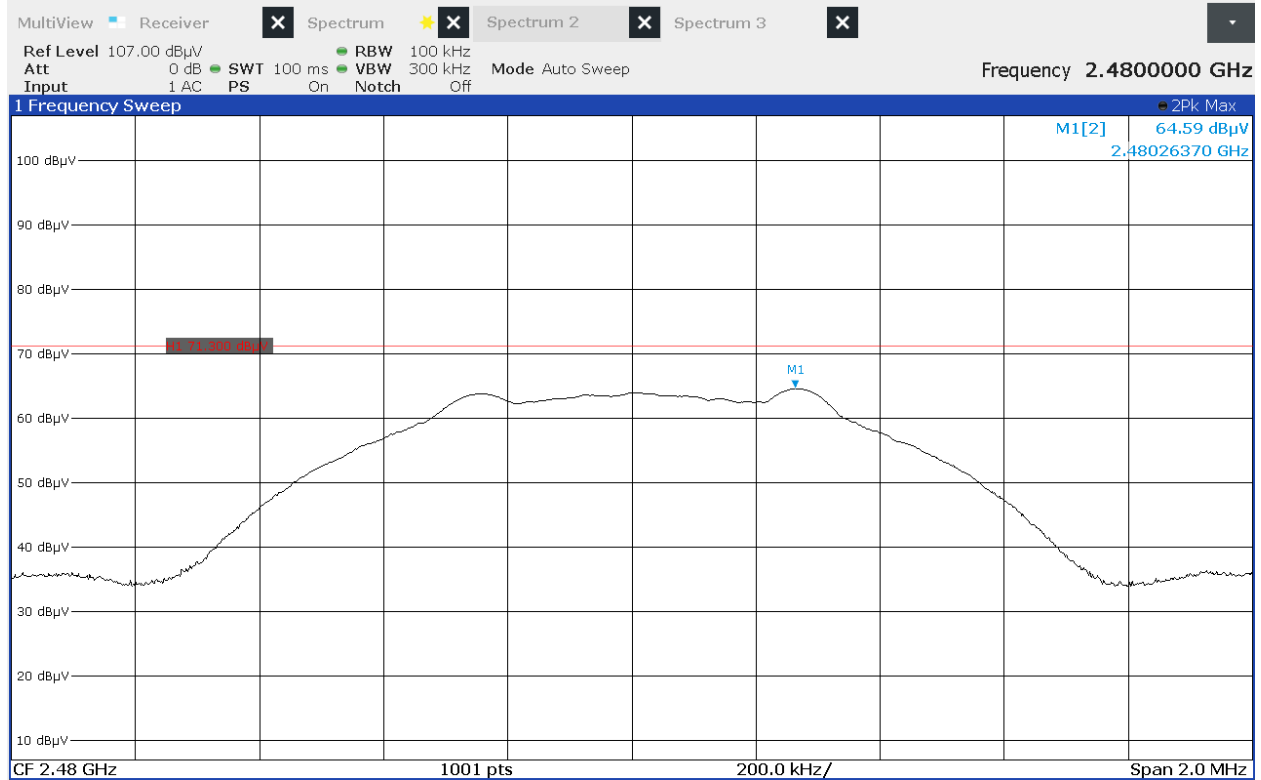

Peak Power Spectral Density

Manufacturer : Winegard Company
Model Number : HS-SSET
Serial Number : Parent
Mode : Tx
Line Tested : Horizontal Antenna Polarization
Parameters : Power Spectral Density Plot
Date : 6/14/2023 7:27:22 AM
Notes : Limit line on the plot was placed at a level equivalent to 8dBm

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	Peak Power (dBm)	Limit dBm	Margin dB
2480.26	H	64.6	-0.7	5.6	3.4	1.5	8.0	-6.5

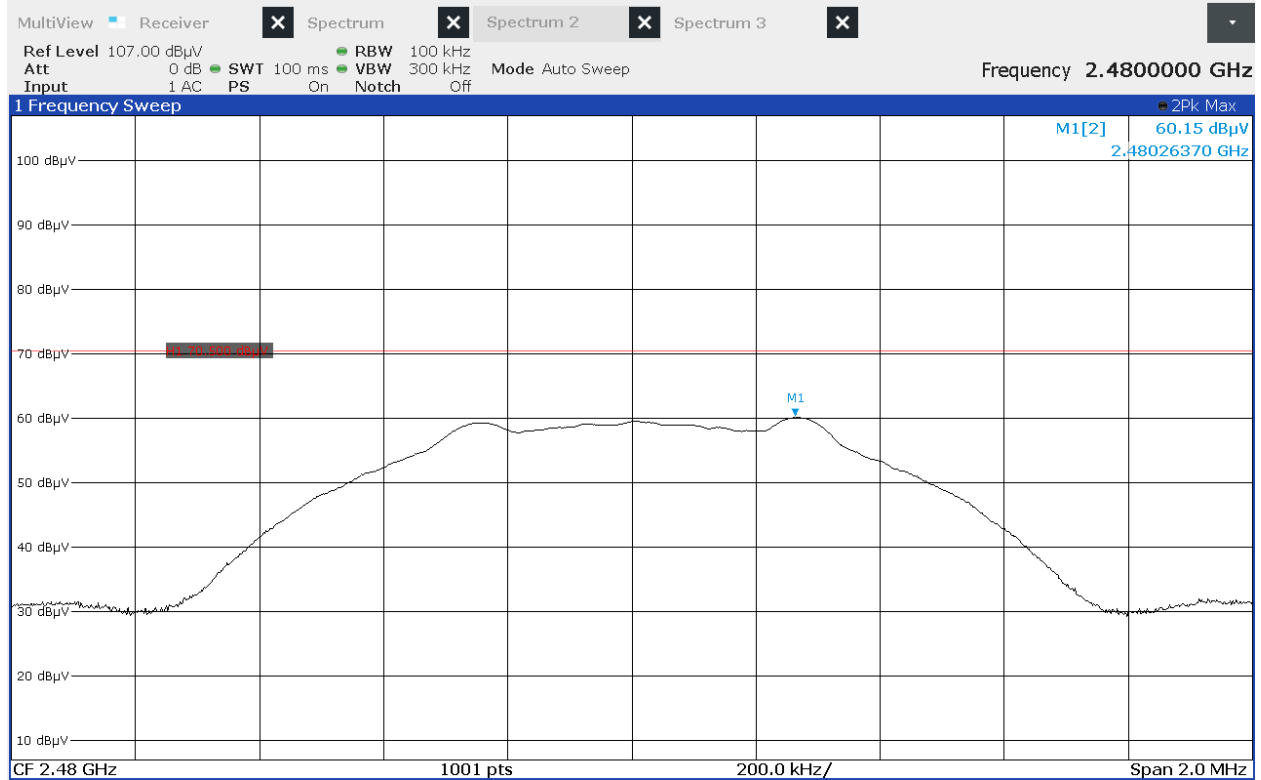

Peak Power Spectral Density

Manufacturer : Winegard Company
Model Number : HS-SSET
Serial Number : Parent
Mode : Tx
Line Tested : Vertical Antenna Polarization
Parameters : Power Spectral Density Plot
Date : 6/14/2023 7:30:37 AM
Notes : Limit line on the plot was placed at a level equivalent to 8dBm

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	Peak Power (dBm)	Limit dBm	Margin dB
2480.26	V	60.2	-4.2	5.6	3.4	-2.1	8.0	-10.1

28. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.
1516 Centre Circle
Downers Grove, IL 60515
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168
Email: rbugielski@elitetest.com
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112
Email: cfanning@elitetest.com
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163
Email: blugo@elitetest.com
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123
Email: reking@elitetest.com
Website: www.elitetest.com

ELECTRICAL

Valid To: June 30, 2023

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

Test Technology:**Test Method(s) ¹:*****Transient Immunity***

ISO 7637-2 (including emissions); ISO 7637-3;
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;
CS-11979, Section 6.4; CS.00054, Section 5.9;
EMC-CS-2009.1 (CI220); FMC1278 (CI220, CI221, CI222);
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;
ECE Regulation 10.06 Annex 10

Electrostatic Discharge (ESD)

ISO 10605 (2001, 2008);
CS-11979 Section 7.0; CS.00054, Section 5.10;
EMC-CS-2009.1 (CI 280); FMC1278 (CI280); SAE J1113-13;
GMW 3097 Section 3.6

Conducted Emissions

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;
CISPR 25 (2016), Sections 6.3 and 6.4;
CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;
GMW 3097, Section 3.3.2;
EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421)

Radiated Emissions Anechoic

CISPR 25 (2002, 2008), Section 6.4;
CISPR 25 (2016), Section 6.5;
CS-11979, Section 5.3; CS.00054, Section 5.6.3;
GMW 3097, Section 3.3.1;
EMC-CS-2009.1 (RE 310); FMC1278 (RE310);

(A2LA Cert. No. 1786.01) Revised 08/08/2022



Page 1 of 8

5202 Presidents Court, Suite 220 | Frederick, MD 21703-8515 | Phone: 301 644 3248 | Fax: 240 454 9449 | www.A2LA.org

Test Technology:
Test Method(s) ¹:
Vehicle Radiated Emissions

CISPR 12; CISPR 36; ICES-002;
ECE Regulation 10.06 Annex 5

Bulk Current Injection (BCI)

ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1;
GMW 3097, Section 3.4.1; SAE J1113-4;
EMC-CS-2009.1 (RI112); FMC1278 (RI112);
ECE Regulation 10.06 Annex 9

**Radiated Immunity Anechoic
(Including Radar Pulse)**

ISO 11452-2; ISO 11452-5;
CS-11979, Section 6.2; CS.00054, Section 5.8.2;
GMW 3097, Section 3.4.2;
EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21;
ECE Regulation 10.06 Annex 9

Radiated Immunity Magnetic Field

ISO 11452-8

Radiated Immunity Reverb

ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3;
EMC-CS-2009.1 (RI114); FMC1278 (RI114);
ISO 11452-11

**Radiated Immunity
(Portable Transmitters)**

ISO 11452-9;
EMC-CS-2009.1 (RI115); FMC1278 (RI115)

Vehicle Radiated Immunity (ALSE)

ISO 11451-2; ECE Regulation 10.06 Annex 6

**Vehicle Product Specific EMC
Standards**

EN 14982; EN ISO 13309; ISO 13766; EN 50498;
EC Regulation No. 2015/208; EN 55012

Electrical Loads

ISO 16750-2

Emissions

Radiated and Conducted
(3m Semi-anechoic chamber,
up to 40 GHz)

47 CFR, FCC Part 15 B (using ANSI C63.4:2014);
47 CFR, FCC Part 18 (using FCC MP-5:1986);
ICES-001; ICES-003; ICES-005;
IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004);
IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010);
KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008);
CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003);
CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1;
CISPR 16-2-1 (2008); CISPR 16-2-1; KS C 9814-1; KN 14-1;
IEC/CISPR 22 (1997);
EN 55022 (1998) + A1(2000);
EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006);
IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004);
AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz);
CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz);
CISPR 32; EN 55032; KS C 9832; KN 32;
ECE Regulation 10.06 Annex 7 (Broadband)
ECE Regulation 10.06 Annex 8 (Narrowband)
ECE Regulation 10.06 Annex 14 (Conducted)

Test Technology:**Test Method(s) ¹:****Emissions (cont'd)**

Cellular Radiated Spurious Emissions

ETSI TS 151 010-1 GSM; 3GPP TS 51.010-1, Sec 12;
ETSI TS 134 124 UMTS; 3GPP TS 34.124;
ETSI TS 136 124 LTE; E-UTRA; 3GPP TS 36.124

Current Harmonics

IEC 61000-3-2; EN 61000-3-2; KN 61000-3-2;
KS C 9610-3-2; ECE Regulation 10.06 Annex 11

Flicker and Fluctuations

IEC 61000-3-3; EN 61000-3-3; KN 61000-3-3;
KS C 9610-3-3; ECE Regulation 10.06 Annex 12**Immunity**

Electrostatic Discharge

IEC 61000-4-2, Ed. 1.2 (2001);
IEC 61000-4-2 (1995) + A1(1998) + A2(2000);
EN 61000-4-2 (1995); EN 61000-4-2 (2009-05);
KN 61000-4-2 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2;
KS C 9610-4-2; IEEE C37.90.3 2001

Radiated Immunity

IEC 61000-4-3 (1995) + A1(1998) + A2(2000);
IEC 61000-4-3, Ed. 3.0 (2006-02);
IEC 61000-4-3, Ed. 3.2 (2010);
KN 61000-4-3 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3;
KS C 9610-4-3; IEEE C37.90.2 2004

Electrical Fast Transient/Burst

IEC 61000-4-4, Ed. 2.0 (2004-07);
IEC 61000-4-4, Ed. 2.1 (2011);
IEC 61000-4-4 (1995) + A1(2000) + A2(2001);
KN 61000-4-4 (2008-5);
RRL Notice No. 2008-5 (May 20, 2008);
IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4;
KS C 9610-4-4; ECE Regulation 10.06 Annex 15

Surge

IEC 61000-4-5 (1995) + A1(2000);
IEC 61000-4-5, Ed 1.1 (2005-11);
EN 61000-4-5 (1995) + A1(2001);
KN 61000-4-5 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5;
KS C 9610-4-5;
IEEE C37.90.1 2012; IEEE STD C62.41.2 2002;
ECE Regulation 10.06 Annex 16

Test Technology:**Test Method(s) ¹:****Immunity (cont'd)**

Conducted Immunity

IEC 61000-4-6 (1996) + A1(2000);
IEC 61000-4-6, Ed 2.0 (2006-05);
IEC 61000-4-6 Ed. 3.0 (2008);
KN 61000-4-6 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6;
EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6

Power Frequency Magnetic Field
Immunity (*Down to 3 A/m*)

IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009);
EN 61000-4-8 (1994) + A1(2000);
KN 61000-4-8 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8

Voltage Dips, Short Interrupts, and Line
Voltage Variations

IEC 61000-4-11, Ed. 2 (2004-03);
KN 61000-4-11 (2008-5);
RRL Notice No. 2008-4 (May 20, 2008);
IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11;
KS C 9610-4-11

Ring Wave

IEC 61000-4-12, Ed. 2 (2006-09);
EN 61000-4-12:2006;
IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12;
IEEE STD C62.41.2 2002

Generic and Product Specific EMC
Standards

IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1;
KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2;
KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3;
AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3;
IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4;
KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2;
EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3;
EN 55015; EN 60730-1; EN 60945; IEC 60533;
EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2;
AS/NZS CISPR 14.2; KN 14-2; KS C 9814-2;
IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24;
IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35;
KS C 9835; IEC 60601-1-2; JIS T0601-1-2

TxRx EMC Requirements

EN 301 489-1; EN 301 489-3; EN 301 489-9;
EN 301 489-17; EN 301 489-19; EN 301 489-20

Test Technology:
Test Method(s) ¹:
European Radio Test Standards

ETSI EN 300 086-1; ETSI EN 300 086-2;
ETSI EN 300 113-1; ETSI EN 300 113-2;
ETSI EN 300 220-1; ETSI EN 300 220-2;
ETSI EN 300 220-3-1; ETSI EN 300 220-3-2;
ETSI EN 300 330-1; ETSI EN 300 330-2;
ETSI EN 300 440-1; ETSI EN 300 440-2;
ETSI EN 300 422-1; ETSI EN 300 422-2;
ETSI EN 300 328; ETSI EN 301 893;
ETSI EN 301 511; ETSI EN 301 908-1;
ETSI EN 908-2; ETSI EN 908-13;
ETSI EN 303 413; ETSI EN 302 502;
EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4

Canadian Radio Tests

RSS-102 (RF Exposure Evaluation ^{MEAS});
RSS-102 (Nerve Stimulation ^{MEAS}) (5Hz to 400kHz);
SPR-002; RSS-111; RSS-112; RSS-117; RSS-119; RSS-123;
RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133;
RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141;
RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192;
RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210;
RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222;
RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-248;
RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN

Mexico Radio Tests

IFT-008-2015; NOM-208-SCFI-2016

Japan Radio Tests

Radio Law No. 131, Ordinance of MPT No. 37, 1981,
MIC Notification No. 88:2004, Table No. 22-11;
ARIB STD-T66, Regulation 18

Taiwan Radio Tests

LP-0002 (July 15, 2020)

Australia/New Zealand Radio Tests

AS/NZS 4268; Radiocommunications (Short Range Devices)
Standard (2014)

Hong Kong Radio Tests

HKCA 1039 Issue 6; HKCA 1042; HKCA 1033 Issue 7;
HKCA 1061; HKCA 1008; HKCA 1043; HKCA 1057;
HKCA 1073

Korean Radio Test Standards

KN 301 489-1; KN 301 489-3; KN 301 489-9;
KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125;
KS X 3130; KS X 3126; KS X 3129

Vietnam Radio Test Standards

QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT;
QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT;
QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT;
QCVN 112:2017/BTTTT; QCVN 117:2020/BTTTT

Vietnam EMC Test Standards

QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT;
QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT

Test Technology:

Unlicensed Radio Frequency Devices
(3 Meter Semi-Anechoic Room)

Licensed Radio Service Equipment

OTA (Over the Air) Performance

GSM, GPRS, EGPRS
UMTS (W-CDMA)
LTE including CAT M1
A-GPS for UMTS/GSM
LTS A-GPS, A-GLONASS,
SIB8/SIB16
Large Device/Laptop/Tablet Testing
Integrated Device Testing
WiFi 802.11 a/b/g/n/a

Electrical Measurements and Simulation
AC Voltage / Current

(1mV to 5kV) 60 Hz
(0.1V to 250V) up to 500 MHz
(1μA to 150A) 60 Hz

DC Voltage / Current

(1mV to 15-kV) / (1μA to 10A)

Power Factor / Efficiency / Crest Factor

(Power to 30kW)

Resistance

(1mΩ to 4000MΩ)

Surge

(Up to 10 kV / 5 kA) (Combination
Wave and Ring Wave)

Test Method(s) ¹:

47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H
(using ANSI C63.10:2013, ANSI C63.17:2013 and
FCC KDB 905462 D02 (v02))

47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87,
90, 95, 96, 97, 101 (using ANSI/TIA-603-E,
TIA-102.CAAA-E, ANSI C63.26:2015)

CTIA Test Plan for Wireless Device Over-the-Air
Performance (Method for Measurement for Radiated Power
and Receiver Performance) V3.8.2;
CTIA Test Plan for RF Performance Evaluation of WiFi
Mobile Converged Devices V2.1.0

FAA AC 150/5345-10H

FAA AC 150/5345-43J

FAA AC 150/5345-44K

FAA AC 150/5345-46E

FAA AC 150/5345-47C

FAA EB 67D

On the following products and materials:

Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

¹ When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA R101 - General Requirements- Accreditation of ISO-IEC 17025 Laboratories.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Unintentional Radiators</u> Part 15B	ANSI C63.4:2014	40000
<u>Industrial, Scientific, and Medical Equipment</u> Part 18	FCC MP-5 (February 1986)	40000
<u>Intentional Radiators</u> Part 15C	ANSI C63.10:2013	40000
<u>Unlicensed Personal Communication Systems Devices</u> Part 15D	ANSI C63.17:2013	40000
<u>U-NII without DFS Intentional Radiators</u> Part 15E	ANSI C63.10:2013	40000
<u>U-NII with DFS Intentional Radiators</u> Part 15E	FCC KDB 905462 D02 (v02)	40000
<u>UWB Intentional Radiators</u> Part 15F	ANSI C63.10:2013	40000
<u>BPL Intentional Radiators</u> Part 15G	ANSI C63.10:2013	40000
<u>White Space Device Intentional Radiators</u> Part 15H	ANSI C63.10:2013	40000
<u>Commercial Mobile Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (cellular), 24, 25 (below 3 GHz), and 27	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>General Mobile Radio Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment)</u> Part 96	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Maritime and Aviation Radio Services</u> Parts 80 and 87	ANSI/TIA-603-E; ANSI C63.26:2015	40000
<u>Microwave and Millimeter Bands Radio Services</u> Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Broadcast Radio Services</u> Parts 73 and 74 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Signal Boosters</u> Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219	ANSI C63.26:2015	40000

² Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (<https://apps.fcc.gov/oetcf/eas/>) for a listing of FCC approved laboratories.



Accredited Laboratory

A2LA has accredited

ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 19th day of May 2021.

A handwritten signature in blue ink, appearing to be 'A. M. ...'.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 1786.01
Valid to June 30, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.