



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.381.1520

<http://www.element.com>

MEASUREMENT REPORT

FCC PART 15.407 802.11a/n/ac/ax/be (OFDM/OFDMA)

Applicant Name:

Microsoft Corporation
1 Microsoft Way
Redmond, WA 98052-8300
United States

Date of Testing:

4/15/2026 - 6/24/2026

Test Report Issue Date:

7/10/2026

Test Site/Location:

Element Lab., Columbia, MD, USA

Test Report Serial No.:

1M2603250028-10.C3K

FCC ID:

C3K00002101

IC:

3048A-00002101

APPLICANT:

Microsoft Corporation

FCC Application Type:

Class II Permissive Change, Module Host Integration

ISED Application Type:

Class IV Permissive Change, Module Host Integration

Model:

2150

HVIN:

HWB-Q94

EUT Type:

Limited Modular Approval – Host Integration

Frequency Range:

5180 – 5885MHz

Modulation Type:

OFDM, OFDMA

FCC Equipment Class:

Unlicensed National Information Infrastructure TX (NII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification(s):

RSS-247 Issue 4

Test Procedure(s):

ANSI C63.10:2020 + Cor.1:2023 + C63.10a:2024 + Errata to C63.10a:2024

Permissive Change(s):

Please see change document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 1 of 54

TEST REPORT REVISION HISTORY

Rev. No.	Description	Issue Date	Revised By
-	Initial Release	6/26/2026	WKR0000005874

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 2 of 54

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	8
2.4	Test Configuration.....	9
2.5	Software and Firmware	9
2.6	EMI Suppression Device(s) / Modifications.....	9
3.0	DESCRIPTION OF TESTS	10
3.1	Evaluation Procedure	10
3.2	AC Line Conducted Emissions	10
3.3	Radiated Emissions.....	11
3.4	Environmental Conditions.....	11
4.0	ANTENNA REQUIREMENTS	12
5.0	MEASUREMENT UNCERTAINTY	13
6.0	TEST EQUIPMENT CALIBRATION DATA.....	14
7.0	TEST RESULTS	17
7.1	Summary.....	17
7.2	Emission Measurements	18
7.2.1	MIMO Radiated Spurious Emission Measurements.....	29
7.2.2	MIMO Band Edge Measurements (20MHz BW)	38
7.2.3	MIMO Band Edge Measurements (40MHz BW)	43
7.2.4	MIMO Band Edge Measurements (80MHz BW)	45
7.2.5	MIMO Band Edge Measurements (160MHz BW)	46
7.3	Line-Conducted Test Data.....	47
8.0	CONCLUSION.....	54

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 3 of 54

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 4 of 54

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Microsoft Portable Computing Device containing module FCC ID: C3K00002101**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

The equipment under test (EUT) is a portable computing device, Model 2150, which integrates two previously certified modules. The first module is a WLAN/Bluetooth module authorized under FCC ID: C3K00002101, and the second is a cellular module authorized under FCC ID: C3K2114. No hardware or software modifications have been made to either module as part of this host integration. The evaluation in this report demonstrates compliance of the host device with the applicable FCC rules considering the co-location and simultaneous transmission of the integrated modules. Colocation data is contained in the C2PC evaluation for the cellular module (FCC ID: C3K2114) integrated into the Model 2150 Host. Reference report "C3K2114 Part 22_24_27_90 Test Report" serial number 1M2603250028-05.C3K.

Test Device Serial No.: 0F7CR4R26093WK, 0F4TDQV26093WK, 0F7BTB826093WK

2.2 Device Capabilities

This device contains the following capabilities:

Bluetooth (1x, EDR, LE), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and GHz), Multi-band LTE, Multi-Band NR (FR1), RFID/WPT

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745	169	5845
:	:	:	:	:	:	:	:	:	:
40	5200	56	5280	120	5600	157	5785	173	5865
:	:	:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825	177	5885

Table 2-1. 802.11ax/be (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755	167	5835
:	:	:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795	175	5875
				:	:				
				142	5710				

Table 2-2. 802.11ax/be (40MHz BW) Frequency / Channel Operations

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 5 of 54

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775	167	5835
				:	:				
				122	5610				
				:	:				
				138	5690				

Table 2-3. 802.11ax/be (80MHz BW) Frequency / Channel Operations

Band 1/2A		Band 2C		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
50	5250	114	5570	163	5815

Table 2-4. 802.11ax/be (160MHz BW) Frequency / Channel Operations

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 6 of 54

Notes:

- 5GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10:2020. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		MIMO (1+2)
		Duty Cycle [%]
5GHz	a	99.52
	n (HT20)	99.63
	ac (VHT20)	99.53
	ax (HE20)	99.63
	be (EHT20)	99.74
	n (HT40)	99.60
	ac (VHT40)	99.52
	ax (HE40)	99.48
	be (EHT40)	99.63
	ac (VHT80)	99.34
	ax (HE80)	99.63
	be (EHT80)	99.85
	ac (HT160)	99.79
	ax (HE160)	99.52
	be (EHT160)	99.66

Table 2-5. Measured Duty Cycles

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✓	✗	✗	✓	✓
	11n	✓	✓	✓	✓	✓	✓
	11ac	✓	✓	✓	✓	✓	✓
	11ax	✓	✓	✓	✓	✓	✓
	11be	✓	✓	✓	✓	✓	✓

Table 2-6. Antenna / Technology Configuration

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity – 2Tx Function

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 7 of 54

3. The device supports the following data rates (shown in Mbps):

802.11a	MCS Index				Spatial Stream	OFDM (802.11n/802.11ac)				OFDM (802.11ac)				OFDM (802.11ax/be)											
						20MHz		40MHz		80MHz		160MHz		20MHz			40MHz			80MHz			160MHz		
	HT	VHT	HE	EHT		0.8µs GI	0.4µs GI	0.8µs GI	0.4µs GI	0.8µs GI	0.4µs GI	0.8µs GI	0.4µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI
6	0	0	0	0	1	6.5	7.2	13.5	15	29.3	32.5	58.5	65	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3
9	1	1	1	1	1	13	14.4	27	30	58.5	65	117	130	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
12	2	2	2	2	1	19.5	21.7	40.5	45	87.8	97.5	175.5	195	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8
18	3	3	3	3	1	26	28.9	54	60	117	130	234	260	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
24	4	4	4	4	1	39	43.3	81	90	175.5	195	351	390	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
36	5	5	5	5	1	52	57.8	108	120	234	260	468	520	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
48	6	6	6	6	1	58.5	65	121.5	135	263.3	292.5	526.5	585	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3
54	7	7	7	7	1	65	72.2	135	150	292.5	325	585	650	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5
		8	8	8	1	78	86.7	162	180	351	390	702	780	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
		9	9	9	1	N/A	N/A	180	200	390	433.3	780	866.7	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7
			10	10	1									129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8
			11	11	1									143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8
			12	12	1									154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
			13	13	1									172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225
6	8	0	0	0	2	13	14.4	27	30	58.5	65	117	130	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
9	9	1	1	1	2	26	28.9	54	60	117	130	234	260	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
12	10	2	2	2	2	39	43.3	81	90	175.5	195	351	390	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
18	11	3	3	3	2	52	57.8	108	120	234	260	468	520	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
24	12	4	4	4	2	78	86.7	162	180	351	390	702	780	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
36	13	5	5	5	2	104	115.6	216	240	468	520	936	1040	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980
48	14	6	6	6	2	117	130	243	270	526.5	585	1053	1170	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
54	15	7	7	7	2	130	144.4	270	300	585	650	1170	1300	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225
		8	8	8	2	156	173.3	324	360	702	780	1404	1560	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470
		9	9	9	2	N/A	N/A	360	400	780	866.7	1560	1733.3	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3
			10	10	2									258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5
			11	11	2									286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7
			12	12	2									309.7	292.5	263.3	619.4	585	526.5	1297.1	1225	1102.5	2594.1	2450	2205
			13	13	2									344.1	325	292.5	688.2	650	585	1441.2	1361.1	1225	2882.4	2722.2	2450

Table 2-7. Supported Data Rates

✓ = Support; ✗ = NOT Support

2.3 Antenna Description

The manufacturer provided the following antenna gains which can affect the validity of test results used for determination of compliance. The following antenna gains are used in this device per the Antenna Report document provided by the client. This document is also included in the filing as a public exhibit.

Frequency [GHz]	ANT1 Peak Gain [dBi]	ANT2 Peak Gain [dBi]	Measured Correlated Directional Gain (dBi)	Measured uncorrelated Directional Gain (dBi)
5.20	3.95	3.89	5.90	3.04
5.30	4.70	5.13	7.63	4.65
5.50	6.95	7.12	9.65	6.64
5.80	7.10	7.27	9.82	6.81
5.85	6.41	6.36	8.96	5.95

Table 2-8. Antenna Peak Gain

The directional antenna gains were measured per the guidance of KDB 662911 D03. The measurement report is uploaded as part of this filing.

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 8 of 54

2.4 Test Configuration

ANSI C63.10:2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups and 7.2 for radiated emissions test setups.

2.5 Software and Firmware

The test was conducted with software/firmware version 2026.509.11908993 installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 9 of 54

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.4. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 10 of 54

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 11 of 54

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 12 of 54

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10:2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 5-1. Measurement Uncertainty Budget

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 13 of 54

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	MD 1M 40	EMC Cable and Switch System	2/3/2026	Annual	2/3/2027	MD 1M 40
-	MVG-001	EMC Cable and Switch System	2/2/2026	Annual	2/2/2027	MVG-001
-	MVG-002	EMC Cable and Switch System	2/2/2026	Annual	2/2/2027	MVG-002
-	AP1-002	EMC Cable and Switch System	2/3/2026	Annual	2/3/2027	AP1-002
-	AP2-001	EMC Cable and Switch System	1/30/2026	Annual	1/30/2027	AP2-001
-	AP2-002	EMC Cable and Switch System	1/30/2026	Annual	1/30/2027	AP2-002
-	ETS-001	EMC Cable and Switch System	1/29/2026	Annual	1/29/2027	ETS-001
-	ETS-002	EMC Cable and Switch System	1/29/2026	Annual	1/29/2027	ETS-002
-	WL25-1	Conducted Cable Set (25GHz)	1/30/2026	Annual	1/30/2027	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	1/30/2026	Annual	1/30/2027	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	1/30/2026	Annual	1/30/2027	WL40-1
Anritsu	MA24408A	POWER SENSOR	1/27/2026	Annual	1/27/2027	11676
Anritsu	MA24408A	POWER SENSOR	1/27/2026	Annual	1/27/2027	12798
EMCO	3115	Horn Antenna (1-18GHz)	9/6/2024	Biennial	9/6/2026	9704-5182
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	6/4/2025	Biennial	6/4/2027	125518
Keysight Technologies	N9030A	PXA Signal Analyzer	11/3/2025	Annual	11/3/2026	MY54490576
Keysight Technologies	N9038A	MXE EMI Receiver	11/10/2025	Annual	11/10/2026	MY51210133
Keysight Technologies	N9020A	MXA Signal Analyzer	5/7/2025	Annual	5/7/2026	US46470561
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	6/6/2025	Annual	6/6/2026	MY52350166
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/30/2026	Annual	1/30/2027	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	12/19/2025	Annual	12/19/2026	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	1/16/2026	Annual	1/16/2027	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/11/2026	Annual	3/11/2027	101716
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	12/19/2025	Annual	12/19/2026	100342
Rohde & Schwarz	ENV216	Two-Line V-Network	2/4/2026	Biennial	2/4/2028	101379
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	9/11/2024	Biennial	9/11/2026	A051107

Table 6-1. Test Equipment Calibration Table

Component	Serial Number
MegaPhase Cable TM40-K1K1-30	20233002-004
UTIPLEX Cable	64639 232063-001
Rohde & Schwarz Pre-amp RS-PR1840 18G-40G	9037.7670.02

Table 6-2. MD 1M 18-40 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	20379901 001
Sucoflex Cable 126E	S/N:551792
Rohde & Schwarz SF Unit	102155
SMU/RF-A OUT cable	1127118600 10 06 379

Table 6-3. MVG-001 EMC Cable and Switch System Components

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	19046401 001
Megaphase (CAGE 1GVT4) Flex Cable 10511-1	15044701-006
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-002
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-004
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335

Table 6-4. MVG-002 EMC Cable and Switch System Components

Component	Serial Number
Sucoflex 106A Cable	501992
MegaPhase Cable N29-N1N1-324	20335606 001
Rohde & Schwarz SF Unit	102133
MiniCircuits Cable CBL-2FT-SMSM+	77745
MegaPhase Cable 10511-1	15034701 001
MiniCircuits Switch RC 2SPDT-A18	11703270 041
Sucoflex 104 Cable	320259/4
Sucoflex 104 Cable	321999/4
Sucoflex 104 Cable	321995/4

Table 6-5. AP1-002 EMC Cable and Switch System Components

Component	Serial Number
Flex Cable	P2A-0001
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Chamber Passthrough	CP4/X12
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 6463	232069-001
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181

Table 6-6. AP2-001 EMC Cable and Switch System Components

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	19046401 001
Megaphase (CAGE 1GVT4) Flex Cable 10511-1	15044701-006
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-002
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-004
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335

Table 6-7. AP2-002 EMC Cable and Switch System Components

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 15 of 54

Component	Serial Number
Pasternack Cable RG214/U	111815
MegaPhase (CAGE 1GVT4) Cable GR18-N5N5-24	14042714 001

Table 6-8. ETS-001 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase (CAGE 1GVT4) Cable GR18-N5N5-24	14042714 001
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	20502201 001
Rohde & Schwarz SF Unit	102134
Minicircuits Cable CBL=0.5M-NMNM+	15440

Table 6-9. ETS-002 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase Cable TM26-S1S1-36	18160103 003
Pasternack 6dB Attenuator PE7005-6	N/A

Table 6-10. WL25-1 Conducted Cable Set Components

Component	Serial Number
MiniCircuits Cable CBL-2FT-SMSM+	77743
MCL 6dB Attenuator BW-S6W2+	1314

Table 6-11. WL25-2 Conducted Cable Set Components

Component	Serial Number
MegaPhase Cable TM40K1K1-36	18160102 001
MCL 10dB Attenuator BW-K10 2W44+	1902

Table 6-12. WL40-1 Conducted Cable Set Components

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		

7.0 TEST RESULTS

7.1 Summary

Company Name: Microsoft Corporation
 FCC ID: C3K00002101
 FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407 (a)(1)(iv), (a)(2), (a)(3)	RSS-247 [7.3]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])	CONDUCTED	PASS	Section 7.2
15.407(h)	RSS-247 [7.3.6]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Report
15.407(b)(1), (b)(2), (b)(3), (b)(4)	RSS-247 [7.3]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED / CONDUCTED	PASS	Section 7.3
15.205, 15.407(b)(1), (b)(4), (b)(5), (b)(6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.3
15.407	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.4

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst-case emissions.
- 2) For band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.5.0.

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 17 of 54

7.2 UNII Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies.

The output power limits are as specified in the tables below.

UNII Band	Frequency Range	Maximum Conducted Power Limit		Maximum e.i.r.p	
		FCC	ISED	FCC	ISED
UNII 1	5.15 – 5.25GHz	23.98dBm (250mW)	N/A	N/A	The lesser of 23.01dBm (200mW) or 10dBm + 10log ₁₀ B
UNII 2A	5.25 – 5.35GHz	The lesser of 23.98dBm (250mW) or 11dBm + 10log ₁₀ B		N/A	The lesser of 30dBm (1W) or 17dBm + 10log ₁₀ B
UNII 2C	5.47 – 5.725GHz				
UNII 3	5.725 – 5.850GHz	30dBm (1W)		N/A	N/A
UNII 4	5.850 – 5.895GHz	N/A		30dBm (1W)	

Test Procedure Used

ANSI C63.10:2020 – Section 12.4.3.2 Method PM-G

ANSI C63.10:2020 – Section 14.5.2.3 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 18 of 54

MIMO Maximum Conducted Output Power Measurements

5GHz WIFI (20MHz 802.11a MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5180	36	14.50	14.59	17.56	23.98	-6.42	3.04	20.60	30.00	-9.40
	5200	40	16.13	16.39	19.27	23.98	-4.71	3.04	22.31	30.00	-7.69
	5220	44	16.48	16.75	19.63	23.98	-4.35	3.04	22.67	30.00	-7.33
	5240	48	16.37	16.82	19.61	23.98	-4.37	3.04	22.65	30.00	-7.35
UNII-2A	5260	52	14.93	15.40	18.18	23.98	-5.80	4.65	22.83	30.00	-7.17
	5280	56	14.77	15.30	18.05	23.98	-5.93	4.65	22.70	30.00	-7.30
	5300	60	14.72	15.48	18.13	23.98	-5.85	4.65	22.78	30.00	-7.22
	5320	64	14.60	15.30	17.97	23.98	-6.01	4.65	22.62	30.00	-7.38
UNII-2C	5500	100	15.00	15.65	18.35	23.98	-5.63	6.64	24.99	30.00	-5.01
	5600	120	14.51	14.56	17.55	23.98	-6.43	6.64	24.19	30.00	-5.81
	5620	124	14.56	14.54	17.56	23.98	-6.42	6.64	24.20	30.00	-5.80
	5720	144	15.90	15.50	18.71	23.98	-5.27	6.64	25.35	30.00	-4.65
UNII-3	5745	149	15.98	15.39	18.71	30.00	-11.29	6.81	25.52	36.00	-10.48
	5785	157	21.14	20.47	23.83	30.00	-6.17	6.81	30.64	36.00	-5.36
	5825	165	21.27	20.72	24.01	30.00	-5.99	6.81	30.82	36.00	-5.18
UNII-4	5845	169	14.29	13.95	17.13	-	-	5.95	23.08	30.00	-6.92
	5865	173	13.29	12.96	16.14	-	-	5.95	22.09	30.00	-7.91
	5885	177	13.10	12.84	15.98	-	-	5.95	21.93	30.00	-8.07

Table 7-2. MIMO 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

5GHz WIFI (20MHz 802.11n MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5180	36	14.32	14.65	17.50	23.98	-6.48	3.04	20.54	30.00	-9.46
	5200	40	16.10	16.35	19.24	23.98	-4.74	3.04	22.28	30.00	-7.72
	5220	44	16.45	16.79	19.63	23.98	-4.35	3.04	22.67	30.00	-7.33
	5240	48	16.39	16.70	19.56	23.98	-4.42	3.04	22.60	30.00	-7.40
UNII-2A	5260	52	14.92	15.40	18.18	23.98	-5.80	4.65	22.83	30.00	-7.17
	5280	56	14.85	15.33	18.11	23.98	-5.87	4.65	22.76	30.00	-7.24
	5300	60	14.70	15.49	18.12	23.98	-5.86	4.65	22.77	30.00	-7.23
	5320	64	14.55	15.40	18.01	23.98	-5.97	4.65	22.66	30.00	-7.34
UNII-2C	5500	100	15.02	15.59	18.32	23.98	-5.66	6.64	24.96	30.00	-5.04
	5620	124	14.65	14.59	17.63	23.98	-6.35	6.64	24.27	30.00	-5.73
	5720	144	15.89	15.51	18.71	23.98	-5.27	6.64	25.35	30.00	-4.65
UNII-3	5745	149	15.60	15.02	18.33	30.00	-11.67	6.81	25.14	36.00	-10.86
	5785	157	20.78	20.18	23.50	30.00	-6.50	6.81	30.31	36.00	-5.69
	5825	165	20.98	20.42	23.72	30.00	-6.28	6.81	30.53	36.00	-5.47
UNII-4	5845	169	14.22	13.90	17.07	-	-	5.95	23.02	30.00	-6.98
	5865	173	12.75	12.50	15.64	-	-	5.95	21.59	30.00	-8.41
	5885	177	13.11	12.85	15.99	-	-	5.95	21.94	30.00	-8.06

Table 7-3. MIMO 20MHz BW 802.11n (20MHz) (UNII) Maximum Conducted Output Power

5GHz WIFI (20MHz 802.11ac MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5180	36	14.35	14.65	17.51	23.98	-6.47	3.04	20.55	30.00	-9.45
	5200	40	16.09	16.33	19.22	23.98	-4.76	3.04	22.26	30.00	-7.74
	5220	44	16.38	16.69	19.55	23.98	-4.43	3.04	22.59	30.00	-7.41
	5240	48	16.36	16.75	19.57	23.98	-4.41	3.04	22.61	30.00	-7.39
UNII-2A	5260	52	14.86	15.40	18.15	23.98	-5.83	4.65	22.80	30.00	-7.20
	5280	56	14.79	15.32	18.07	23.98	-5.91	4.65	22.72	30.00	-7.28
	5300	60	14.66	15.42	18.07	23.98	-5.91	4.65	22.72	30.00	-7.28
	5320	64	14.55	15.39	18.00	23.98	-5.98	4.65	22.65	30.00	-7.35
UNII-2C	5500	100	14.99	15.60	18.32	23.98	-5.66	6.64	24.96	30.00	-5.04
	5600	120	15.00	15.11	18.07	23.98	-5.91	6.64	24.71	30.00	-5.29
	5620	124	14.65	14.55	17.61	23.98	-6.37	6.64	24.25	30.00	-5.75
	5720	144	15.77	15.03	18.43	23.98	-5.55	6.64	25.07	30.00	-4.93
UNII-3	5745	149	15.50	15.02	18.28	30.00	-11.72	6.81	25.09	36.00	-10.91
	5785	157	21.22	20.52	23.89	30.00	-6.11	6.81	30.70	36.00	-5.30
	5825	165	21.36	20.74	24.07	30.00	-5.93	6.81	30.88	36.00	-5.12
	5845	169	14.25	13.90	17.09	-	-	5.95	23.04	30.00	-6.96
UNII-4	5865	173	12.80	12.50	15.66	-	-	5.95	21.61	30.00	-8.39
	5885	177	13.15	12.90	16.04	-	-	5.95	21.99	30.00	-8.01

Table 7-4. MIMO 20MHz BW 802.11ac (20MHz) (UNII) Maximum Conducted Output Power

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 19 of 54

5GHz WIFI (20MHz 802.11ax MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5180	36	14.35	14.65	17.51	23.98	-6.47	3.04	20.55	30.00	-9.45
	5200	40	16.03	16.26	19.16	23.98	-4.82	3.04	22.20	30.00	-7.80
	5220	44	16.45	16.75	19.61	23.98	-4.37	3.04	22.65	30.00	-7.35
	5240	48	16.45	16.69	19.58	23.98	-4.40	3.04	22.62	30.00	-7.38
UNII-2A	5260	52	14.95	15.35	18.16	23.98	-5.82	4.65	22.81	30.00	-7.19
	5280	56	14.75	15.35	18.07	23.98	-5.91	4.65	22.72	30.00	-7.28
	5300	60	14.65	15.40	18.05	23.98	-5.93	4.65	22.70	30.00	-7.30
	5320	64	14.60	15.30	17.97	23.98	-6.01	4.65	22.62	30.00	-7.38
UNII-2C	5500	100	14.70	15.55	18.16	23.98	-5.82	6.64	24.80	30.00	-5.20
	5600	120	14.50	14.65	17.59	23.98	-6.39	6.64	24.23	30.00	-5.77
	5620	124	14.66	14.60	17.64	23.98	-6.34	6.64	24.28	30.00	-5.72
	5720	144	15.84	15.50	18.68	23.98	-5.30	6.64	25.32	30.00	-4.68
UNII-3	5745	149	15.45	15.00	18.24	30.00	-11.76	6.81	25.05	36.00	-10.95
	5785	157	21.26	20.56	23.93	30.00	-6.07	6.81	30.74	36.00	-5.26
	5825	165	21.37	20.79	24.10	30.00	-5.90	6.81	30.91	36.00	-5.09
UNII-4	5845	169	14.27	13.86	17.08	-	-	5.95	23.03	30.00	-6.97
	5865	173	12.75	12.50	15.64	-	-	5.95	21.59	30.00	-8.41
	5885	177	12.58	12.51	15.56	-	-	5.95	21.51	30.00	-8.49

Table 7-5. MIMO 20MHz BW 802.11ax (20MHz) (UNII) Maximum Conducted Output Power

5GHz WIFI (20MHz 802.11be MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5180	36	14.30	14.65	17.49	23.98	-6.49	3.04	20.53	30.00	-9.47
	5200	40	16.10	16.38	19.25	23.98	-4.73	3.04	22.29	30.00	-7.71
	5220	44	16.45	16.75	19.61	23.98	-4.37	3.04	22.65	30.00	-7.35
	5240	48	16.35	16.69	19.53	23.98	-4.45	3.04	22.57	30.00	-7.43
UNII-2A	5260	52	14.90	15.38	18.16	23.98	-5.82	4.65	22.81	30.00	-7.19
	5280	56	14.75	15.39	18.09	23.98	-5.89	4.65	22.74	30.00	-7.26
	5300	60	14.75	15.40	18.10	23.98	-5.88	4.65	22.75	30.00	-7.25
	5320	64	14.60	15.41	18.03	23.98	-5.95	4.65	22.68	30.00	-7.32
UNII-2C	5500	100	14.69	15.52	18.14	23.98	-5.84	6.64	24.78	30.00	-5.22
	5600	120	14.40	14.53	17.48	23.98	-6.50	6.64	24.12	30.00	-5.88
	5620	124	14.65	14.58	17.63	23.98	-6.35	6.64	24.27	30.00	-5.73
	5720	144	15.90	15.50	18.71	23.98	-5.27	6.64	25.35	30.00	-4.65
UNII-3	5745	149	15.89	15.37	18.65	30.00	-11.35	6.81	25.46	36.00	-10.54
	5785	157	21.27	20.67	23.99	30.00	-6.01	6.81	30.80	36.00	-5.20
	5825	165	21.40	20.76	24.10	30.00	-5.90	6.81	30.91	36.00	-5.09
UNII-4	5845	169	14.20	13.86	17.04	-	-	5.95	22.99	30.00	-7.01
	5865	173	13.20	12.88	16.05	-	-	5.95	22.00	30.00	-8.00
	5885	177	13.10	12.88	16.00	-	-	5.95	21.95	30.00	-8.05

Table 7-6. MIMO 20MHz BW 802.11be (20MHz) (UNII) Maximum Conducted Output Power

5GHz WIFI (40MHz 802.11n MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5190	38	12.35	12.23	15.30	23.98	-8.68	3.04	18.34	30.00	-11.66
	5230	46	15.18	15.16	18.18	23.98	-5.80	3.04	21.22	30.00	-8.78
UNII-2A	5270	54	14.88	14.90	17.90	23.98	-6.08	4.65	22.55	30.00	-7.45
	5310	62	13.00	13.36	16.19	23.98	-7.79	4.65	20.84	30.00	-9.16
UNII-2C	5510	102	12.40	12.66	15.54	23.98	-8.44	6.64	22.18	30.00	-7.82
	5590	118	14.56	14.50	17.54	23.98	-6.44	6.64	24.18	30.00	-5.82
	5630	126	14.85	14.52	17.70	23.98	-6.28	6.64	24.34	30.00	-5.66
	5710	142	15.85	15.12	18.51	23.98	-5.47	6.64	25.15	30.00	-4.85
UNII-3	5795	159	18.70	18.00	21.37	30.00	-8.63	6.81	28.18	36.00	-7.82
UNII-4	5835	167	16.88	16.50	19.70	-	-	6.81	26.51	30.00	-3.49

Table 7-7. MIMO 20MHz BW 802.11n (40MHz) (UNII) Maximum Conducted Output Power

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 20 of 54

5GHz WIFI (40MHz 802.11ac MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5190	38	12.29	12.11	15.21	23.98	-8.77	3.04	18.25	30.00	-11.75
	5230	46	15.22	15.13	18.19	23.98	-5.79	3.04	21.23	30.00	-8.77
UNII-2A	5270	54	14.80	15.00	17.91	23.98	-6.07	4.65	22.56	30.00	-7.44
	5310	62	13.00	13.32	16.17	23.98	-7.81	4.65	20.82	30.00	-9.18
UNII-2C	5510	102	12.32	12.70	15.52	23.98	-8.46	6.64	22.16	30.00	-7.84
	5590	118	14.56	14.50	17.54	23.98	-6.44	6.64	24.18	30.00	-5.82
	5630	126	14.80	14.56	17.69	23.98	-6.29	6.64	24.33	30.00	-5.67
	5710	142	15.79	15.16	18.50	23.98	-5.48	6.64	25.14	30.00	-4.86
UNII-3	5755	151	17.60	17.00	20.32	30.00	-9.68	6.81	27.13	36.00	-8.87
	5795	159	18.65	18.00	21.35	30.00	-8.65	6.81	28.16	36.00	-7.84
UNII-4	5835	167	17.36	16.96	20.17	-	-	6.81	26.98	30.00	-3.02

Table 7-8. MIMO 20MHz BW 802.11ac (40MHz) (UNII) Maximum Conducted Output Power

5GHz WIFI (40MHz 802.11ax MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5190	38	12.36	12.25	15.32	23.98	-8.66	3.04	18.36	30.00	-11.64
	5230	46	15.20	15.17	18.20	23.98	-5.78	3.04	21.24	30.00	-8.76
UNII-2A	5270	54	14.78	14.99	17.90	23.98	-6.08	4.65	22.55	30.00	-7.45
	5310	62	13.00	13.36	16.19	23.98	-7.79	4.65	20.84	30.00	-9.16
UNII-2C	5510	102	12.40	12.76	15.59	23.98	-8.39	6.64	22.23	30.00	-7.77
	5590	118	14.56	14.50	17.54	23.98	-6.44	6.64	24.18	30.00	-5.82
	5630	126	14.80	14.52	17.67	23.98	-6.31	6.64	24.31	30.00	-5.69
	5710	142	15.78	15.15	18.49	23.98	-5.49	6.64	25.13	30.00	-4.87
UNII-3	5755	151	17.55	17.00	20.29	30.00	-9.71	6.81	27.10	36.00	-8.90
	5795	159	18.68	18.10	21.41	30.00	-8.59	6.81	28.22	36.00	-7.78
UNII-4	5835	167	17.40	16.84	20.14	-	-	6.81	26.95	30.00	-3.05

Table 7-9. MIMO 20MHz BW 802.11ax (40MHz) (UNII) Maximum Conducted Output Power

5GHz WIFI (40MHz 802.11be MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5190	38	12.30	12.22	15.27	23.98	-8.71	3.04	18.31	30.00	-11.69
	5230	46	15.18	15.18	18.19	23.98	-5.79	3.04	21.23	30.00	-8.77
UNII-2A	5270	54	14.80	15.00	17.91	23.98	-6.07	4.65	22.56	30.00	-7.44
	5310	62	13.00	13.38	16.20	23.98	-7.78	4.65	20.85	30.00	-9.15
UNII-2C	5510	102	12.38	12.70	15.55	23.98	-8.43	6.64	22.19	30.00	-7.81
	5590	118	14.50	14.30	17.41	23.98	-6.57	6.64	24.05	30.00	-5.95
	5630	126	14.76	14.50	17.64	23.98	-6.34	6.64	24.28	30.00	-5.72
	5710	142	15.85	15.15	18.52	23.98	-5.46	6.64	25.16	30.00	-4.84
UNII-3	5755	151	17.55	17.00	20.29	30.00	-9.71	6.81	27.10	36.00	-8.90
	5795	159	18.73	18.05	21.41	30.00	-8.59	6.81	28.22	36.00	-7.78
UNII-4	5835	167	16.90	16.50	19.71	-	-	6.81	26.52	30.00	-3.48

Table 7-10. MIMO 20MHz BW 802.11be (40MHz) (UNII) Maximum Conducted Output Power

5GHz WIFI (80MHz 802.11ac MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5210	42	13.44	13.33	16.40	23.98	-7.58	3.04	19.44	30.00	-10.56
UNII-2A	5290	58	13.45	13.65	16.56	23.98	-7.42	4.65	21.21	30.00	-8.79
UNII-2C	5530	106	12.50	12.59	15.56	23.98	-8.42	6.64	22.20	30.00	-7.80
	5610	122	16.52	16.16	19.35	23.98	-4.63	6.64	25.99	30.00	-4.01
	5690	138	16.96	16.45	19.72	23.98	-4.26	6.64	26.36	30.00	-3.64
UNII-3	5775	155	14.89	14.31	17.62	30.00	-12.38	6.81	24.43	36.00	-11.57
UNII-4	5855	171	17.26	17.02	20.15	-	-	6.81	26.96	30.00	-3.04

Table 7-11. MIMO 20MHz BW 802.11ac (80MHz) (UNII) Maximum Conducted Output Power

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 21 of 54

5GHz WIFI (80MHz 802.11ax MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5210	42	13.52	13.45	16.50	23.98	-7.48	3.04	19.54	30.00	-10.46
UNII-2A	5290	58	13.56	13.79	16.69	23.98	-7.29	4.65	21.34	30.00	-8.66
UNII-2C	5530	106	12.60	12.63	15.63	23.98	-8.35	6.64	22.27	30.00	-7.73
	5610	122	16.58	16.17	19.39	23.98	-4.59	6.64	26.03	30.00	-3.97
	5690	138	16.53	16.00	19.28	23.98	-4.70	6.64	25.92	30.00	-4.08
UNII-3	5775	155	14.91	14.67	17.80	30.00	-12.20	6.81	24.61	36.00	-11.39
UNII-4	5855	171	17.20	17.09	20.16	-	-	6.81	26.97	30.00	-3.03

Table 7-12. MIMO 20MHz BW 802.11ax (80MHz) (UNII) Maximum Conducted Output Power

5GHz WIFI (80MHz 802.11be MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1	5210	42	13.52	13.32	16.43	23.98	-7.55	3.04	19.47	30.00	-10.53
UNII-2A	5290	58	13.50	13.75	16.64	23.98	-7.34	4.65	21.29	30.00	-8.71
UNII-2C	5530	106	12.50	12.69	15.61	23.98	-8.37	6.64	22.25	30.00	-7.75
	5610	122	16.65	16.13	19.41	23.98	-4.57	6.64	26.05	30.00	-3.95
	5690	138	16.55	16.00	19.29	23.98	-4.69	6.64	25.93	30.00	-4.07
UNII-3	5775	155	14.93	14.66	17.81	30.00	-12.19	6.81	24.62	36.00	-11.38
UNII-4	5855	171	17.21	17.02	20.13	-	-	6.81	26.94	30.00	-3.06

Table 7-13. MIMO 20MHz BW 802.11be (80MHz) (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11ac MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1/2A	5250	50	10.19	10.35	13.28	23.98	-10.70	4.65	17.93	30.00	-12.07
UNII-2C	5570	114	7.78	7.60	10.70	23.98	-13.28	6.64	17.34	30.00	-12.66
UNII-3/4	5815	163	11.70	11.50	14.61	30.00	-15.39	6.81	21.42	30.00	-8.58

Table 7-14. MIMO 20MHz BW 802.11ac (160MHz) (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11ax MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1/2A	5250	50	10.45	10.51	13.49	23.98	-10.49	4.65	18.14	30.00	-11.86
UNII-2C	5570	114	7.95	7.78	10.88	23.98	-13.10	6.64	17.52	30.00	-12.48
UNII-3/4	5815	163	11.67	11.51	14.60	30.00	-15.40	6.81	21.41	30.00	-8.59

Table 7-15. MIMO 20MHz BW 802.11ax (160MHz) (UNII) Maximum Conducted Output Power

5GHz WIFI (160MHz 802.11be MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]								
			ANT1	ANT2	MIMO						
UNII-1/2A	5250	50	10.32	10.45	13.40	23.98	-10.58	4.65	18.05	30.00	-11.95
UNII-2C	5570	114	7.95	7.75	10.86	23.98	-13.12	6.64	17.50	30.00	-12.50
UNII-3/4	5815	163	12.22	11.66	14.96	30.00	-15.04	6.81	21.77	30.00	-8.23

Table 7-16. MIMO 20MHz BW 802.11be (160MHz) (UNII) Maximum Conducted Output Power

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 22 of 54

7.3 Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies. All channels, modes, and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For transmitters operating in the 5.850 – 5.895 GHz band: all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of -5dBm/MHz and shall decrease linearly up to an e.i.r.p. of -27dBm/MHz at or above 5.925GHz, and all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27dBm/MHz at 5.65 GHz increasing linearly to 10dBm/MHz at 5.7GHz and from 5.7GHz increasing linearly to a level of 15.6dBm/MHz at 5.72GHz, and from 5.72GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in the table below per FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-17. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 – Sections 12.7.7.2, 12.7.6, 12.7.5 (Radiated Spurious Emissions)

ANSI C63.10:2020 – Section 12.7.4.4, 12.7.4.2 (Band Edge Measurements)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 23 of 54

Test Settings – Above 1GHz

Average Field Strength Measurements (Method AD – Average Detection)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 24 of 54

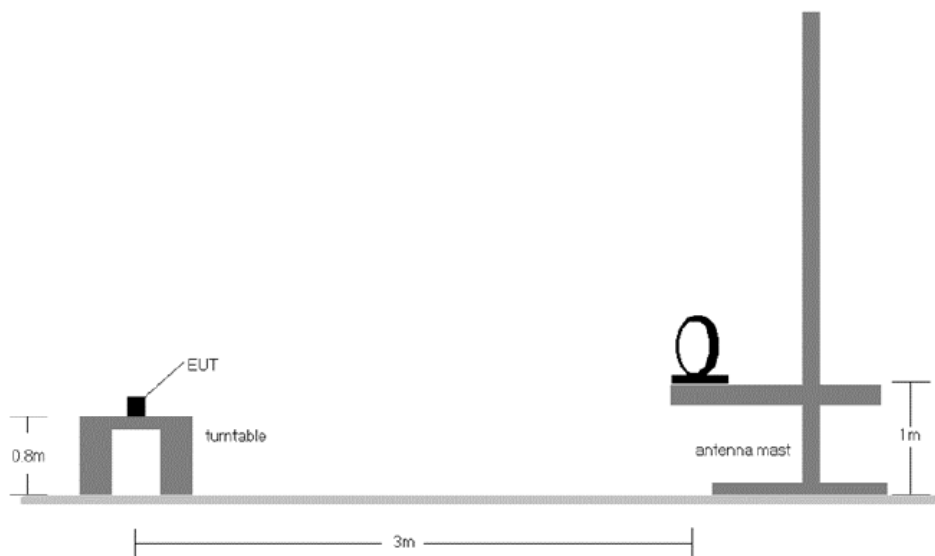


Figure 7-2. Radiated Test Setup < 30MHz

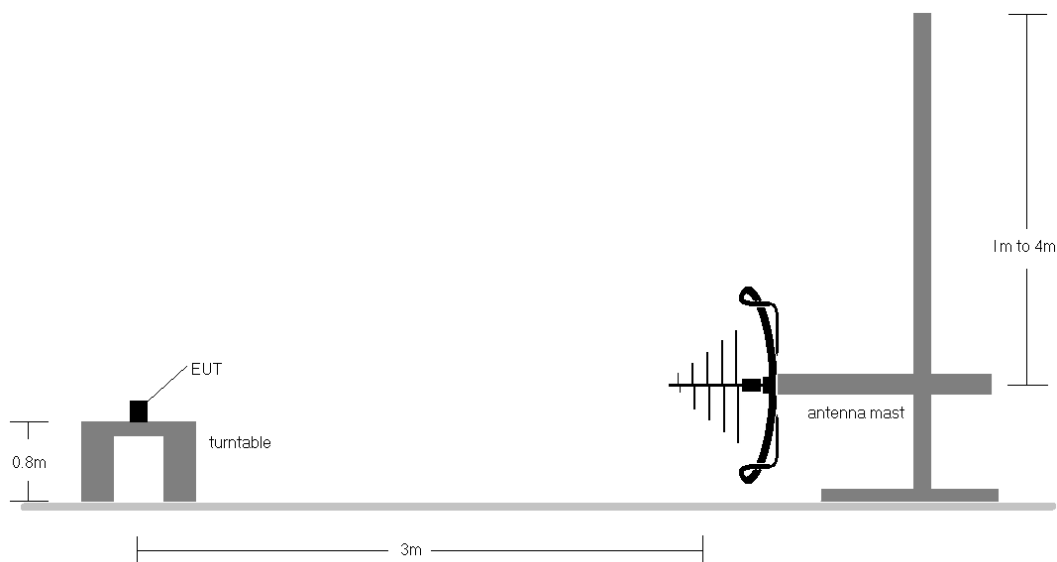


Figure 7-3. Radiated Test Setup < 1GHz

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 25 of 54

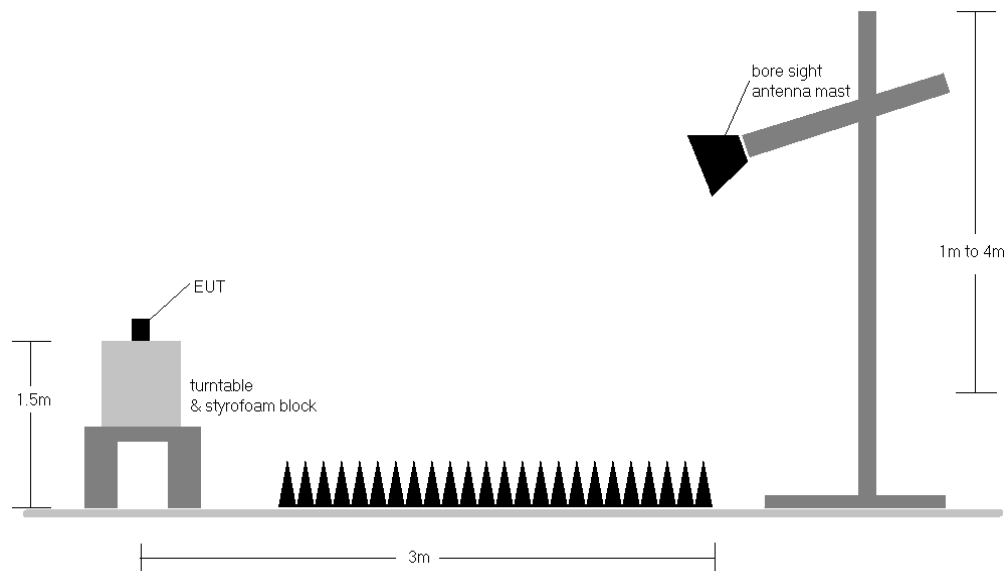


Figure 7-4. Radiated Test Setup > 1GHz



Figure 7-5. Conducted Test Setup for Band Edge > 1GHz

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 26 of 54

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limits shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
8. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.
9. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. Restricted Band Edge testing was performed using a conducted setup per C63.10:2020 12.7.4.2. The spectra output by each antenna were summed per C63.10:2020 14.5.2.2. Correlated directional antenna gain was added to determine an EIRP level, which was then converted to field strength at 3m, per the below sample calculation.
11. Restricted Band Edge test cases were determined based on the original filing for the module, and by the manufacturer provided document Host Test Plan for Limited Module.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 27 of 54


- $\text{Margin}_{[\text{dB}]} = \text{Field Strength Level}_{[\text{dB}\mu\text{V/m}]} - \text{Limit}_{[\text{dB}\mu\text{V/m}]}$

Conducted Band Edge Field Strength Conversion


- $\text{Field Strength Level}_{[\text{dB}\mu\text{V/m}]} = \text{EIRP}_{[\text{dBm}]} + 95.2$
 $= \text{Conducted Emission}_{[\text{dBm}]} + \text{Directional Gain}_{[\text{dBi}]} + 95.2$

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 28 of 54


7.3.1 MIMO Radiated Spurious Emission Measurements

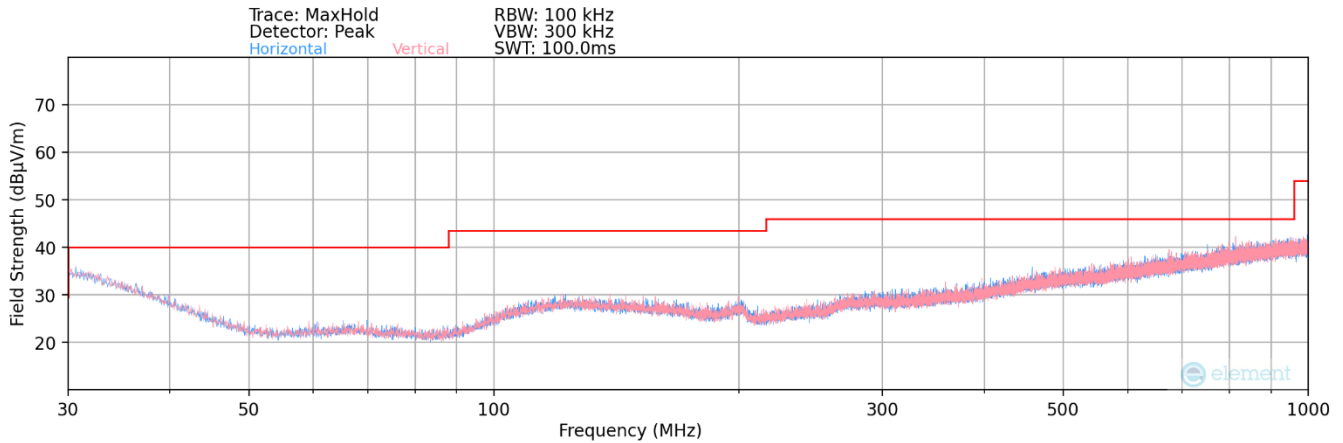

Plot 7-1. Radiated Spurious Plot below 1GHz MIMO (802.11n – Ch.40)

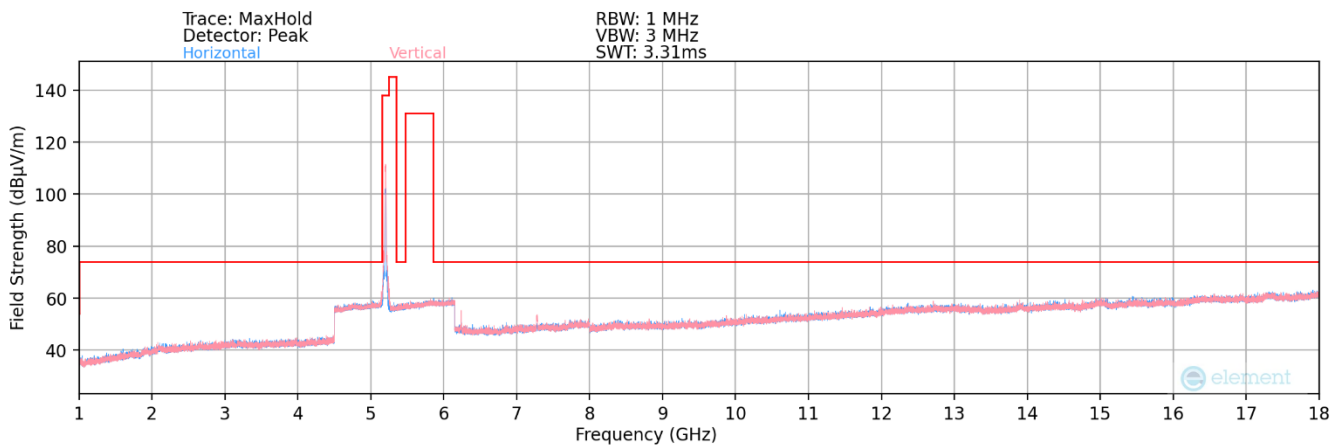


Plot 7-2. Radiated Spurious Plot above 1GHz MIMO (802.11n – UNII Band 1 Ch. 40)

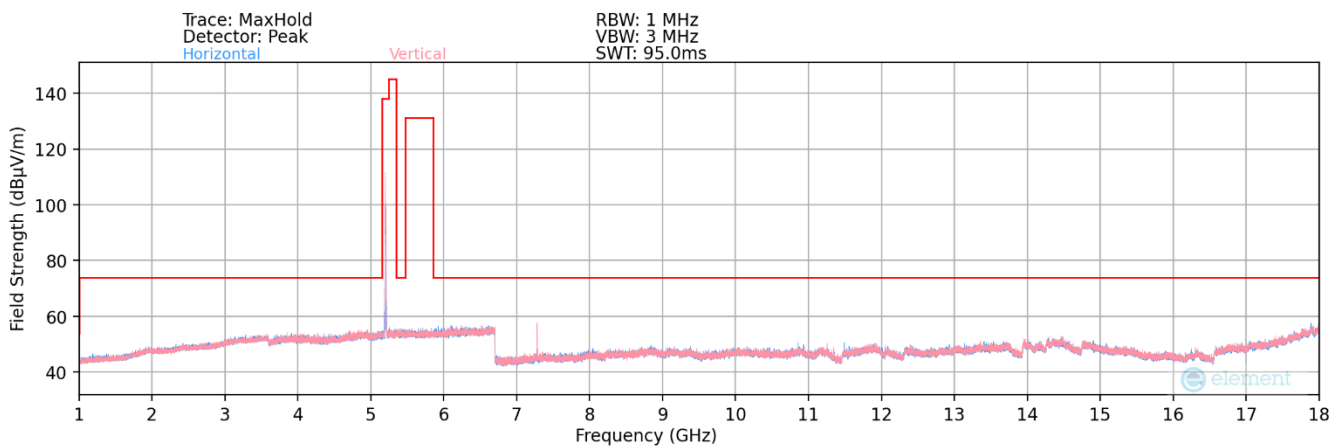


Plot 7-3. Radiated Spurious Plot above 1GHz MIMO (802.11be – UNII Band 1 Ch. 40 – 52T)


FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 29 of 54

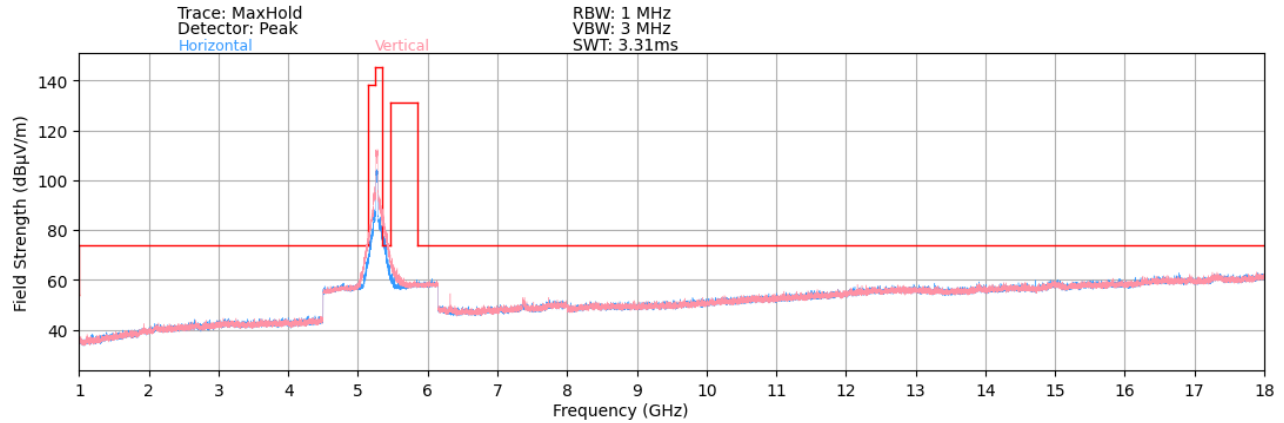

Plot 7-4. Radiated Spurious Plot above 1GHz MIMO (802.11n – UNII Band 2A Ch. 54)

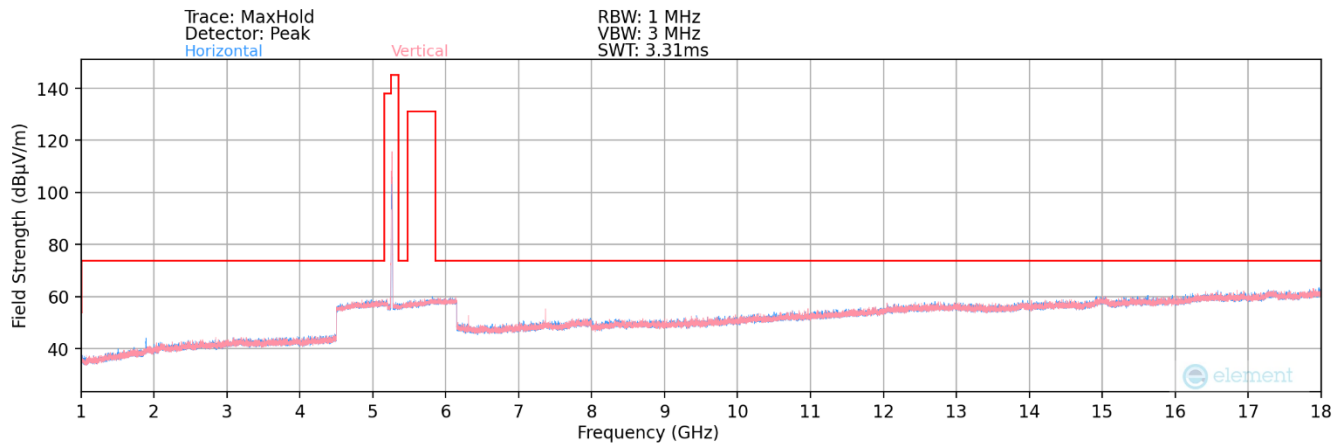


Plot 7-5. Radiated Spurious Plot above 1GHz MIMO (802.11be – UNII Band 2A Ch. 52 – 52T)

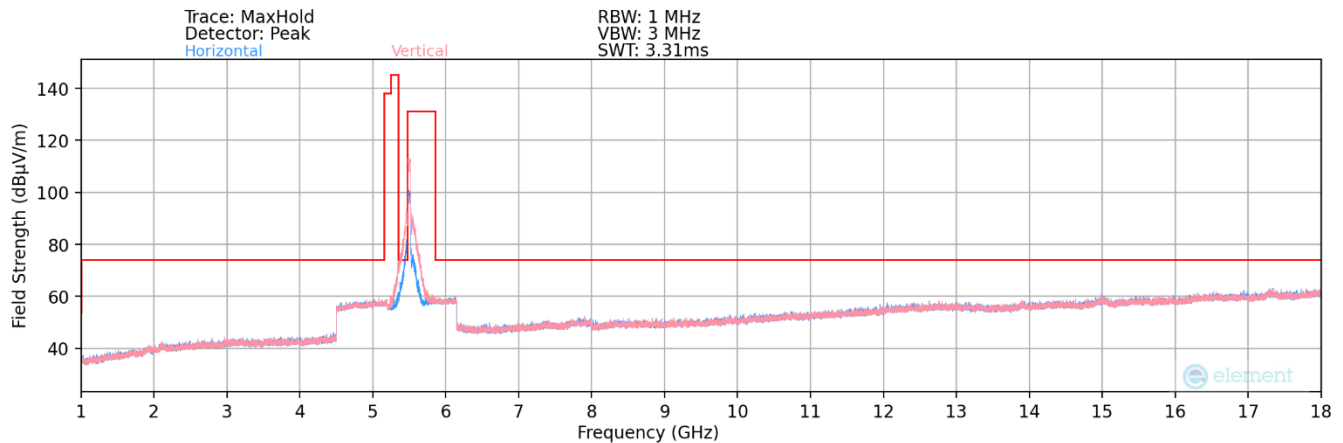


Plot 7-6. Radiated Spurious Plot above 1GHz MIMO (802.11n – UNII Band 2C Ch. 110)


FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 30 of 54

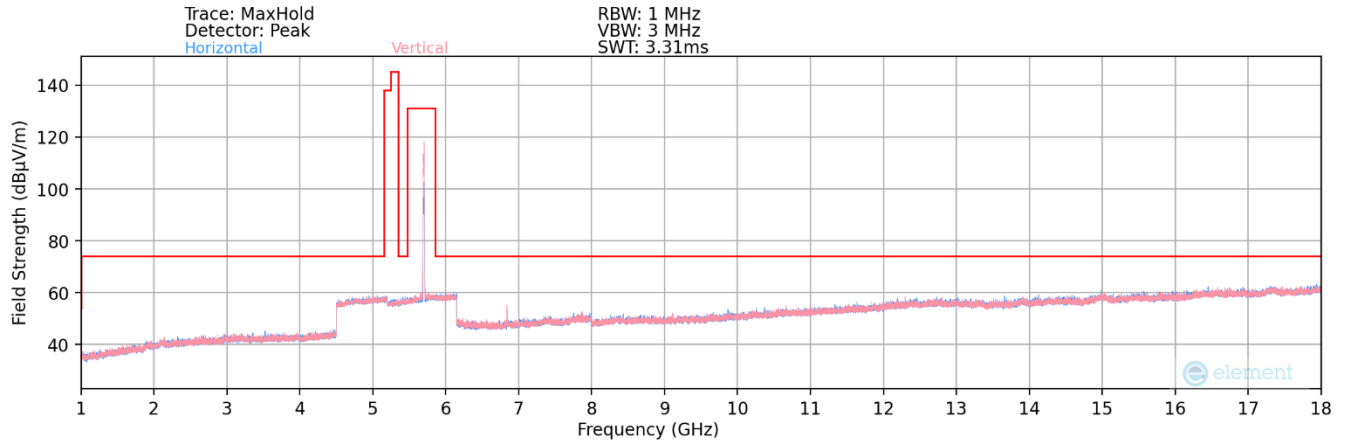

Plot 7-7. Radiated Spurious Plot above 1GHz MIMO (802.11be – UNII Band 2C Ch. 140)

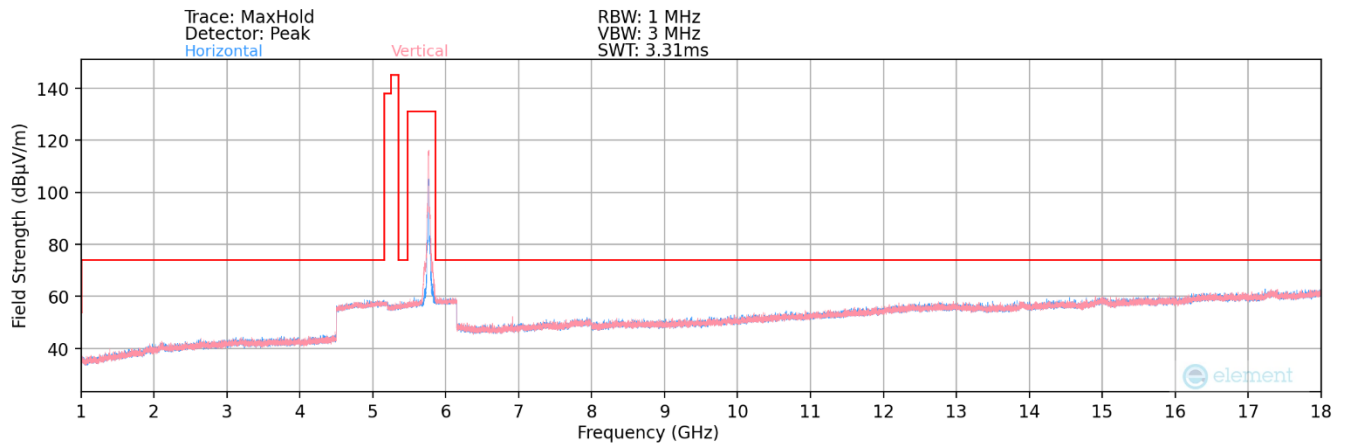


Plot 7-8. Radiated Spurious Plot above 1GHz MIMO (802.11n – UNII Band 3 Ch. 153)

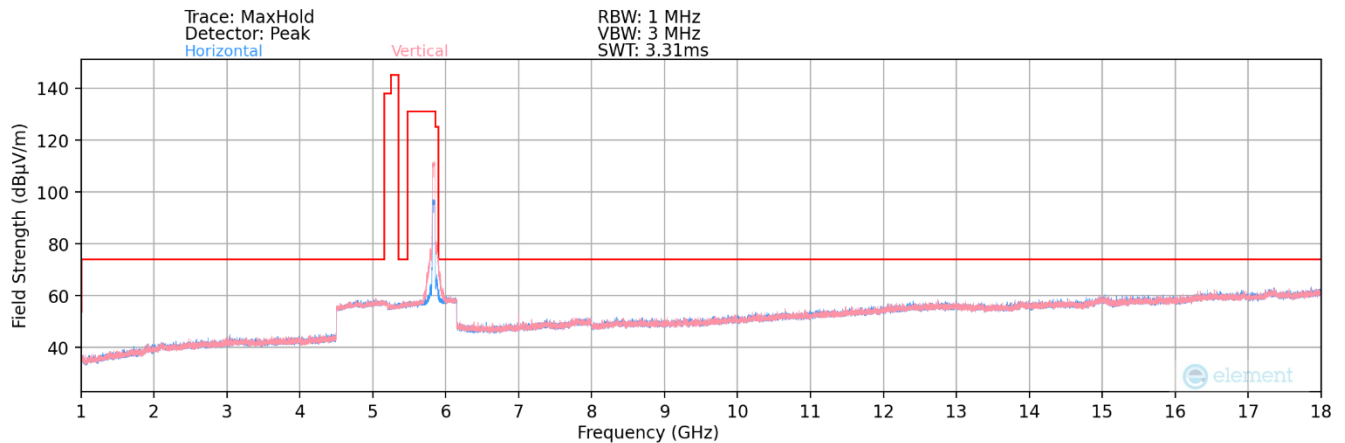


Plot 7-9. Radiated Spurious Plot above 1GHz MIMO (802.11n – UNII Band 4 Ch. 167)


FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 31 of 54

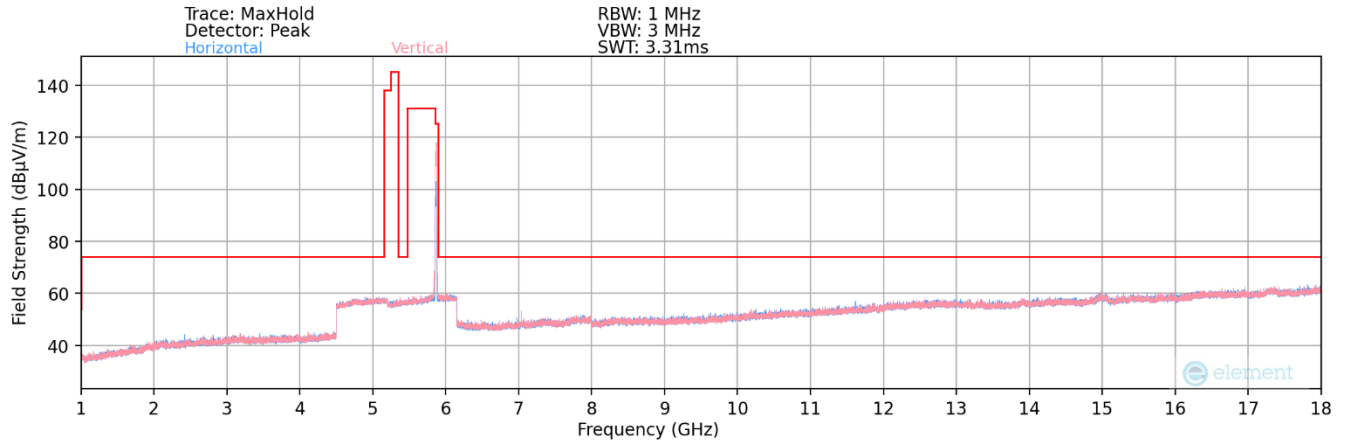

Plot 7-10. Radiated Spurious Plot above 1GHz MIMO (802.11be – UNII Band 4 Ch. 173 – 106T)

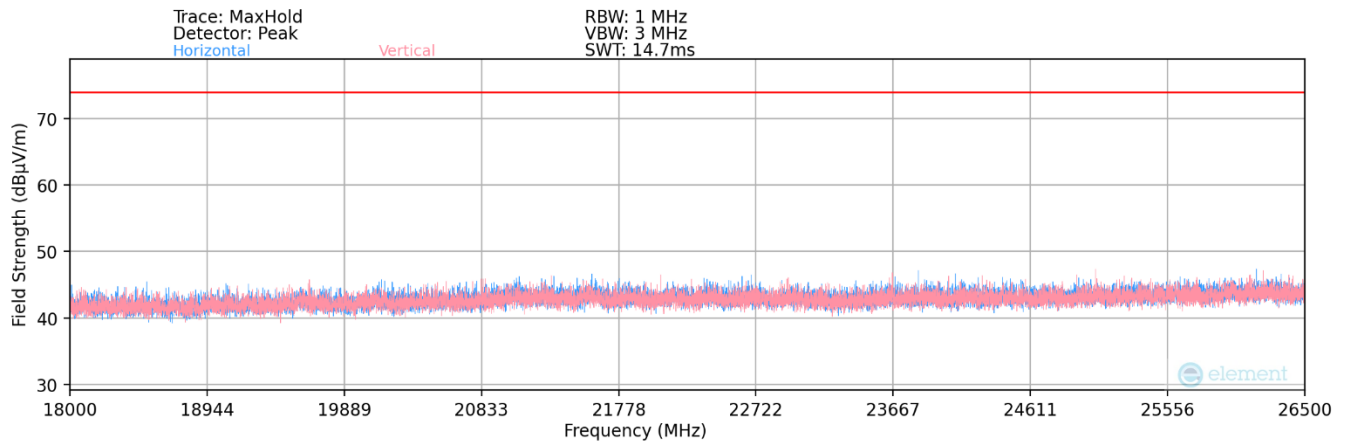

Plot 7-11. Radiated Spurious Plot 18GHz – 26.5GHz MIMO (802.11n – Ch.40)

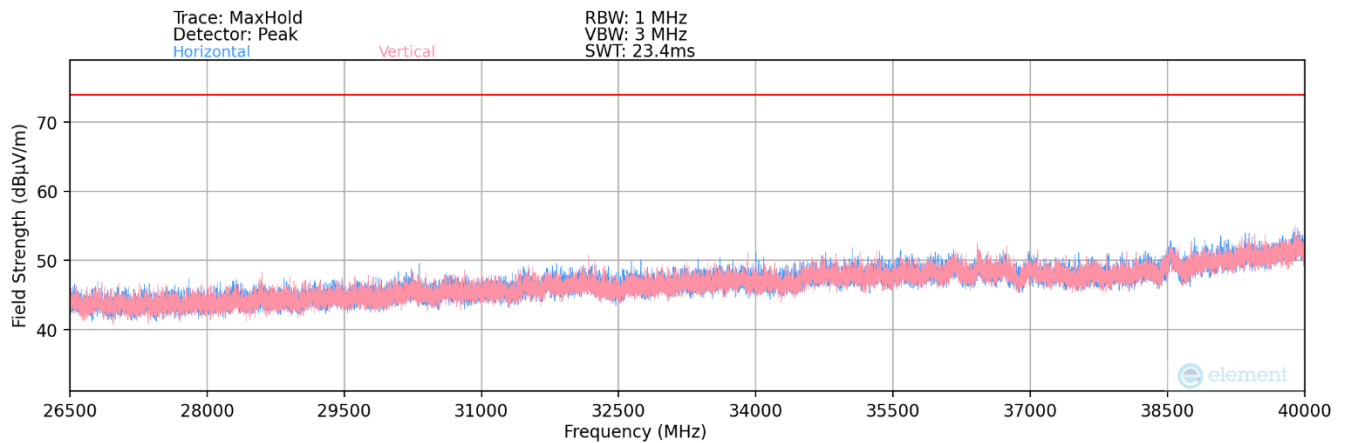

Plot 7-12. Radiated Spurious Plot 26.5GHz – 40GHz MIMO (802.11n – Ch.40)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 32 of 54

MIMO Radiated Spurious Emission Measurements – UNII Band 1

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	1	40	5200	*	7273.00	Average	V	174	178	-62.98	4.66	0.00	48.68	53.98	-5.30
					*	7273.00	Peak	V	174	178	-53.20	4.66	0.00	58.46	73.98	-15.52
						10400.00	Peak	V	-	-	-66.68	9.11	0.00	49.43	68.20	-18.77
					*	15600.00	Average	V	-	-	-77.33	8.29	0.00	37.96	53.98	-16.02
					*	15600.00	Peak	V	-	-	-65.07	8.29	0.00	50.22	73.98	-23.76
					*	20800.00	Average	V	-	-	-62.01	3.23	-9.54	38.68	53.98	-15.30
					*	20800.00	Peak	V	-	-	-50.84	3.23	-9.54	49.85	73.98	-24.13
						26000.00	Peak	V	-	-	-51.08	4.07	-9.54	50.45	68.20	-17.75

Table 7-18. Radiated Measurements MIMO

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	1	40	5200	199.55	Quasi-Peak	V	-	-	-91.40	19.43	35.03	43.52	-8.49

Table 7-19. Radiated Measurements MIMO below 1GHz

Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40
RU Index: 37

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	1	40	5200	37	*	7279.50	Average	V	362	22	-58.68	4.65	0.00	52.97	53.98	-1.01
						*	7279.50	Peak	V	362	22	-49.02	4.65	0.00	62.63	73.98	-11.35
							10400.00	Peak	V	-	-	-66.78	9.11	0.00	49.33	68.00	-18.67
						*	15600.00	Average	V	-	-	-77.27	8.29	0.00	38.02	53.98	-15.96
						*	15600.00	Peak	V	-	-	-64.58	8.29	0.00	50.71	73.98	-23.27
						*	20800.00	Average	V	-	-	-62.20	3.23	-9.54	38.49	53.98	-15.49
						*	20800.00	Peak	V	-	-	-51.60	3.23	-9.54	49.09	73.98	-24.89
							26000.00	Peak	V	-	-	-51.15	4.07	-9.54	50.38	68.20	-17.82

Table 7-20. Radiated Measurements MIMO – 802.11be 52T

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 33 of 54

MIMO Radiated Spurious Emission Measurements – UNII Band 2A

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	2A	56	5280	*	7387.00	Average	V	176	248	-64.63	4.70	0.00	47.07	53.98	-6.91
					*	7387.00	Peak	V	176	248	-54.33	4.70	0.00	57.37	73.98	-16.61
						10560.00	Peak	V	-	-	-65.85	8.16	0.00	49.31	68.20	-18.89
					*	15840.00	Average	V	-	-	-78.64	8.54	0.00	36.90	53.98	-17.08
					*	15840.00	Peak	V	-	-	-66.53	8.54	0.00	49.01	73.98	-24.97
					*	21120.00	Average	V	-	-	-62.57	3.60	-9.54	38.49	53.98	-15.49
					*	21120.00	Peak	V	-	-	-51.41	3.60	-9.54	49.65	73.98	-24.33
						26400.00	Peak	V	-	-	-50.52	3.64	-9.54	50.58	68.20	-17.62

Table 7-21. Radiated Measurements MIMO

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52
 RU Index: 39

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	2A	52	5260	39	*	7391.50	Average	V	162	176	-63.82	4.63	0.00	47.81	53.98	-6.17
						*	7391.50	Peak	V	162	176	-53.16	4.63	0.00	58.47	73.98	-15.51
							10520.00	Peak	V	-	-	-65.78	8.16	0.00	49.38	68.20	-18.82
						*	15780.00	Average	V	-	-	-78.61	8.54	0.00	36.93	53.98	-17.05
						*	15780.00	Peak	V	-	-	-66.43	8.54	0.00	49.11	73.98	-24.87
						*	21040.00	Average	V	-	-	-62.42	3.60	-9.54	38.64	53.98	-15.34
						*	21040.00	Peak	V	-	-	-51.63	3.60	-9.54	49.43	73.98	-24.55
							26300.00	Peak	V	-	-	-51.43	3.64	-9.54	49.67	68.20	-18.53

Table 7-22. Radiated Measurements MIMO – 802.11be 52T

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 34 of 54

MIMO Radiated Spurious Emission Measurements – UNII Band 2C

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5600MHz
Channel: 120

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	2C	120	5600	*	11200.00	Average	V	-	-	-78.11	8.88	0.00	37.77	53.98	-16.21
					*	11200.00	Peak	V	-	-	-66.05	8.88	0.00	49.83	73.98	-24.15
						16800.00	Peak	V	-	-	-66.28	10.94	0.00	51.66	68.20	-16.54
					*	22400.00	Average	V	-	-	-62.11	3.66	-9.54	39.01	53.98	-14.97
					*	22400.00	Peak	V	-	-	-50.02	3.66	-9.54	51.10	73.98	-22.88
						28000.00	Peak	V	-	-	-51.47	4.35	-9.54	50.34	68.20	-17.86

Table 7-23. Radiated Measurements MIMO

Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5700MHz
Channel: 140
RU Index: 37

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	2C	140	5700	37	*	11400.00	Average	V	-	-	-78.32	9.16	0.00	37.84	53.98	-16.14
						*	11400.00	Peak	V	-	-	-66.25	9.16	0.00	49.91	73.98	-24.07
							17100.00	Peak	V	-	-	-65.76	12.50	0.00	53.74	68.20	-14.46
						*	22800.00	Average	V	-	-	-62.55	3.60	-9.54	38.51	53.98	-15.47
						*	22800.00	Peak	V	-	-	-51.32	3.60	-9.54	49.74	73.98	-24.24
							28500.00	Peak	V	-	-	-51.43	4.74	-9.54	50.77	68.20	-17.43

Table 7-24. Radiated Measurements MIMO – 802.11be 52T

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 35 of 54

MIMO Radiated Spurious Emission Measurements – UNII Band 3

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5765MHz
 Channel: 153

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	3	157	5785		6942.00	Peak	V	374	22	-52.94	3.88	0.00	57.94	68.20	-10.26
					*	11570.00	Average	V	-	-	-78.11	9.47	0.00	38.36	53.98	-15.62
					*	11570.00	Peak	V	-	-	-66.11	9.47	0.00	50.36	73.98	-23.62
						17355.00	Peak	V	-	-	-64.54	12.97	0.00	55.43	68.20	-12.77
						23140.00	Peak	V	-	-	-50.76	3.59	-9.54	50.29	68.20	-17.91
						28925.00	Peak	V	-	-	-52.23	4.92	-9.54	50.15	68.20	-18.05

Table 7-25. Radiated Measurements MIMO

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157
 RU Index: 37

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	3	157	5785	37		6942.00	Peak	V	387	21	-51.00	3.88	0.00	59.88	68.20	-8.32
						*	11570.00	Average	V	198	175	-76.90	9.47	0.00	39.57	53.98	-14.41
						*	11570.00	Peak	V	198	175	-65.06	9.47	0.00	51.41	73.98	-22.57
							17355.00	Peak	V	138	213	-60.37	12.97	0.00	59.60	68.20	-8.60
							23140.00	Peak	V	-	-	-50.98	3.59	-9.54	50.07	68.20	-18.13
							28925.00	Peak	V	-	-	-52.88	4.92	-9.54	49.50	68.20	-18.70

Table 7-26. Radiated Measurements MIMO – 802.11be 52T

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 36 of 54	

MIMO Radiated Spurious Emission Measurements – UNII Band 4

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5865MHz
 Channel: 173

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	4	173	5865		7038.00	Peak	V	143	184	-55.34	3.00	0.00	54.66	68.20	-13.54
					*	11730.00	Average	V	-	-	-78.83	10.05	0.00	38.22	53.98	-15.76
					*	11730.00	Peak	V	-	-	-66.51	10.05	0.00	50.54	73.98	-23.44
						17595.00	Peak	V	-	-	-66.05	14.97	0.00	55.92	68.20	-12.28
						23460.00	Peak	V	-	-	-51.41	3.47	-9.54	49.52	68.20	-18.68
						29325.00	Peak	V	-	-	-51.55	5.24	-9.54	51.15	68.20	-17.05

Table 7-27. Radiated Measurements MIMO

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5865MHz
 Channel: 173
 RU Index: 37

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	4	173	5865	37		7038.00	Peak	V	159	181	-56.09	3.00	0.00	53.91	68.20	-14.29
						*	11730.00	Average	V	-	-	-78.88	10.05	0.00	38.17	53.98	-15.81
						*	11730.00	Peak	V	-	-	-66.92	10.05	0.00	50.13	73.98	-23.85
							17595.00	Peak	V	-	-	-65.93	14.97	0.00	56.04	68.20	-12.16
							23460.00	Peak	V	-	-	-51.71	3.47	-9.54	49.22	68.20	-18.98
							29325.00	Peak	V	-	-	-52.08	5.24	-9.54	50.62	68.20	-17.58


Table 7-28. Radiated Measurements MIMO – 802.11be 52T

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 37 of 54	

The restricted band edge measurements are measured with an EMI test receiver connected to the EUT while transmitting. The test cases for restricted band edge measurements are based on the manufacturer's "Host test requirements for WIFI_BT module" document.

MIMO Band Edge Measurements (20MHz BW)


Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz

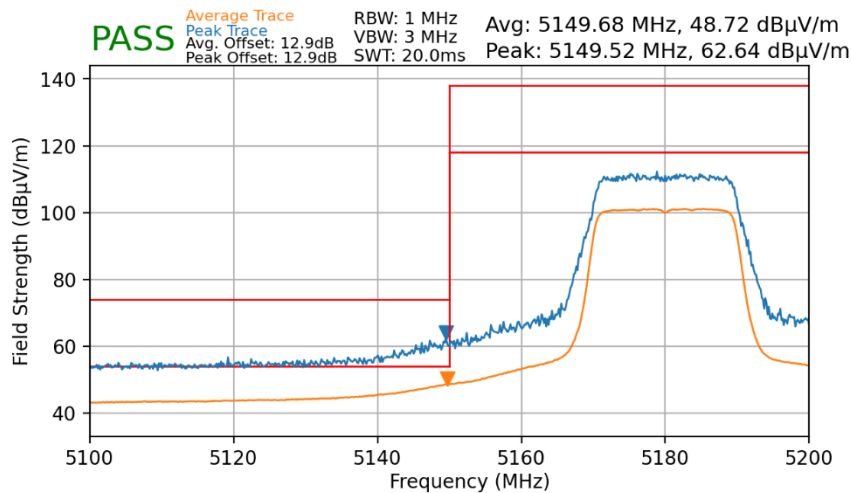

Plot 7-13. Lower Band Edge Plot MIMO (UNII Band 1)


FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 38 of 54

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 RU Index: 53

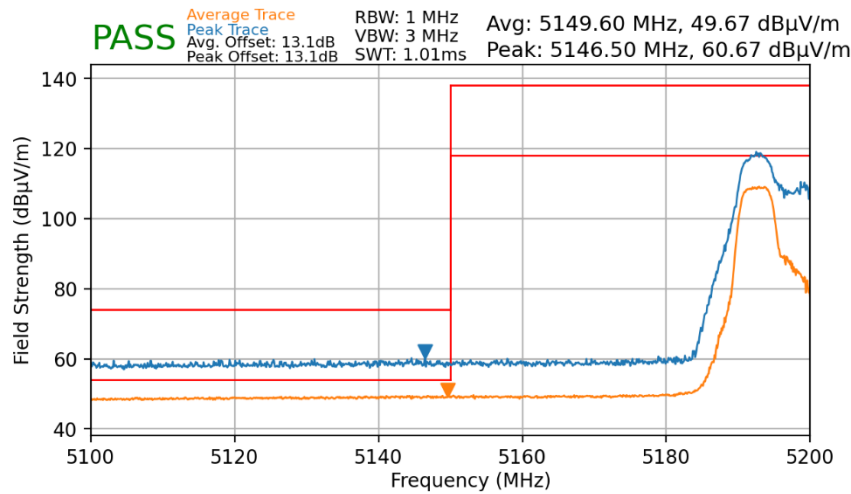

Plot 7-14. Lower Band Edge Plot MIMO (UNII Band 1) - OFDMA


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz

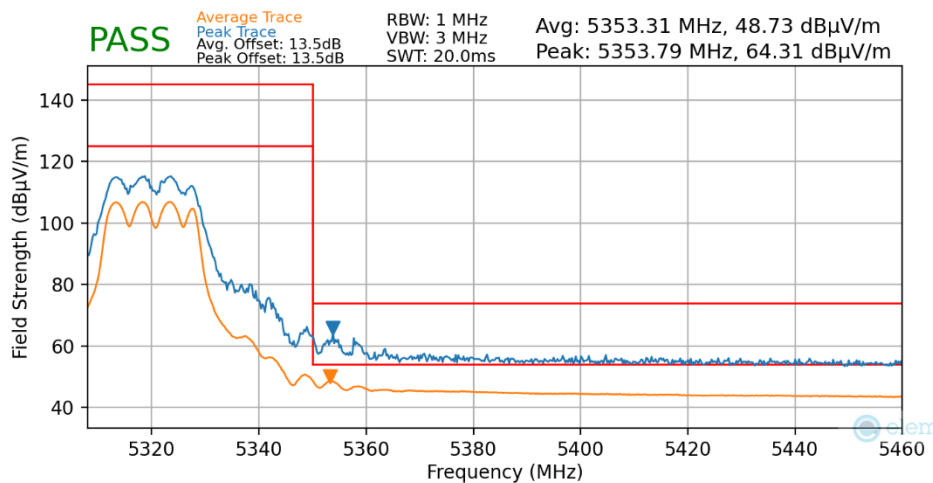

Plot 7-15. Upper Band Edge Plot MIMO (UNII Band 2A)


FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 39 of 54

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5260MHz
 RU: 53

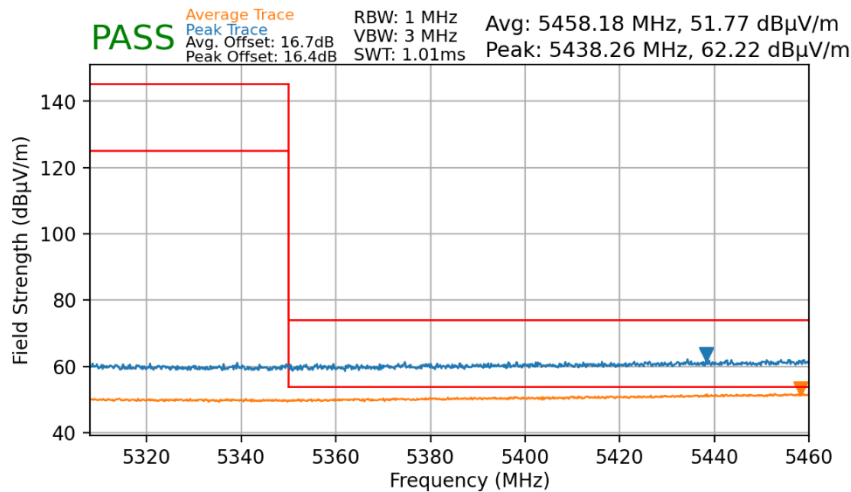

Plot 7-16. Upper Band Edge Plot MIMO (UNII Band 2A) - OFDMA

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz

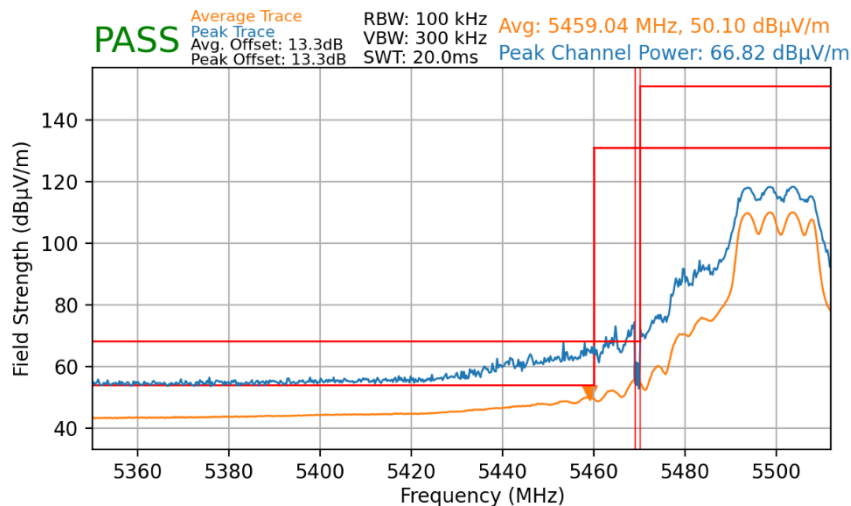

Plot 7-17. Lower Band Edge Plot MIMO (UNII Band 2C)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 40 of 54		


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5765MHz



Plot 7-18. Upper Band Edge Plot MIMO (Peak – UNII Band 3)


FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 41 of 54

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5865MHz

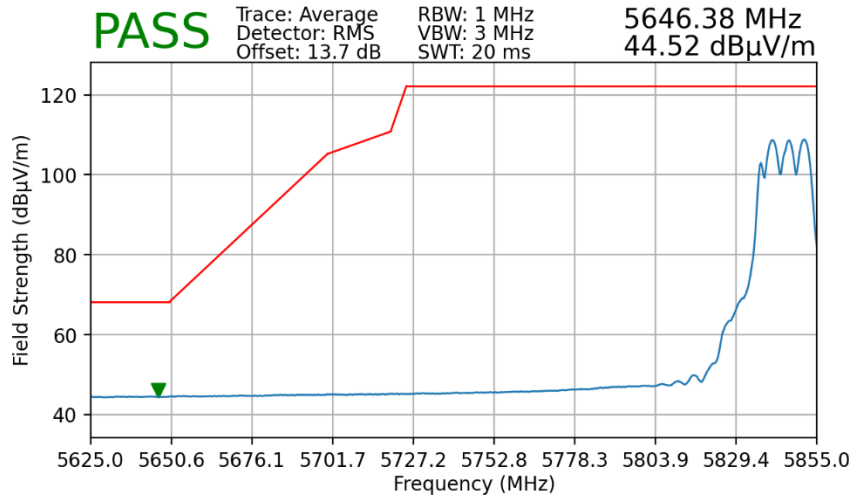

Plot 7-19. Lower Band Edge Plot MIMO (Peak – UNII Band 4)

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5865MHz

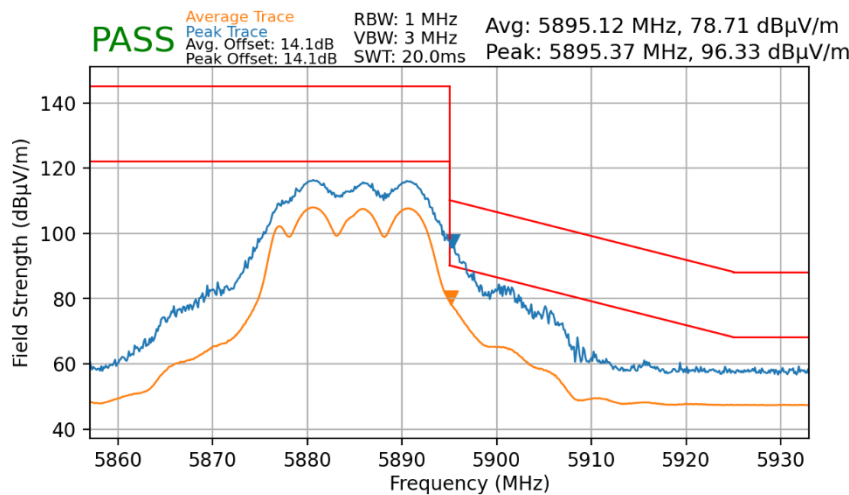


Plot 7-20. Upper Band Edge Plot MIMO (UNII Band 4)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 42 of 54


7.3.2 MIMO Band Edge Measurements (40MHz BW)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5270MHz

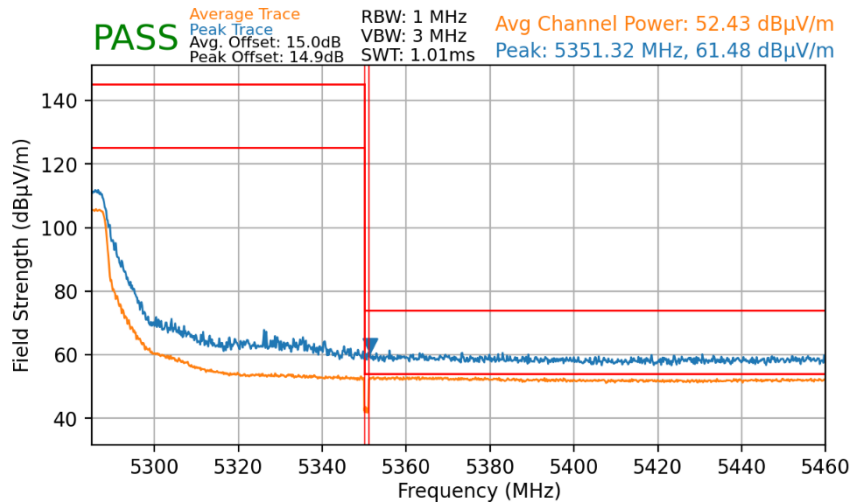

Plot 7-21. Upper Band Edge Plot MIMO (Average – UNII Band 2A)


Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5550MHz

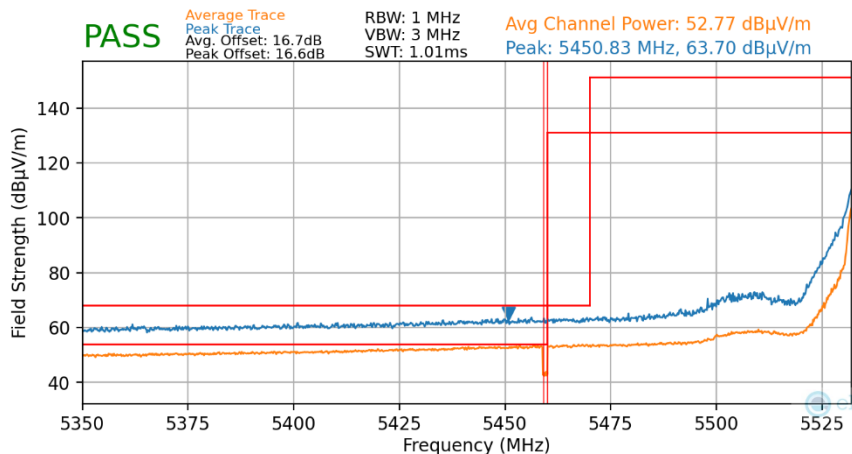

Plot 7-22. Lower Band Edge Plot MIMO (UNII Band 2C)


FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 43 of 54

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5835MHz

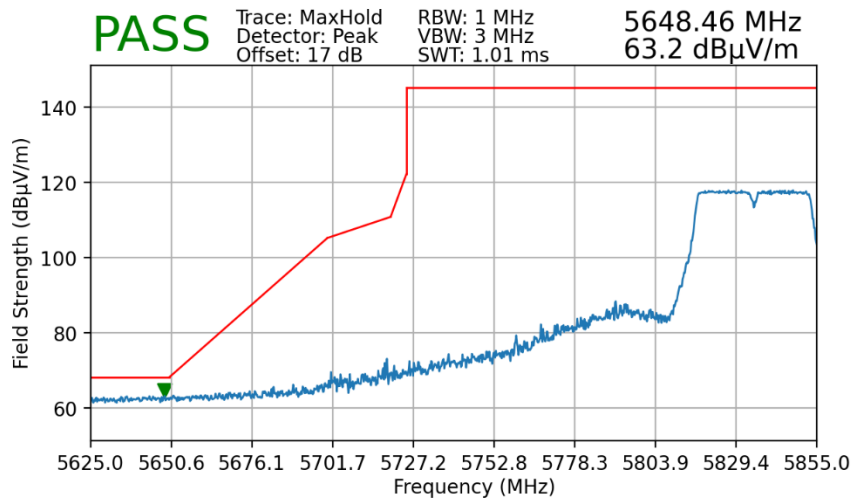

Plot 7-23. Lower Band Edge Plot MIMO (Peak – UNII Band 4)

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5875MHz

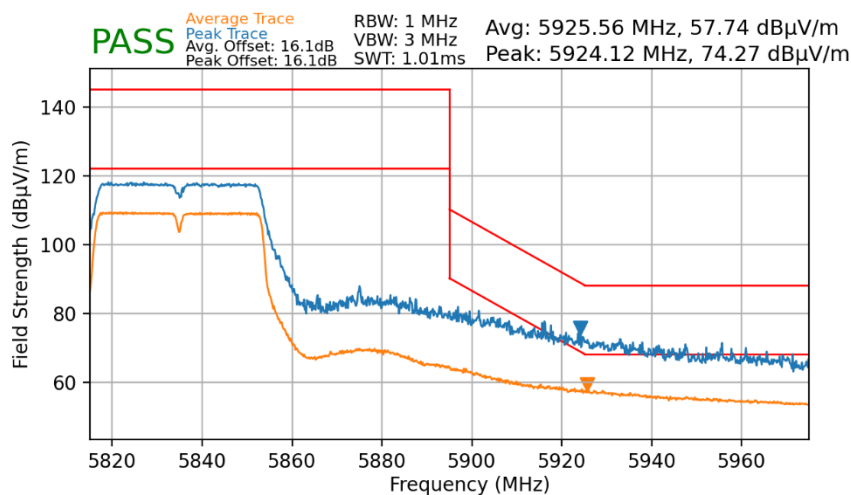


Plot 7-24. Upper Band Edge Plot MIMO (UNII Band 4)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 44 of 54

7.3.3 MIMO Band Edge Measurements (80MHz BW)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5775MHz

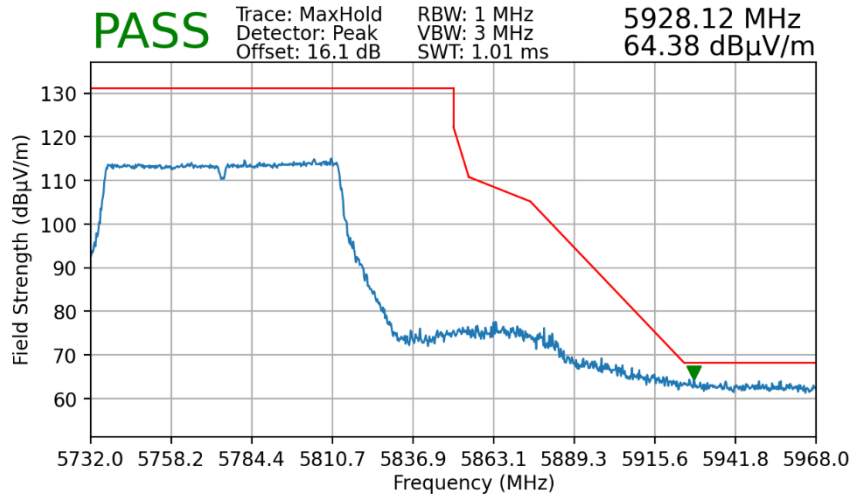


Plot 7-25. Lower Band Edge Plot MIMO (Peak – UNII Band 3)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 45 of 54

7.3.4 MIMO Band Edge Measurements (160MHz BW)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5250MHz
Channel:	50

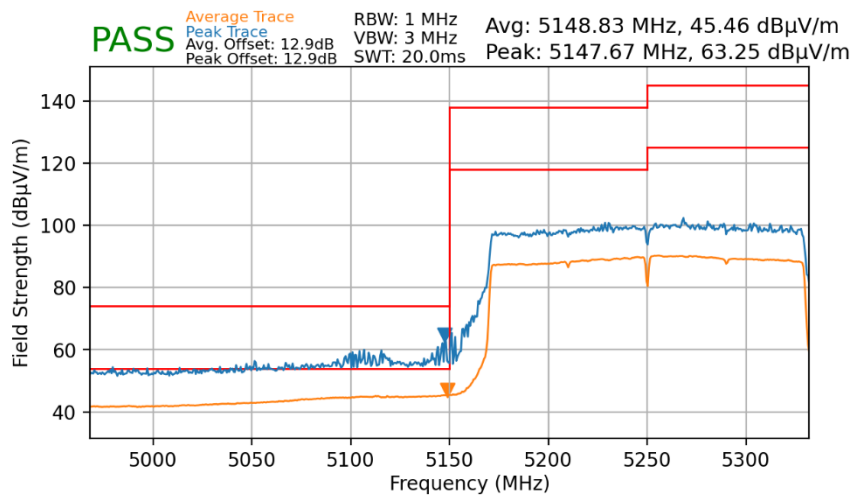

Plot 7-26. Lower Band Edge Plot MIMO (UNII Band 1)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 46 of 54

7.4 Line-Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst-case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per FCC §15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-29. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 47 of 54

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


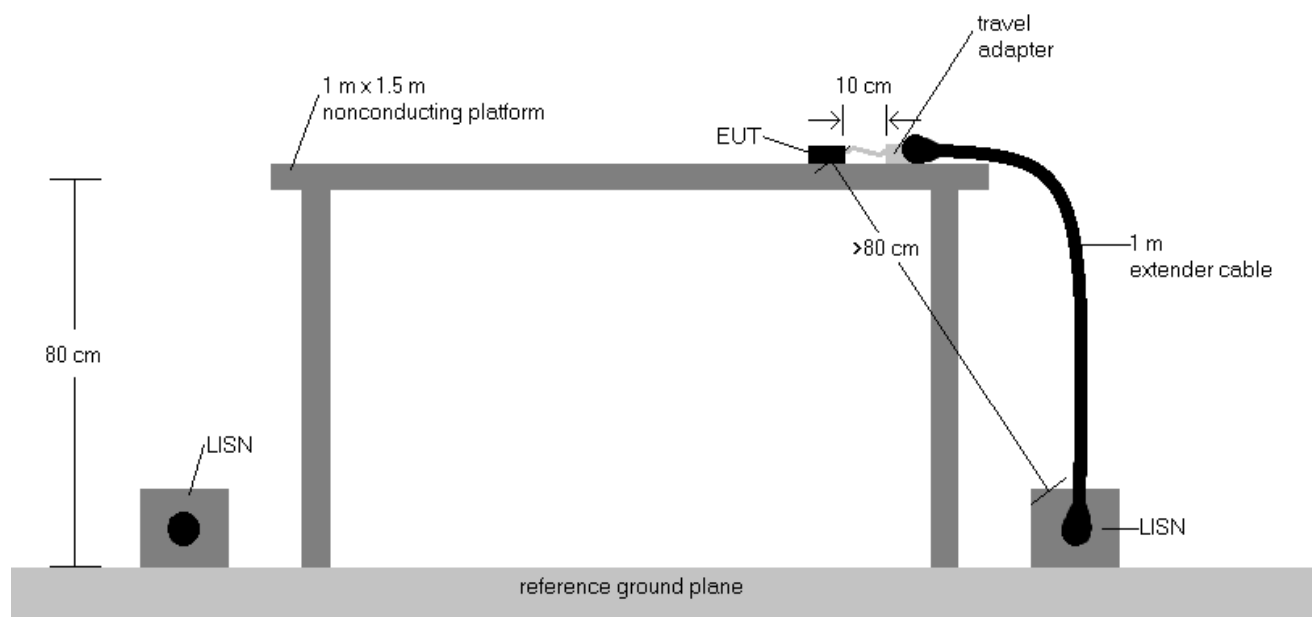


Figure 7-6. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz is specified in §15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 48 of 54

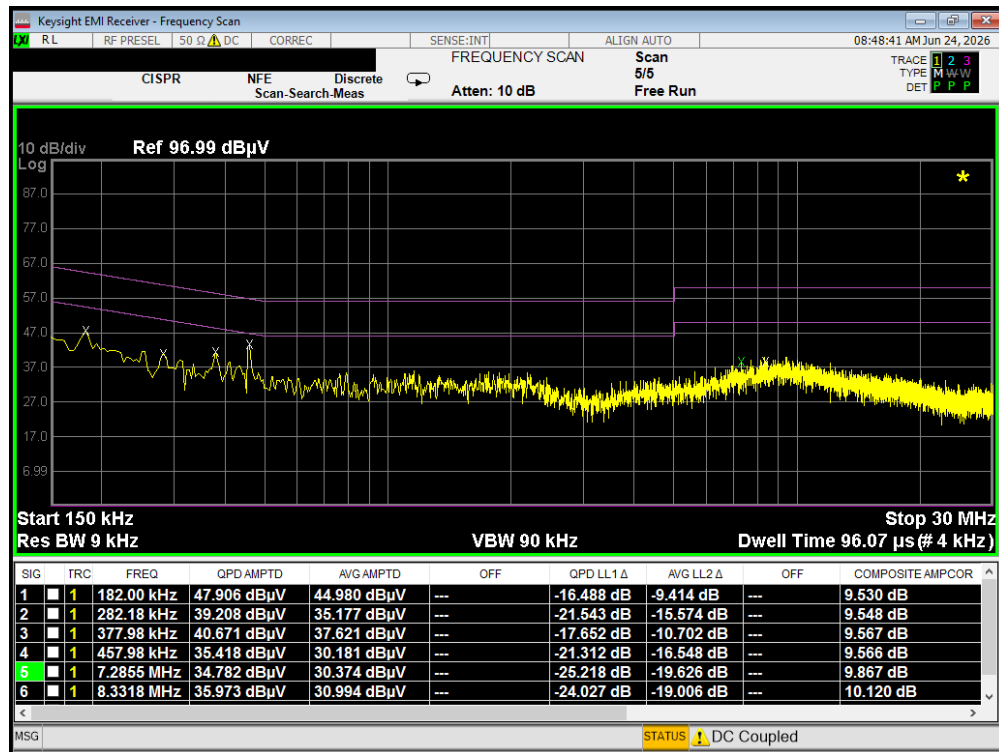


Plot 7-27. Line Conducted Plot with 802.11a UNII Band 1 – Ch.40 (L1)

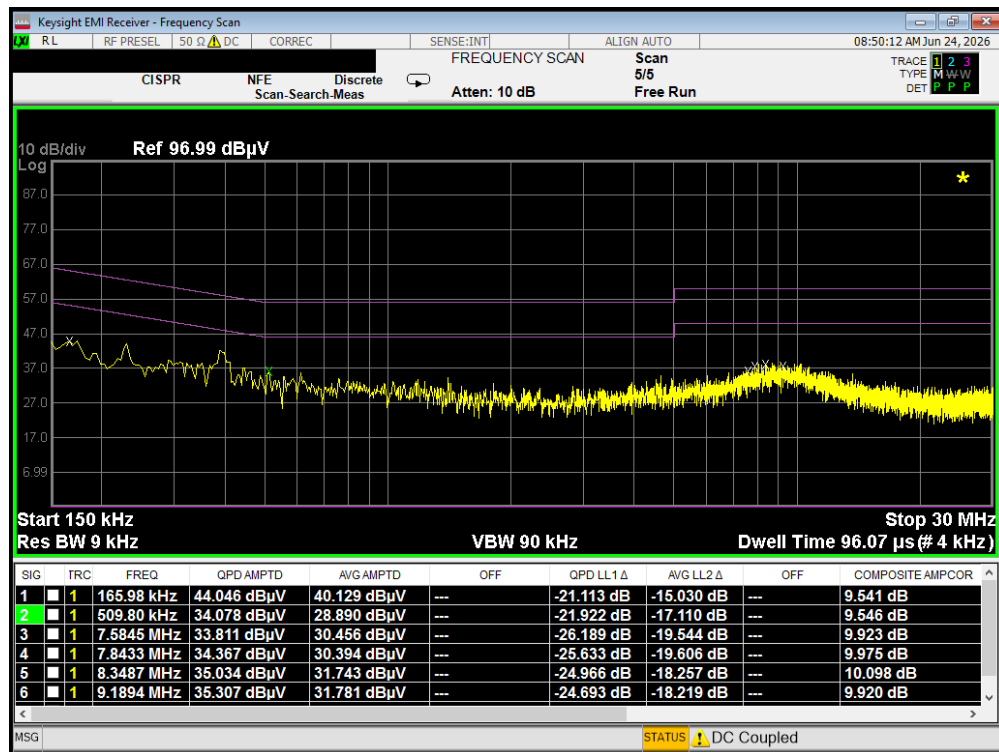


Plot 7-28. Line Conducted Plot with 802.11a UNII Band 1 – Ch.40 (N)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 49 of 54

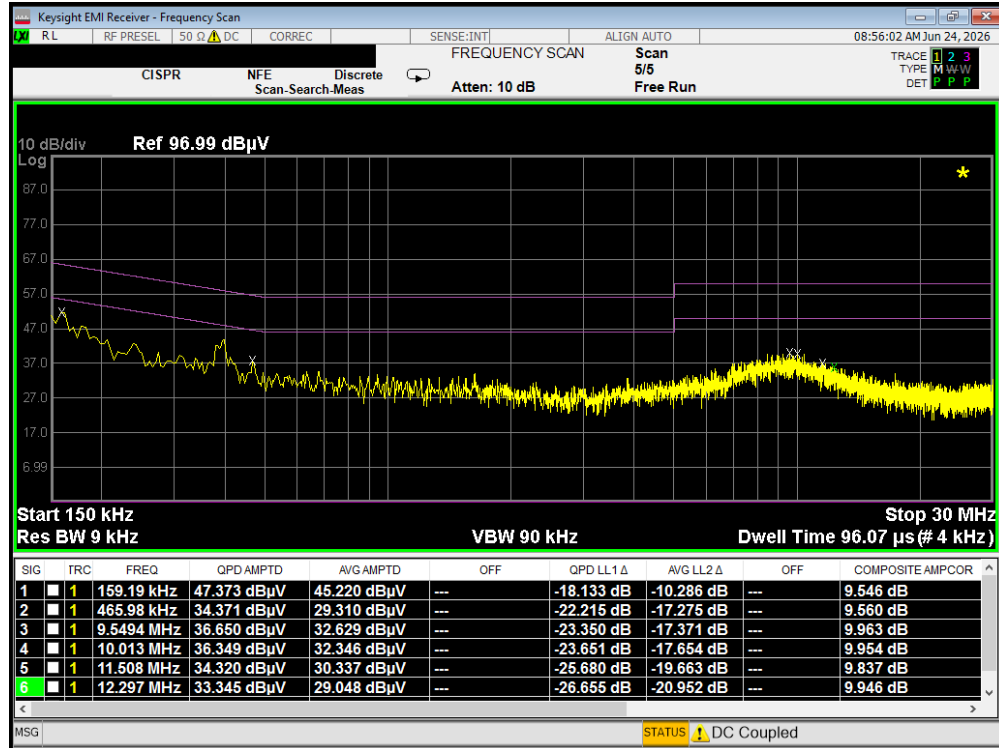


Plot 7-29. Line Conducted Plot with 802.11a UNII Band 2A – Ch.56 (L1)

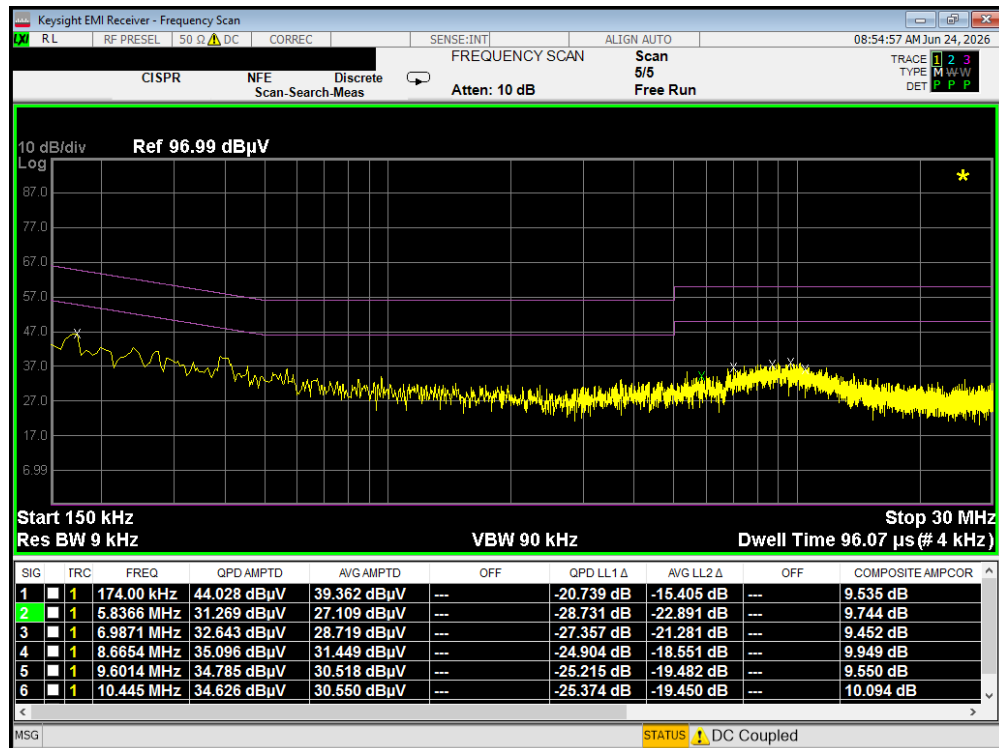


Plot 7-30. Line Conducted Plot with 802.11a UNII Band 2A – Ch.56 (N)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 50 of 54

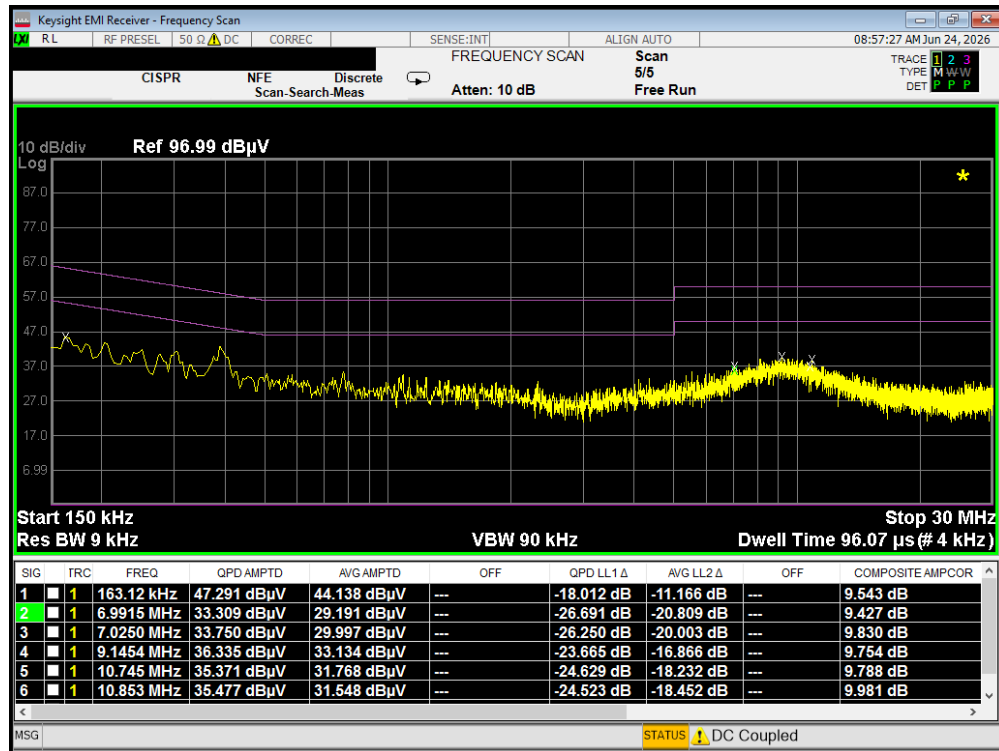


Plot 7-31. Line Conducted Plot with 802.11a UNII Band 2C – Ch.120 (L1)

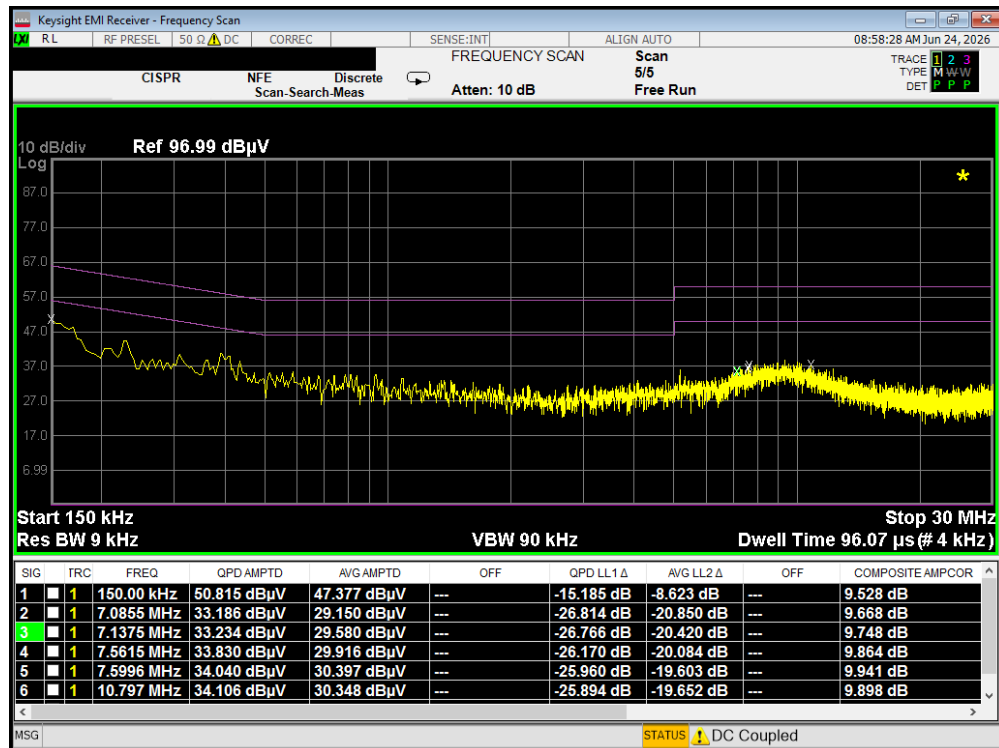


Plot 7-32. Line Conducted Plot with 802.11a UNII Band 2C – Ch.120 (N)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 51 of 54

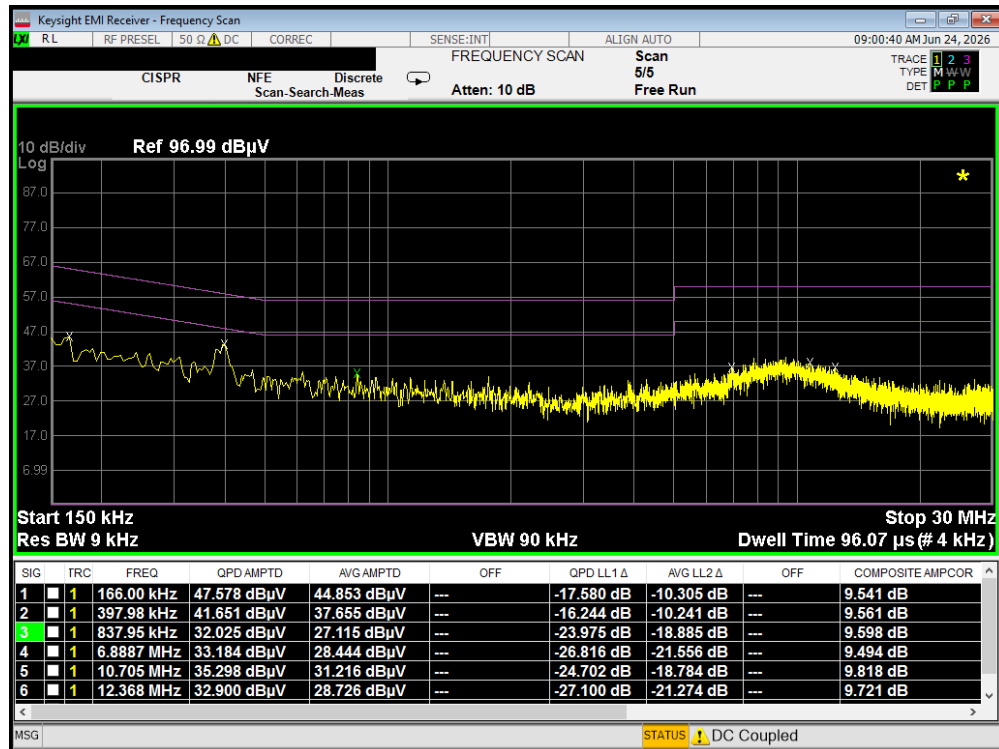


Plot 7-33. Line Conducted Plot with 802.11a UNII Band 3 – Ch.157 (L1)

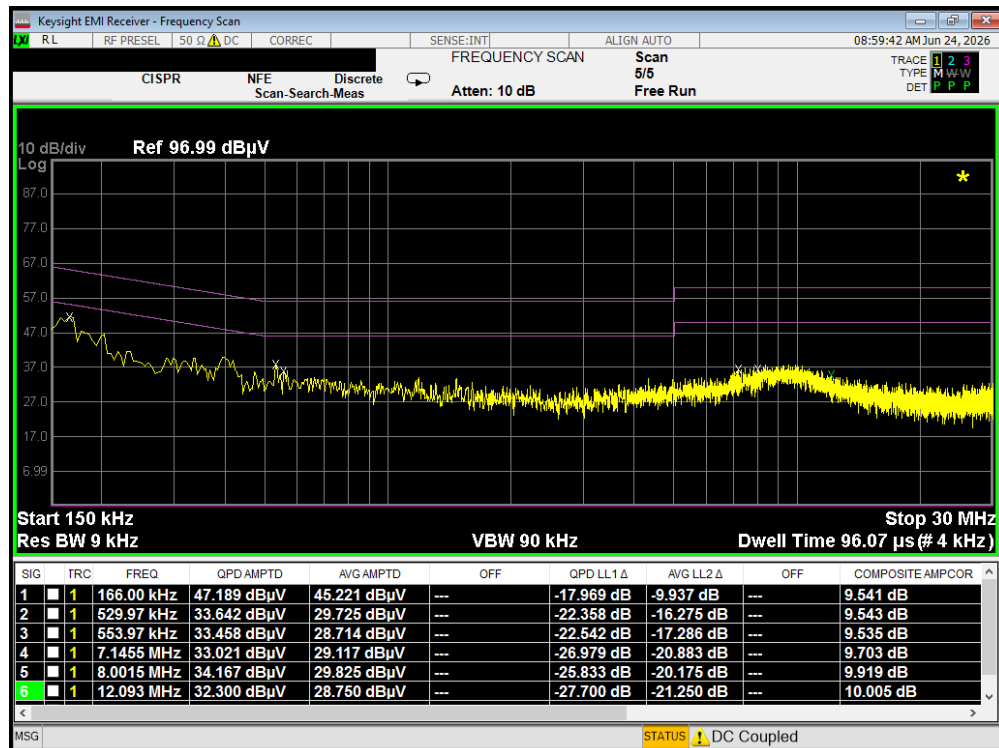


Plot 7-34. Line Conducted Plot with 802.11a UNII Band 3 – Ch.157 (N)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 52 of 54

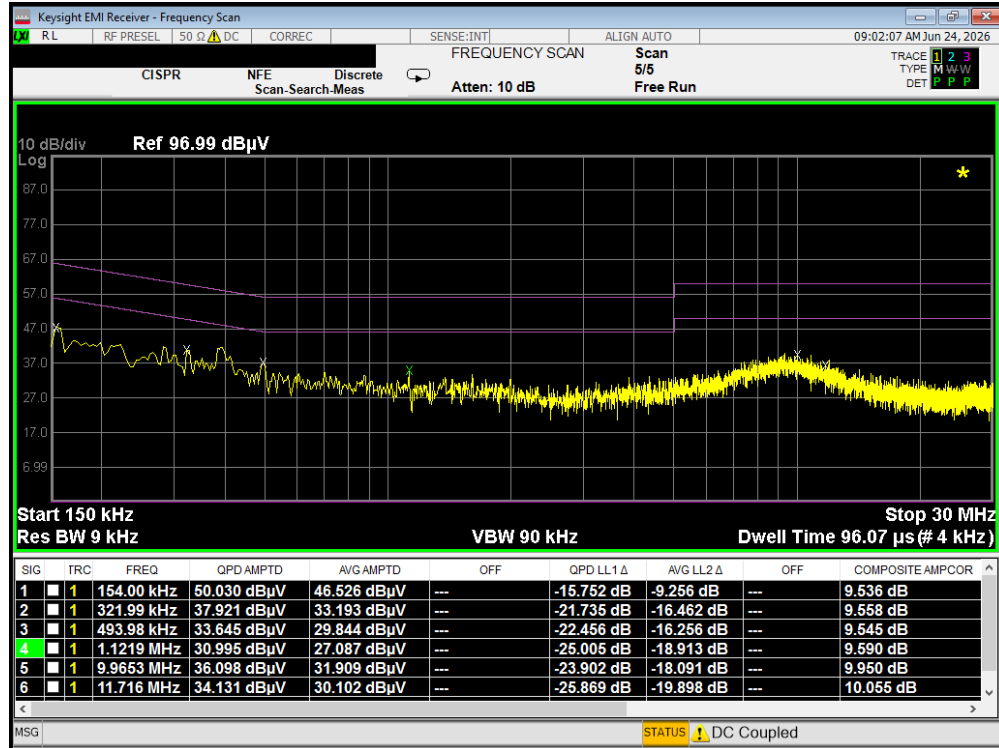

Plot 7-35. Line Conducted Plot with 802.11a UNII Band 4 – Ch.173 (L1)

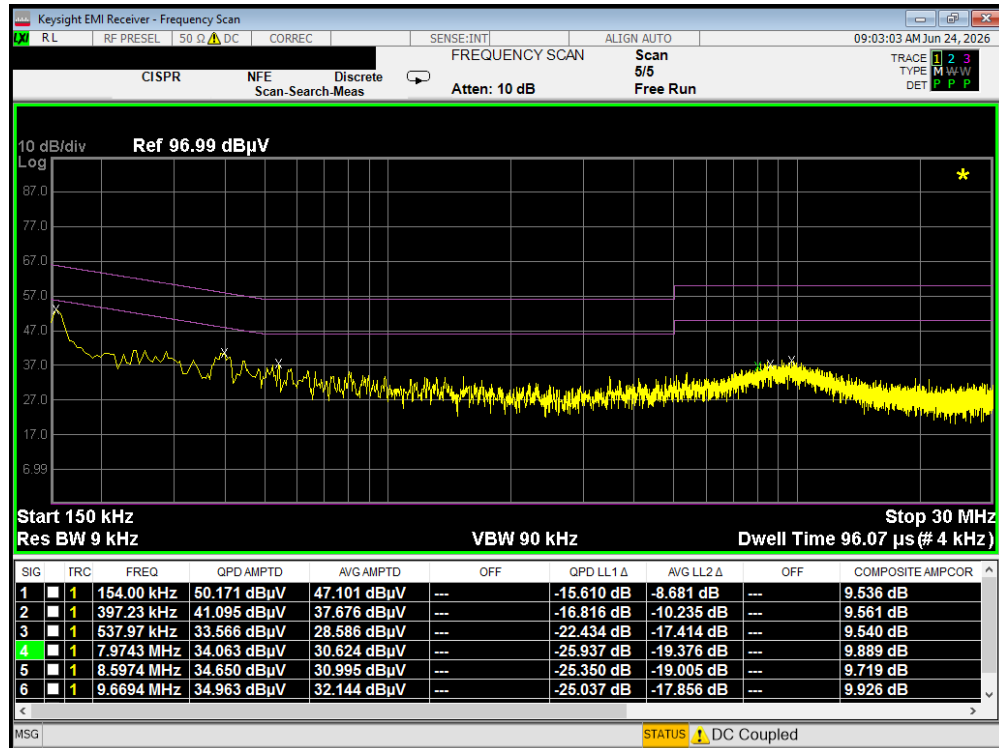

Plot 7-36. Line Conducted Plot with 802.11a UNII Band 4 – Ch.173 (N)

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 53 of 54

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Microsoft Module FCC ID: C3K00002101** is in compliance with FCC and ISSED rules for module integration into the host tablet (Model: 2150).

FCC ID: C3K00002101 IC: 3048A-00002101	MEASUREMENT REPORT (Class II Permissive Change)	Test Dates: 4/15/2026 - 6/24/2026	EUT Type: Limited Modular Approval - Host Integration Computing Device	Approved by: Technical Manager
Test Report S/N: 1M2603250028-10.C3K		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 54 of 54