



7.6.2 MIMO Conducted Spurious Emissions MIMO ANT2 – 20MHz

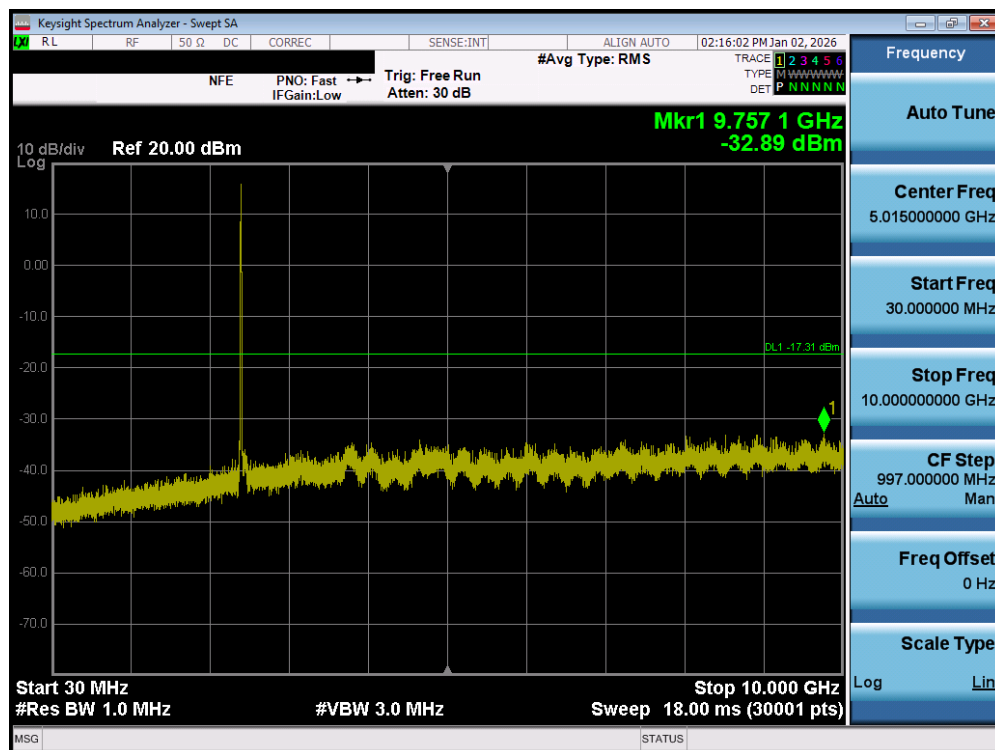


Plot 7-204. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1) – MIMO ANT2

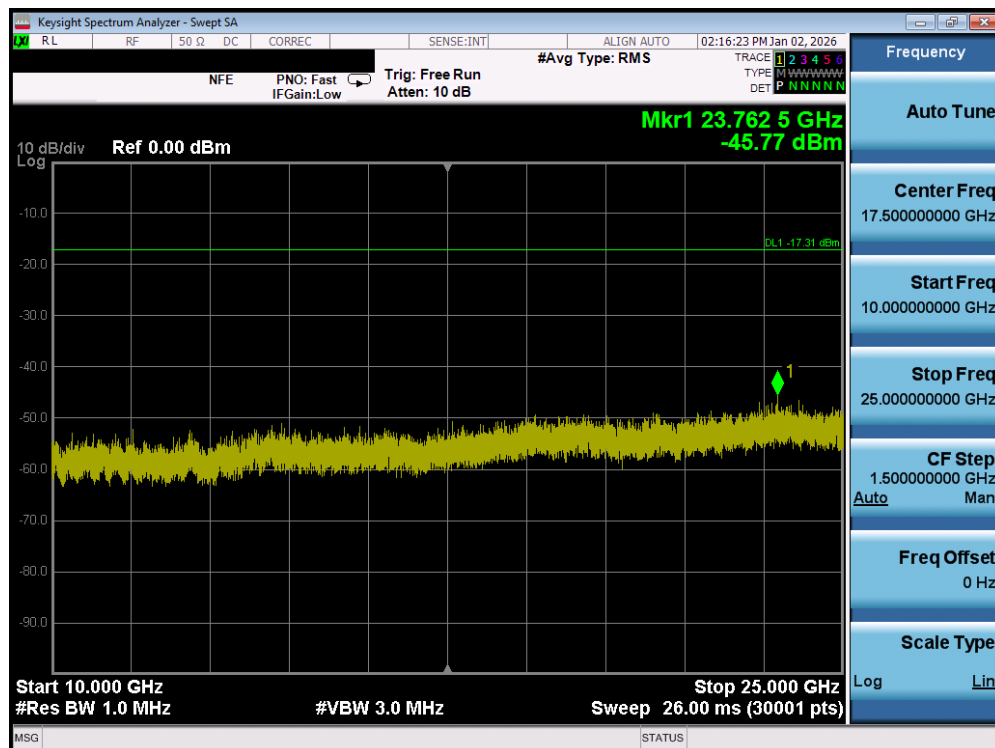


Plot 7-205. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1) – MIMO ANT2

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 139 of 177

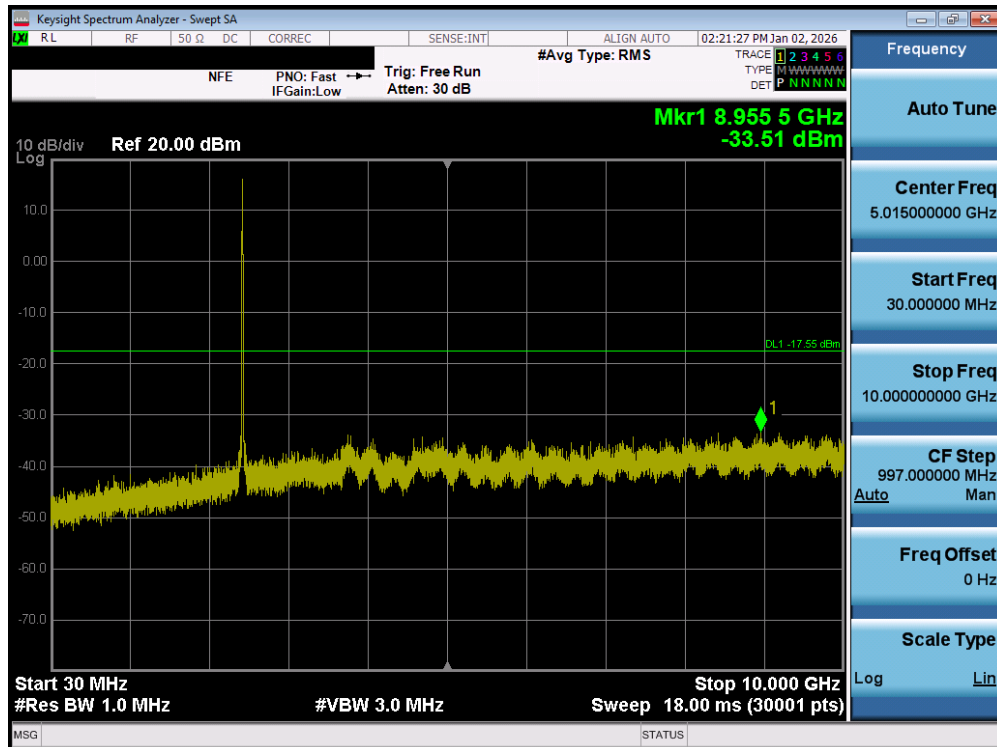


Plot 7-206. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6) – MIMO ANT2

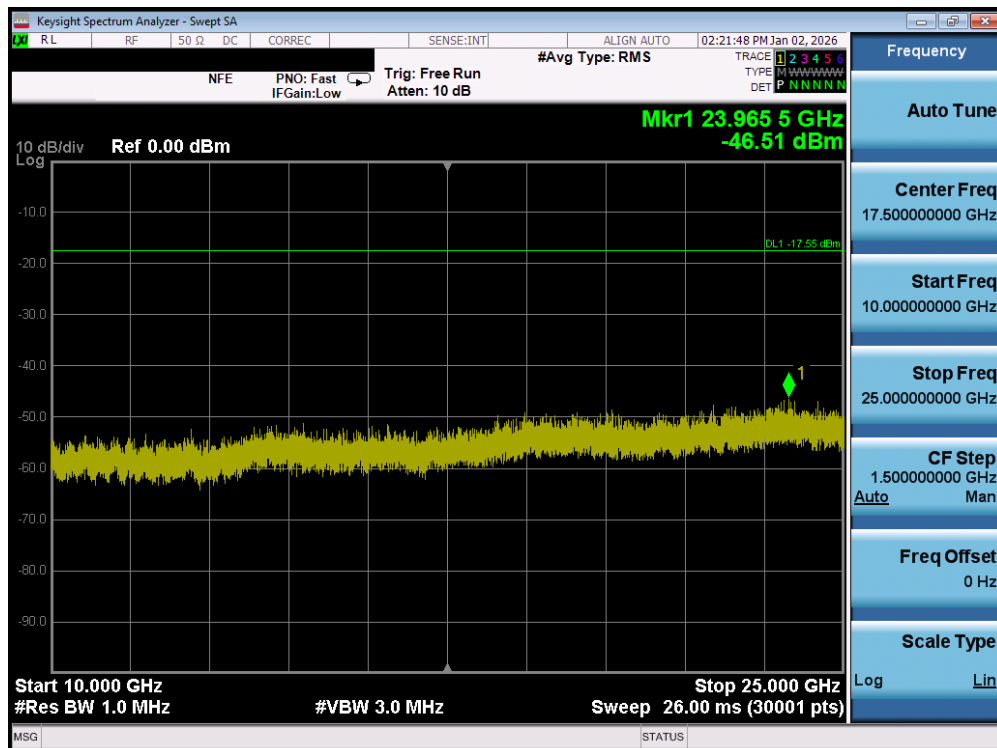


Plot 7-207. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6) – MIMO ANT2

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 140 of 177

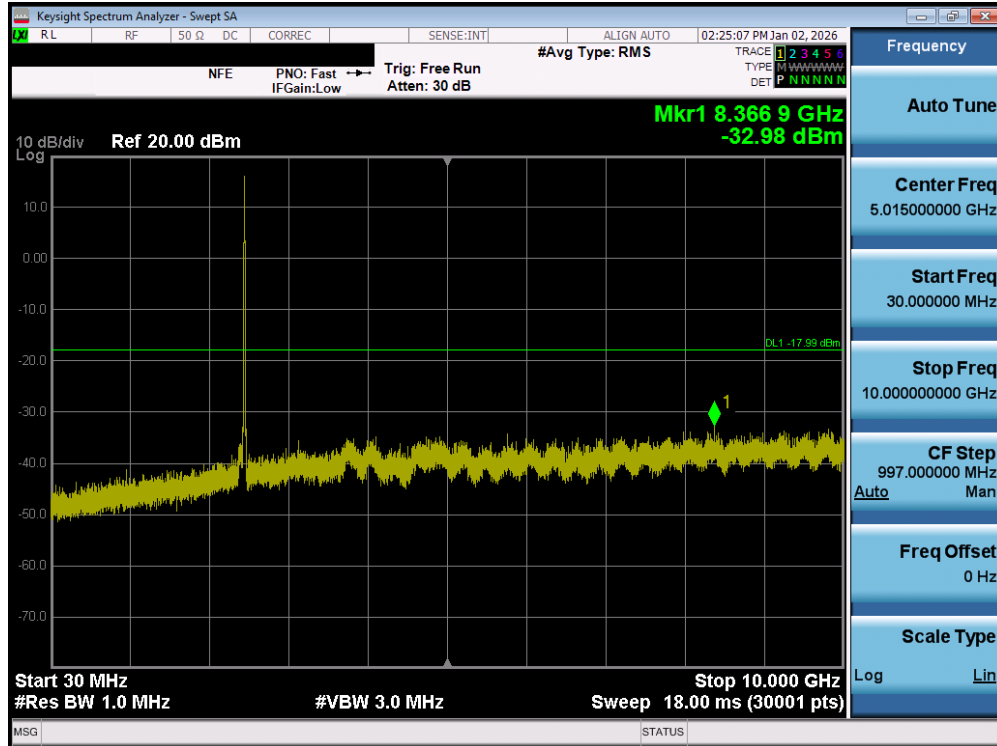


Plot 7-208. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 11) – MIMO ANT2

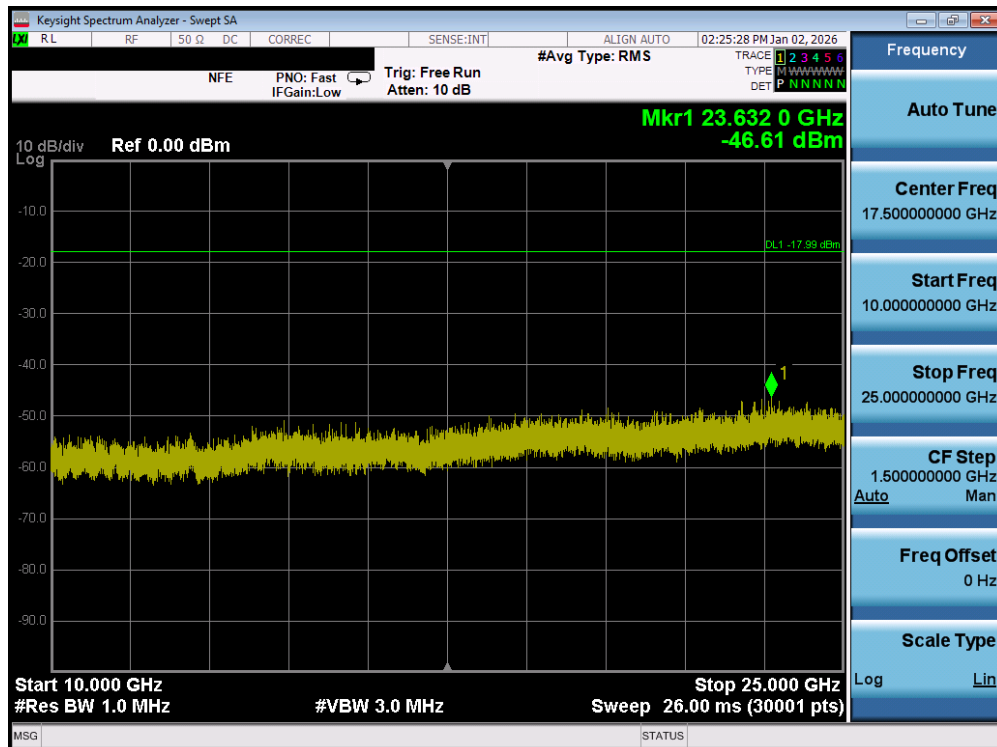


Plot 7-209. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 11) – MIMO ANT2

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 141 of 177

7.6.3 MIMO Conducted Spurious Emissions MIMO ANT1 – 40MHz

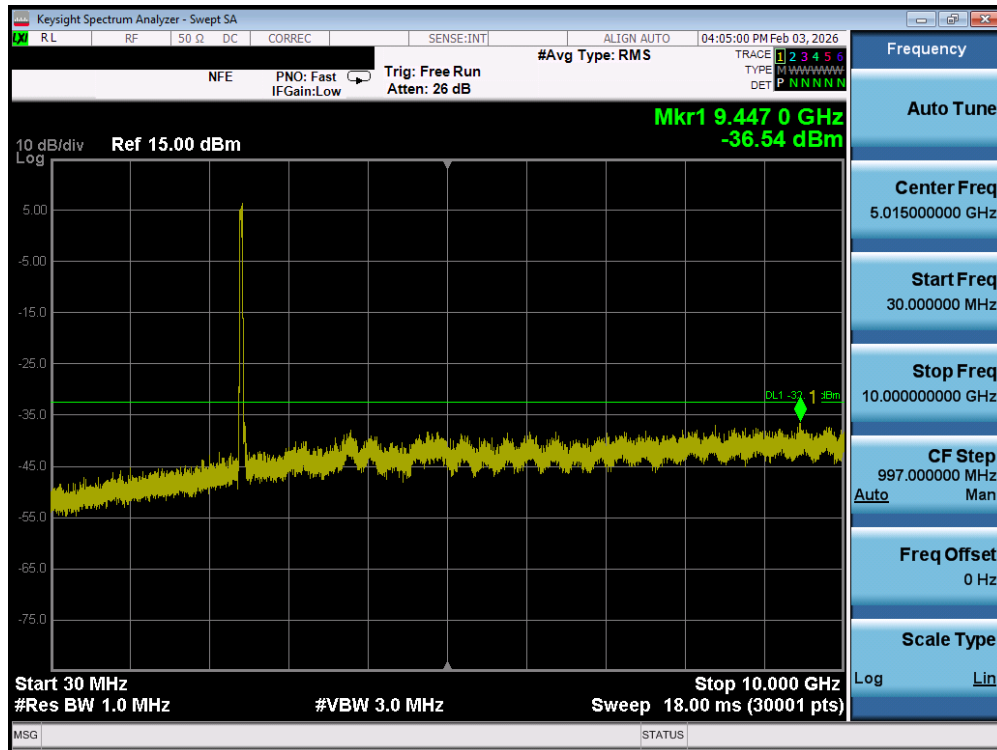


Plot 7-210. Conducted Spurious Plot MIMO ANT1 (802.11n 40MHz – Ch. 3) – MIMO ANT1

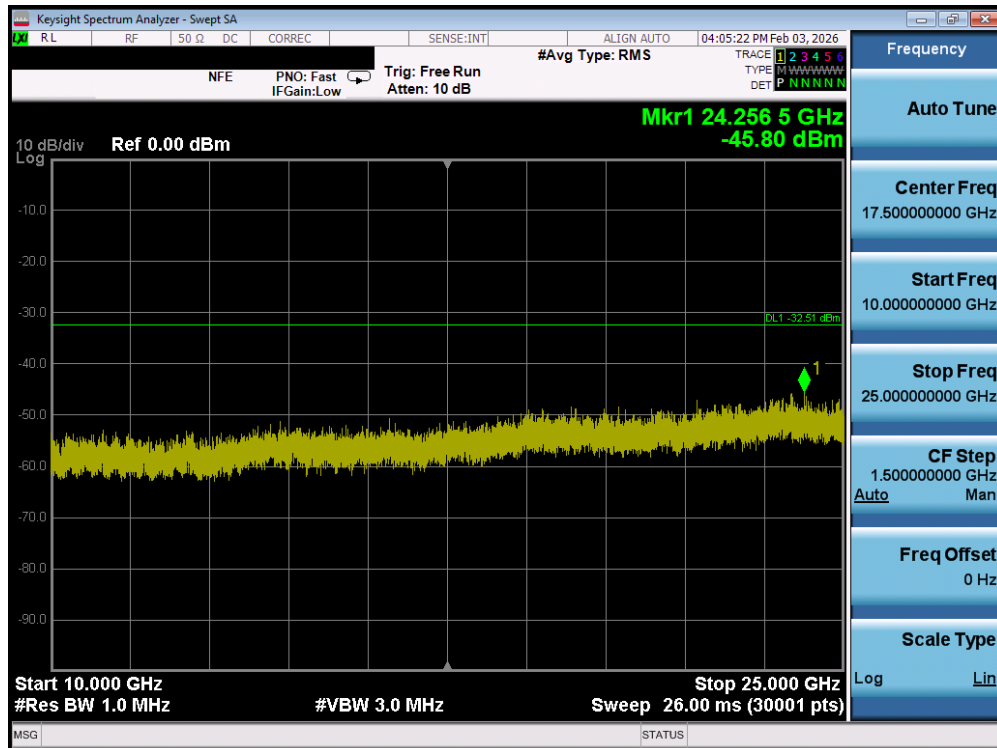


Plot 7-211. Conducted Spurious Plot MIMO ANT1 (802.11n 40MHz – Ch. 3) – MIMO ANT1

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 142 of 177

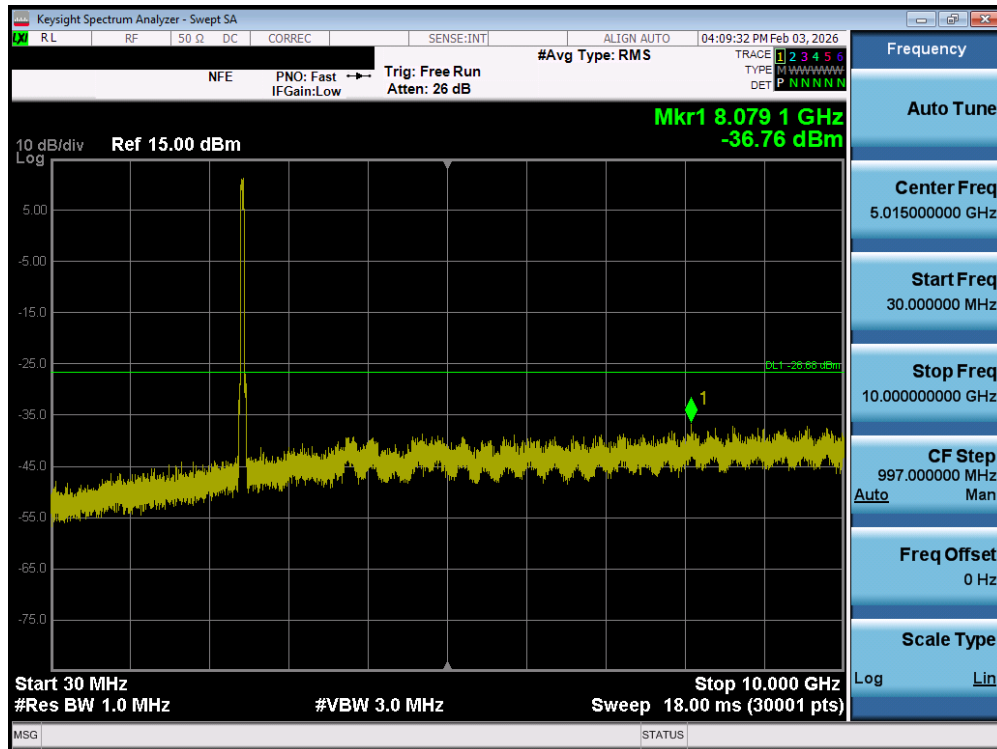


Plot 7-212. Conducted Spurious Plot MIMO ANT1 (802.11n 40MHz – Ch. 6) – MIMO ANT1

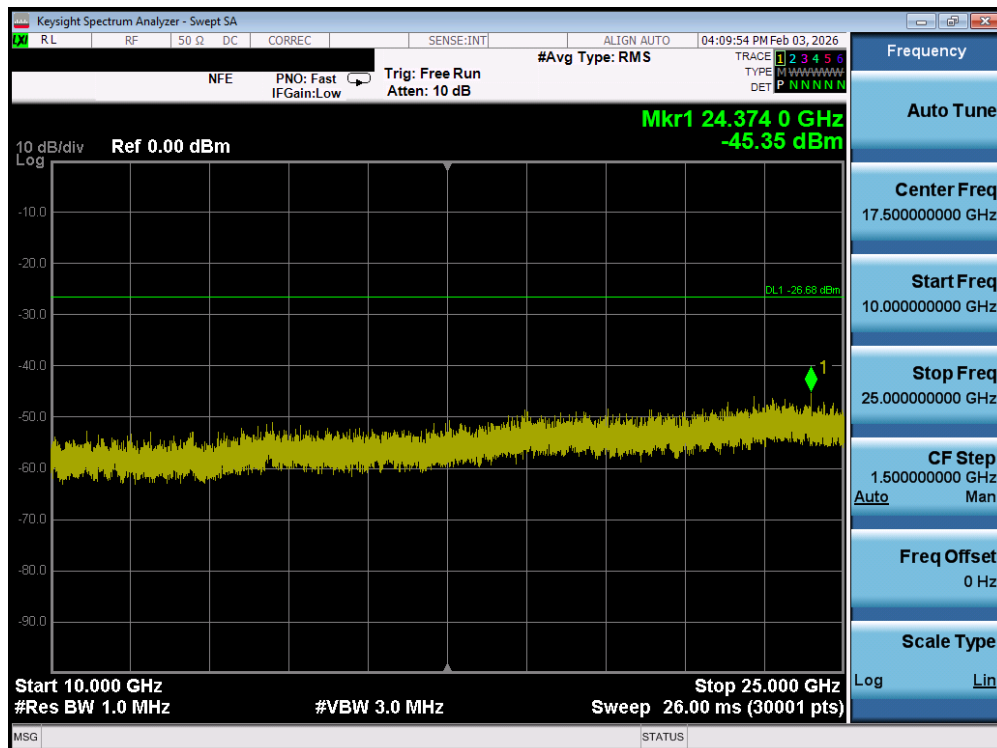


Plot 7-213. Conducted Spurious Plot MIMO ANT1 (802.11n 40MHz – Ch. 6) – MIMO ANT1

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 143 of 177

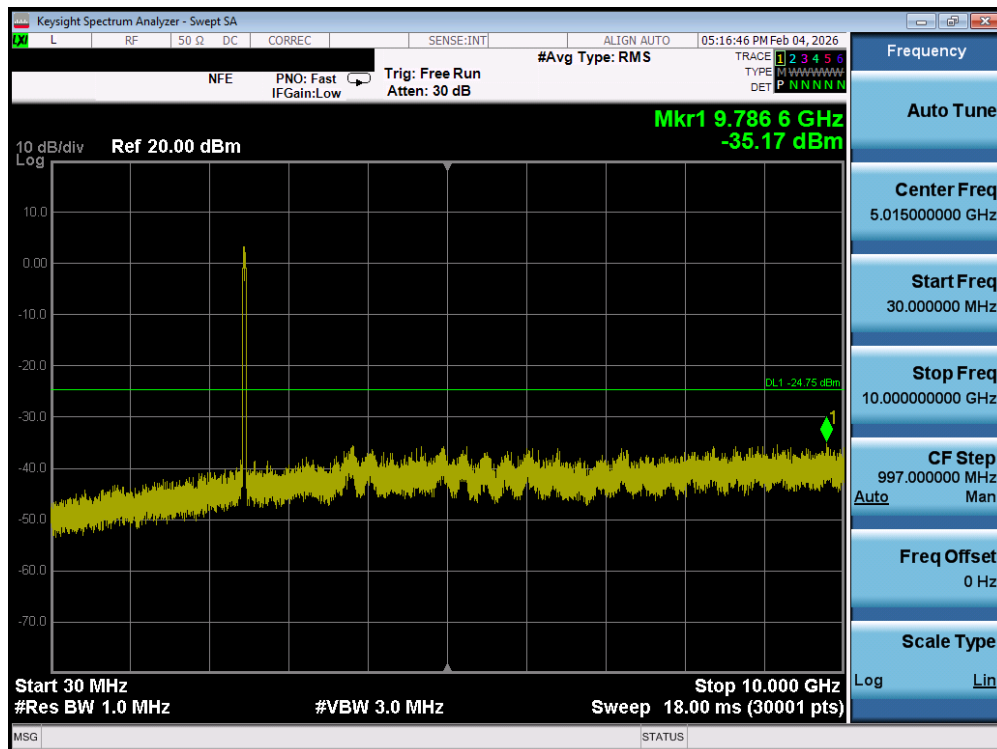


Plot 7-214. Conducted Spurious Plot MIMO ANT1 (802.11n 40MHz – Ch. 11) – MIMO ANT1

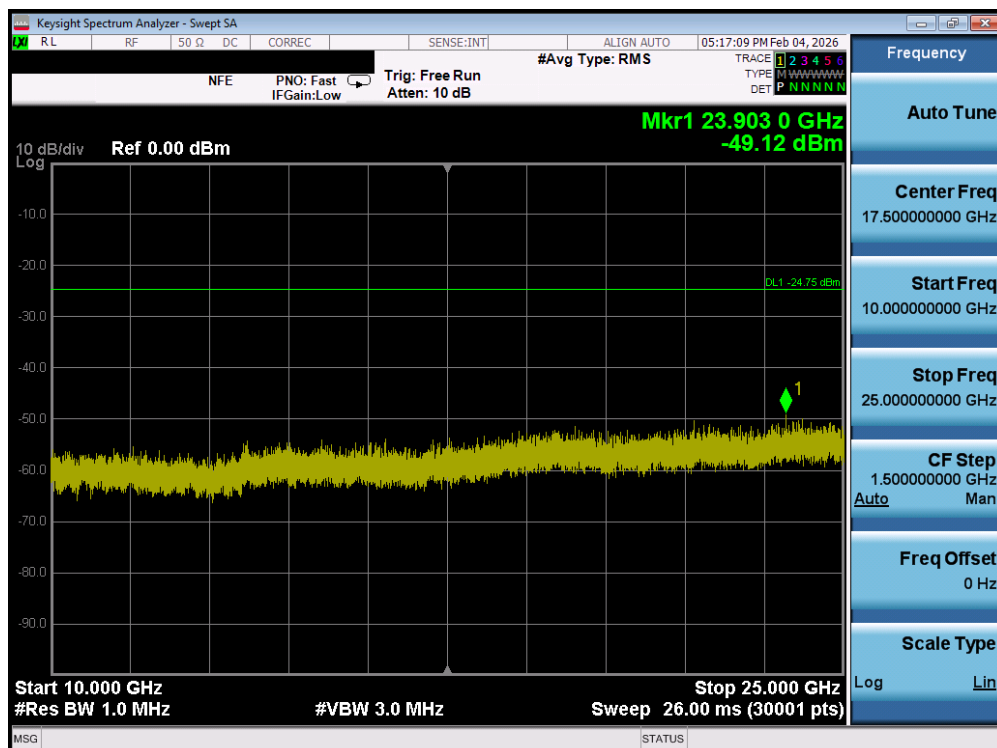


Plot 7-215. Conducted Spurious Plot MIMO ANT1 (802.11n 40MHz – Ch. 11) – MIMO ANT1

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 144 of 177

7.6.4 MIMO Conducted Spurious Emissions MIMO ANT2 – 40MHz

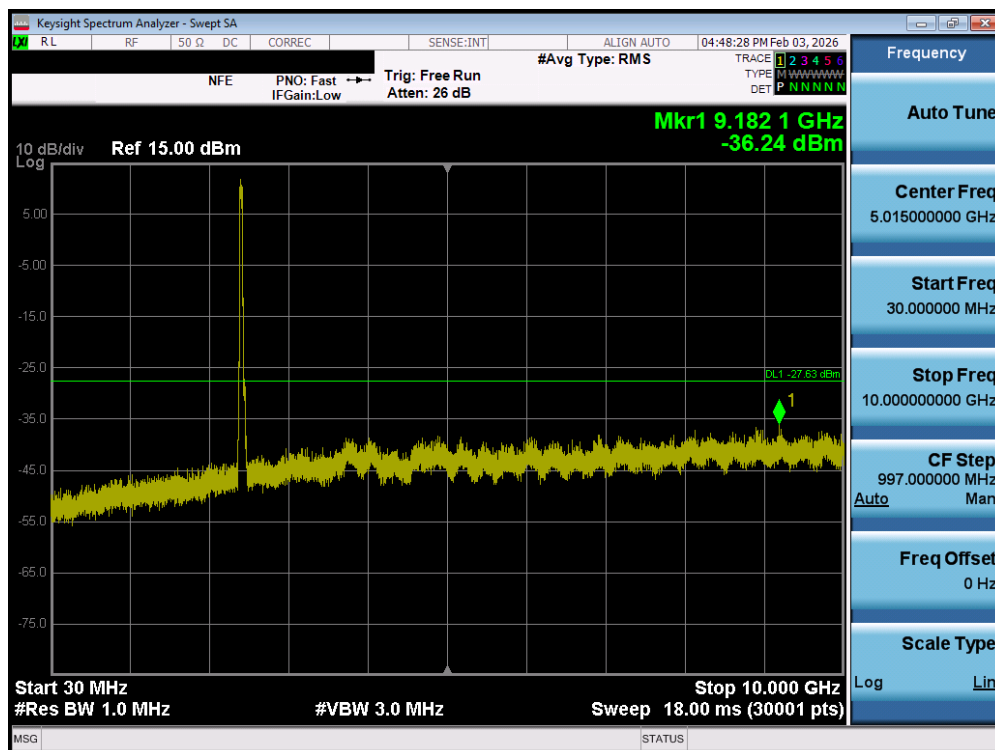


Plot 7-216. Conducted Spurious Plot MIMO ANT2 (802.11n 40MHz – Ch. 3) – MIMO ANT2

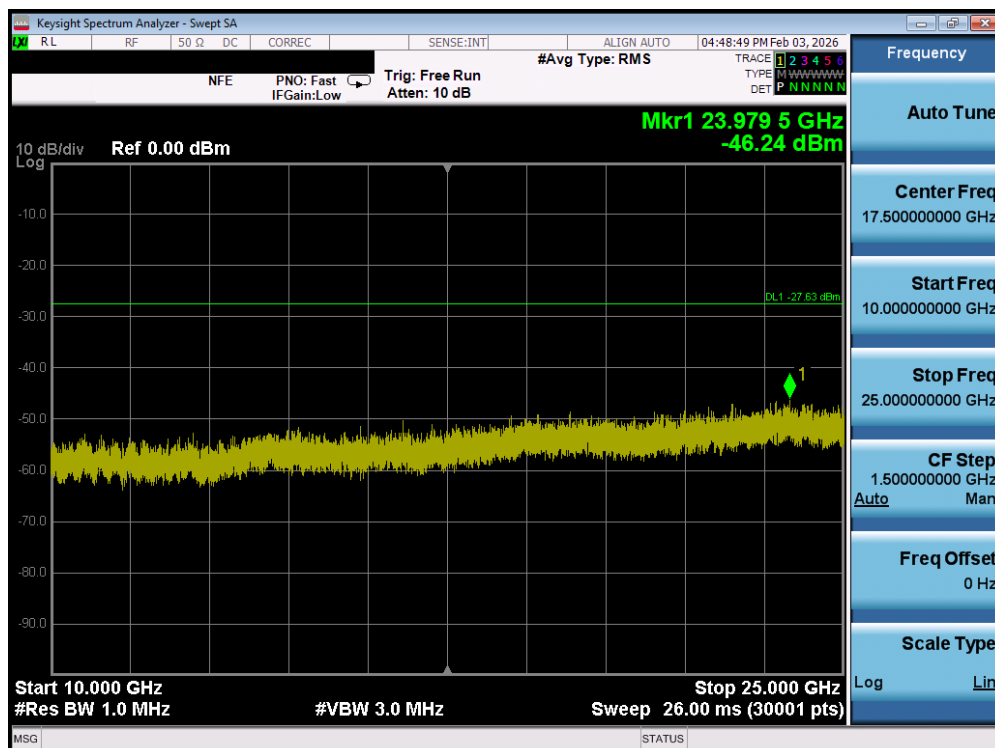


Plot 7-217. Conducted Spurious Plot MIMO ANT2 (802.11n 40MHz – Ch. 3) – MIMO ANT2

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 145 of 177

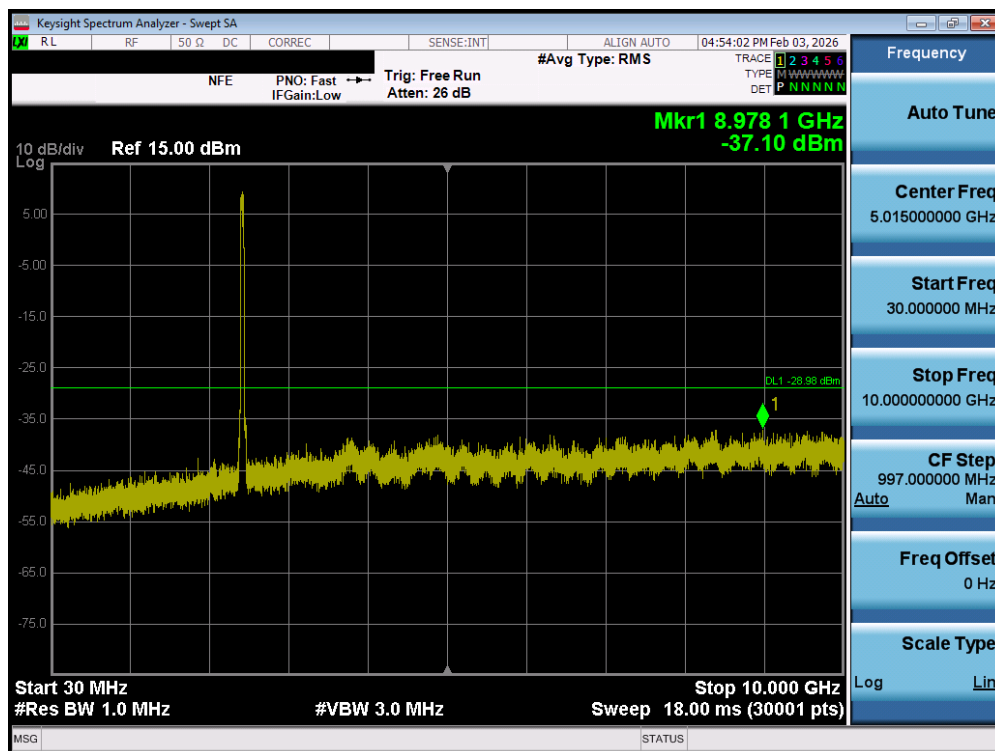


Plot 7-218. Conducted Spurious Plot MIMO ANT2 (802.11n 40MHz – Ch. 6) – MIMO ANT2

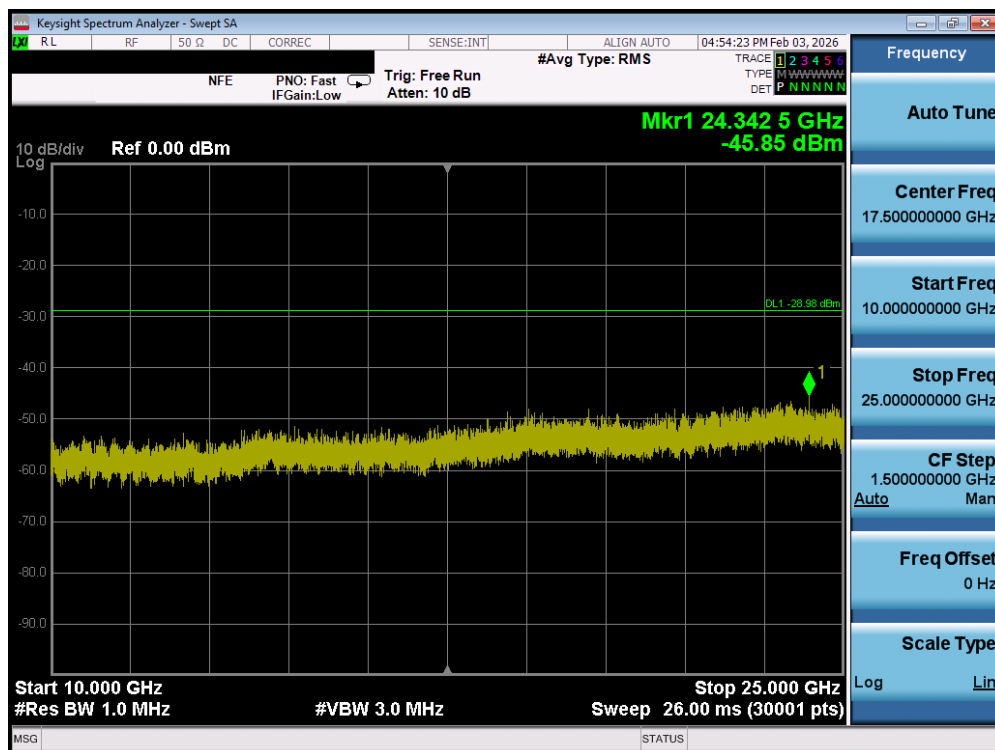


Plot 7-219. Conducted Spurious Plot MIMO ANT2 (802.11n 40MHz – Ch. 6) – MIMO ANT2

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 146 of 177

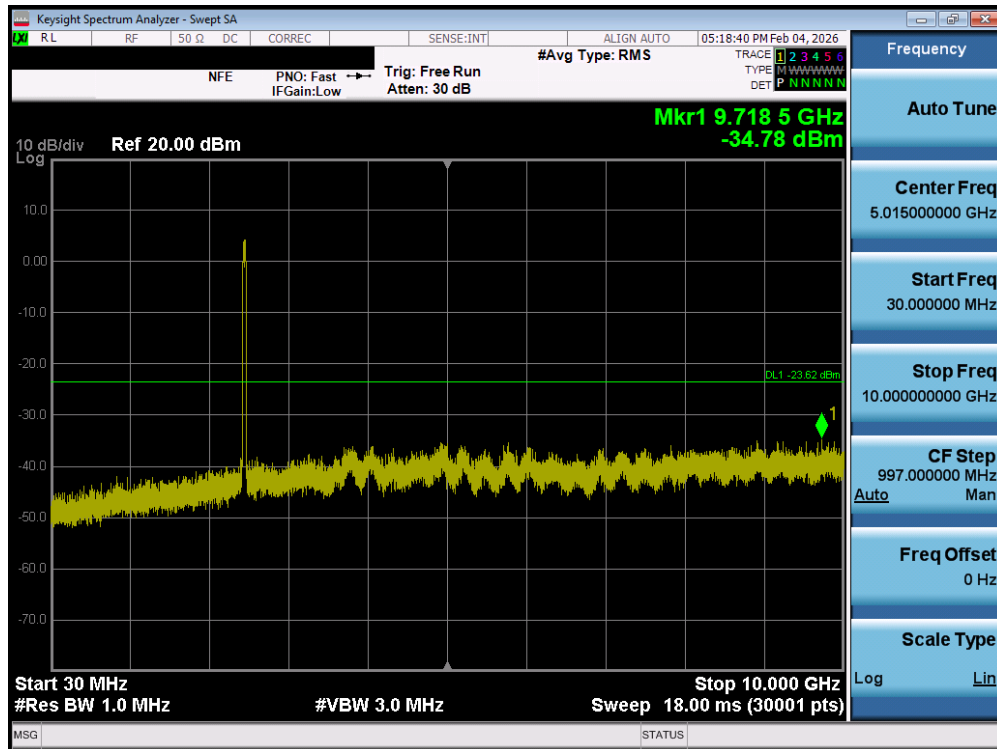

Plot 7-220. Conducted Spurious Plot MIMO ANT2 (802.11n 40MHz – Ch. 11) – MIMO ANT2

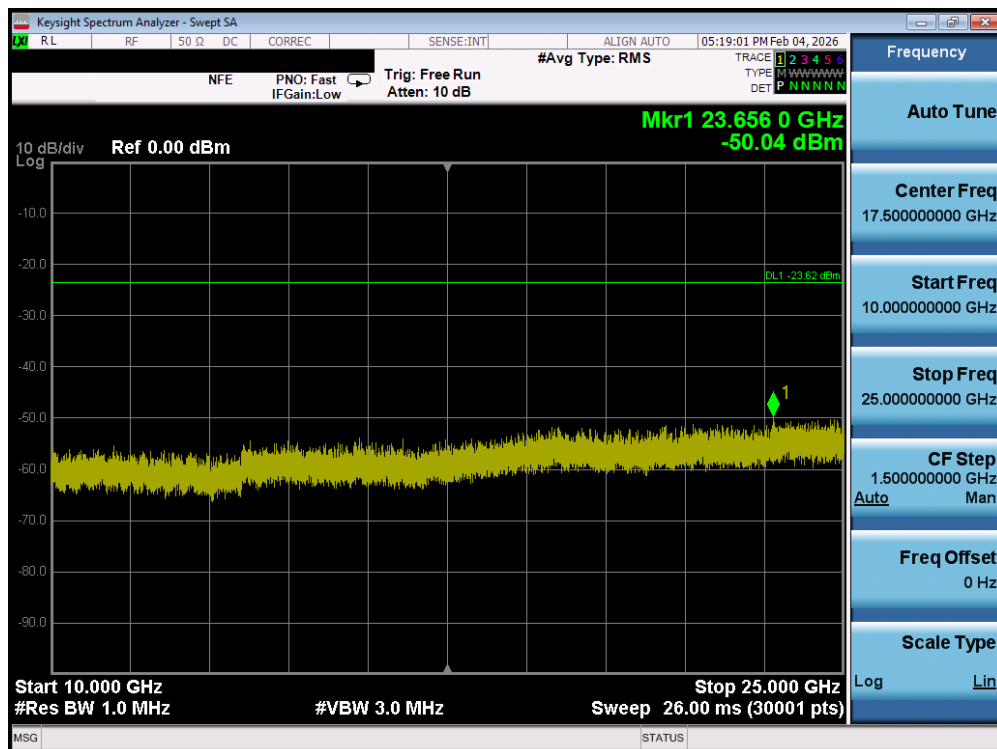

Plot 7-221. Conducted Spurious Plot MIMO ANT2 (802.11n 40MHz – Ch. 11) – MIMO ANT2

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 147 of 177

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-17. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Section 6.6.4.3

Test Settings – Above 1GHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 148 of 177

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

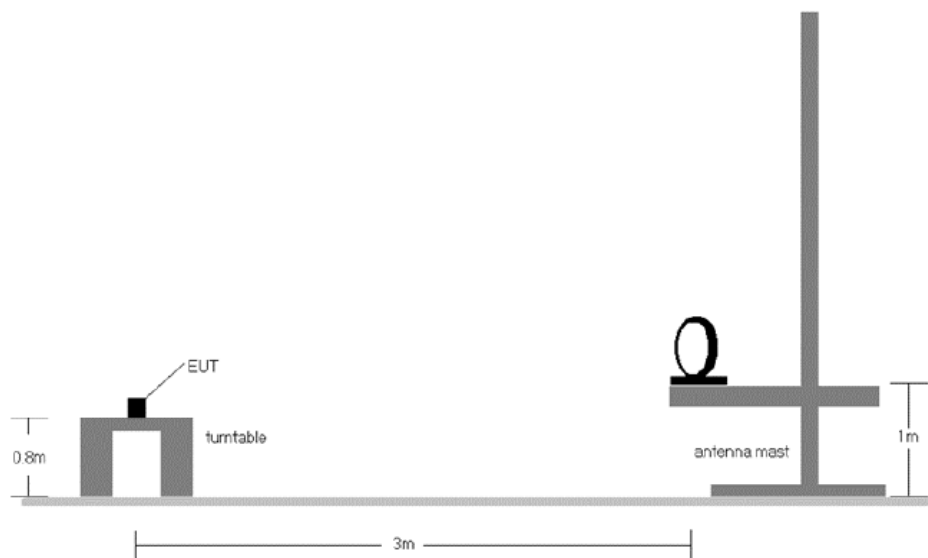


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 149 of 177

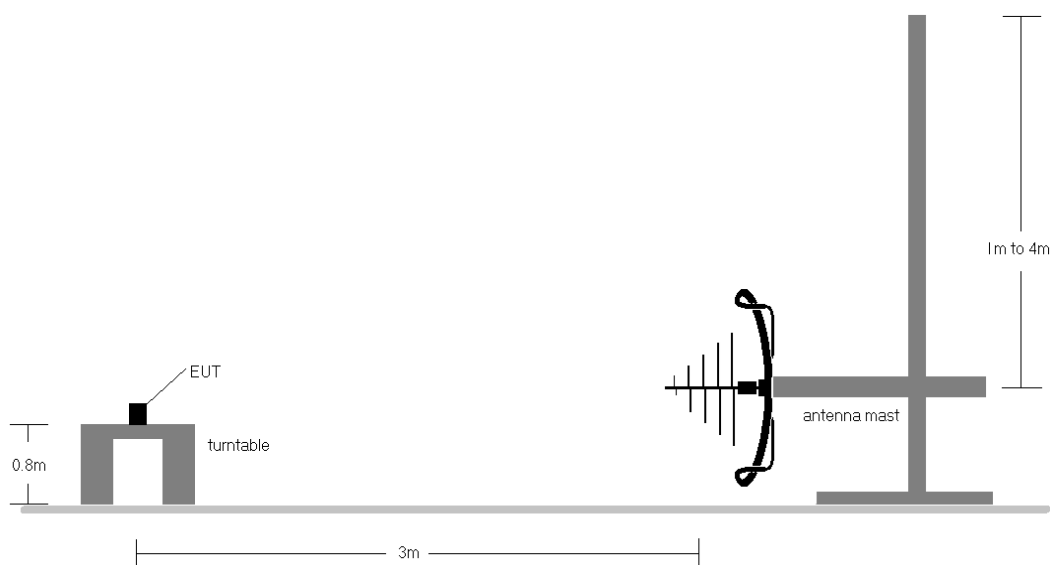


Figure 7-7. Radiated Test Setup < 1GHz

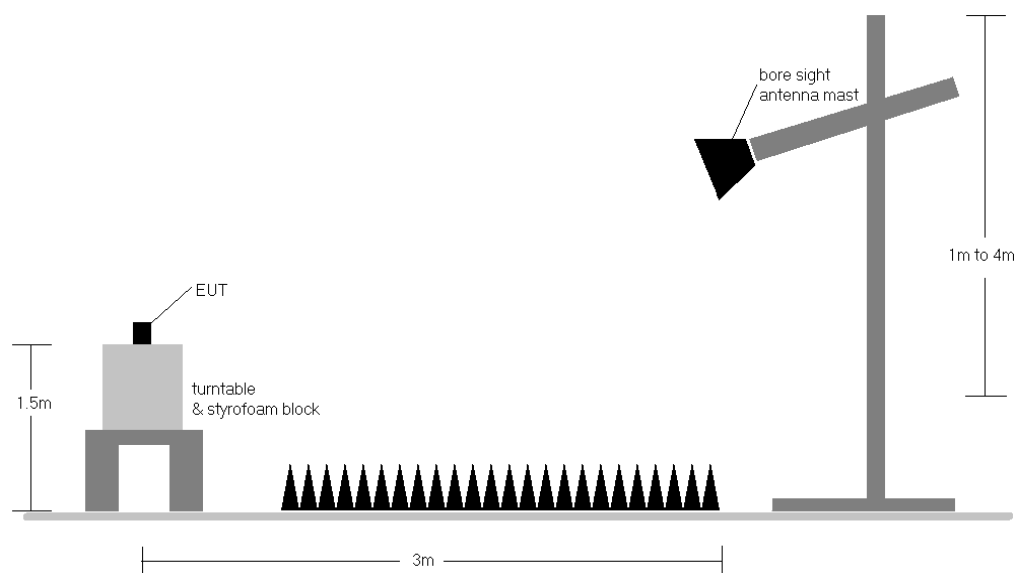


Figure 7-8. Radiated Test Setup > 1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10-2020 Section 11.3 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 150 of 177

3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst-case results during the transmitter spurious emissions testing.
10. No spurious emissions were detected within 20dB of the limit below 30MHz.
11. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
12. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB_{\mu V/m}]}$ = Analyzer Level $_{[dBm]}$ + 107 + AFCL $_{[dB_{\mu V/m}]}$
- AFCL $_{[dB_{\mu V/m}]}$ = Antenna Factor $_{[dB_{\mu V/m}]}$ + Cable Loss $_{[dB]}$
- Margin $_{[dB]}$ = Field Strength Level $_{[dB_{\mu V/m}]}$ – Limit $_{[dB_{\mu V/m}]}$

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 151 of 177


7.7.1 MIMO Radiated Spurious Emission Prescans

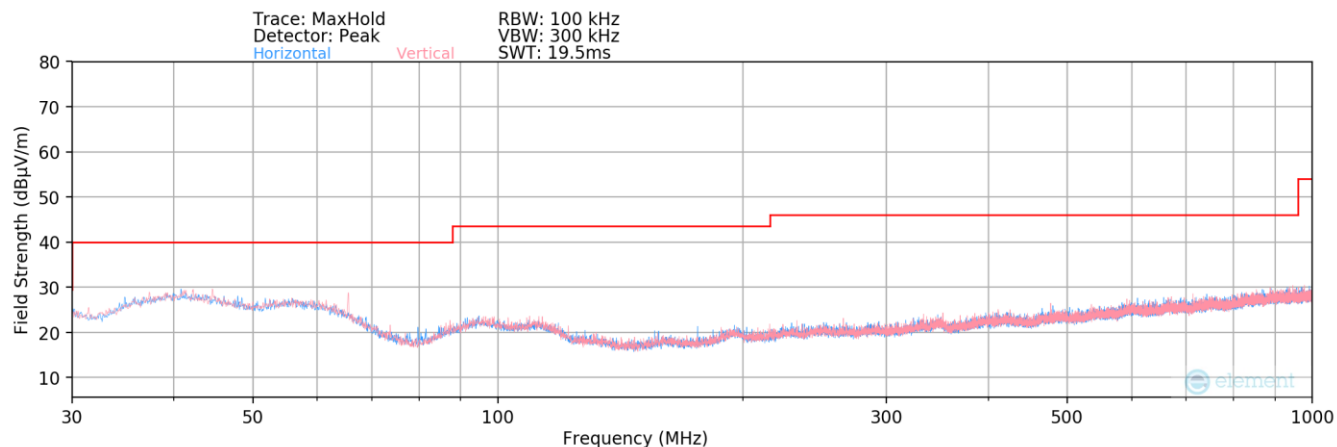

Plot 7-222. Radiated Spurious Plot below 1GHz MIMO

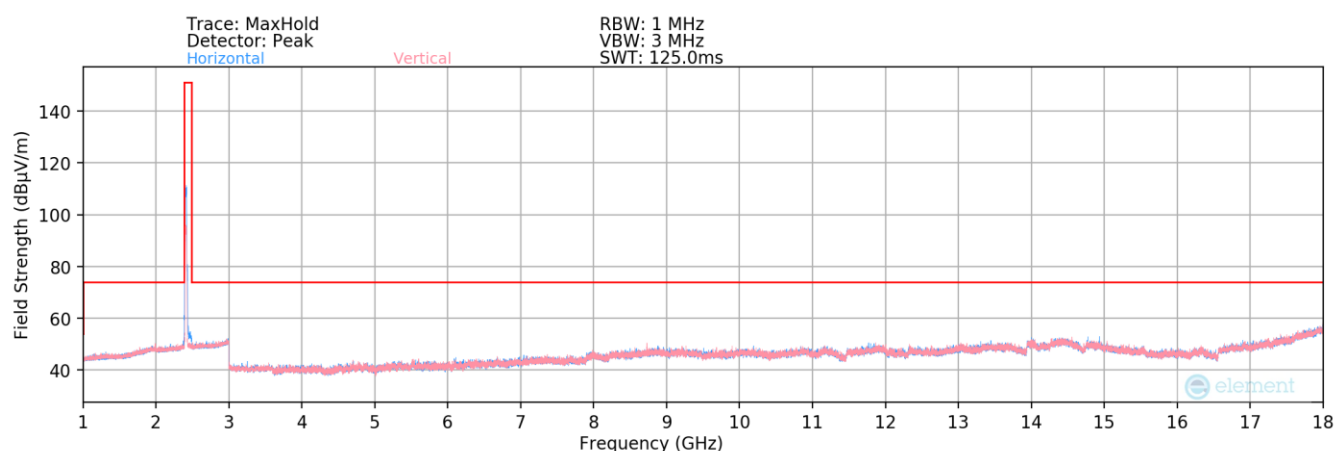


Plot 7-223. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 1)

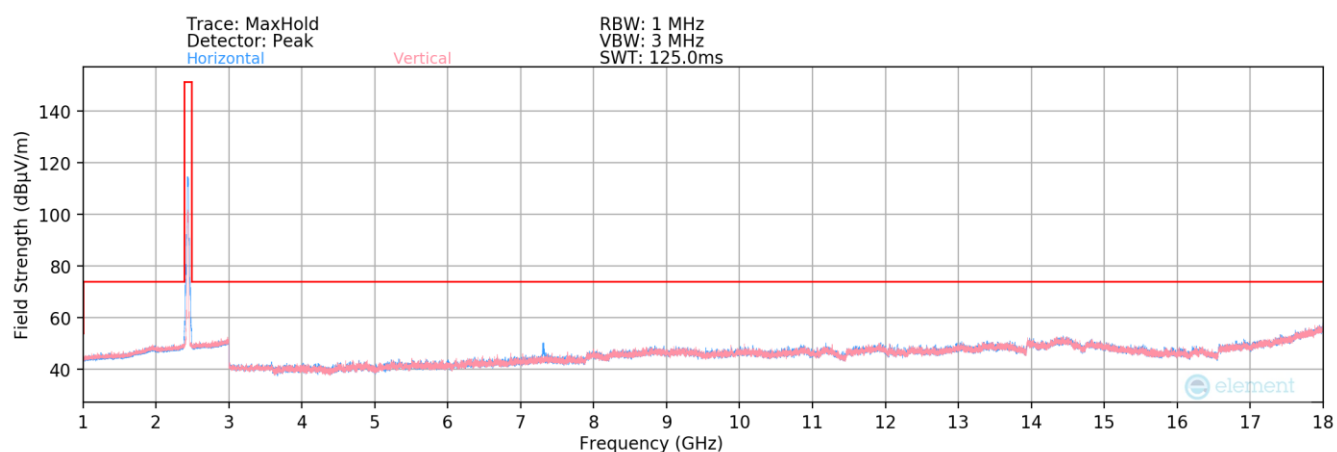


Plot 7-224. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 6)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 152 of 177

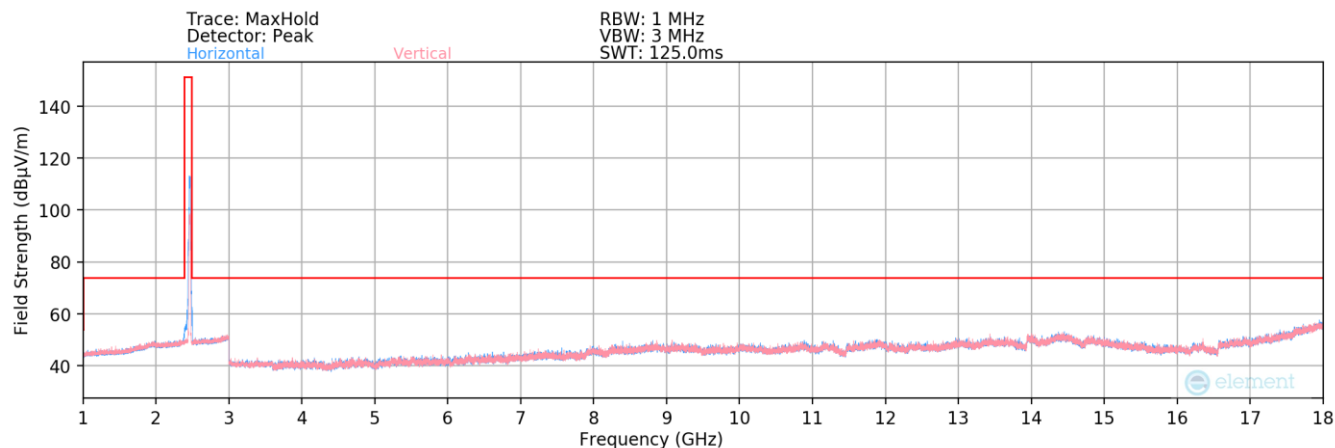

Plot 7-225. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 11)

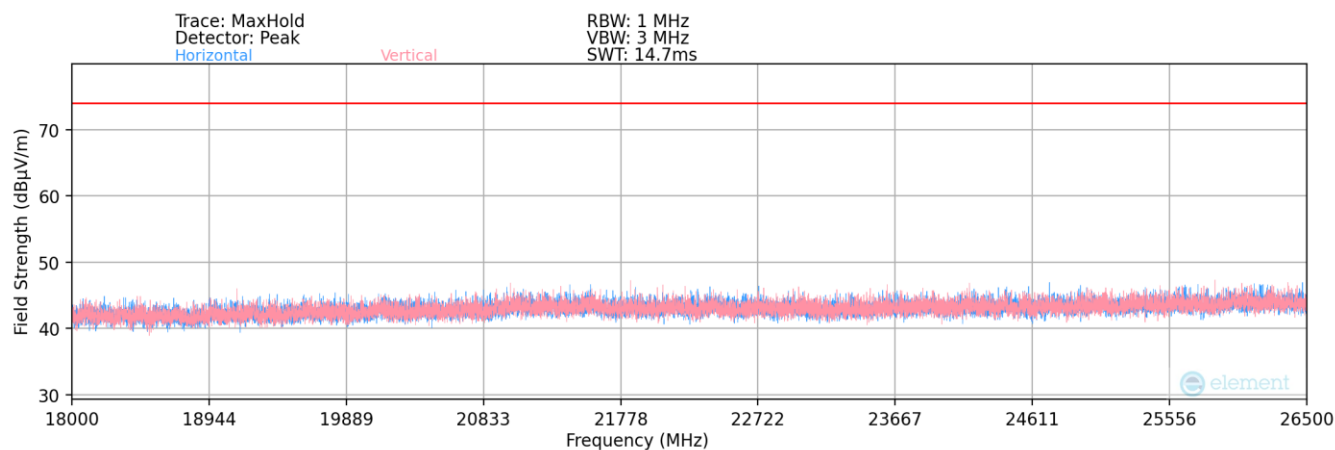

Plot 7-226. Radiated Spurious Plot above 18GHz MIMO

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 153 of 177

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-74.95	-0.69	31.36	53.98	-22.62
4824.00	Peak	H	-	-	-73.02	-0.69	33.29	73.98	-40.69
12060.00	Avg	H	-	-	-77.32	9.64	39.32	53.98	-14.66
12060.00	Peak	H	-	-	-74.87	9.64	41.77	73.98	-32.21

Table 7-18. Radiated Measurements MIMO

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	-	-	-73.99	-0.37	32.64	53.98	-21.34
4874.00	Peak	H	-	-	-72.09	-0.37	34.54	73.98	-39.44
7311.00	Avg	H	139	193	-70.49	4.43	40.94	53.98	-13.04
7311.00	Peak	H	139	193	-67.81	4.43	43.62	73.98	-30.36
12185.00	Avg	H	-	-	-77.43	9.25	38.82	53.98	-15.16
12185.00	Peak	H	-	-	-75.44	9.25	40.81	73.98	-33.17

Table 7-19. Radiated Measurements MIMO

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 154 of 177

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	-	-	-75.12	-0.21	31.67	53.98	-22.31
4924.00	Peak	H	-	-	-72.95	-0.21	33.84	73.98	-40.14
7386.00	Avg	H	-	-	-74.56	4.84	37.28	53.98	-16.70
7386.00	Peak	H	-	-	-72.46	4.84	39.38	73.98	-34.60
12310.00	Avg	H	-	-	-77.95	9.30	38.35	53.98	-15.63
12310.00	Peak	H	-	-	-75.86	9.30	40.44	73.98	-33.54


Table 7-20. Radiated Measurements MIMO

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 155 of 177


7.7.2 Simultaneous Tx Radiated Spurious Emissions Measurements

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	6	157
Operating Frequency (MHz)	2437	5785
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

Table 7-21. Simultaneous Transmission Config

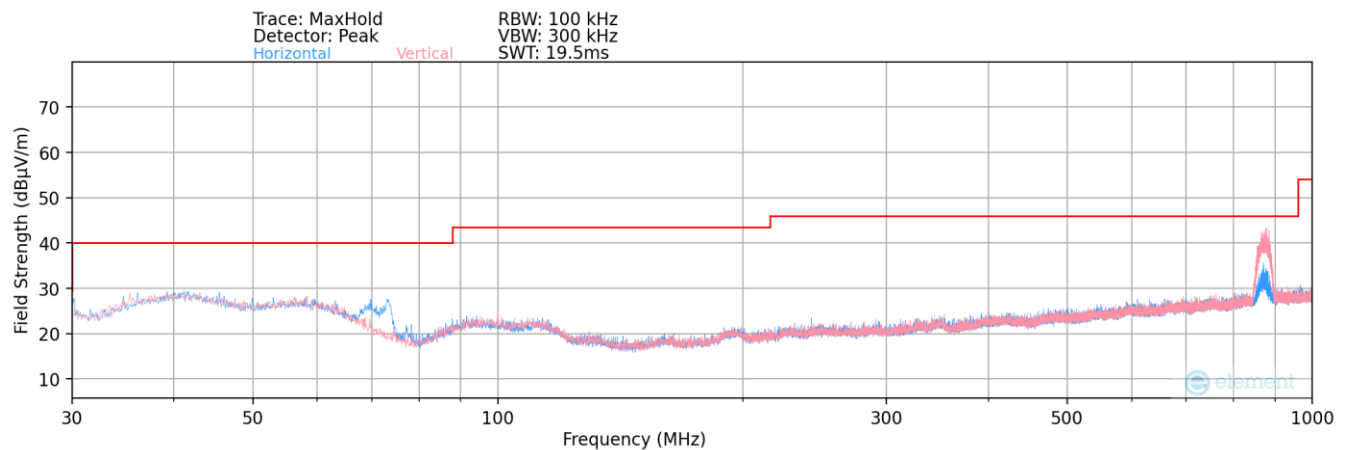


Plot 7-227. Radiated Spurious Plot below 1GHz (2.4GHz – 5GHz)

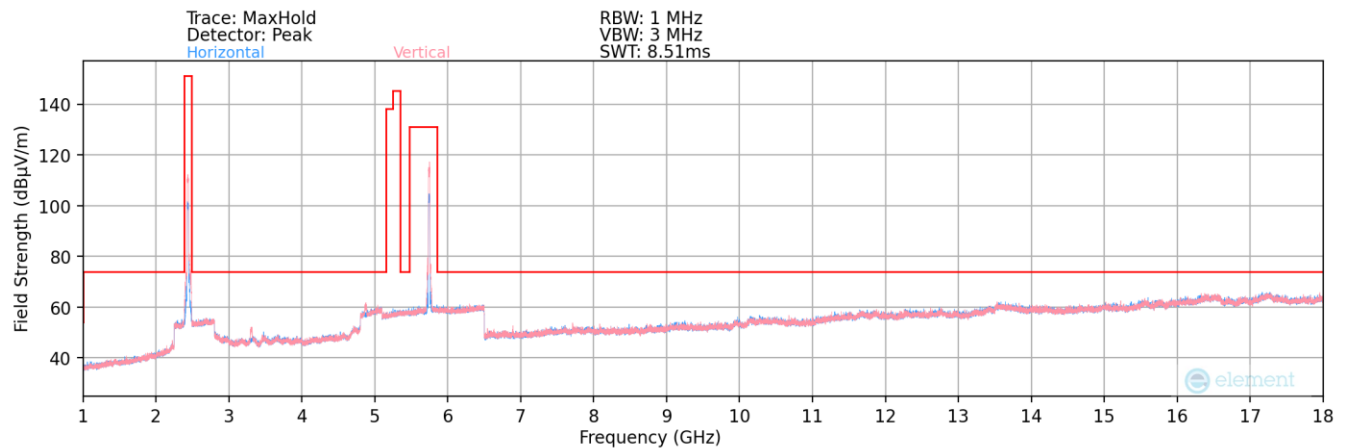


Plot 7-228. Radiated Spurious Plot above 1GHz (2.4GHz – 5GHz)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 156 of 177

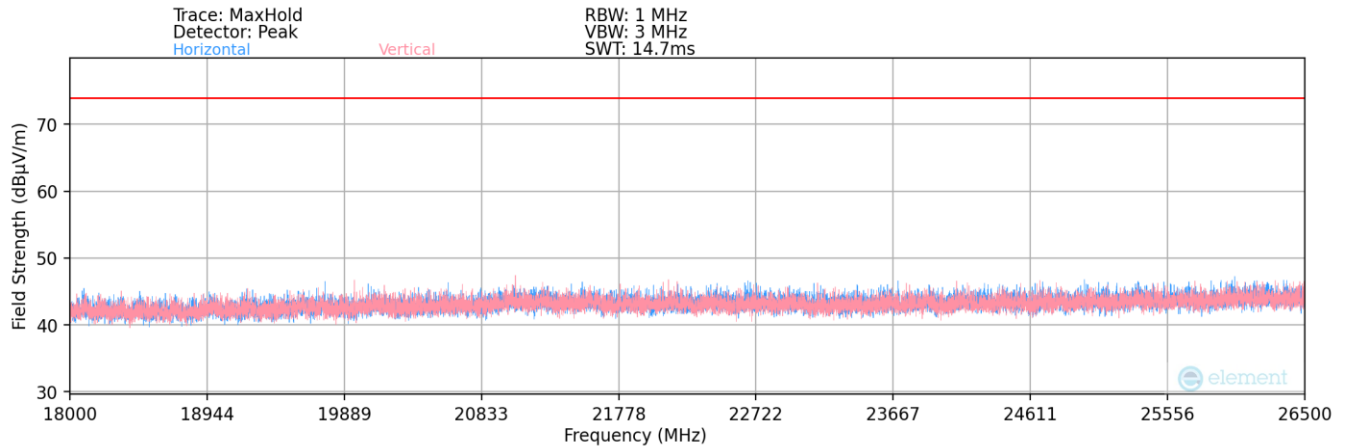

Plot 7-229. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 5GHz)

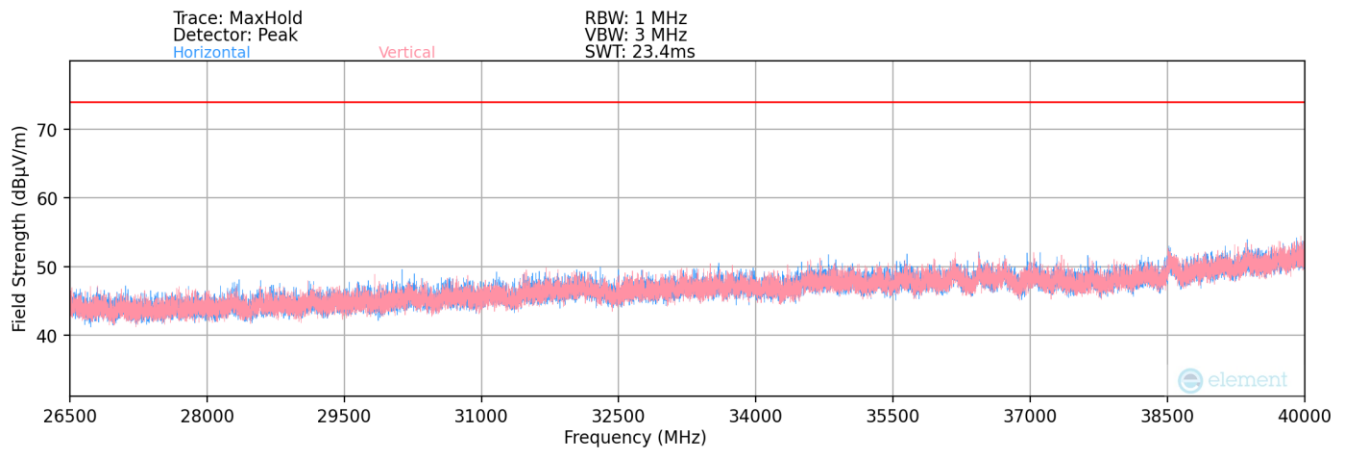

Plot 7-230. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 157 of 177


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
79.89	Peak	H	296.00	184.00	-61.99	-18.37	26.64	40.00	-13.36
292.00	Peak	V	-	-	-74.82	-11.21	20.97	46.02	-25.05
872.00	Peak	V	128.00	144.00	-63.45	-0.80	42.75	46.02	-3.27
3304.00	Peak	V	110.00	202.00	-60.47	8.58	55.11	68.20	-13.09
4875.00	Average	V	114.00	187.00	-79.86	21.81	48.95	53.98	-5.02
4875.00	Peak	V	114.00	187.00	-68.16	21.81	60.65	73.98	-13.33
7856.00	Peak	V	-	-	-70.62	15.97	52.35	68.20	-15.85
10073.00	Peak	V	-	-	-71.19	18.72	54.53	68.20	-13.67
15046.00	Peak	V	-	-	-72.18	26.78	61.60	68.20	-6.60
19061.00	Average	V	-	-	-67.29	1.74	31.91	53.98	-22.07
19061.00	Peak	V	-	-	-57.73	1.74	41.47	73.98	-32.51
28049.00	Peak	V	-	-	-57.03	4.34	44.77	68.20	-23.43
33014.00	Peak	V	-	-	-57.72	7.16	46.90	68.20	-21.30

Table 7-22. Radiated Spurious Emission Measurements (2.4GHz – 5GHz)


FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 158 of 177

Description	2.4 GHz Emission	6 GHz Emission
Antenna	1, 2	1, 2
Channel	6	2
Operating Frequency (MHz)	2437	5935
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

Table 7-23. Simultaneous Transmission Config

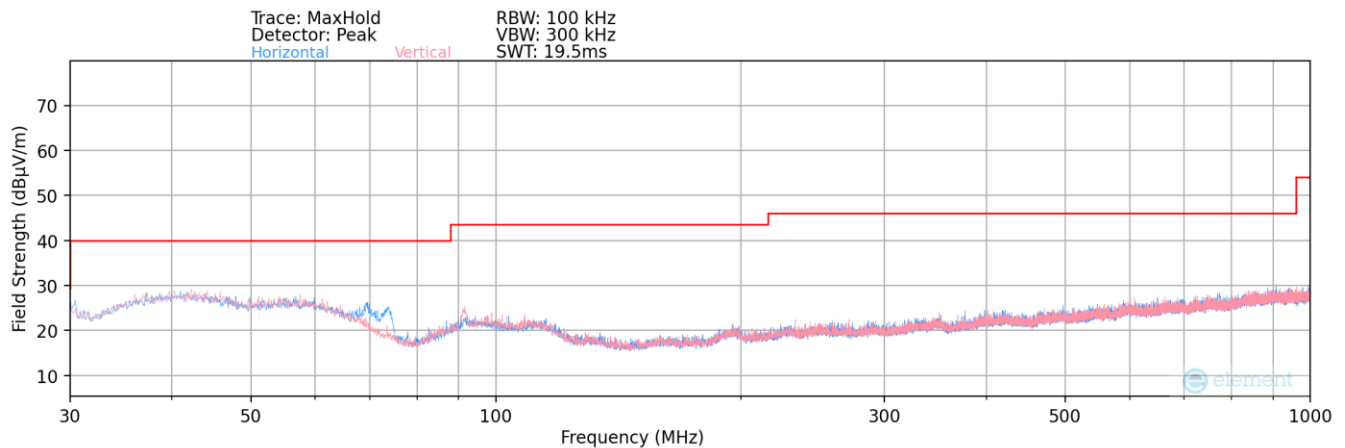


Plot 7-231. Radiated Spurious Plot below 1GHz (2.4GHz – 6GHz)

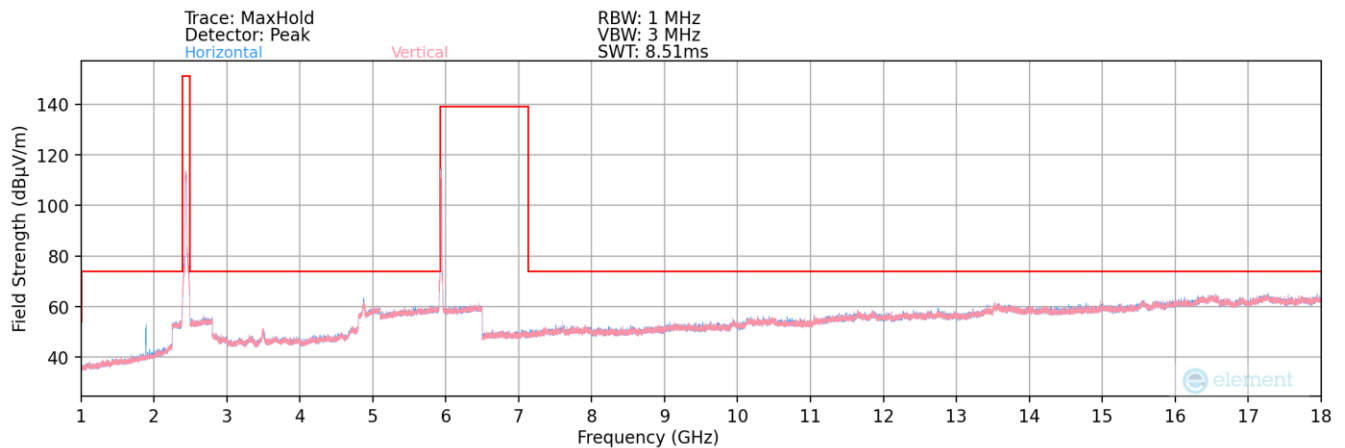


Plot 7-232. Radiated Spurious Plot above 1GHz (2.4GHz – 6GHz)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 159 of 177

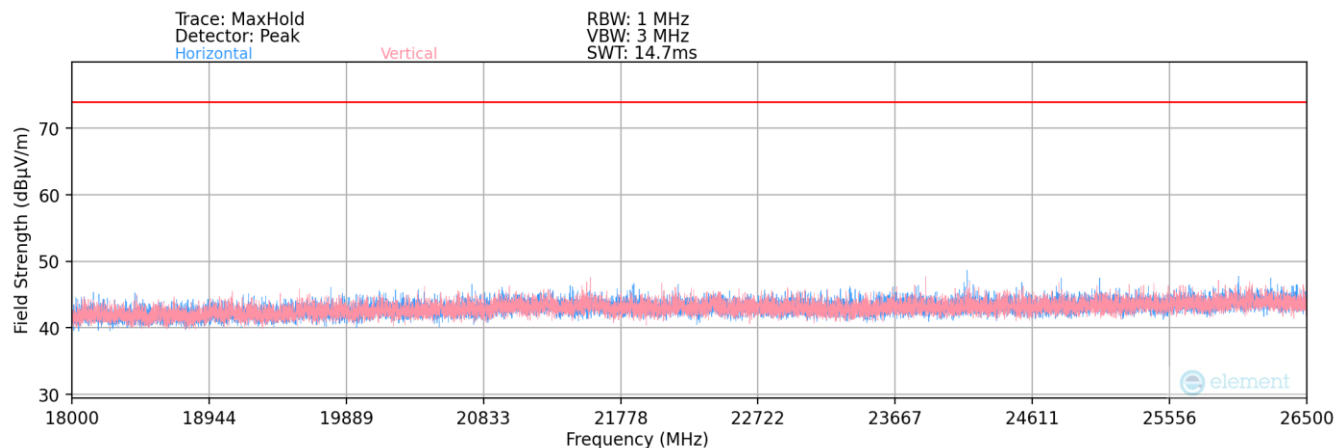

Plot 7-233. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 6GHz)

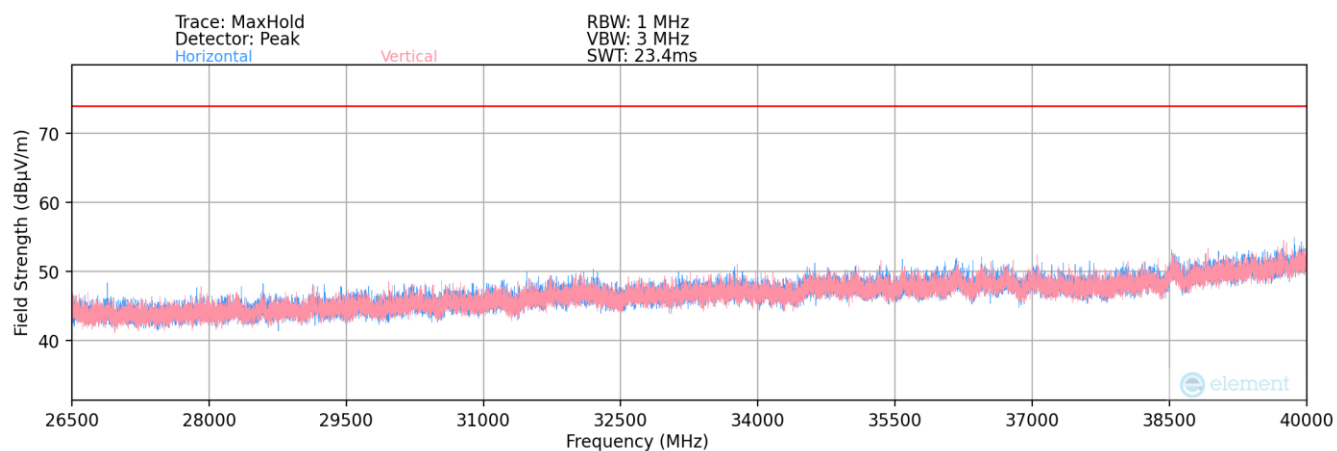

Plot 7-234. Radiated Spurious Plot above 26.5GHz (2.4GHz – 6GHz)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 160 of 177

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
78.58	Peak	H	155.00	307.00	-62.64	-19.04	25.32	40.00	-14.68
93.57	Peak	V	176.00	30.00	-67.36	-15.19	24.45	43.52	-19.07
803.96	Peak	V	-	-	-76.22	-2.49	28.29	46.02	-17.73
1880.00	Peak	H	-	-	-66.56	1.08	41.52	68.20	-26.68
3556.00	Peak	V	176.00	47.00	-67.51	6.64	46.13	68.20	-22.07
4776.00	Average	H	162.00	135.00	-79.77	12.28	39.51	53.98	-14.47
4776.00	Peak	H	162.00	135.00	-68.07	12.28	51.21	73.98	-22.77
8009.00	Peak	V	-	-	-71.21	15.27	51.06	68.20	-17.14
12920.00	Peak	V	-	-	-72.63	23.25	57.62	68.20	-10.58
15053.00	Peak	V	-	-	-72.90	26.87	60.97	68.20	-7.23
24162.00	Peak	H	150.00	161.00	-51.76	3.60	49.29	68.20	-18.91
28042.00	Peak	V	-	-	-57.37	4.30	44.39	68.20	-23.81
32952.00	Peak	V	-	-	-57.98	7.36	46.84	68.20	-21.36
35514.00	Peak	V	-	-	-58.22	8.70	47.94	68.20	-20.26


Table 7-24. Radiated Spurious Emission Measurements (2.4GHz – 6GHz)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 161 of 177


7.7.3 MIMO Radiated Restricted Band Edge Measurements – 20MHz

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11g
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

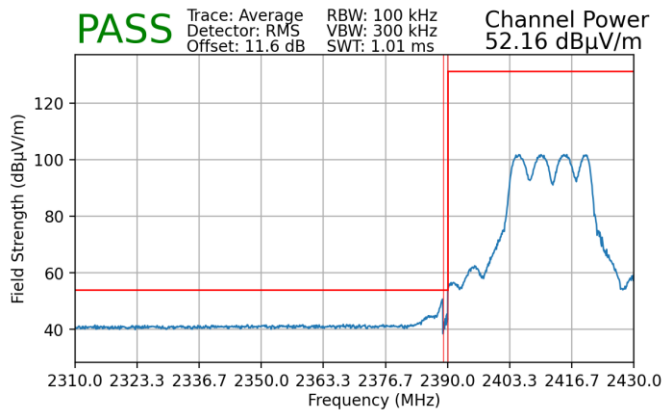


Plot 7-235. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

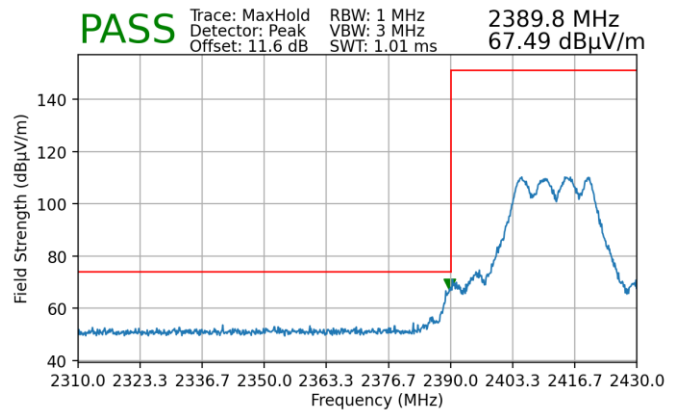


Plot 7-236. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

Worst Case Mode:	802.11g
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

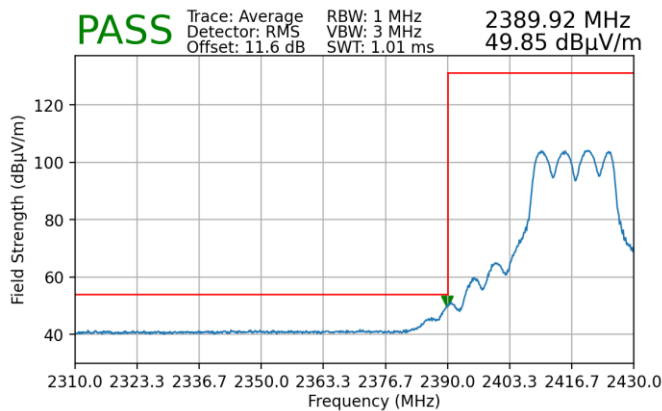


Plot 7-237. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

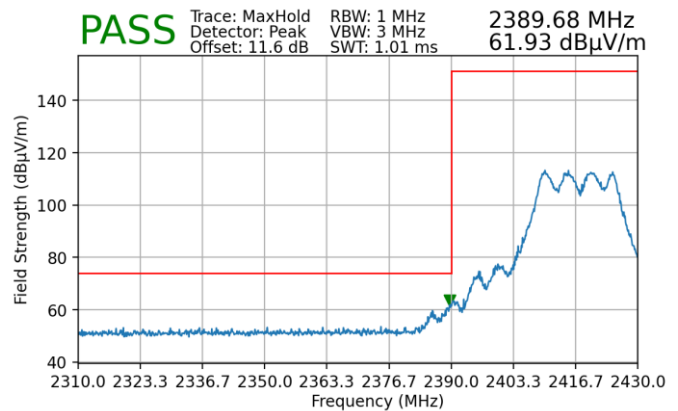


Plot 7-238. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 162 of 177

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2422MHz
Channel: 3

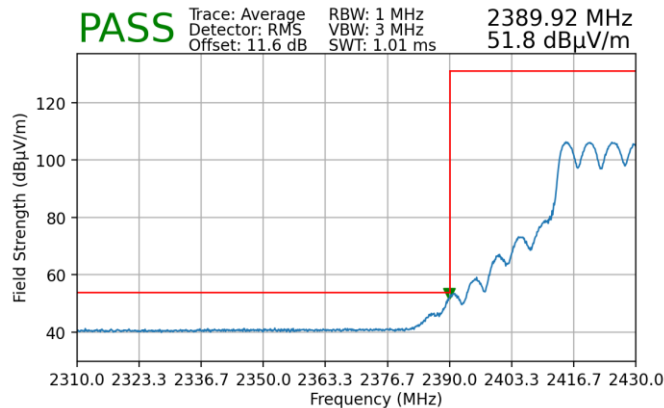


Plot 7-239. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

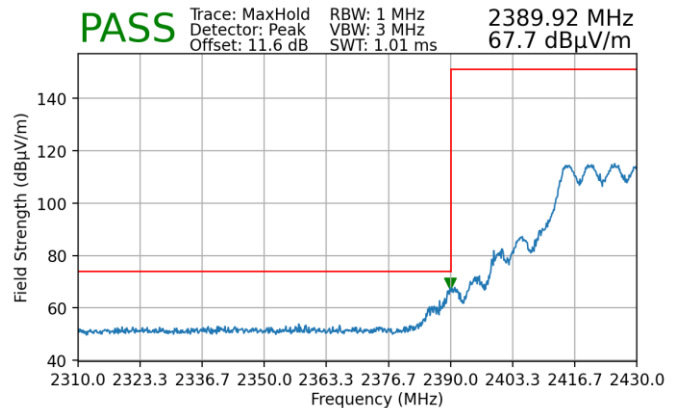


Plot 7-240. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MSC0
Distance of Measurements: 3 Meters
Operating Frequency: 2427MHz
Channel: 4

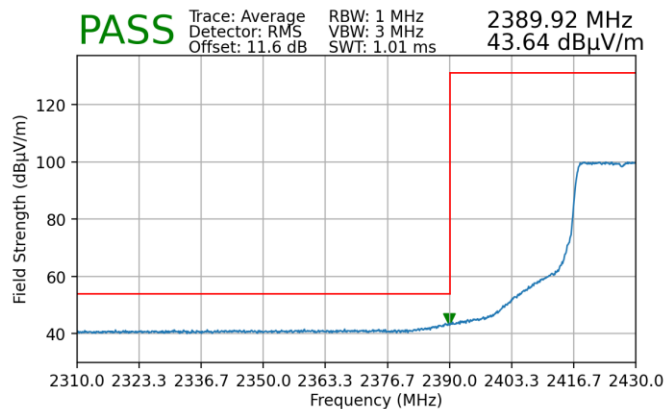


Plot 7-241. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

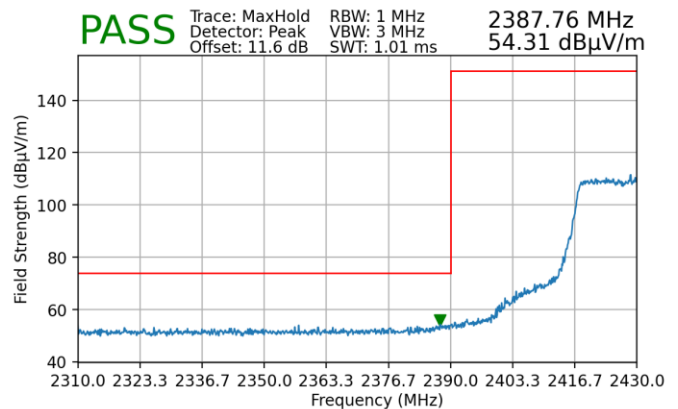


Plot 7-242. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 163 of 177

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2452MHz
Channel:	9

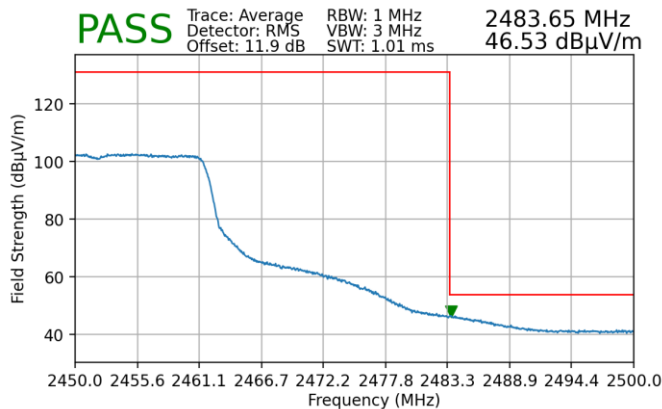


Plot 7-243. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

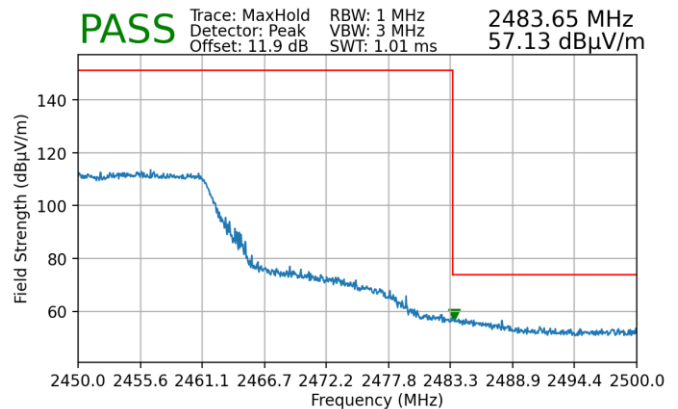


Plot 7-244. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode:	802.11g
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10

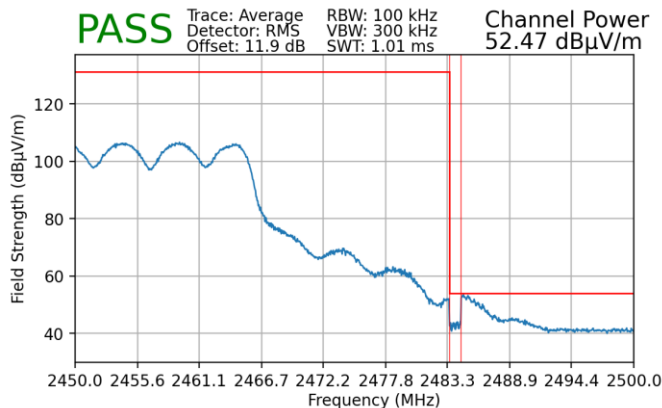


Plot 7-245. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

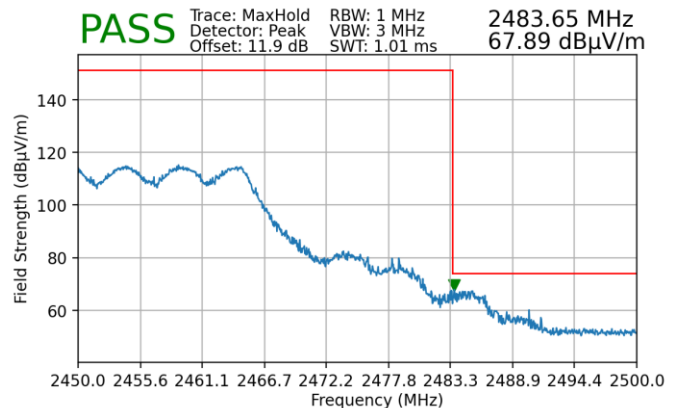


Plot 7-246. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 164 of 177

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

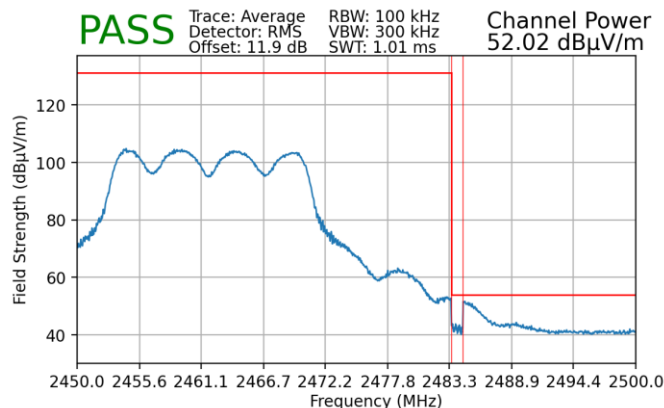


Plot 7-247. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

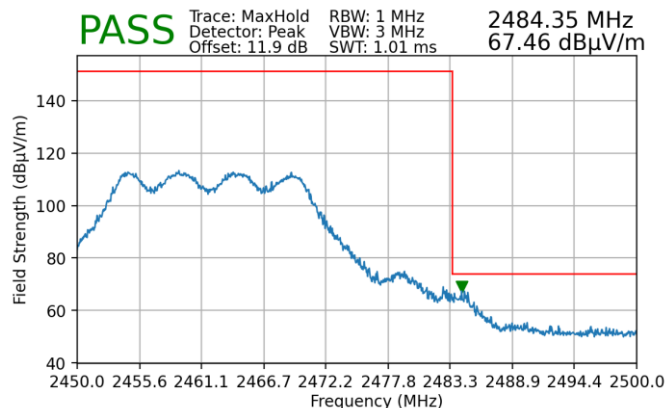


Plot 7-248. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

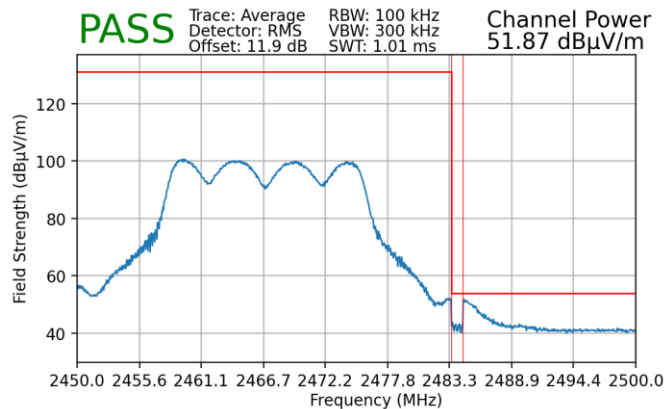

Plot 7-249. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

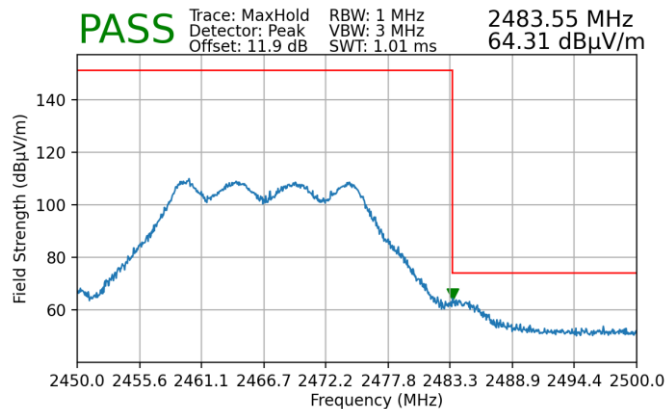


Plot 7-250. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)


FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 165 of 177



Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2472MHz
Channel:	13

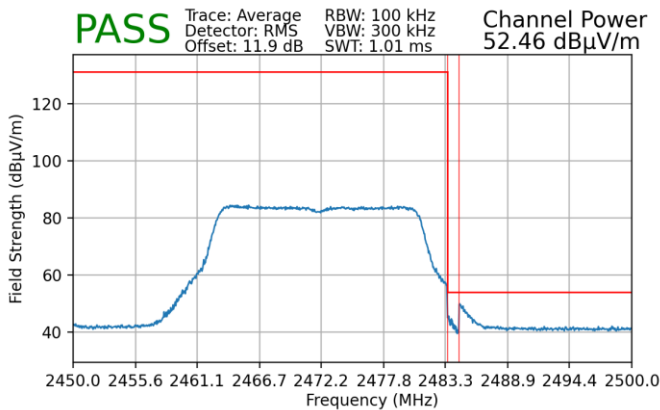

Plot 7-251. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

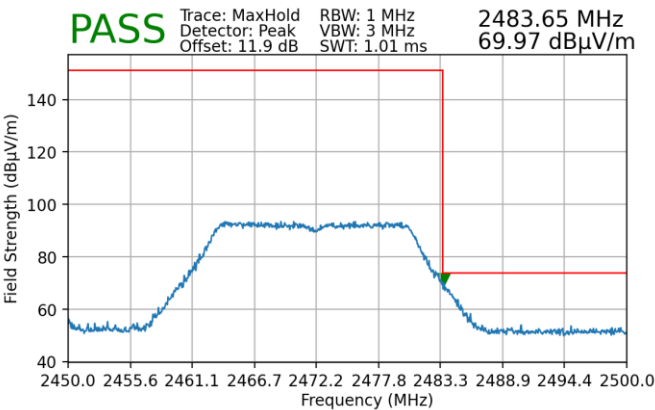


Plot 7-252. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 166 of 177


7.7.4 MIMO Radiated Restricted Band Edge Measurements – 40MHz

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2422MHz
Channel:	3

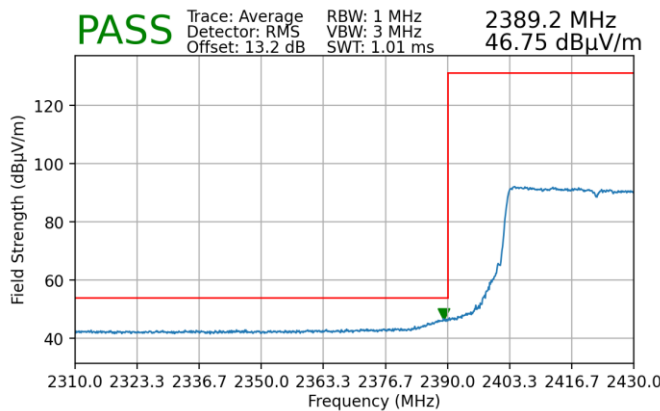


Plot 7-253. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

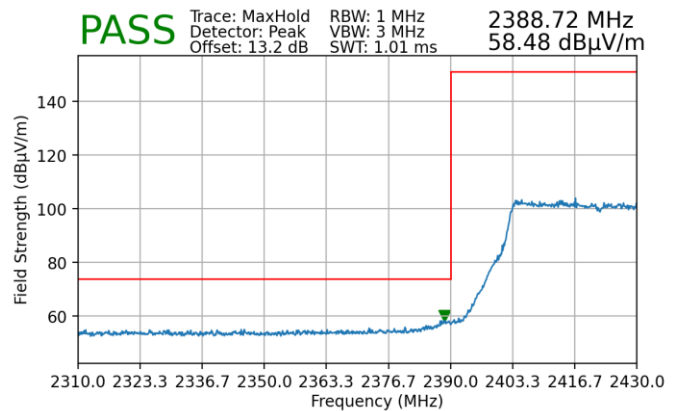


Plot 7-254. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2427MHz
Channel:	4

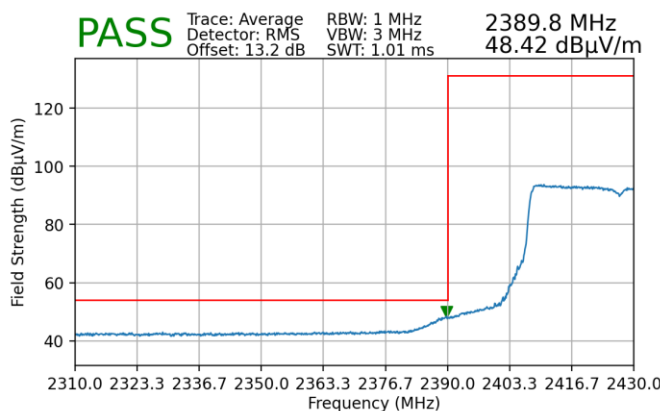


Plot 7-255. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

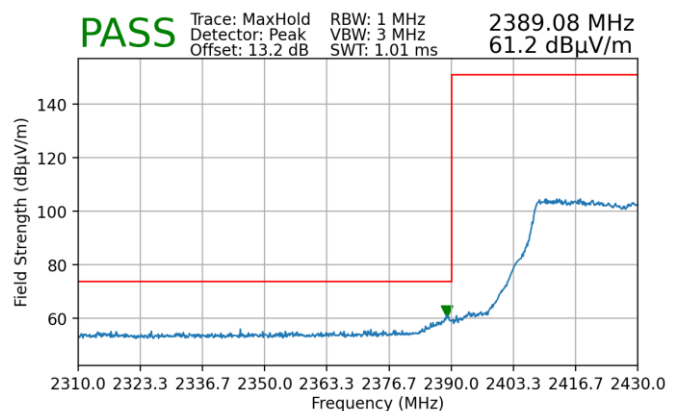


Plot 7-256. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 167 of 177

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2432MHz
Channel: 5

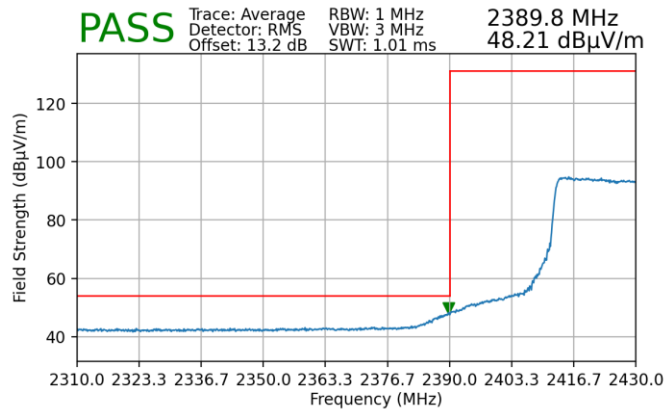


Plot 7-257. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

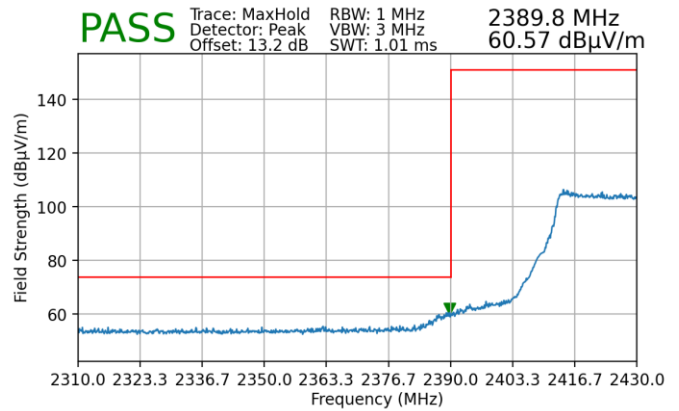


Plot 7-258. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6

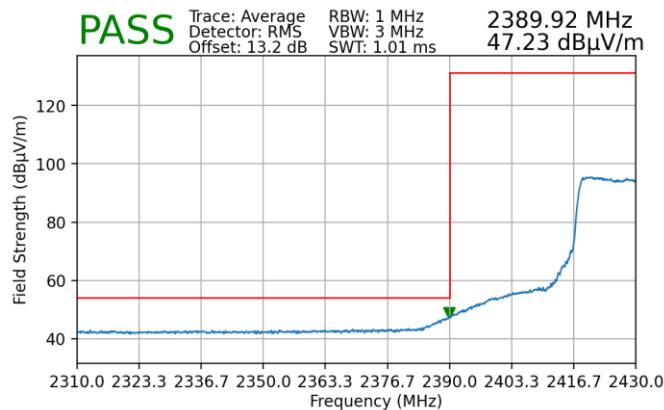

Plot 7-259. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

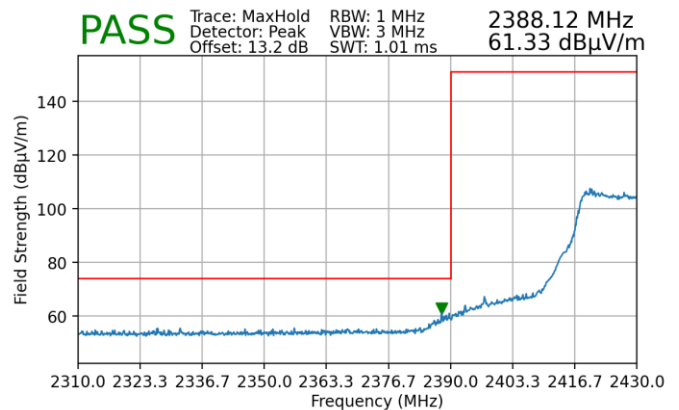


Plot 7-260. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)


FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 168 of 177



Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6

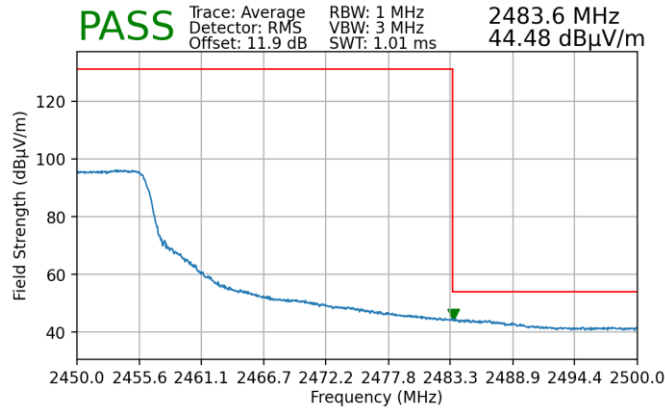


Plot 7-261. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

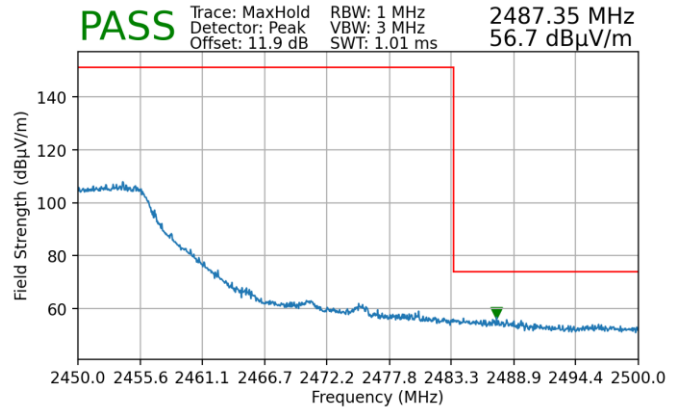


Plot 7-262. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2442MHz
Channel: 7

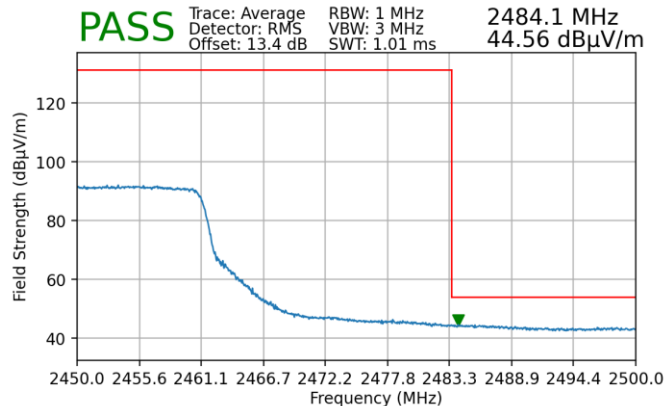

Plot 7-263. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

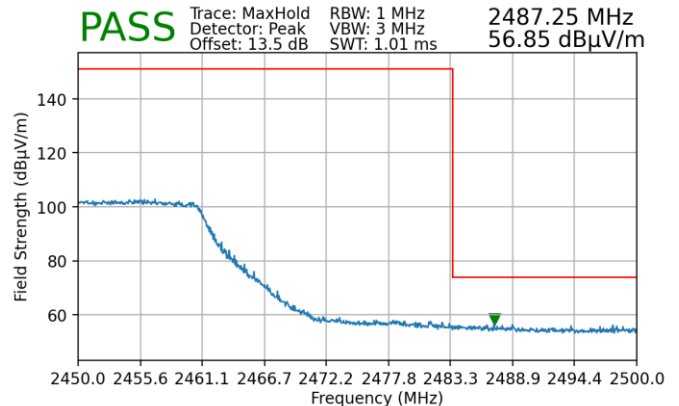

Plot 7-264. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: C3K2076 IC: 3048A-2085		MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device		Page 169 of 177


© 2026 ELEMENT

V11.3 5/14/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2447MHz
Channel: 8

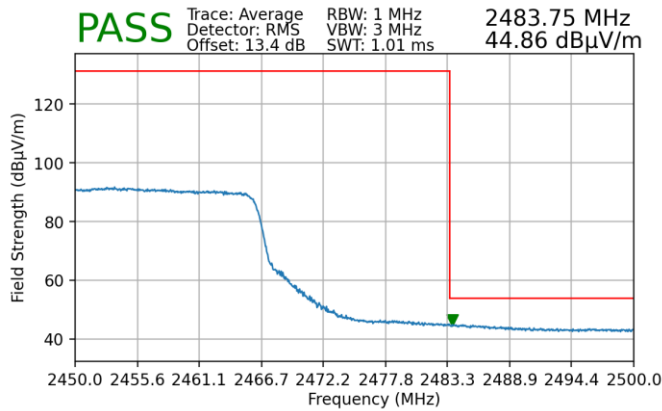


Plot 7-265. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

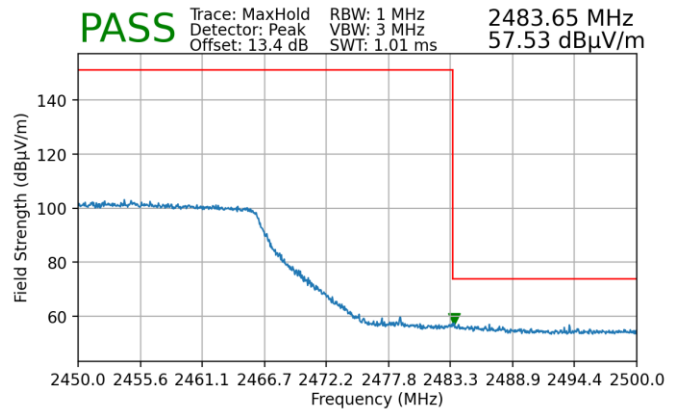


Plot 7-266. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

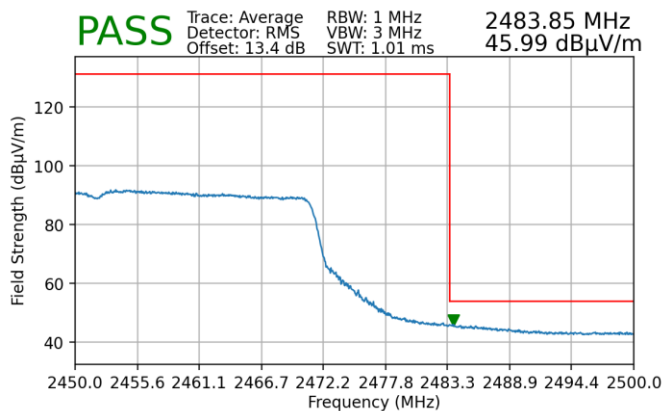

Plot 7-267. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

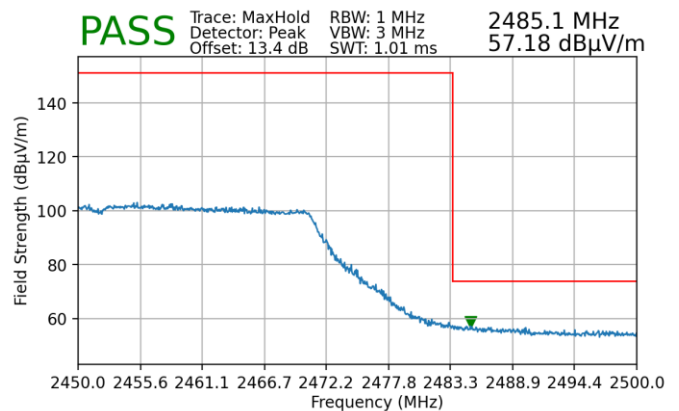

Plot 7-268. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)


FCC ID: C3K2076 IC: 3048A-2085		MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device		Page 170 of 177

© 2026 ELEMENT


V11.3 5/14/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

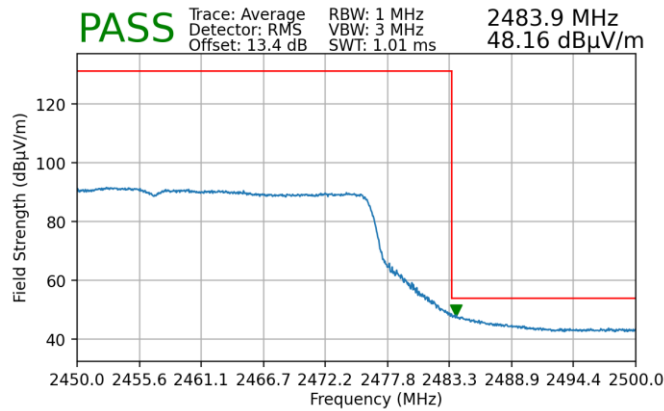


Plot 7-269. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

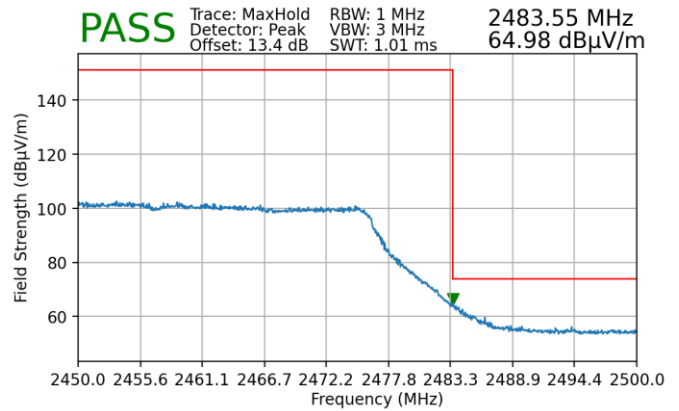


Plot 7-270. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

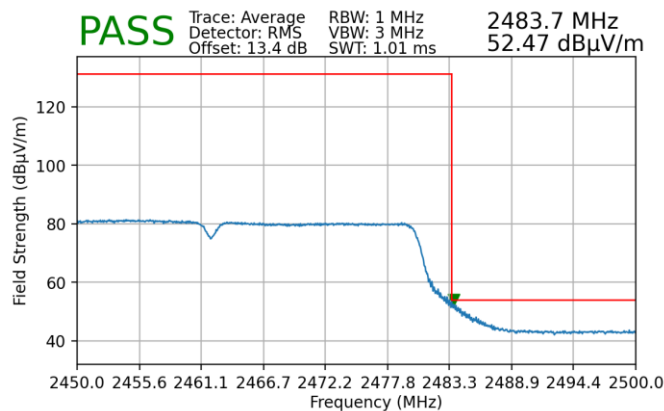

Plot 7-271. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

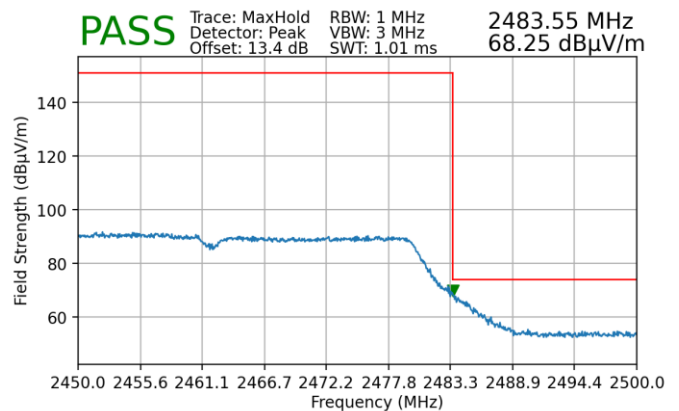

Plot 7-272. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 171 of 177

7.8 Line-Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per §15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-25. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 172 of 177

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


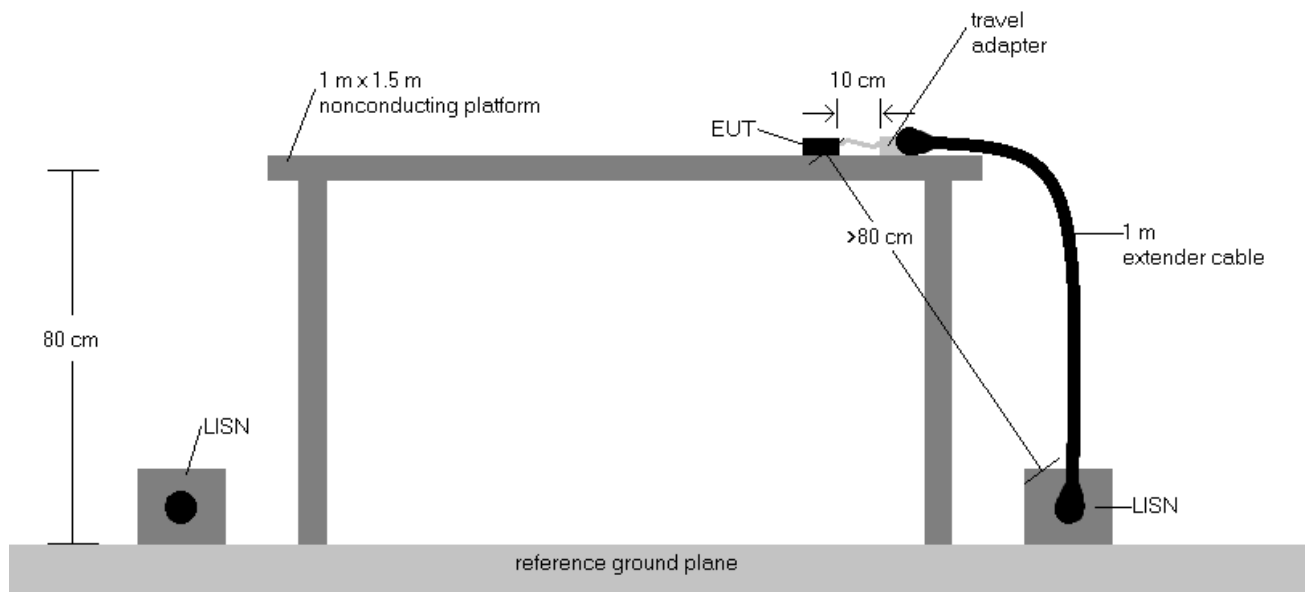


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP\AV Level (dB}\mu\text{V)} = \text{QP\AV Analyzer\Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP\AV Limit (dB}\mu\text{V)} - \text{QP\AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 173 of 177

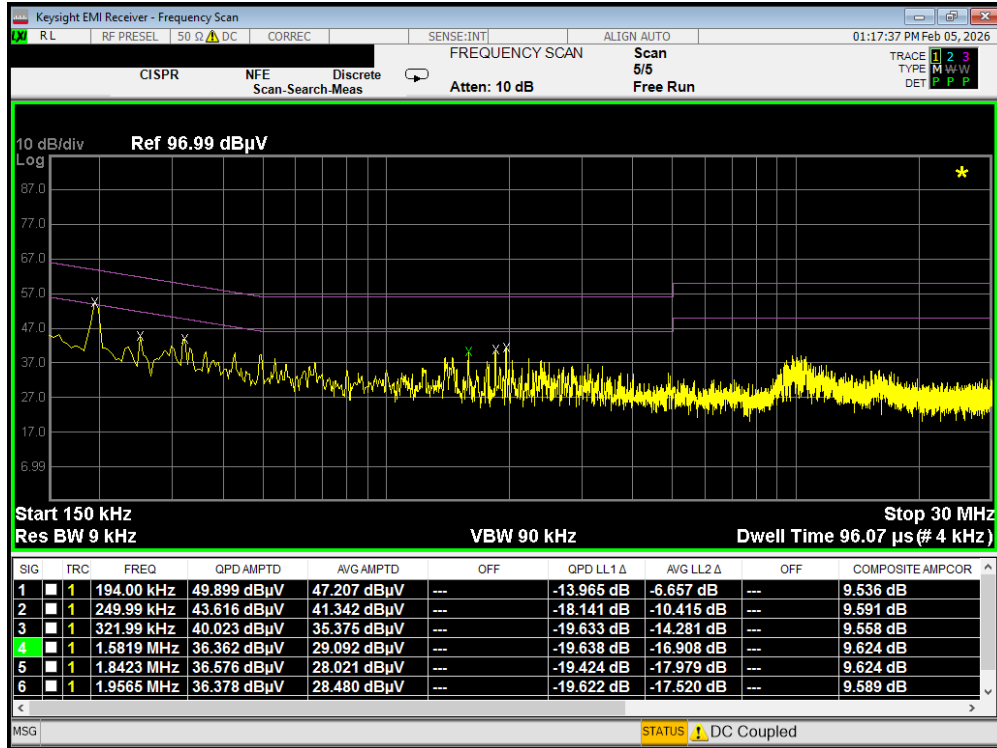

Plot 7-273. Line Conducted Plot with 802.11b (L1)

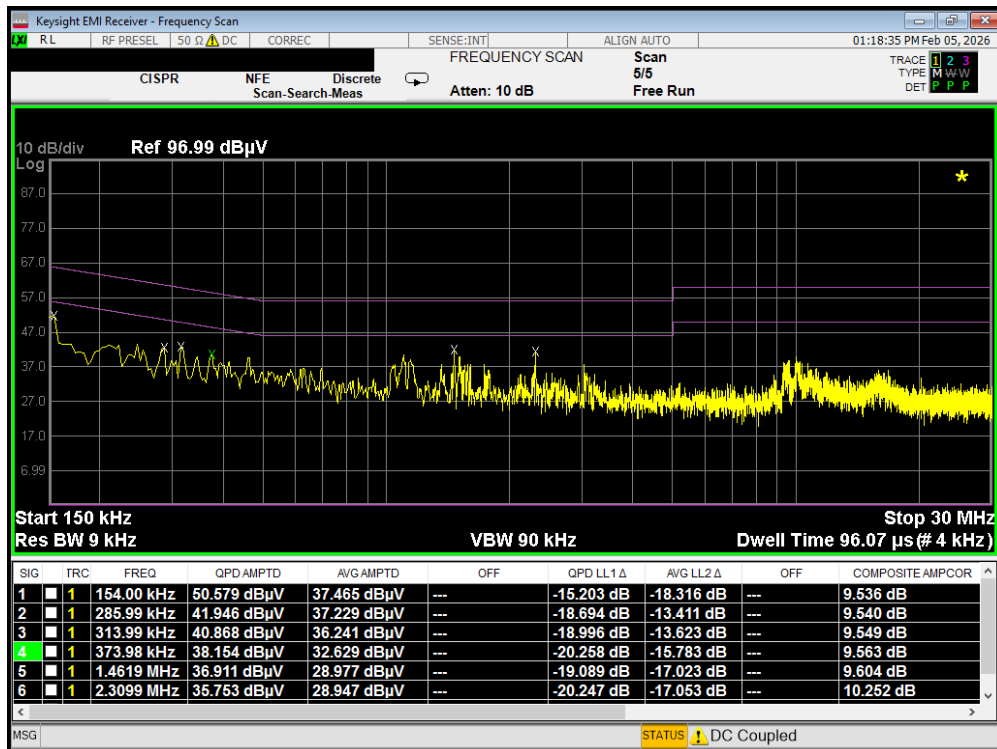

Plot 7-274. Line Conducted Plot with 802.11b (N)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 174 of 177

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Microsoft Corporation Portable Computing Device FCC ID: C3K2076 / IC: 3048A-2076** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and with RSS-247 of the Innovation, Science and Economic Development Canada rules. After additional testing it is concluded that the component change detailed in the FCC Change Document does not meaningfully affect compliance.

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 175 of 177

9.0 APPENDIX A – DATA REFERENCING RESULTS

Overview

The spot-check data presented in this section was measured on the variant model following the guidance of the FCC's Data Referencing guidance in KDB 484596 D01 v03. Each spot-check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device. For the worst-case RSE data, the measurement is determined by an actual emission and not by noise floor.

All test cases were performed to verify the variant EUT is still in compliance with the spot-checked results to the reference device and was performed using the guidance of ANSI C63.10-2020.

Notes

- Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.

Conducted Spot-Checks – C3K2076

2.4GHz WIFI (20MHz 802.11b MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq [MHz]	Channel	Detector	Conducted Power [dBm]								
			ANT1	ANT2	MIMO						
2457	10	Average	21.68	21.51	24.61	30.00	-5.39	5.10	29.71	36.02	-6.31

Table 9-1. Conducted Output Power Measurements (Spot-check)

Radiated Spot-Checks – C3K2076


Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
7311.00	Avg	H	-	-	-81.48	15.19	0.00	40.71	53.98	-13.27

Table 9-2. RSE Measurements (Spot-check)

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 176 of 177

Worst Case Mode: 802.1b
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

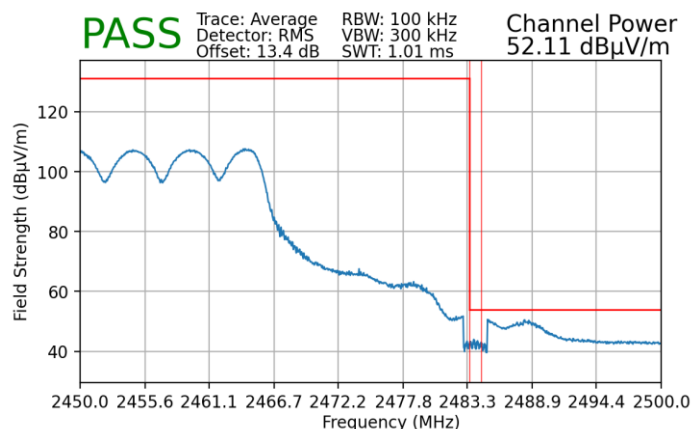

**Plot 9-1. Radiated Restricted Lower Band Edge
Measurement MIMO (Average)**

Results

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: 2085 C2PC	Variant Model: 2076 C2PC	Deviation (dB)	Max Deviation (dB)	Pass/Fail
15.247(b)(3)	Conducted Output Power	802.11b MIMO Ch.10 - Average	dBm	N/A	23.92	24.61	0.69	1	PASS
15.209	Radiated Spurious Emissions	802.11g MIMO Ch.6 - 7311MHz - Average	dBμV/m	53.98	40.94	40.71	-0.23	3	PASS
15.209	Radiated Band Edge Emissions	802.11b MIMO Ch.10 - Average	dBm	53.98	52.47	52.11	-0.36	3	PASS

Table 9-3. Summary of Spot-checks

- END OF TEST REPORT -

FCC ID: C3K2076 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-07-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 177 of 177