



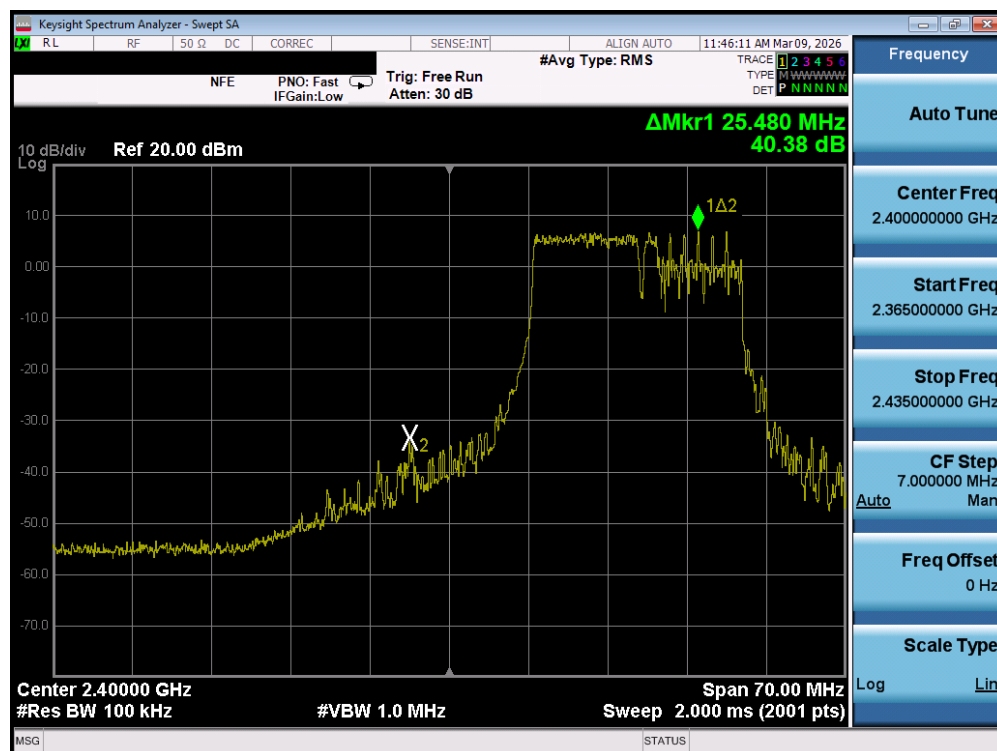


Plot 7-96. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106 + 26 Tones – Ch. 2) – DUAL ANT 2

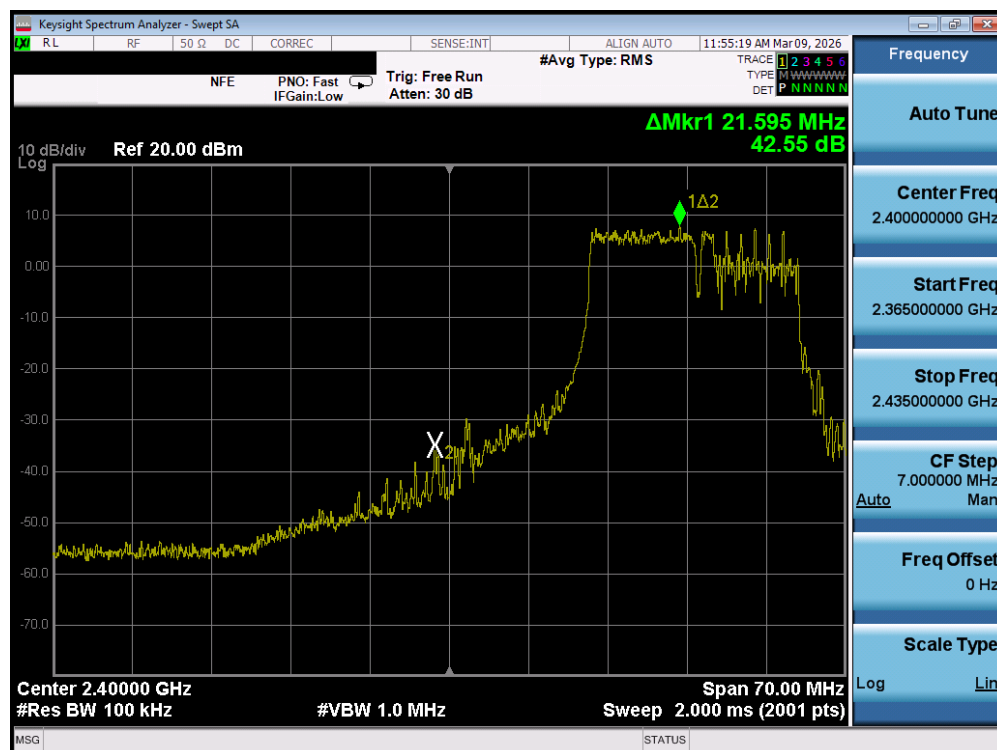


Plot 7-97. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106 + 26 Tones – Ch. 3) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 79 of 138

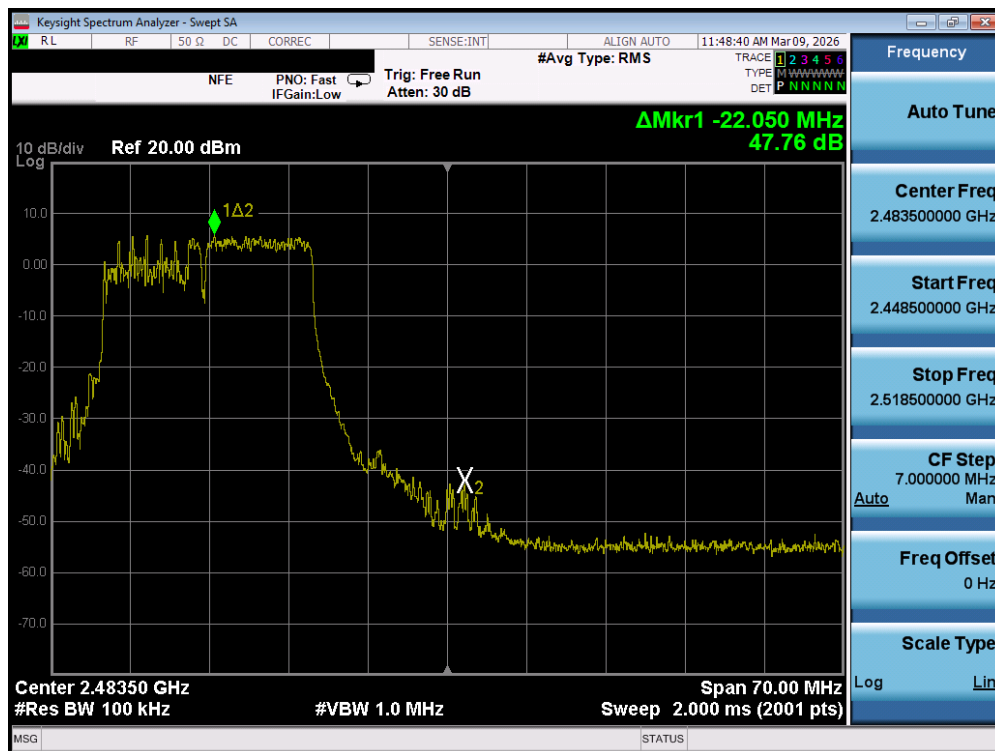




Plot 7-98. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106 + 26 Tones – Ch. 11) – DUAL ANT 2

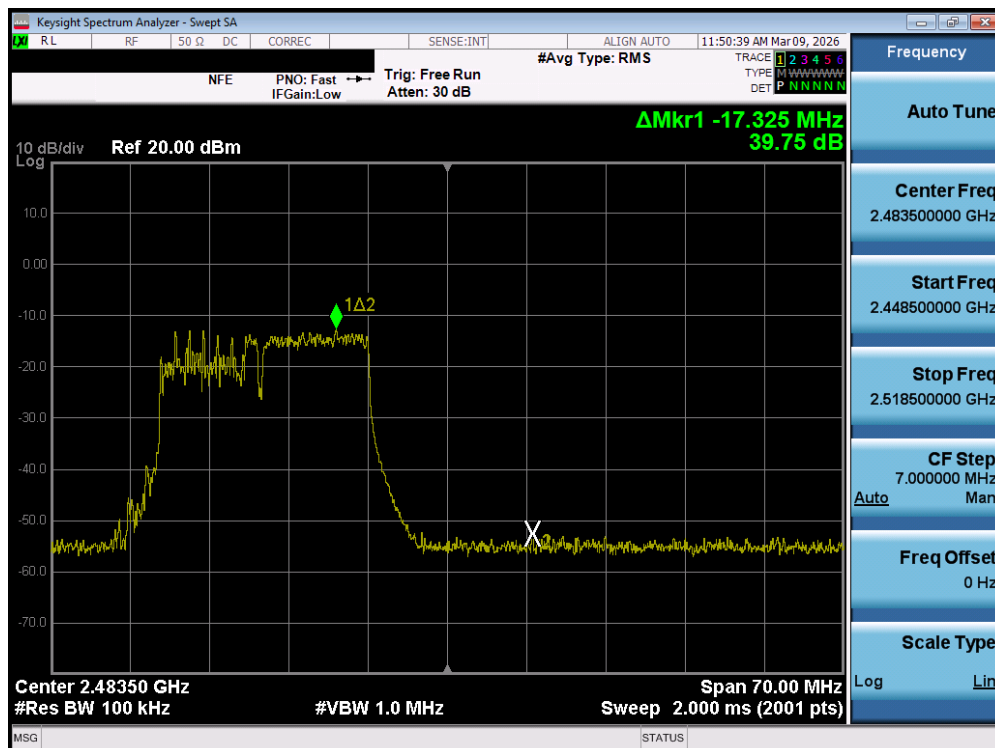


Plot 7-99. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106 + 26 Tones – Ch. 12) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 80 of 138

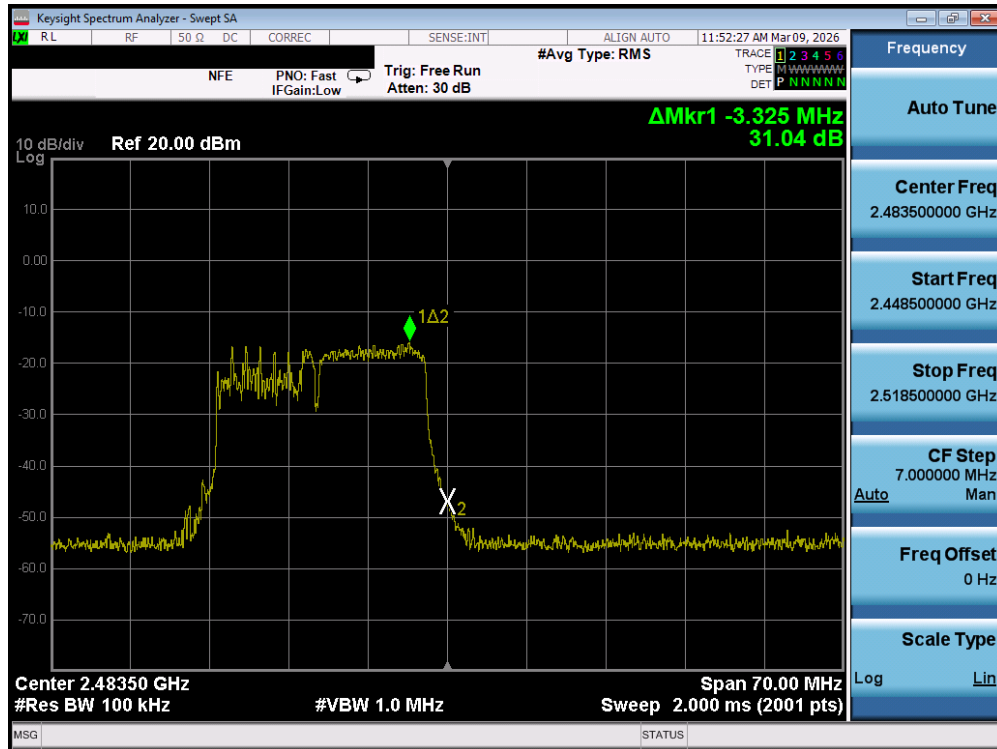


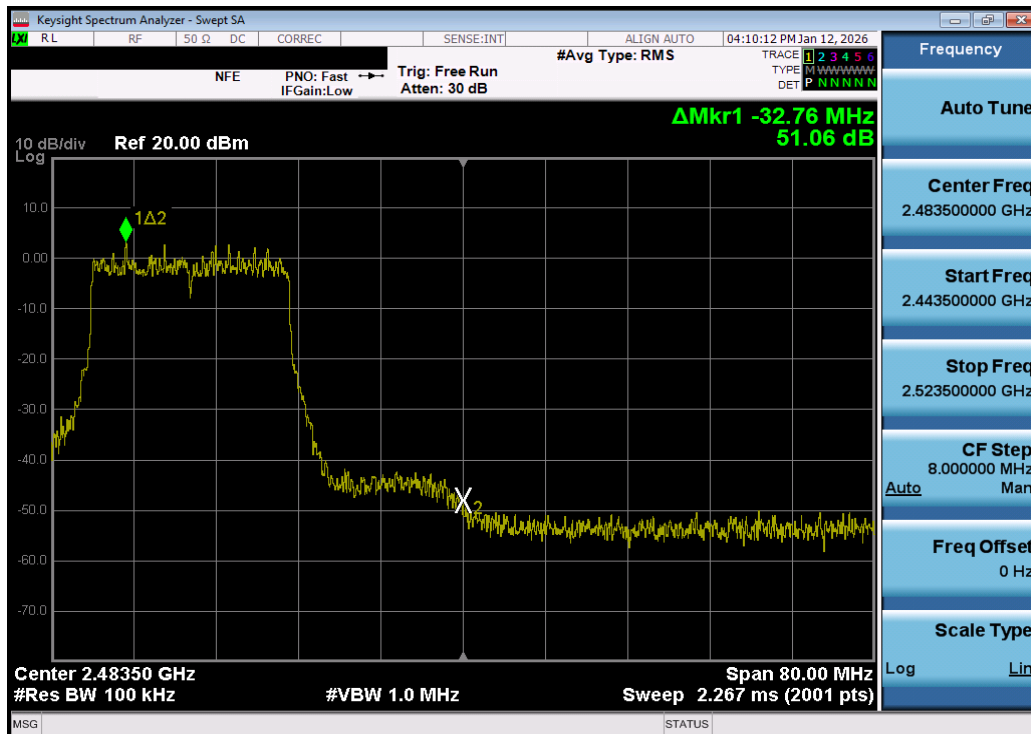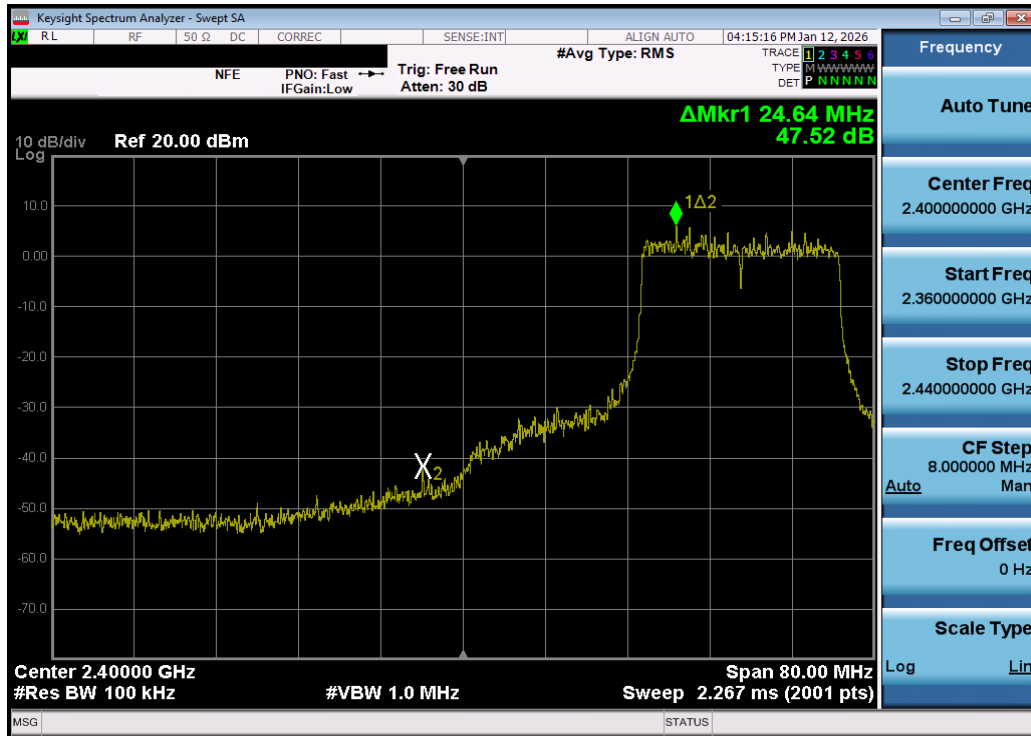

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 83 of 138

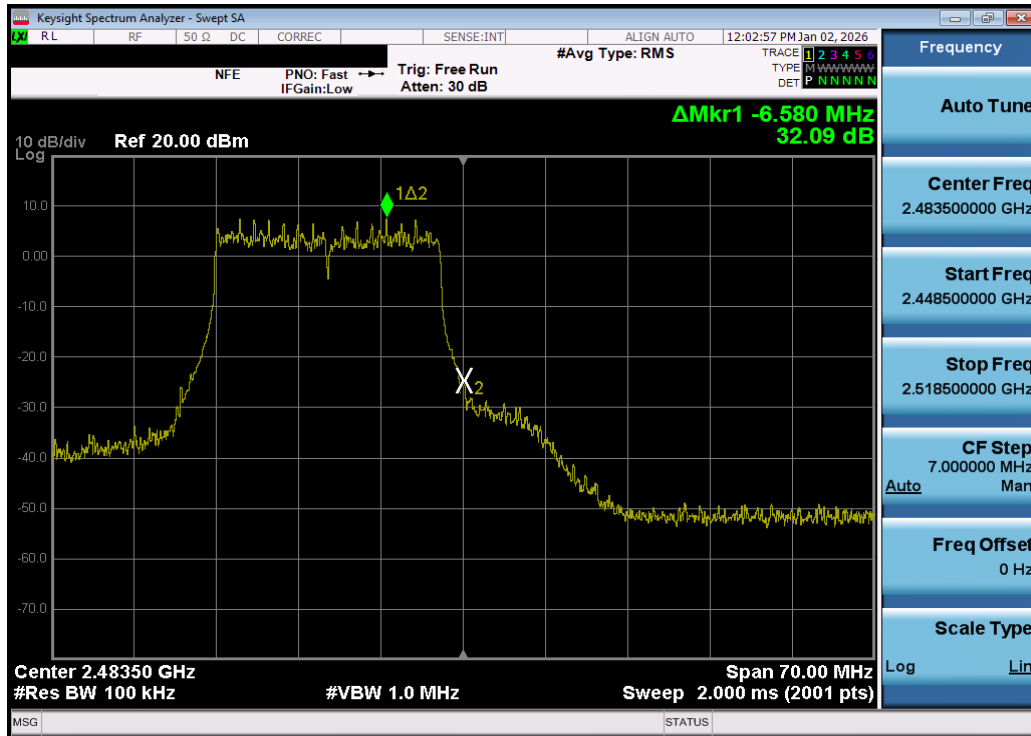



Plot 7-108. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 242 Tones – Ch. 13) – DUAL ANT 2

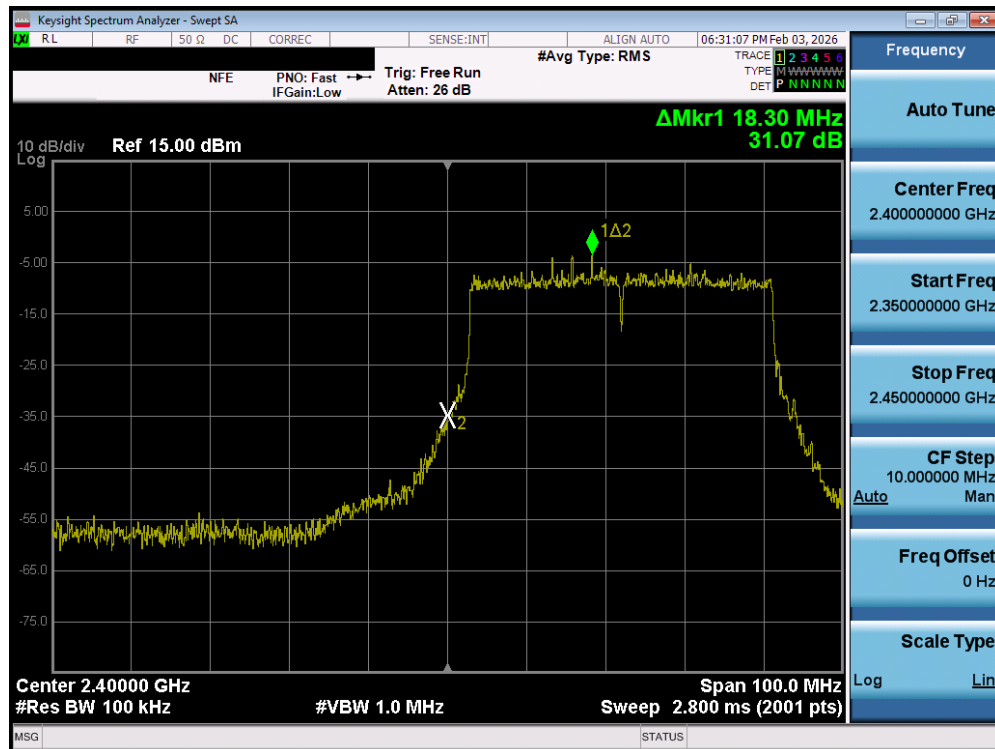


Plot 7-109. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 484 Tones – Ch. 3) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 85 of 138

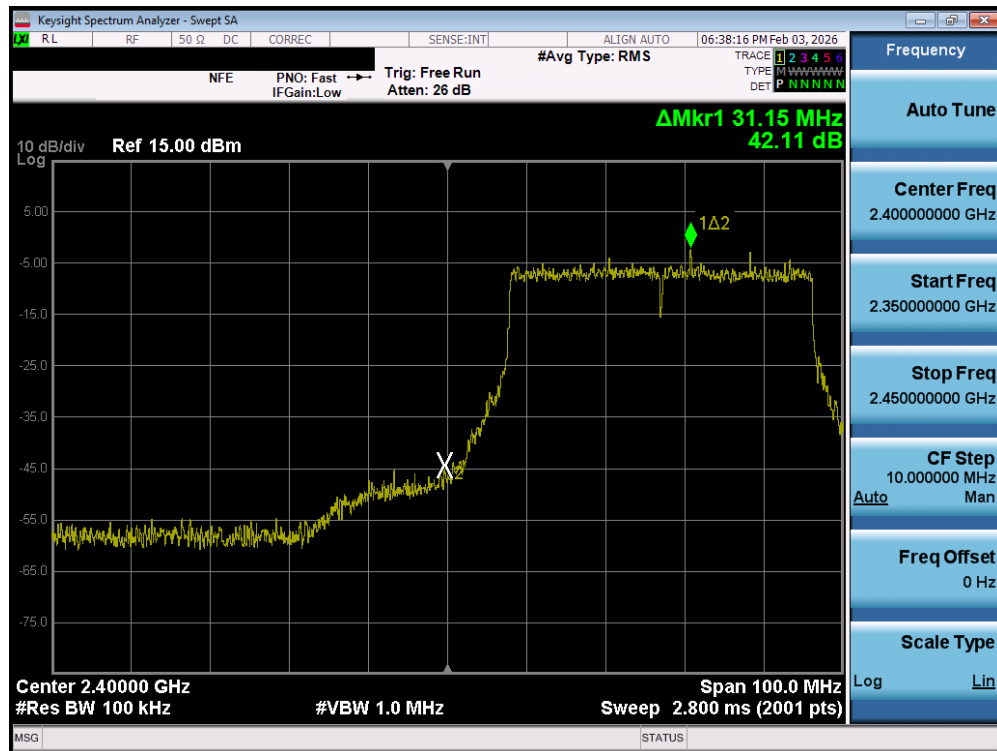

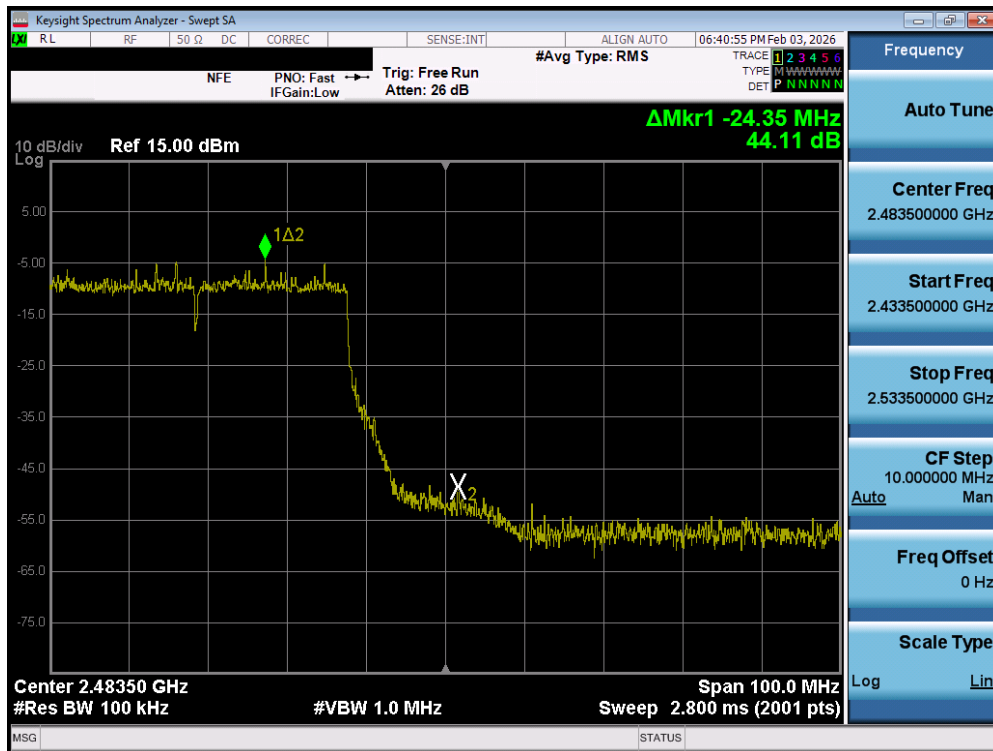


Plot 7-112. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 484 Tones – Ch. 9) – DUAL ANT 2

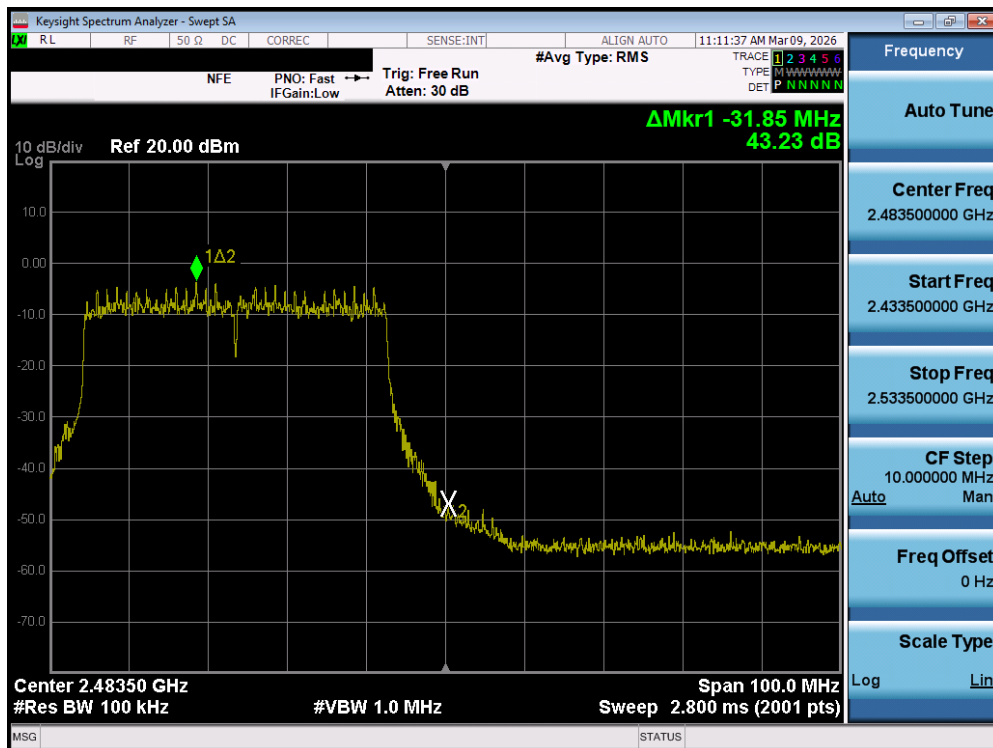

Plot 7-113. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 484 Tones – Ch. 10) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 87 of 138

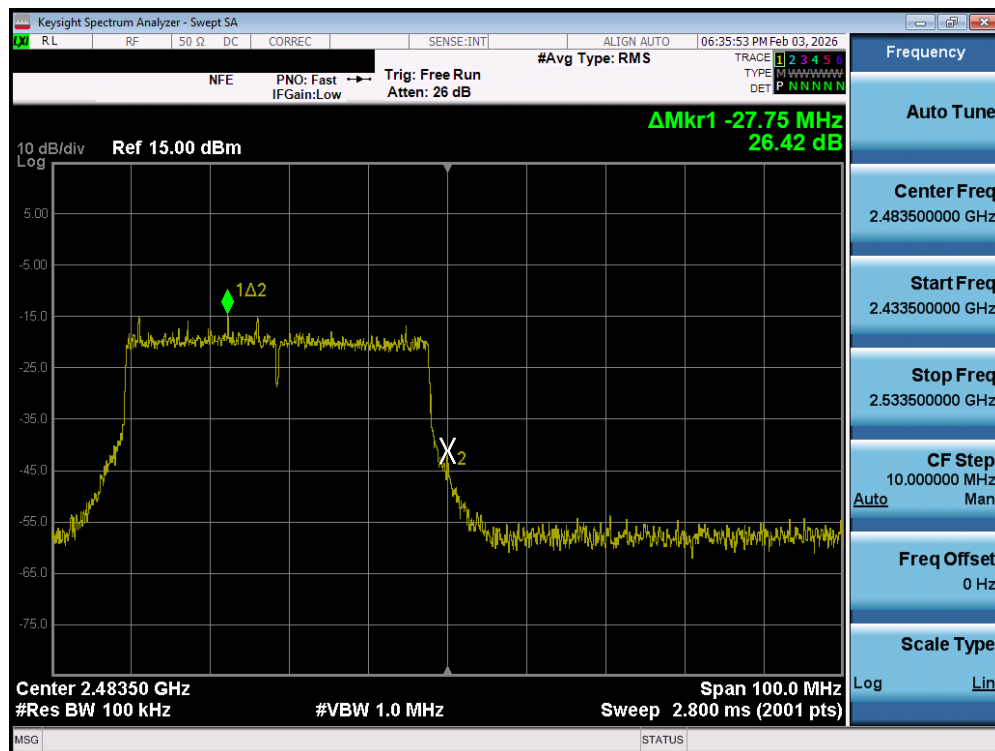

Plot 7-114. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 484 Tones – Ch. 11) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 88 of 138

7.6 Conducted Spurious Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst-case configuration. For the following out of band conducted emissions plots, the EUT was set to a data rate of MCS0 in 802.11be mode as this setting produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.11.3 of ANSI C63.10-2020.

Test Procedure Used

ANSI C63.10-2020 – Section 11.11.3
ANSI C63.10-2020 – Section 14.3.3

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup


FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 89 of 138

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2020 Section 14.3.3, it was unnecessary to show compliance through the summation of test results of the individual outputs.

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 90 of 138

7.6.1 MIMO Antenna-1 Conducted Spurious Emission

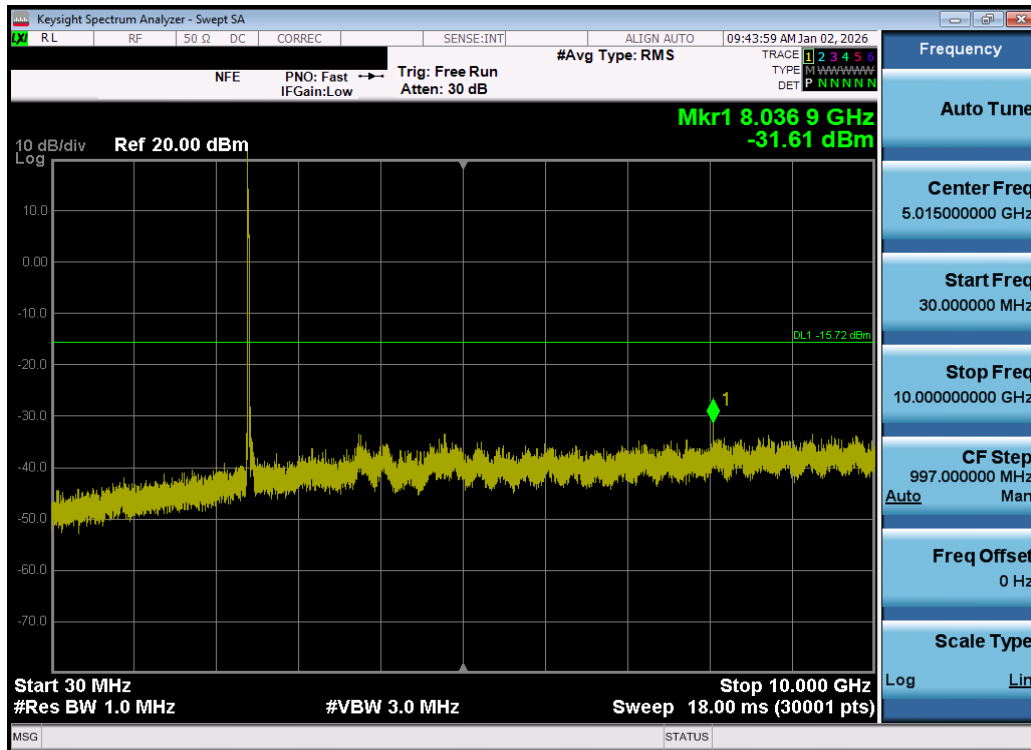


Plot 7-115. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 26 Tones – Ch. 1) – DUAL ANT 1

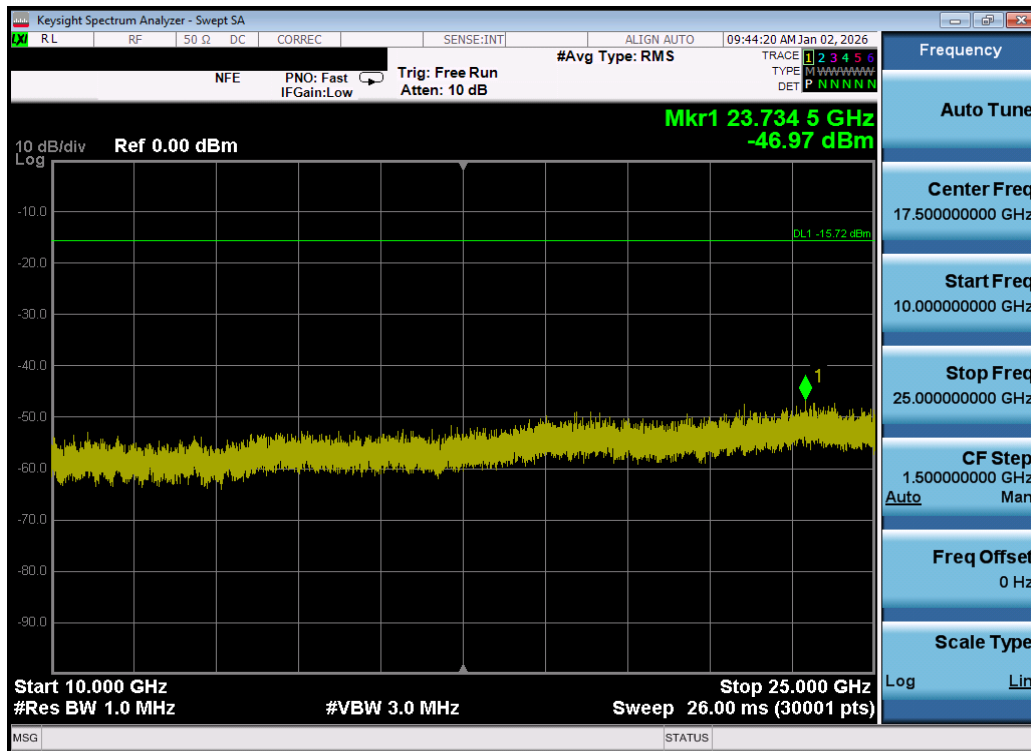


Plot 7-116. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 26 Tones – Ch. 1) – DUAL ANT 1

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 91 of 138

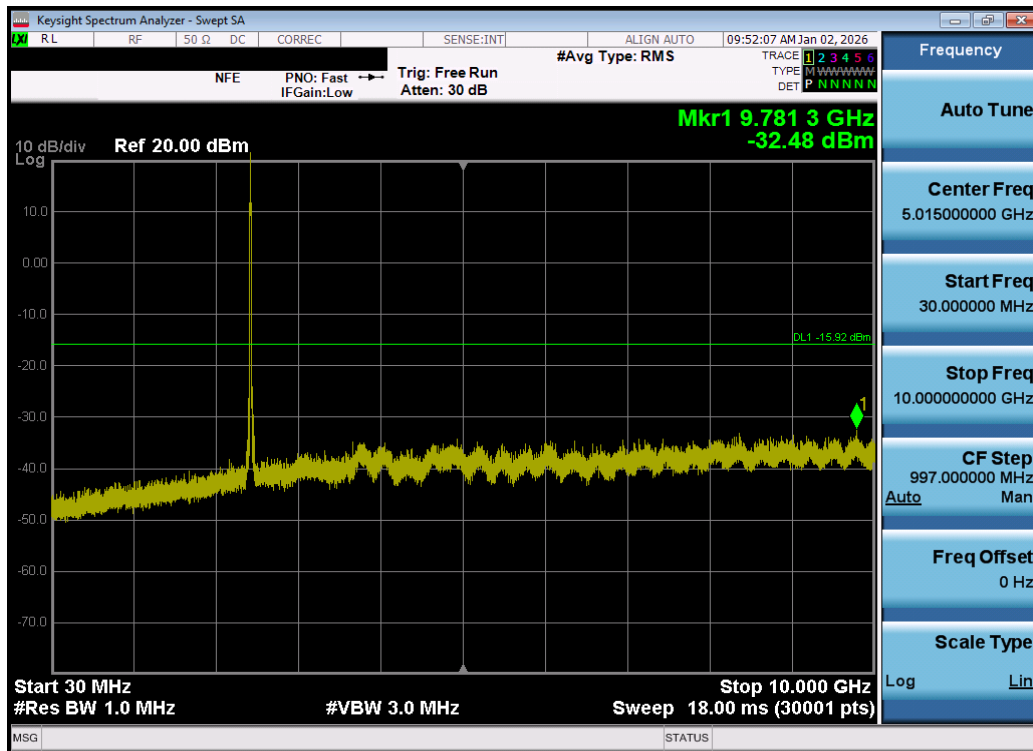


Plot 7-117. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 26 Tones – Ch. 6) – DUAL ANT 1

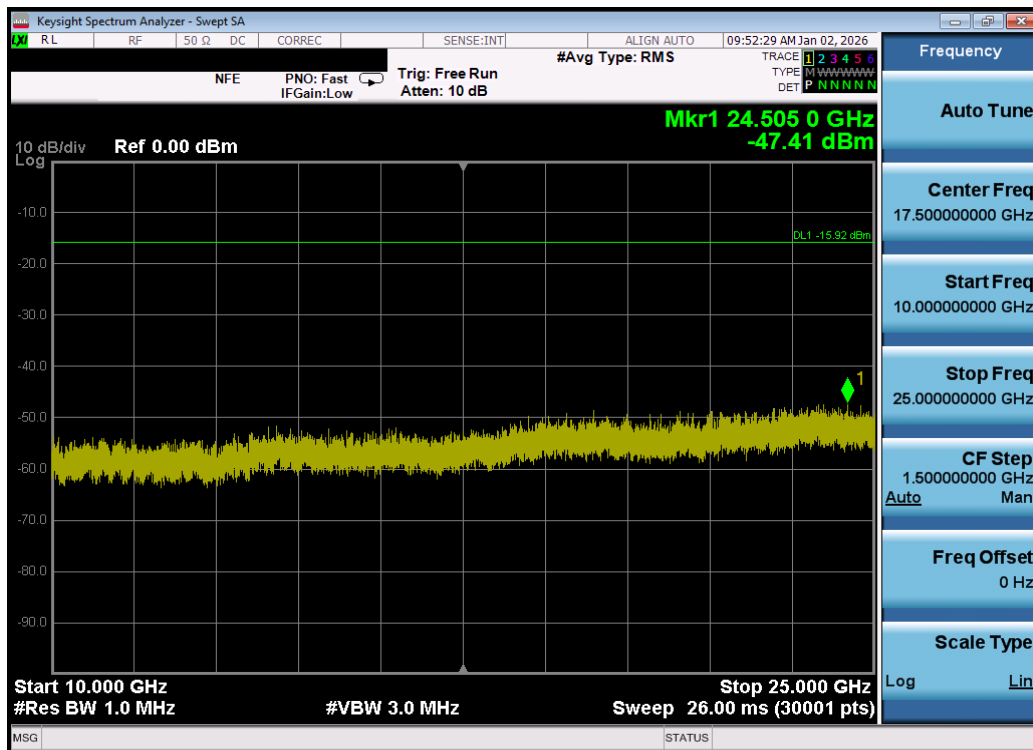


Plot 7-118. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 26 Tones – Ch. 6) – DUAL ANT 1

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 92 of 138

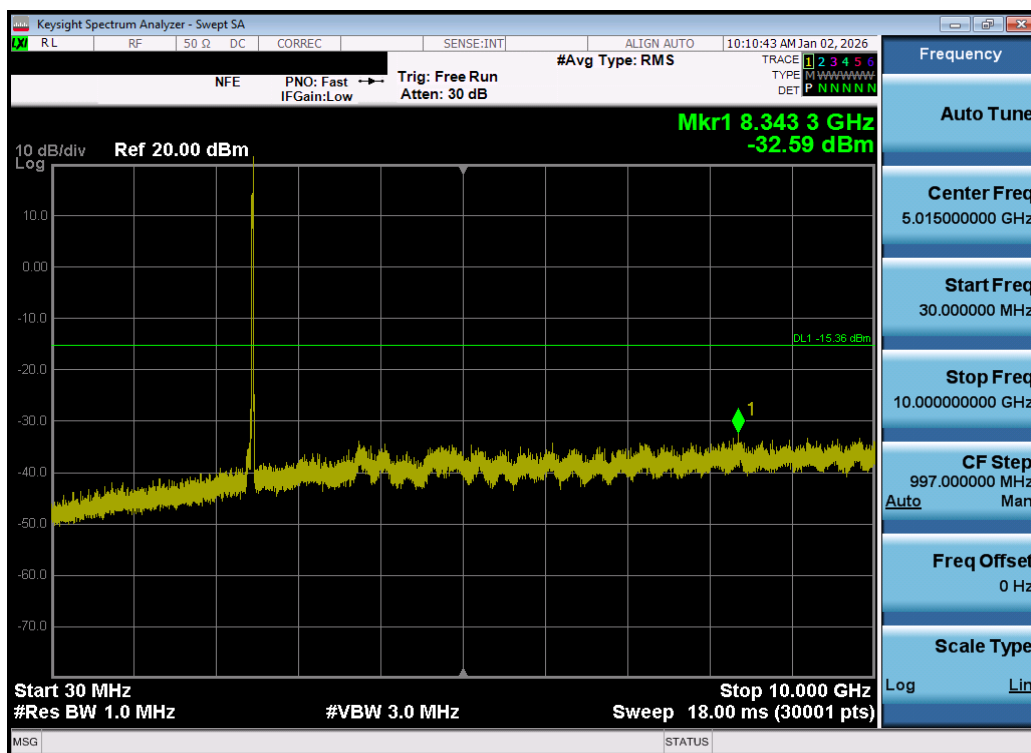


Plot 7-119. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 26 Tones – Ch. 11) – DUAL ANT 1

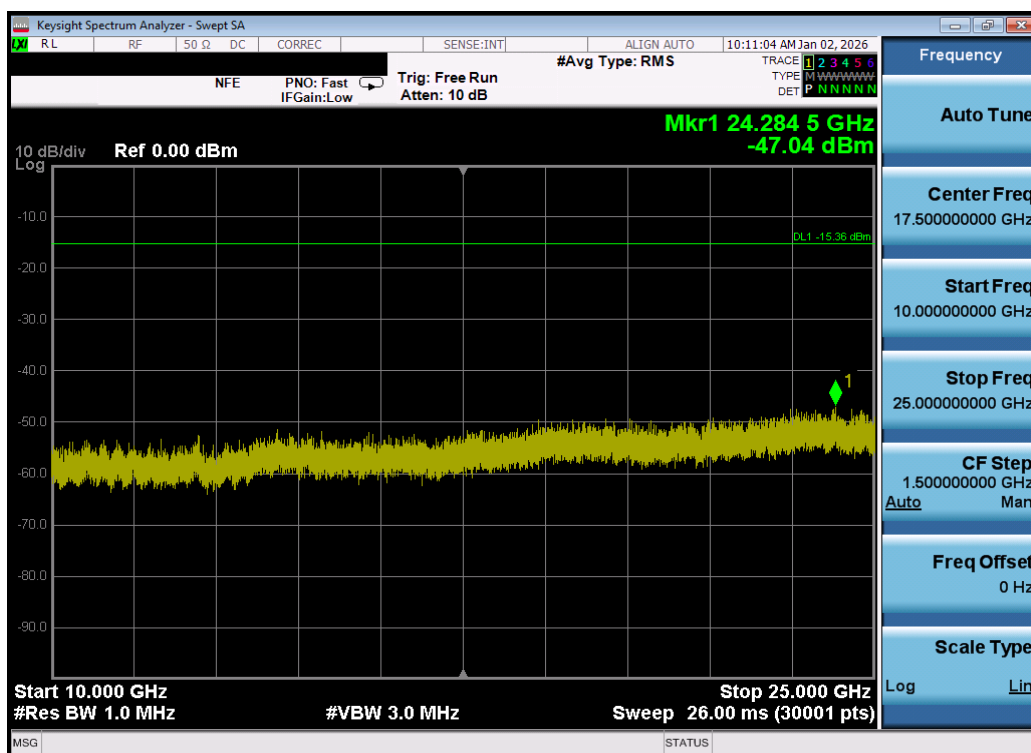


Plot 7-120. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 26 Tones – Ch. 11) – DUAL ANT 1

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 93 of 138

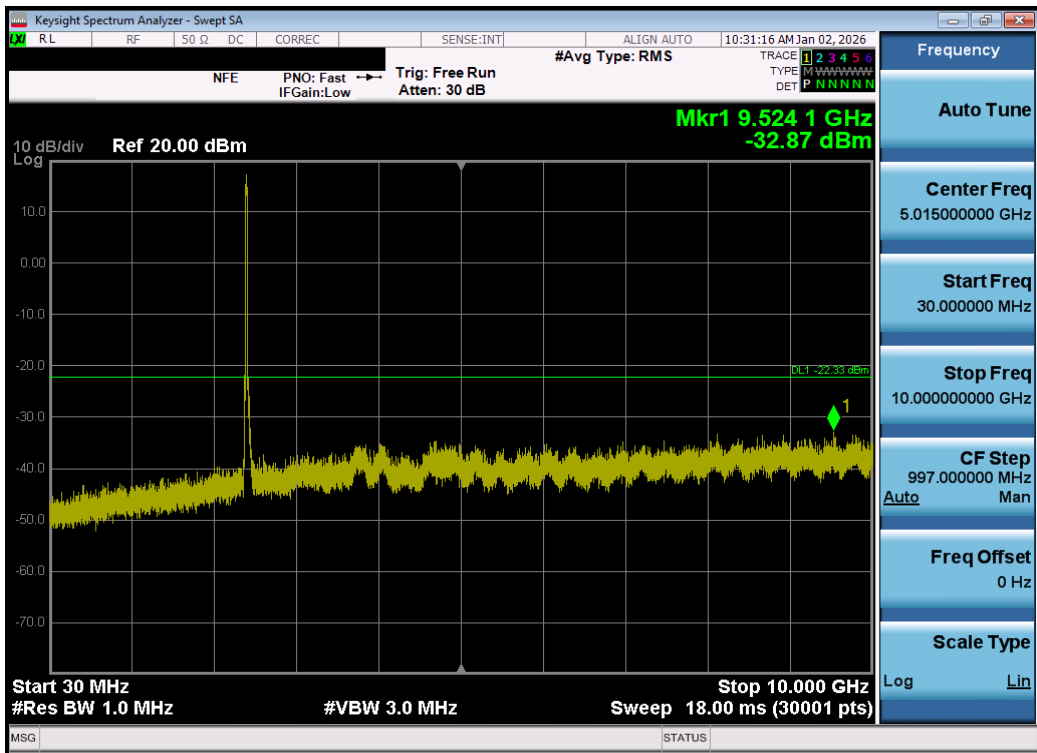


Plot 7-121. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 242 Tones – Ch. 1) – DUAL ANT 1

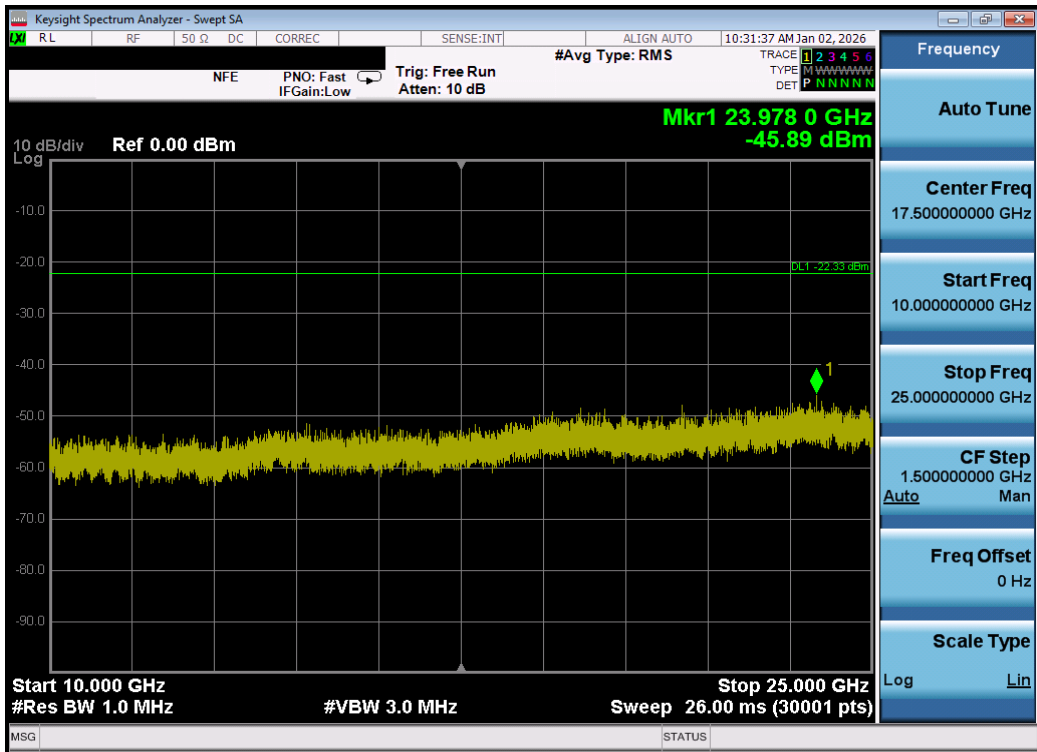


Plot 7-122. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 242 Tones – Ch. 1) – DUAL ANT 1

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 94 of 138

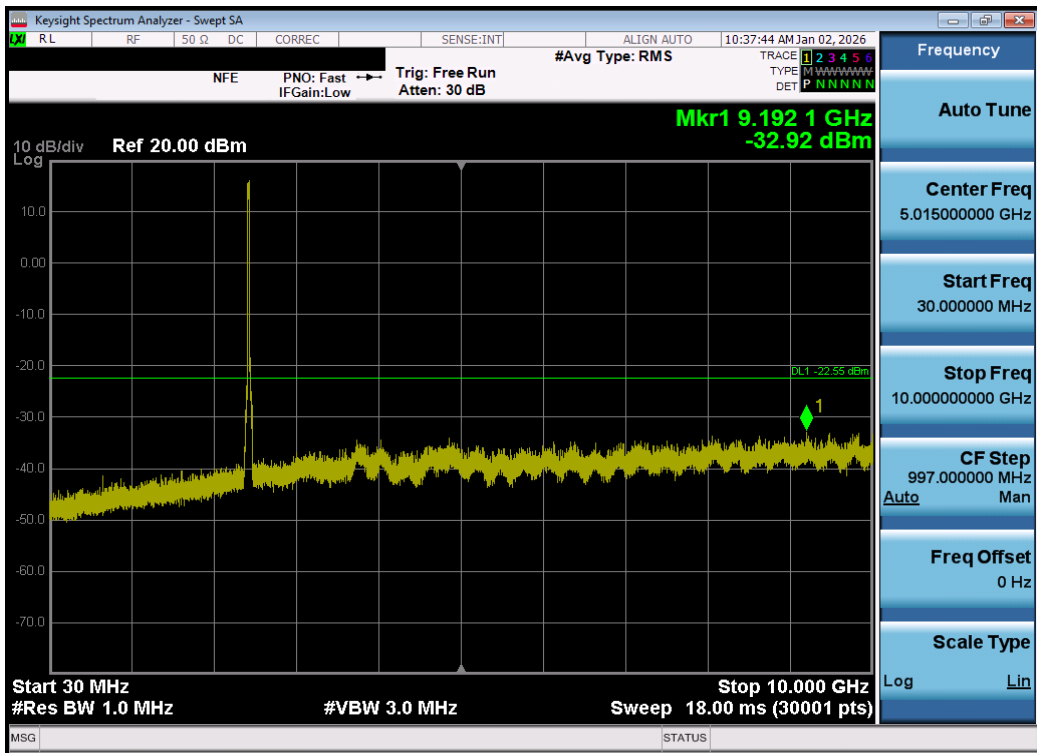


Plot 7-123. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 242 Tones – Ch. 6) – DUAL ANT 1

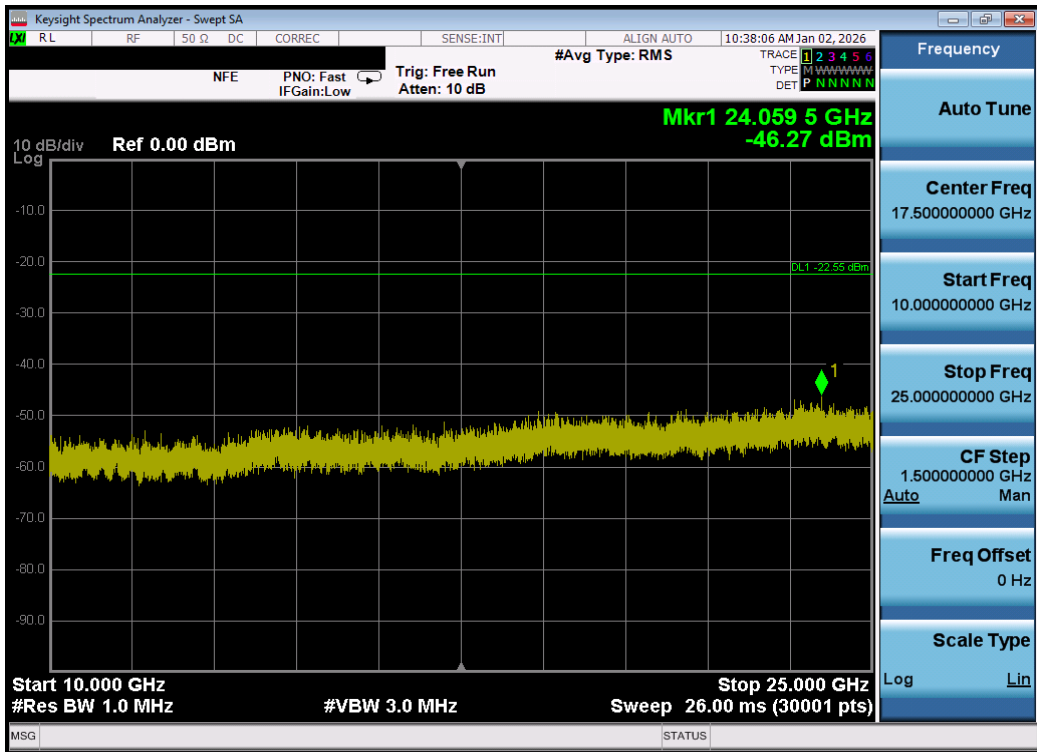


Plot 7-124. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 242 Tones – Ch. 6) – DUAL ANT 1

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 95 of 138

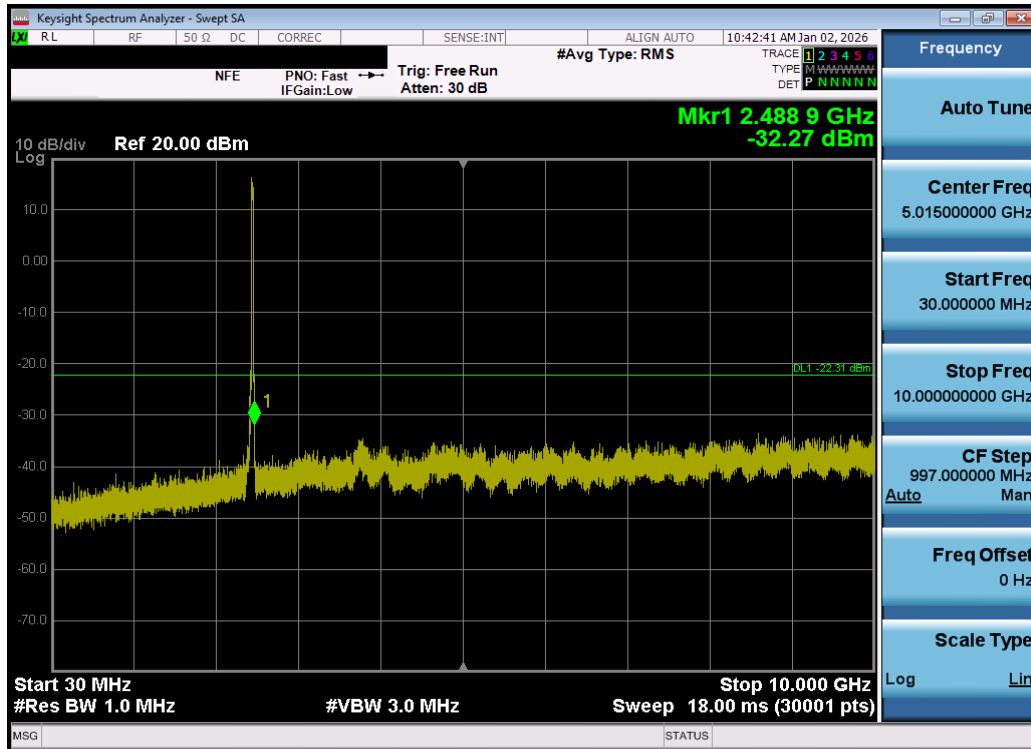


Plot 7-125. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 242 Tones – Ch. 11) – DUAL ANT 1

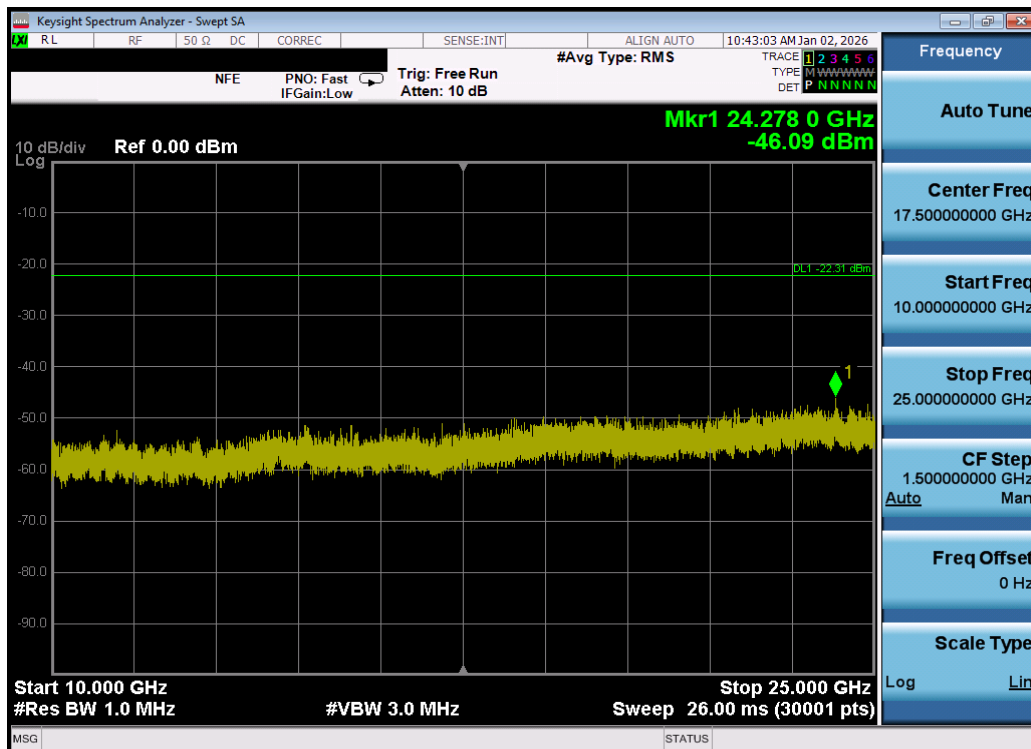


Plot 7-126. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 242 Tones – Ch. 11) – DUAL ANT 1

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 96 of 138

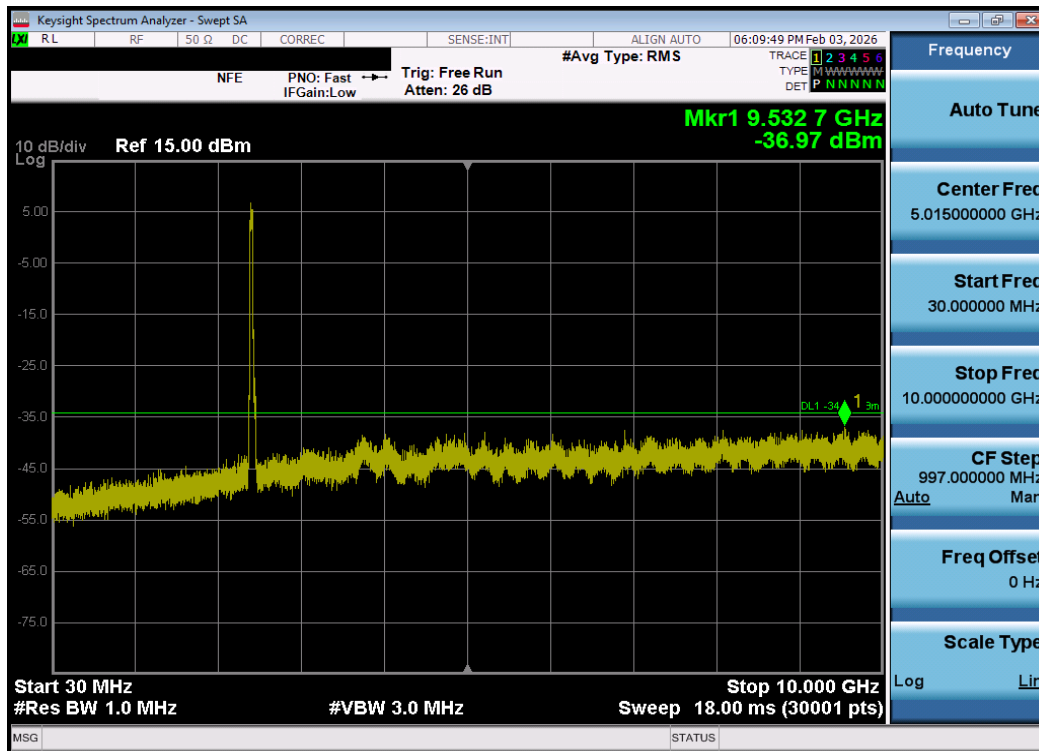


Plot 7-127. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 484 Tones – Ch. 3) – DUAL ANT 1

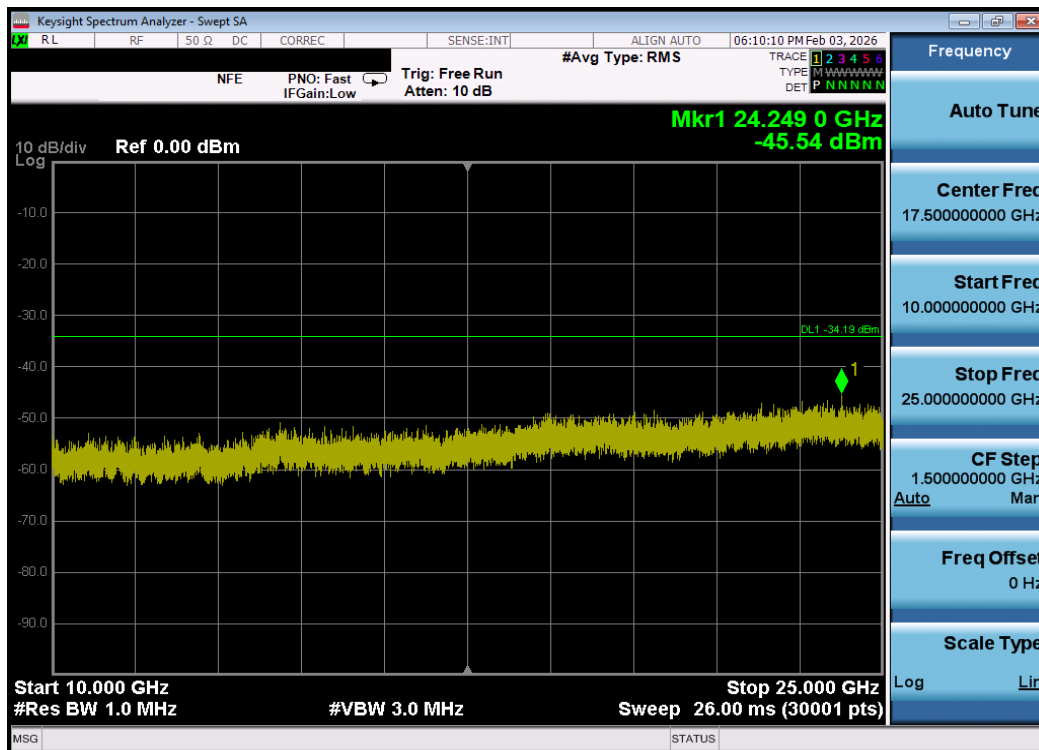


Plot 7-128. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 484 Tones – Ch. 3) – DUAL ANT 1

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 97 of 138

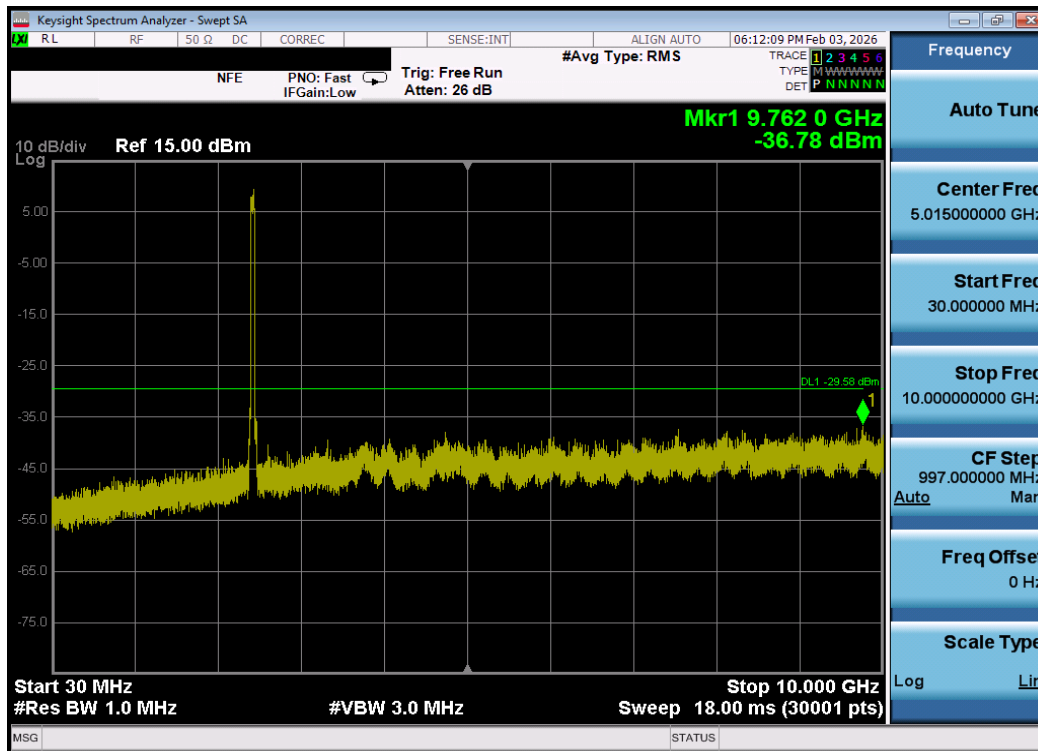


Plot 7-129. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 484 Tones – Ch. 6) – DUAL ANT 1

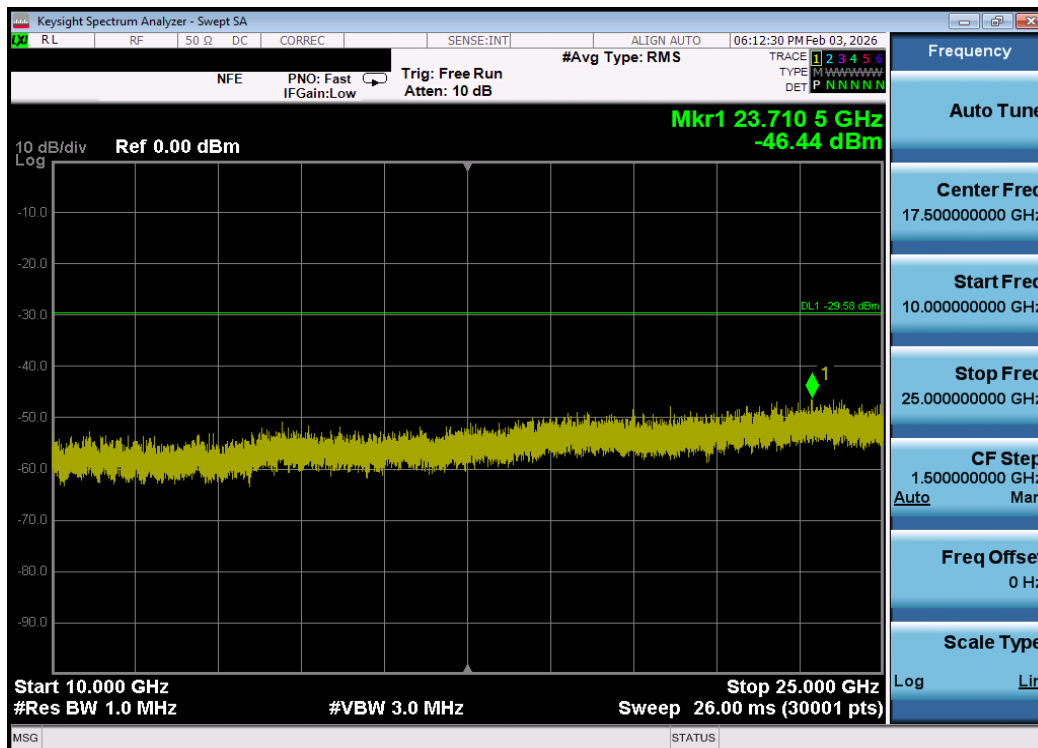


Plot 7-130. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 484 Tones – Ch. 6) – DUAL ANT 1

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 98 of 138

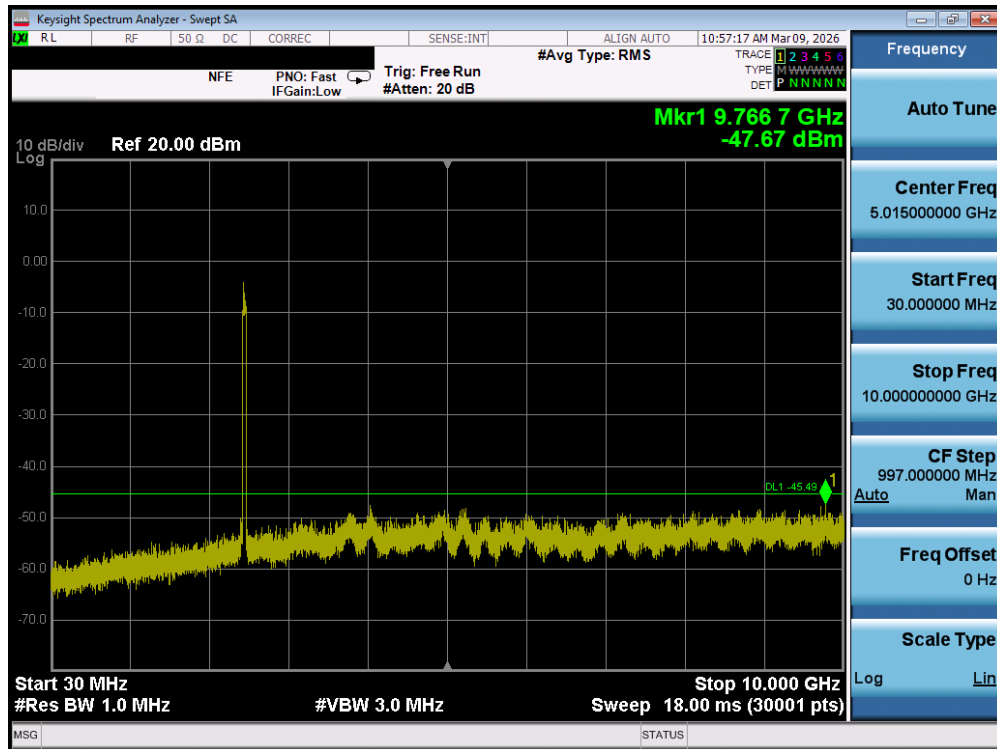


Plot 7-131. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 484 Tones – Ch. 11) – DUAL ANT 1

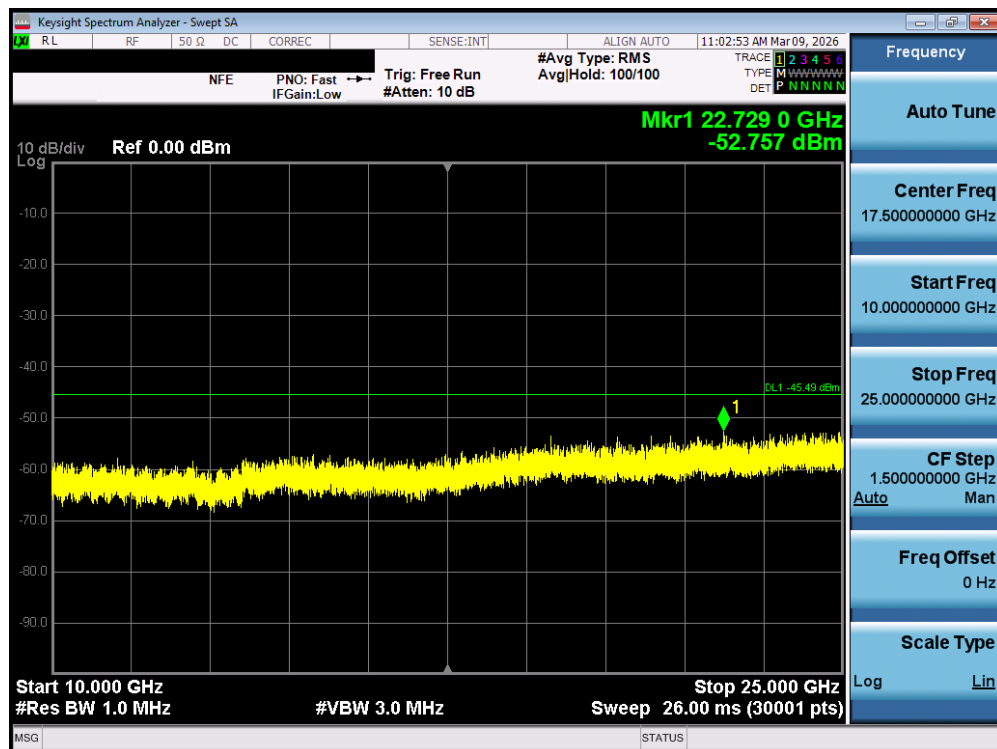


Plot 7-132. Conducted Spurious Plot MIMO ANT1 (802.11be OFDMA – 484 Tones – Ch. 11) – DUAL ANT 1

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 99 of 138

7.6.2 MIMO Antenna-2 Conducted Spurious Emissions

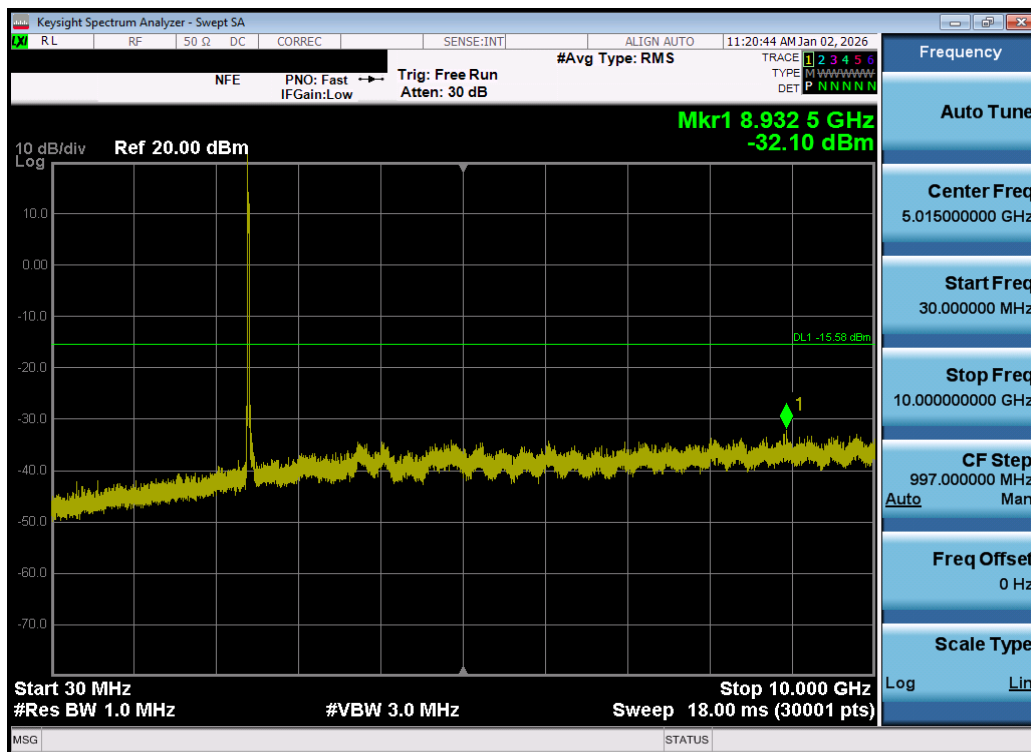


Plot 7-133. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 26 Tones – Ch. 1) – DUAL ANT 2

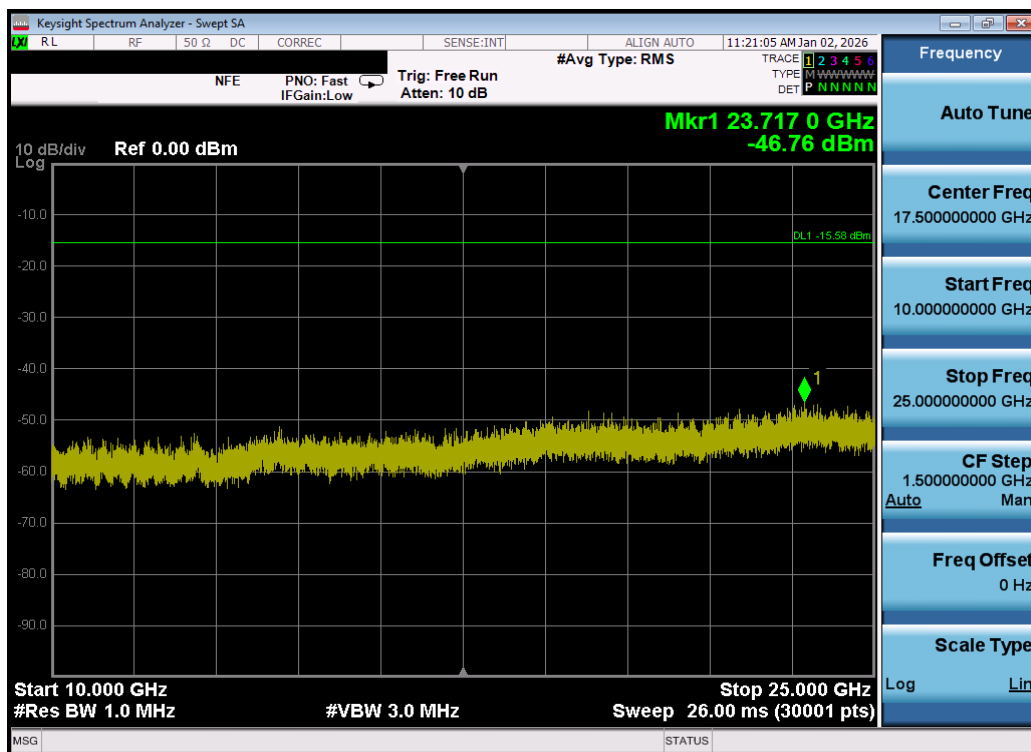


Plot 7-134. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 26 Tones – Ch. 1) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 100 of 138

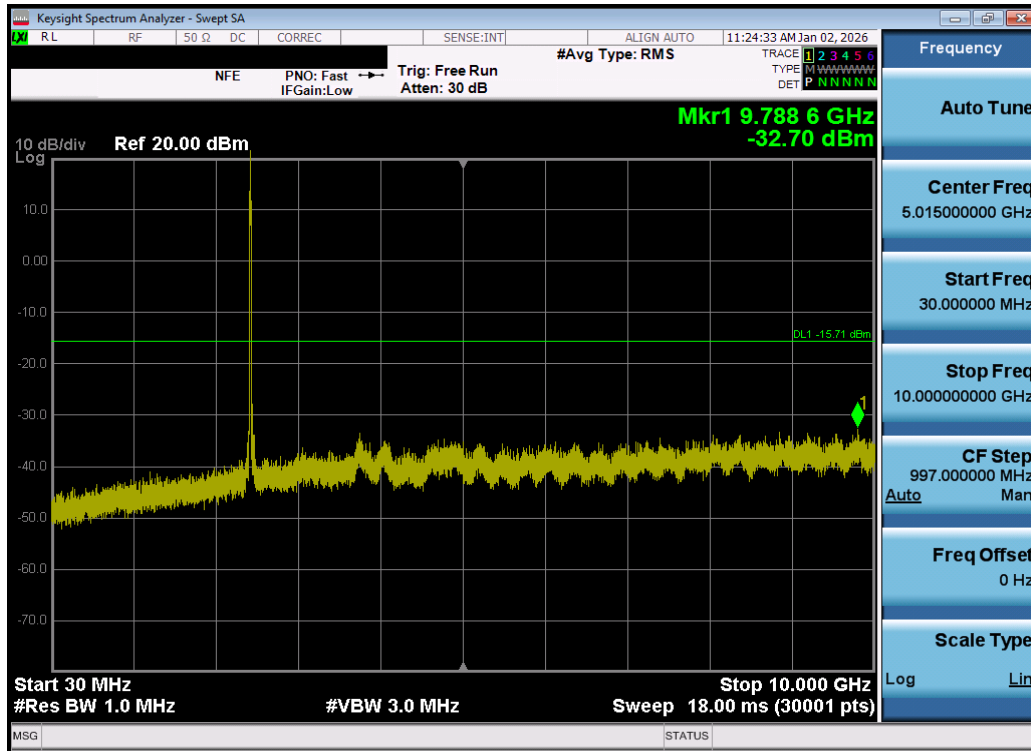


Plot 7-135. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 26 Tones – Ch. 6) – DUAL ANT 2

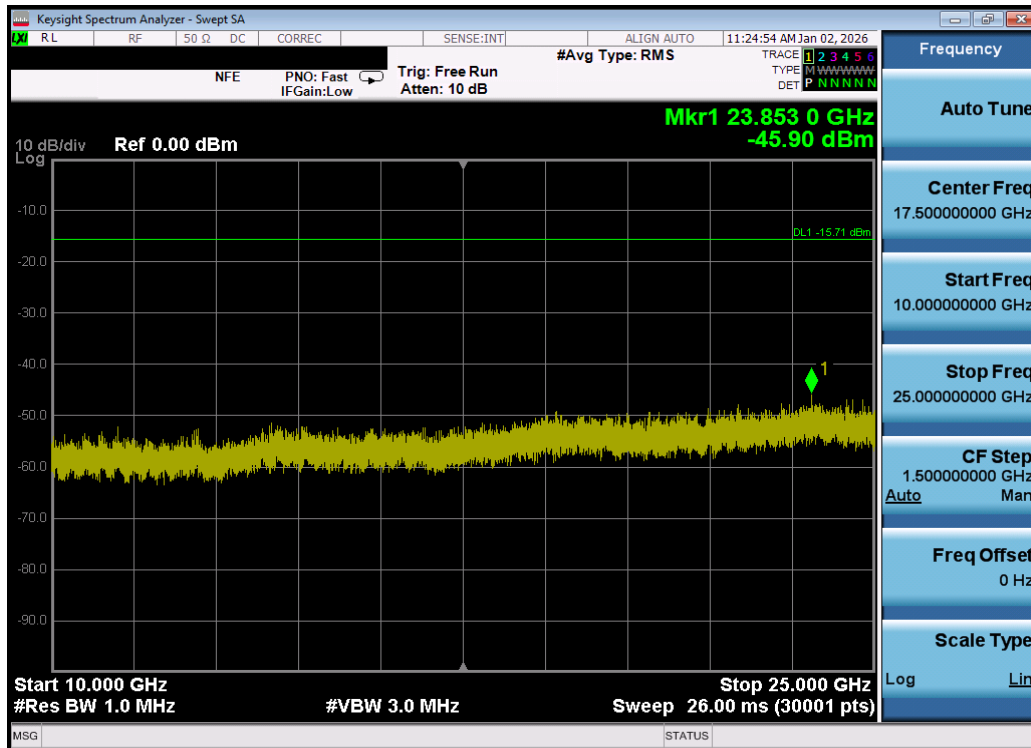


Plot 7-136. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 26 Tones – Ch. 6) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 101 of 138

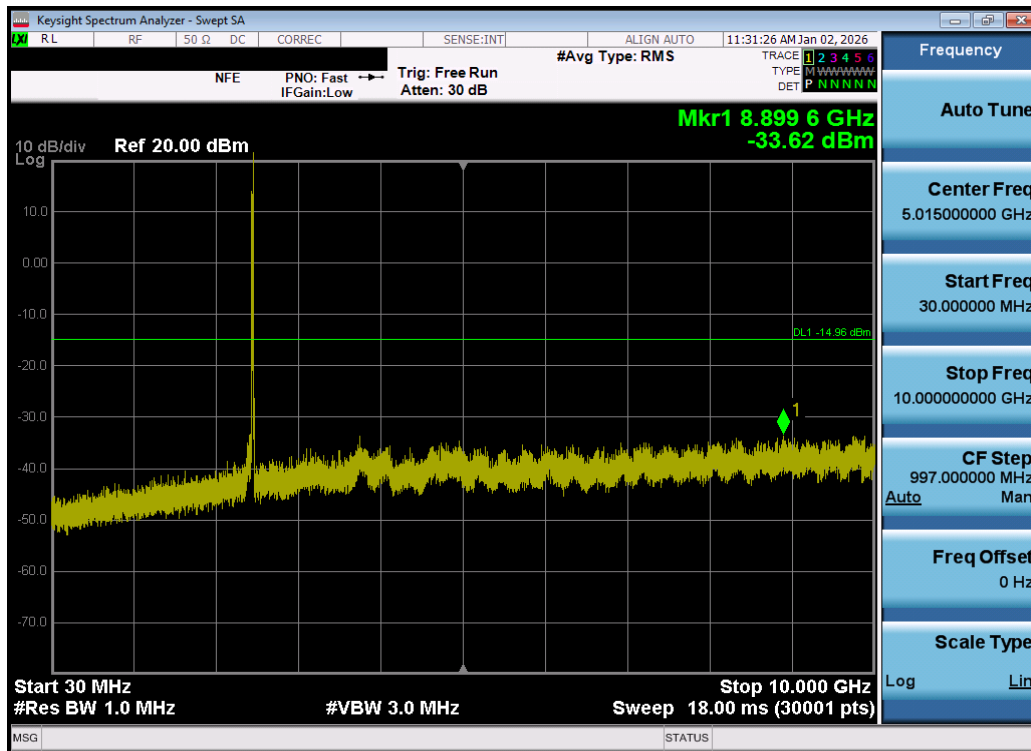


Plot 7-137. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 26 Tones – Ch. 11) – DUAL ANT 2

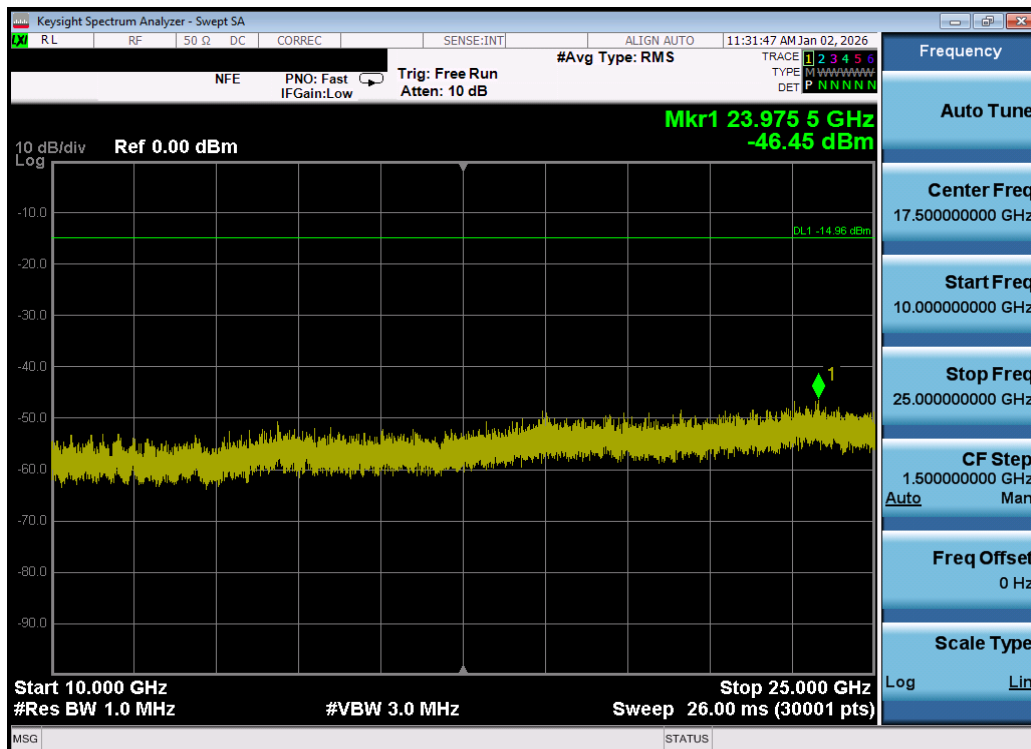


Plot 7-138. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 26 Tones – Ch. 11) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 102 of 138

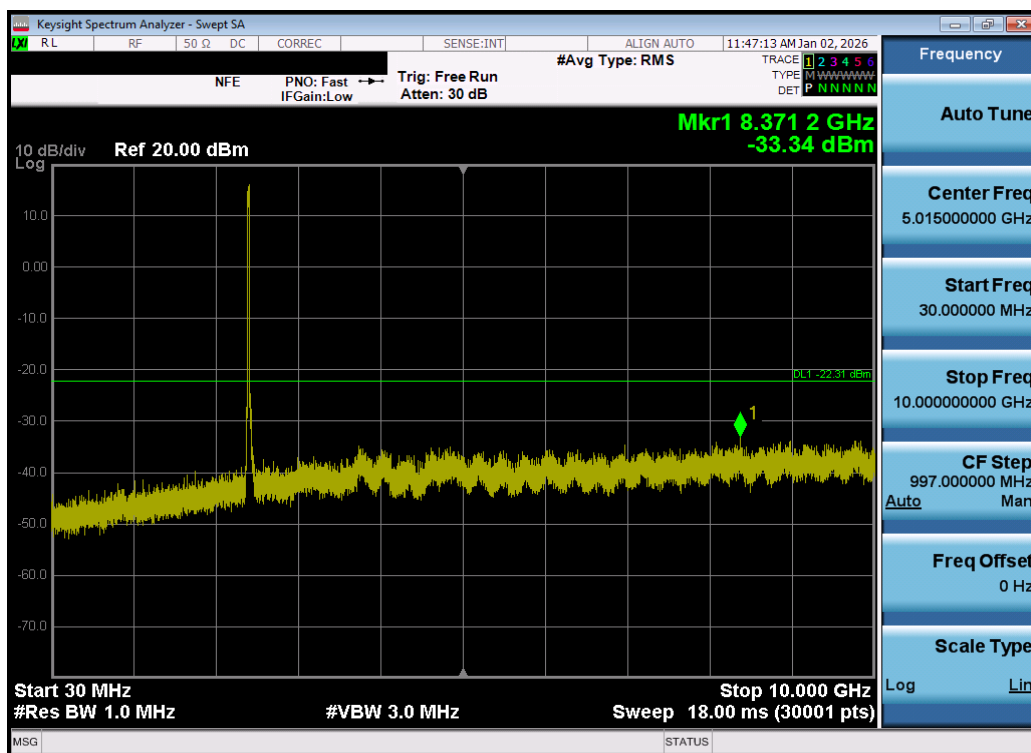


Plot 7-139. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 242 Tones – Ch. 1) – DUAL ANT 2

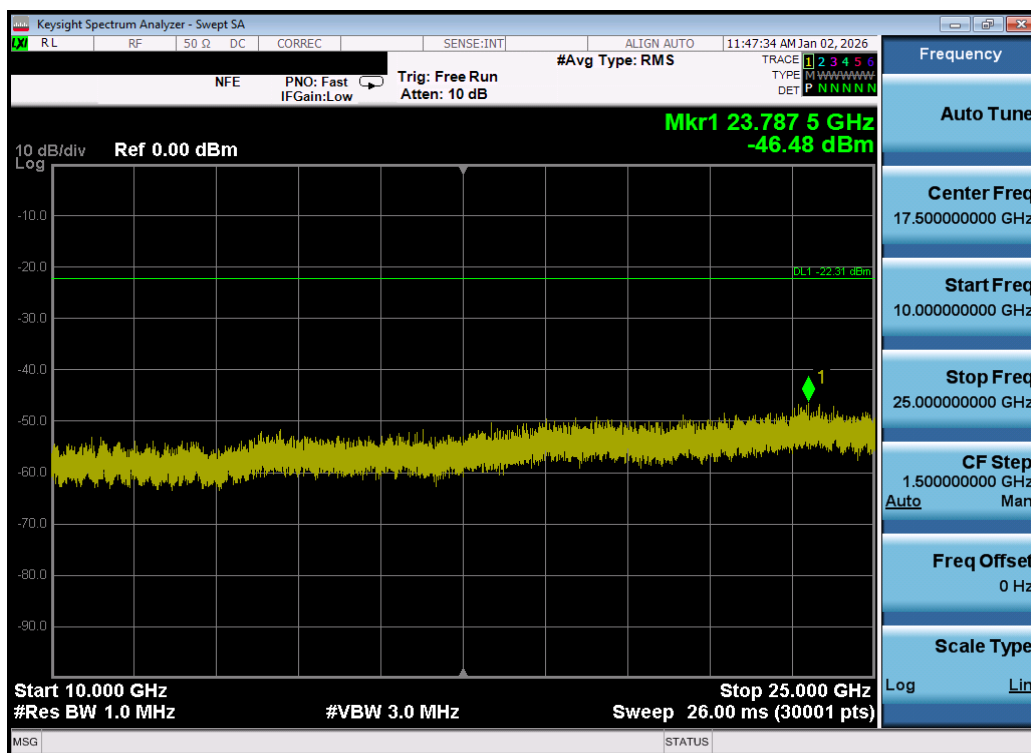


Plot 7-140. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 242 Tones – Ch. 1) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 103 of 138

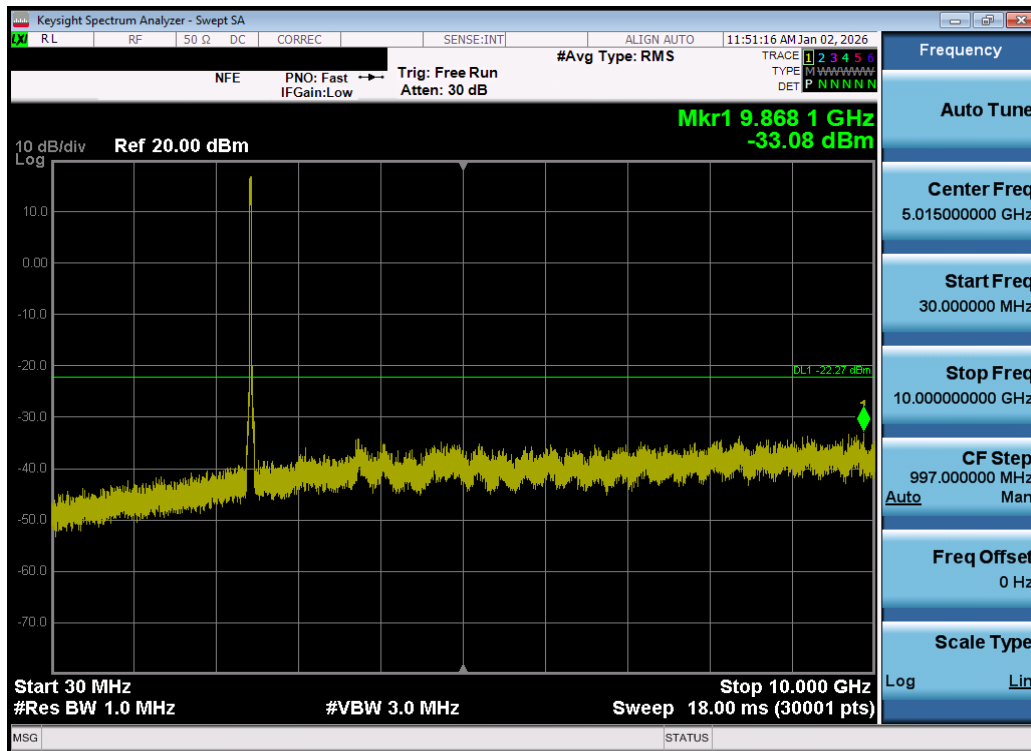


Plot 7-141. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 242 Tones – Ch. 6) – DUAL ANT 2

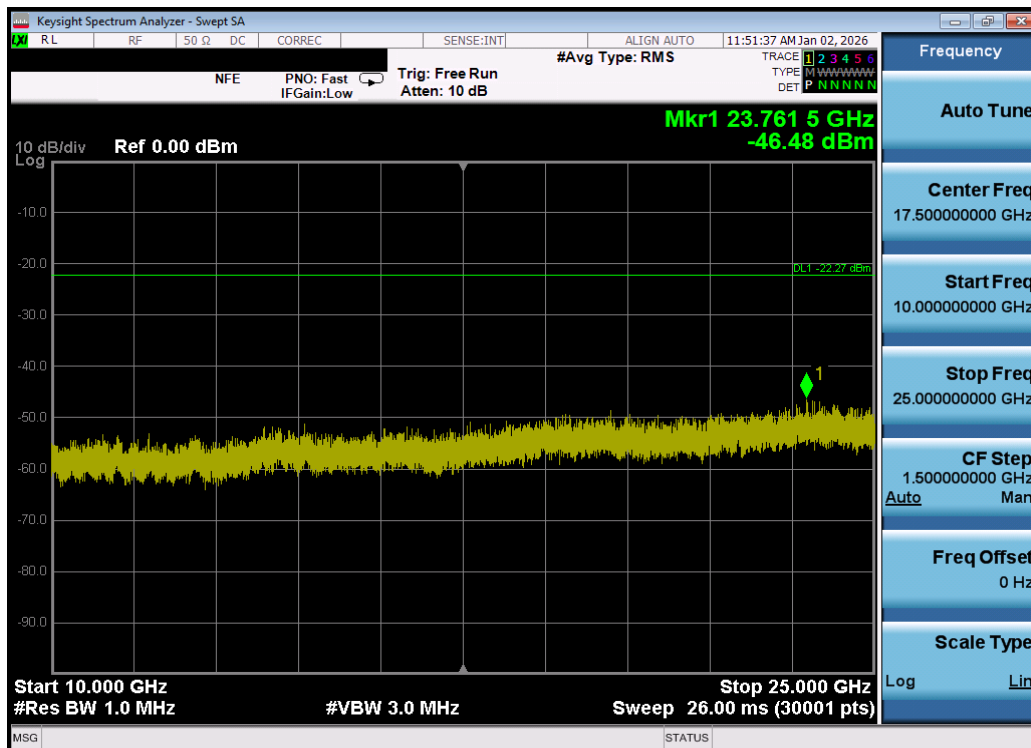


Plot 7-142. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 242 Tones – Ch. 6) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 104 of 138

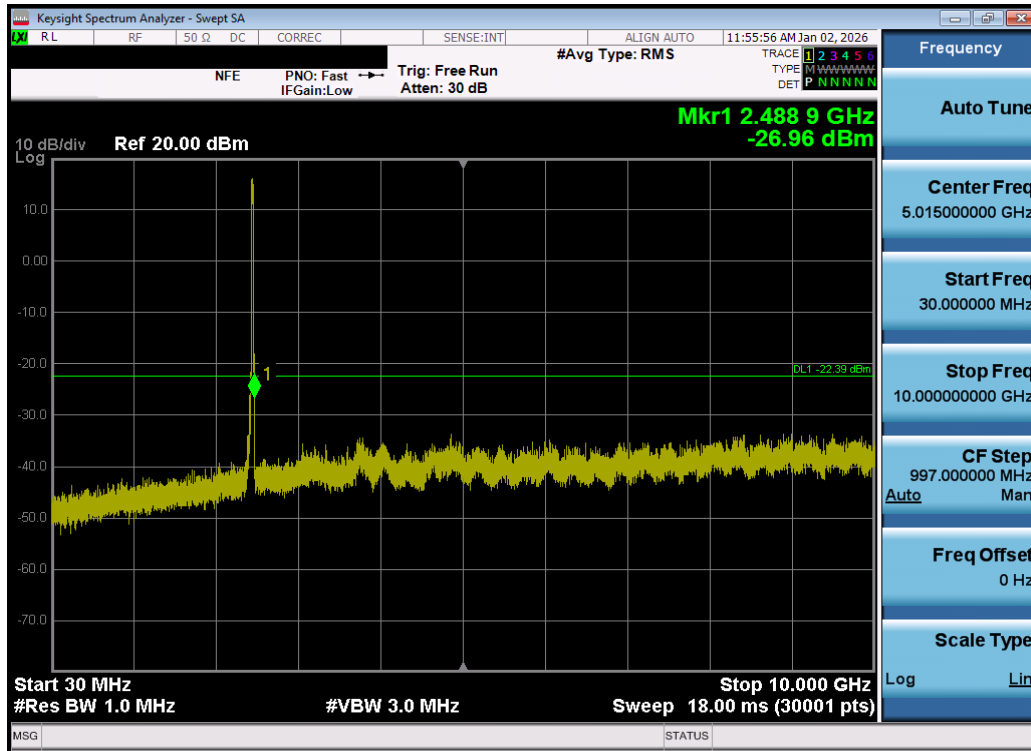


Plot 7-143. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 242 Tones – Ch. 11) – DUAL ANT 2

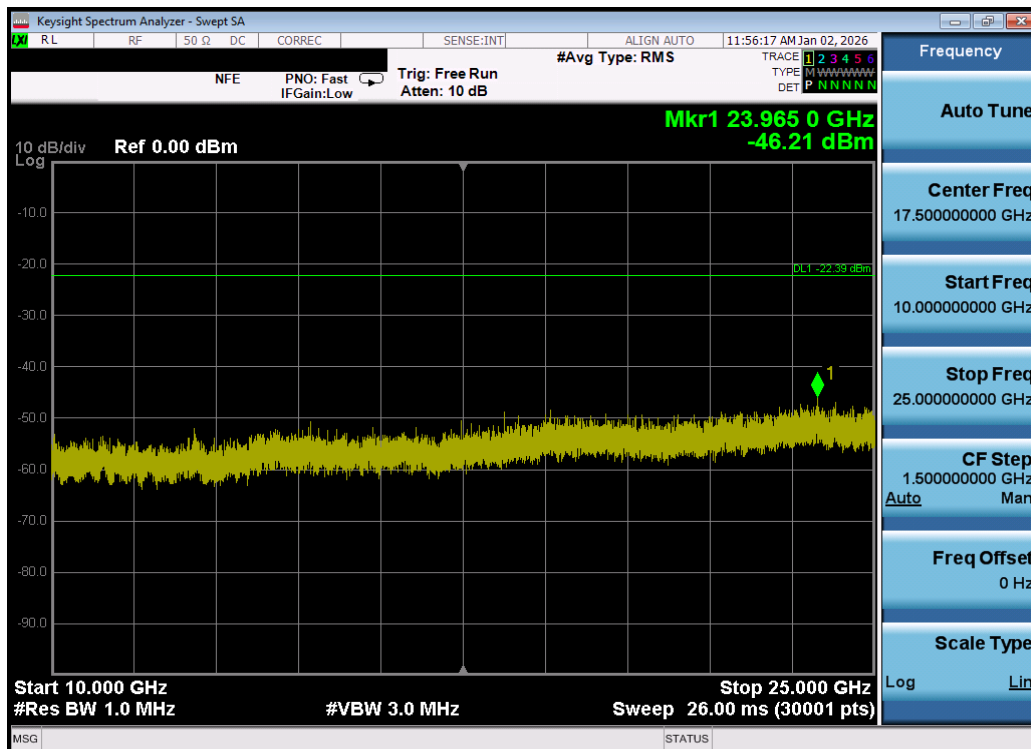


Plot 7-144. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 242 Tones – Ch. 11) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 105 of 138

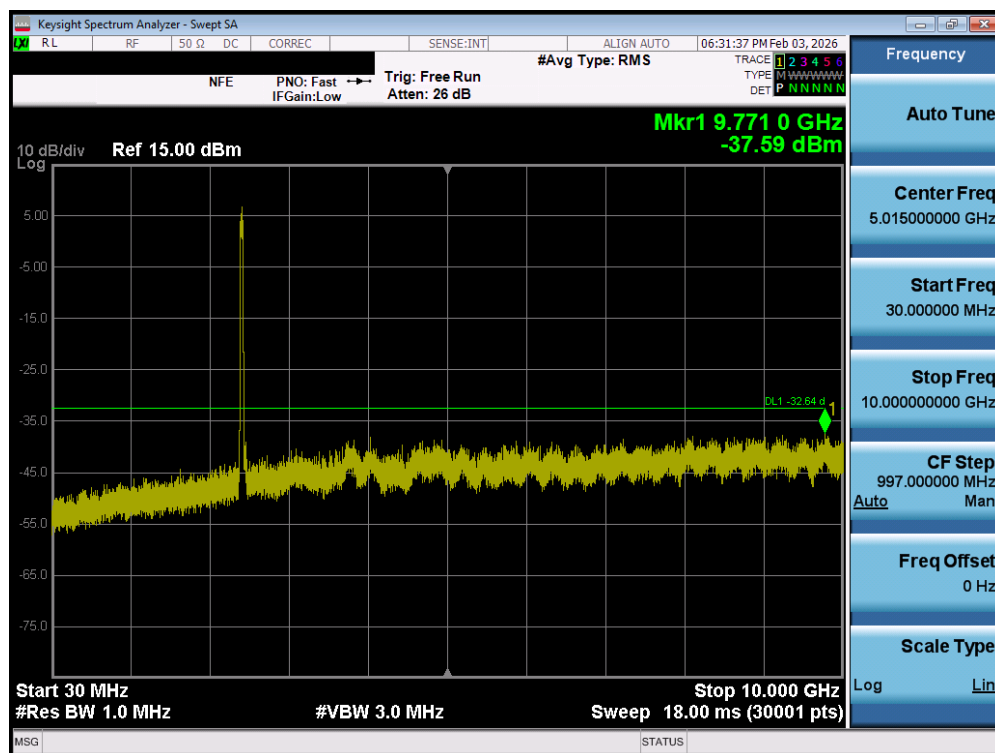


Plot 7-145. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 484 Tones – Ch. 3) – DUAL ANT 2

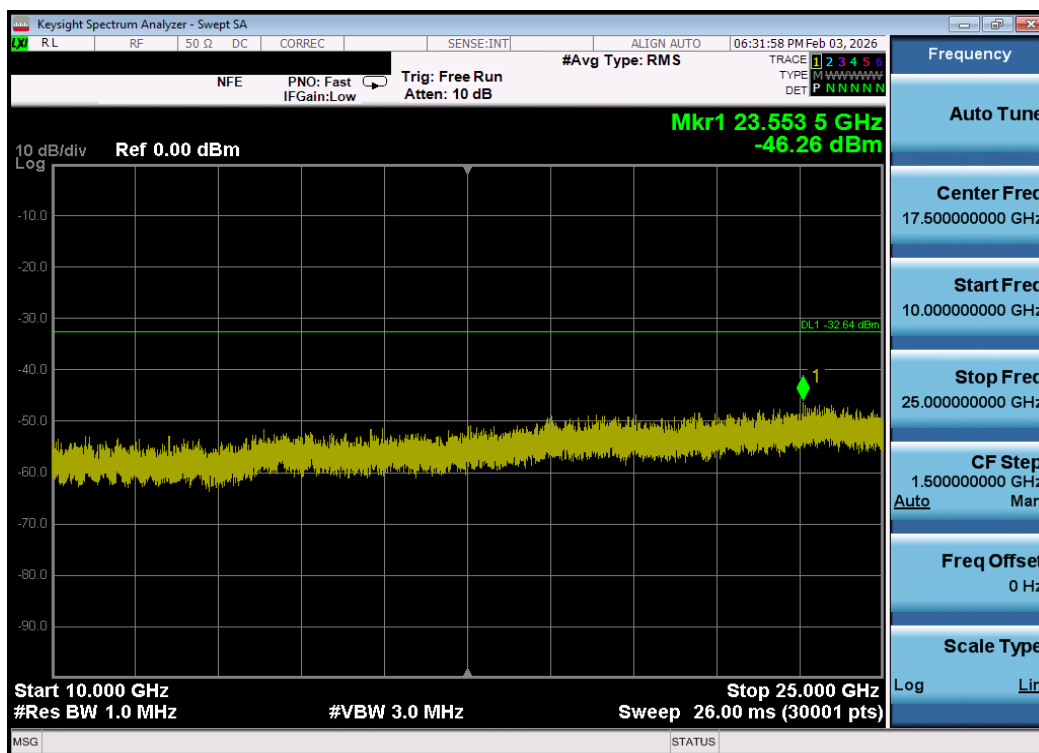


Plot 7-146. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 484 Tones – Ch. 3) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 106 of 138

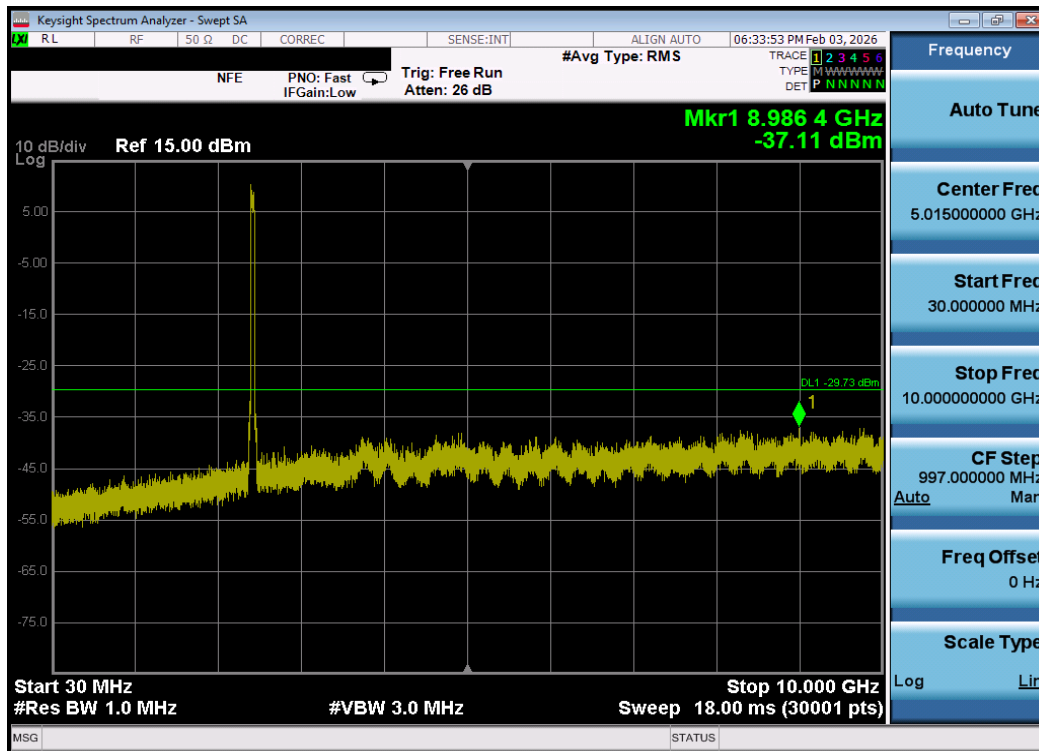


Plot 7-147. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 484 Tones – Ch. 6) – DUAL ANT 2

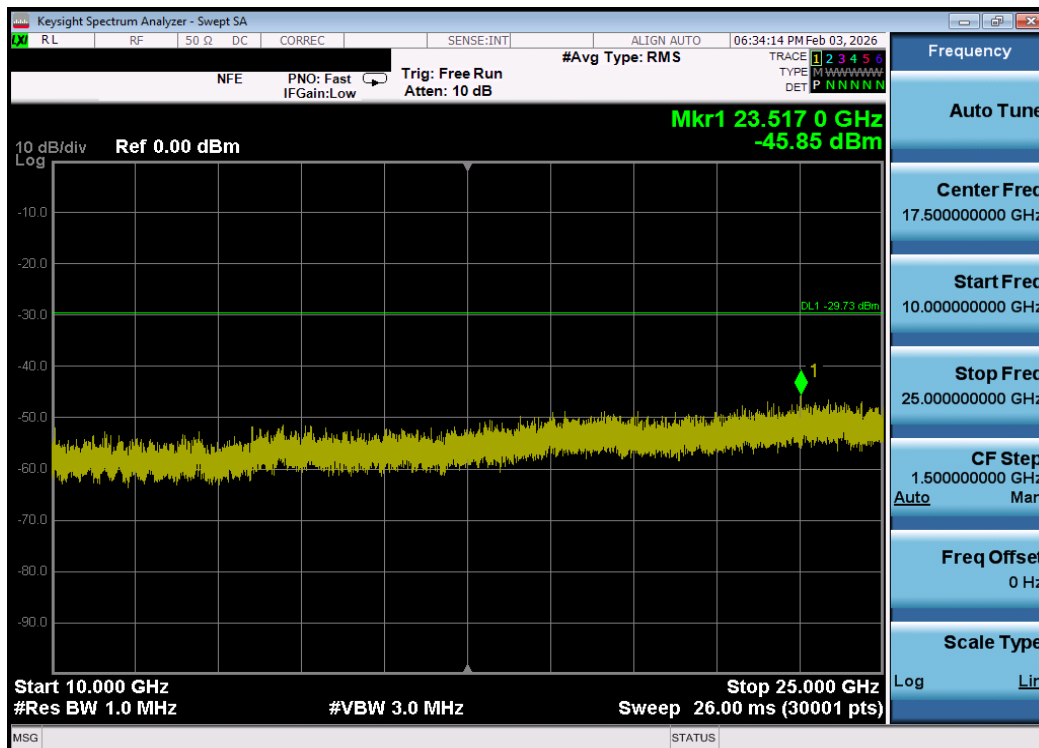


Plot 7-148. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 484 Tones – Ch. 6) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 107 of 138

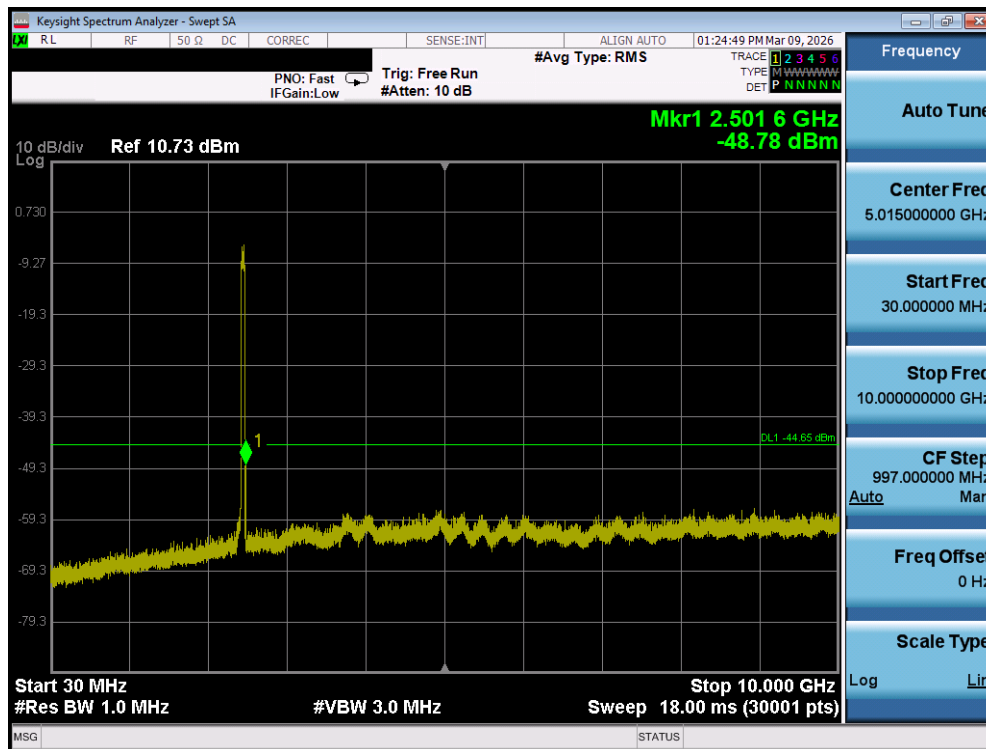

Plot 7-149. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 484 Tones – Ch. 11) – DUAL ANT 2

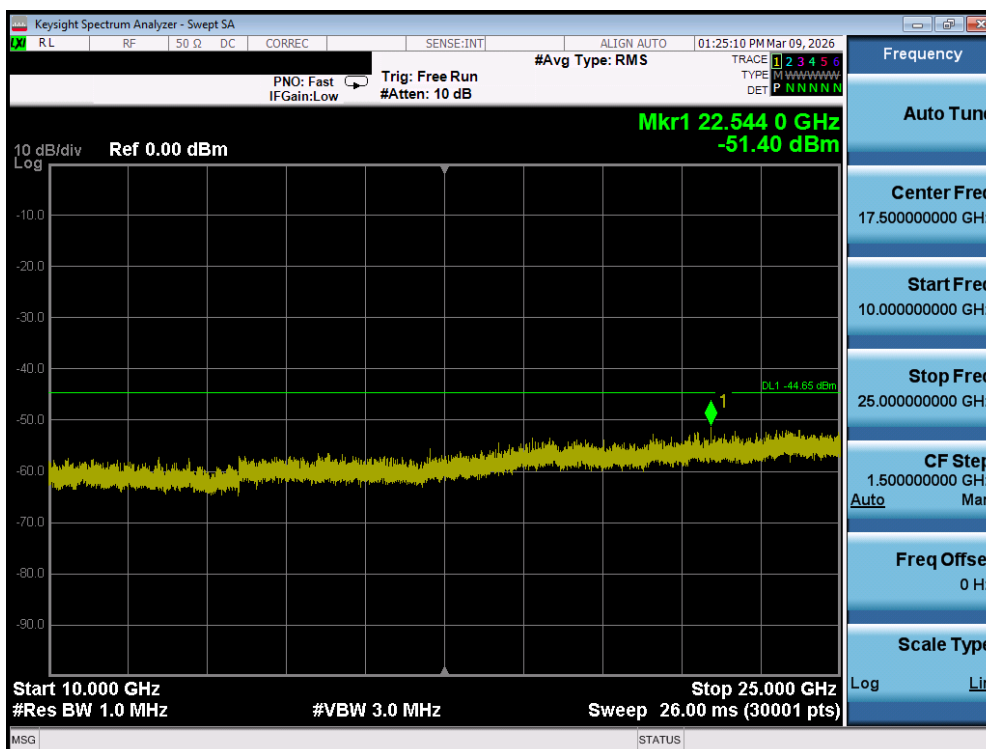

Plot 7-150. Conducted Spurious Plot MIMO ANT2 (802.11be OFDMA – 484 Tones – Ch. 11) – DUAL ANT 2

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 108 of 138

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-13. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 109 of 138

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

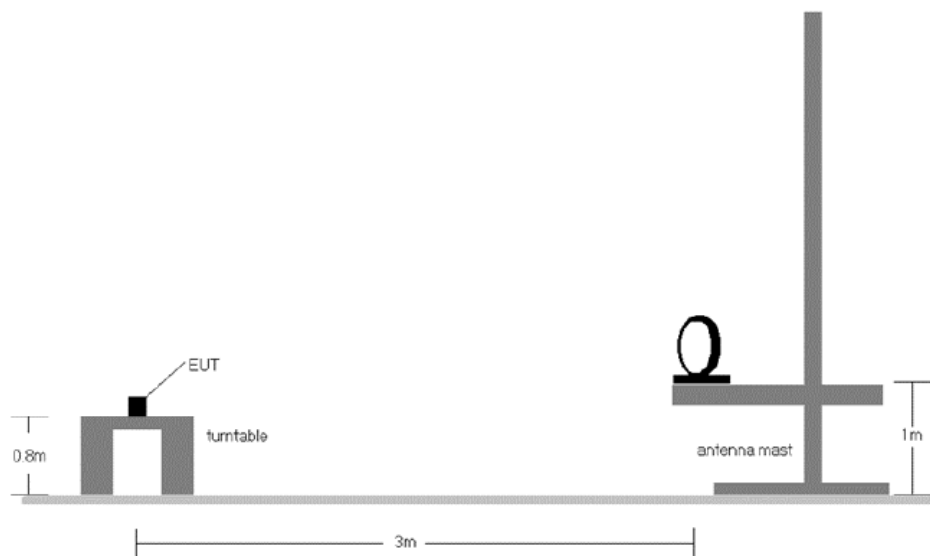


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 110 of 138

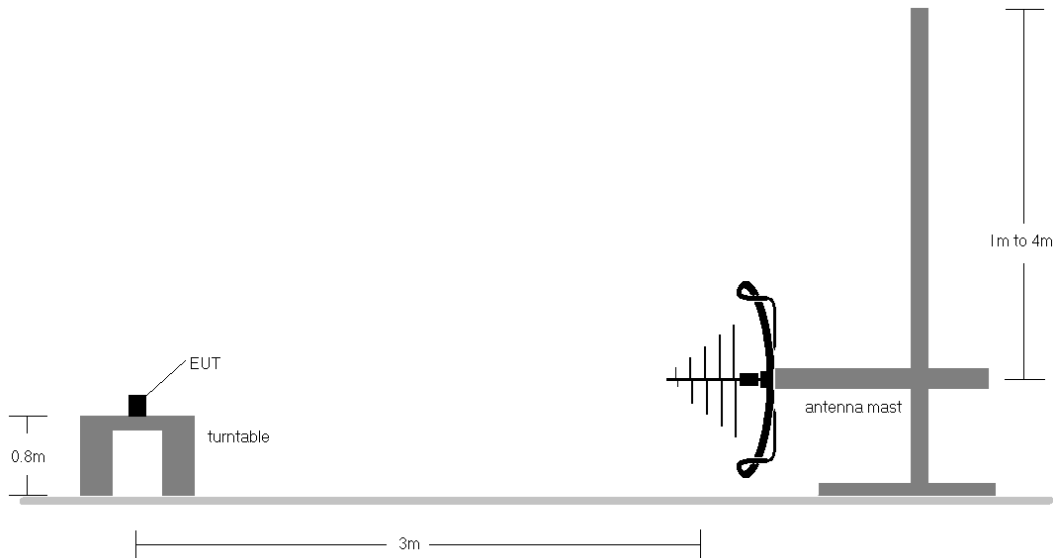


Figure 7-7. Radiated Test Setup < 1GHz

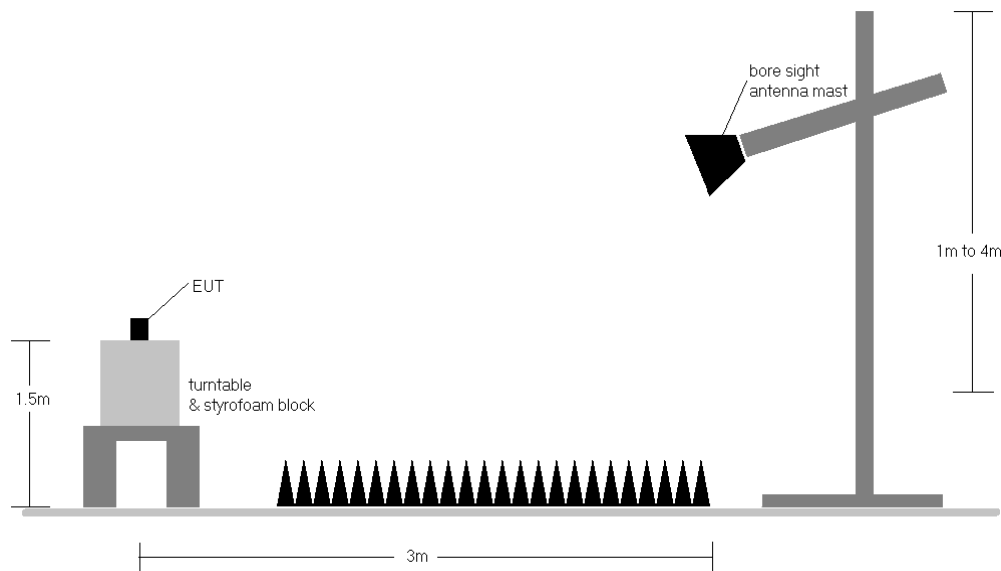


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10-2020 Section 11.3 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 111 of 138

4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Some band edge measurements were performed using a channel integration method to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v05r02 Section 13.3, a measurement was performed using a RBW of 100kHz at the frequency with highest emission outside of band edge. For integration that does not start at 2483.5MHz, consideration was taken to ensure the worst-case emission is in the 1MHz spectrum. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 112 of 138


7.7.1 MIMO Radiated Spurious Emission Measurements

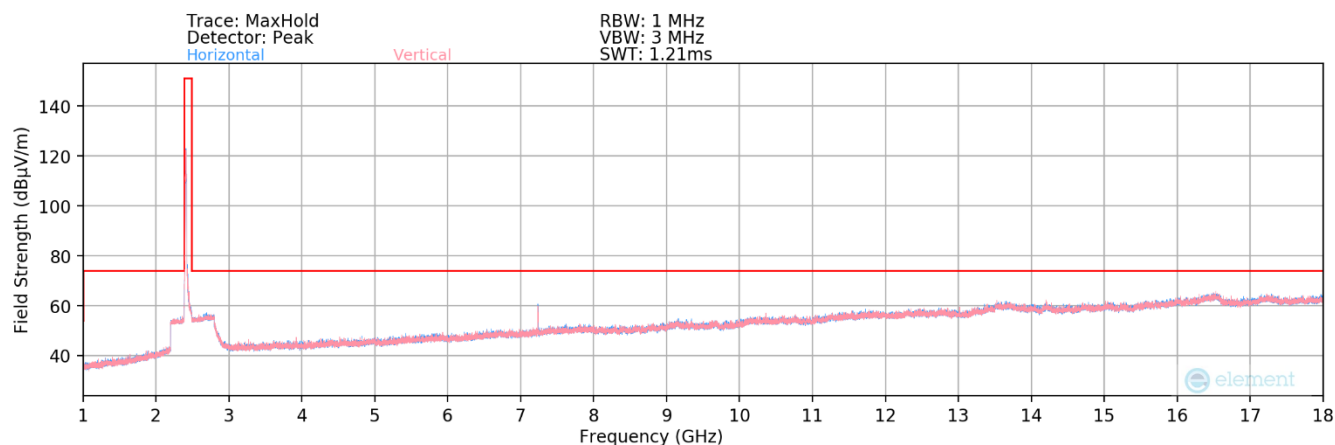

Plot 7-151. Radiated Spurious Plot above 1GHz MIMO (802.11be OFDMA – 26 Tones – Ch. 1)

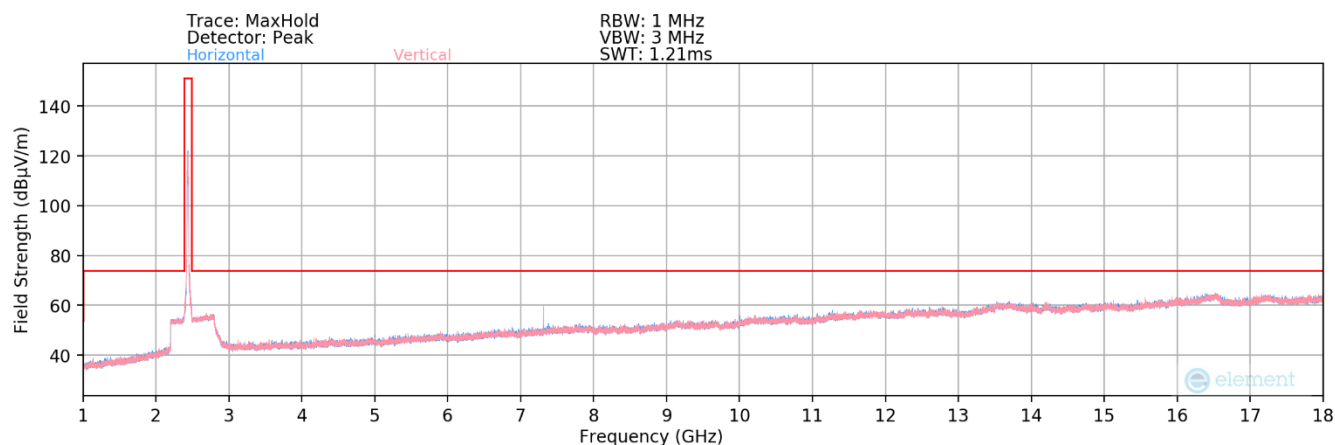


Plot 7-152. Radiated Spurious Plot above 1GHz MIMO (802.11be OFDMA – 26 Tones – Ch. 6)

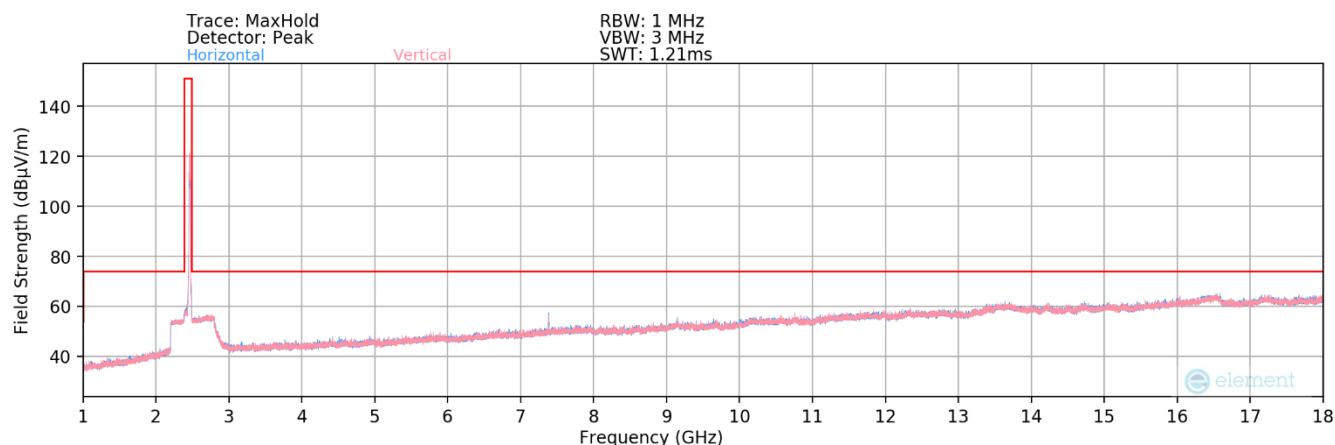


Plot 7-153. Radiated Spurious Plot above 1GHz MIMO (802.11be OFDMA – 26 Tones – Ch. 11)


FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 113 of 138

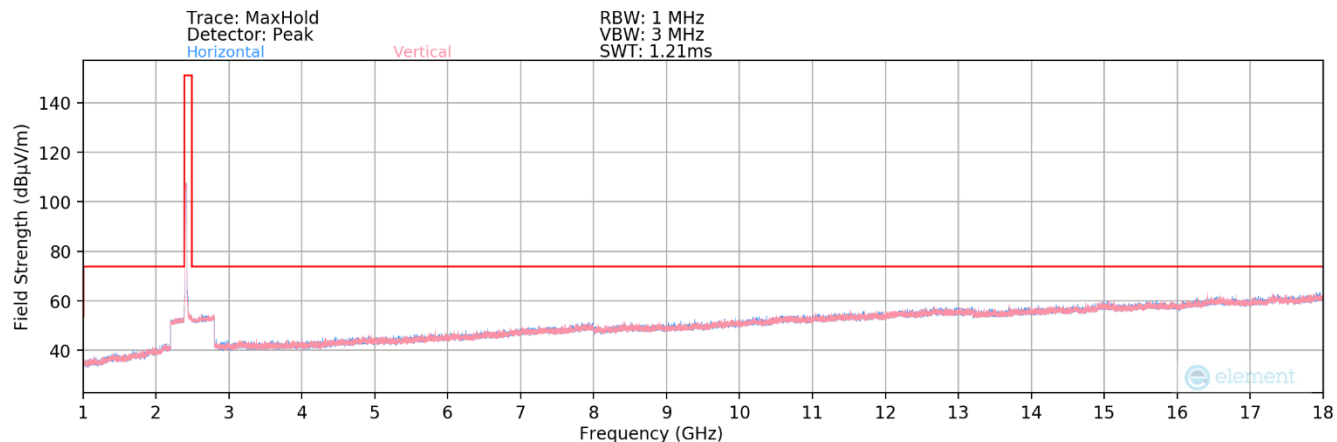

Plot 7-154. Radiated Spurious Plot above 1GHz MIMO (802.11be OFDMA – 242 Tones – Ch. 1)

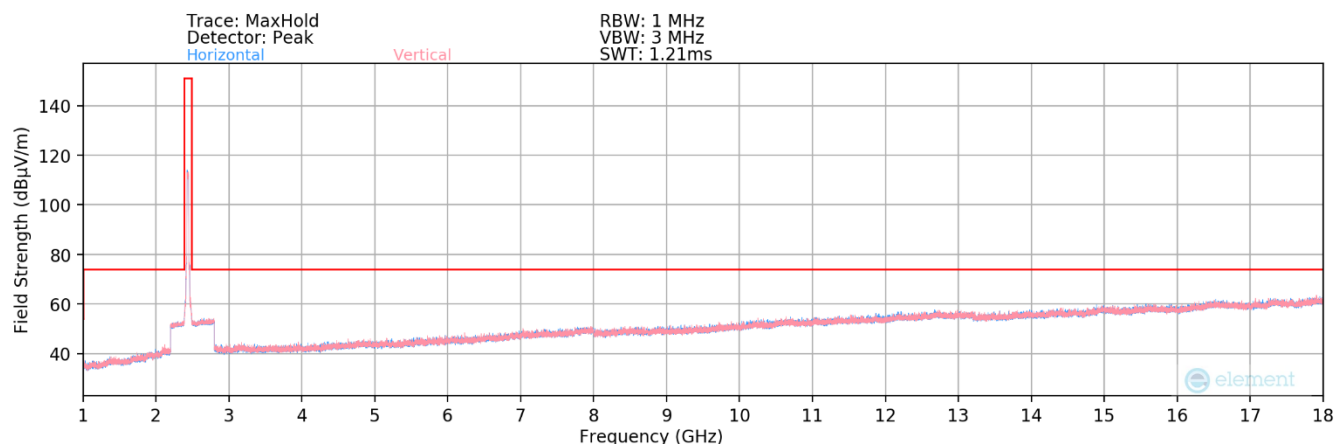

Plot 7-155. Radiated Spurious Plot above 1GHz MIMO (802.11be OFDMA – 242 Tones – Ch. 6)

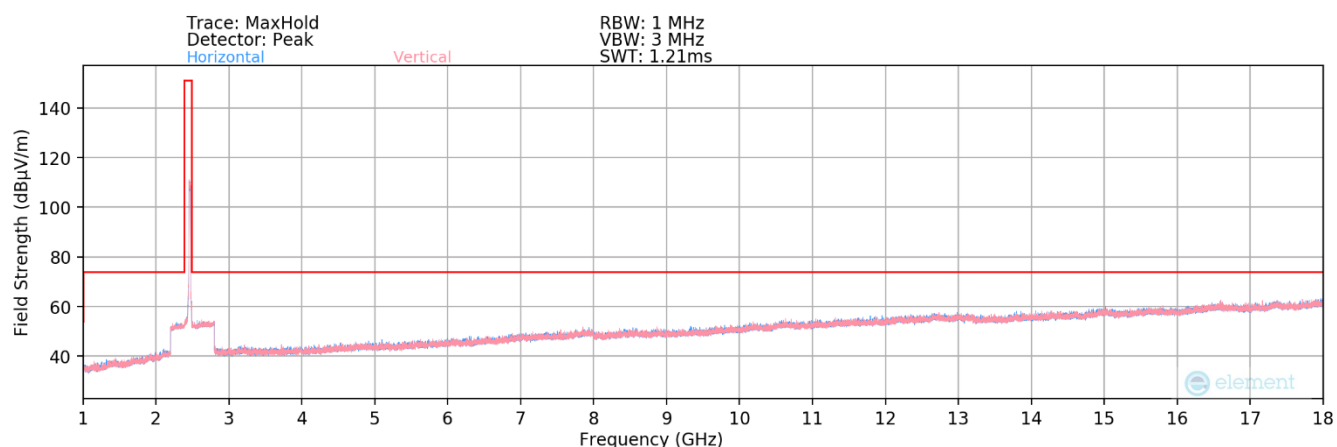

Plot 7-156. Radiated Spurious Plot above 1GHz MIMO (802.11be OFDMA – 242 Tones – Ch. 11)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 114 of 138

MIMO Radiated Spurious Emission Measurements

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-80.66	9.65	35.99	53.98	-17.99
4824.00	Peak	V	-	-	-72.44	9.65	44.21	73.98	-29.77
12060.00	Avg	V	-	-	-83.30	22.50	46.20	53.98	-7.78
12060.00	Peak	V	-	-	-75.58	22.50	53.92	73.98	-20.06

Table 7-14. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	-	-	-79.98	9.55	36.57	53.98	-17.41
4874.00	Peak	V	-	-	-71.54	9.55	45.01	73.98	-28.97
7311.00	Avg	V	143	146	-74.90	15.20	47.30	53.98	-6.68
7311.00	Peak	V	143	146	-63.71	15.20	58.49	73.98	-15.49
12185.00	Avg	V	-	-	-83.70	22.91	46.21	53.98	-7.77
12185.00	Peak	V	-	-	-75.91	22.91	54.00	73.98	-19.98

Table 7-15. Radiated Measurements MIMO (26 Tones)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 115 of 138

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-80.70	9.58	35.88	53.98	-18.10
4924.00	Peak	V	-	-	-72.01	9.58	44.57	73.98	-29.41
7386.00	Avg	H	240	173	-77.42	15.02	44.60	53.98	-9.38
7386.00	Peak	H	240	173	-64.16	15.02	57.86	73.98	-16.12
12310.00	Avg	V	-	-	-83.30	23.36	47.06	53.98	-6.92
12310.00	Peak	V	-	-	-75.38	23.36	54.98	73.98	-19.00

Table 7-16. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-79.25	6.62	34.37	53.98	-19.61
4824.00	Peak	V	-	-	-70.66	6.62	42.96	73.98	-31.02
12060.00	Avg	V	-	-	-82.01	18.90	43.89	53.98	-10.09
12060.00	Peak	V	-	-	-73.35	18.90	52.55	73.98	-21.43

Table 7-17. Radiated Measurements MIMO (242 Tones)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 116 of 138

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	-	-	-79.36	6.58	34.22	53.98	-19.76
4874.00	Peak	V	-	-	-71.10	6.58	42.48	73.98	-31.50
7311.00	Avg	V	-	-	-80.55	12.38	38.83	53.98	-15.15
7311.00	Peak	V	-	-	-72.43	12.38	46.95	73.98	-27.03
12185.00	Avg	V	-	-	-81.61	19.03	44.42	53.98	-9.56
12185.00	Peak	V	-	-	-73.00	19.03	53.03	73.98	-20.95

Table 7-18. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-79.26	7.00	34.74	53.98	-19.24
4924.00	Peak	V	-	-	-71.16	7.00	42.84	73.98	-31.14
7386.00	Avg	V	-	-	-80.79	12.89	39.10	53.98	-14.88
7386.00	Peak	V	-	-	-72.67	12.89	47.22	73.98	-26.76
12310.00	Avg	V	-	-	-82.00	19.57	44.57	53.98	-9.41
12310.00	Peak	V	-	-	-73.49	19.57	53.08	73.98	-20.90

Table 7-19. Radiated Measurements MIMO (242 Tones)


FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 117 of 138

7.7.2 MIMO Radiated Restricted Band Edge Measurements


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Partial Tone – 106T

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

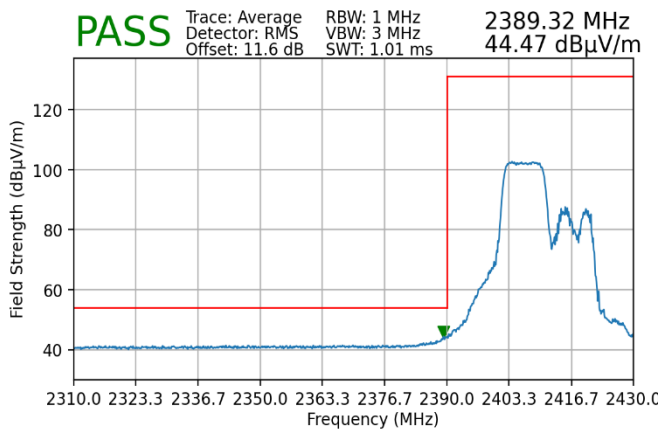


Plot 7-157. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 Tones)

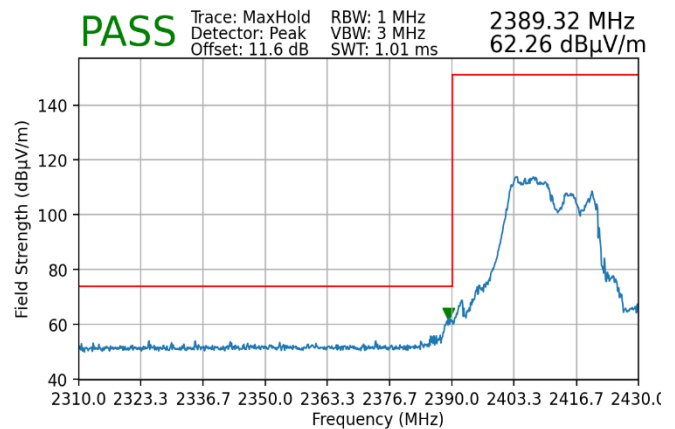


Plot 7-158. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 Tones)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 118 of 138

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

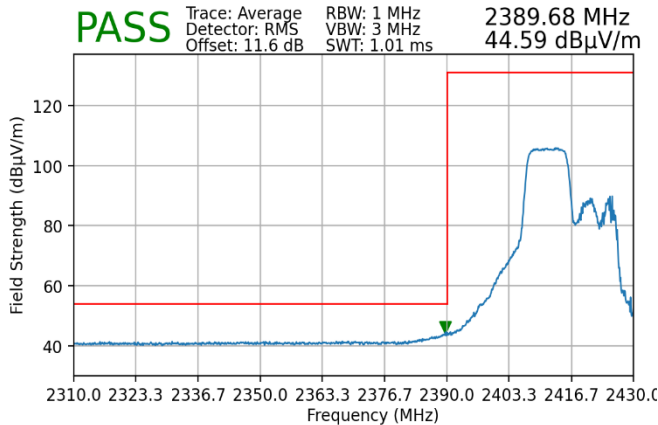


Plot 7-159. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 Tones)

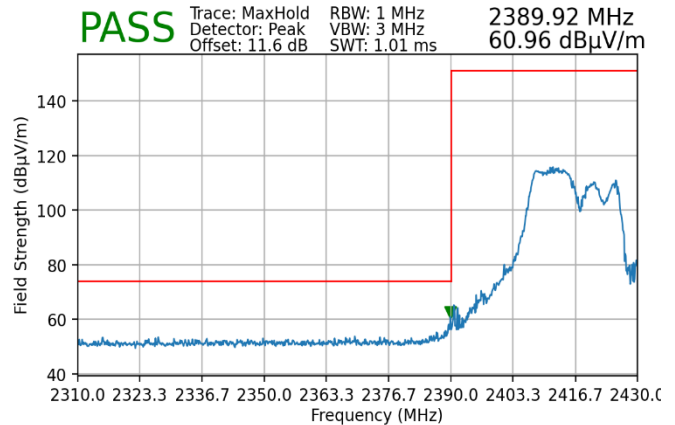


Plot 7-160. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 Tones)

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	2422MHz
Channel:	3

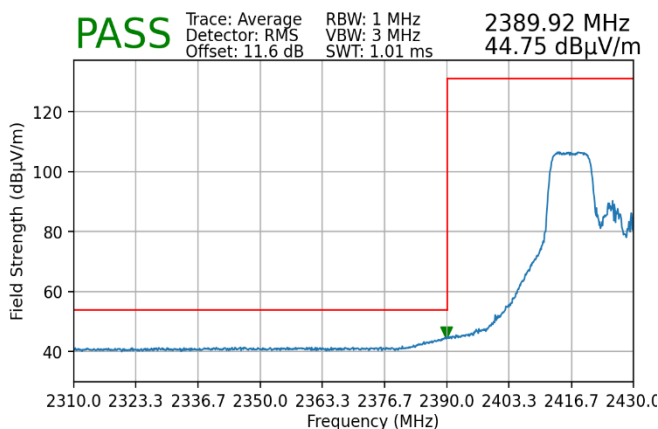


Plot 7-161. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 Tones)

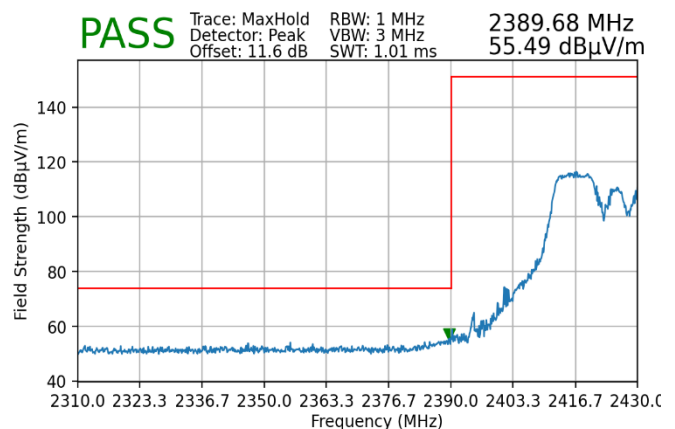


Plot 7-162. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 Tones)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 119 of 138

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2452MHz
Channel:	9

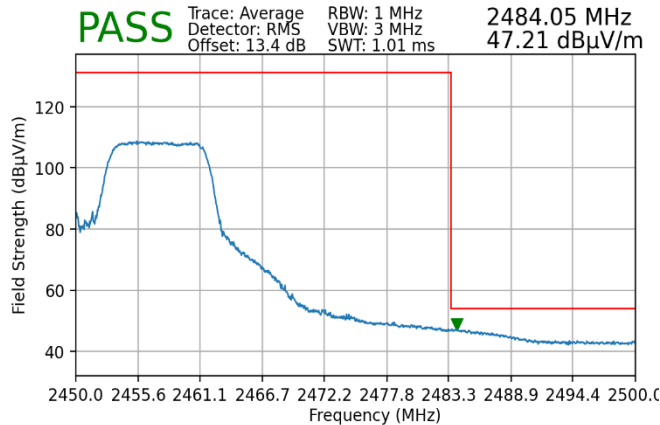


Plot 7-163. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)

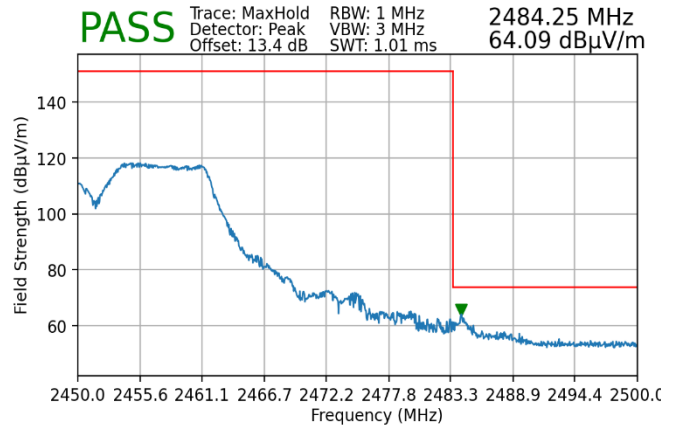


Plot 7-164. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10

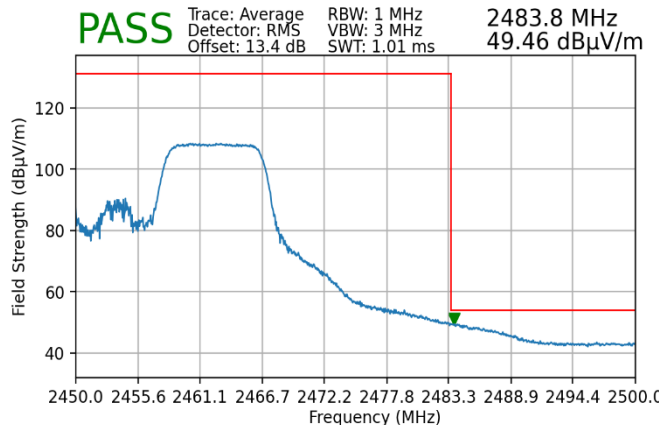


Plot 7-165. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)

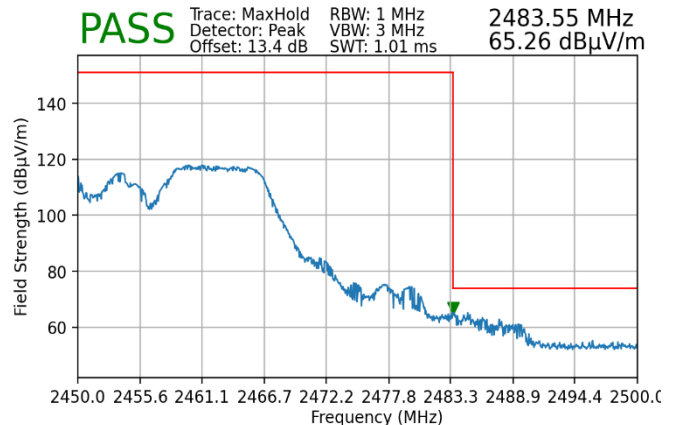


Plot 7-166. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 120 of 138

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

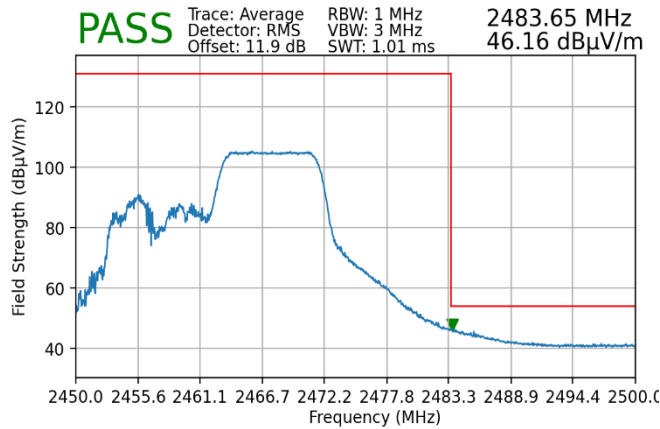


Plot 7-167. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)

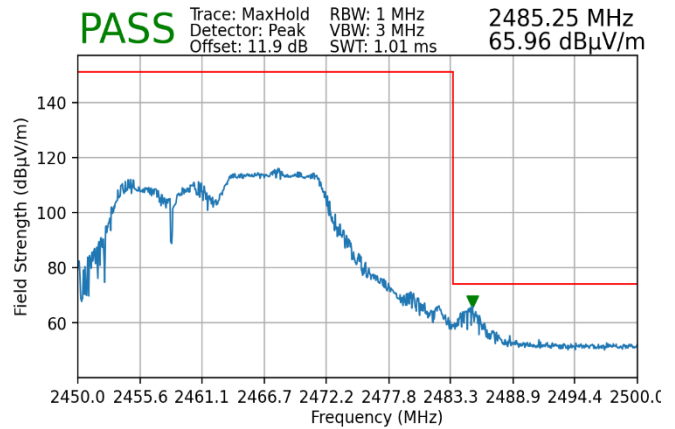


Plot 7-168. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12

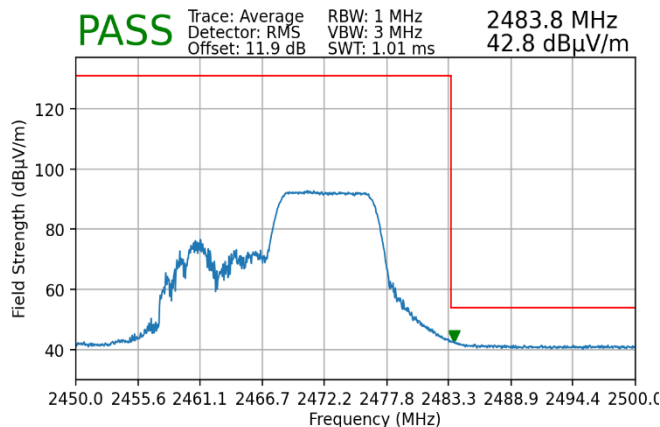


Plot 7-169. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)

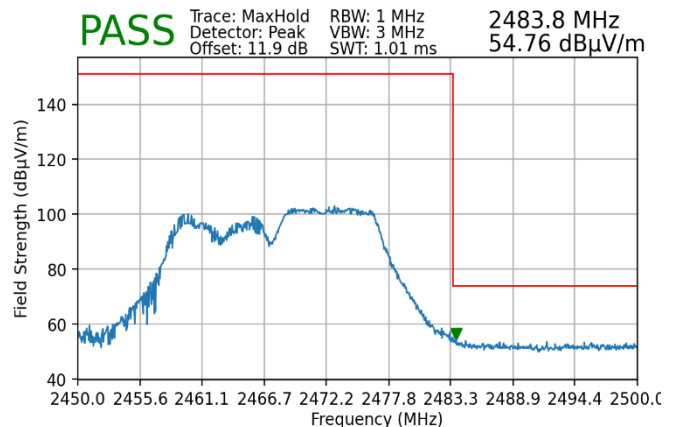


Plot 7-170. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 121 of 138

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2472MHz
Channel:	13

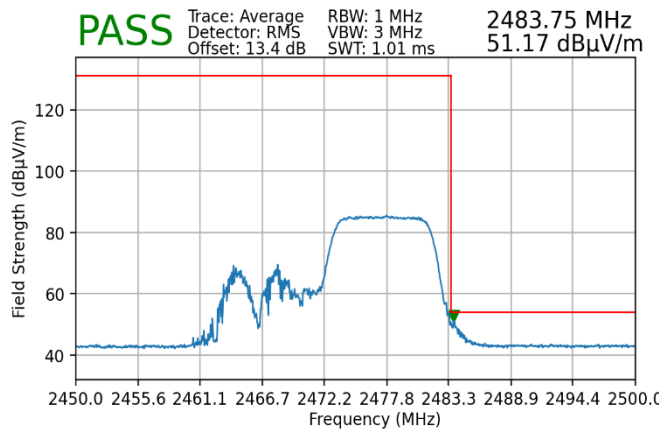

Plot 7-171. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)

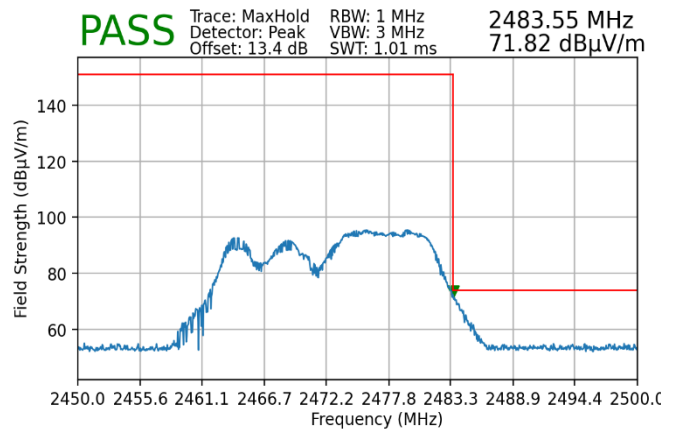


Plot 7-172. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)


FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 122 of 138

MIMO Radiated Restricted Band Edge Measurements - 106+26T

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
MRU Index:	82
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

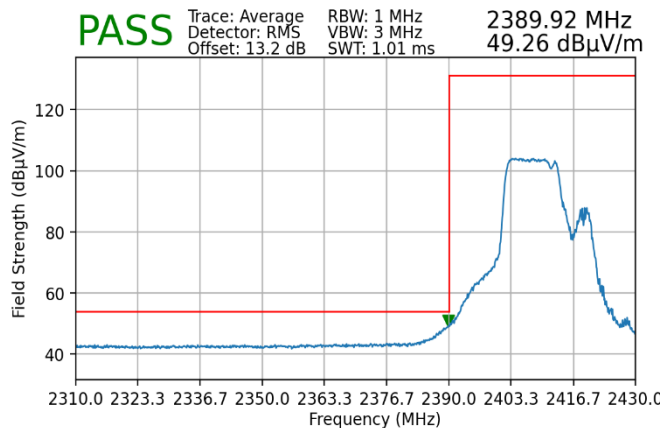


Plot 7-173. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 + 26 Tones)

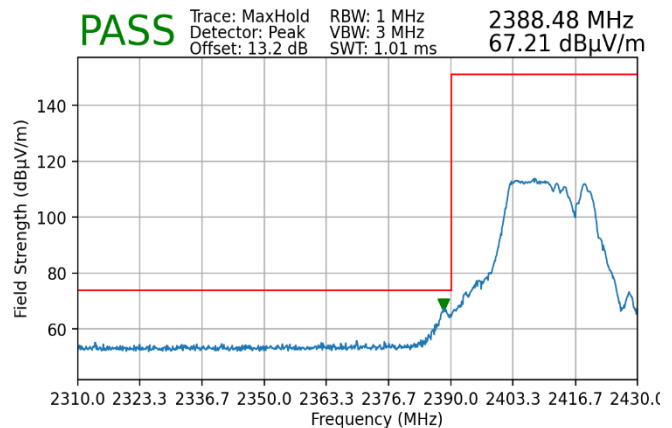


Plot 7-174. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 + 26 Tones)

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
MRU Index:	82
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

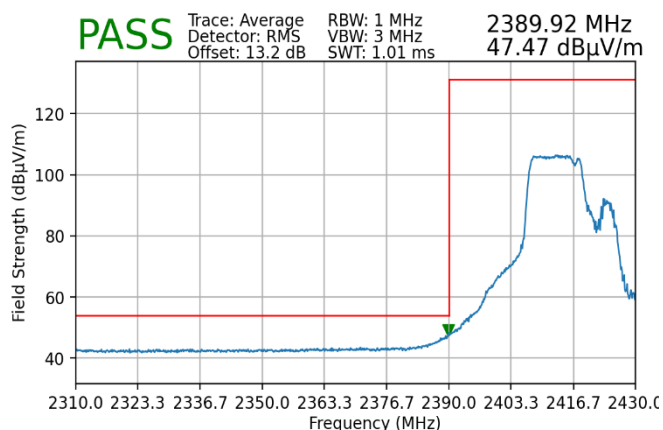


Plot 7-175. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 + 26 Tones)

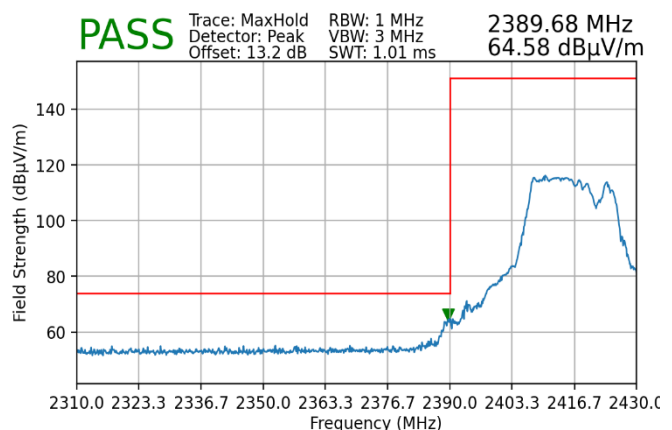


Plot 7-176. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 + 26 Tones)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 123 of 138

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
MRU Index:	82
Distance of Measurements:	3 Meters
Operating Frequency:	2422MHz
Channel:	3

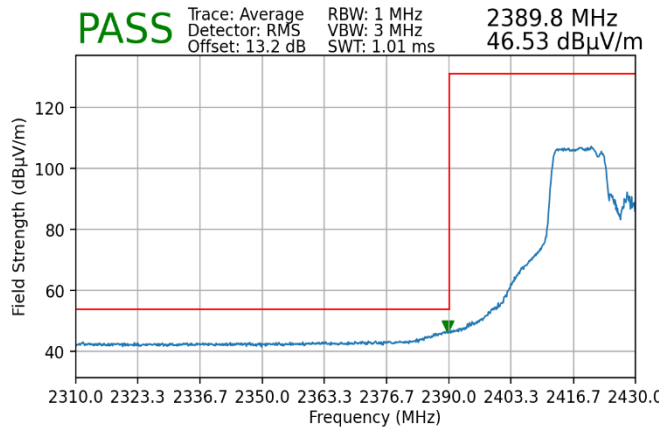


Plot 7-177. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 + 26 Tones)

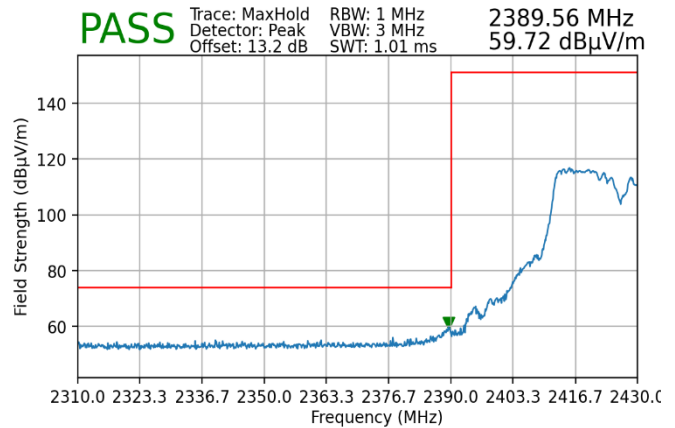


Plot 7-178. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 + 26 Tones)

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
MRU Index:	83
Distance of Measurements:	3 Meters
Operating Frequency:	2452MHz
Channel:	9

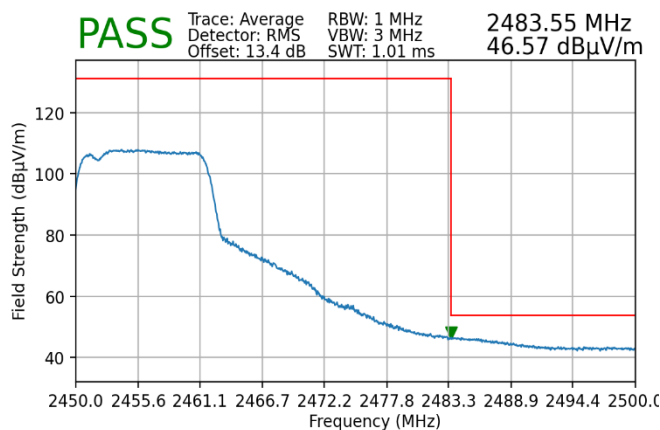


Plot 7-179. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 + 26 Tones)

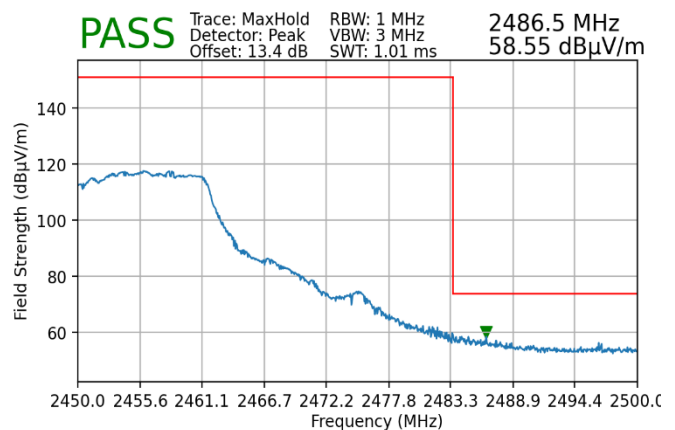


Plot 7-180. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 + 26 Tones)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 124 of 138

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
MRU Index:	83
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10

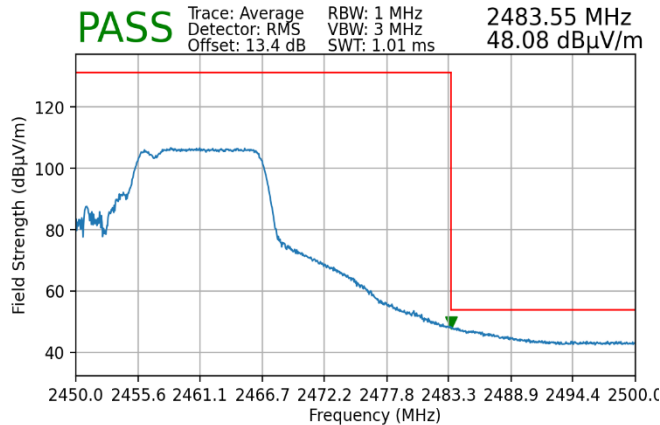


Plot 7-181. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 + 26 Tones)

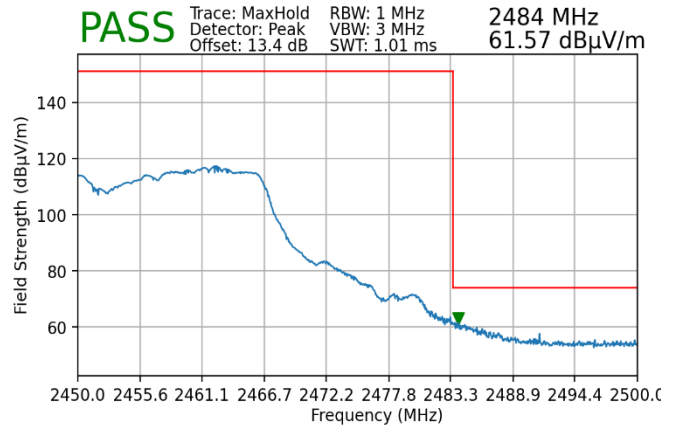


Plot 7-182. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 + 26 Tones)

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
MRU Index:	83
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

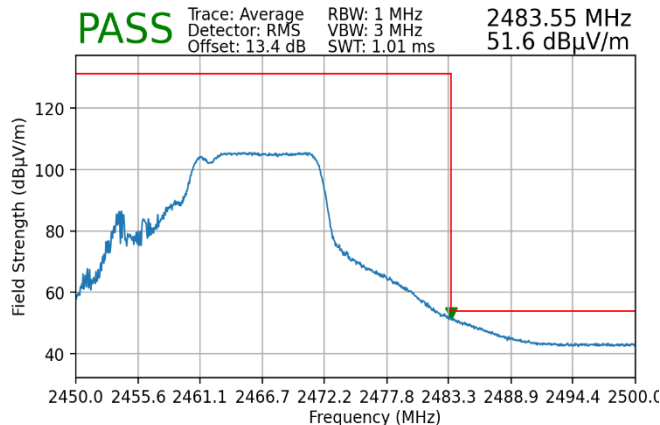

Plot 7-183. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 + 26 Tones)

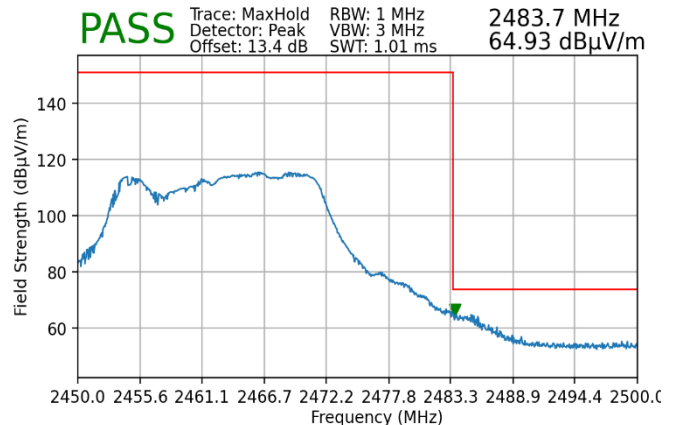

Plot 7-184. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 + 26 Tones)

FCC ID: C3K2076 IC: 3048A-2076	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511240098-08-R1.C3K	Test Dates: 12/16/2025 - 03/11/2026	EUT Type: Portable Computing Device	Page 125 of 138