



|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 54             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2462MHz        |
| Channel:                  | 11             |

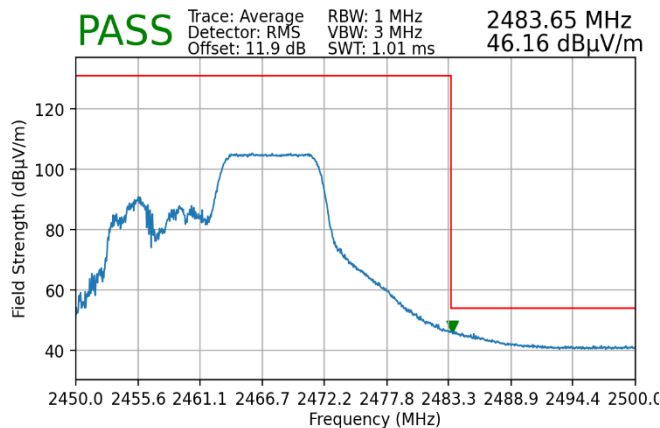


**Plot 7-167. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)**

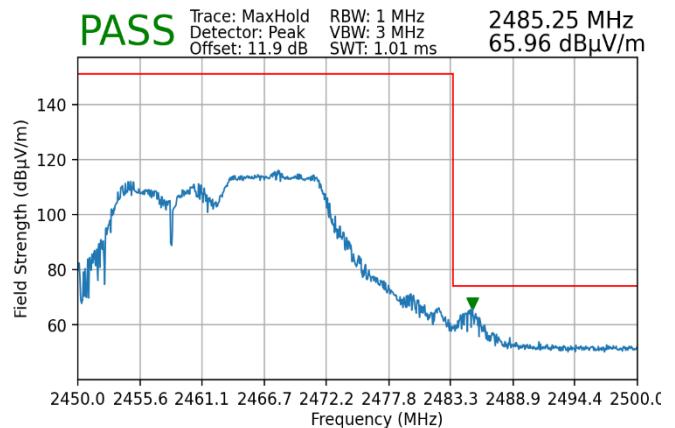


**Plot 7-168. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 54             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2467MHz        |
| Channel:                  | 12             |

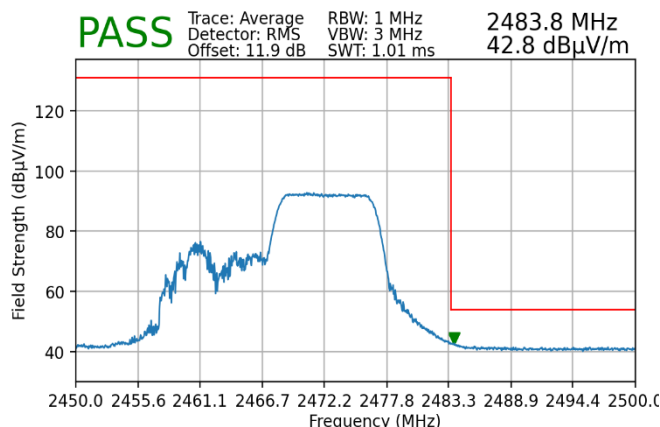


**Plot 7-169. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)**

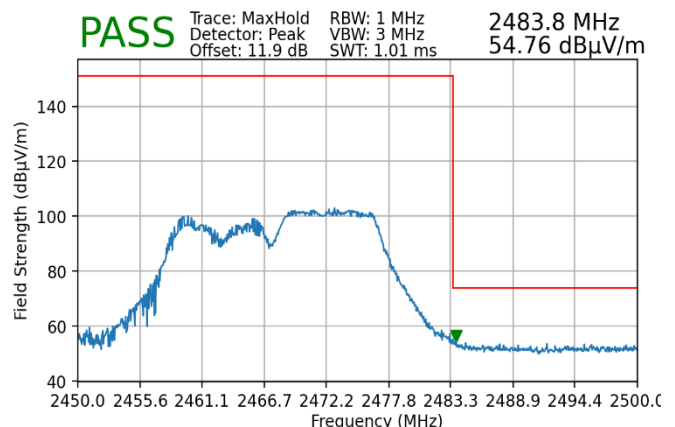


**Plot 7-170. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 120 of 135                   |

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 54             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2472MHz        |
| Channel:                  | 13             |

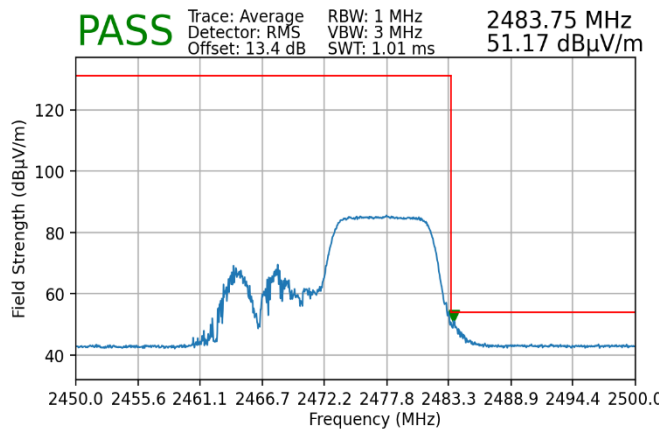

**Plot 7-171. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)**

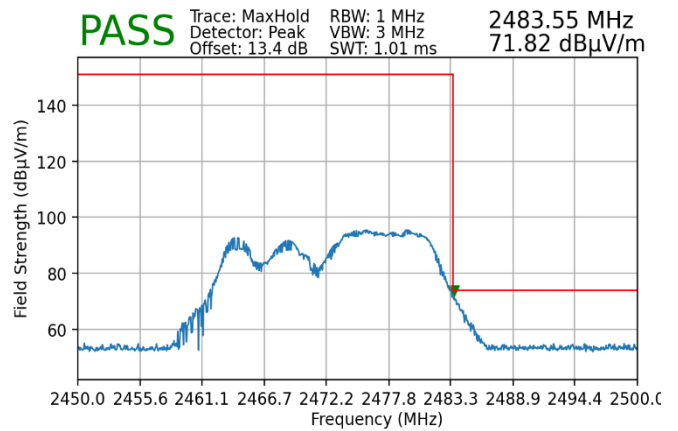


**Plot 7-172. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)**


|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 121 of 135                   |

## MIMO Radiated Restricted Band Edge Measurements - 106+26T

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| MRU Index:                | 82             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2412MHz        |
| Channel:                  | 1              |

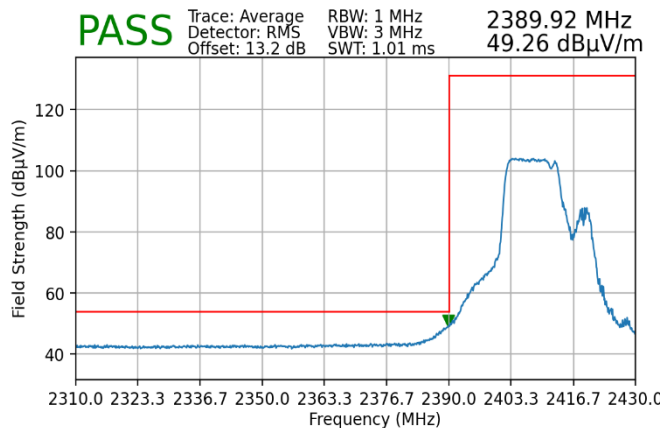


**Plot 7-173. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 + 26 Tones)**

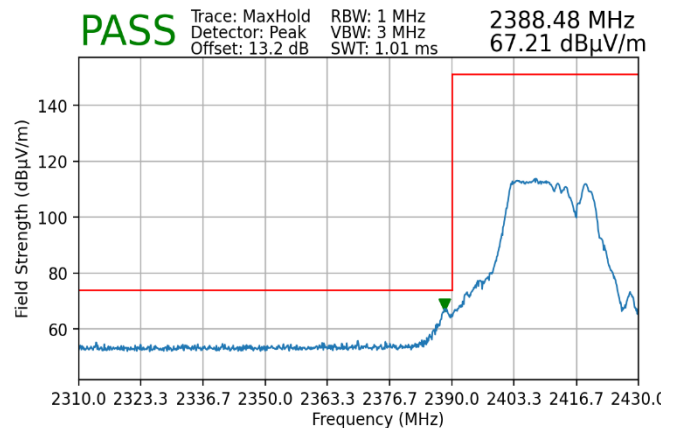


**Plot 7-174. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 + 26 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| MRU Index:                | 82             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2417MHz        |
| Channel:                  | 2              |

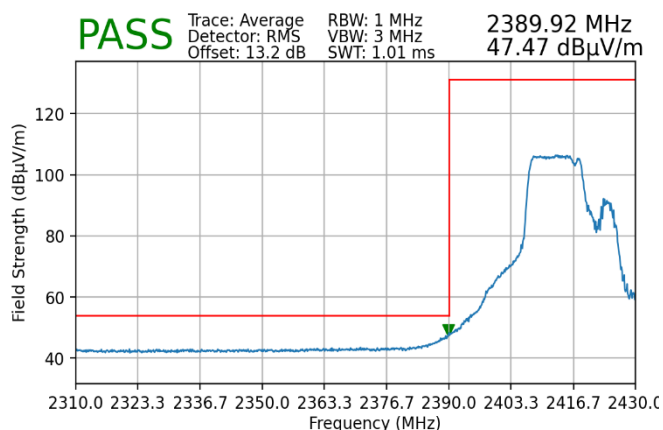


**Plot 7-175. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 + 26 Tones)**

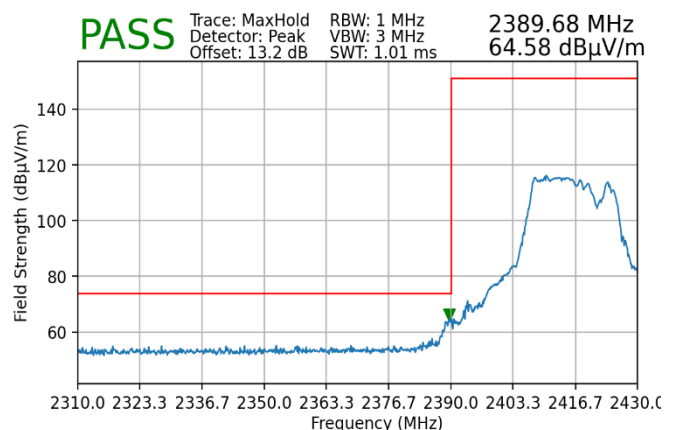


**Plot 7-176. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 + 26 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 122 of 135                   |

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| MRU Index:                | 82             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2422MHz        |
| Channel:                  | 3              |

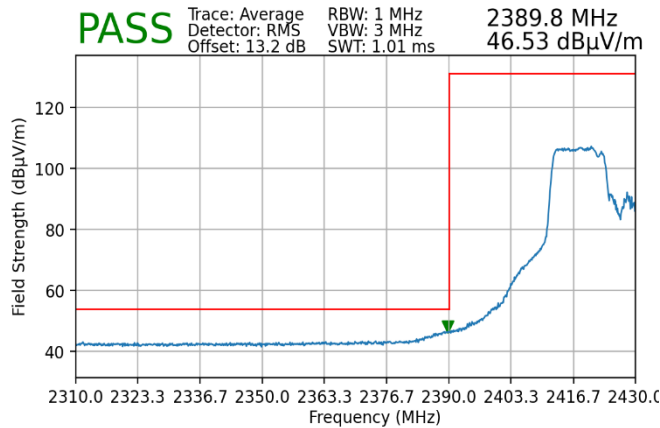


**Plot 7-177. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 + 26 Tones)**

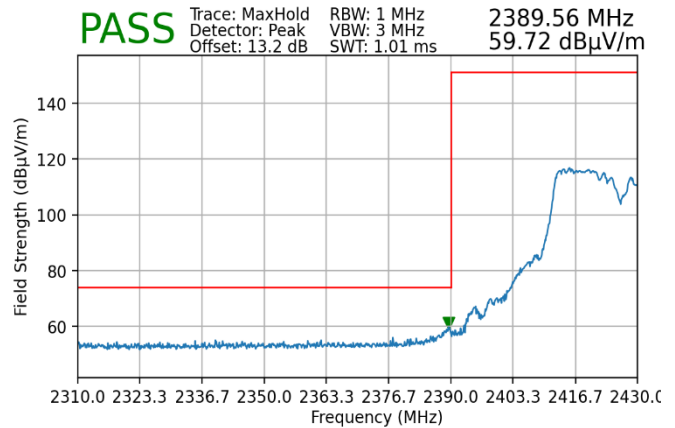


**Plot 7-178. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 + 26 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| MRU Index:                | 83             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2452MHz        |
| Channel:                  | 9              |

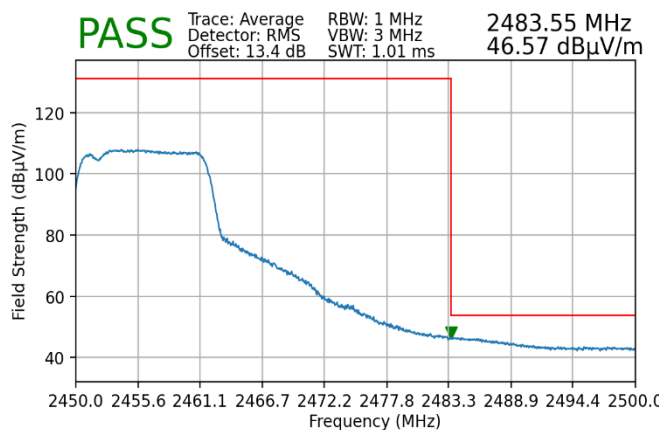


**Plot 7-179. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 + 26 Tones)**

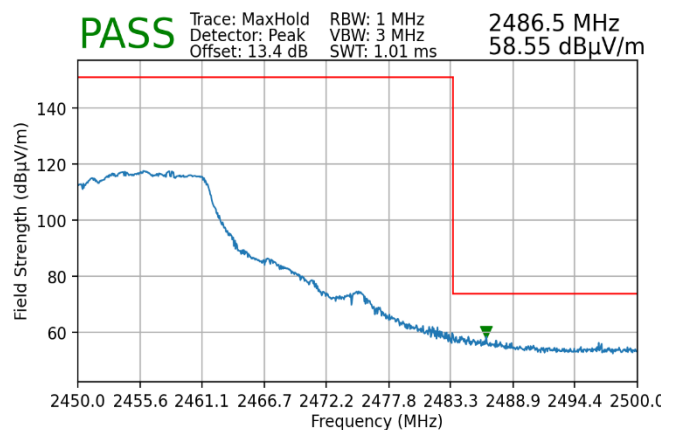


**Plot 7-180. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 + 26 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 123 of 135                   |

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| MRU Index:                | 83             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2457MHz        |
| Channel:                  | 10             |

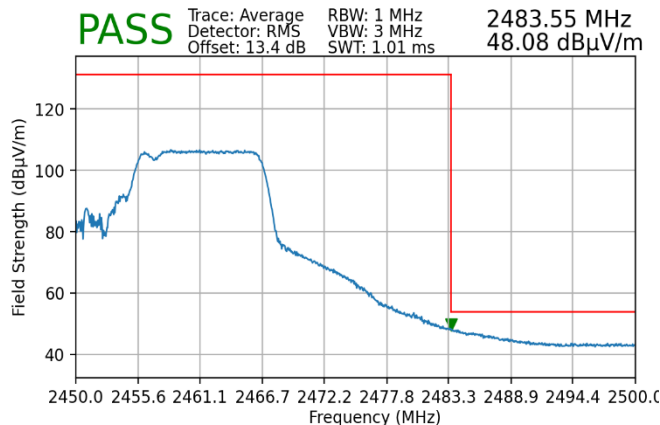


**Plot 7-181. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 + 26 Tones)**

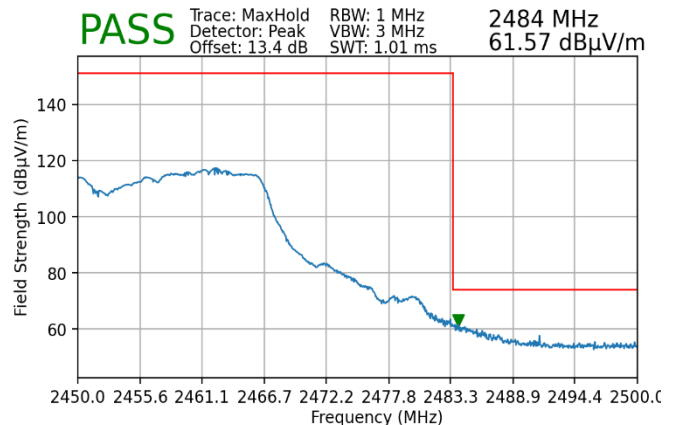


**Plot 7-182. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 + 26 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| MRU Index:                | 83             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2462MHz        |
| Channel:                  | 11             |

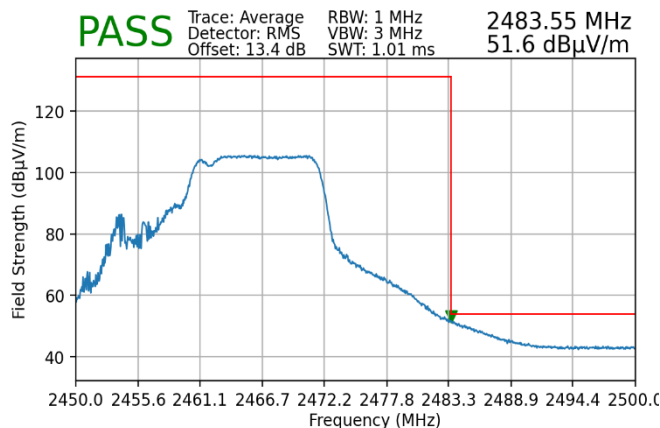


**Plot 7-183. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 + 26 Tones)**

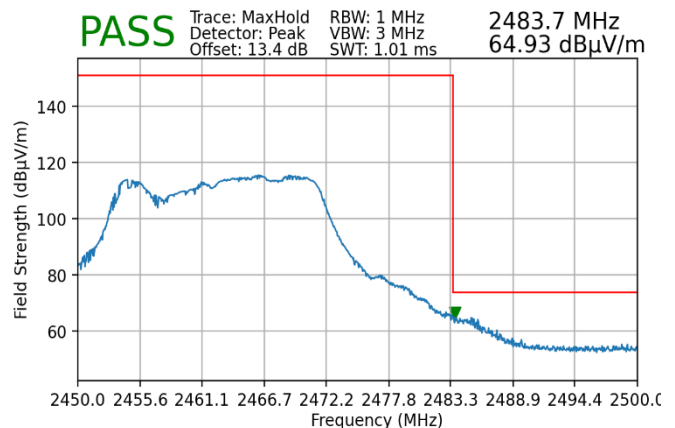


**Plot 7-184. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 + 26 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 124 of 135                   |

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 MRU Index: 83  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

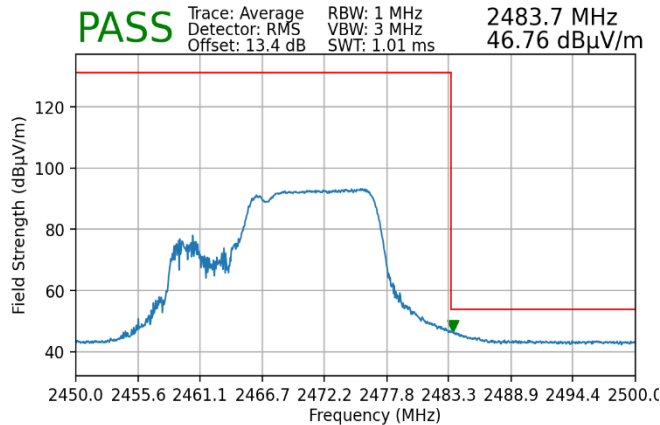


**Plot 7-185. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 + 26 Tones)**

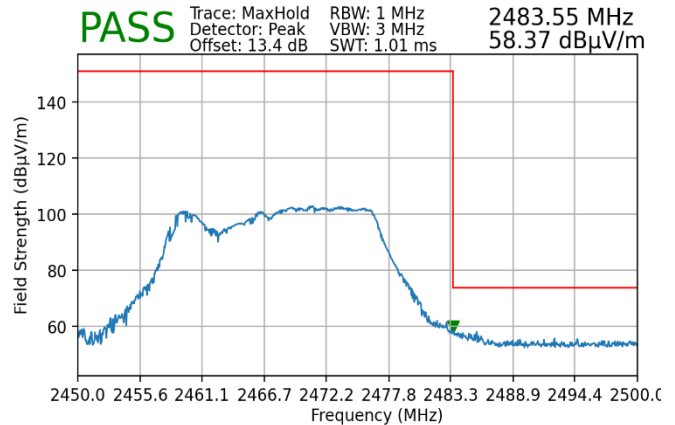


**Plot 7-186. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 + 26 Tones)**

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 MRU Index: 83  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

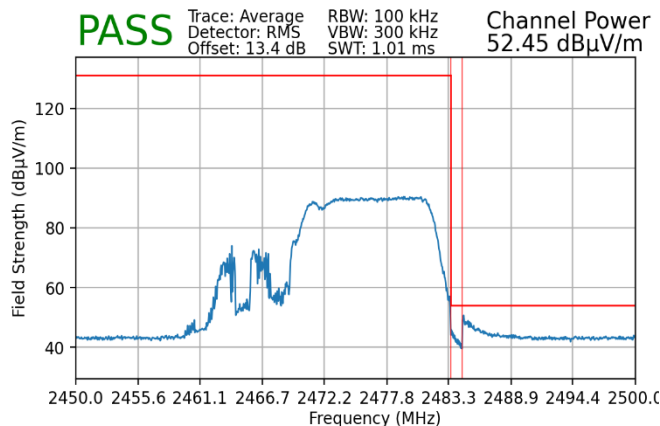

**Plot 7-187. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 + 26 Tones)**

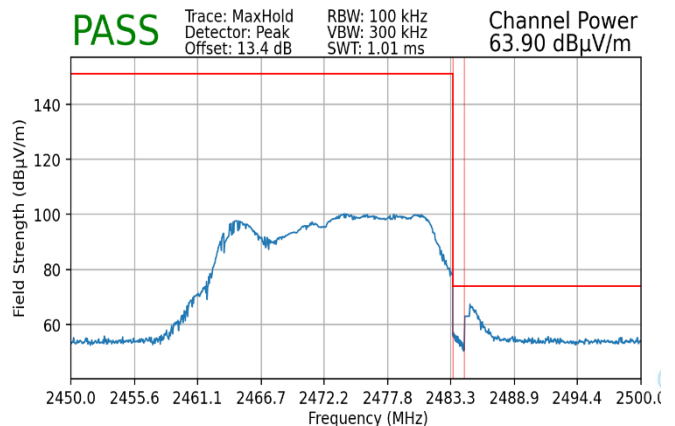


**Plot 7-188. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 + 26 Tones)**


|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 125 of 135                   |

## MIMO Radiated Restricted Band Edge Measurements - 242T

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 61             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2412MHz        |
| Channel:                  | 1              |

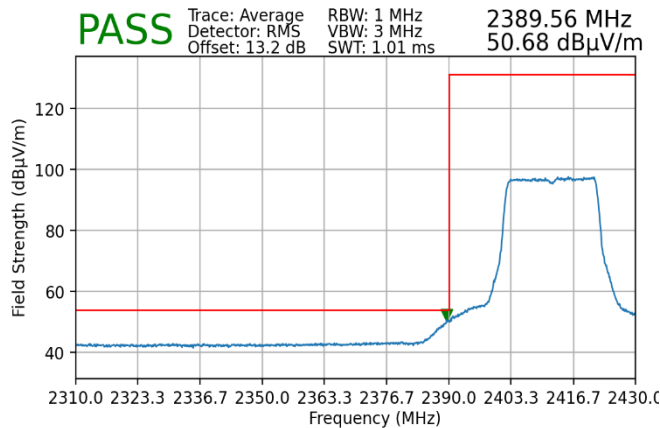


**Plot 7-189. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 242 Tones)**

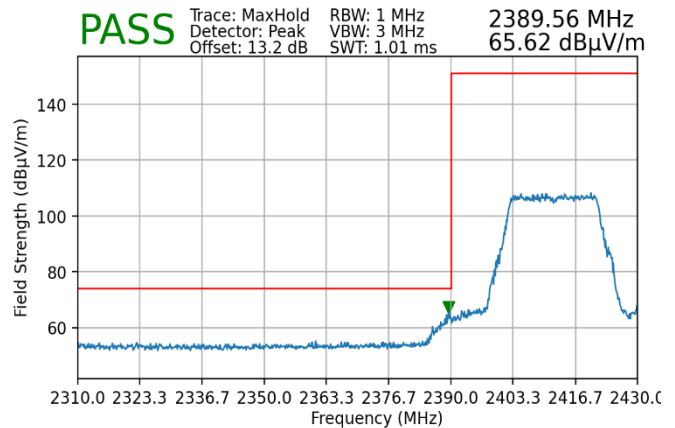


**Plot 7-190. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 242 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 61             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2417MHz        |
| Channel:                  | 2              |

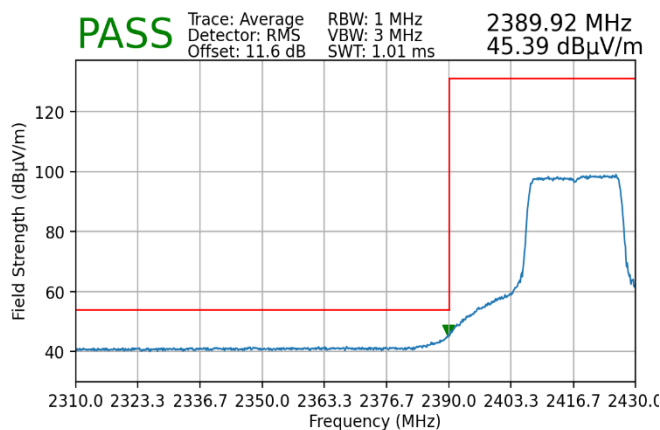


**Plot 7-191. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 242 Tones)**

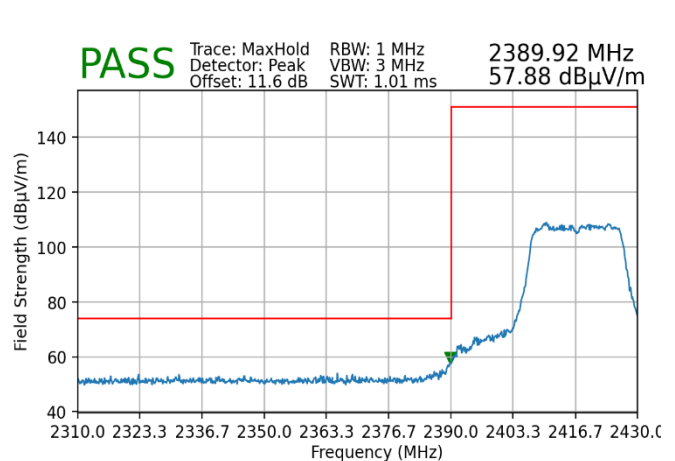


**Plot 7-192. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 242 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 126 of 135                   |

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

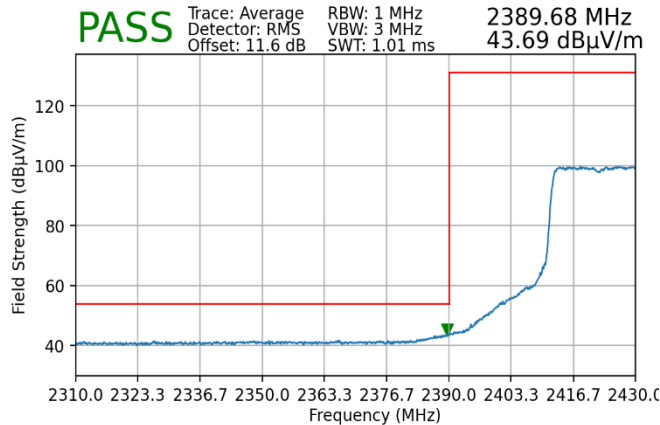


**Plot 7-193. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 242 Tones)**

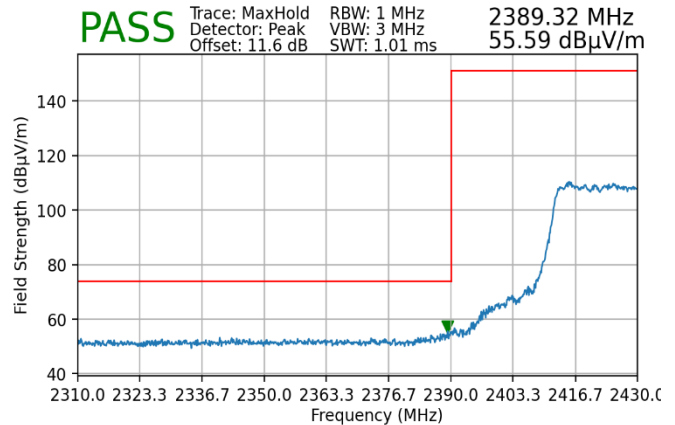


**Plot 7-194. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 242 Tones)**

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2427MHz  
 Channel: 4

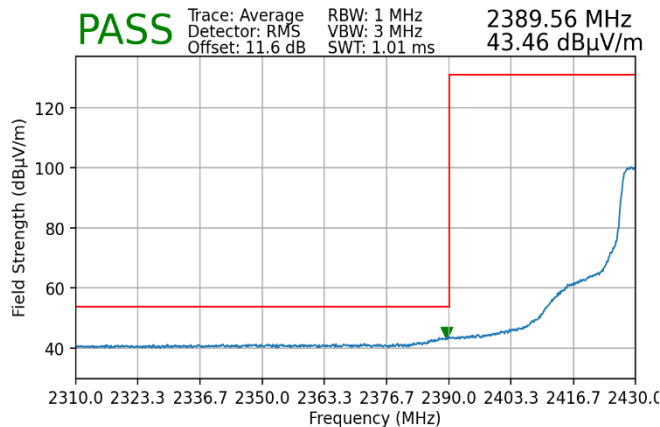


**Plot 7-195. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 242 Tones)**

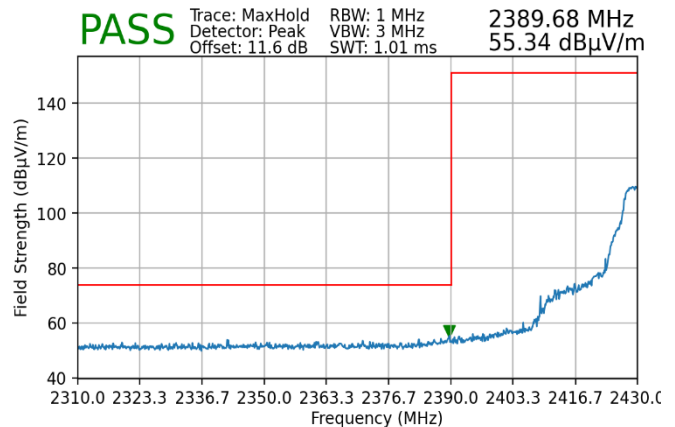


**Plot 7-196. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 242 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 127 of 135                   |

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 61             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2447MHz        |
| Channel:                  | 8              |

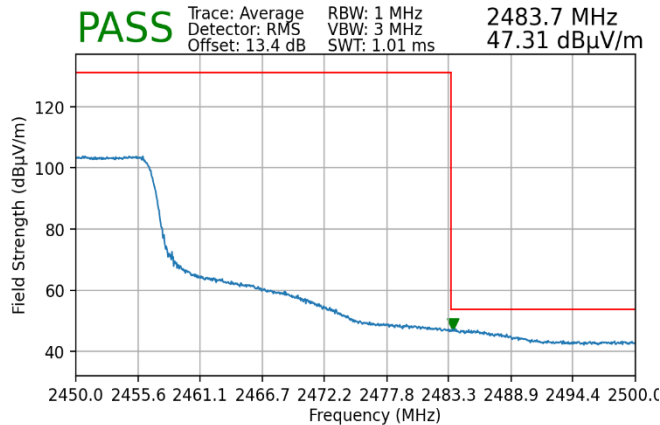


**Plot 7-197. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)**

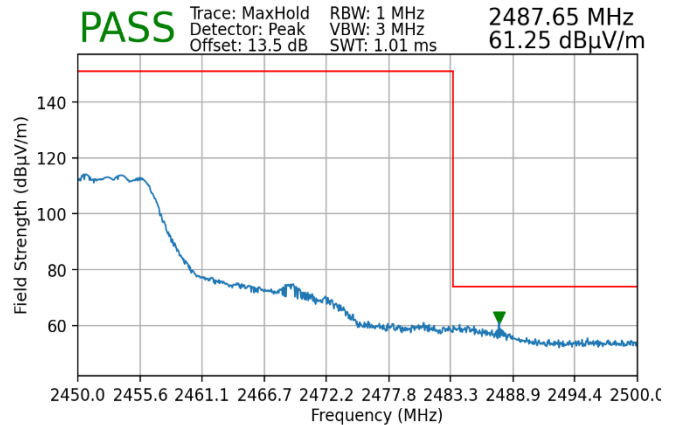


**Plot 7-198. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 61             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2452MHz        |
| Channel:                  | 9              |

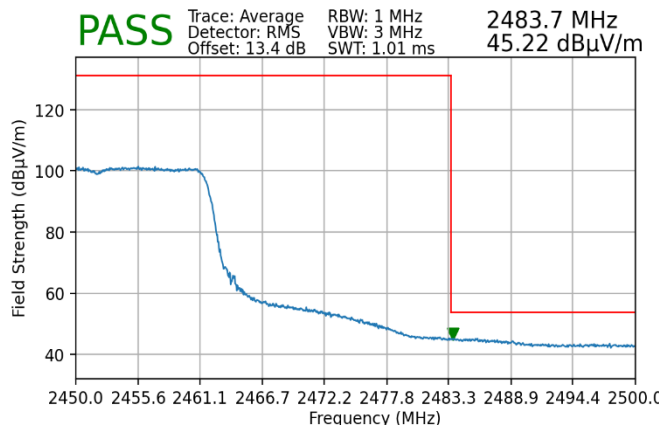


**Plot 7-199. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)**

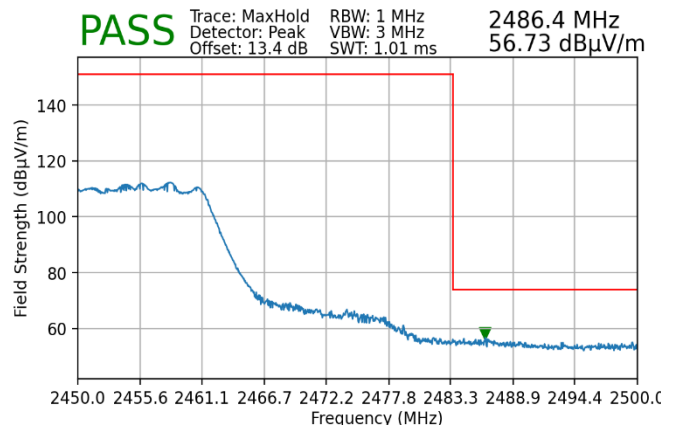


**Plot 7-200. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 128 of 135                   |

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 61             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2457MHz        |
| Channel:                  | 10             |

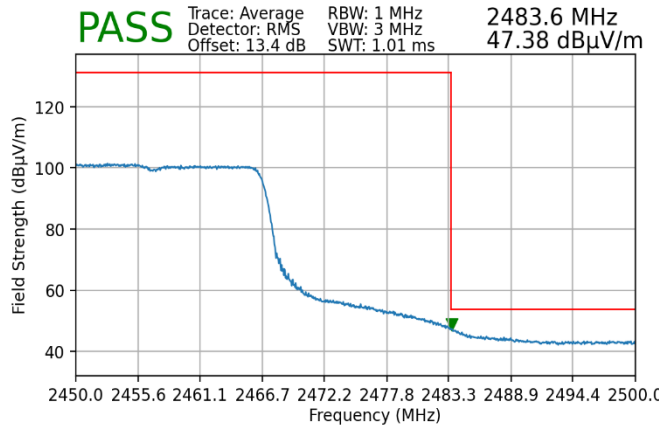


**Plot 7-201. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)**

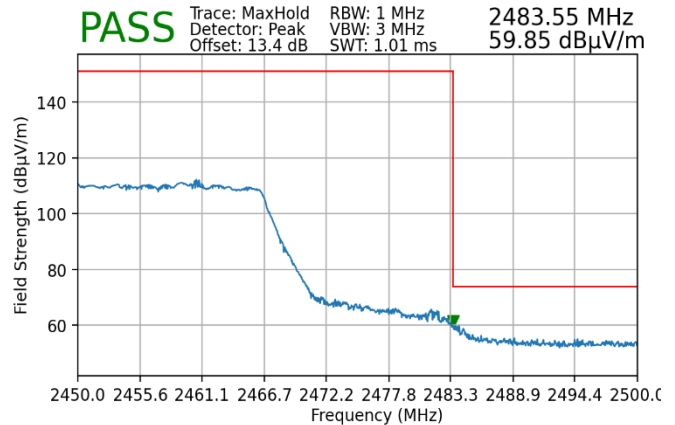


**Plot 7-202. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 61             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2462MHz        |
| Channel:                  | 11             |

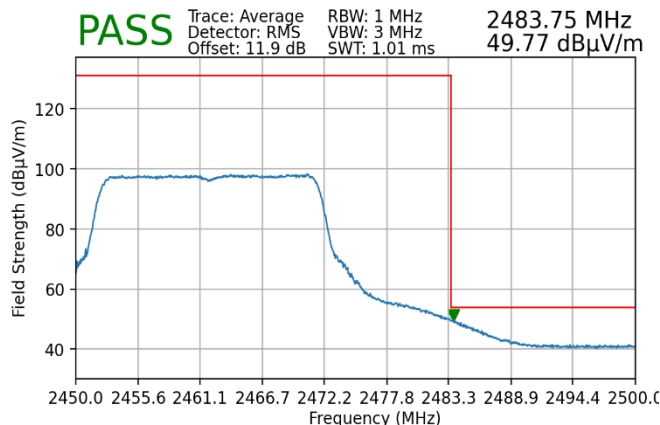


**Plot 7-203. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)**

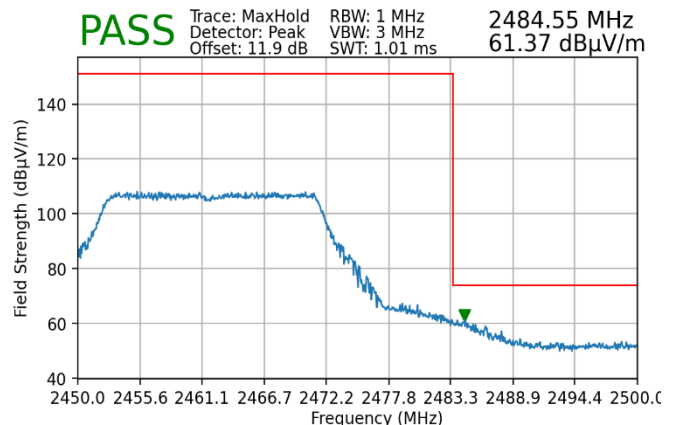


**Plot 7-204. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 129 of 135                   |

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 61             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2467MHz        |
| Channel:                  | 12             |

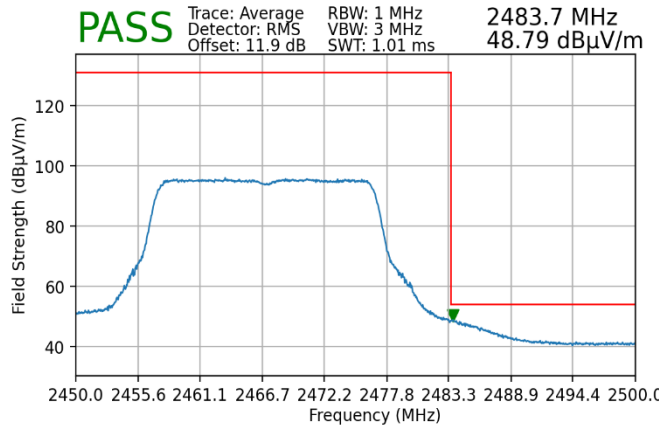


**Plot 7-205. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)**

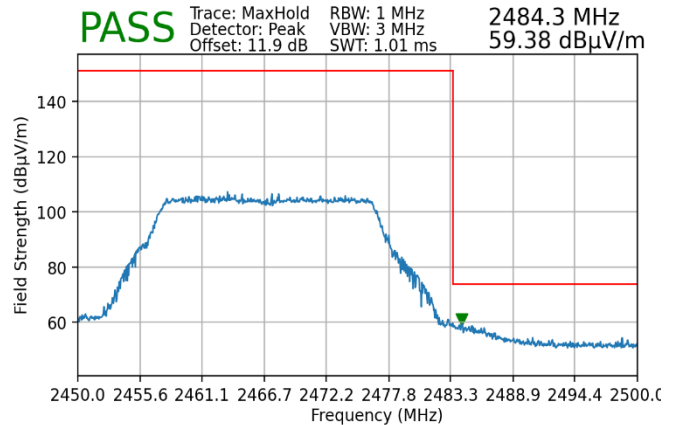


**Plot 7-206. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 61             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2472MHz        |
| Channel:                  | 13             |

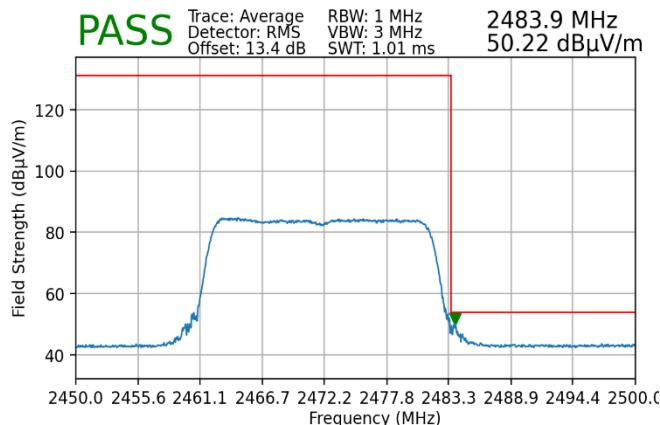

**Plot 7-207. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)**

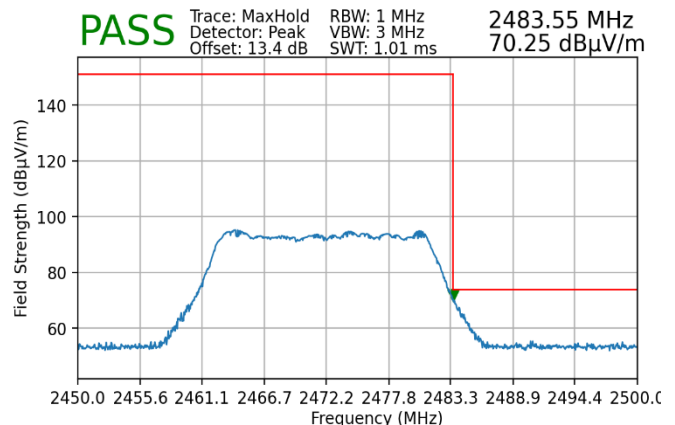


**Plot 7-208. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)**


|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 130 of 135                   |

## MIMO Radiated Restricted Band Edge Measurements - 484T

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 65             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2422MHz        |
| Channel:                  | 3              |

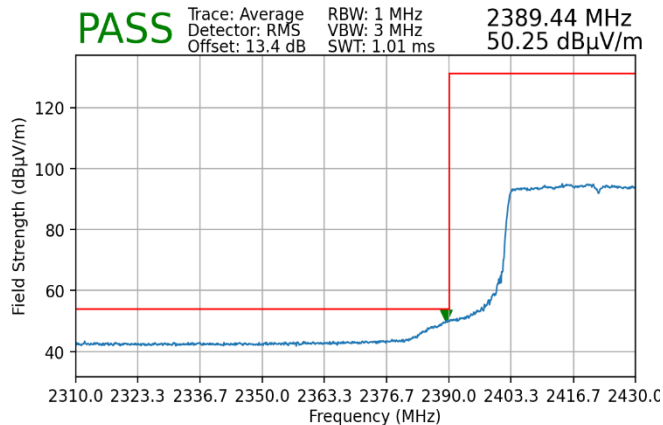


**Plot 7-209. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 484 Tones)**

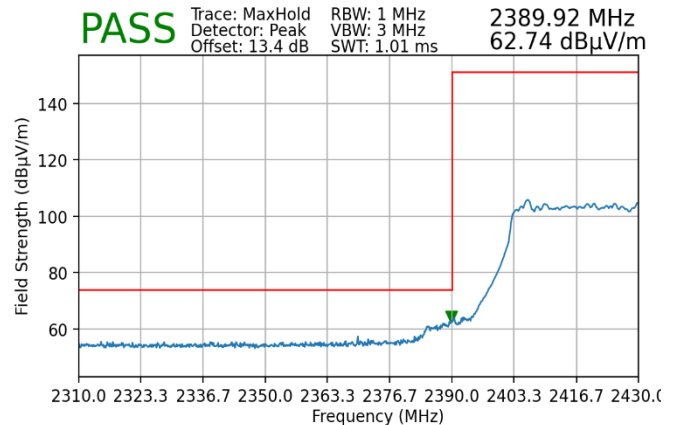


**Plot 7-210. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 484 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 65             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2427MHz        |
| Channel:                  | 4              |

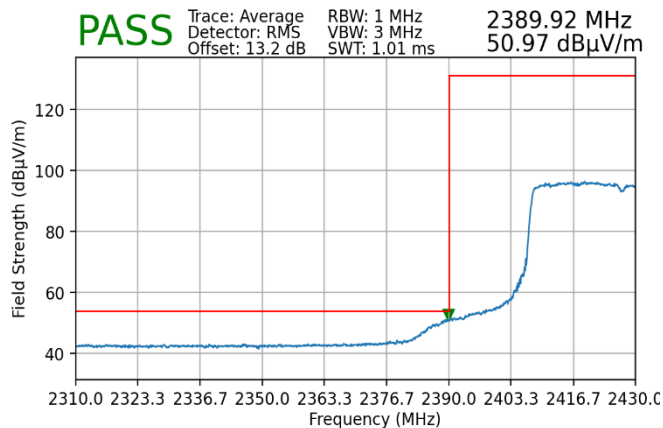


**Plot 7-211. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 484 Tones)**

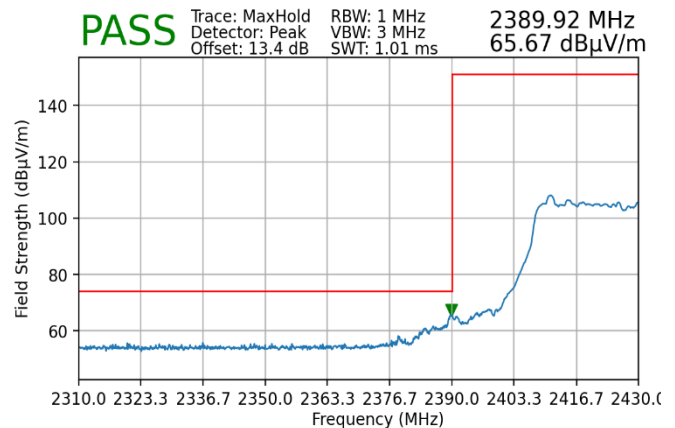


**Plot 7-212. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 484 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 131 of 135                   |

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 65  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2432MHz  
 Channel: 5

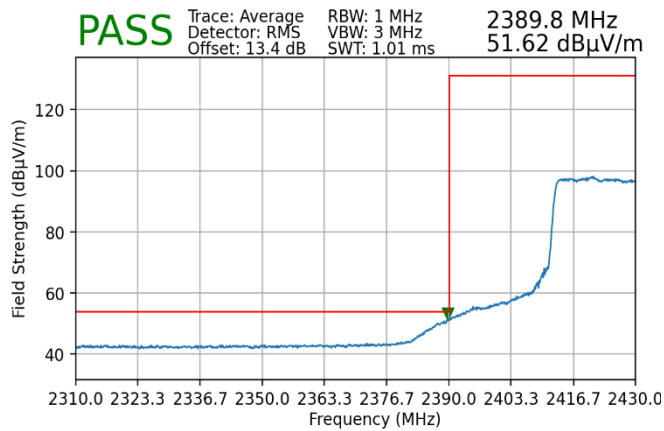


**Plot 7-213. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 484 Tones)**

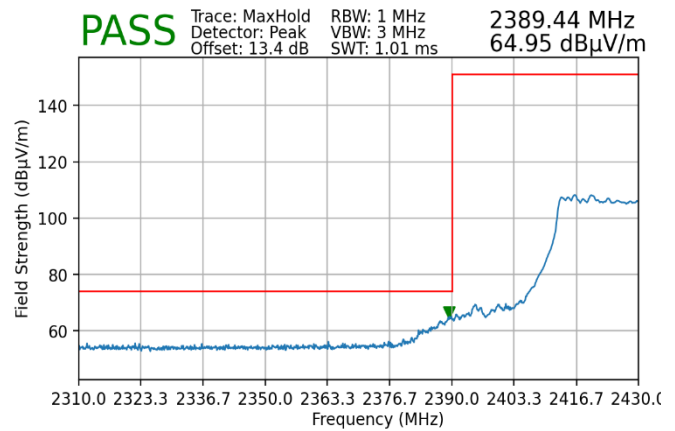


**Plot 7-214. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 484 Tones)**

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 65  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2442MHz  
 Channel: 7

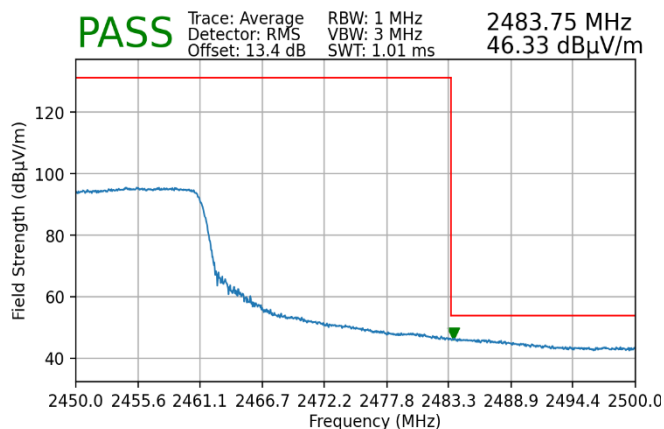


**Plot 7-215. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 484 Tones)**

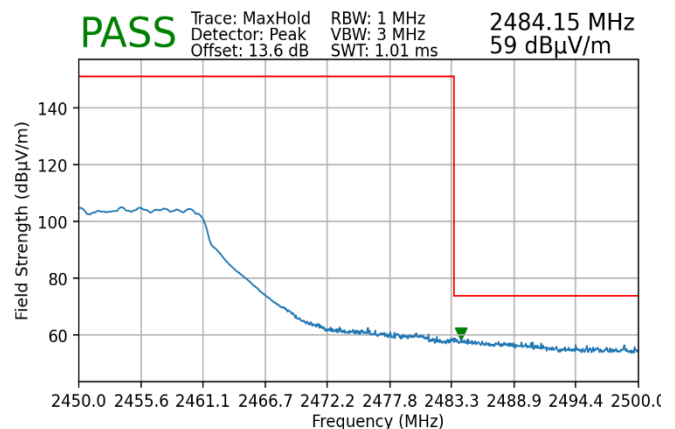


**Plot 7-216. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 484 Tones)**

|                                                   |                                                                  |                                               |                                          |
|---------------------------------------------------|------------------------------------------------------------------|-----------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> C3K2085<br><b>IC:</b> 3048A-2085   | <b>MEASUREMENT REPORT   CLASS II</b><br><b>PERMISSIVE CHANGE</b> |                                               | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2511200095-05-R2.C3K | <b>Test Dates:</b><br>12/16/2025 - 03/09/2026                    | <b>EUT Type:</b><br>Portable Computing Device | Page 132 of 135                          |

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 65             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2447MHz        |
| Channel:                  | 8              |

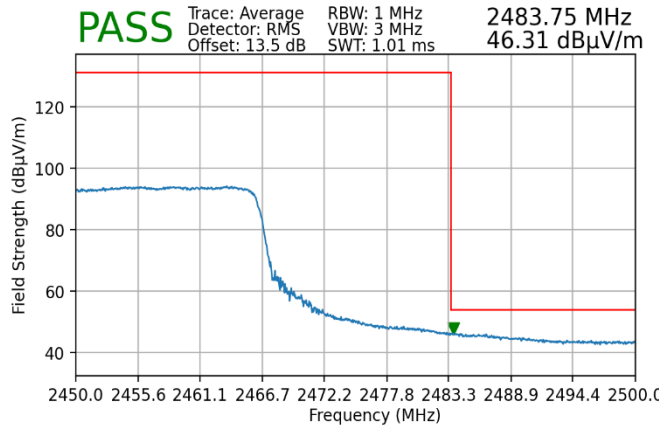


**Plot 7-217. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 484 Tones)**

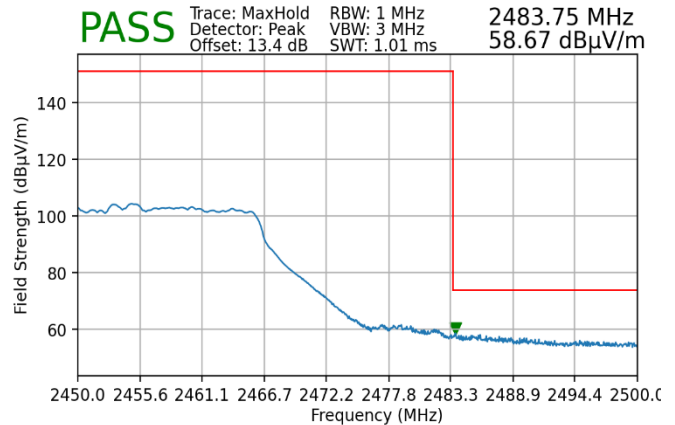


**Plot 7-218. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 484 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 65             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2452MHz        |
| Channel:                  | 9              |

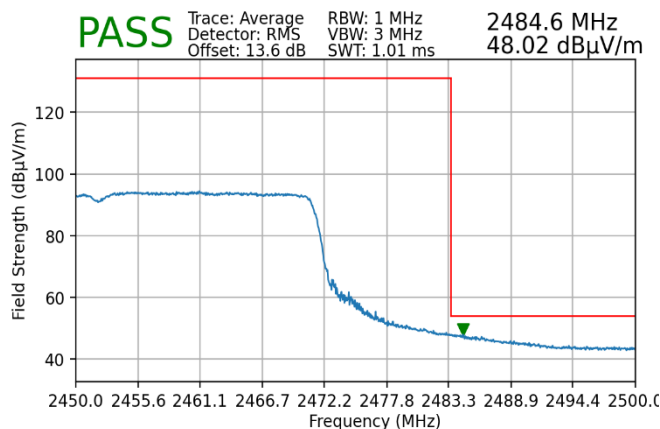


**Plot 7-219. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 484 Tones)**

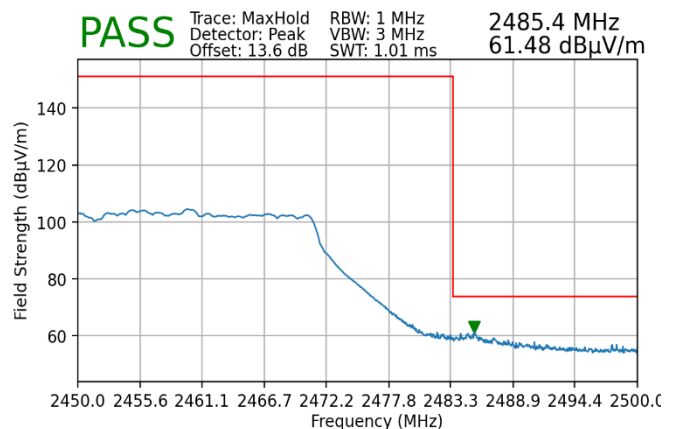


**Plot 7-220. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 484 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 133 of 135                   |

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 65             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2457MHz        |
| Channel:                  | 10             |

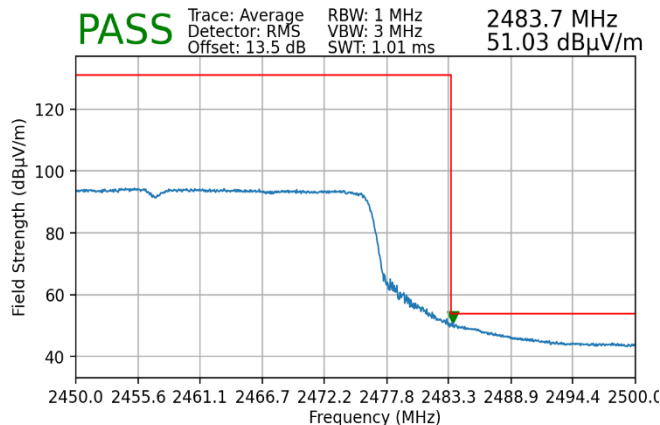


**Plot 7-221. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 484 Tones)**

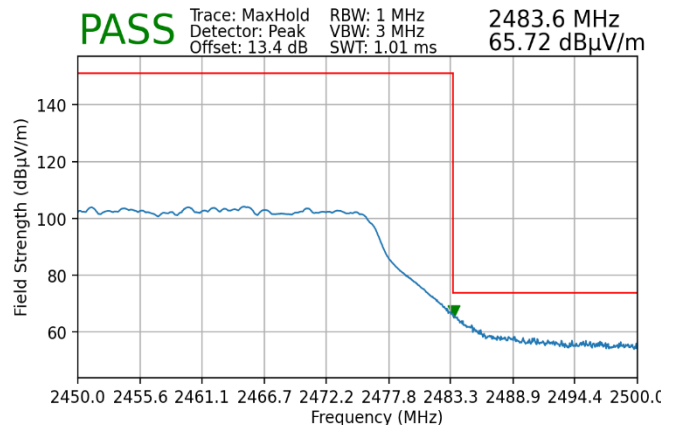


**Plot 7-222. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 484 Tones)**

|                           |                |
|---------------------------|----------------|
| Worst Case Mode:          | 802.11be OFDMA |
| Worst Case Transfer Rate: | MCS0           |
| RU Index:                 | 65             |
| Distance of Measurements: | 3 Meters       |
| Operating Frequency:      | 2462MHz        |
| Channel:                  | 11             |

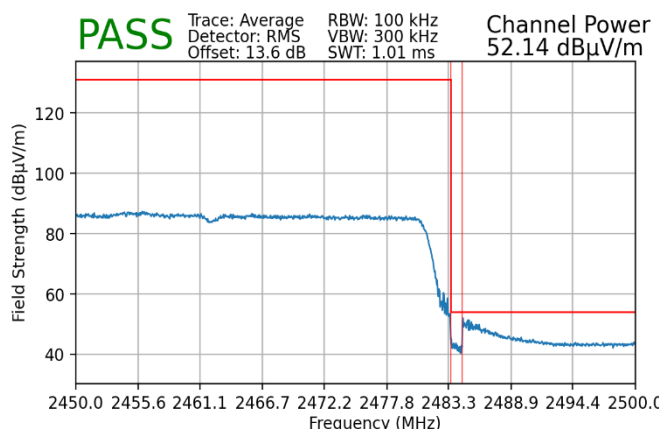

**Plot 7-223. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 484 Tones)**

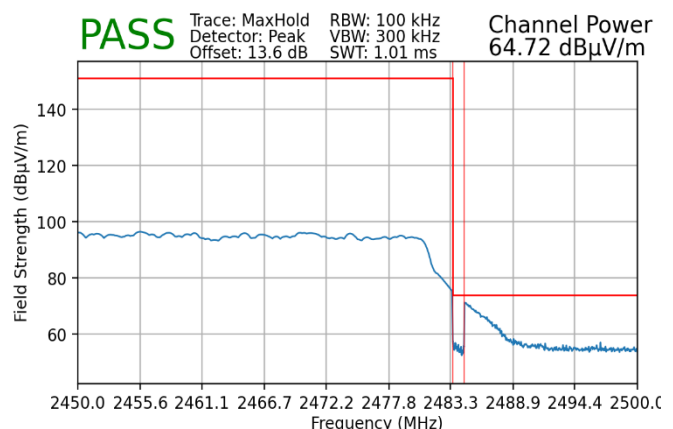

**Plot 7-224. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 484 Tones)**

|                                            |                                                    |                                        |                                   |
|--------------------------------------------|----------------------------------------------------|----------------------------------------|-----------------------------------|
| FCC ID: C3K2085<br>IC: 3048A-2085          | MEASUREMENT REPORT   CLASS II<br>PERMISSIVE CHANGE |                                        | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2511200095-05-R2.C3K | Test Dates:<br>12/16/2025 - 03/09/2026             | EUT Type:<br>Portable Computing Device | Page 134 of 135                   |

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Microsoft Corporation Portable Computing Device FCC ID: C3K2085 / IC: 3048A-2085** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the ISED rules. After additional testing it is concluded that the component change detailed in the FCC Change Document does not meaningfully affect compliance.

|                                                   |                                                            |                                               |                                          |
|---------------------------------------------------|------------------------------------------------------------|-----------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> C3K2085<br><b>IC:</b> 3048A-2085   | <b>MEASUREMENT REPORT   CLASS II<br/>PERMISSIVE CHANGE</b> |                                               | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2511200095-05-R2.C3K | <b>Test Dates:</b><br>12/16/2025 - 03/09/2026              | <b>EUT Type:</b><br>Portable Computing Device | Page 135 of 135                          |