



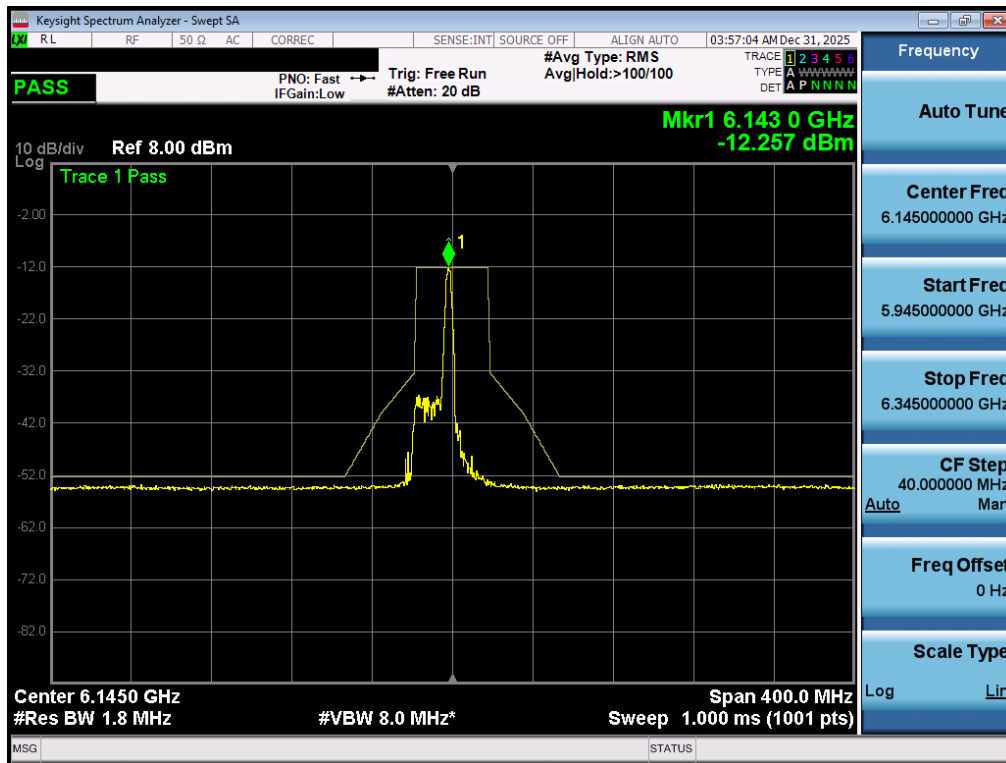


Plot 7-115. In Band Emissions Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

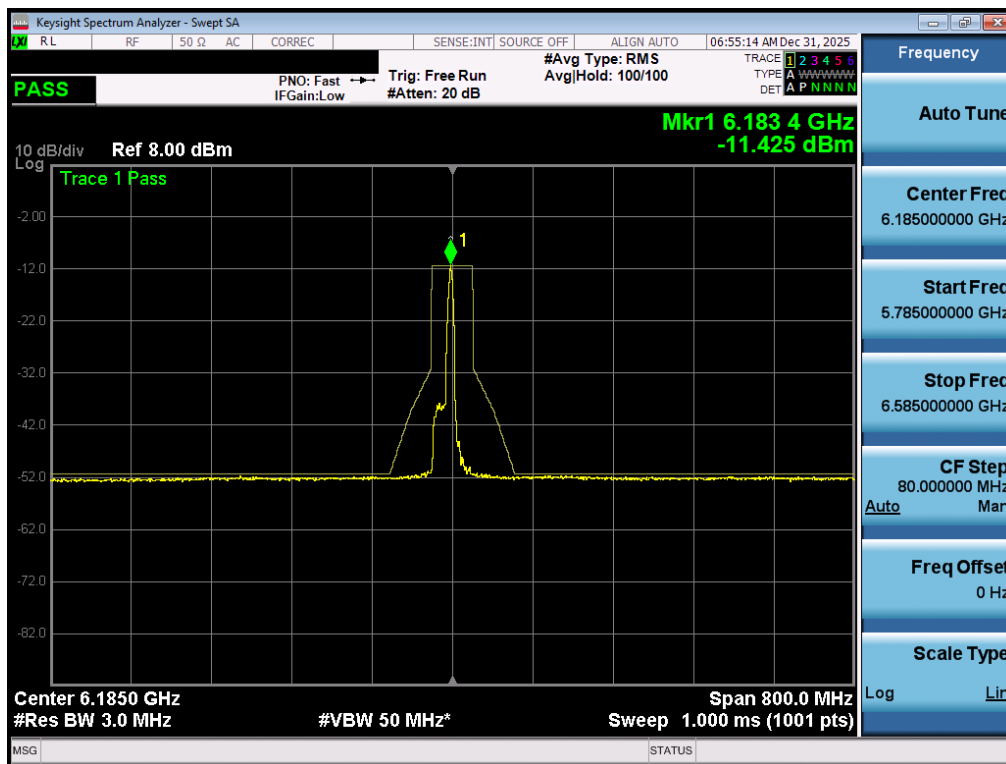


Plot 7-116. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 109 of 159

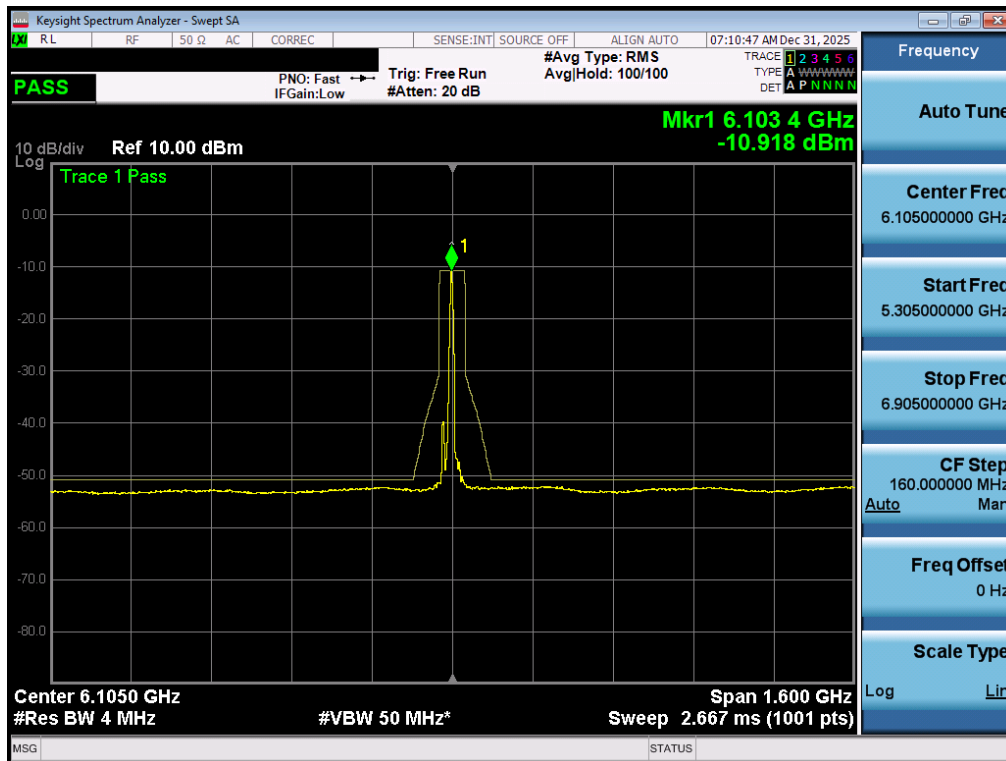


Plot 7-117. In Band Emissions Plot MIMO ANT1 (320MHz 802.11be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

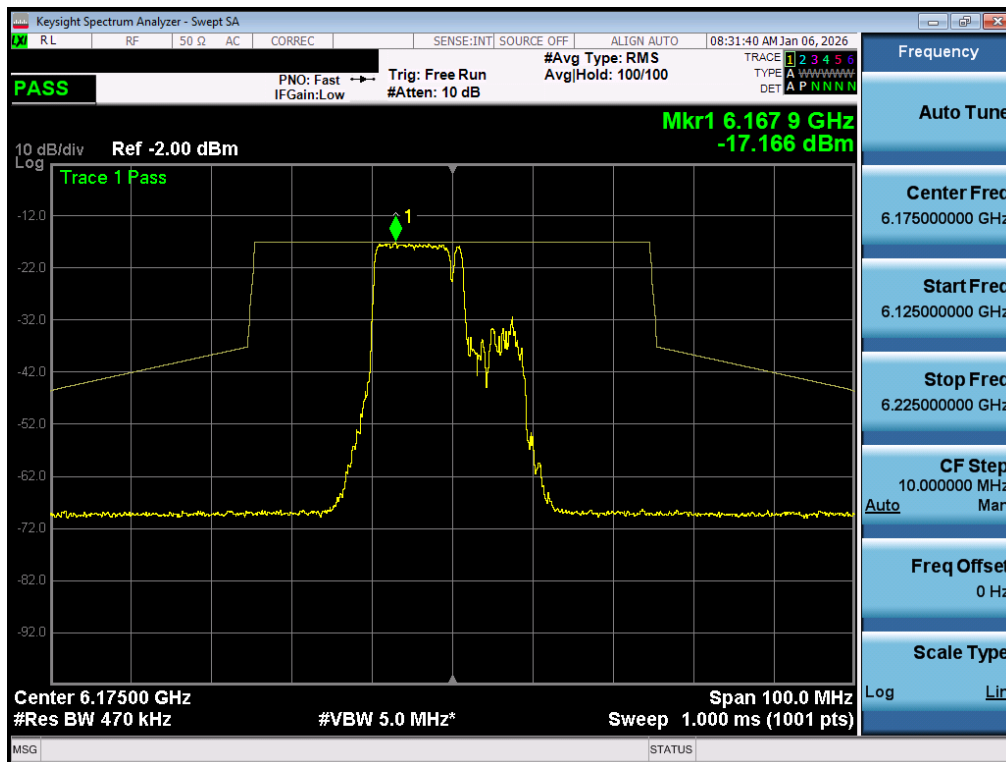


Plot 7-118. In Band Emissions Plot MIMO ANT1 (20MHz 802.11be (106+26 Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 110 of 159

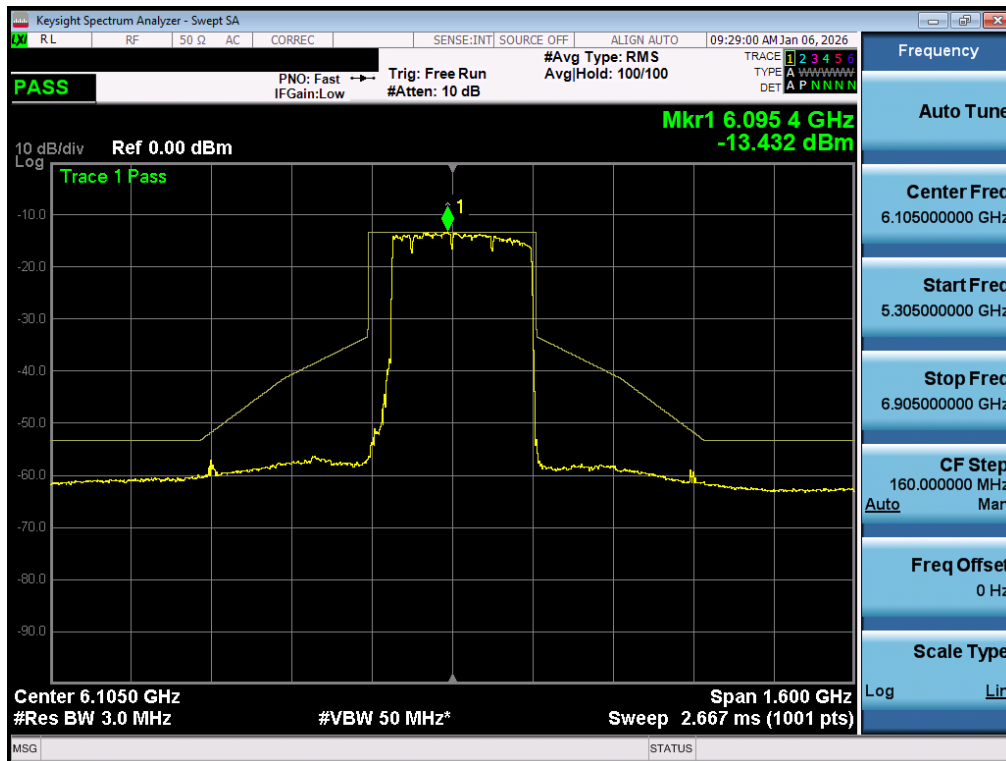


Plot 7-121. In Band Emissions Plot MIMO ANT1 (320MHz 802.11be (3*996+484 Tones) (UNII Band 5) – Ch. 31) LPI

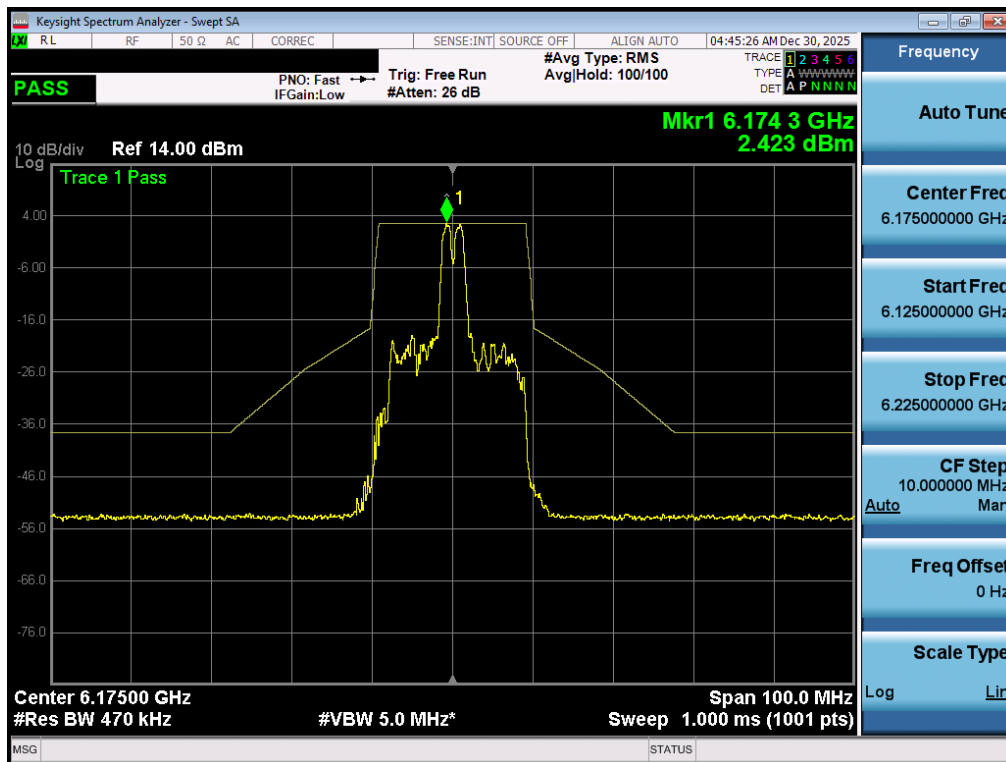


Plot 7-122. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 112 of 159

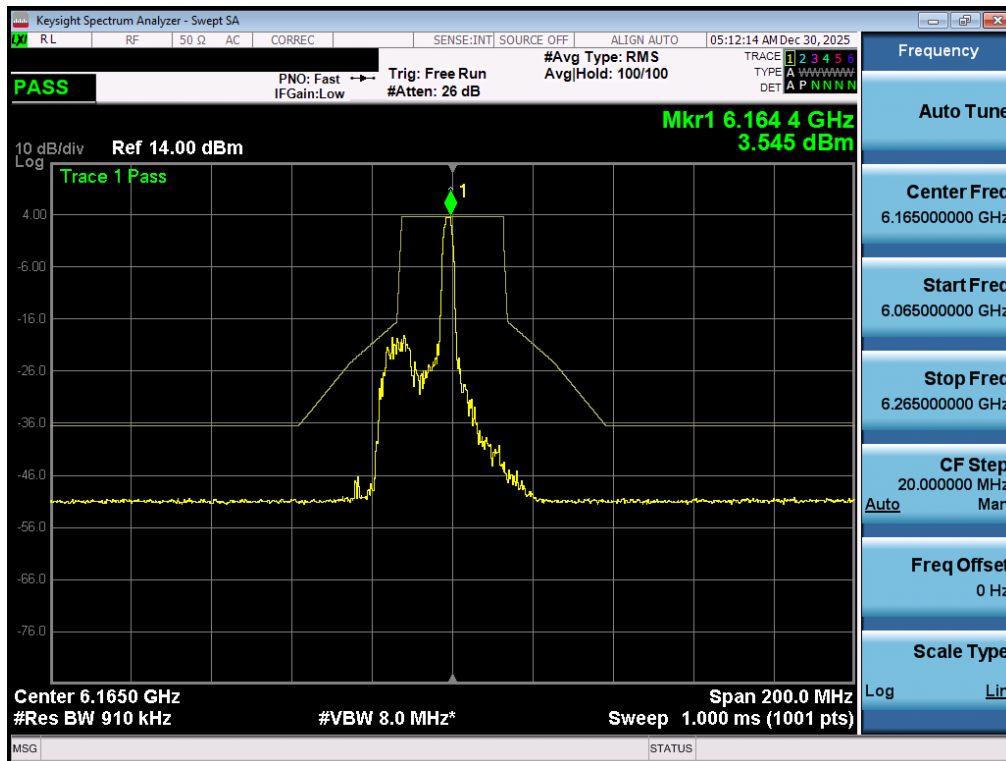


Plot 7-123. In Band Emissions Plot MIMO ANT1 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - SP

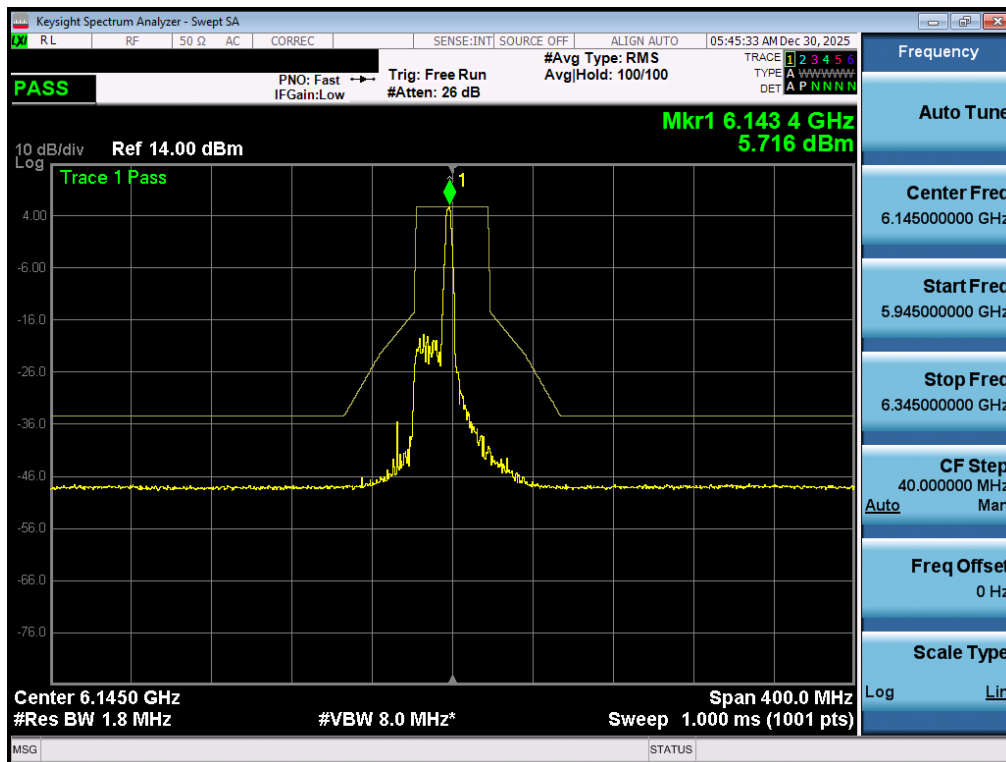


Plot 7-124. In Band Emissions Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 113 of 159

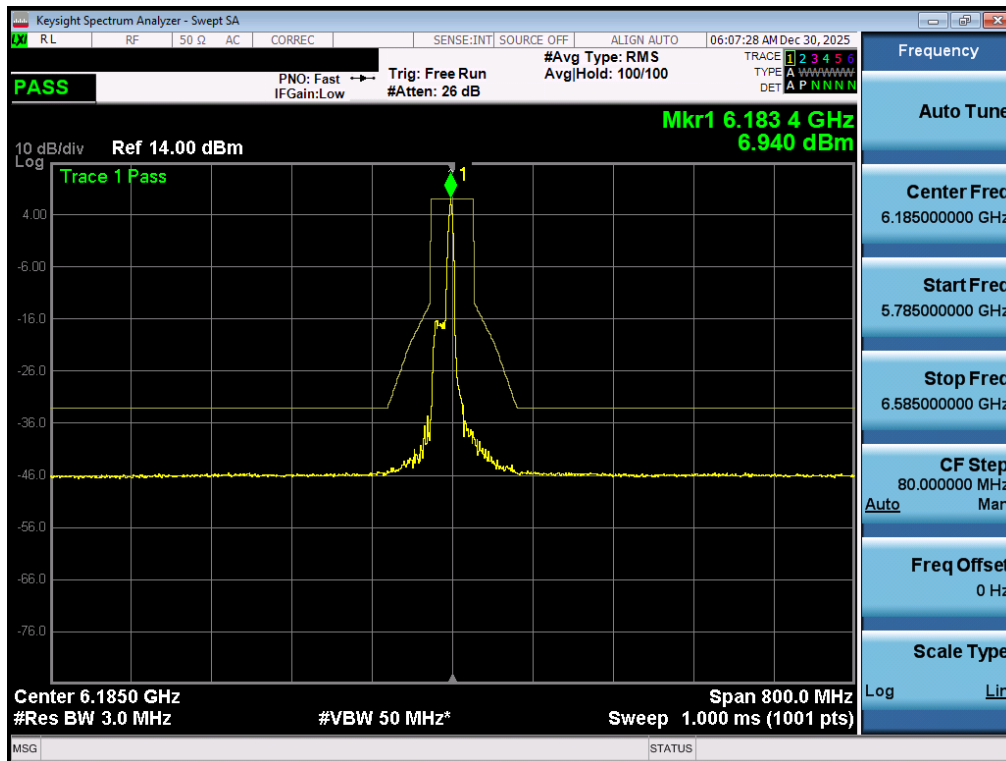


Plot 7-125. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - SP

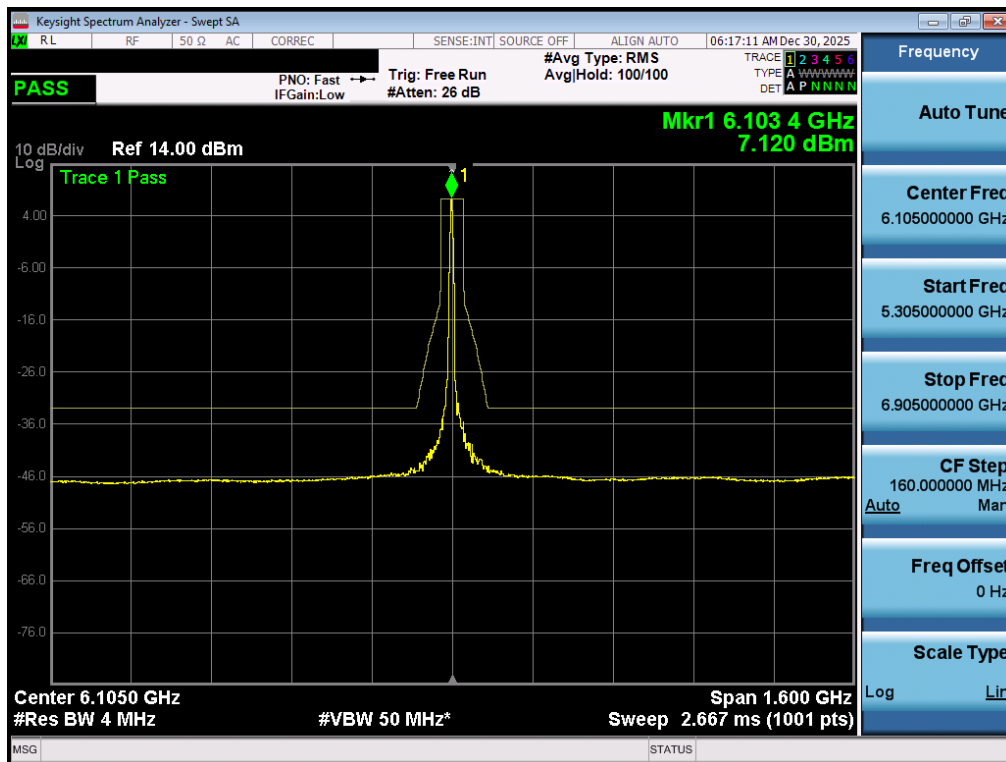


Plot 7-126. In Band Emissions Plot MIMO ANT1 (320MHz 802.11be (26 Tones) (UNII Band 5) – Ch. 31) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 114 of 159

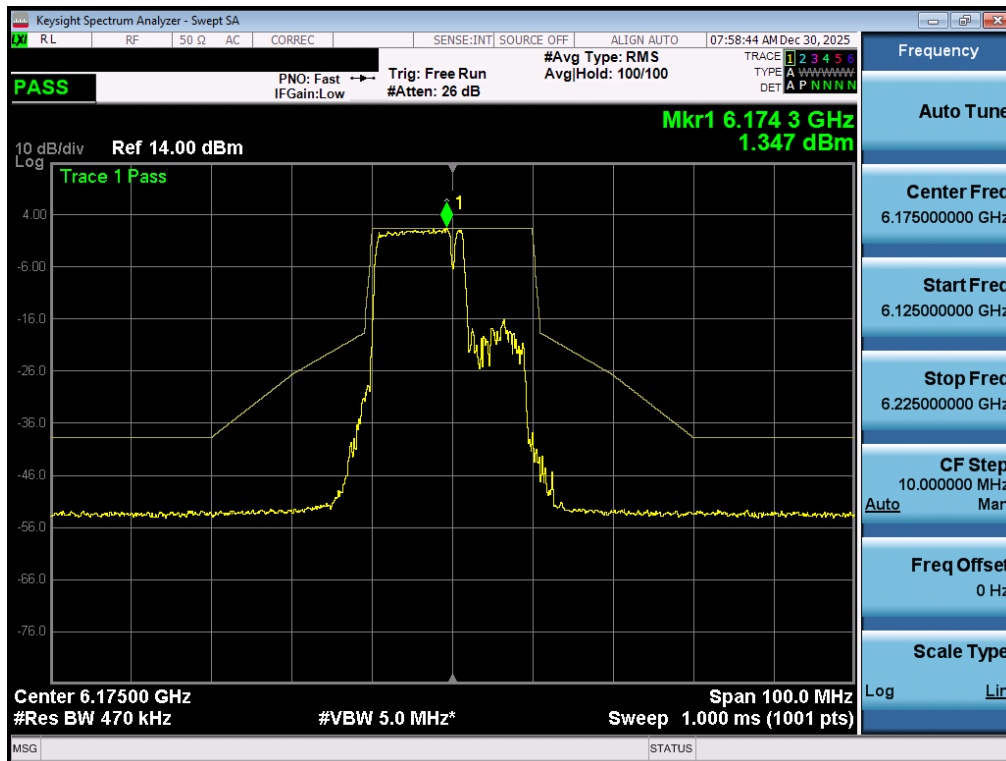


Plot 7-127. In Band Emissions Plot MIMO ANT1 (20MHz 802.11be (106+26 Tones) (UNII Band 5) – Ch. 45) - SP

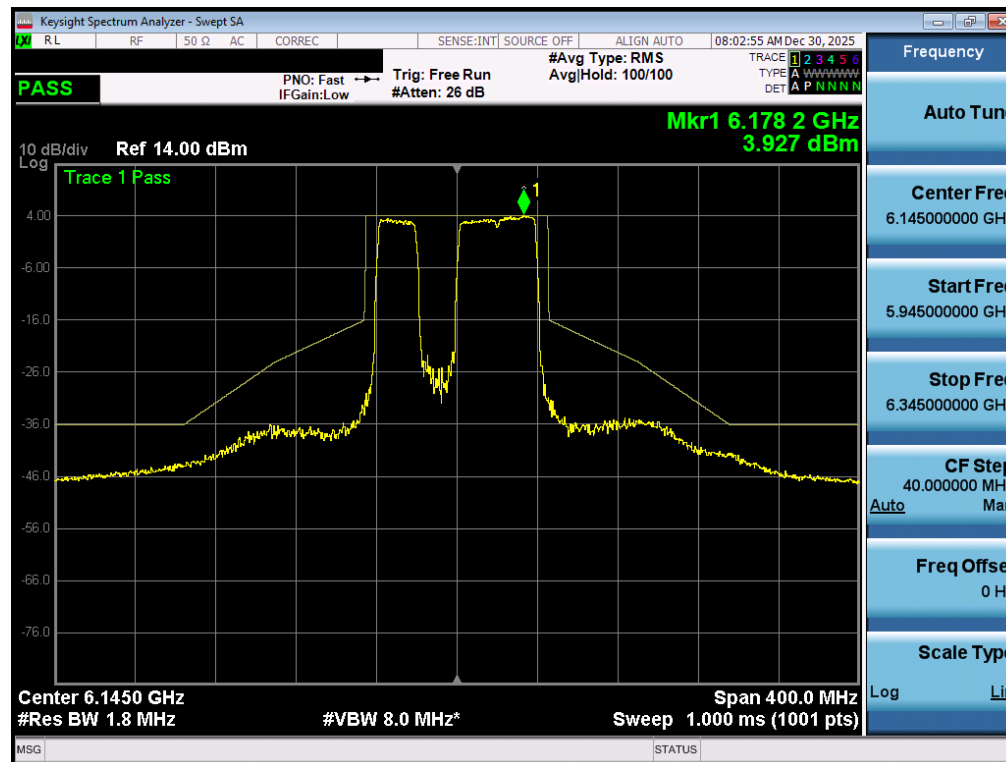


Plot 7-128. In Band Emissions Plot MIMO ANT1 (80MHz 802.11be (484+242 Tones) (UNII Band 5) – Ch. 39) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 115 of 159

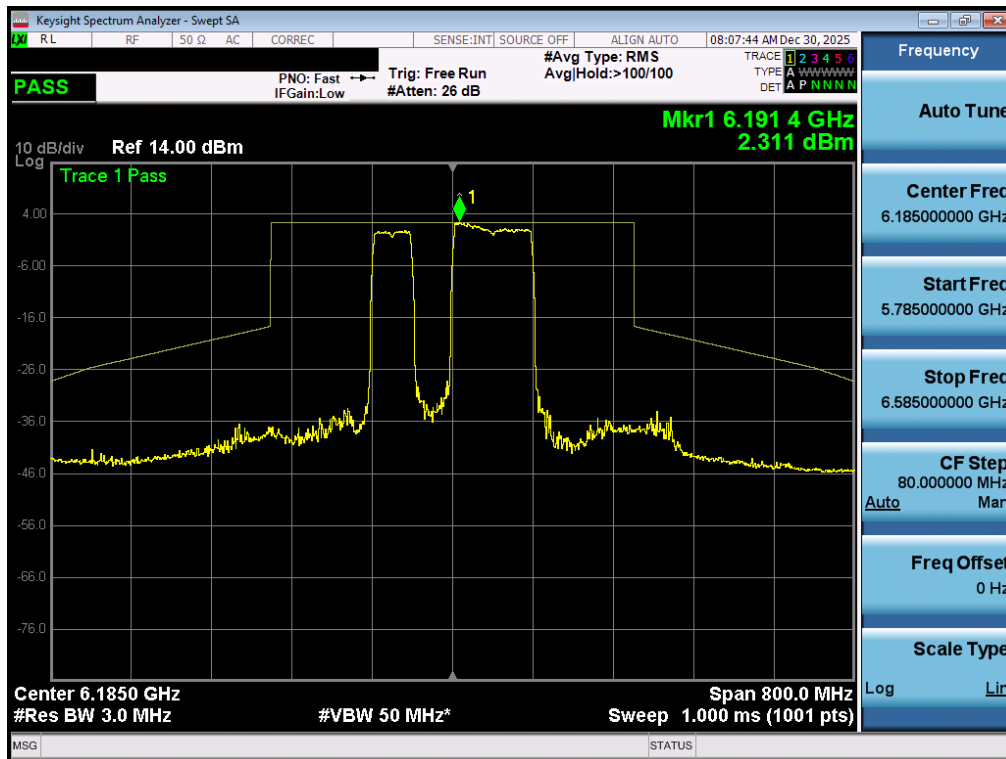


Plot 7-129. In Band Emissions Plot MIMO ANT1 (160MHz 802.11be (996+484 Tones) (UNII Band 5) – Ch. 47) – SP

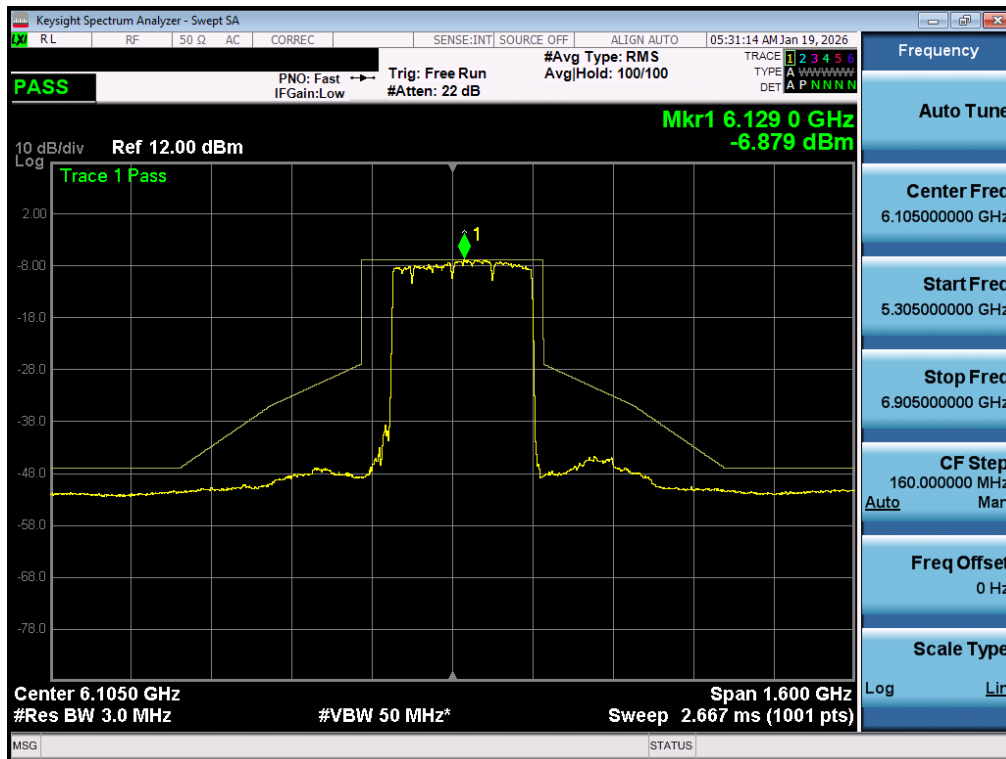


Plot 7-130. In Band Emissions Plot MIMO ANT1 (320MHz 802.11be (3x996+484 Tones) (UNII Band 5) – Ch. 31) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 116 of 159

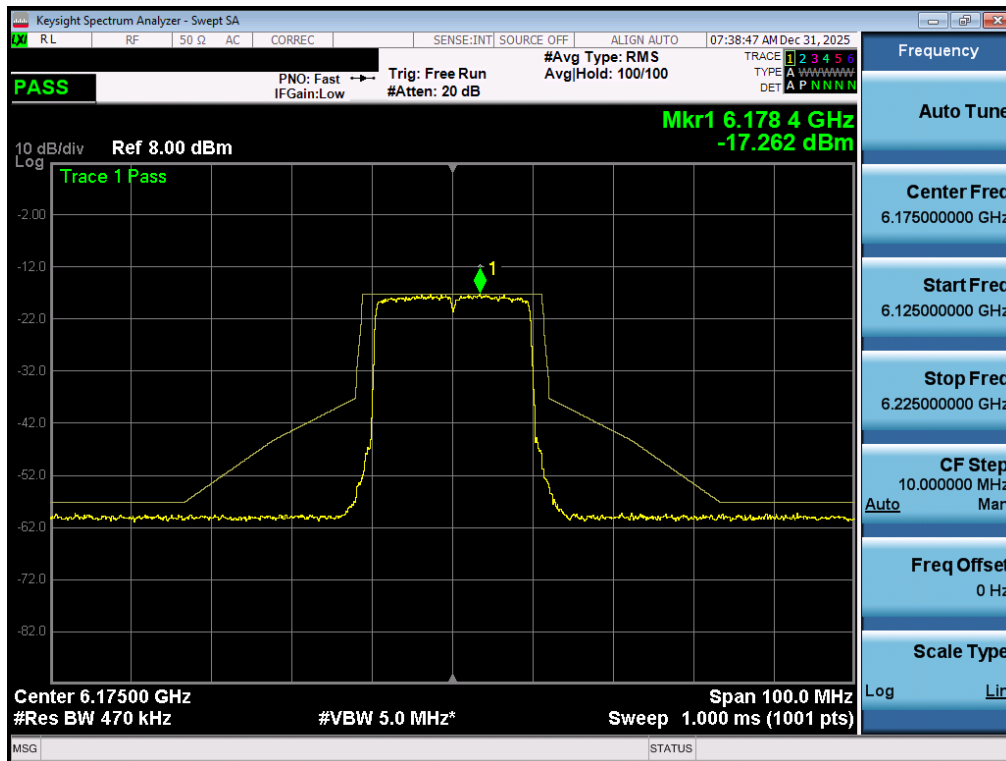


Plot 7-131. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

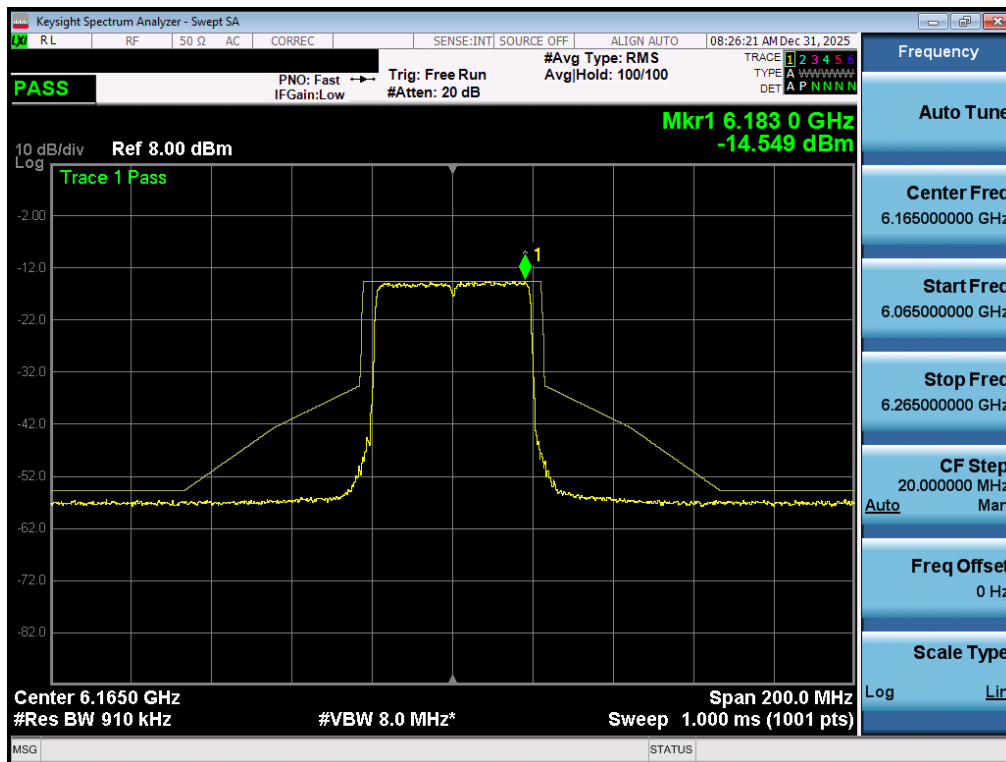


Plot 7-132. In Band Emissions Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 117 of 159

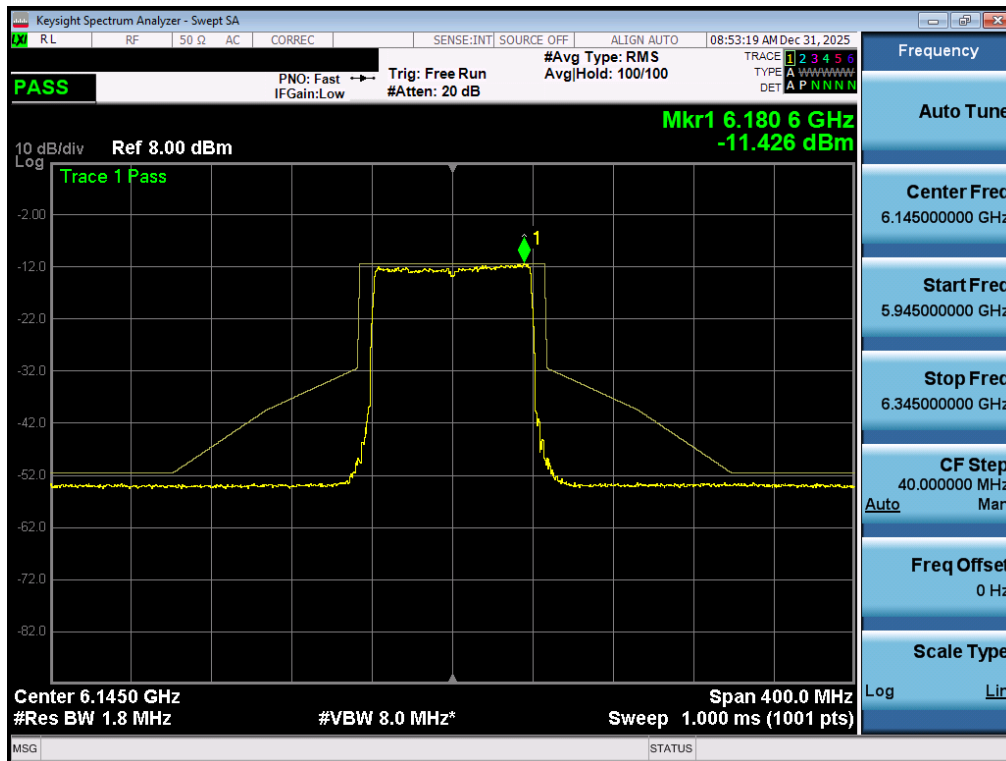


Plot 7-133. In Band Emissions Plot MIMO ANT1 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

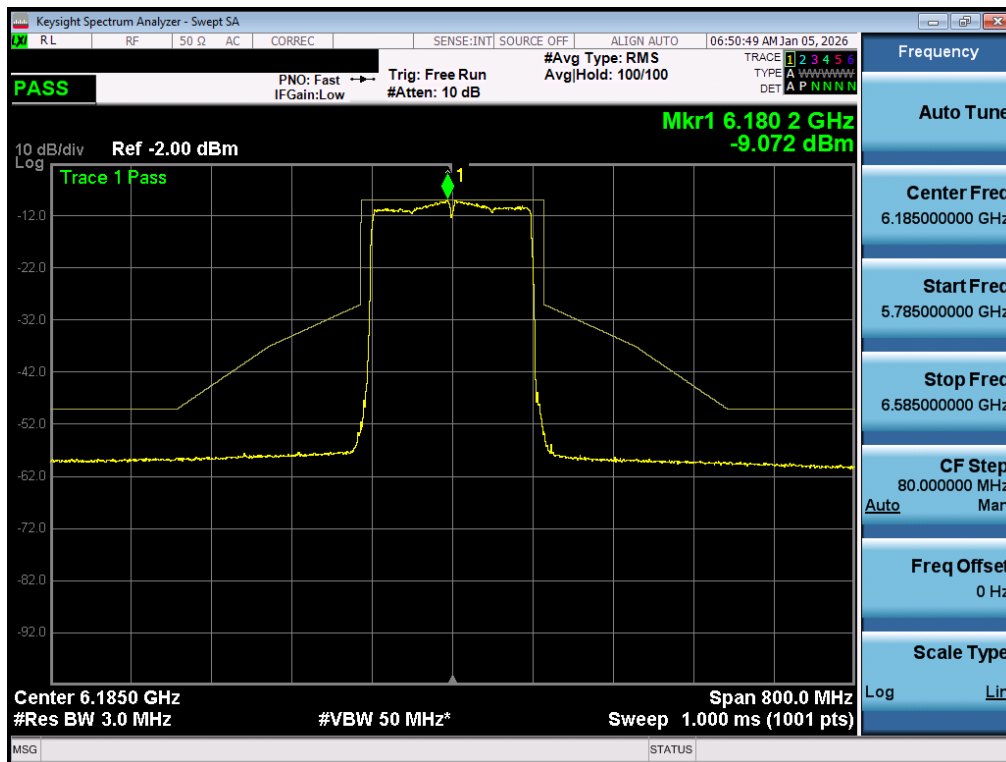


Plot 7-134. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 118 of 159

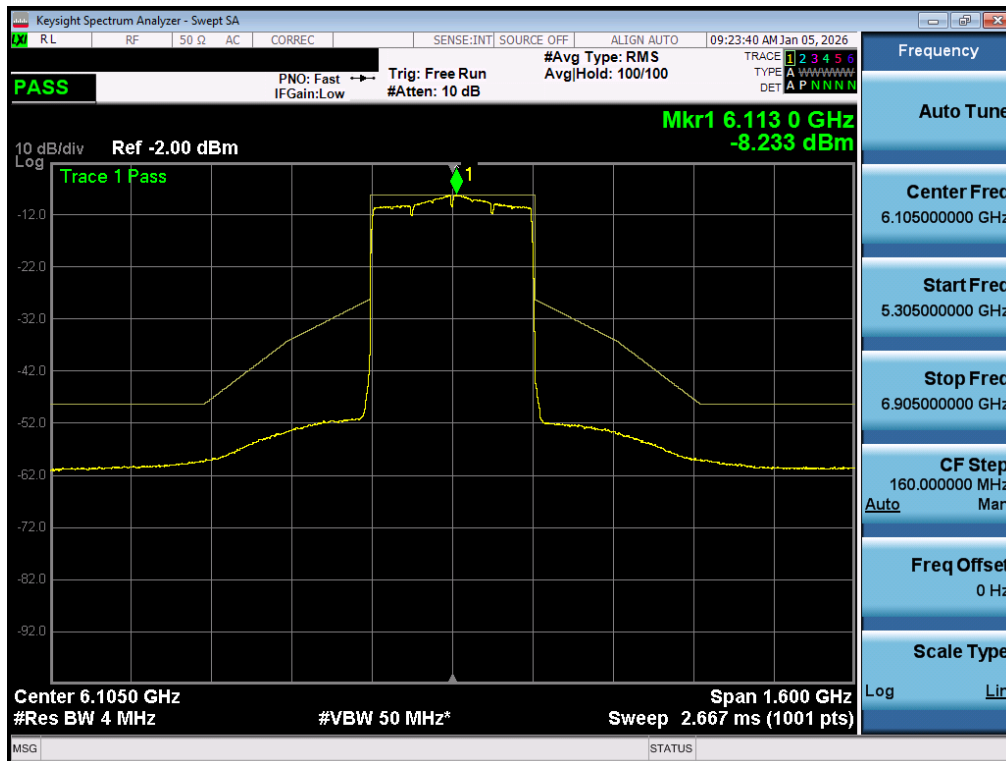


Plot 7-135. In Band Emissions Plot MIMO ANT1 (320MHz 802.11be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

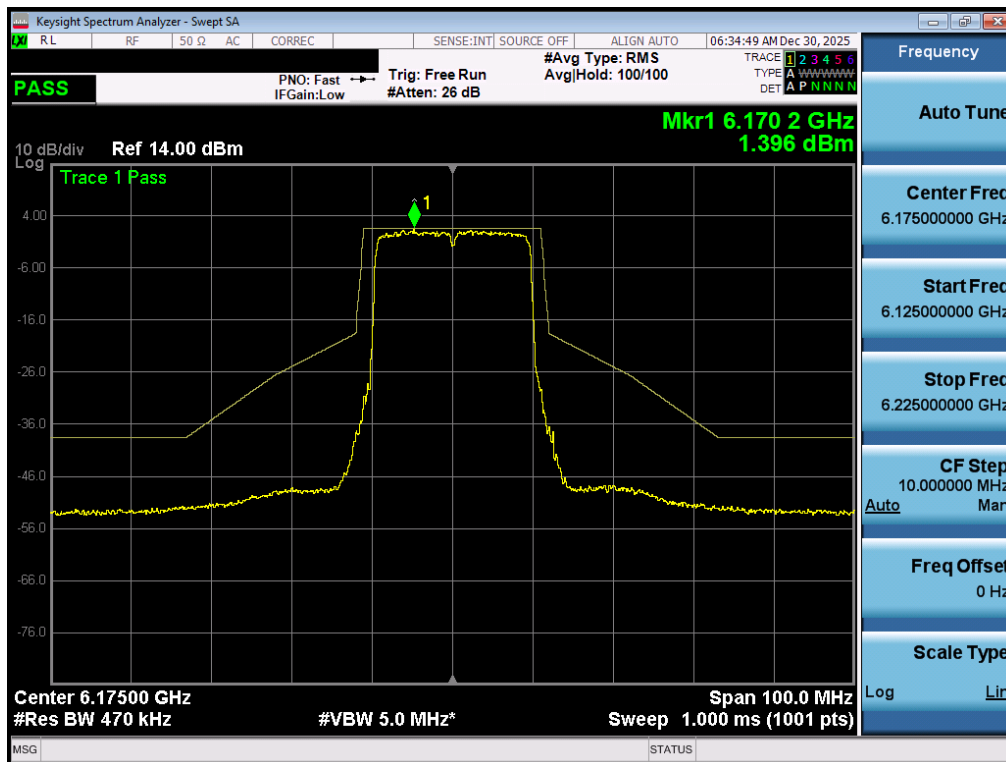


Plot 7-136. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 119 of 159

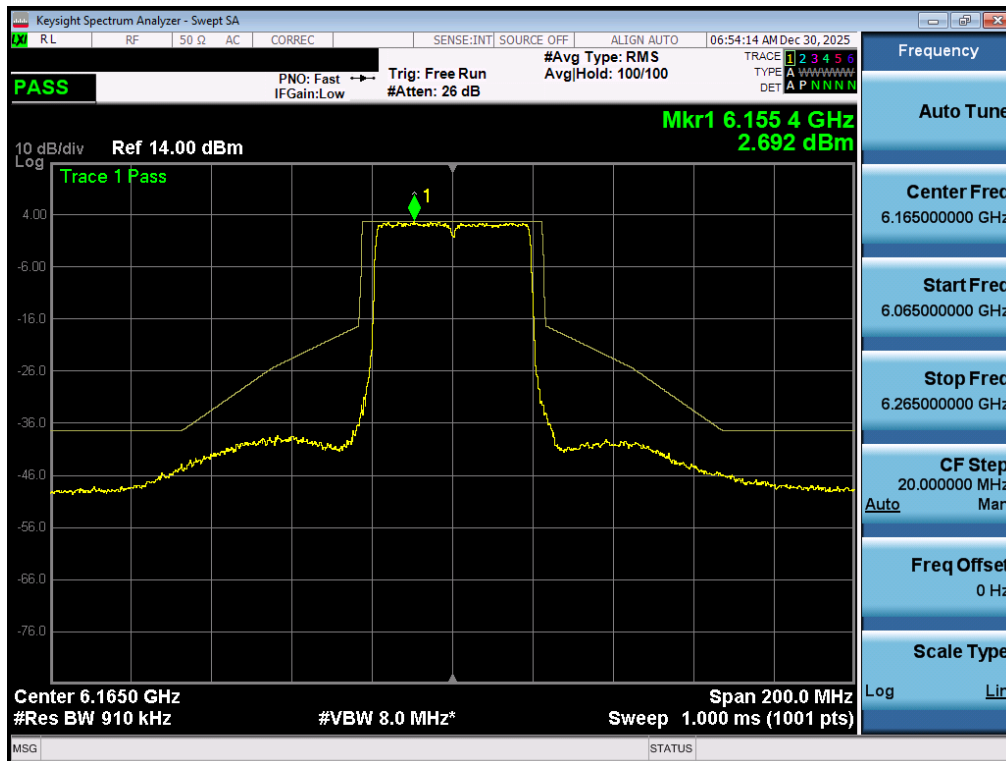


Plot 7-137. In Band Emissions Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) – SP

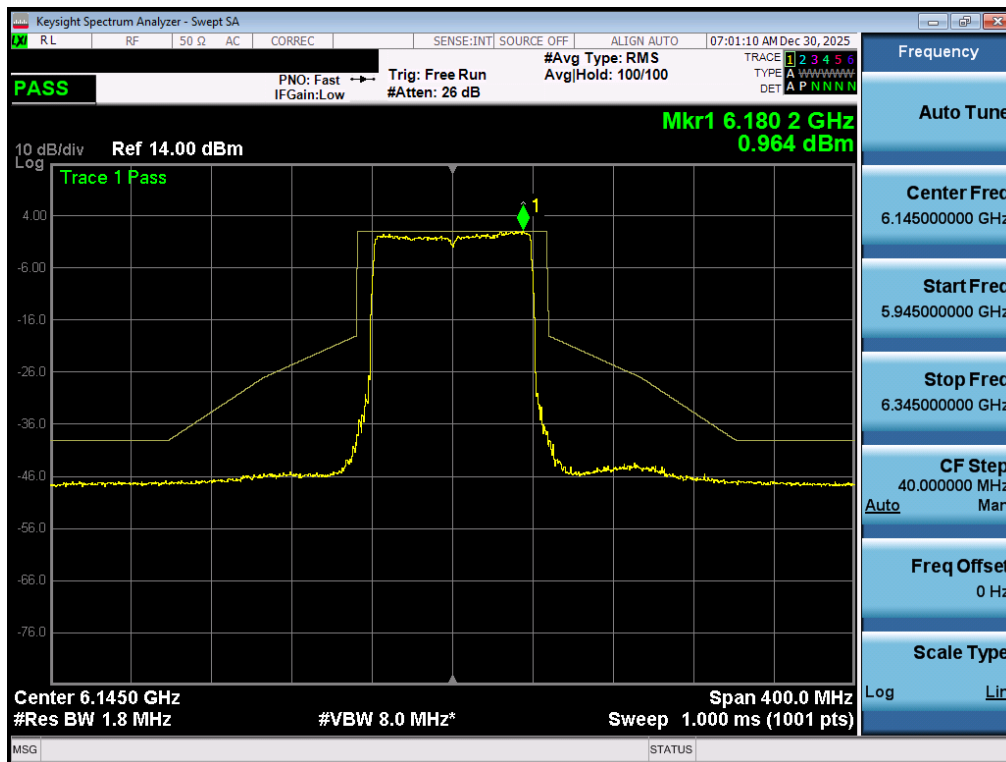


Plot 7-138. In Band Emissions Plot MIMO ANT1 8 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) – SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 120 of 159

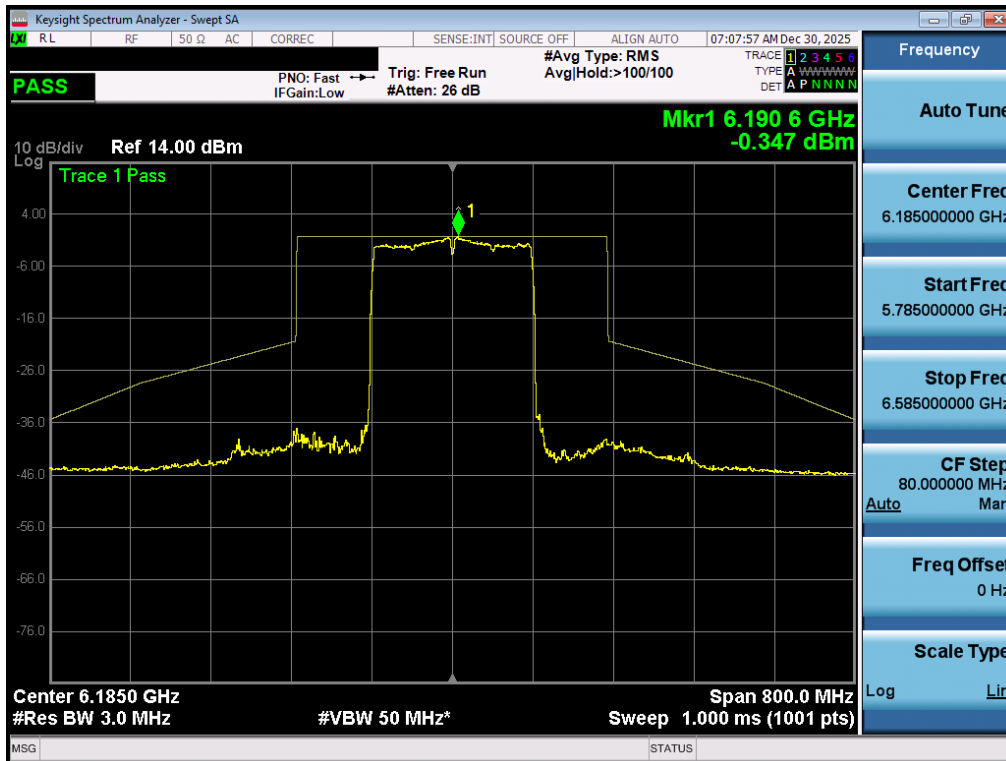


Plot 7-139. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - SP

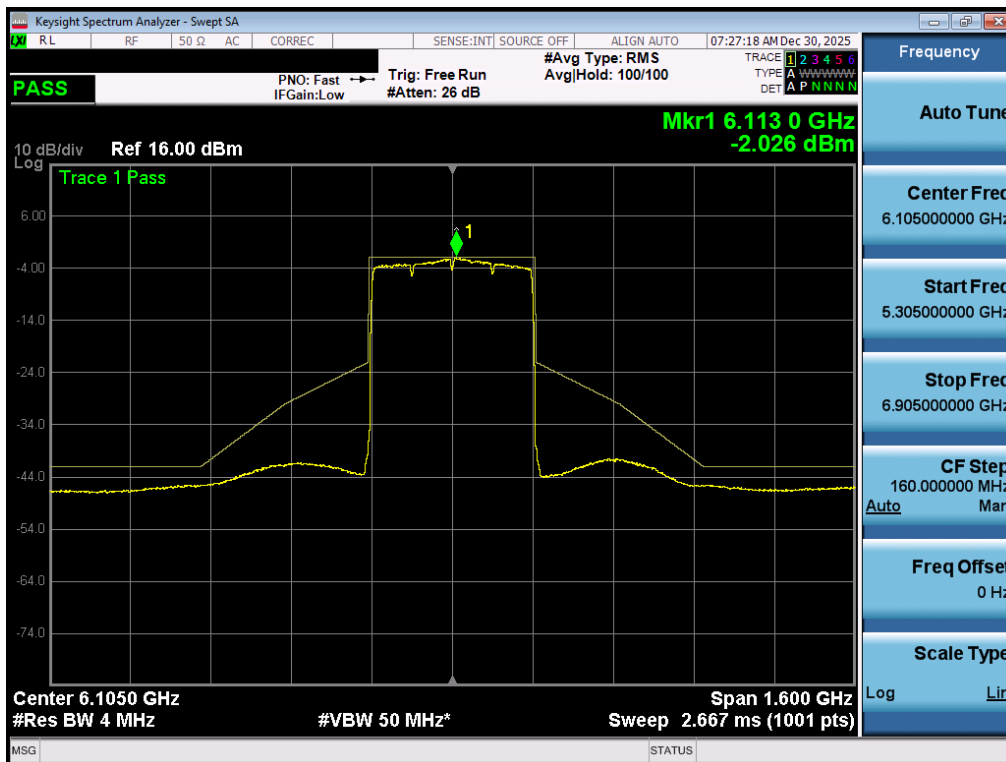


Plot 7-140. In Band Emissions Plot MIMO ANT1 (320MHz 802.11be (Full Tones) (UNII Band 5) – Ch. 31) – SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 121 of 159

7.5.2 MIMO Antenna-2 In-Band Emission Measurements

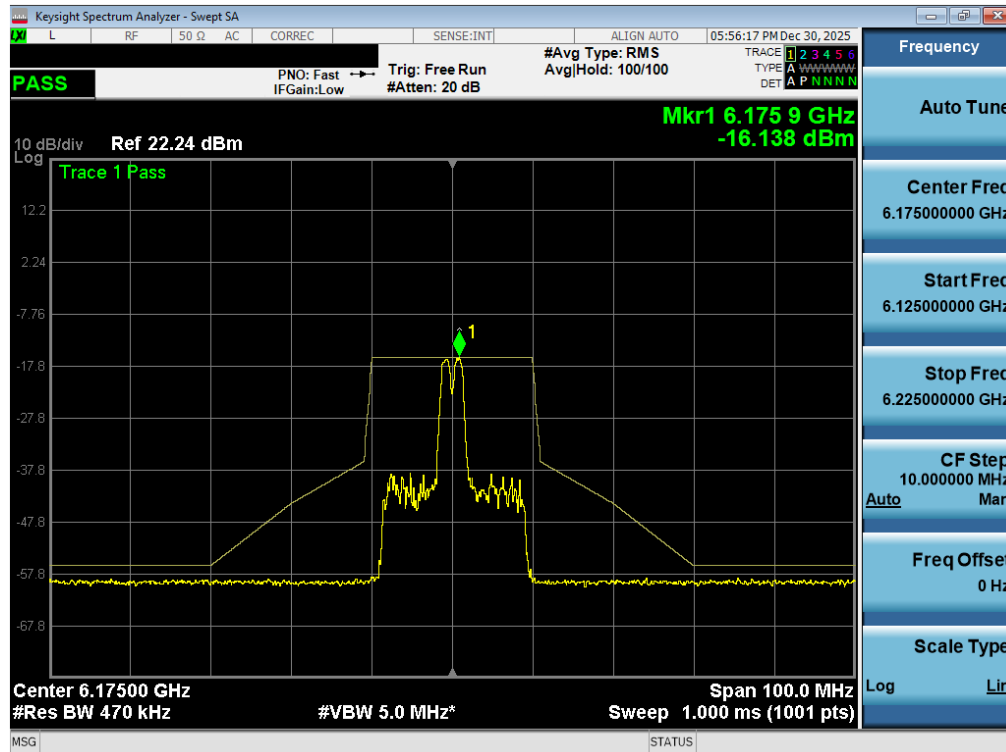


Plot 7-141. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

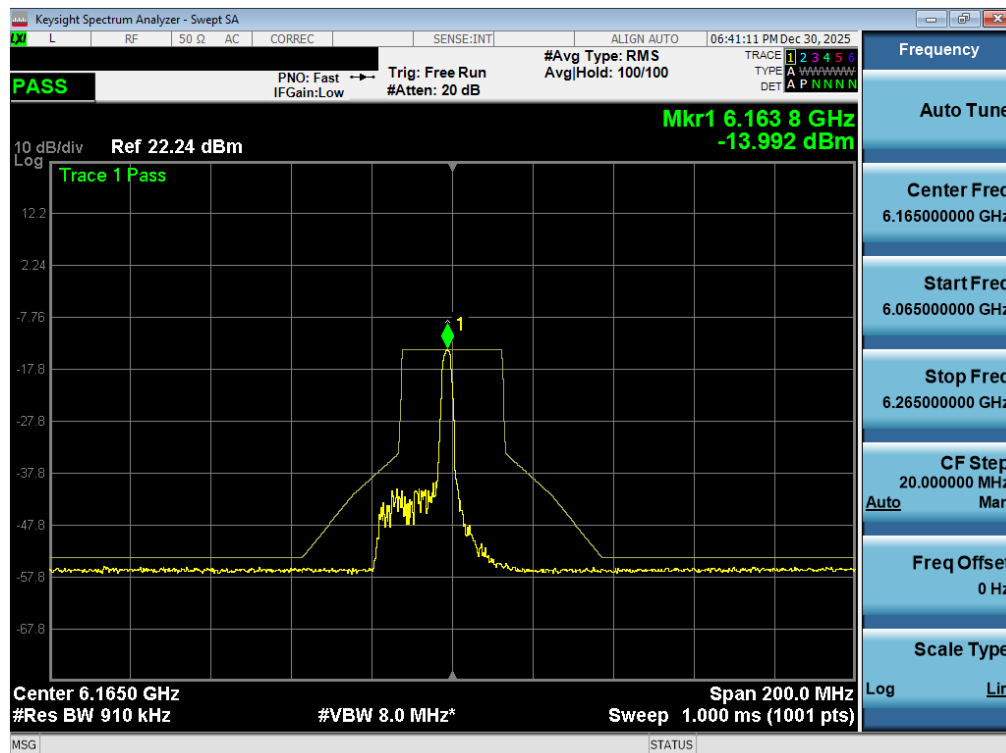


Plot 7-142. In Band Emissions Plot MIMO ANT2 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 122 of 159

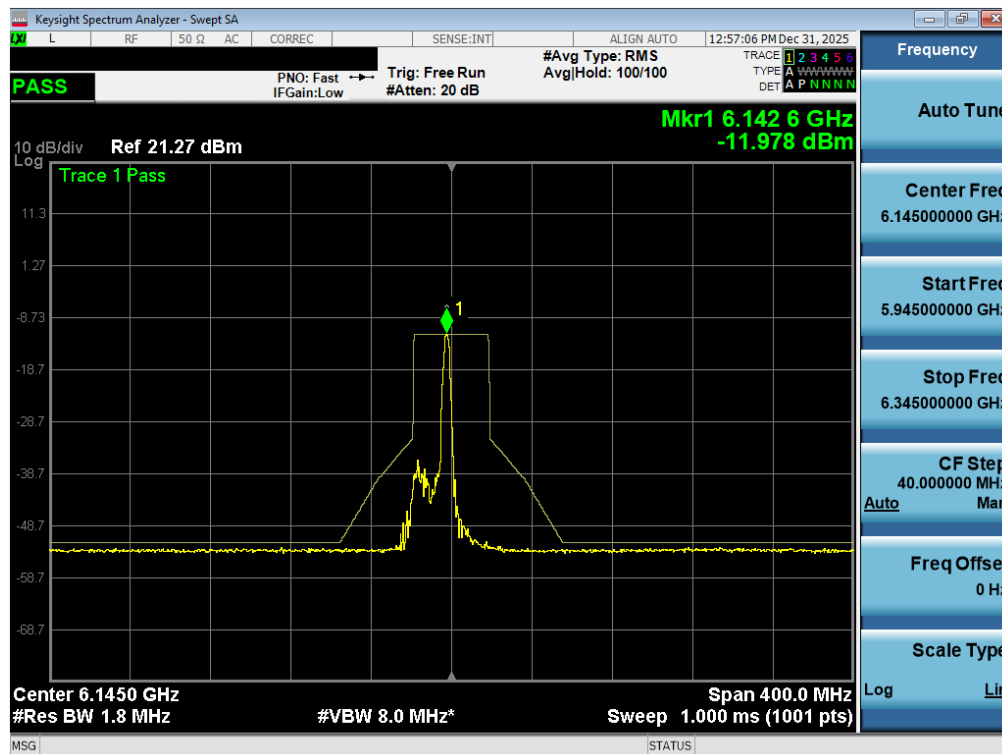


Plot 7-143. In Band Emissions Plot MIMO ANT2 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

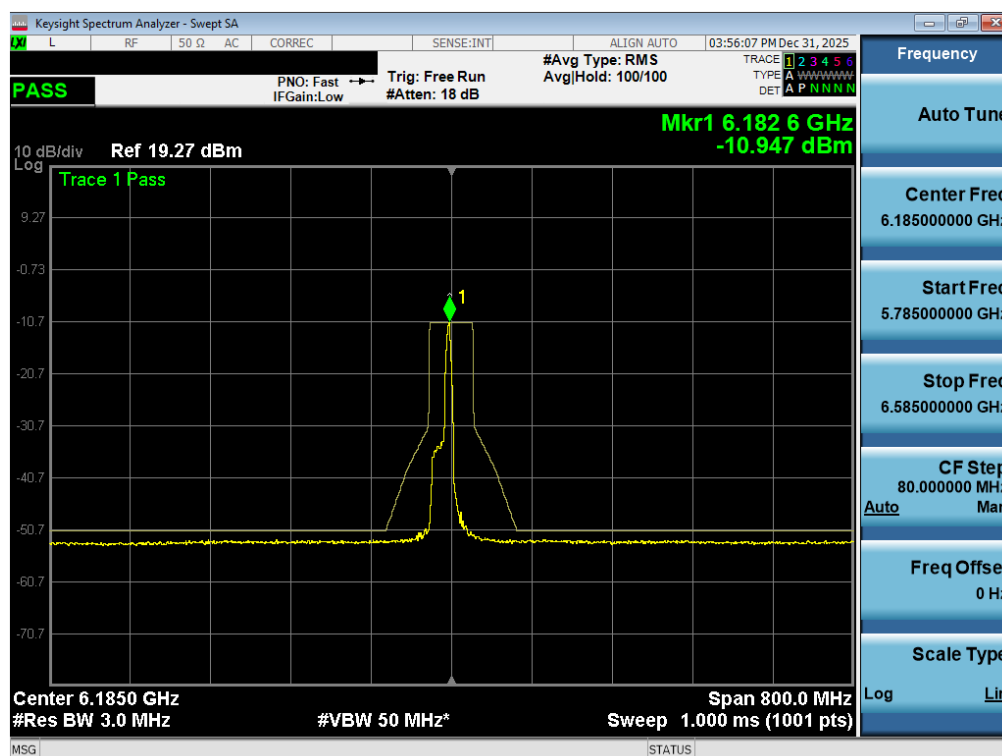


Plot 7-144. In Band Emissions Plot MIMO ANT2 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 123 of 159

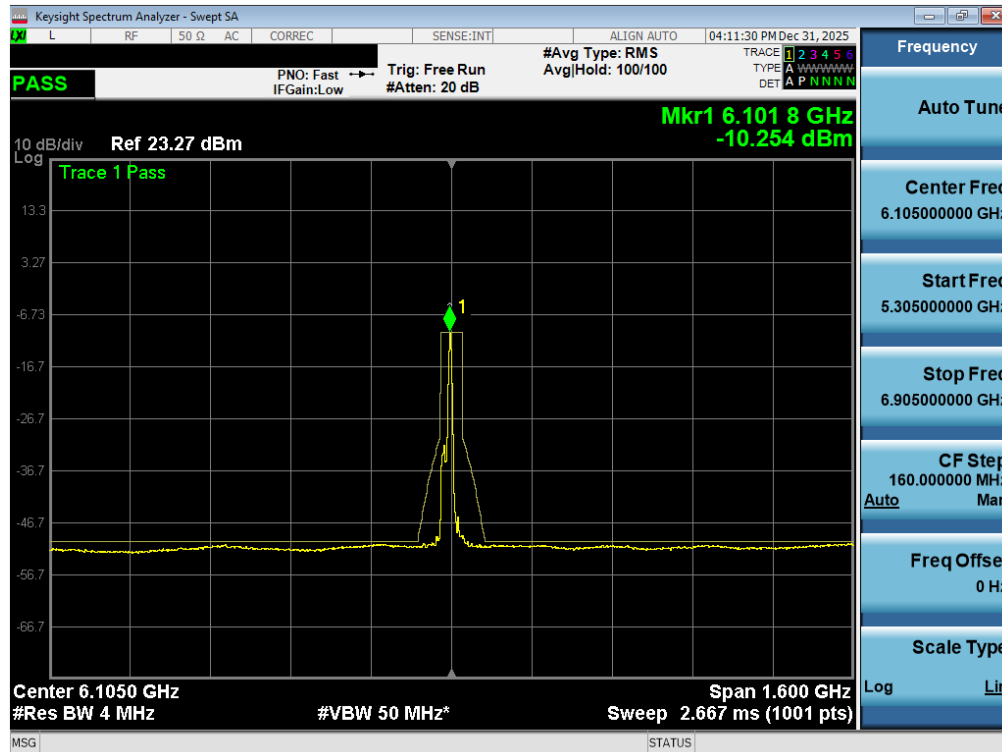


Plot 7-145. In Band Emissions Plot MIMO ANT2 (320MHz 802.11be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

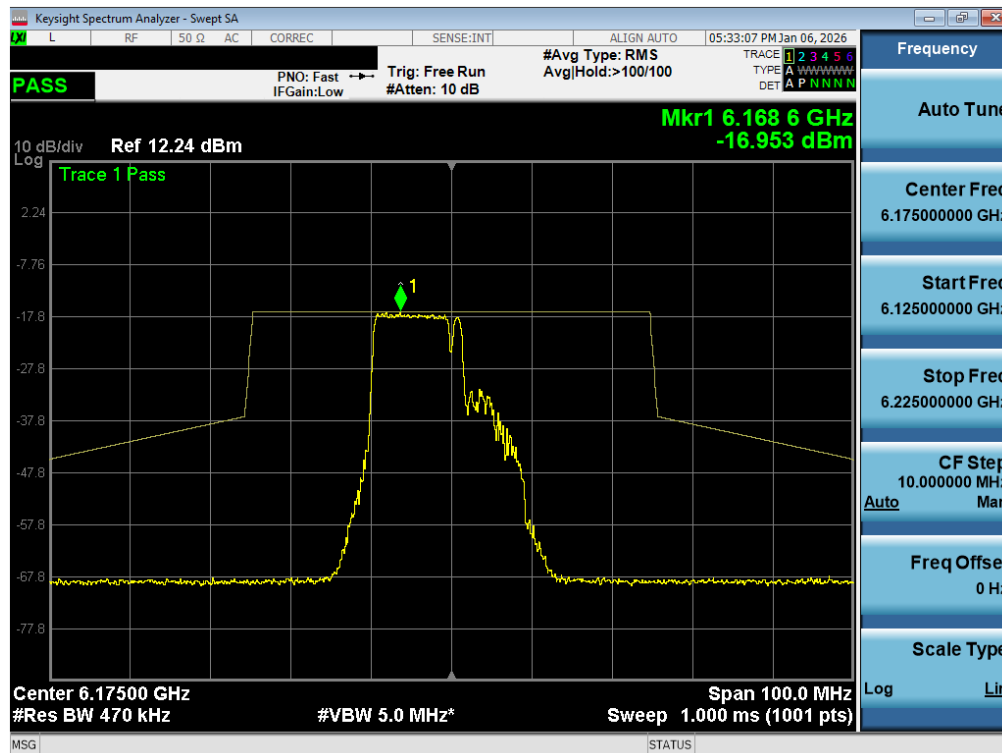


Plot 7-146. In Band Emissions Plot MIMO ANT2 (20MHz 802.11be (106+26 Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 124 of 159

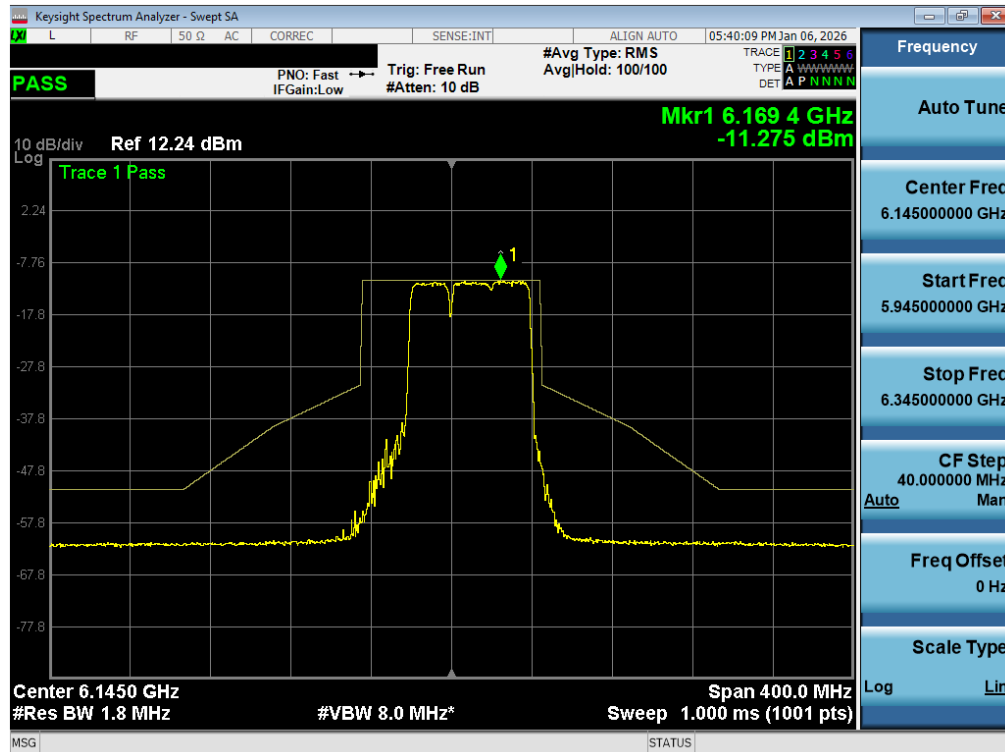


Plot 7-147. In Band Emissions Plot MIMO ANT2 (80MHz 802.11be (484+242 Tones) (UNII Band 5) – Ch. 39) - LPI

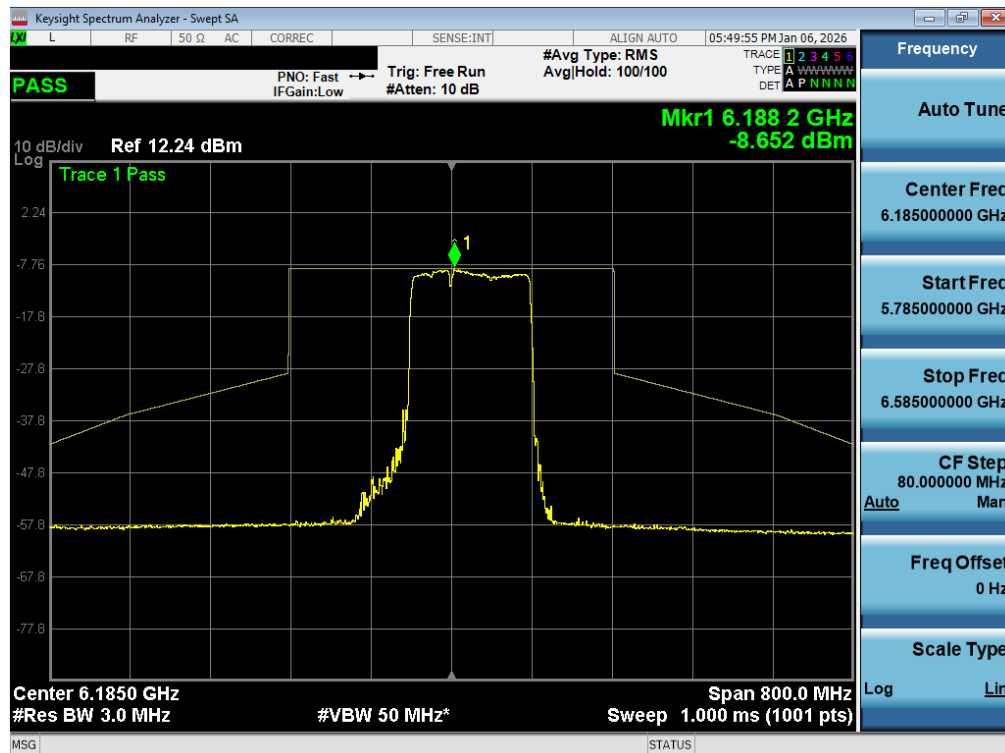


Plot 7-148. In Band Emissions Plot MIMO ANT2 (160MHz 802.11be (996+484 Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 125 of 159

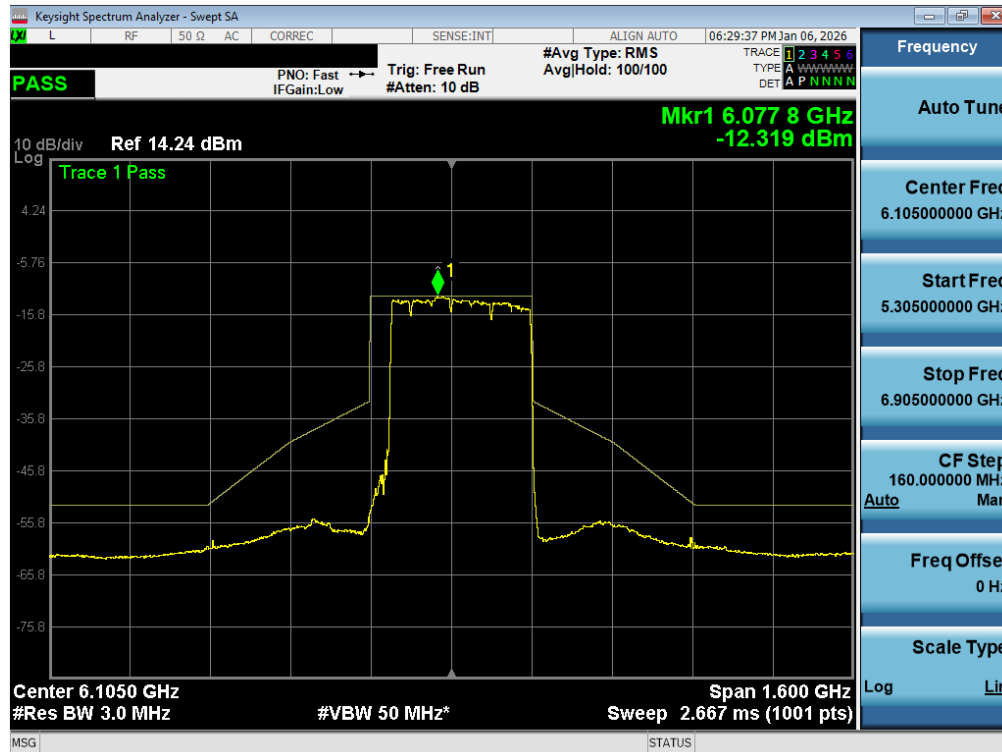


Plot 7-149. In Band Emissions Plot MIMO ANT2 (320MHz 802.11be (3*996+484 Tones) (UNII Band 5) – Ch. 31) LPI

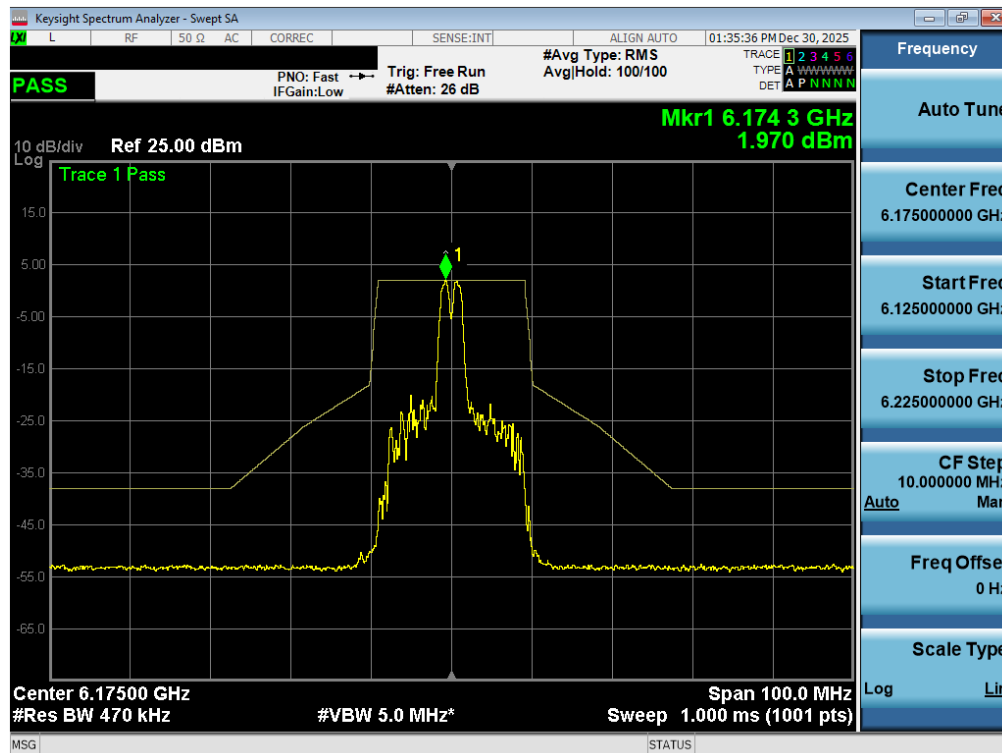


Plot 7-150. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 126 of 159

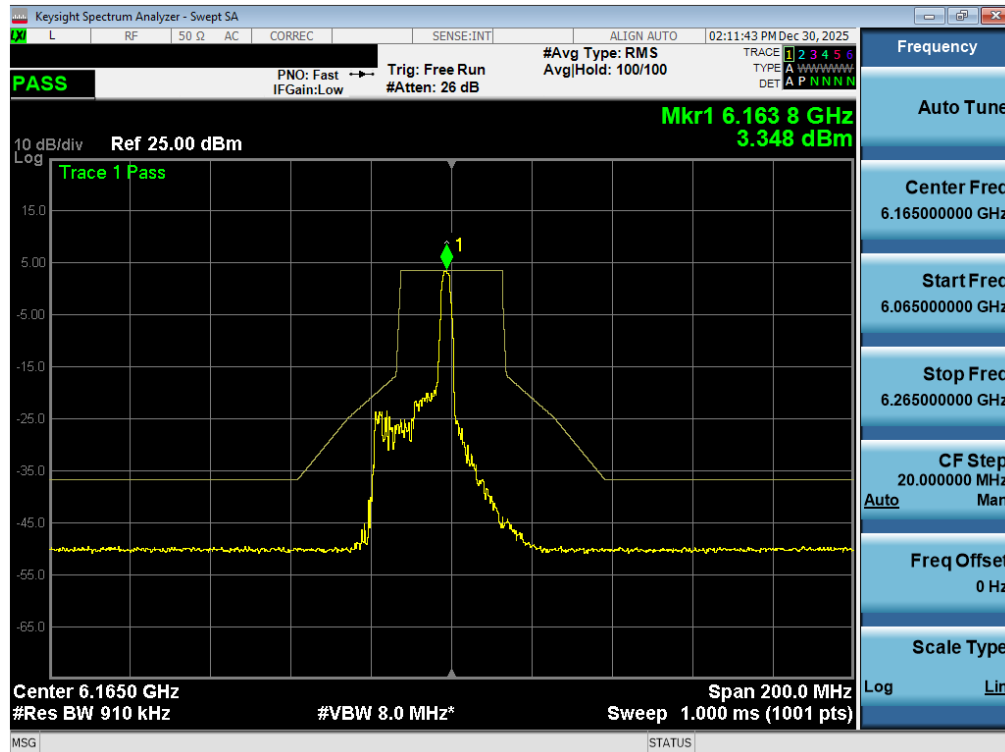


Plot 7-151. In Band Emissions Plot MIMO ANT2 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - SP

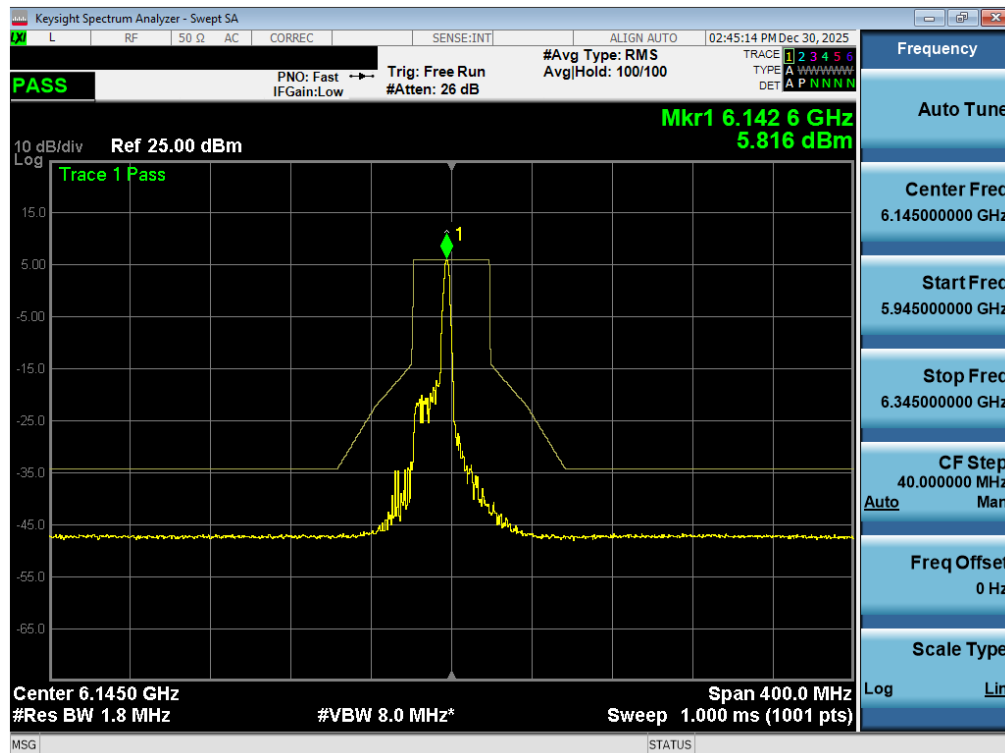


Plot 7-152. In Band Emissions Plot MIMO ANT2 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 127 of 159

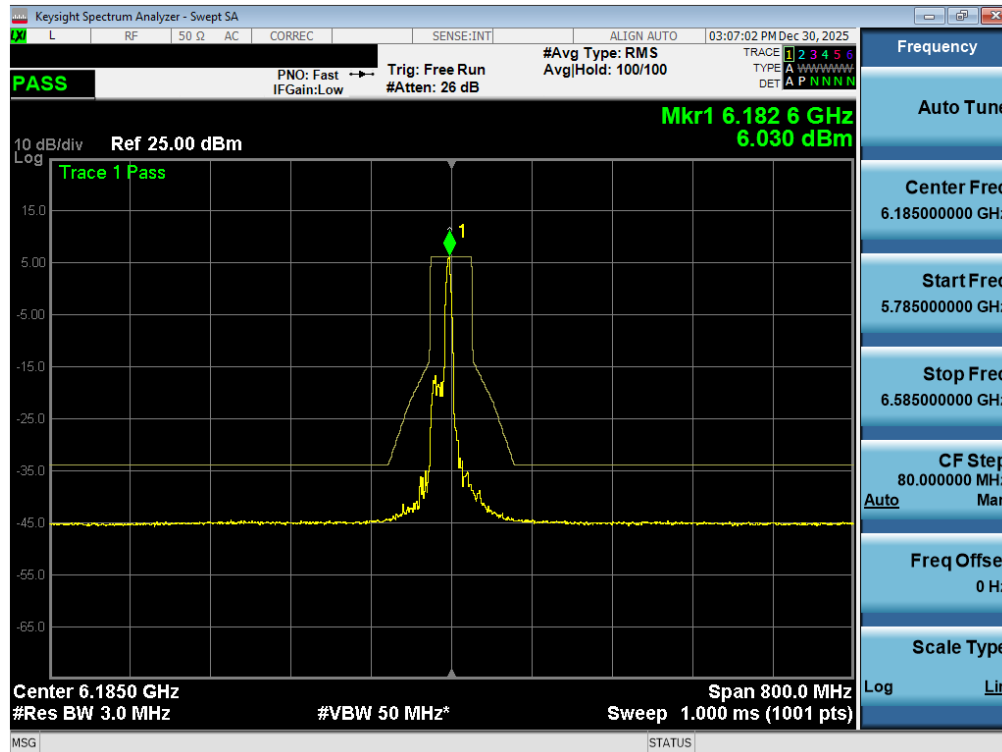


Plot 7-153. In Band Emissions Plot MIMO ANT2 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - SP

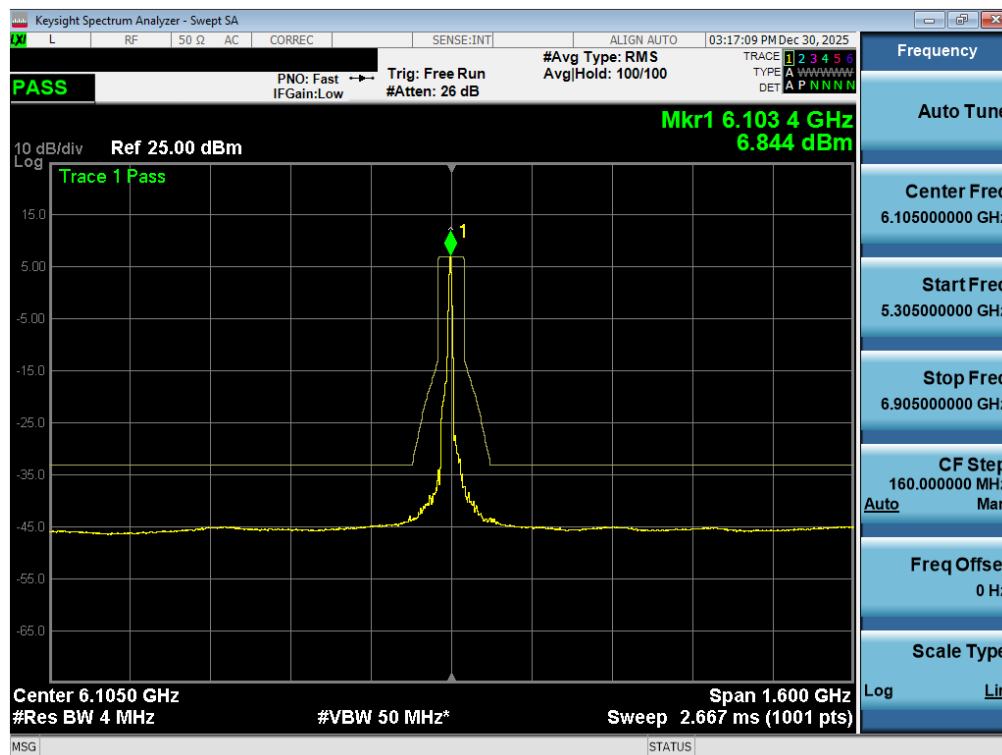


Plot 7-154. In Band Emissions Plot MIMO ANT2 (320MHz 802.11be (26 Tones) (UNII Band 5) – Ch. 31) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 128 of 159

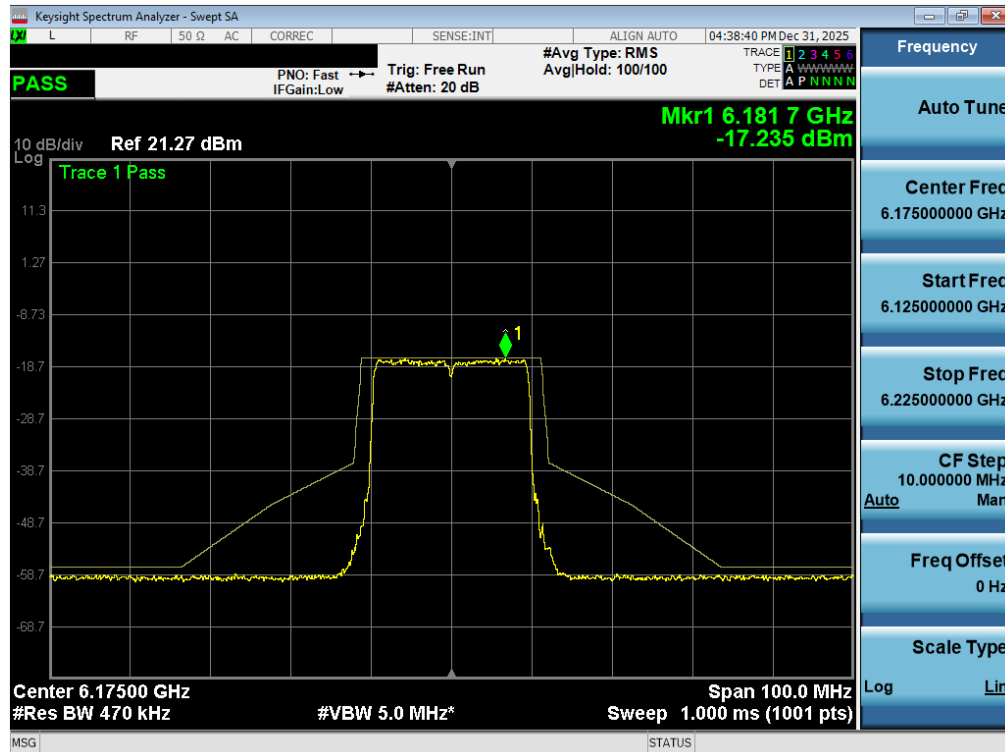


Plot 7-155. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

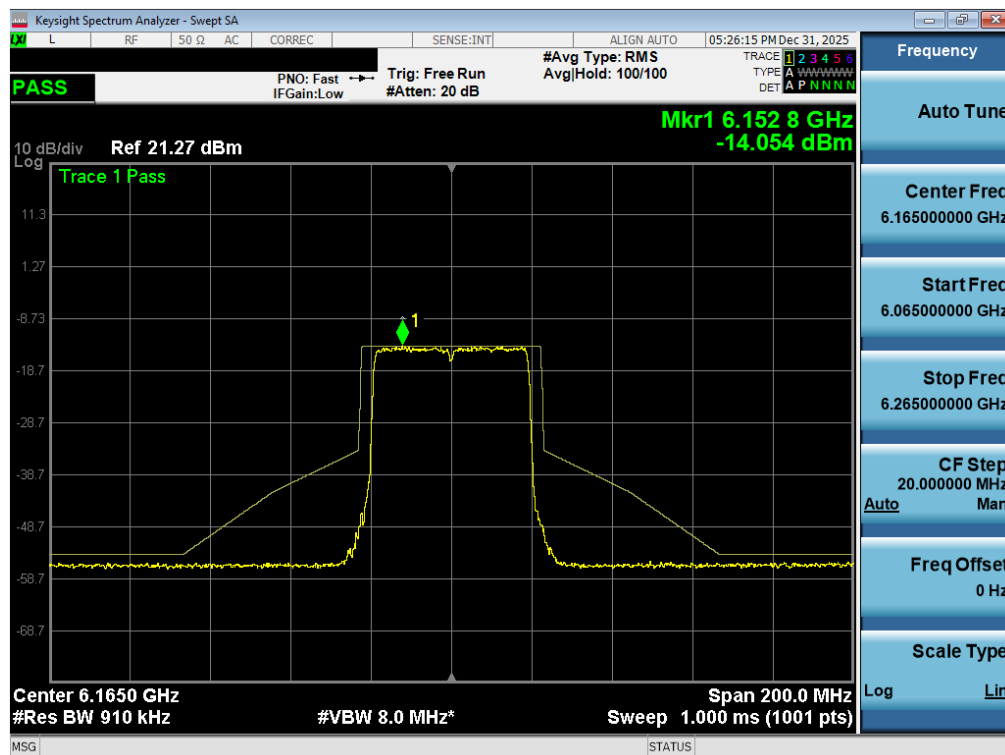


Plot 7-156. In Band Emissions Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 129 of 159

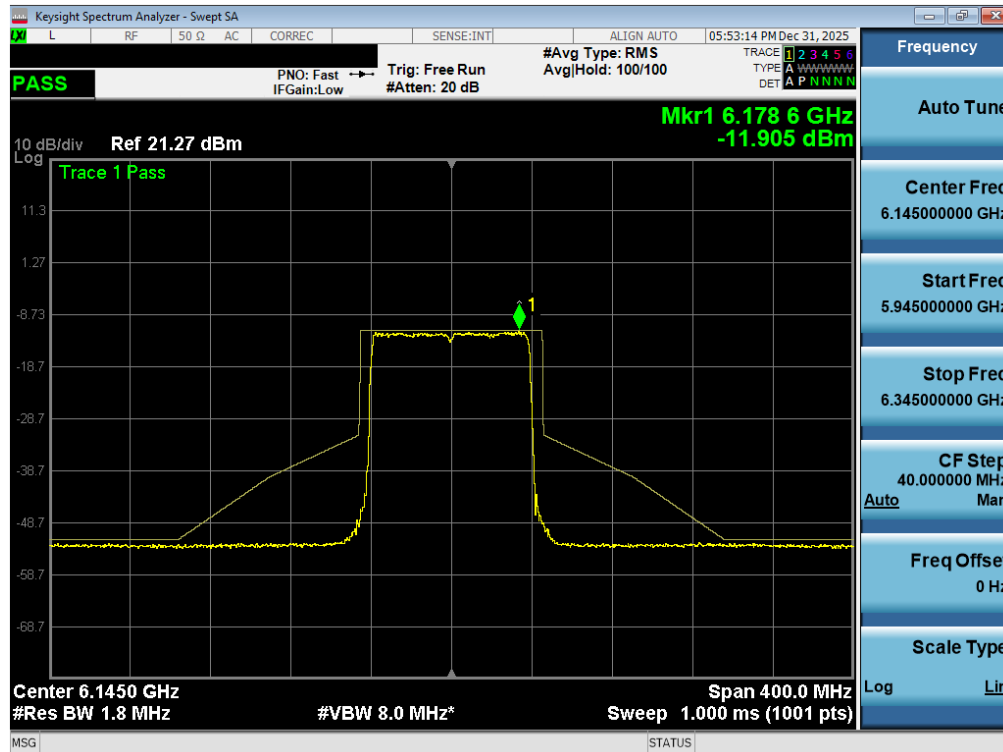


Plot 7-157. In Band Emissions Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

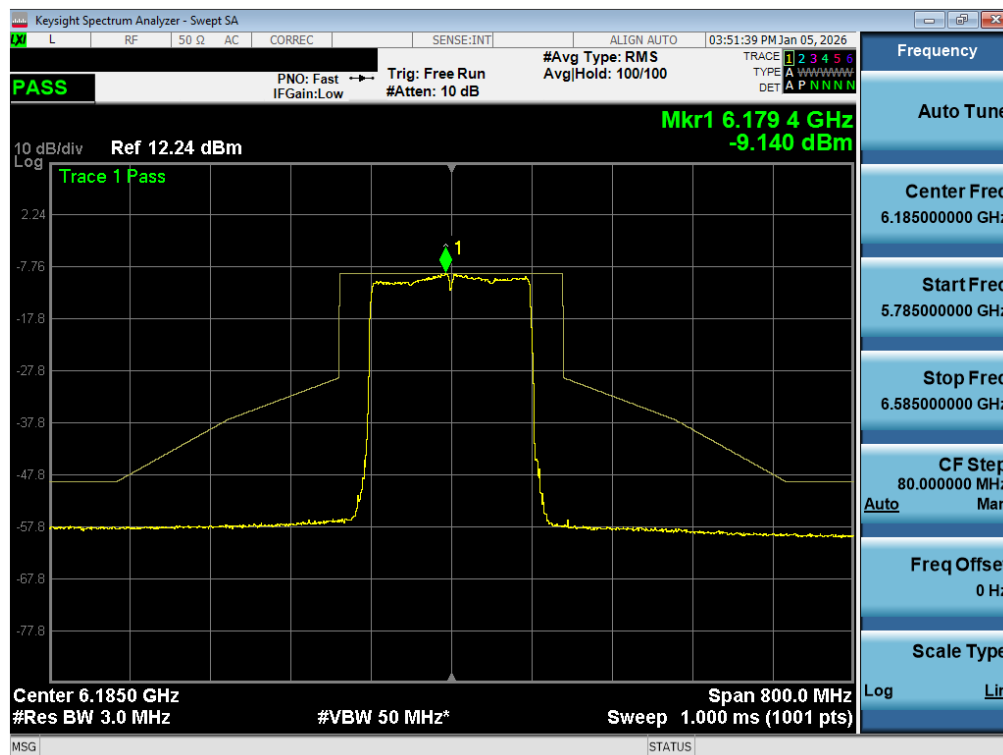


Plot 7-158. In Band Emissions Plot MIMO ANT2 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 130 of 159

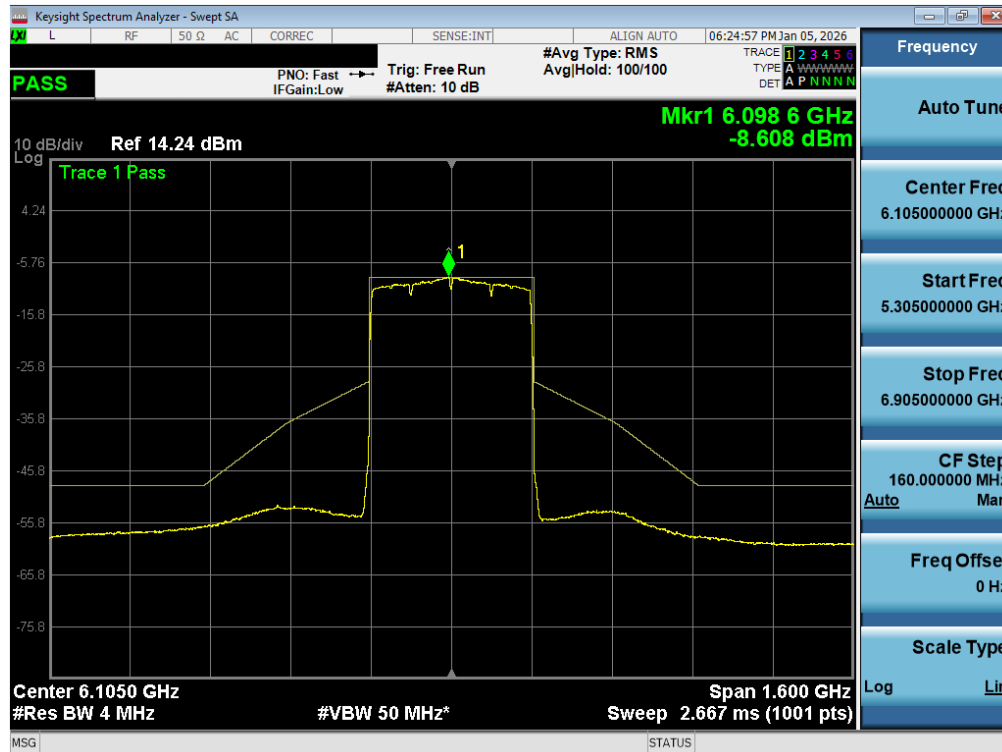


Plot 7-159. In Band Emissions Plot MIMO ANT2 (320MHz 802.11be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

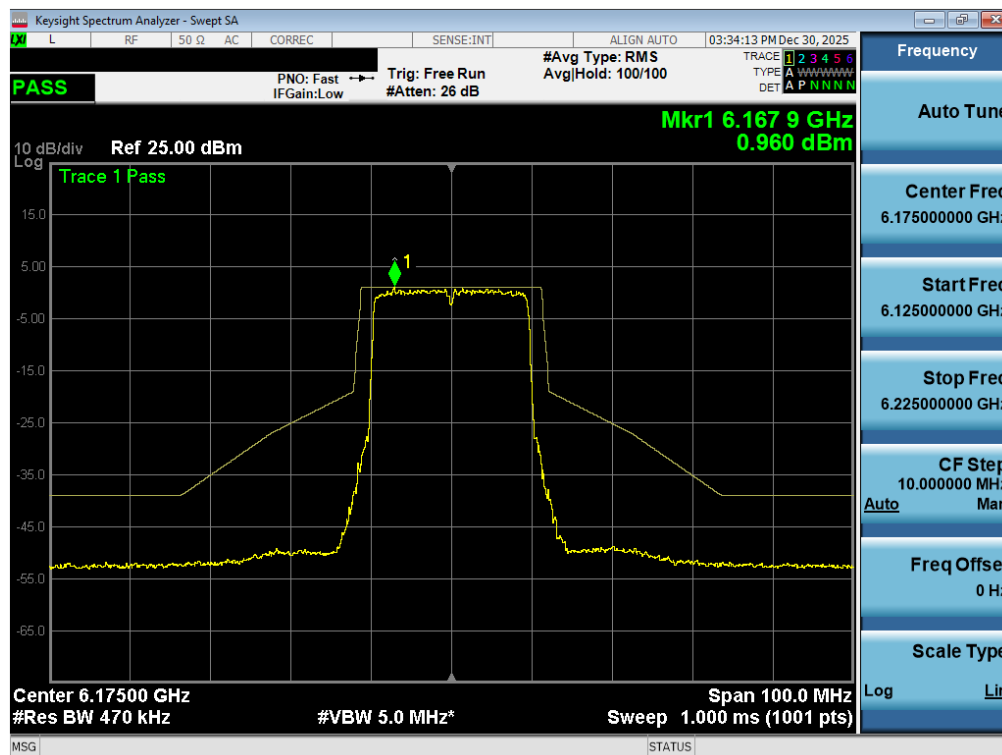


Plot 7-160. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 131 of 159

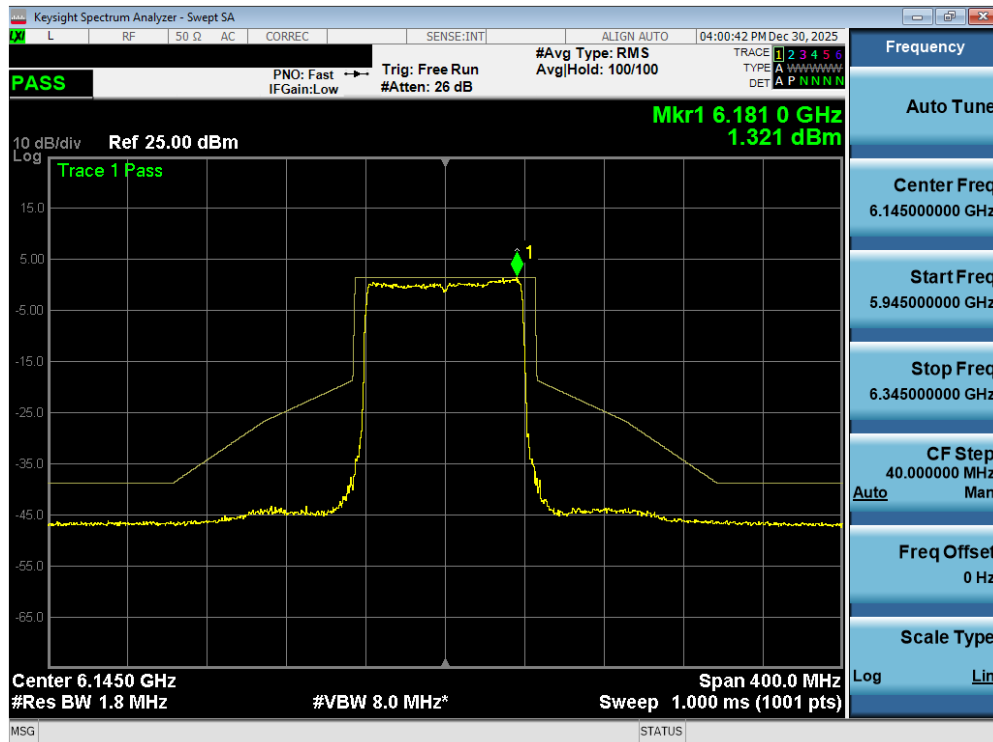


Plot 7-161. In Band Emissions Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) - Ch. 43) - SP

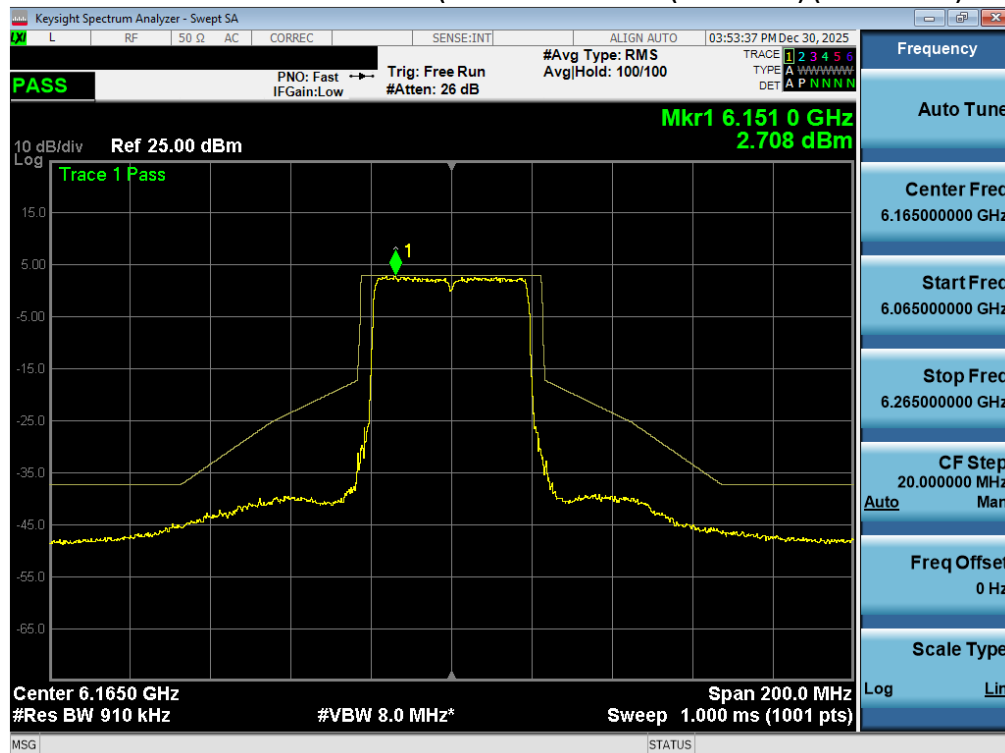


Plot 7-162. In Band Emissions Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) - Ch. 39) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 132 of 159

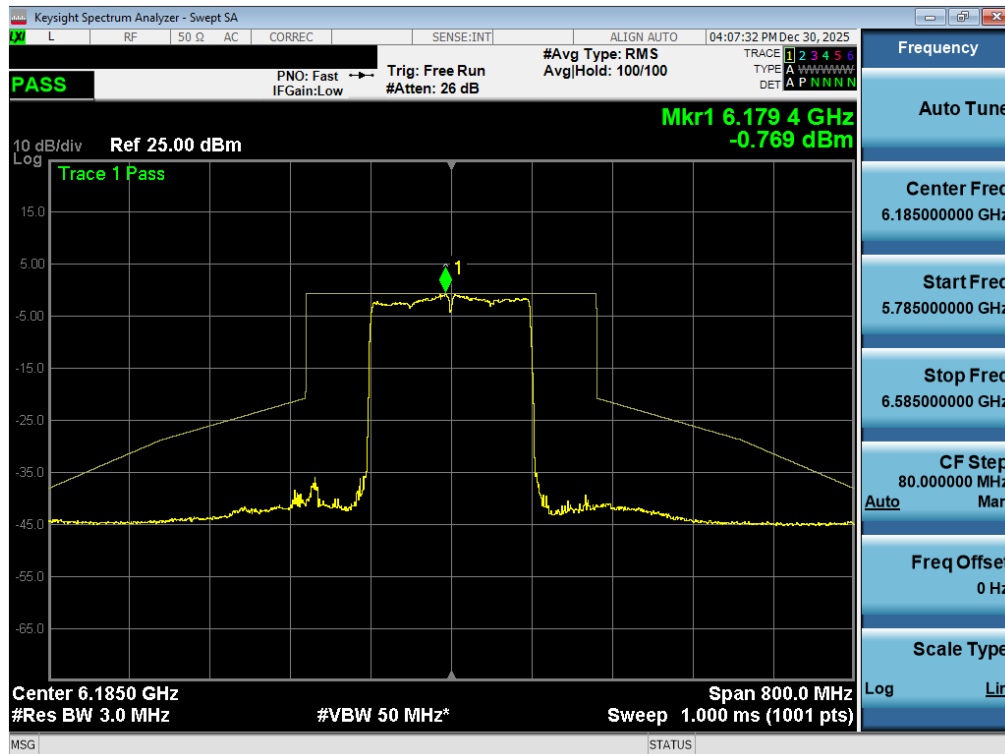


Plot 7-163. In Band Emissions Plot MIMO ANT2 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - SP

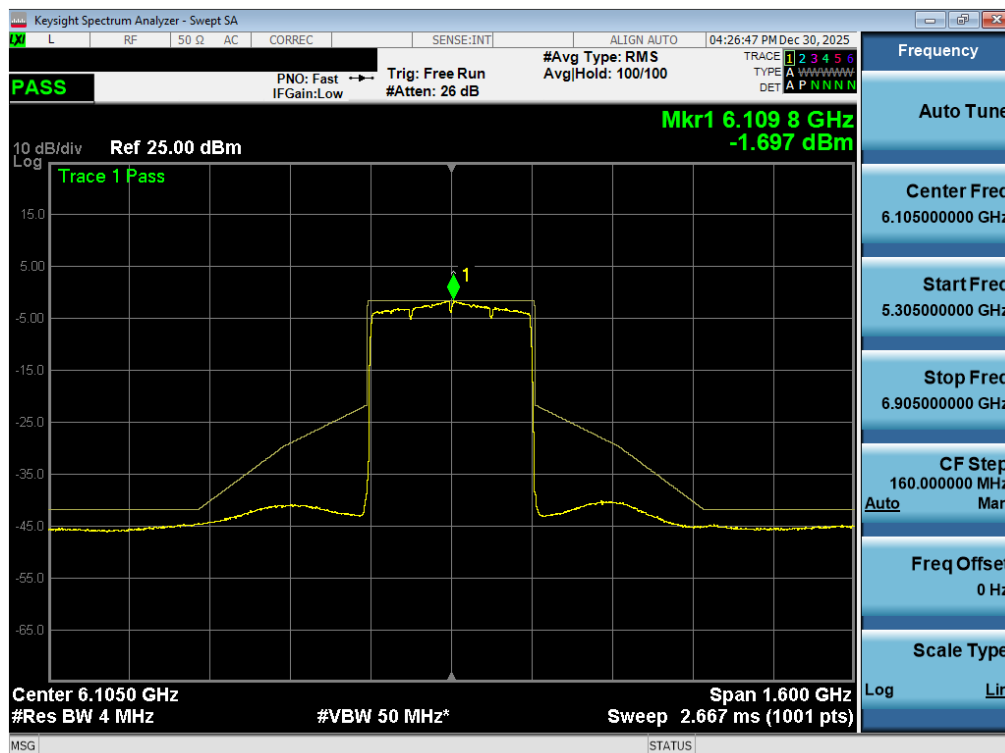


Plot 7-164. In Band Emissions Plot MIMO ANT2 (320MHz 802.11be (Full Tones) (UNII Band 5) – Ch. 31) - SP

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 133 of 159

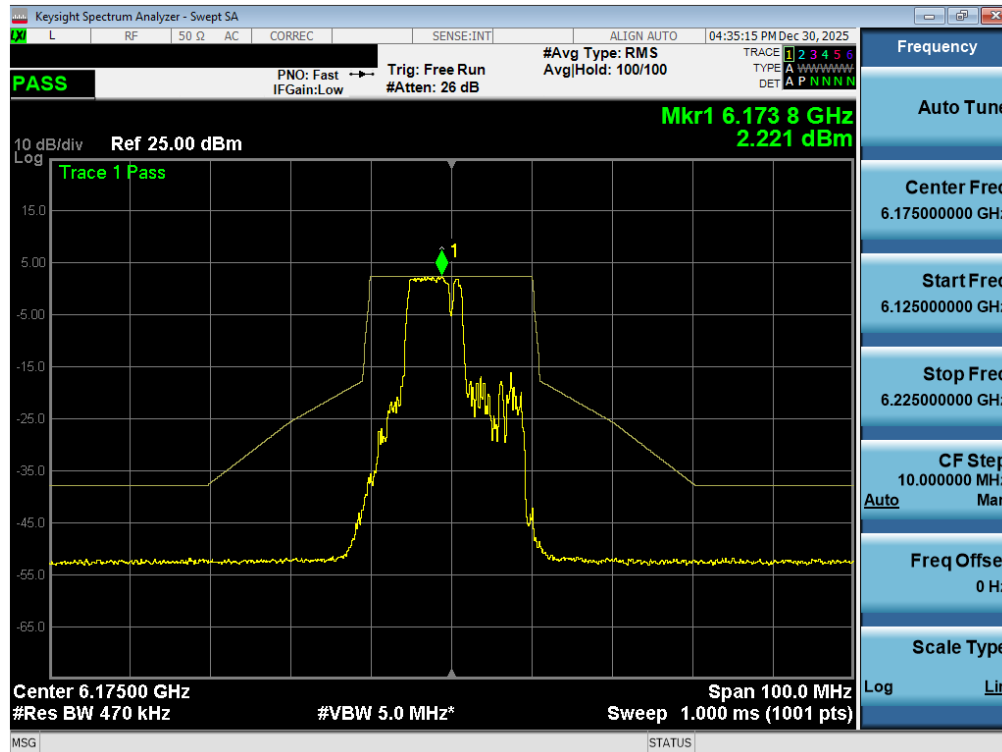


Plot 7-165. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax/be (52 +26 Tones) (UNII Band 5) – Ch. 45) – MRU

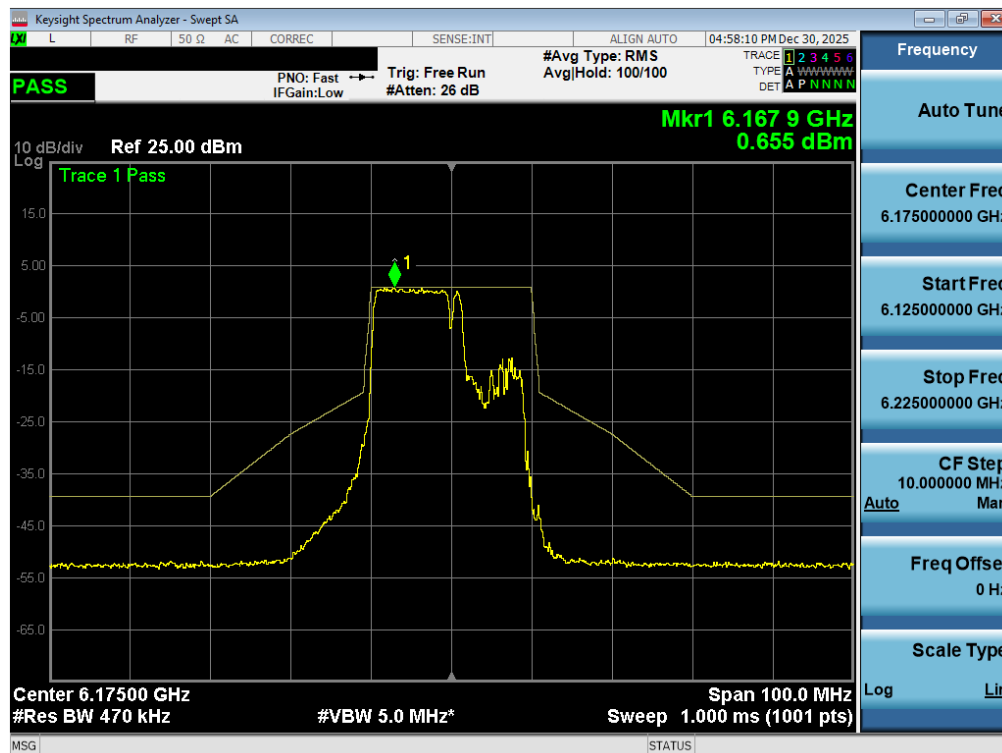


Plot 7-166. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax/be (106 + 26 Tones) (UNII Band 5) – Ch. 45) - MRU

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 134 of 159

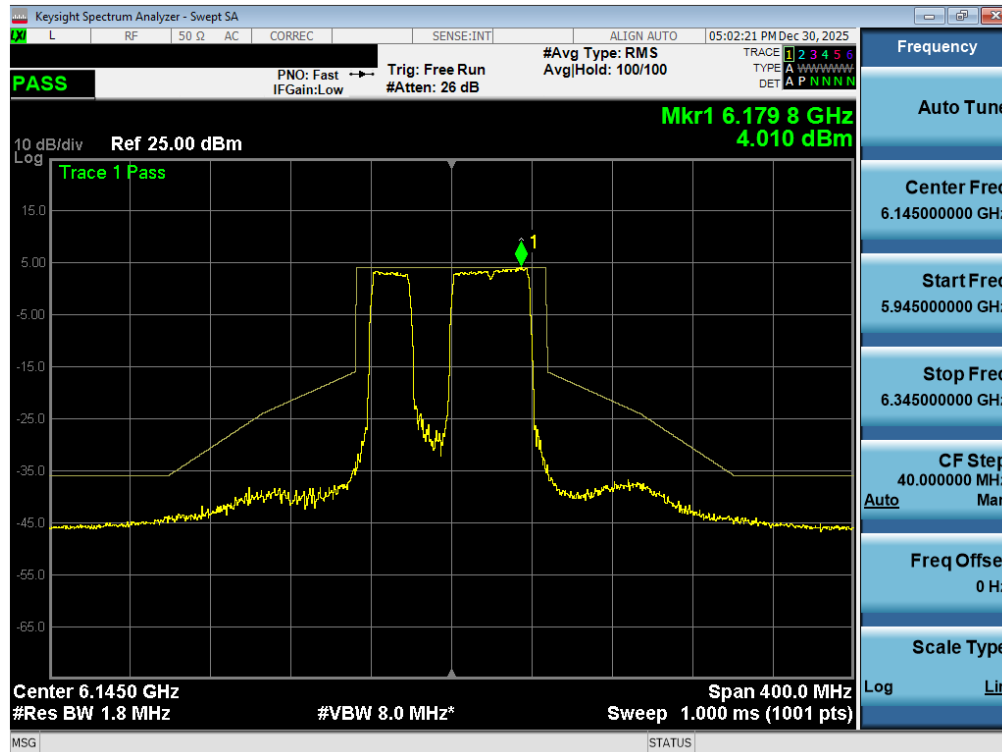


Plot 7-167. In Band Emissions Plot MIMO ANT2 (80MHz 802.11ax/be (484 + 242 Tones) (UNII Band 5) – Ch. 39) – MRU

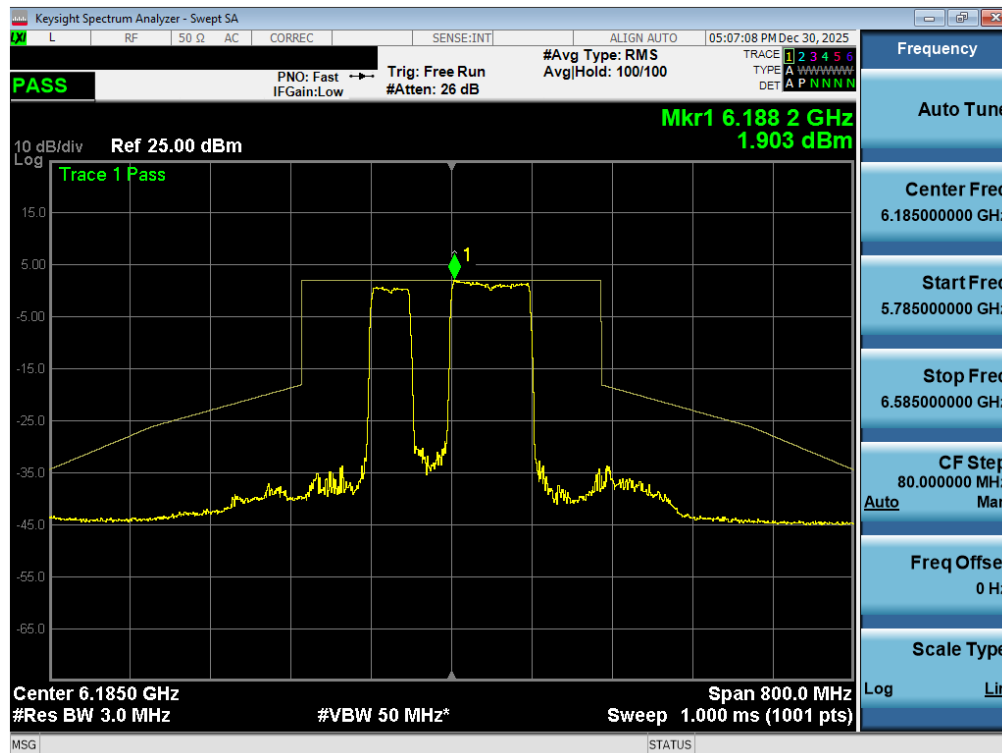

Plot 7-168. In Band Emissions Plot MIMO ANT2 (160MHz 802.11ax/be (996 + 484 Tones) (UNII Band 5) – Ch. 47) – MRU

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 135 of 159

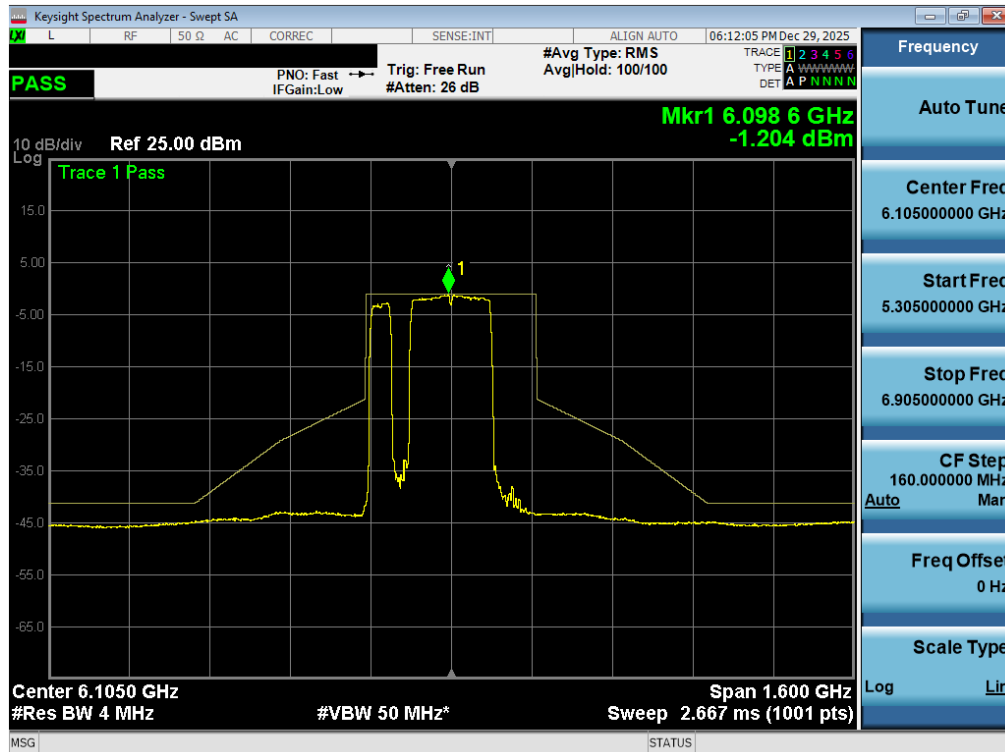

Plot 7-169. In Band Emissions Plot MIMO ANT2 (320MHz 802.11ax/be (3x996 + 484 Tones) (UNII Band 5) – Ch. 31) - MRU

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 136 of 159

7.6 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies. All channels, modes (e.g. 802.11ax, 802.11be (20/40/80/160/320MHz), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz. Emissions found in a restricted band are subject to the limits of 15.209 as shown in the table below.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-50. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 – Sections 12.7.7.2, 12.7.6, 12.7.5

Test Settings – Above 1GHz

Average Field Strength Measurements (Method AD – Average Detection)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 137 of 159

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

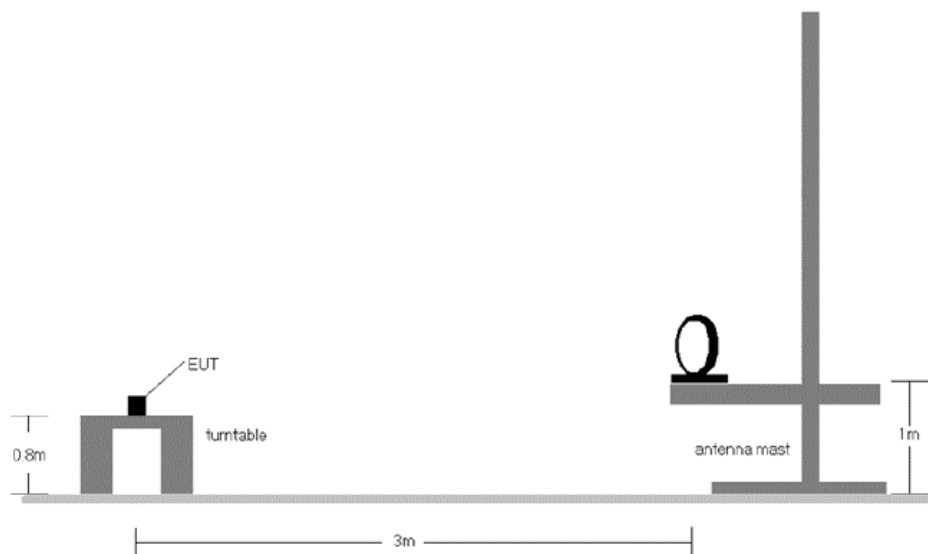


Figure 7-5. Radiated Test Setup < 30MHz

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 138 of 159

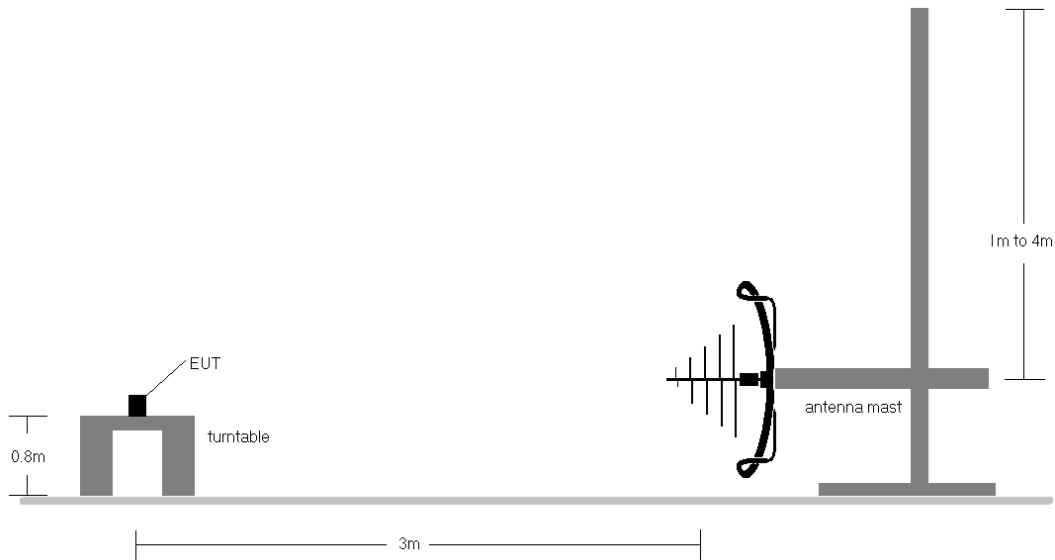


Figure 7-6. Radiated Test Setup < 1GHz

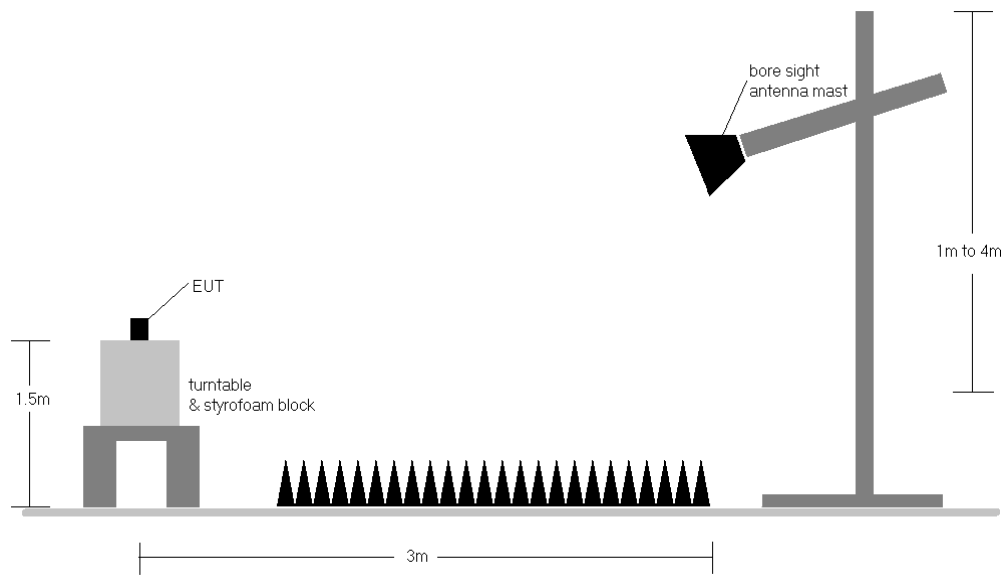


Figure 7-7. Radiated Test Setup > 1GHz

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 139 of 159

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
9. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 140 of 159


7.6.1 MIMO Radiated Spurious Emission Measurements (26 Tones)

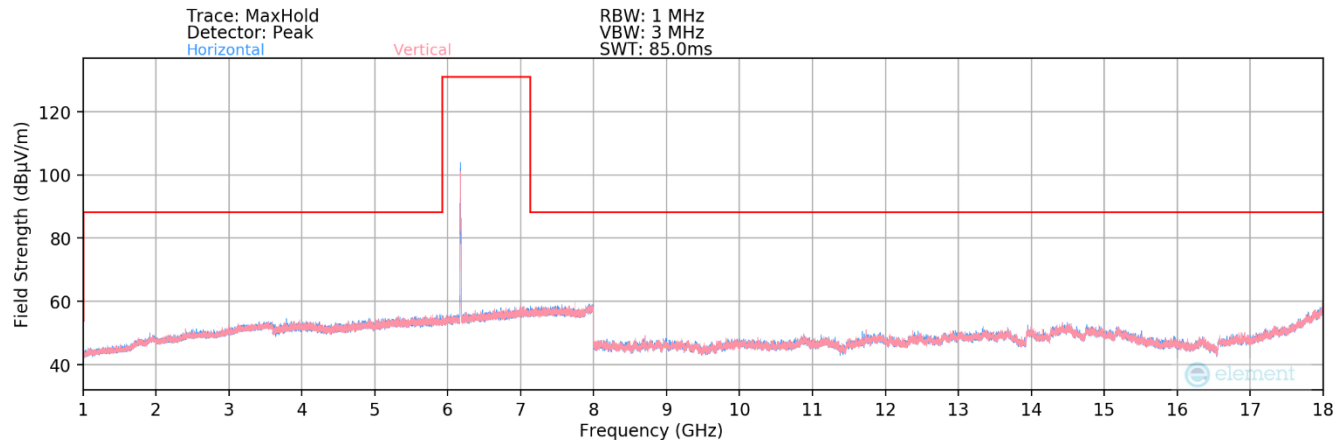

Plot 7-170. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 5 Ch. 45)

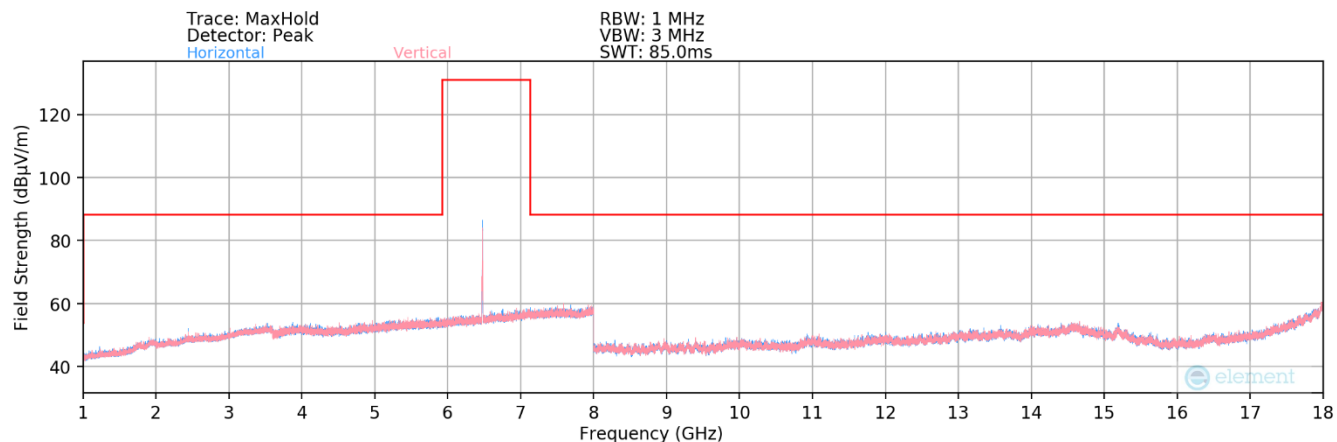


Plot 7-171. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 6 Ch. 105)

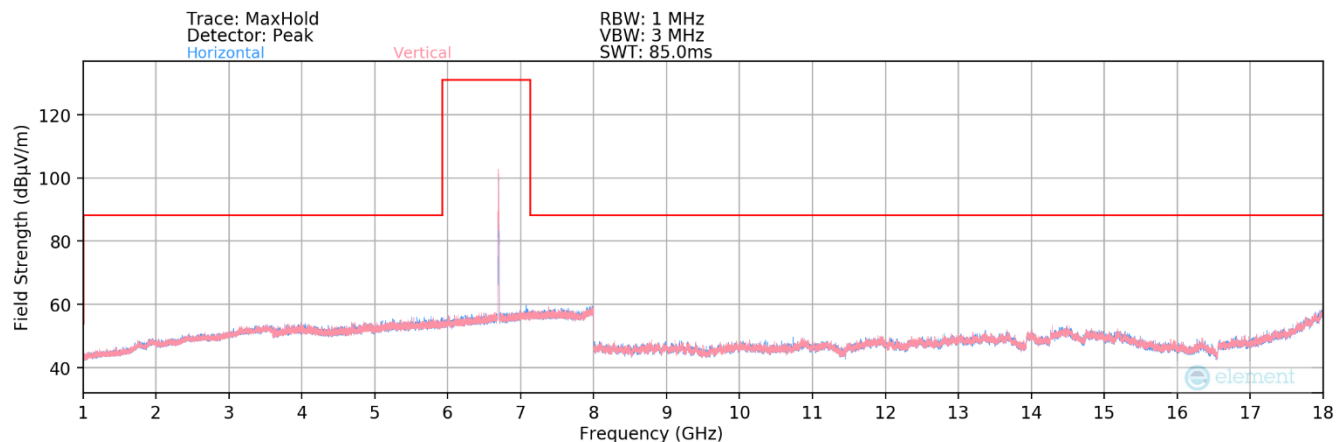


Plot 7-172. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 7 Ch. 149)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 141 of 159

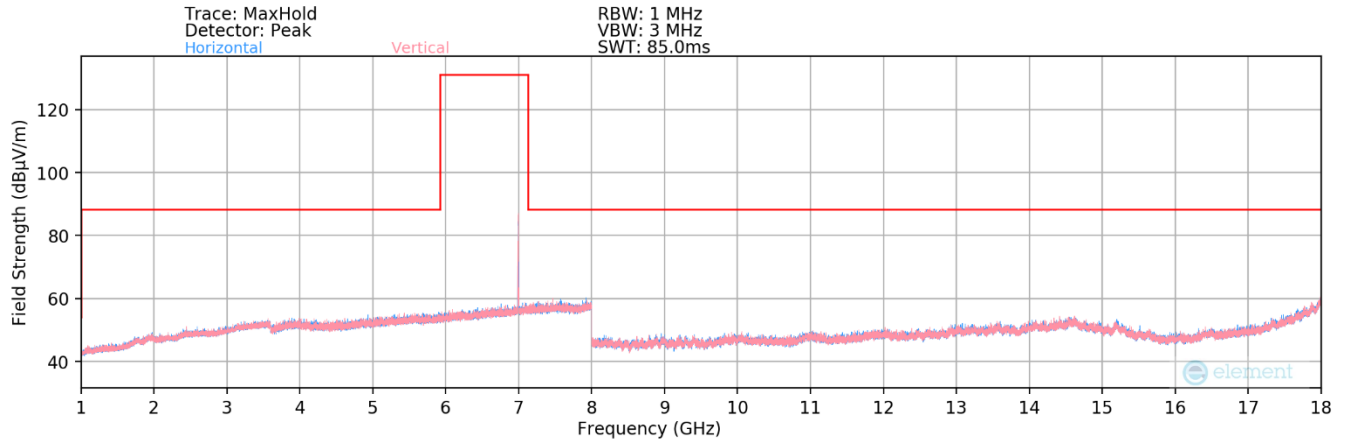

Plot 7-173. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – U Band 8 Ch. 209)

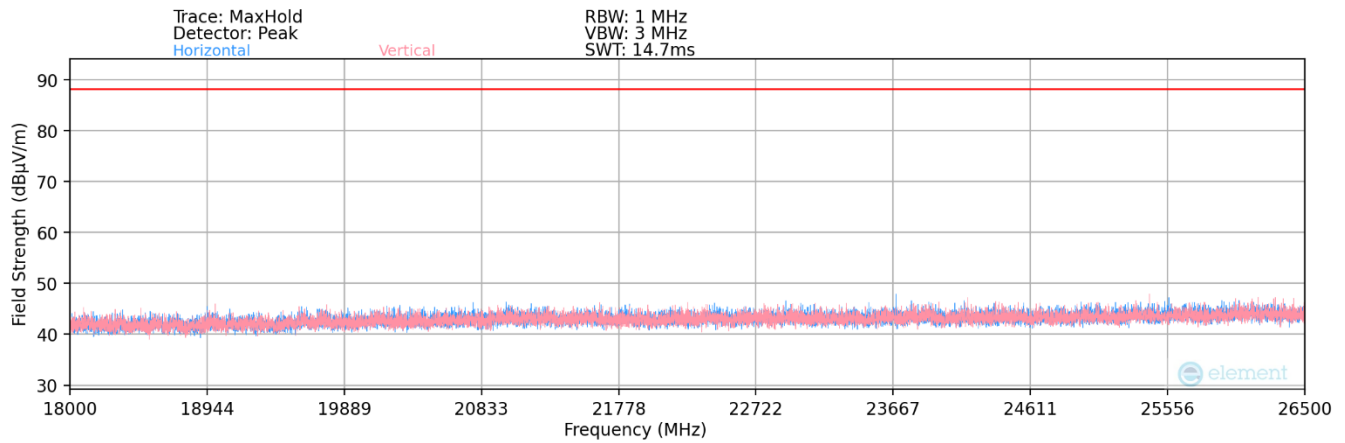

Plot 7-174. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)

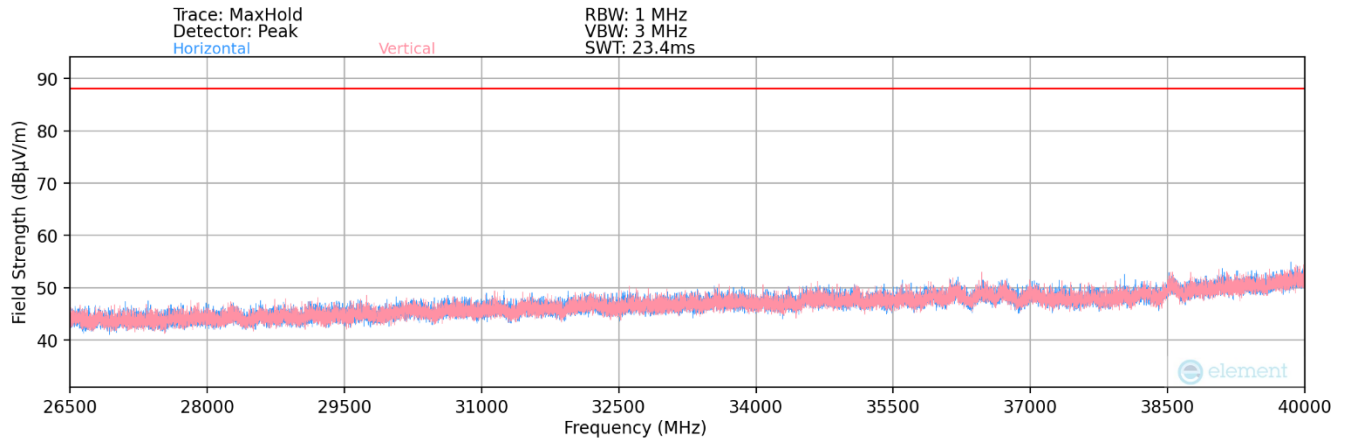

Plot 7-175. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 142 of 159

7.6.1.1 MIMO Radiated Spurious Emission Measurements (26 Tones)

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	5	2	5935	4	*	11870.00	Average	H	-	-	-77.73	9.41	0.00	38.68	53.98	-15.30
						*	11870.00	Peak	H	-	-	-75.76	9.41	0.00	40.65	73.98	-33.33
						*	17805.00	Average	H	-	-	-77.23	16.76	0.00	46.53	53.98	-7.45
						*	17805.00	Peak	H	-	-	-75.11	16.76	0.00	48.65	73.98	-25.33
						*	23740.00	Average	H	-	-	-65.09	4.02	-9.54	36.40	53.98	-17.58
						*	23740.00	Peak	H	-	-	-54.60	4.02	-9.54	46.88	73.98	-27.10
			45	6175	4	*	29675.00	Peak	H	-	-	-54.80	5.01	-9.54	47.67	68.20	-20.53
						*	12350.00	Average	H	-	-	-77.99	9.78	0.00	38.79	53.98	-15.19
						*	12350.00	Peak	H	-	-	-75.94	9.78	0.00	40.84	73.98	-33.14
						*	18525.00	Average	H	-	-	-65.12	1.00	-9.54	33.33	53.98	-20.65
						*	18525.00	Peak	H	-	-	-54.42	1.00	-9.54	44.03	73.98	-29.95
						*	24700.00	Peak	H	-	-	-55.33	4.23	-9.54	46.37	68.20	-21.83
			93	6415	4	*	30875.00	Peak	H	-	-	-55.20	5.66	-9.54	47.92	68.20	-20.28
						*	12830.00	Peak	H	203	32	-66.28	10.40	0.00	51.12	68.20	-17.08
						*	19245.00	Average	H	-	-	-64.27	1.74	-9.54	34.93	53.98	-19.05
						*	19245.00	Peak	H	-	-	-54.26	1.74	-9.54	44.94	73.98	-29.04
						*	25660.00	Peak	H	-	-	-54.95	4.69	-9.54	47.20	68.20	-21.00
						*	32075.00	Peak	H	-	-	-54.96	6.47	-9.54	48.97	68.20	-19.23

Table 7-51. Radiated Measurements MIMO (26 Tones) – UNII Band 5

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	6	97	6435	4	*	12870.00	Peak	H	364	95	-66.15	10.56	0.00	51.41	68.20	-16.79
						*	19305.00	Average	H	-	-	-65.01	1.65	-9.54	34.10	53.98	-19.88
						*	19305.00	Peak	H	-	-	-54.28	1.65	-9.54	44.83	73.98	-29.15
						*	25740.00	Peak	H	-	-	-55.12	4.71	-9.54	47.05	68.20	-21.15
						*	32175.00	Peak	H	-	-	-54.09	6.76	-9.54	50.13	68.20	-18.07
			105	6475	4	*	12950.00	Peak	H	364	92	-65.48	10.59	0.00	52.11	68.20	-16.09
						*	19425.00	Average	H	-	-	-65.27	1.76	-9.54	33.95	53.98	-20.03
						*	19425.00	Peak	H	-	-	-54.67	1.76	-9.54	44.55	73.98	-29.43
						*	25900.00	Peak	H	-	-	-54.69	4.78	-9.54	47.55	68.20	-20.65
						*	32375.00	Peak	H	-	-	-54.74	6.56	-9.54	49.29	68.20	-18.91
			113	6515	4	*	13030.00	Peak	H	137	107	-65.47	10.85	0.00	52.38	68.20	-15.82
						*	19545.00	Average	H	-	-	-65.49	1.89	-9.54	33.86	53.98	-20.12
						*	19545.00	Peak	H	-	-	-54.88	1.89	-9.54	44.47	73.98	-29.51
						*	26060.00	Peak	H	-	-	-54.39	4.92	-9.54	47.99	68.20	-20.21
						*	32575.00	Peak	H	-	-	-54.29	6.76	-9.54	49.93	68.20	-18.27

Table 7-52. Radiated Measurements MIMO (26 Tones) – UNII Band 6

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	7	117	6535	4	*	13070.00	Peak	H	-	-	-65.93	10.74	0.00	51.81	68.20	-16.39
						*	19605.00	Average	H	-	-	-64.73	2.20	-9.54	34.93	53.98	-19.05
						*	19605.00	Peak	H	-	-	-53.87	2.20	-9.54	45.79	73.98	-28.19
						*	26140.00	Peak	H	-	-	-54.14	4.98	-9.54	48.30	68.20	-19.90
						*	32675.00	Peak	H	-	-	-54.41	7.14	-9.54	50.18	68.20	-18.02
			149	6695	4	*	13390.00	Average	H	-	-	-77.58	11.04	0.00	40.46	53.98	-13.52
						*	13390.00	Peak	H	-	-	-65.34	11.04	0.00	52.70	73.98	-21.28
						*	20085.00	Average	H	-	-	-65.11	2.07	-9.54	34.42	53.98	-19.56
						*	20085.00	Peak	H	-	-	-54.50	2.07	-9.54	45.02	73.98	-28.96
						*	26780.00	Peak	H	-	-	-55.11	5.18	-9.54	47.53	68.20	-20.67
						*	33475.00	Peak	H	-	-	-54.46	8.48	-9.54	51.49	68.20	-16.71
			185	6875	4	*	13750.00	Peak	H	-	-	-65.79	11.51	0.00	52.72	68.20	-15.48
						*	20625.00	Average	H	-	-	-65.64	2.36	-9.54	34.18	53.98	-19.80
						*	20625.00	Peak	H	-	-	-54.99	2.36	-9.54	44.83	73.98	-29.15
						*	27500.00	Peak	H	-	-	-54.96	5.00	-9.54	47.50	68.20	-20.70
						*	34375.00	Peak	H	-	-	-54.96	9.46	-9.54	51.96	68.20	-16.24

Table 7-53. Radiated Measurements MIMO (26 Tones) – UNII Band 7


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE												Approved by: Technical Manager				
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026				EUT Type: Portable Computing Device								Page 143 of 159				

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	8	189	6895	4		13790.00	Peak	H	-	-	-65.27	11.38	0.00	53.11	68.20	-15.09
						*	20685.00	Average	H	-	-	-65.42	2.33	-9.54	34.37	53.98	-19.61
						*	20685.00	Peak	H	-	-	-54.19	2.33	-9.54	45.61	73.98	-28.37
							27580.00	Peak	H	-	-	-55.60	5.33	-9.54	47.19	68.20	-21.01
							34475.00	Peak	H	-	-	-55.24	9.33	-9.54	51.55	68.20	-16.65
			209	6995	4		13990.00	Peak	H	-	-	-65.94	11.63	0.00	52.69	68.20	-15.51
						*	20985.00	Average	H	-	-	-65.07	2.83	-9.54	35.22	53.98	-18.76
						*	20985.00	Peak	H	-	-	-54.98	2.83	-9.54	45.31	73.98	-28.67
							27980.00	Peak	H	-	-	-54.89	5.30	-9.54	47.87	68.20	-20.33
							34975.00	Peak	H	-	-	-54.28	9.79	-9.54	52.96	68.20	-15.24
			233	7115	4		14230.00	Peak	H	-	-	-65.57	12.35	0.00	53.78	68.20	-14.42
						*	21345.00	Average	H	-	-	-65.23	2.85	-9.54	35.08	53.98	-18.90
						*	21345.00	Peak	H	-	-	-54.52	2.85	-9.54	45.78	73.98	-28.20
							28460.00	Peak	H	-	-	-54.94	5.34	-9.54	47.86	68.20	-20.34
							35575.00	Peak	H	-	-	-53.84	9.53	-9.54	53.15	68.20	-15.05


Table 7-54. Radiated Measurements MIMO (26 Tones) – UNII Band 8

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 144 of 159


7.6.2 MIMO Radiated Spurious Emission Measurements (242 Tones)

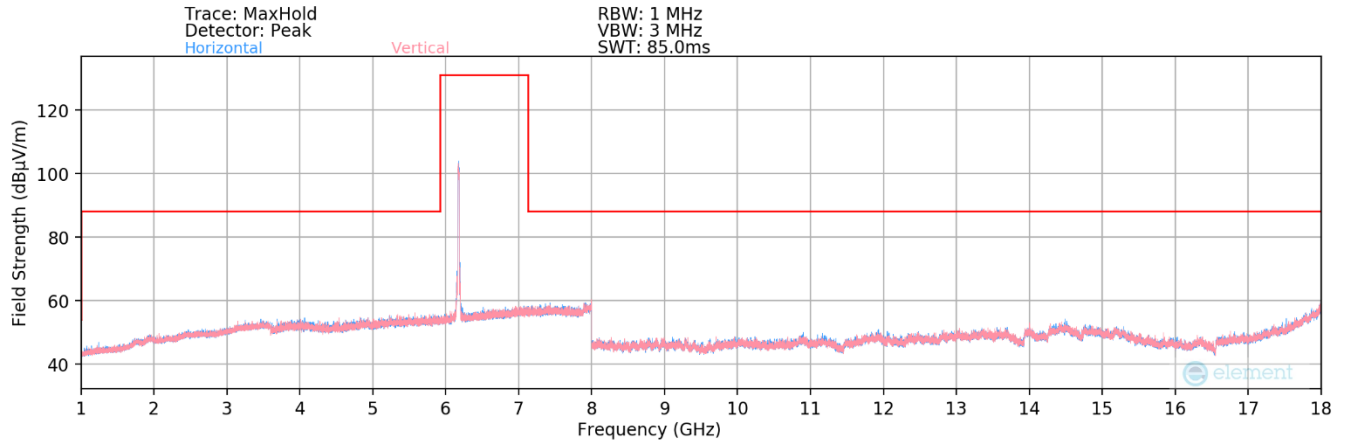

Plot 7-176. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 5 Ch. 45)

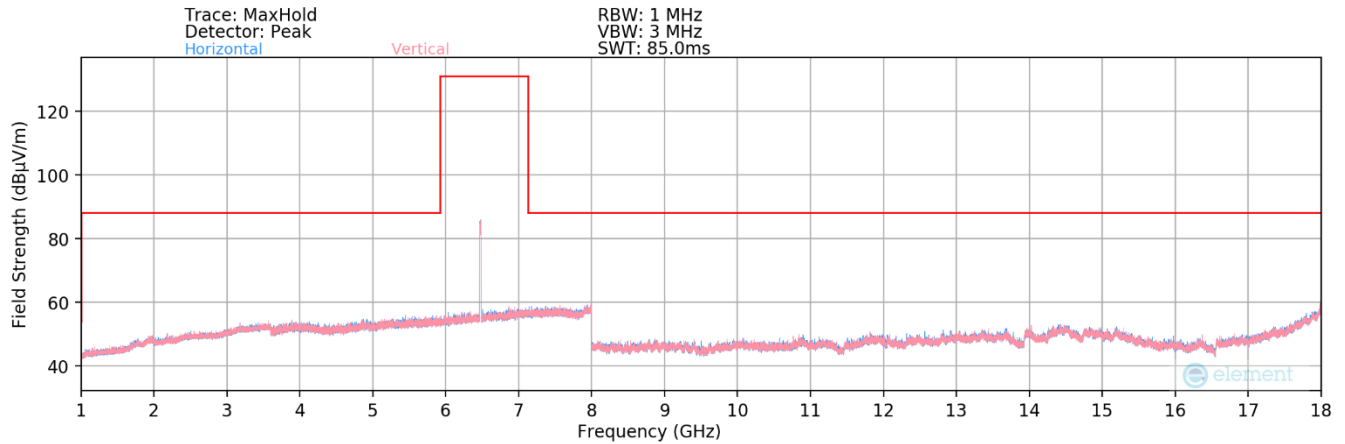


Plot 7-177. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 6 Ch. 105)

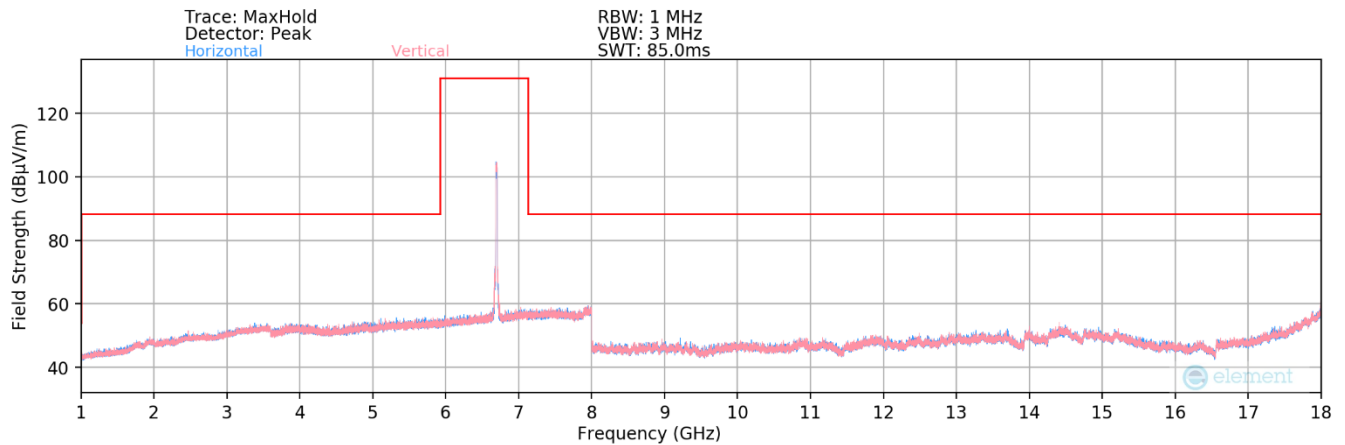


Plot 7-178. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 7 Ch. 149)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 145 of 159

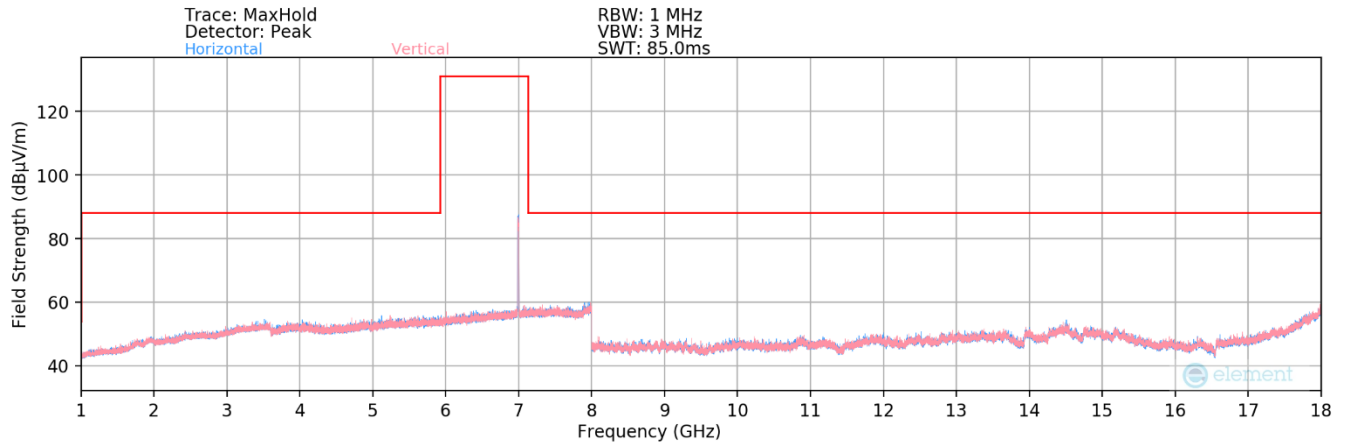

Plot 7-179. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – U Band 8 Ch. 209)

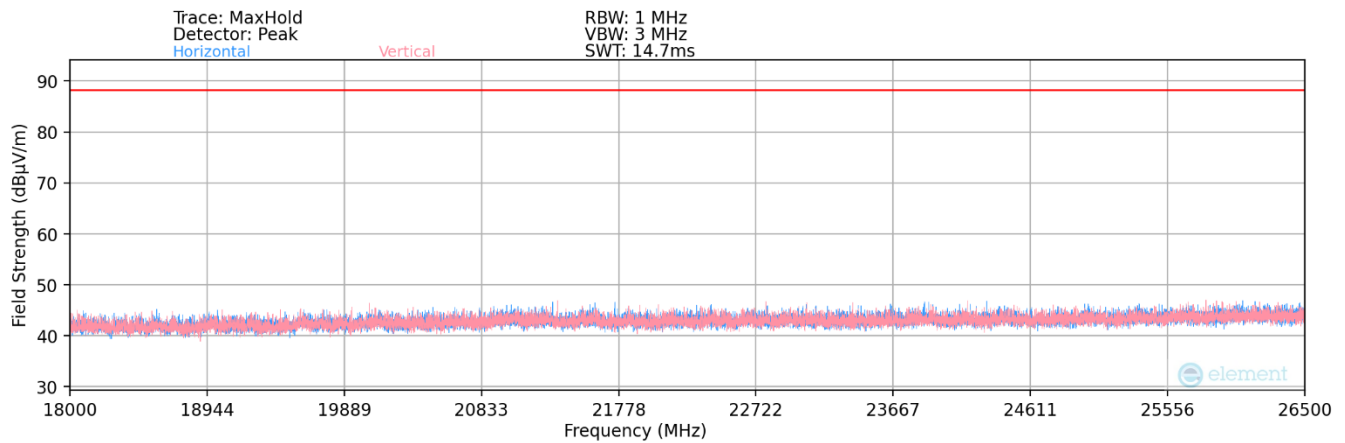

Plot 7-180. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)

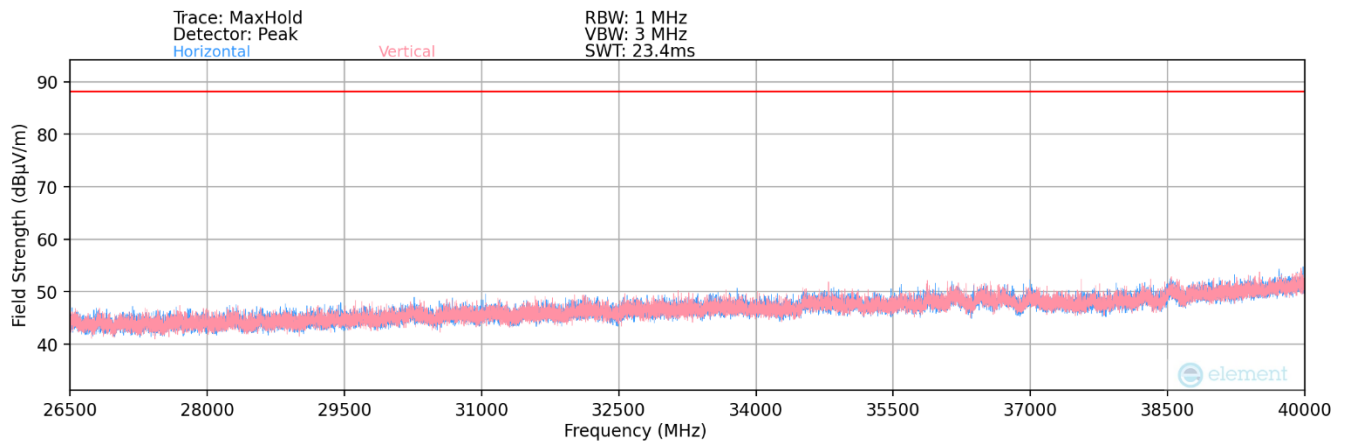

Plot 7-181. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 146 of 159

7.6.2.1 MIMO Radiated Spurious Emission Measurements (242 Tones)

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	5	2	5935	61	*	11870.00	Average	H	-	-	-77.81	9.41	0.00	38.60	53.98	-15.38
						*	11870.00	Peak	H	-	-	-65.44	9.41	0.00	50.97	73.98	-23.01
						*	17805.00	Average	H	-	-	-77.25	16.76	0.00	46.51	53.98	-7.47
						*	17805.00	Peak	H	-	-	-75.42	16.76	0.00	48.34	73.98	-25.64
						*	23740.00	Average	H	-	-	-65.31	4.02	-9.54	36.17	53.98	-17.80
						*	23740.00	Peak	H	-	-	-54.37	4.02	-9.54	47.12	73.98	-26.86
			45	6175	61	*	29675.00	Peak	H	-	-	-55.49	5.01	-9.54	46.97	68.20	-21.23
						*	12350.00	Average	H	284	105	-76.65	9.78	0.00	40.13	53.98	-13.85
						*	12350.00	Peak	H	280	84	-65.23	9.78	0.00	51.55	73.98	-22.43
						*	18525.00	Average	H	-	-	-64.73	1.00	-9.54	33.73	53.98	-20.25
						*	18525.00	Peak	H	-	-	-54.41	1.00	-9.54	44.05	73.98	-29.93
						*	24700.00	Peak	H	-	-	-54.87	4.23	-9.54	46.83	68.20	-21.37
			93	6415	61	*	30875.00	Peak	H	-	-	-55.29	5.66	-9.54	47.83	68.20	-20.37
						*	12830.00	Peak	H	142	82	-65.25	10.40	0.00	52.15	68.20	-16.05
						*	19245.00	Average	H	-	-	-64.68	1.74	-9.54	34.52	53.98	-19.46
						*	19245.00	Peak	H	-	-	-54.93	1.74	-9.54	44.27	73.98	-29.71
						*	25660.00	Peak	H	-	-	-54.85	4.69	-9.54	47.30	68.20	-20.90
						*	32075.00	Peak	H	-	-	-55.21	6.47	-9.54	48.72	68.20	-19.48

Table 7-55. Radiated Measurements MIMO (242 Tones) – UNII Band 5

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	6	97	6435	61	*	12870.00	Peak	H	209	304	-66.34	10.56	0.00	51.22	68.20	-16.98
						*	19305.00	Average	H	-	-	-65.00	1.65	-9.54	34.11	53.98	-19.87
						*	19305.00	Peak	H	-	-	-55.05	1.65	-9.54	44.06	73.98	-29.92
						*	25740.00	Peak	H	-	-	-54.90	4.71	-9.54	47.27	68.20	-20.93
						*	32175.00	Peak	H	-	-	-54.63	6.76	-9.54	49.59	68.20	-18.61
			105	6475	61	*	12950.00	Peak	H	245	68	-65.98	10.59	0.00	51.61	68.20	-16.59
						*	19425.00	Average	H	-	-	-65.06	1.76	-9.54	34.16	53.98	-19.81
						*	19425.00	Peak	H	-	-	-55.06	1.76	-9.54	44.16	73.98	-29.82
						*	25900.00	Peak	H	-	-	-54.28	4.78	-9.54	47.96	68.20	-20.24
						*	32375.00	Peak	H	-	-	-55.45	6.56	-9.54	48.57	68.20	-19.63
			113	6515	61	*	13030.00	Peak	H	335	45	-65.25	10.85	0.00	52.60	68.20	-15.60
						*	19545.00	Average	H	-	-	-65.34	1.89	-9.54	34.02	53.98	-19.96
						*	19545.00	Peak	H	-	-	-54.17	1.89	-9.54	45.19	73.98	-28.79
						*	26060.00	Peak	H	-	-	-55.22	4.92	-9.54	47.17	68.20	-21.03
						*	32575.00	Peak	H	-	-	-54.88	6.76	-9.54	49.33	68.20	-18.87

Table 7-56. Radiated Measurements MIMO (242 Tones) – UNII Band 6

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	7	117	6535	61	*	13070.00	Peak	H	-	-	-65.56	10.74	0.00	52.18	68.20	-16.02
						*	19605.00	Average	H	-	-	-64.47	2.20	-9.54	35.19	53.98	-18.79
						*	19605.00	Peak	H	-	-	-54.38	2.20	-9.54	45.28	73.98	-28.70
						*	26140.00	Peak	H	-	-	-54.82	4.98	-9.54	47.61	68.20	-20.59
						*	32675.00	Peak	H	-	-	-54.72	7.14	-9.54	49.87	68.20	-18.33
			149	6695	61	*	13390.00	Average	H	-	-	-77.61	11.04	0.00	40.43	53.98	-13.55
						*	13390.00	Peak	H	-	-	-65.55	11.04	0.00	52.49	73.98	-21.49
						*	20085.00	Average	H	-	-	-64.90	2.07	-9.54	34.63	53.98	-19.35
						*	20085.00	Peak	H	-	-	-54.75	2.07	-9.54	44.78	73.98	-29.20
						*	26780.00	Peak	H	-	-	-55.07	5.18	-9.54	47.57	68.20	-20.63
						*	33475.00	Peak	H	-	-	-54.84	8.48	-9.54	51.11	68.20	-17.09
			185	6875	61	*	13750.00	Peak	H	-	-	-66.04	11.51	0.00	52.47	68.20	-15.73
						*	20625.00	Average	H	-	-	-65.43	2.36	-9.54	34.39	53.98	-19.59
						*	20625.00	Peak	H	-	-	-54.27	2.36	-9.54	45.55	73.98	-28.43
						*	27500.00	Peak	H	-	-	-54.44	5.00	-9.54	48.03	68.20	-20.17
						*	34375.00	Peak	H	-	-	-54.60	9.46	-9.54	52.33	68.20	-15.87

Table 7-57. Radiated Measurements MIMO (242 Tones) – UNII Band 7

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE			Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device		Page 147 of 159


Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	8	189	6895	61		13790.00	Peak	H	-	-	-65.59	11.38	0.00	52.79	68.20	-15.41
						*	20685.00	Average	H	-	-	-65.09	2.33	-9.54	34.71	53.98	-19.27
						*	20685.00	Peak	H	-	-	-55.03	2.33	-9.54	44.76	73.98	-29.22
							27580.00	Peak	H	-	-	-55.29	5.33	-9.54	47.50	68.20	-20.70
							34475.00	Peak	H	-	-	-54.32	9.33	-9.54	52.46	68.20	-15.74
			209	6995	61		13990.00	Peak	H	-	-	-65.92	11.63	0.00	52.71	68.20	-15.49
						*	20985.00	Average	H	-	-	-65.01	2.83	-9.54	35.28	53.98	-18.70
						*	20985.00	Peak	H	-	-	-54.84	2.83	-9.54	45.45	73.98	-28.53
							27980.00	Peak	H	-	-	-54.29	5.30	-9.54	48.47	68.20	-19.73
							34975.00	Peak	H	-	-	-54.31	9.79	-9.54	52.94	68.20	-15.26
			233	7115	61		14230.00	Peak	H	-	-	-65.23	12.35	0.00	54.12	68.20	-14.08
						*	21345.00	Average	H	-	-	-65.24	2.85	-9.54	35.06	53.98	-18.92
						*	21345.00	Peak	H	-	-	-55.44	2.85	-9.54	44.86	73.98	-29.12
							28460.00	Peak	H	-	-	-55.15	5.34	-9.54	47.65	68.20	-20.55
							35575.00	Peak	H	-	-	-53.68	9.53	-9.54	53.31	68.20	-14.89

Table 7-58. Radiated Measurements MIMO (242 Tones) – UNII Band 8


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 148 of 159

7.6.3 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	53
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

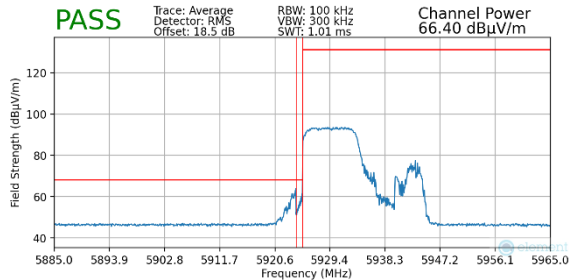


Plot 7-182. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106T)

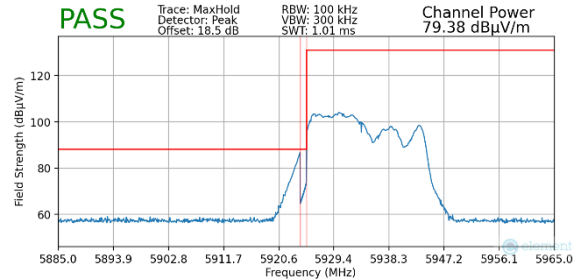


Plot 7-183. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

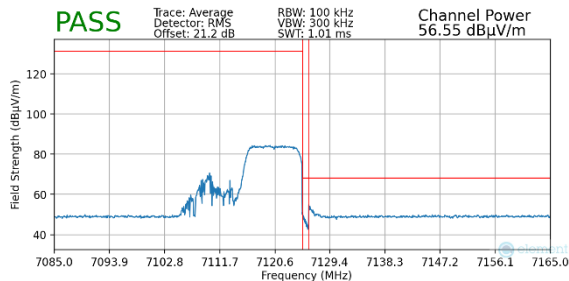

Plot 7-184. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106T)

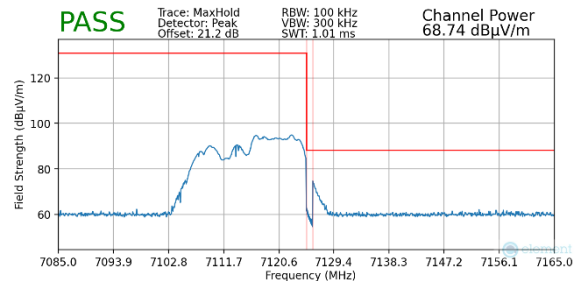


Plot 7-185. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106T)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 149 of 159

7.6.4 MIMO Radiated Band Edge Measurements (20MHz BW – MRU – 106+26T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	82
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

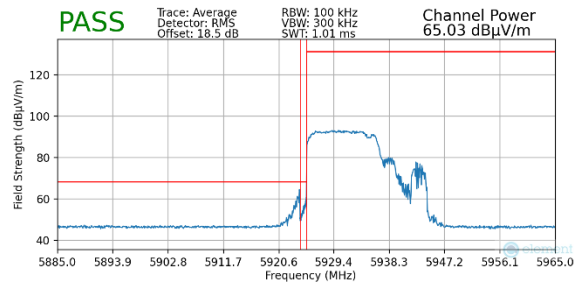


Plot 7-186. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106+26T)

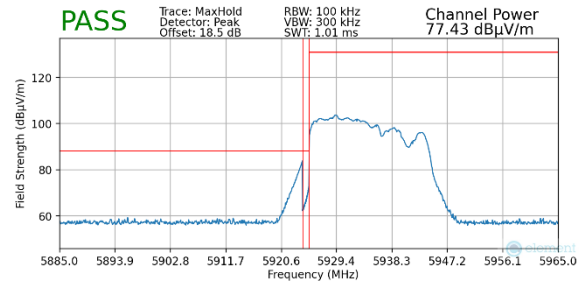


Plot 7-187. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106+26T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	83
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

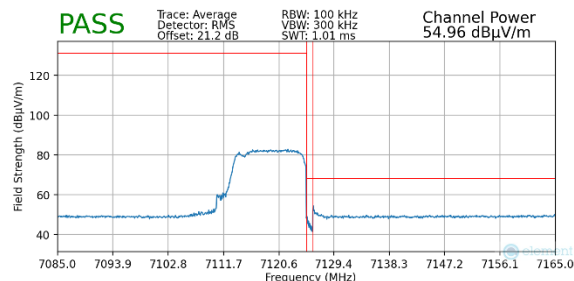

Plot 7-188. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106+26T)

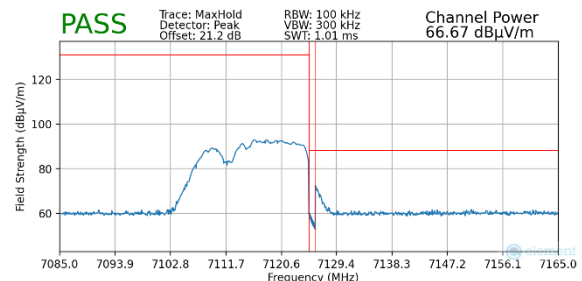


Plot 7-189. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106+26T)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 150 of 159

7.6.5 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

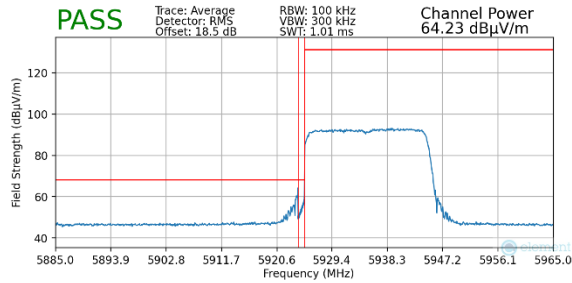


Plot 7-190. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 242T)

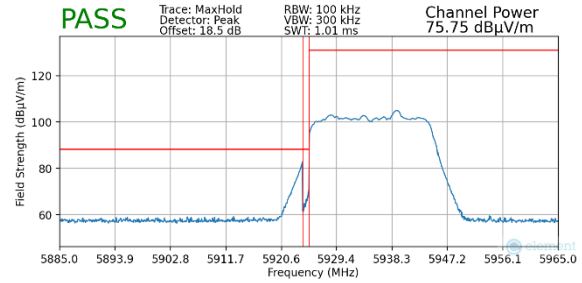


Plot 7-191. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

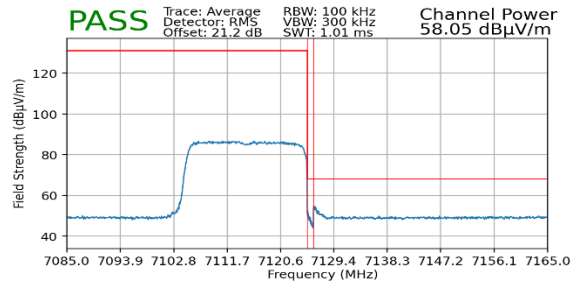

Plot 7-192. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 242T)

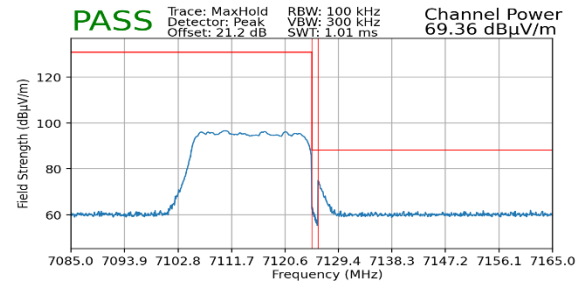


Plot 7-193. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 242T)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 151 of 159

7.6.6 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

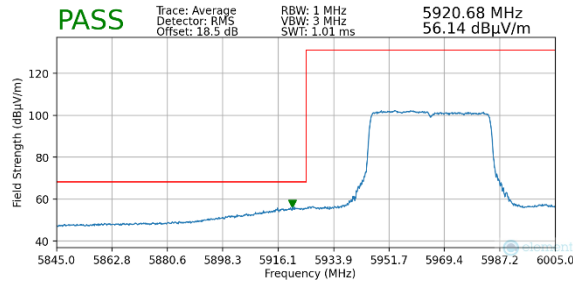


Plot 7-194. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484T)

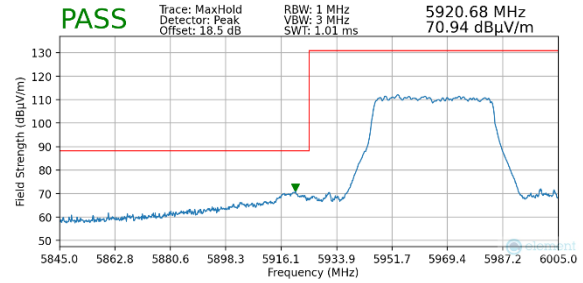


Plot 7-195. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	7085MHz
Channel:	227

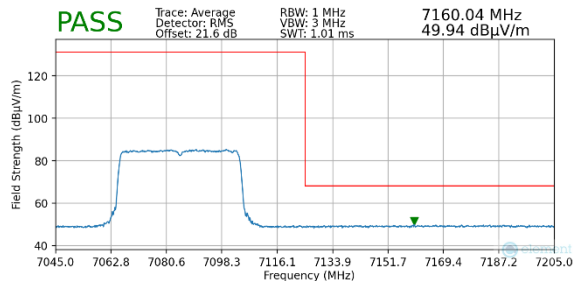

Plot 7-196. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484T)

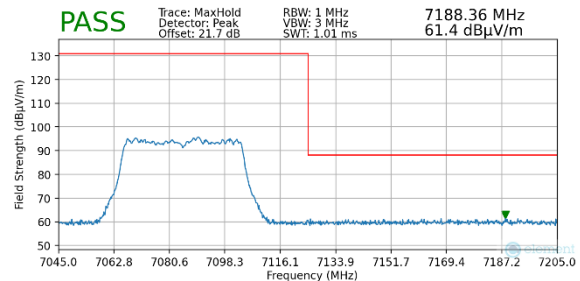


Plot 7-197. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484T)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 152 of 159

7.6.7 MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	67
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

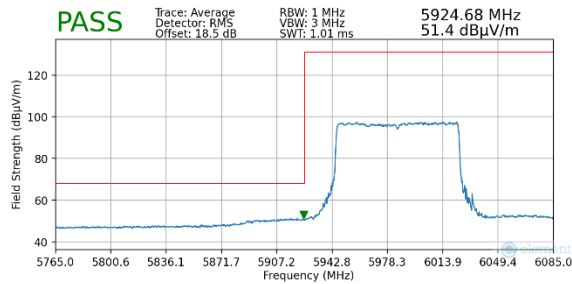


Plot 7-198. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996T)

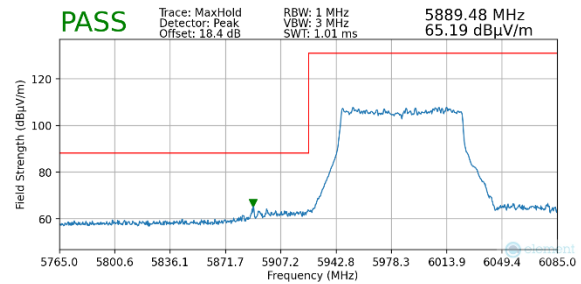


Plot 7-199. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	67
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

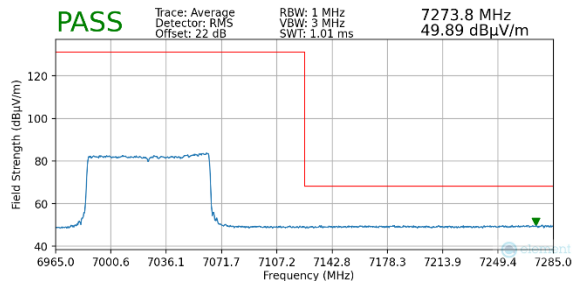

Plot 7-200. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996T)

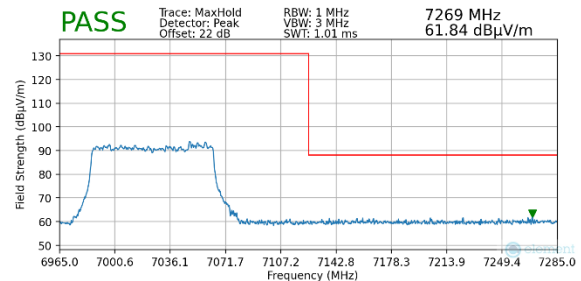


Plot 7-201. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996T)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 153 of 159

7.6.8 MIMO Radiated Band Edge Measurements (80MHz BW – MRU – 484+242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	93
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
channel:	7

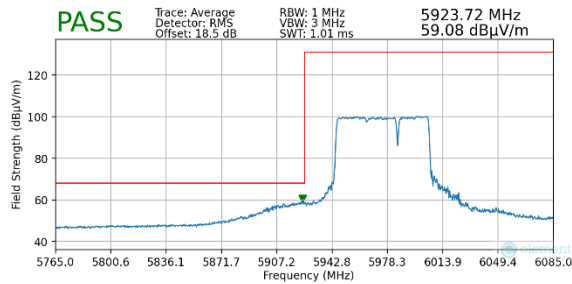


Plot 7-202. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484+242T)

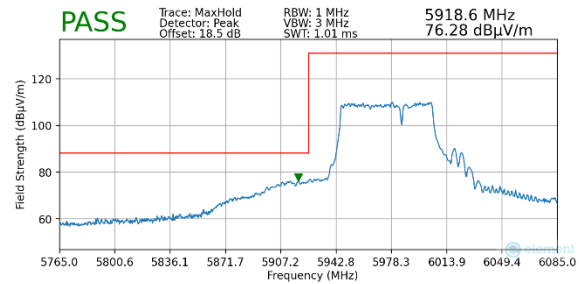


Plot 7-203. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484+242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	90
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

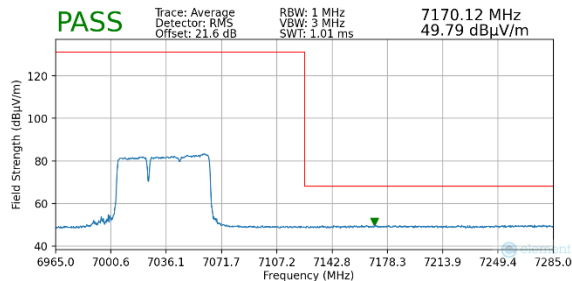

Plot 7-204. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484+242T)

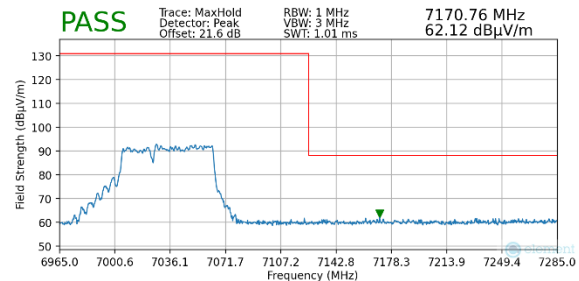


Plot 7-205. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484+242T)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 154 of 159

7.6.9 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

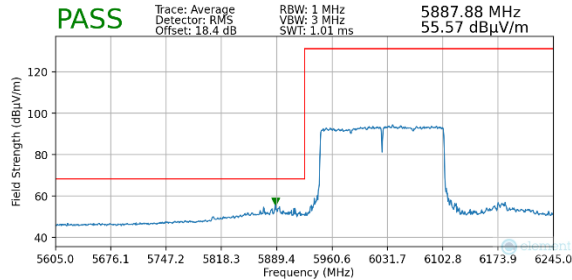


Plot 7-206. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 2x996T)

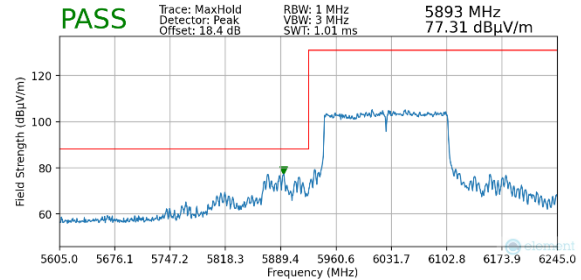


Plot 7-207. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 2x996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

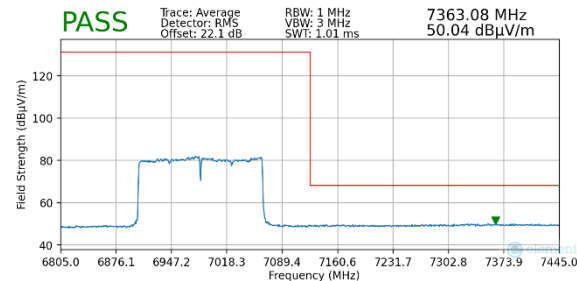

Plot 7-208. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 2x996T)

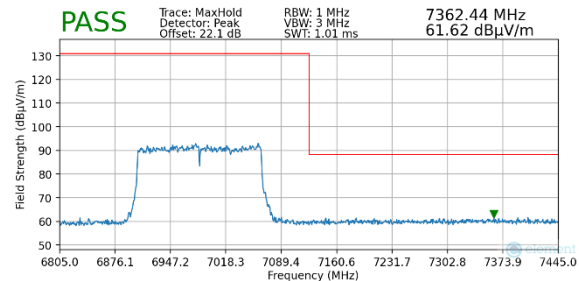


Plot 7-209. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 2x996T)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 155 of 159

7.6.10 MIMO Radiated Band Edge Measurements (160MHz BW – MRU – 996+484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	1094
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

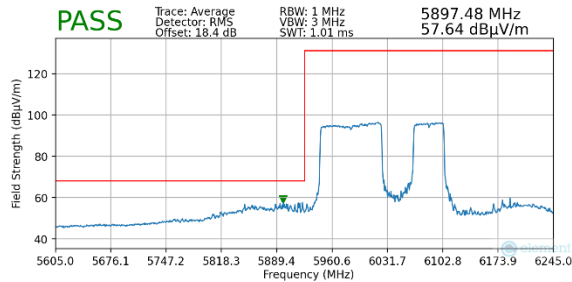


Plot 7-210. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996+484T)

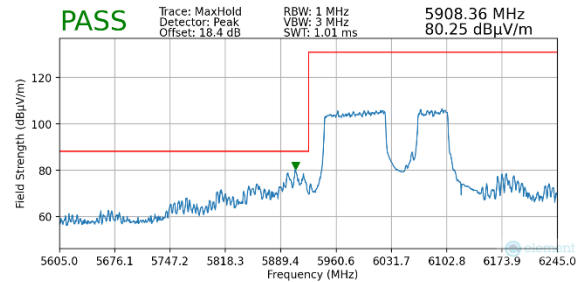


Plot 7-211. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996+484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	95
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

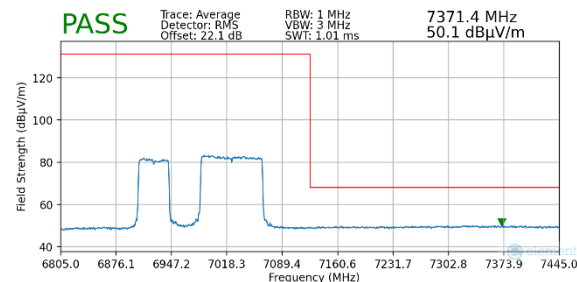

Plot 7-212. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996+484T)

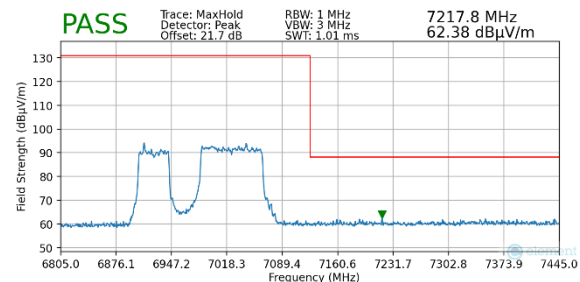


Plot 7-213. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996+484T)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 156 of 159

7.6.11 MIMO Radiated Band Edge Measurements (320MHz BW – Full Tone – 4*996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	69
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

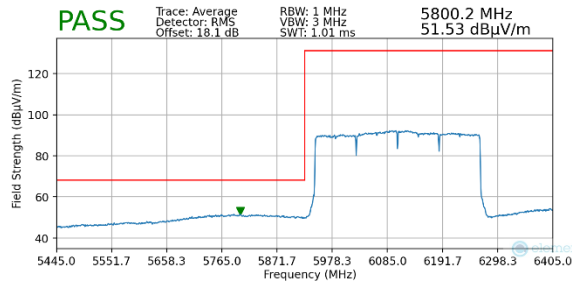


Plot 7-214. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 4*996T)

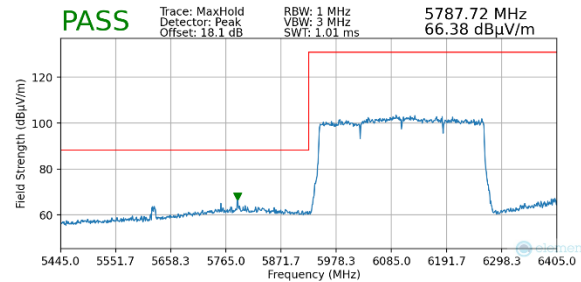


Plot 7-215. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 4*996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	69
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

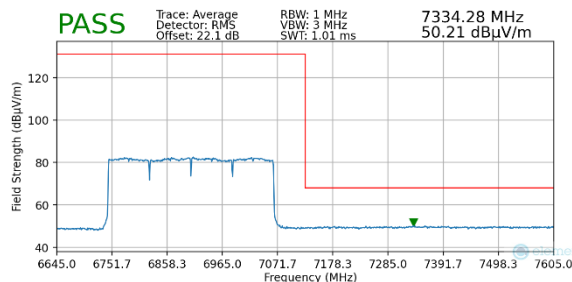

Plot 7-216. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 4*996T)

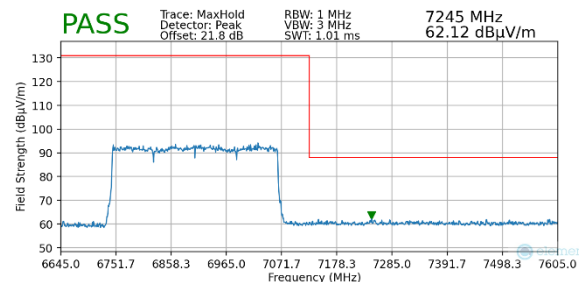


Plot 7-217. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 4*996T)


FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 157 of 159

7.6.12 MIMO Radiated Band Edge Measurements (320MHz BW – MRU – 3*996+484T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	10105
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

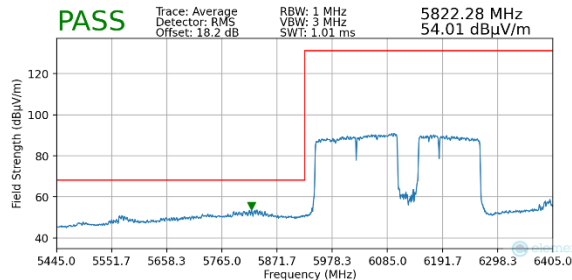


Plot 7-218. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 3*996+484T)

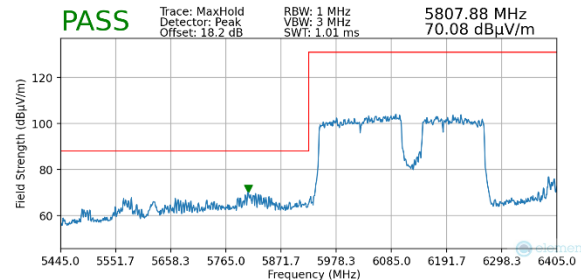


Plot 7-219. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 3*996+484T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	1106
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

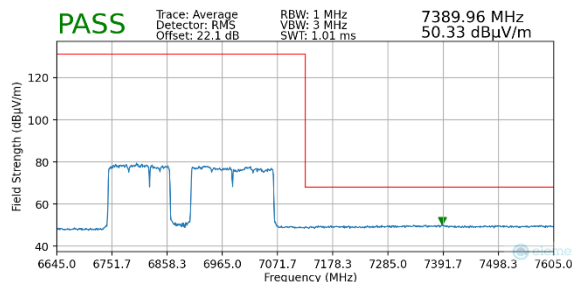

Plot 7-220. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 3*996+484T)

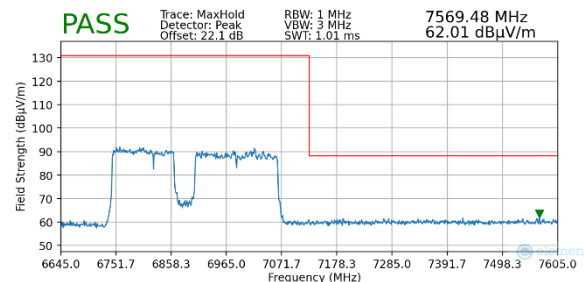

Plot 7-221. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 3*996+484T)

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 158 of 159

8 CONCLUSION

The data collected relate only the item(s) tested and show that the **Microsoft Corporation Portable Computing Device FCC ID: C3K2085, IC:3048A-2085** is in compliance with FCC Part Subpart E (15.407) of the FCC rules and RSS-248 of the ISED Canada rules for operation as a Dual Client Device. After additional testing it is concluded that the component change detailed in the FCC Change Document does not meaningfully affect compliance.

- END OF TEST REPORT -

FCC ID: C3K2085 IC: 3048A-2085	MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2511200095-09-R1.C3K	Test Dates: 12/16/2025 - 02/17/2026	EUT Type: Portable Computing Device	Page 159 of 159