9.3. 26 dB BANDWIDTH

LIMITS

FCC. §15.407 (a) (10)
Less than 320 MHz
Note: for 320MHz BW measurements, 99% OBW (sections 9.4.6, 9.4.12, 9.4.23) will be used to show compliance.

Bandwidth measurements reported are at the highest power setting ("Low Gain" setting) for Standard Power and the lowest power setting ("High Gain" setting) for Low Power Indoor in UNII 5 and UNII 7 and for LPI in UNII 6 and 8. This was to verify that bandwidth did not change significantly with the power setting.

9.3.1. 802.11a MODE 2TX IN THE UNII-5 BAND (SP LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	23.20	22.00	320	-296.80
Mid	6175	23.28	21.80	320	-296.72
High	6415	22.56	22.04	320	-297.44

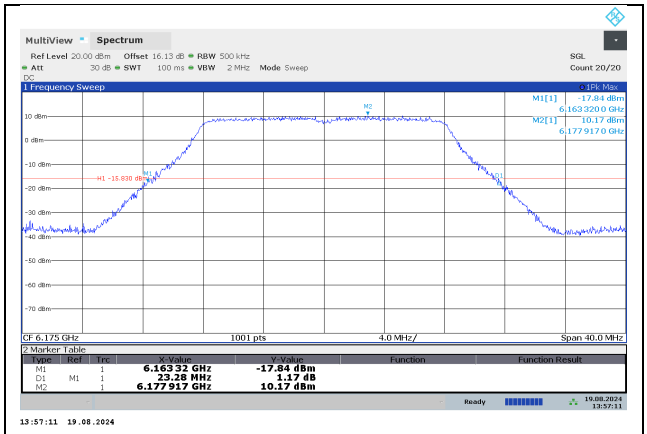

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.2. 802.11be EHT20 MODE 2TX IN THE UNII-5 BAND (SP LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	20.36	20.24	320	-299.64
Mid	6175	18.52	18.28	320	-301.48
High	6415	20.56	20.22	320	-299.44

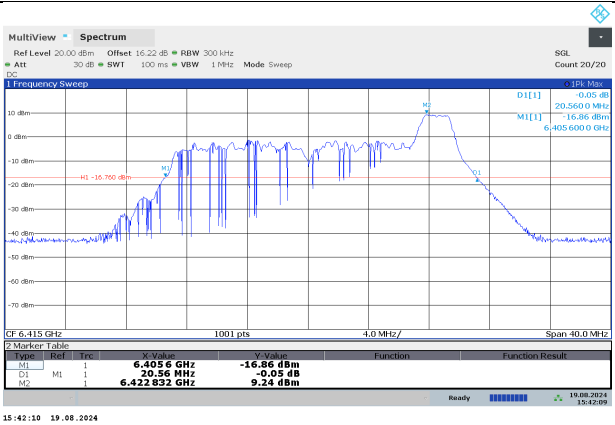

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	20.52	20.56	320	-299.44
Mid	6175	19.00	18.44	320	-301.00
High	6415	21.12	20.68	320	-298.88

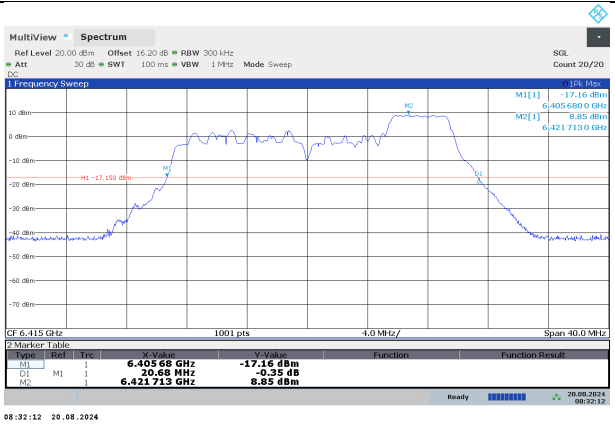

HIGH CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	19.20	19.04	320	-300.80
Mid	6175	19.20	19.16	320	-300.80
High	6415	19.94	19.48	320	-300.06

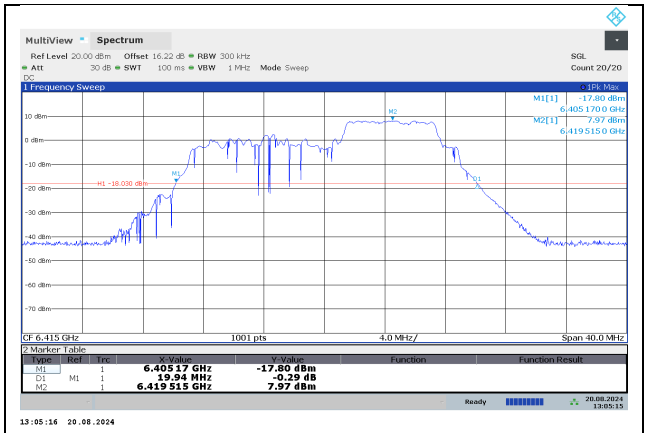

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	21.00	21.28	320	-298.72
Mid	6175	21.16	21.24	320	-298.76
High	6415	21.48	20.92	320	-298.52

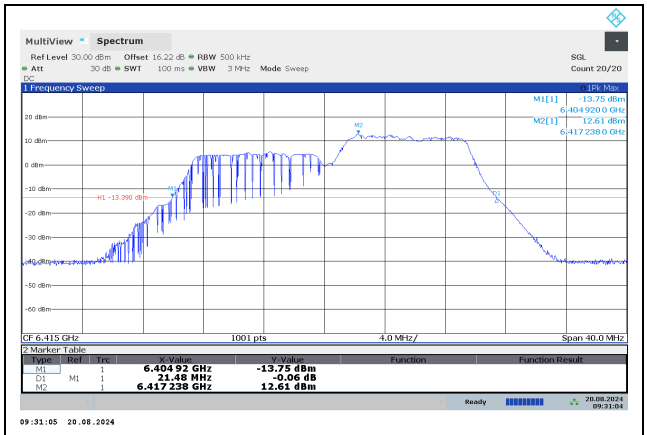

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	21.12	21.31	320	-298.69
Mid	6175	21.12	21.32	320	-298.68
High	6415	21.32	21.64	320	-298.36

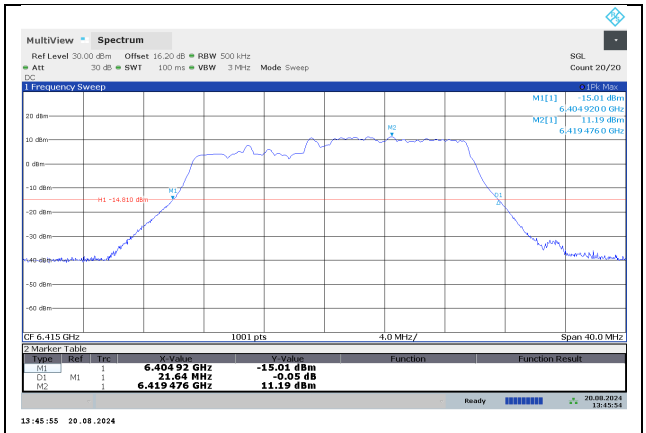

HIGH CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	23.12	22.72	320	-296.88
Mid	6175	22.98	22.76	320	-297.02
High	6415	22.72	22.96	320	-297.04

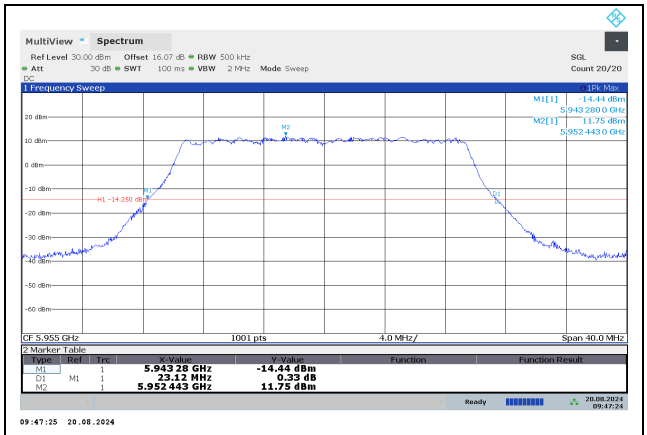

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.3. 802.11be EHT40 MODE 2TX IN THE UNII-5 BAND (SP LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5965	46.70	46.16	320	-273.30
Mid	6165	45.66	46.00	320	-274.00
High	6405	46.56	45.84	320	-273.44

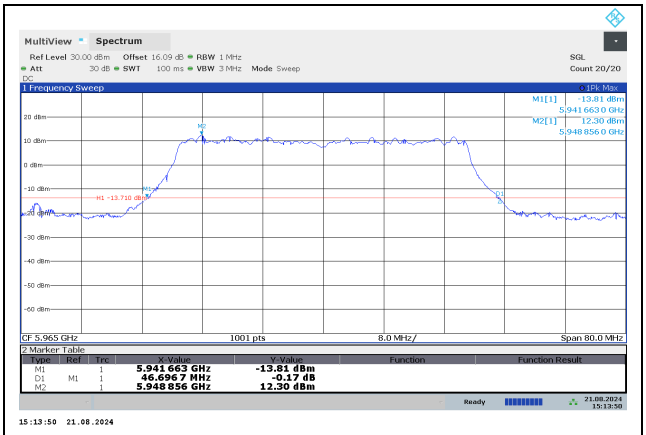

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.4. 802.11be EHT80 MODE 2TX IN THE UNII-5 BAND (SP LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5985	90.08	88.80	320	-229.92
Mid	6145	89.92	87.36	320	-230.08
High	6385	89.28	88.32	320	-230.72

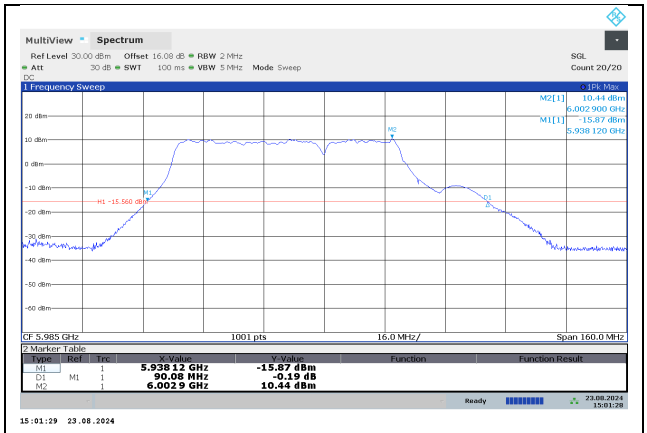

LOW CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5985	93.76	92.80	320	-226.24
Mid	6145	93.60	93.28	320	-226.40
High	6385	92.00	92.64	320	-227.36

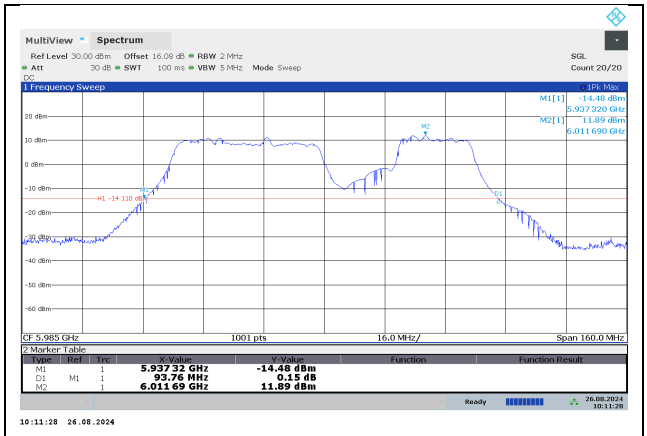

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5985	93.44	93.28	320	-226.56
Mid	6145	93.28	91.20	320	-226.72
High	6385	93.28	93.12	320	-226.72

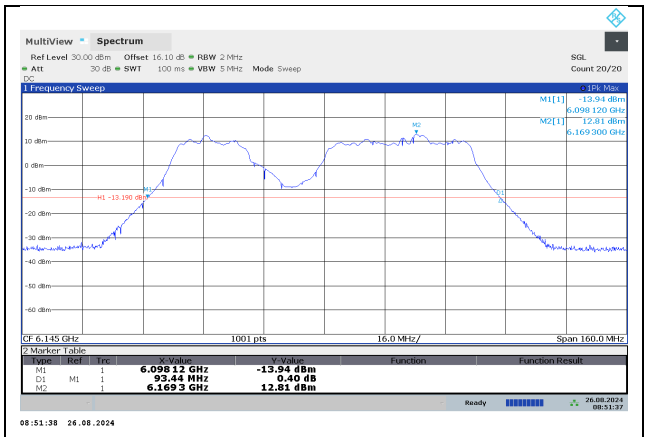

LOW CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5985	94.56	92.00	320	-225.44
Mid	6145	93.12	89.44	320	-226.88
High	6385	95.04	92.00	320	-224.96

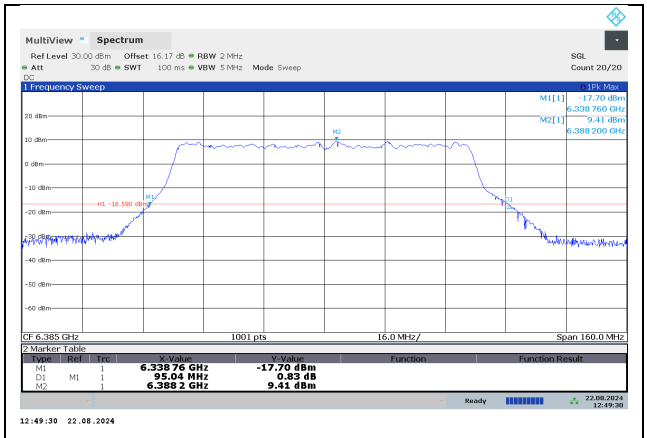

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.5. 802.11be EHT160 MODE 2TX IN THE UNII-5 BAND (SP LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	176.96	159.04	320	-143.04
Mid	6185	159.68	174.40	320	-145.60
High	6345	175.04	175.04	320	-144.96

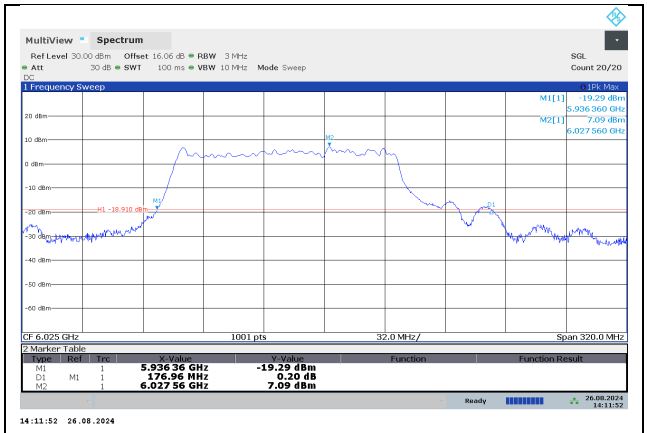

LOW CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	178.56	177.92	320	-141.44
Mid	6185	177.28	177.60	320	-142.40
High	6345	179.20	179.52	320	-140.48

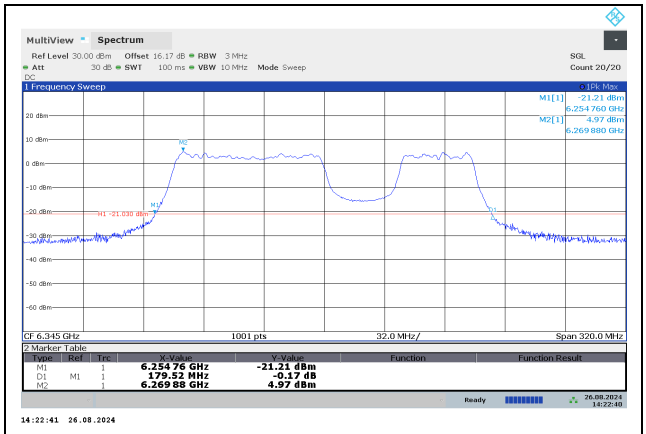

HIGH CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	175.68	174.08	320	-144.32
Mid	6185	176.96	174.08	320	-143.04
High	6345	178.88	174.40	320	-141.12

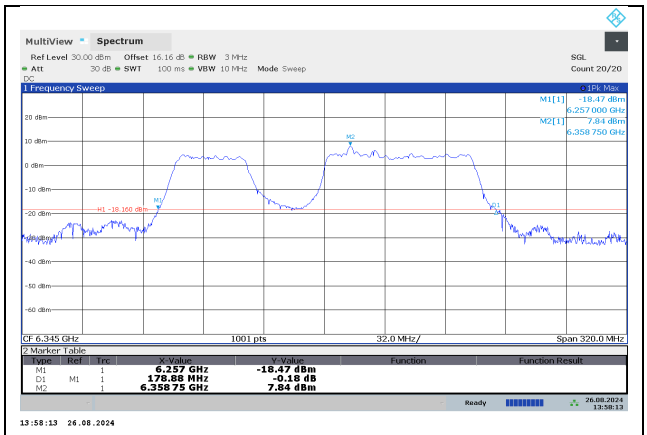

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	170.24	164.48	320	-149.76
Mid	6185	168.64	164.16	320	-151.36
High	6345	168.32	165.76	320	-151.68

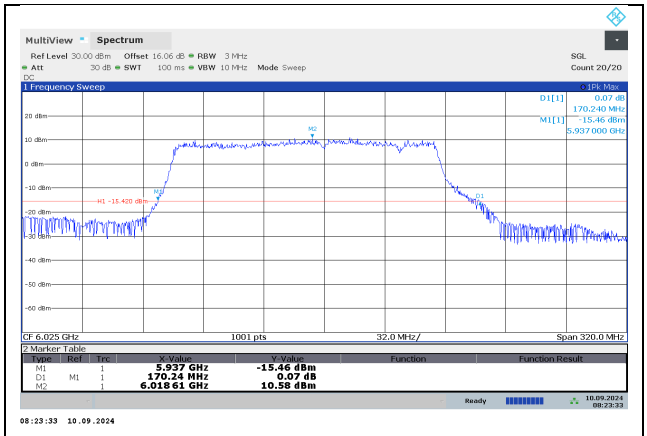

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	179.20	177.28	320	-140.80
Mid	6185	180.48	175.36	320	-139.52
High	6345	178.88	175.04	320	-141.12

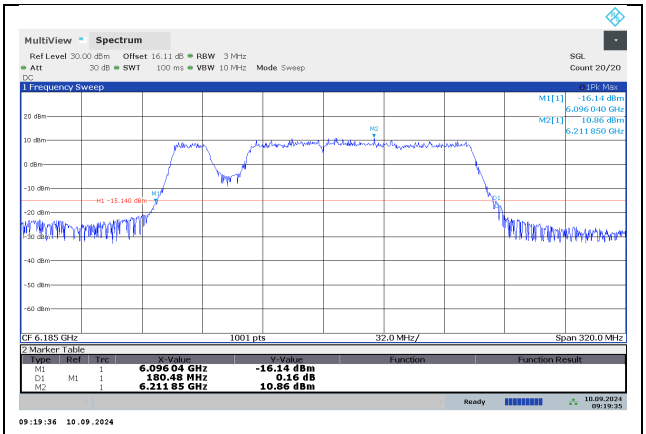

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	179.84	177.28	320	-140.16
Mid	6185	181.12	176.96	320	-138.88
High	6345	182.40	177.92	320	-137.60

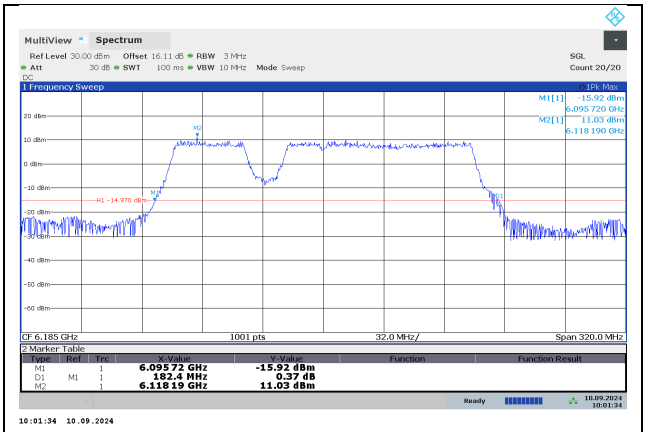

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	177.28	177.92	320	-142.08
Mid	6185	178.88	177.92	320	-141.12
High	6345	178.56	175.68	320	-141.44

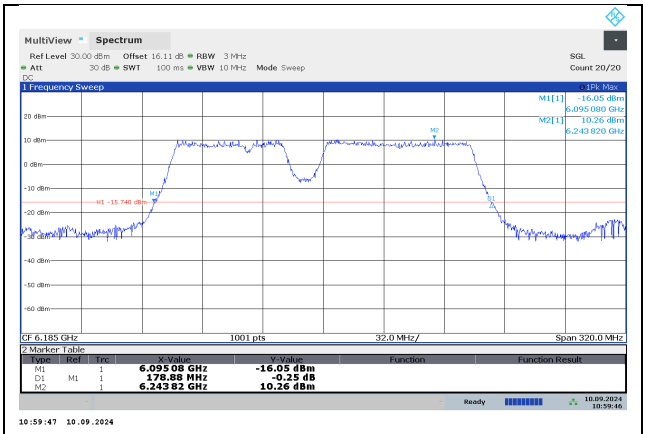

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	177.92	177.60	320	-142.08
Mid	6185	178.24	176.96	320	-141.76
High	6345	178.56	176.00	320	-141.44

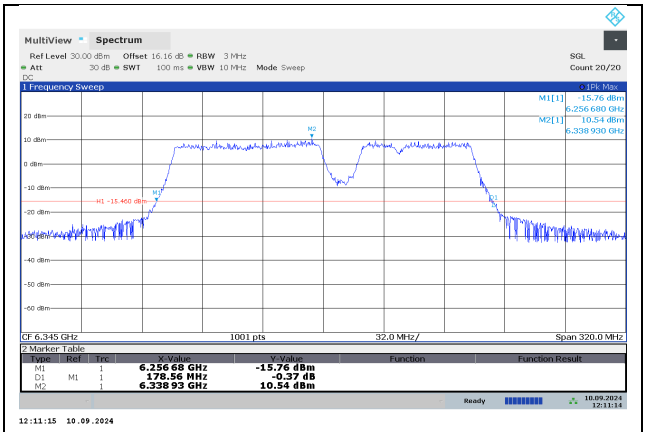

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	176.96	177.28	320	-142.72
Mid	6185	178.88	176.32	320	-141.12
High	6345	178.56	177.60	320	-141.44

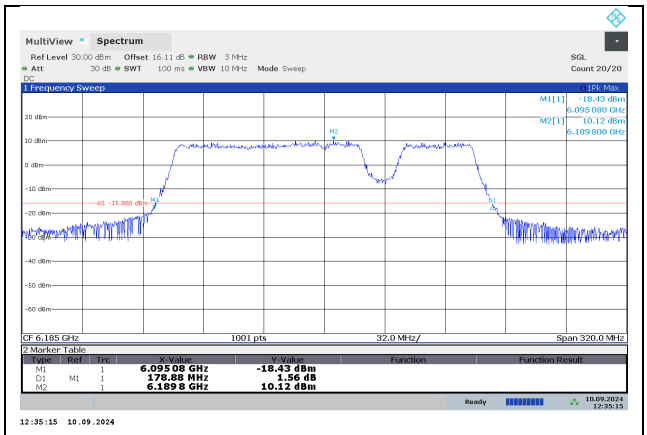

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	176.96	177.60	320	-142.40
Mid	6185	179.52	175.68	320	-140.48
High	6345	178.88	177.92	320	-141.12

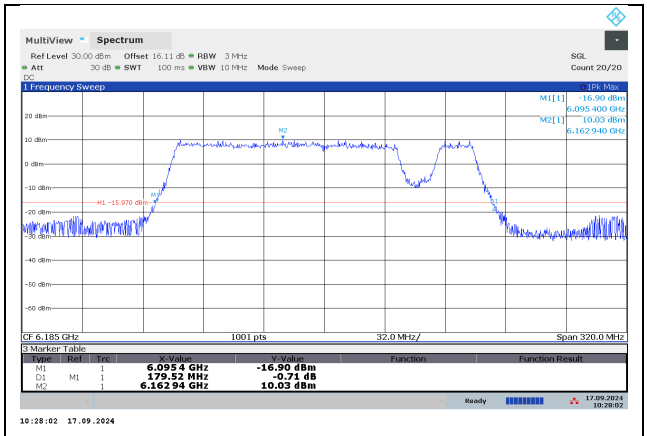

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	173.12	174.40	320	-145.60
Mid	6185	182.08	176.64	320	-137.92
High	6345	179.52	177.60	320	-140.48

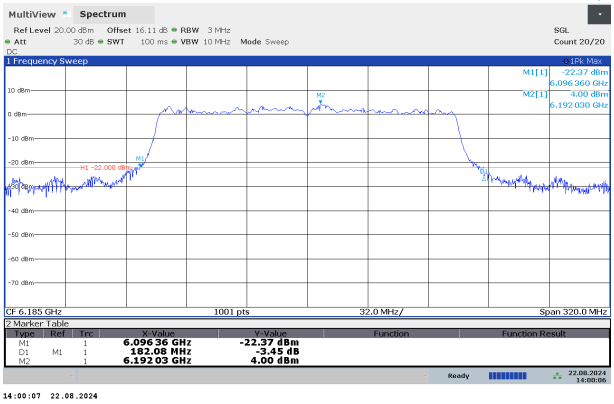

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.6. 802.11a MODE 2TX IN THE UNII-5 BAND (LPI HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	22.80	21.64	320	-297.20
Mid	6175	22.68	21.52	320	-297.32
High	6415	23.24	21.48	320	-296.76

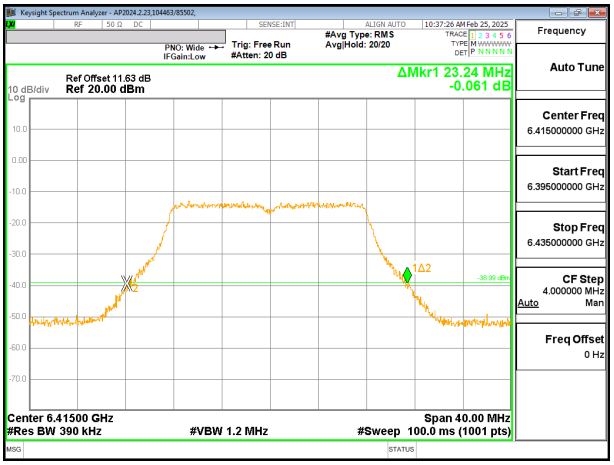

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.7. 802.11be EHT20 MODE 2TX IN THE UNII-5 BAND (LPI HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	20.72	20.60	320	-299.28
Mid	6175	18.60	18.36	320	-301.40
High	6415	20.76	20.72	320	-299.24

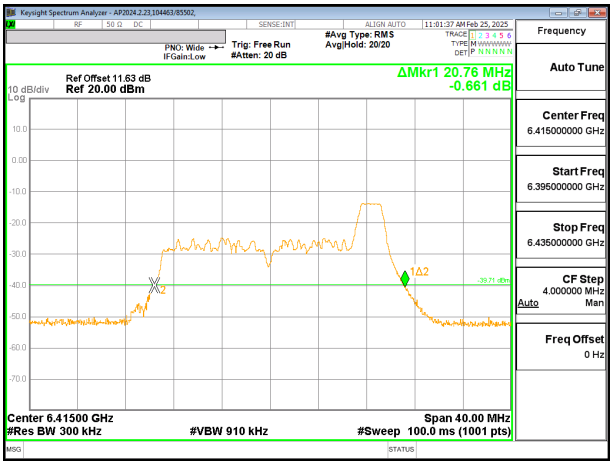

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	20.72	20.84	320	-299.16
Mid	6175	19.16	18.72	320	-300.84
High	6415	21.36	20.92	320	-298.64

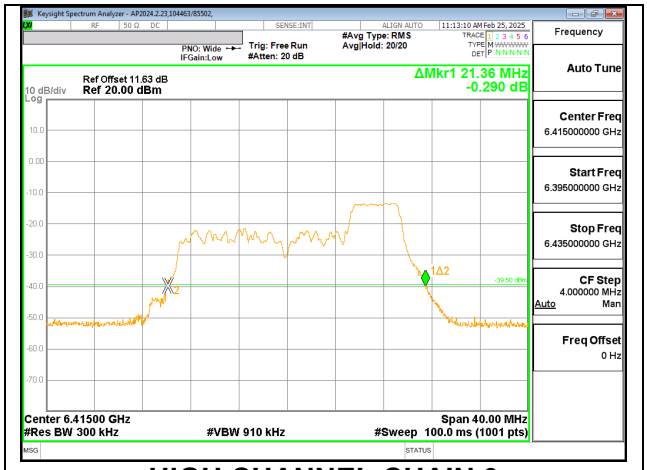

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	18.76	19.56	320	-300.44
Mid	6175	20.28	20.12	320	-299.72
High	6415	20.44	19.80	320	-299.56

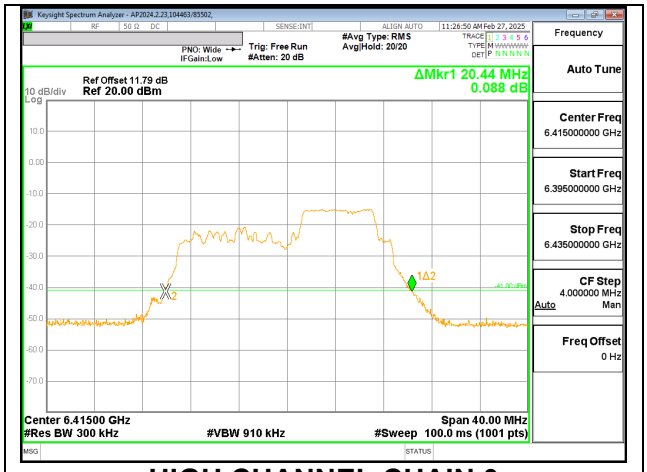

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	21.72	22.04	320	-297.96
Mid	6175	22.00	21.32	320	-298.00
High	6415	22.04	21.60	320	-297.96

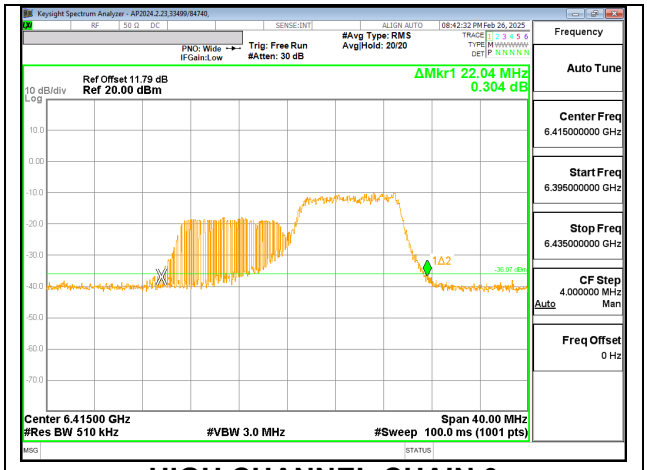

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	22.04	22.20	320	-297.80
Mid	6175	21.44	22.32	320	-297.68
High	6415	22.24	22.24	320	-297.76

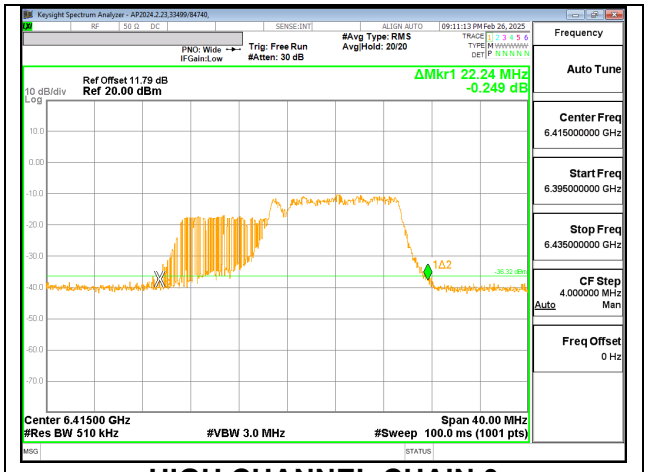

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5955	23.76	23.68	320	-296.24
Mid	6175	23.20	23.12	320	-296.80
High	6415	23.20	23.64	320	-296.36

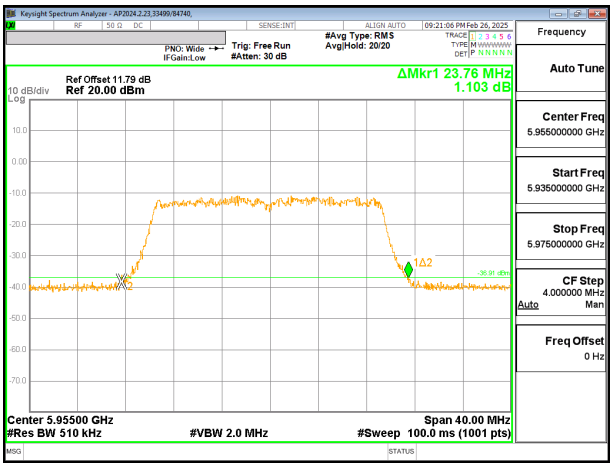

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.8. 802.11be EHT40 MODE 2TX IN THE UNII-5 BAND (LPI HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5965	46.00	46.96	320	-273.04
Mid	6165	46.80	47.20	320	-272.80
High	6405	46.08	46.08	320	-273.92

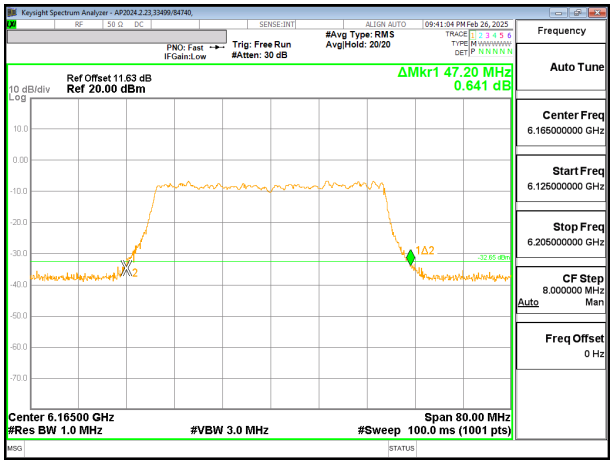

MID CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.9. 802.11be EHT80 MODE 2TX IN THE UNII-5 BAND (LPI HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5985	92.16	94.08	320	-225.92
Mid	6145	91.84	92.96	320	-227.04
High	6385	92.96	92.80	320	-227.04

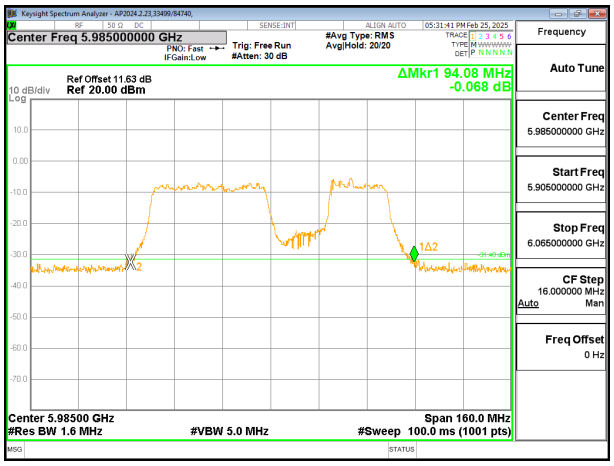

LOW CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5985	92.16	94.08	320	-225.92
Mid	6145	91.84	92.96	320	-227.04
High	6385	92.96	92.80	320	-227.04

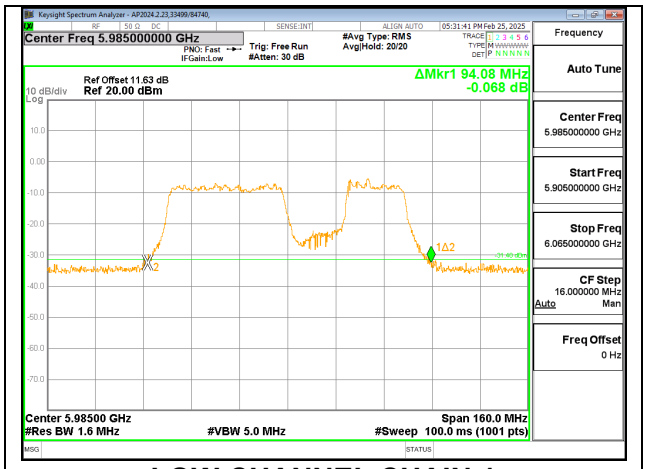

LOW CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5985	93.12	92.80	320	-226.88
Mid	6145	92.16	92.64	320	-227.36
High	6385	93.12	93.28	320	-226.72

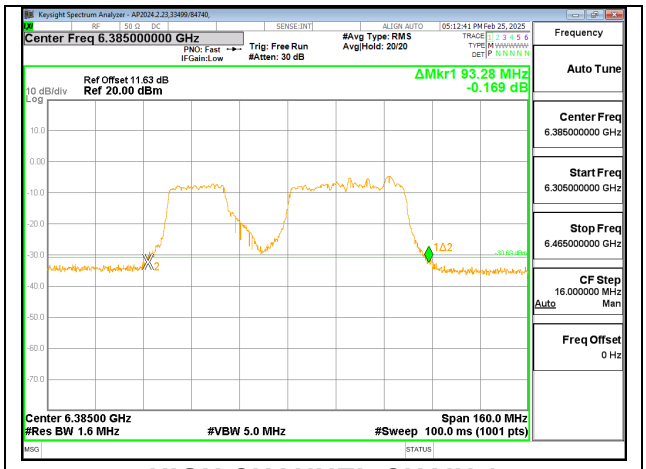

HIGH CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	5985	93.92	92.00	320	-226.08
Mid	6145	92.96	89.76	320	-227.04
High	6385	94.40	90.56	320	-225.60

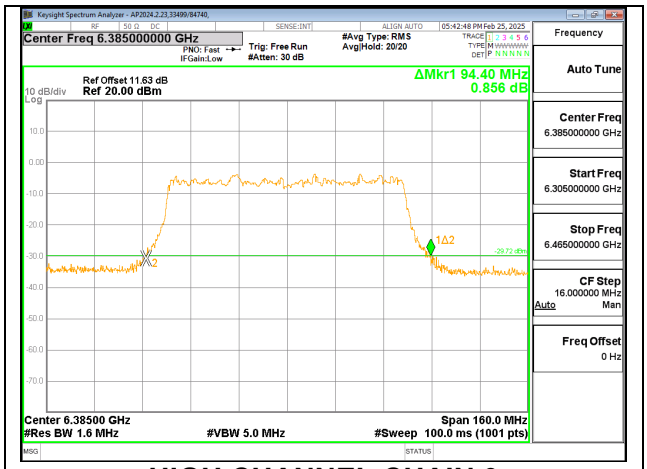

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.10. 802.11be EHT160 MODE 2TX IN THE UNII-5 BAND (LPI HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	177.60	162.56	320	-142.40
Mid	6185	169.60	163.20	320	-150.40
High	6345	163.52	182.08	320	-137.92

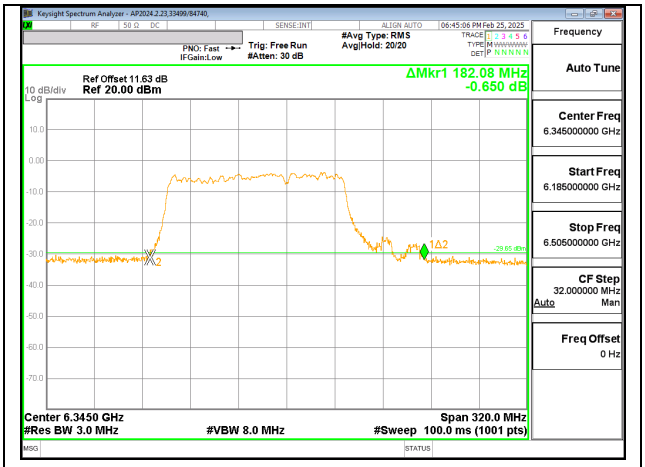

HIGH CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	178.56	180.48	320	-139.52
Mid	6185	177.60	178.56	320	-141.44
High	6345	180.80	178.56	320	-139.20

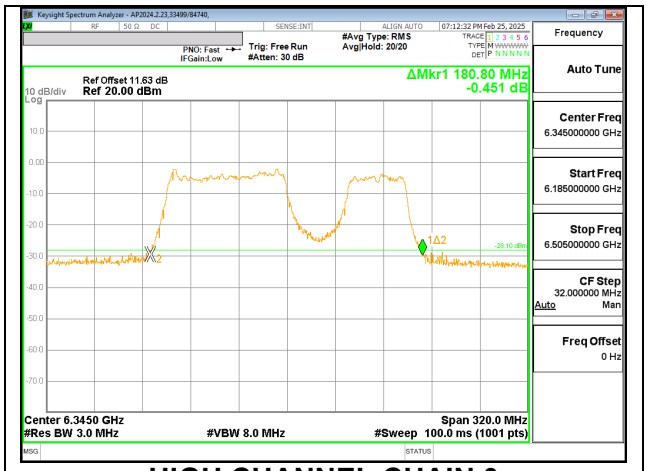

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	182.08	176.00	320	-137.92
Mid	6185	178.56	175.68	320	-141.44
High	6345	177.92	175.36	320	-142.08

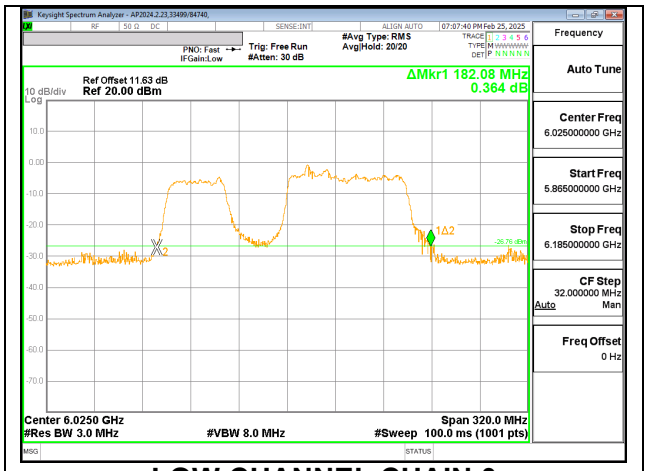

LOW CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	165.44	167.04	320	-152.96
Mid	6185	171.20	162.56	320	-148.80
High	6345	166.40	165.76	320	-153.60

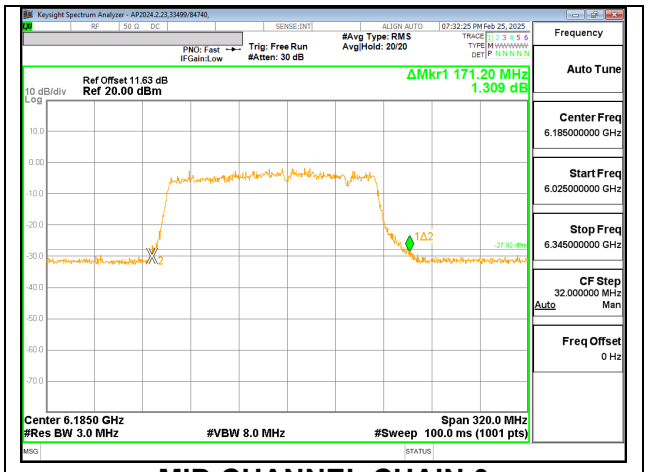

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	185.92	176.64	320	-134.08
Mid	6185	180.48	176.32	320	-139.52
High	6345	180.16	176.64	320	-139.84

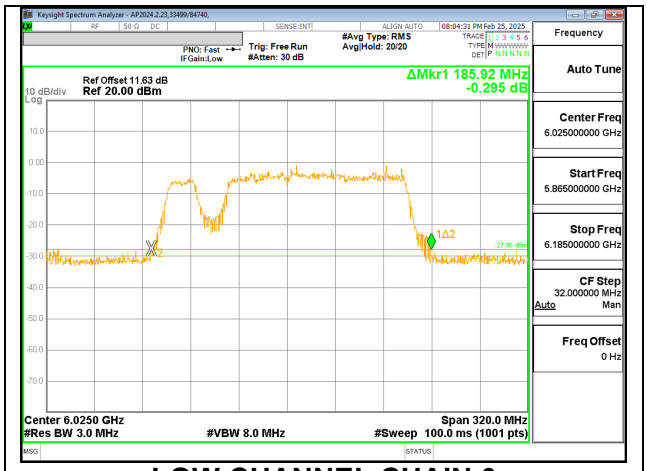

LOW CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	183.68	176.96	320	-136.32
Mid	6185	179.84	180.48	320	-139.52
High	6345	181.76	179.52	320	-138.24

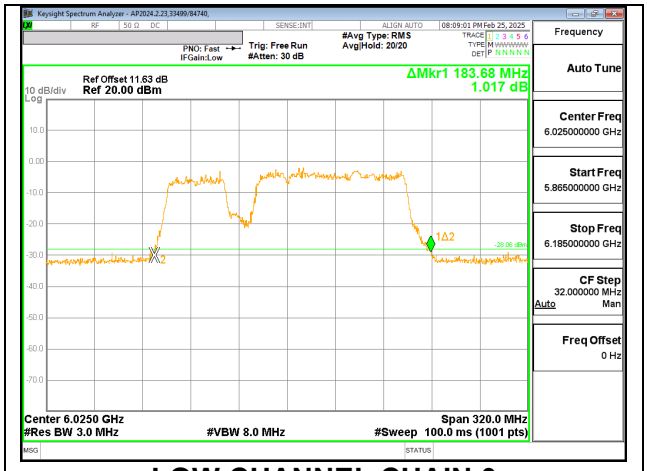

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	175.68	177.92	320	-142.08
Mid	6185	178.56	177.60	320	-141.44
High	6345	178.24	174.72	320	-141.76

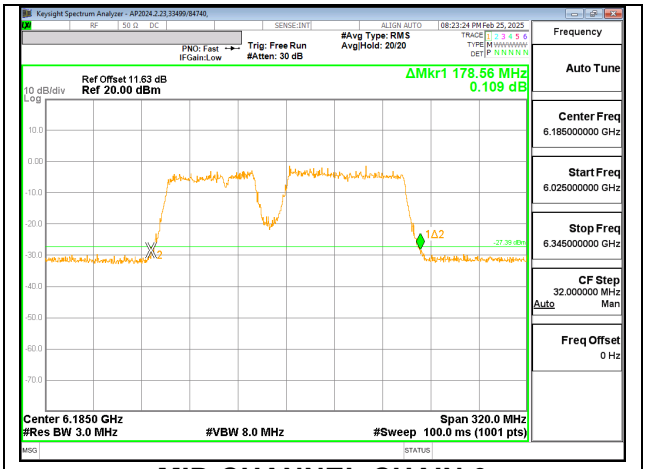

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	189.12	181.76	320	-130.88
Mid	6185	179.52	179.52	320	-140.48
High	6345	181.44	177.60	320	-138.56

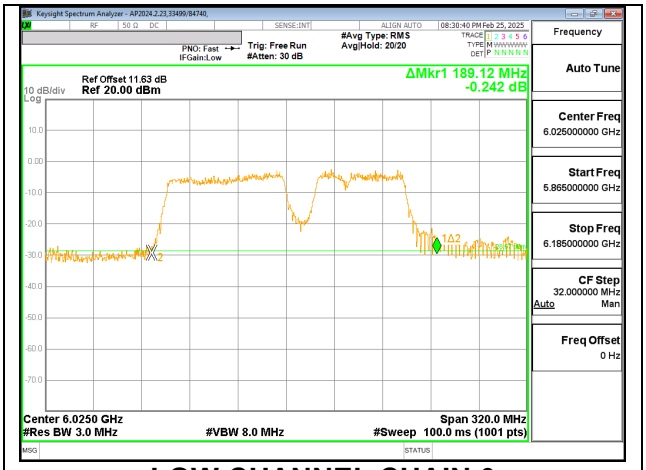

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	177.92	178.88	320	-141.12
Mid	6185	176.32	174.40	320	-143.68
High	6345	177.28	175.68	320	-142.72

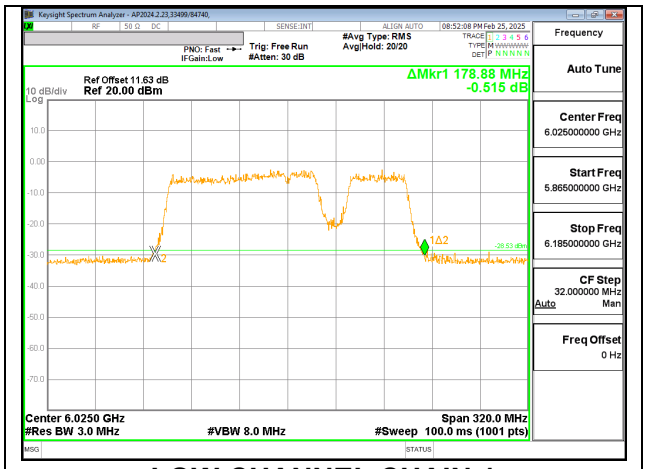

LOW CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	180.16	178.88	320	-139.84
Mid	6185	177.92	176.64	320	-142.08
High	6345	178.88	176.00	320	-141.12

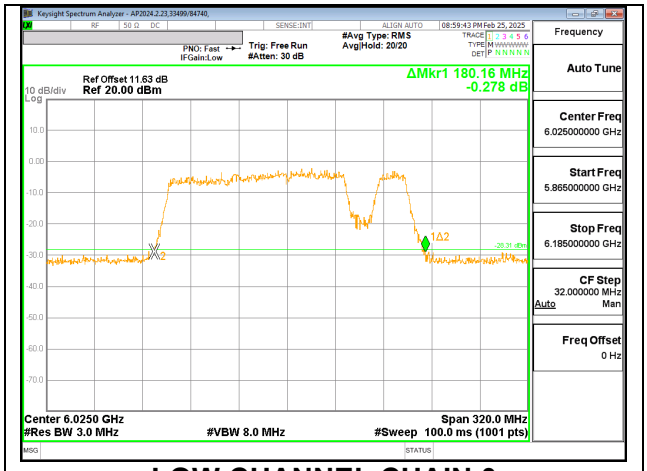

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6025	176.32	178.88	320	-141.12
Mid	6185	178.88	174.72	320	-141.12
High	6345	176.96	176.96	320	-143.04

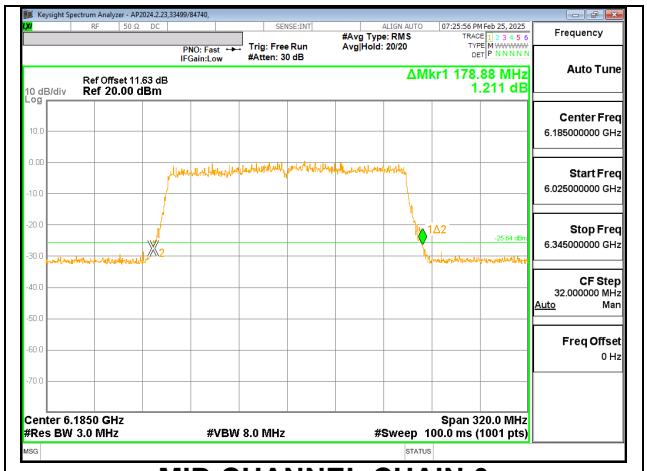

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.11. 802.11a MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6435	21.84	21.24	320	-298.16
Mid	6475	22.20	21.40	320	-297.80
High	6515	21.72	21.04	320	-298.28

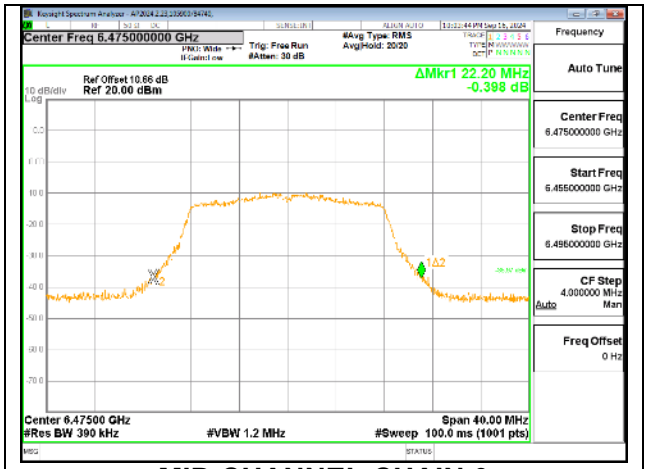

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.12. 802.11be EHT20 MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6435	20.76	21.72	320	-298.28
Mid	6475	18.52	18.20	320	-301.48
High	6515	20.96	20.48	320	-299.04

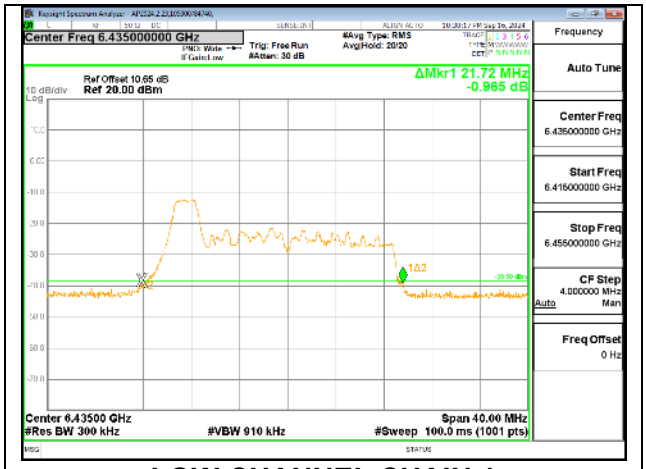

LOW CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6435	20.96	21.40	320	-298.60
Mid	6475	19.00	18.52	320	-301.00
High	6515	21.64	21.00	320	-298.36

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6435	19.24	19.92	320	-300.08
Mid	6475	20.28	19.76	320	-299.72
High	6515	20.08	19.32	320	-299.92

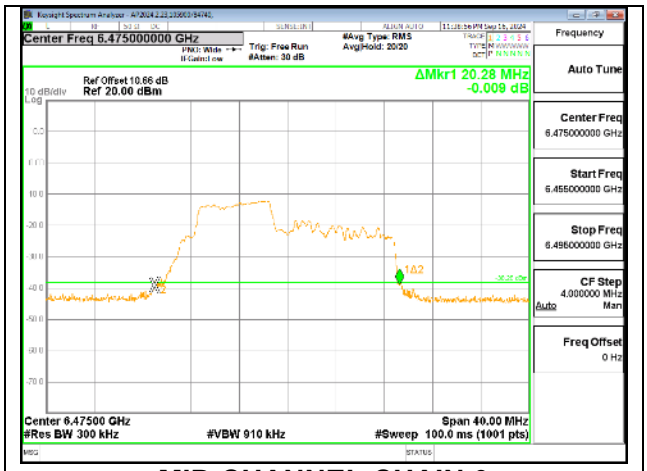

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6435	20.80	21.20	320	-298.80
Mid	6475	20.96	21.48	320	-298.52
High	6515	21.36	20.72	320	-298.64

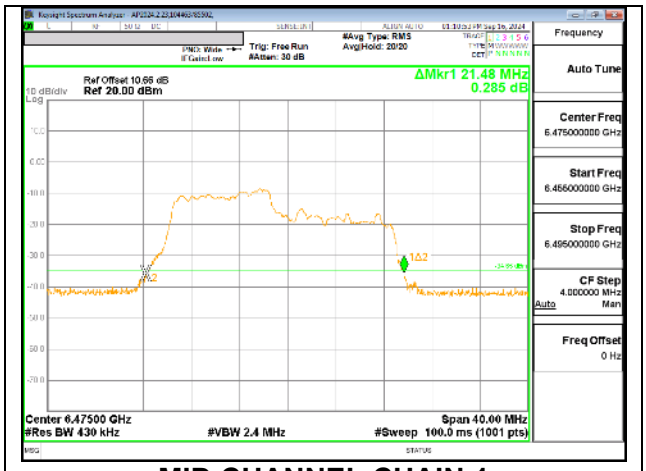

MID CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6435	20.80	21.00	320	-299.00
Mid	6475	20.88	20.64	320	-299.12
High	6515	21.24	20.96	320	-298.76

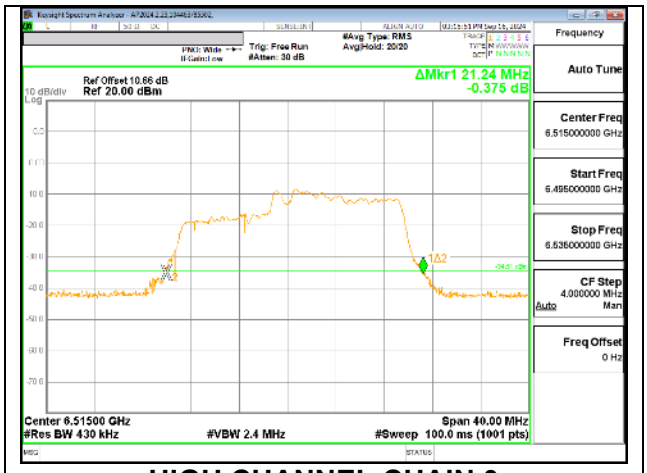

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6435	22.56	21.96	320	-297.44
Mid	6475	22.04	21.96	320	-297.96
High	6515	22.20	22.20	320	-297.80

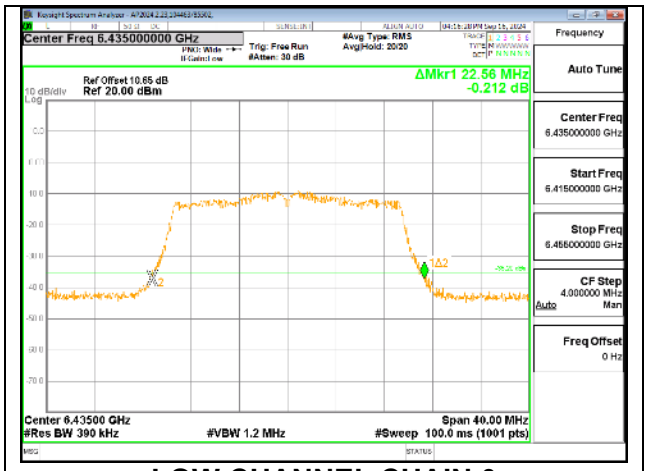

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.13. 802.11be EHT40 MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6445	45.84	45.76	320	-274.16
Mid	6485	45.04	44.80	320	-274.96
High	6525	45.76	46.24	320	-273.76

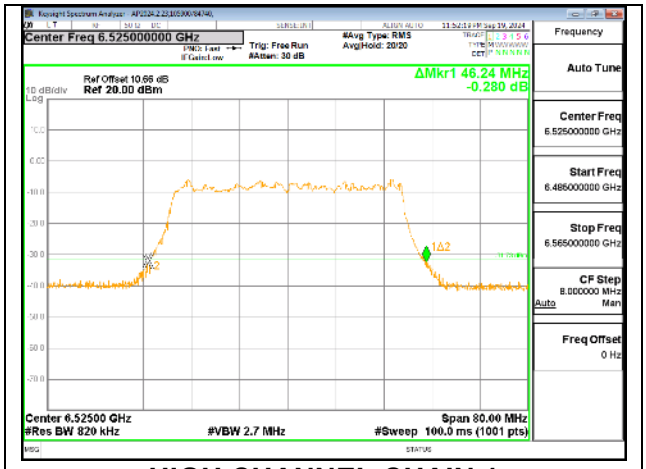

HIGH CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.14. 802.11be EHT80 MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6465	90.40	89.92	320	-229.60
High	6545	90.56	88.48	320	-229.44

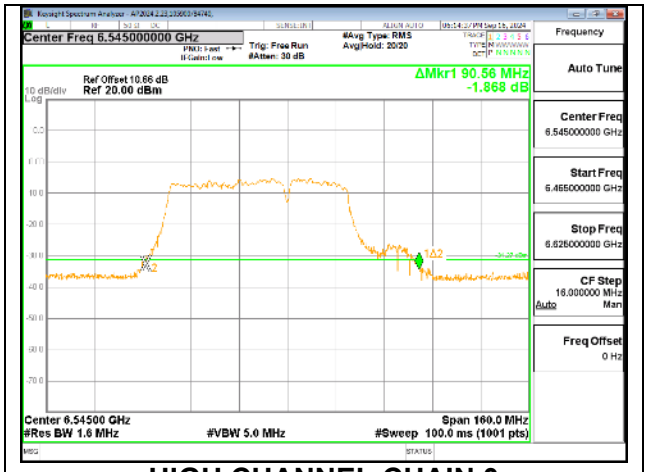

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6465	89.28	90.88	320	-229.12
High	6545	88.16	87.84	320	-231.84

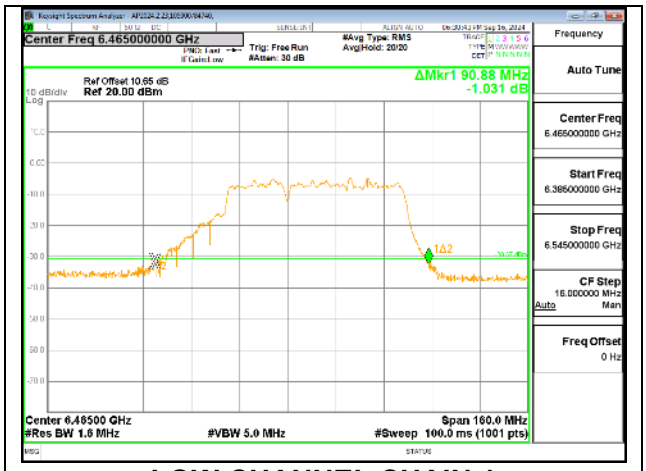

LOW CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6465	90.88	91.52	320	-228.48
High	6545	92.48	92.48	320	-227.52

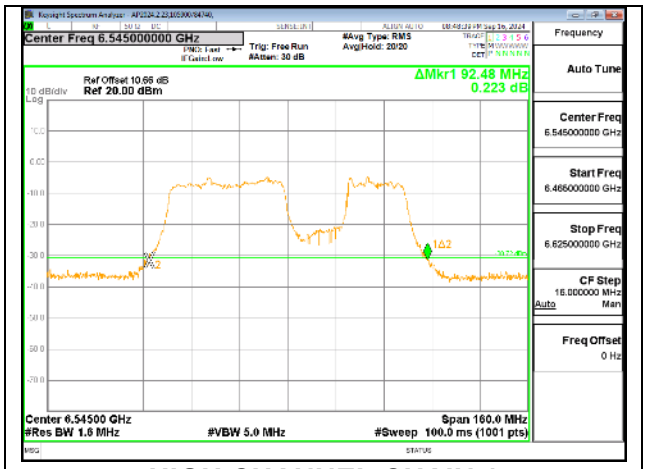

HIGH CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6465	92.80	92.00	320	-227.20
High	6545	93.12	92.16	320	-226.88

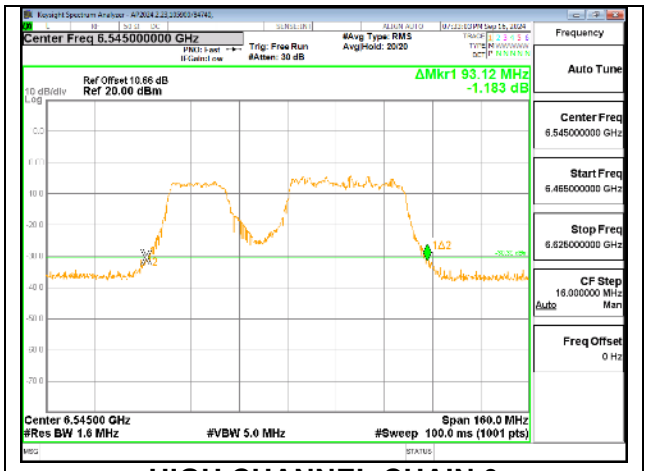

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6465	92.64	92.16	320	-227.36
High	6545	94.72	92.48	320	-225.28

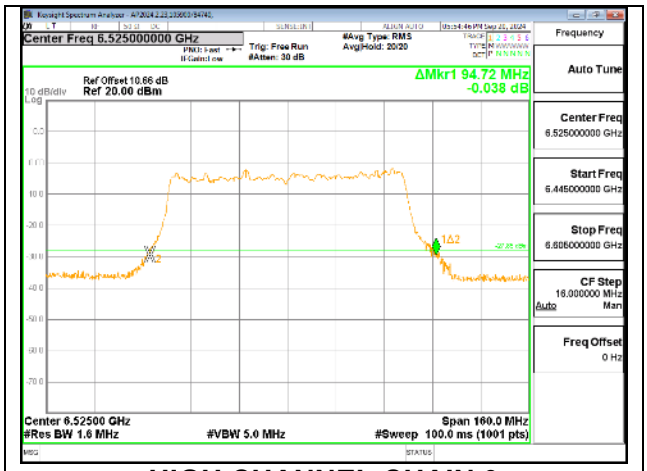

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.15. 802.11be EHT160 MODE 2TX IN THE UNII-6 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	161.60	161.28	320	-158.40

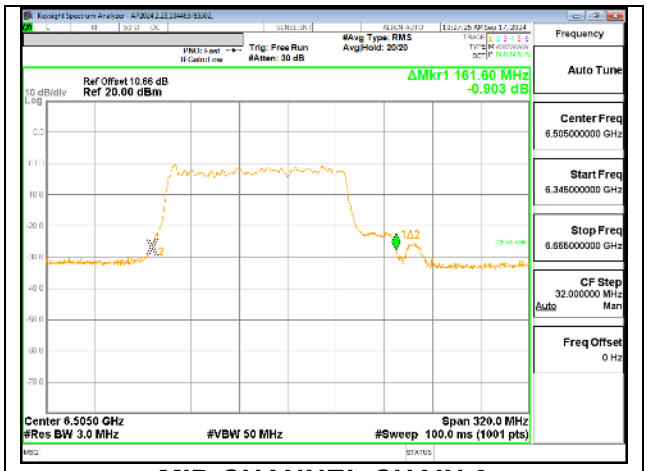

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	170.24	141.44	320	-149.76

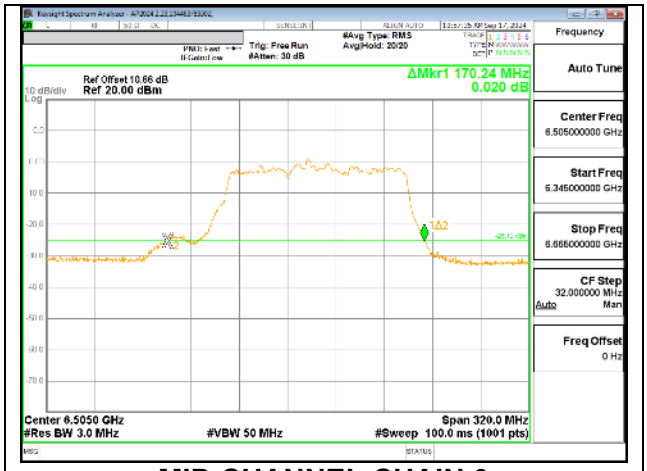

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	181.12	180.48	320	-138.88

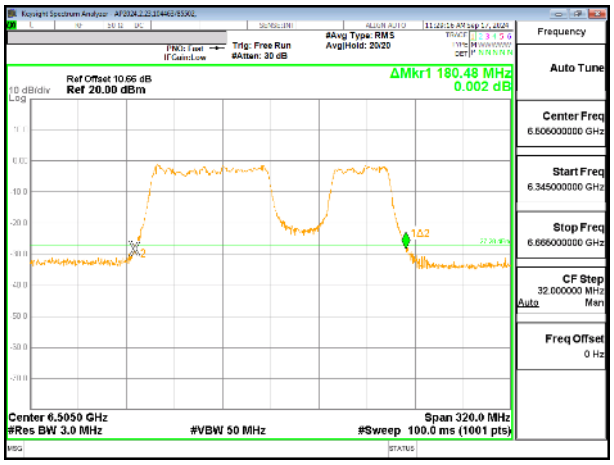

MID CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	178.56	174.72	320	-141.44

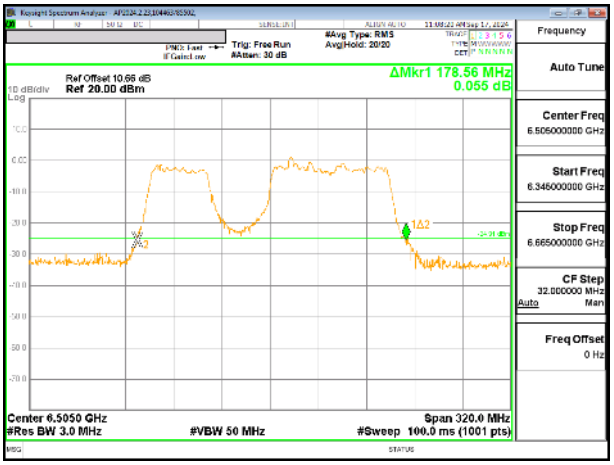

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS LOW)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	168.64	166.72	320	-151.36

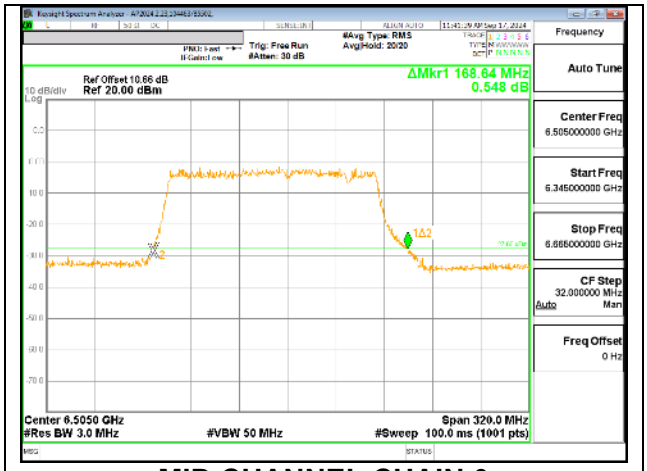

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS HIGH)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	170.56	166.40	320	-149.44

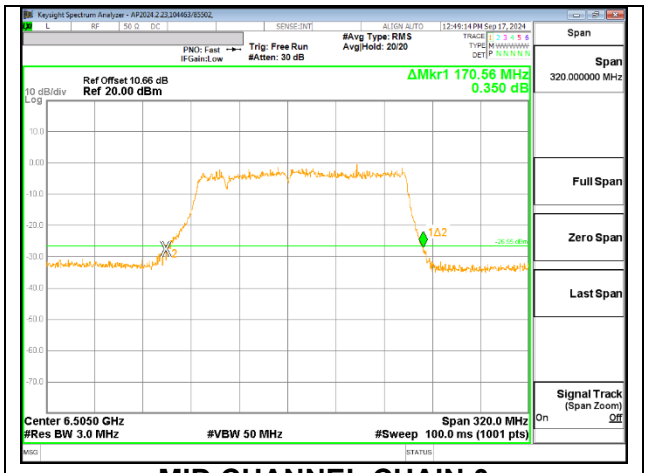

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	178.88	176.64	320	-141.12

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	180.16	177.28	320	-139.84

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	179.20	177.28	320	-140.80

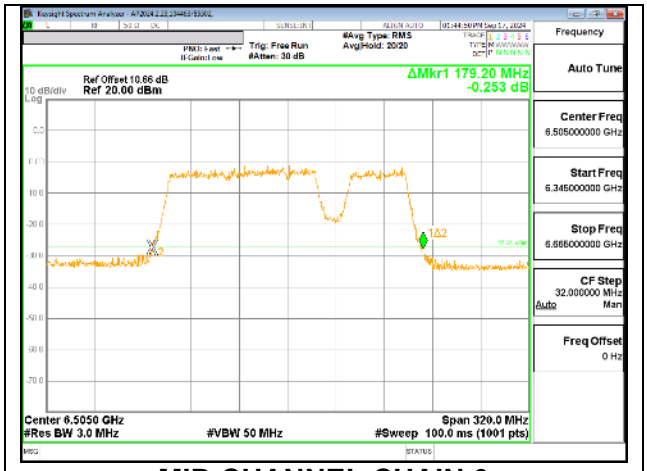

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	181.12	176.96	320	-138.88

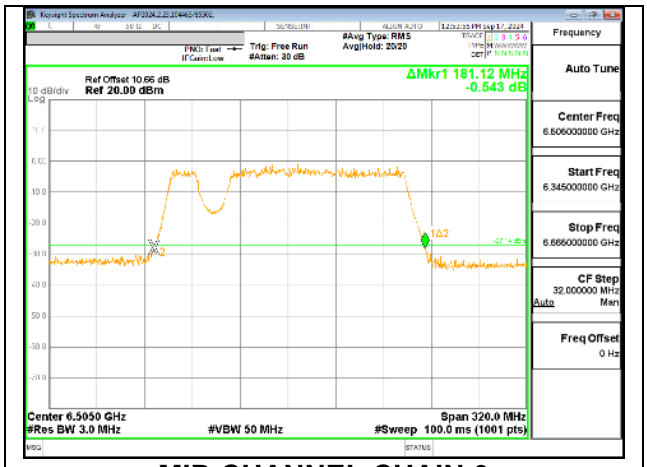

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	181.76	178.56	320	-138.24

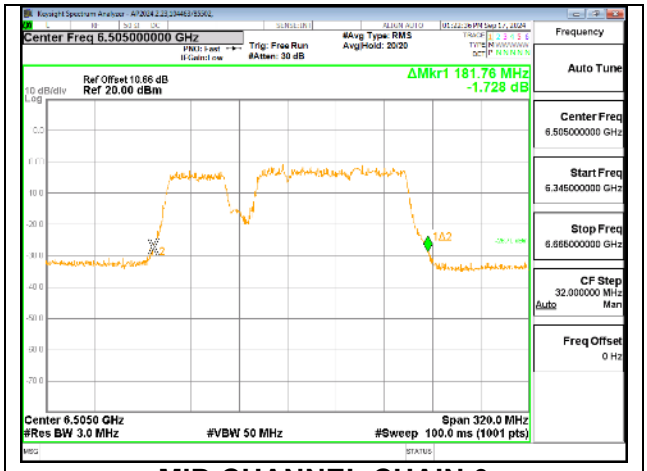

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	178.24	176.64	320	-141.76

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6505	177.28	177.92	320	-142.08

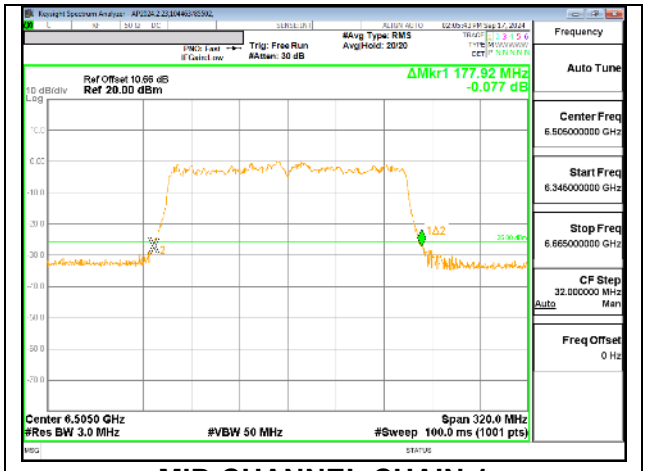

MID CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS LOW)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6425	323.84	324.48	320	4.48
High	6585	333.44	323.84	320	13.44

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.16. 802.11a MODE 2TX IN THE UNII-7 BAND (SP LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	22.92	22.32	320	-297.08
Mid	6715	22.96	22.20	320	-297.04
High	6855	22.68	22.08	320	-297.32

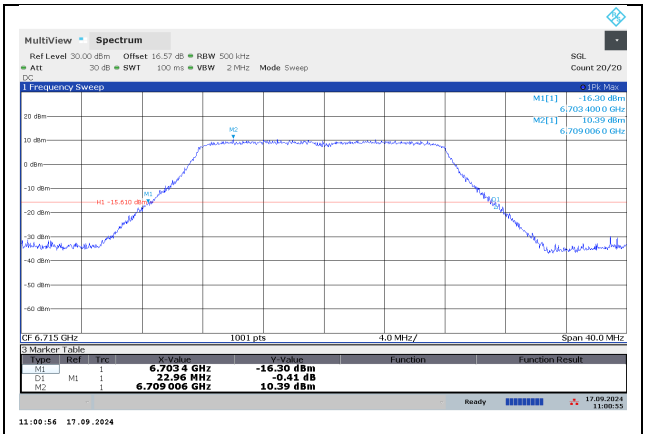

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.17. 802.11be EHT20 MODE 2TX IN THE UNII-7 BAND (SP LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	20.32	20.28	320	-299.68
Mid	6715	18.52	18.24	320	-301.48
High	6855	20.68	20.32	320	-299.32

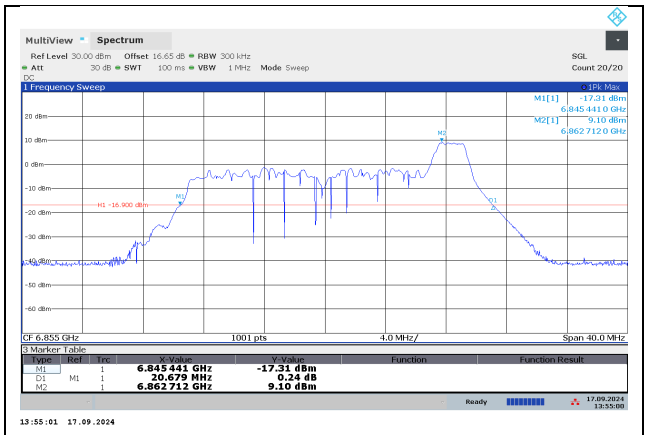

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	20.52	20.56	320	-299.44
Mid	6715	18.96	18.44	320	-301.04
High	6855	21.12	20.68	320	-298.88

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	19.24	19.04	320	-300.76
Mid	6715	19.20	19.52	320	-300.48
High	6855	20.08	19.00	320	-299.92

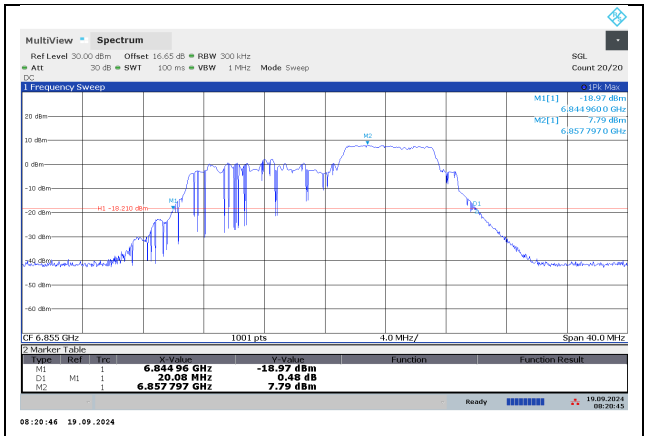

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	21.24	21.44	320	-298.56
Mid	6715	20.96	21.32	320	-298.68
High	6855	21.44	20.88	320	-298.56

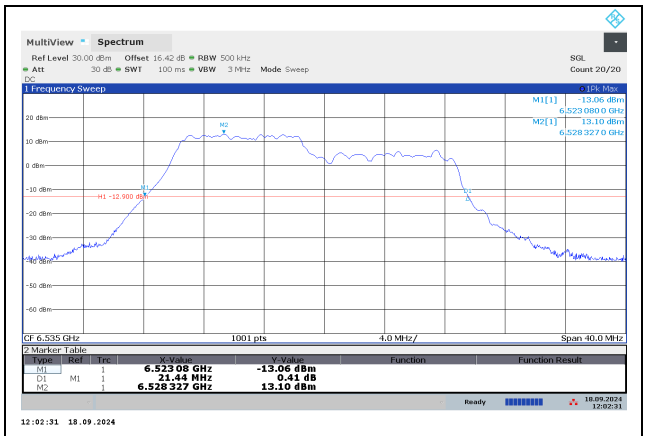

LOW CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	21.08	21.28	320	-298.72
Mid	6715	21.00	21.36	320	-298.64
High	6855	21.60	21.56	320	-298.40

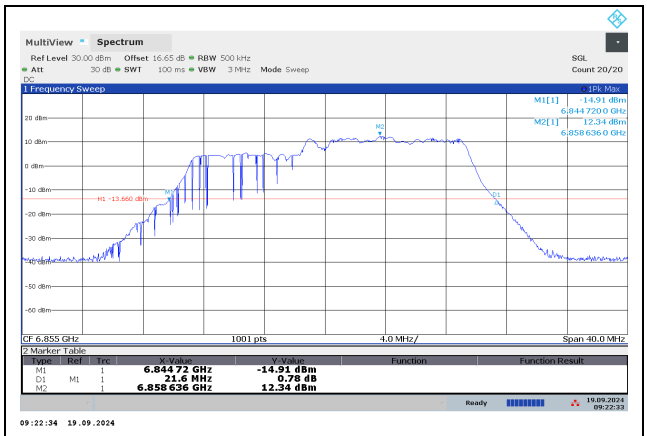

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	22.96	23.64	320	-296.36
Mid	6715	23.08	22.80	320	-296.92
High	6855	22.76	22.92	320	-297.08

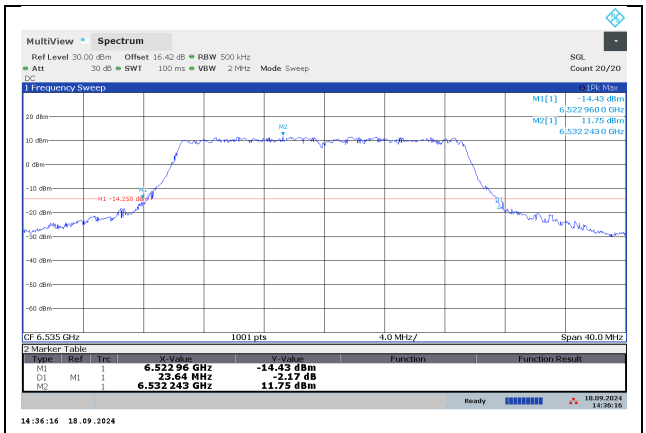

LOW CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.18. 802.11be EHT40 MODE 2TX IN THE UNII-7 BAND (SP LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6565	46.08	45.44	320	-273.92
Mid	6685	46.40	46.16	320	-273.60
High	6845	46.00	45.6	320	-274.00

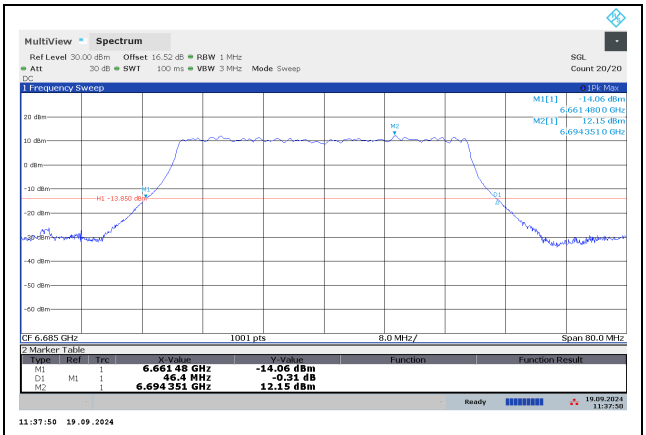

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.19. 802.11be EHT80 MODE 2TX IN THE UNII-7 BAND (SP LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6625	86.40	86.24	320	-233.60
Mid	6705	84.00	84.64	320	-235.36
High	6785	86.24	88.00	320	-232.00

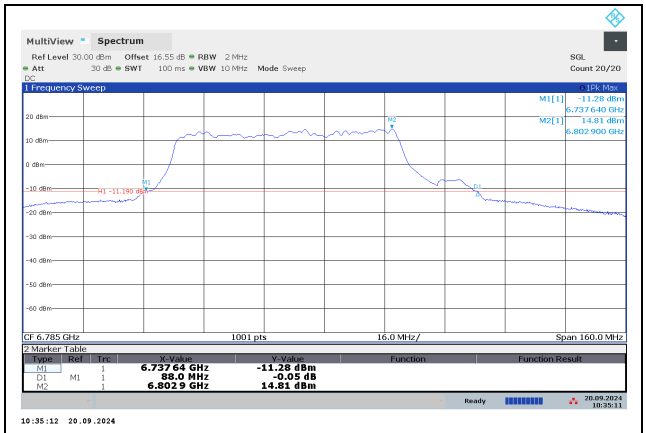

HIGH CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6625	82.24	84.64	320	-235.36
Mid	6705	82.56	84.80	320	-235.20
High	6785	82.24	85.60	320	-234.40

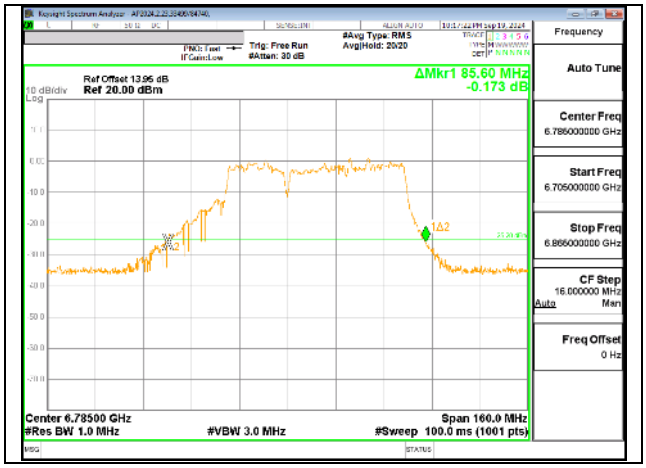

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

HIGH CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6625	93.44	93.92	320	-226.08
Mid	6705	93.28	92.96	320	-226.72
High	6785	94.24	92.96	320	-225.76

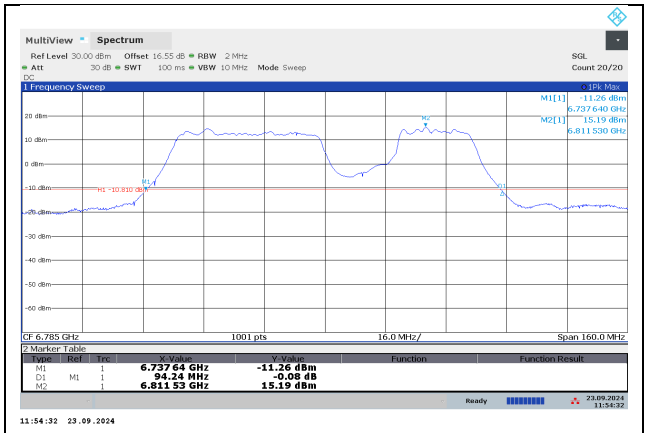

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6625	93.92	92.96	320	-226.08
Mid	6705	95.60	93.28	320	-224.40
High	6785	93.60	92.80	320	-226.40

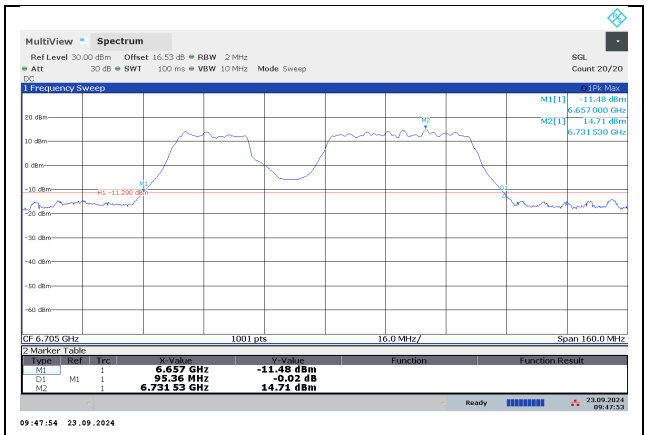

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6625	96.16	93.44	320	-223.84
Mid	6705	95.84	94.08	320	-224.16
High	6785	96.48	91.84	320	-223.52

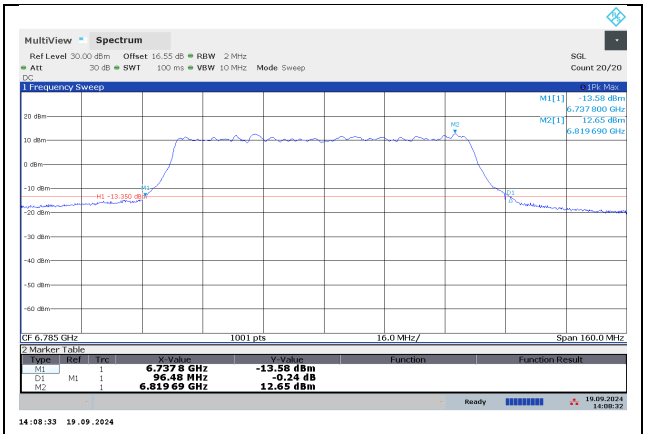

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.20. 802.11be EHT160 MODE 2TX IN THE UNII-7 BAND (SP LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	146.24	144.00	320	-173.76

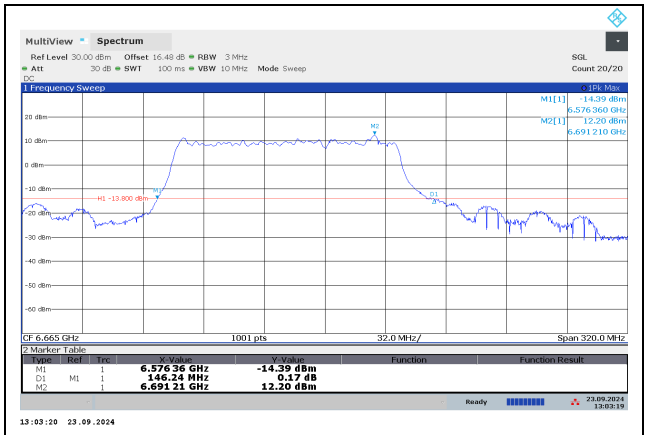

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	143.36	142.08	320	-176.64

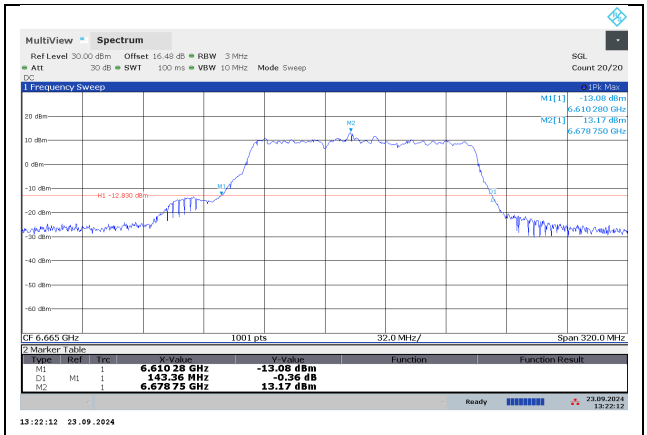

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	179.84	176.96	320	-140.16

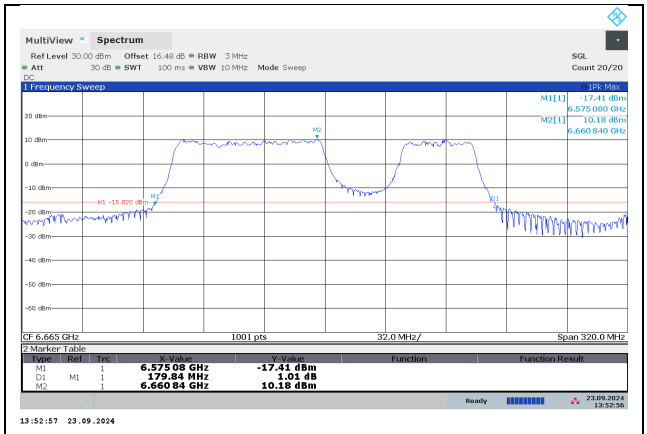

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	173.44	174.08	320	-145.92

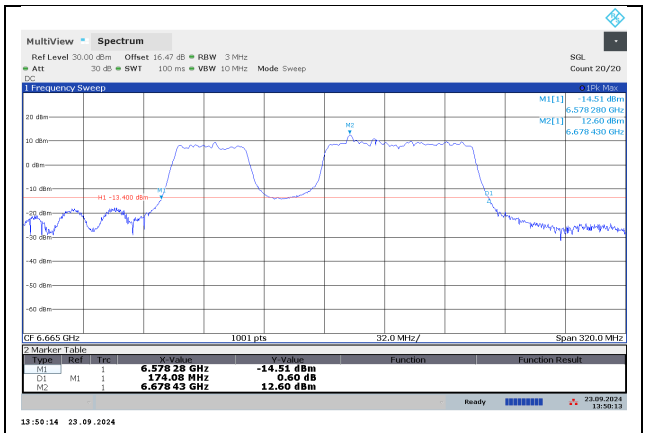

MID CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	177.28	176.96	320	-142.72

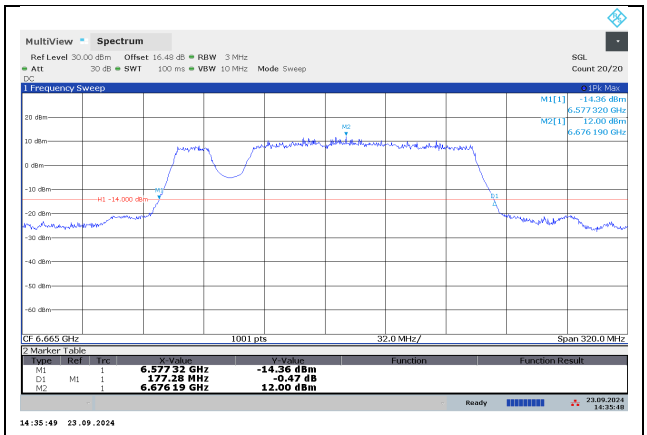

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	179.52	175.68	320	-140.48

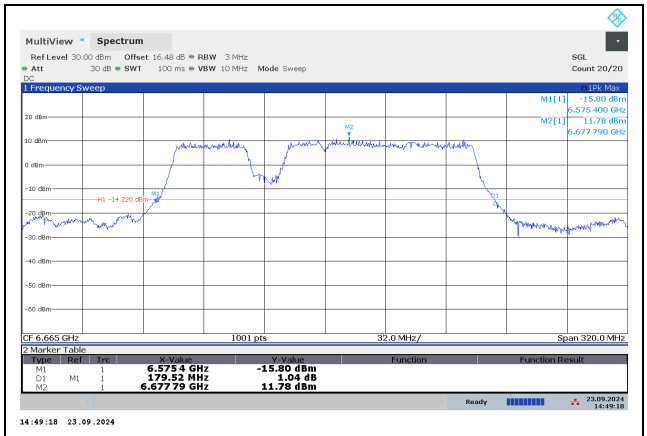

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	176.64	177.28	320	-142.72

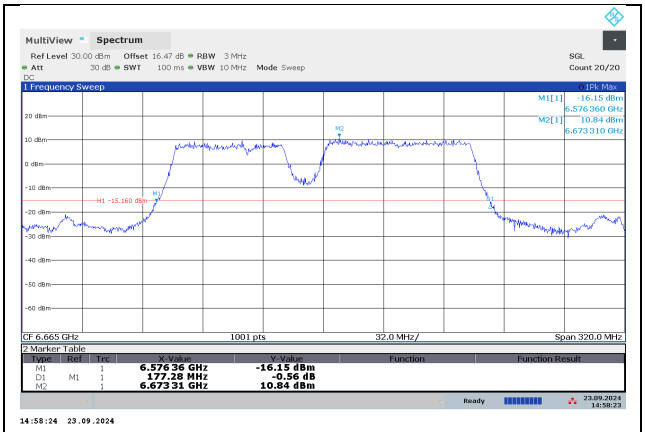

MID CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS LOW)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	164.80	166.72	320	-153.28

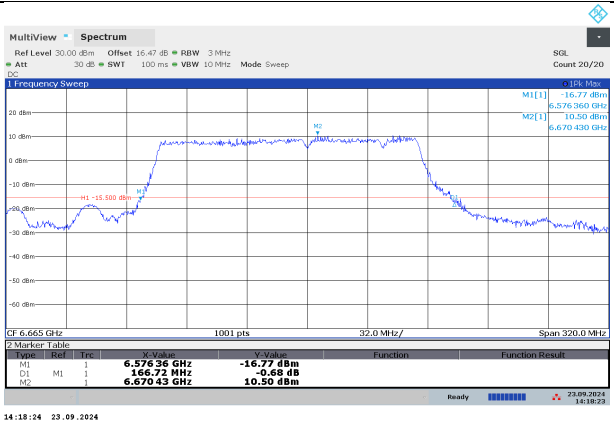

MID CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS HIGH)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	166.08	168.00	320	-152.00

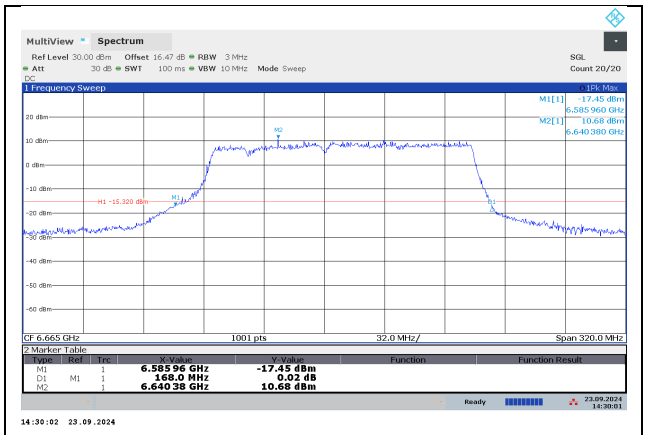

MID CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	178.24	175.36	320	-141.76

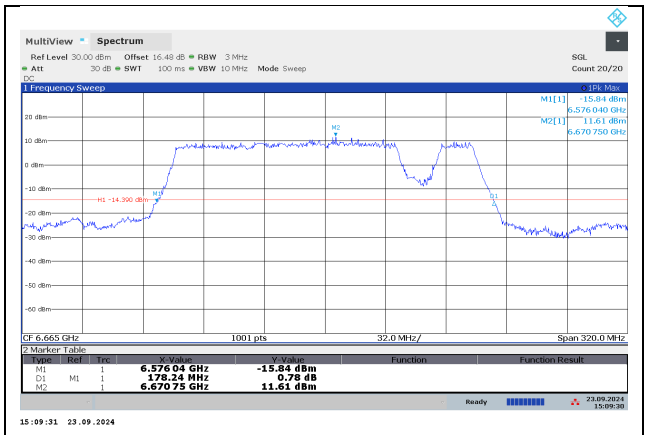

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	179.84	176.96	320	-140.16

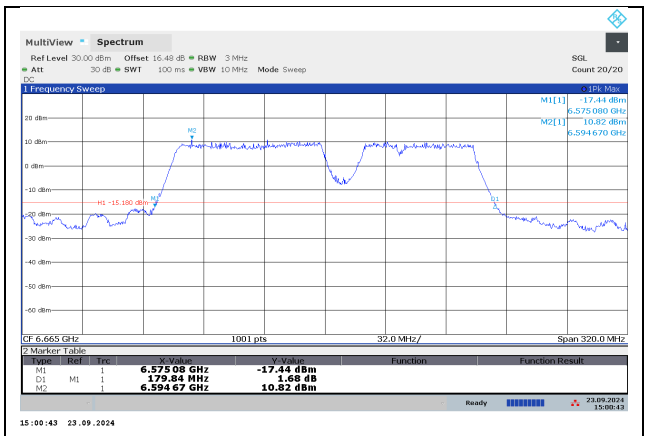

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	177.92	176.96	320	-142.08

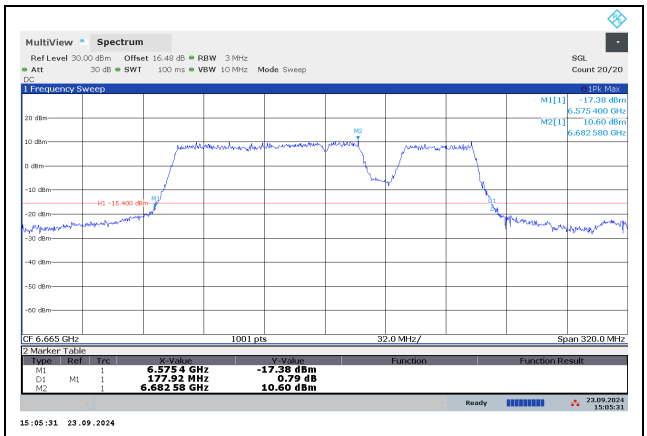

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	184.96	181.12	320	-135.04

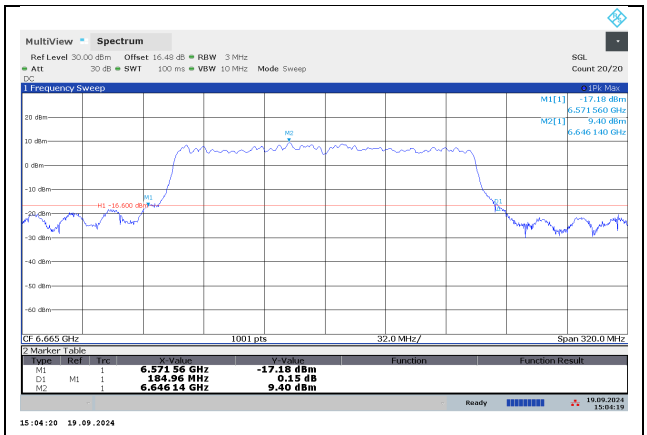

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.21. 802.11a MODE 2TX IN THE UNII-7 BAND (LPI HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	23.08	22.80	320	-296.92
Mid	6695	25.04	23.20	320	-294.96
High	6855	23.72	22.92	320	-296.28

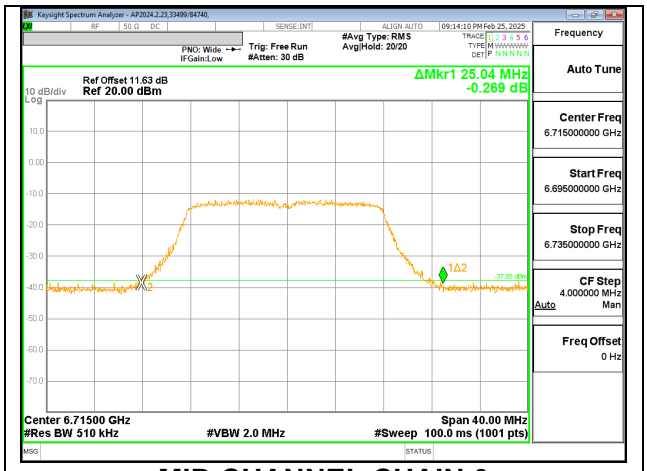

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.22. 802.11be EHT20 MODE 2TX IN THE UNII-7 BAND (LPI HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	20.88	21.04	320	-298.96
Mid	6695	18.48	18.52	320	-301.48
High	6855	21.28	20.60	320	-298.72

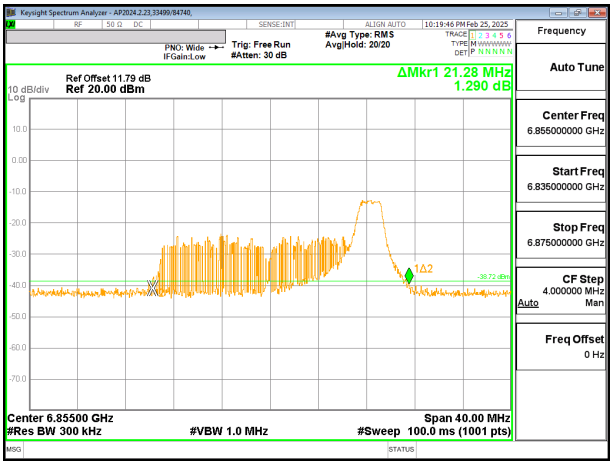

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	21.24	21.64	320	-298.36
Mid	6695	18.96	20.64	320	-299.36
High	6855	22.00	21.00	320	-298.00

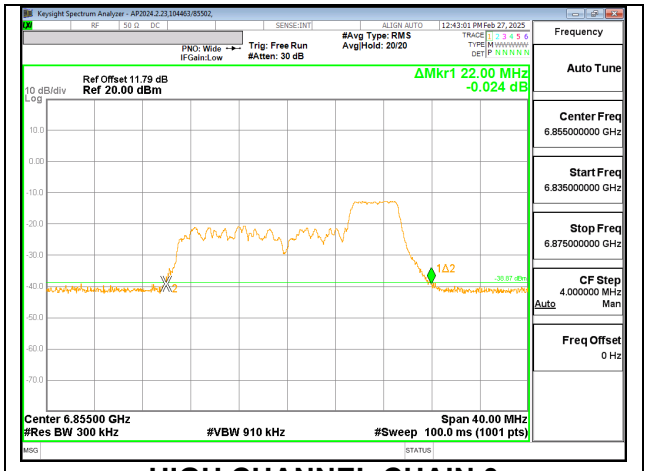

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 52T+26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	19.40	19.76	320	-300.24
Mid	6695	20.48	20.28	320	-299.52
High	6855	20.32	18.64	320	-299.68

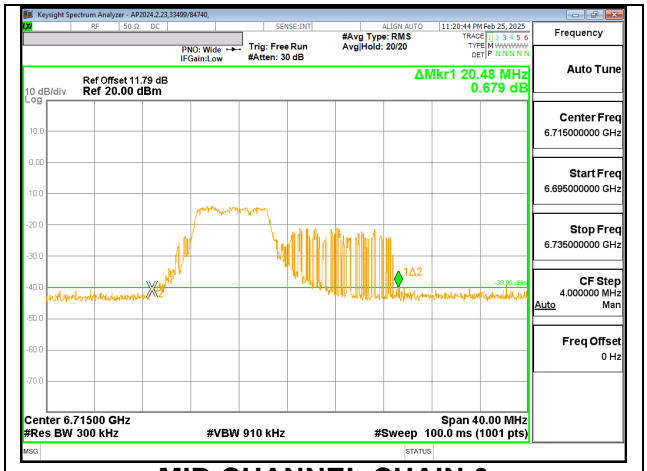

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	21.60	21.88	320	-298.12
Mid	6695	22.28	21.84	320	-297.72
High	6855	22.88	21.56	320	-297.12

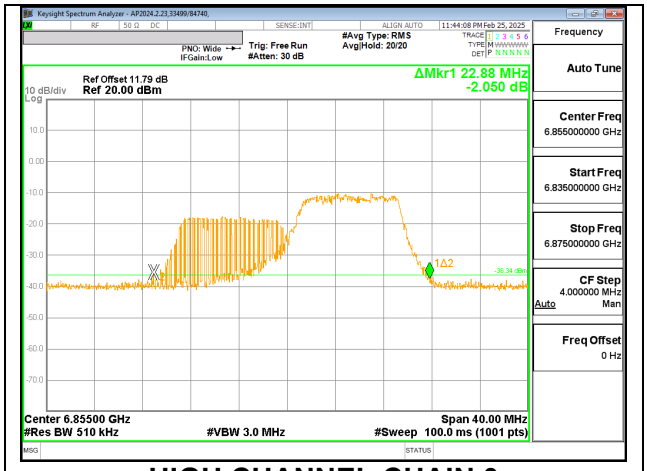

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 106T+26T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	22.16	21.80	320	-297.84
Mid	6695	21.96	21.92	320	-298.04
High	6855	22.48	22.20	320	-297.52

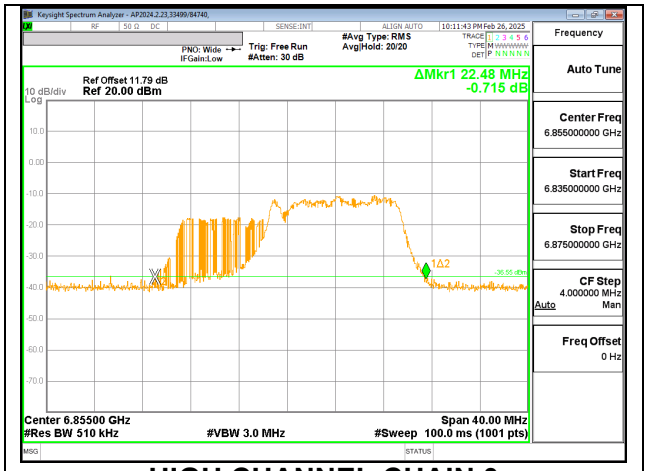

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6535	23.16	23.72	320	-296.28
Mid	6695	23.68	24.48	320	-295.52
High	6855	23.56	23.84	320	-296.16

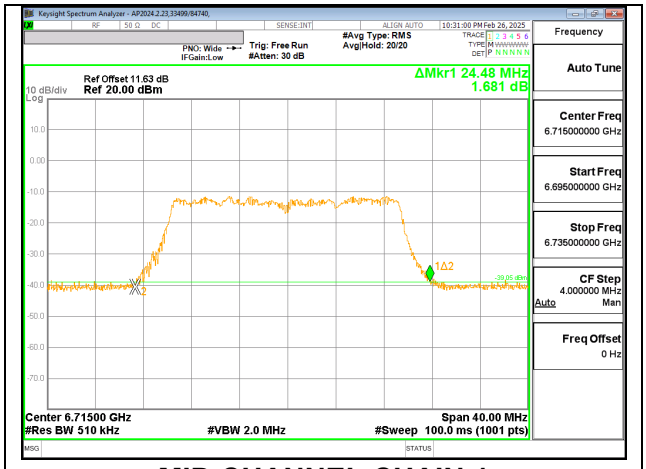

MID CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.23. 802.11be EHT40 MODE 2TX IN THE UNII-7 BAND (LPI HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6565	47.04	48.88	320	-271.12
Mid	6685	46.48	46.56	320	-273.44
High	6845	46.80	46.56	320	-273.20

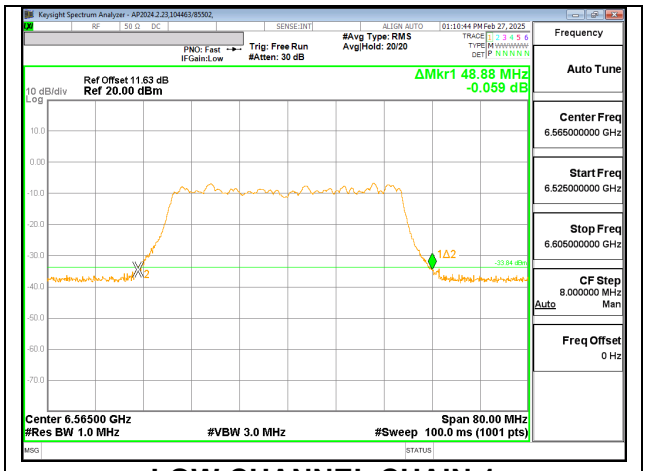

LOW CHANNEL CHAIN 1

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.24. 802.11be EHT80 MODE 2TX IN THE UNII-7 BAND (LPI HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS LOW)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6625	90.72	90.72	320	-229.28
Mid	6705	91.04	88.64	320	-228.96
High	6785	90.08	90.08	320	-229.92

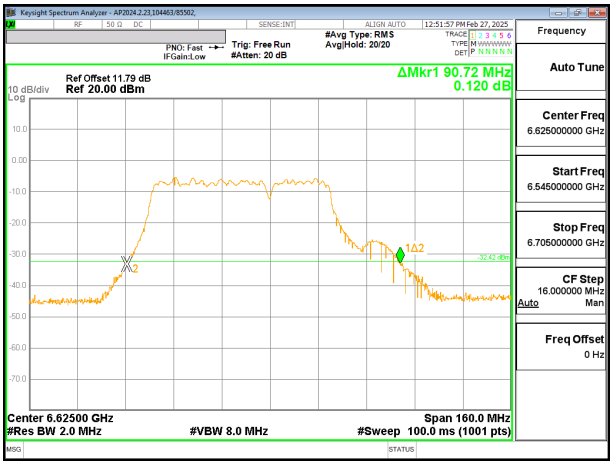

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS HIGH)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6625	83.52	86.08	320	-233.92
Mid	6705	84.48	86.72	320	-233.28
High	6785	84.32	85.92	320	-234.08

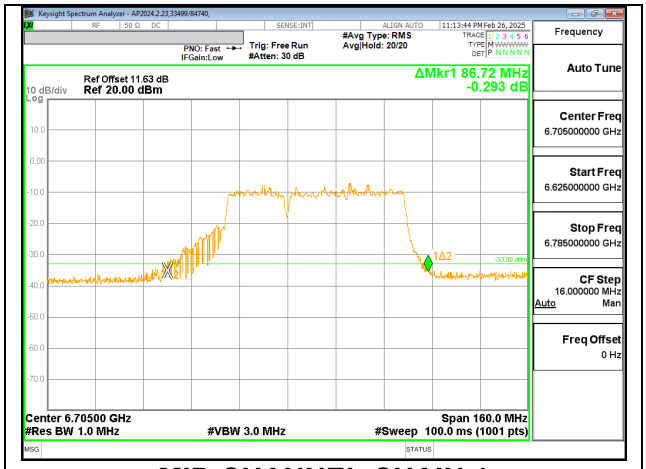

MID CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6625	94.24	93.92	320	-225.76
Mid	6705	95.04	94.40	320	-224.96
High	6785	95.84	91.84	320	-224.16

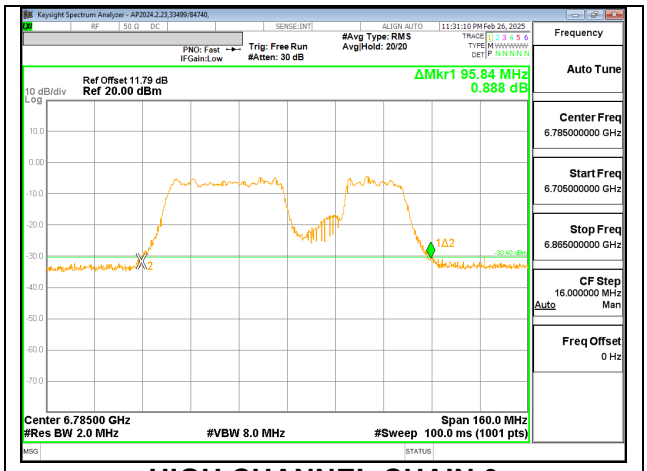

HIGH CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6625	94.08	95.84	320	-224.16
Mid	6705	94.56	95.36	320	-224.64
High	6785	96.64	94.56	320	-223.36

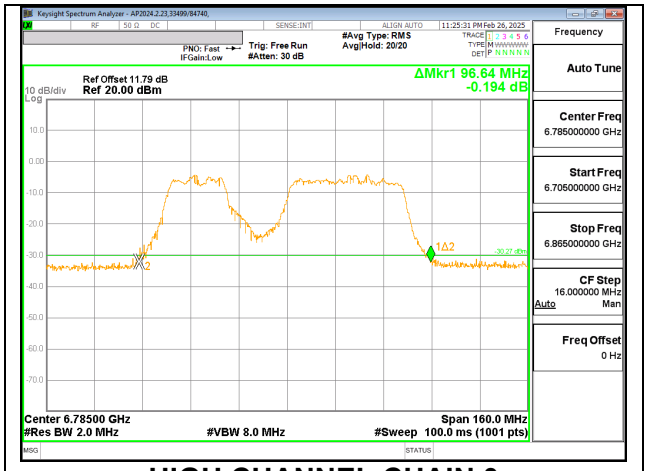

HIGH CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Low	6625	97.44	93.92	320	-222.56
Mid	6705	96.96	93.76	320	-223.04
High	6785	97.28	94.88	320	-222.72

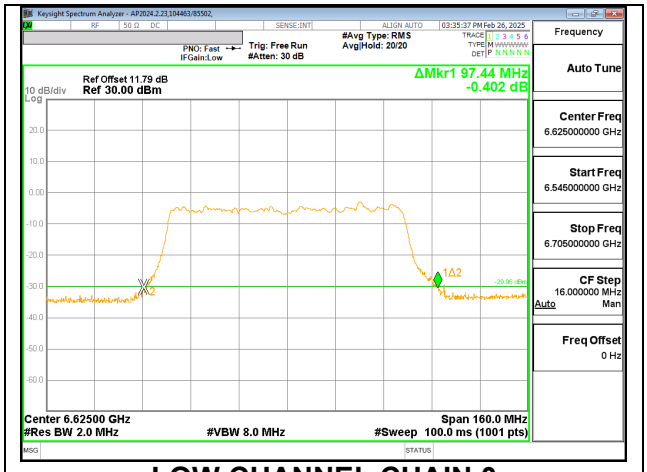

LOW CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

9.3.25. 802.11be EHT160 MODE 2TX IN THE UNII-7 BAND (LPI HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS LOW)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	173.76	176.64	320	-143.36

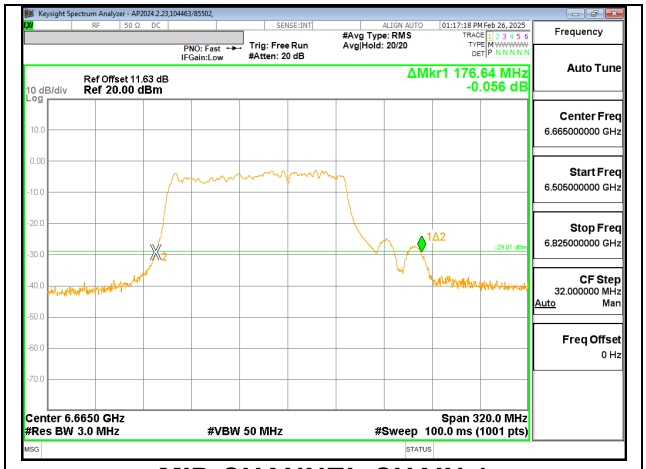

MID CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS HIGH)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	143.68	142.08	320	-176.32

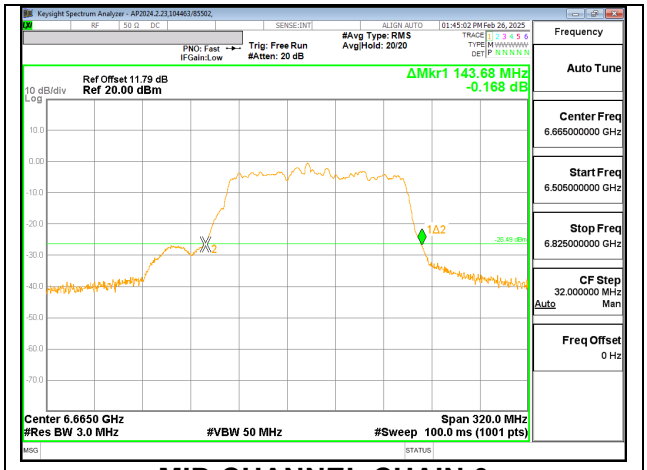

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	178.56	178.88	320	-141.12

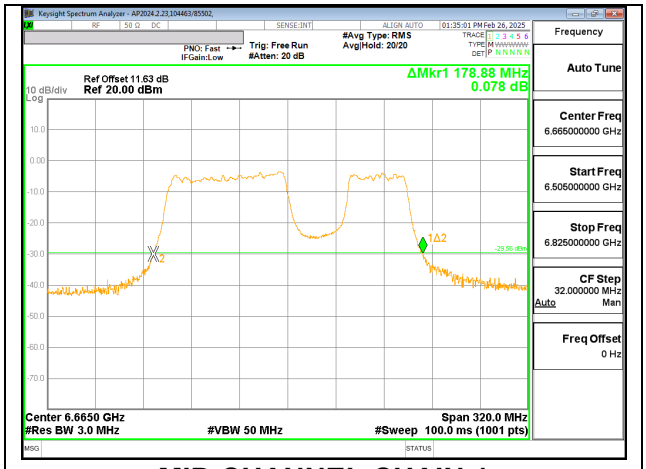

MID CHANNEL CHAIN 1

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	175.36	174.08	320	-144.64

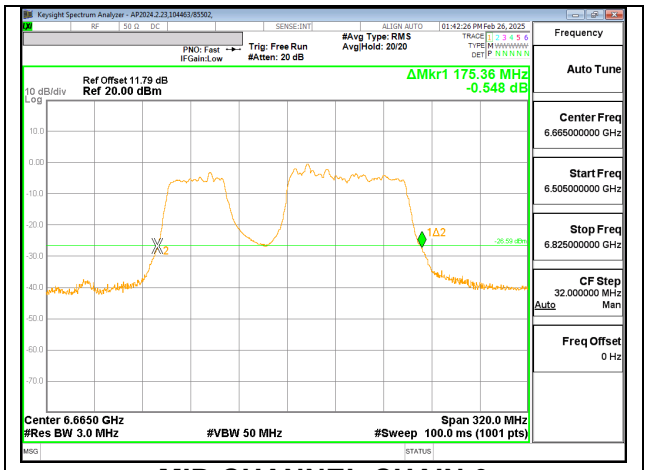

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	179.52	175.68	320	-140.48

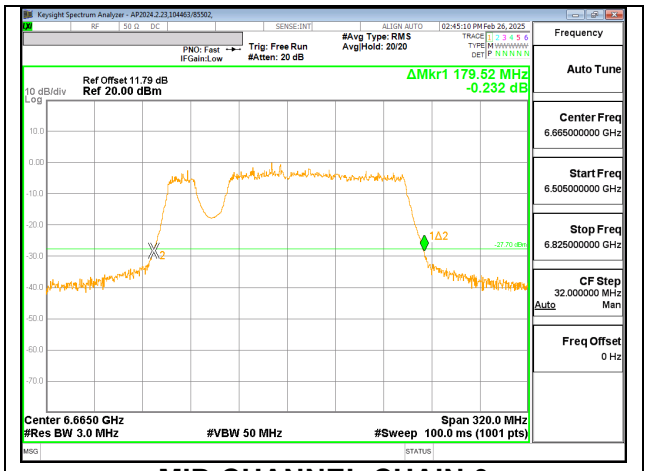

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	180.48	171.84	320	-139.52

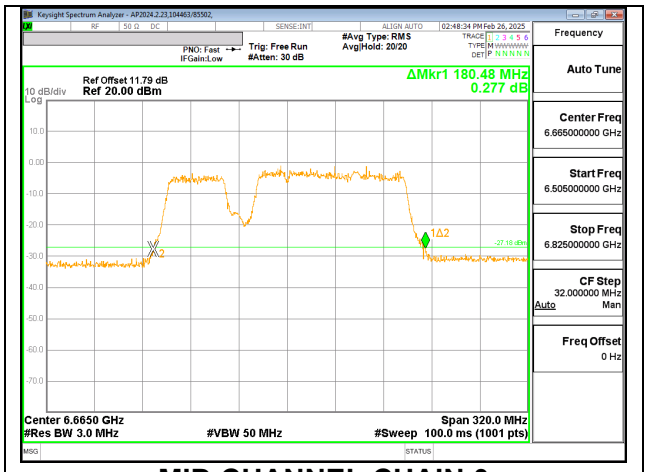

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	176.96	174.08	320	-143.04

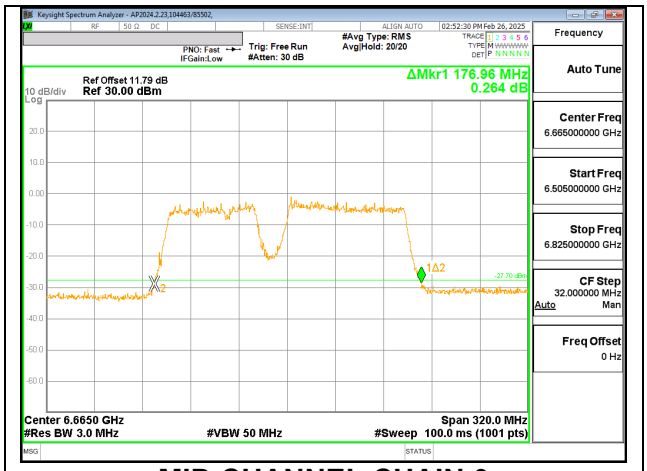

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS LOW)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	165.12	164.80	320	-154.88

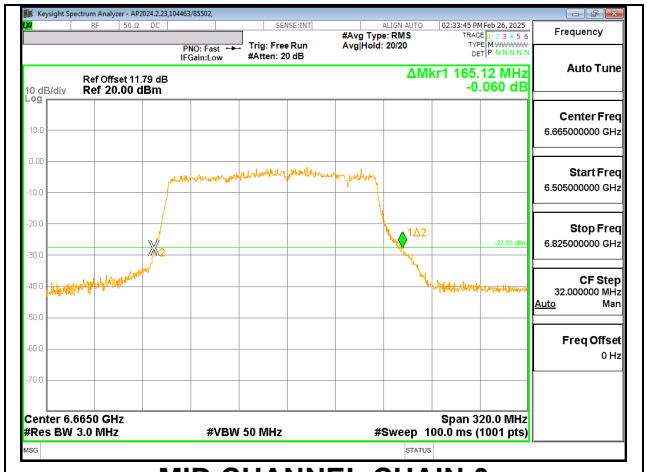

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS HIGH)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	167.04	161.28	320	-152.96

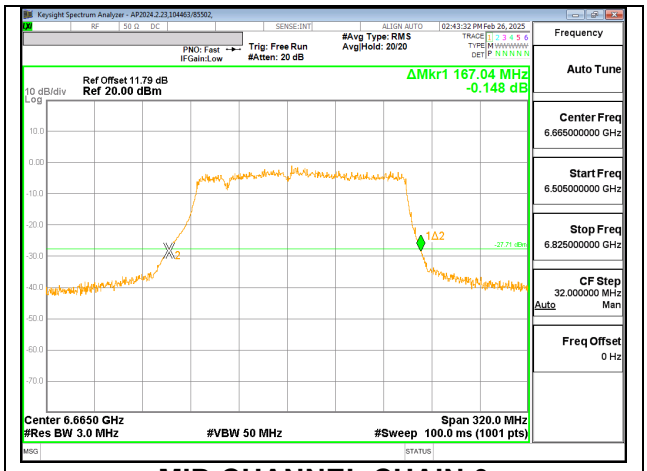

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	177.60	176.64	320	-142.40

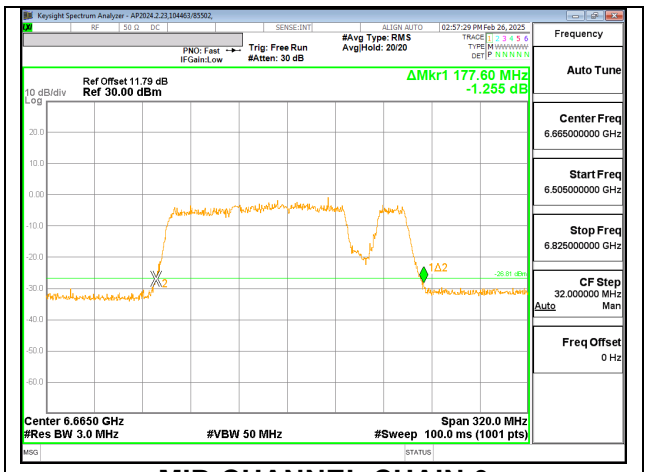

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	181.12	178.24	320	-138.88

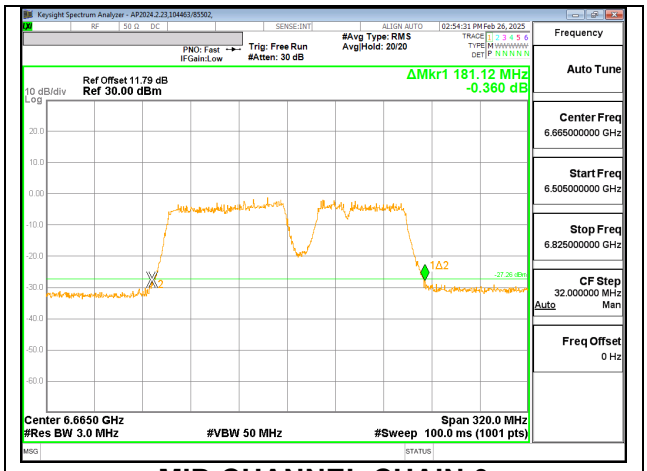

MID CHANNEL CHAIN 0

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2)

Channel	Frequency (MHz)	26 dB Bandwidth Chain 0 (MHz)	26 dB Bandwidth Chain 1 (MHz)	Limit (MHz)	Worst-Case Margin (MHz)
Mid	6665	177.28	175.04	320	-142.72

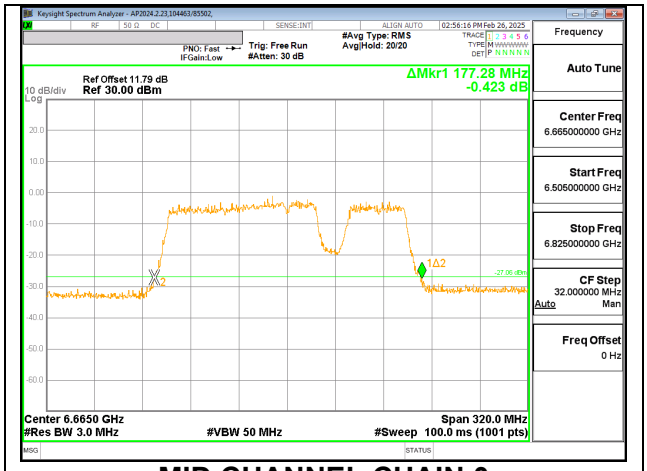

MID CHANNEL CHAIN 0

UL LLC
12 Laboratory Drive, Research Triangle Park, NC 27709; USA TEL:(919)549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC