


## APPENDIX E: TEST SEQUENCES

1. Test sequence is generated based on below parameters of the DUT:
  - a. Measured maximum power ( $P_{max}$ )
  - b. Measured Tx\_power\_at\_SAR\_design\_target ( $P_{limit}$ )
  - c. Reserve\_power\_margin (dB)
    - $P_{reserve} \text{ (dBm)} = \text{measured } P_{limit} \text{ (dBm)} - \text{Reserve\_power\_margin (dB)}$
  - d. SAR\_time\_window (100s for FCC)
2. Test Sequence 1 Waveform:

Based on the parameters above, the Test Sequence 1 is generated with one transition between high and low Tx powers. Here, high power =  $P_{max}$ ; low power =  $P_{max}/2$ , and the transition occurs after 80 seconds at high power  $P_{max}$ . As long as the power enforcement is taking into effective during one 100s/60s time window, the validation test with this defined test sequence 1 is valid, otherwise, select other radio configuration (band/DSI within the same technology group) having lower  $P_{limit}$  for this test. The Test sequence 1 waveform is shown below:

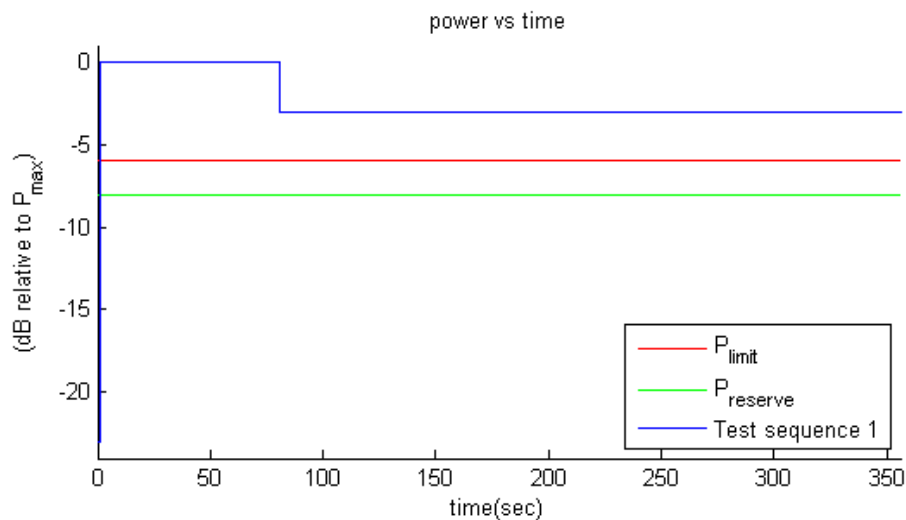

**Figure E-1**  
**Test sequence 1 waveform**

|                                                                                     |                                            |                                          |
|-------------------------------------------------------------------------------------|--------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> C3K00002102A, C3K2119                                                | <b>RF EXPOSURE PART 2 WWAN TEST REPORT</b> | <b>Approved by:</b><br>Technical Manager |
| <b>DUT Type:</b><br>Modular Approval - Host Integration (Portable Computing Device) |                                            | <b>APPENDIX E:</b><br>Page 1 of 3        |

3. Test Sequence 2 Waveform:


Based on the parameters described above, the Test Sequence 2 is generated as described in Table E-1, which contains two 170 second-long sequences (yellow and green highlighted rows) that are mirrored around the center row of 20s, resulting in a total duration of 360 seconds:

**Table E-1**  
**Test Sequence 2**

| Time duration<br>(seconds) | dB relative to $P_{limit}$ or $P_{reserve}$                                 |
|----------------------------|-----------------------------------------------------------------------------|
| 15                         | $P_{reserve} - 2$                                                           |
| 20                         | $P_{limit}$                                                                 |
| 20                         | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 10                         | $P_{reserve} - 6$                                                           |
| 20                         | $P_{max}$                                                                   |
| 15                         | $P_{limit}$                                                                 |
| 15                         | $P_{reserve} - 5$                                                           |
| 20                         | $P_{max}$                                                                   |
| 10                         | $P_{reserve} - 3$                                                           |
| 15                         | $P_{limit}$                                                                 |
| 10                         | $P_{reserve} - 4$                                                           |
| 20                         | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 10                         | $P_{reserve} - 4$                                                           |
| 15                         | $P_{limit}$                                                                 |
| 10                         | $P_{reserve} - 3$                                                           |
| 20                         | $P_{max}$                                                                   |
| 15                         | $P_{reserve} - 5$                                                           |
| 15                         | $P_{limit}$                                                                 |
| 20                         | $P_{max}$                                                                   |
| 10                         | $P_{reserve} - 6$                                                           |
| 20                         | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 20                         | $P_{limit}$                                                                 |
| 15                         | $P_{reserve} - 2$                                                           |

|                                                                              |                                     |                                   |
|------------------------------------------------------------------------------|-------------------------------------|-----------------------------------|
| FCC ID: C3K00002102A, C3K2119                                                | RF EXPOSURE PART 2 WWAN TEST REPORT | Approved by:<br>Technical Manager |
| DUT Type:<br>Modular Approval - Host Integration (Portable Computing Device) |                                     | APPENDIX E:<br>Page 2 of 3        |

The Test Sequence 2 waveform is shown in Figure E-2.

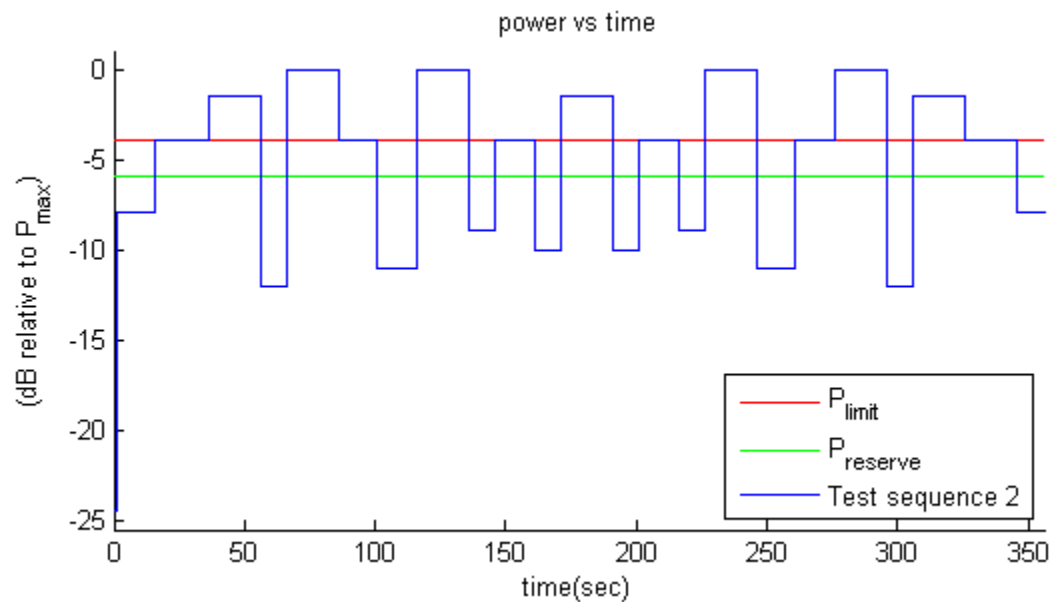

**Figure E-2**  
**Test sequence 2 waveform**

|                                                                                     |                                            |                                          |
|-------------------------------------------------------------------------------------|--------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> C3K00002102A, C3K2119                                                | <b>RF EXPOSURE PART 2 WWAN TEST REPORT</b> | <b>Approved by:</b><br>Technical Manager |
| <b>DUT Type:</b><br>Modular Approval - Host Integration (Portable Computing Device) |                                            | <b>APPENDIX E:</b><br>Page 3 of 3        |