


Appendix F. Power reduction mechanism verification

Demonstration of proper functioning of the detection and triggering mechanisms to support the corresponding RF exposure conditions. The verification is through a base station simulator is used to establish a conducted RF connection and monitor output power under different operating conditions related to the power reduction mechanisms. Detail of power reduction mechanisms referring to Operational Description

- In this power validation purpose is to demonstrate of proper functioning of the detection and triggering mechanisms to support the corresponding RF exposure conditions. In order to avoid real-time TX power varying may affect monitor output power related to the power reduction mechanisms, therefore power reduction verification would be disabled WIFI TAS feature

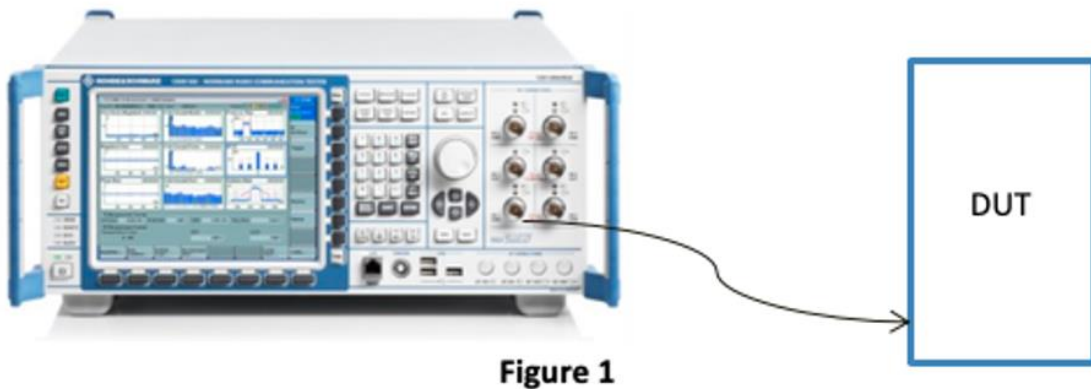

1. Verification output Power Results

- Body Detect mechanism will be performed for the in-hand and on a stationary object (placed on a table).
- Verify the functionality of the motion sensor by measuring the output power in the following steps.

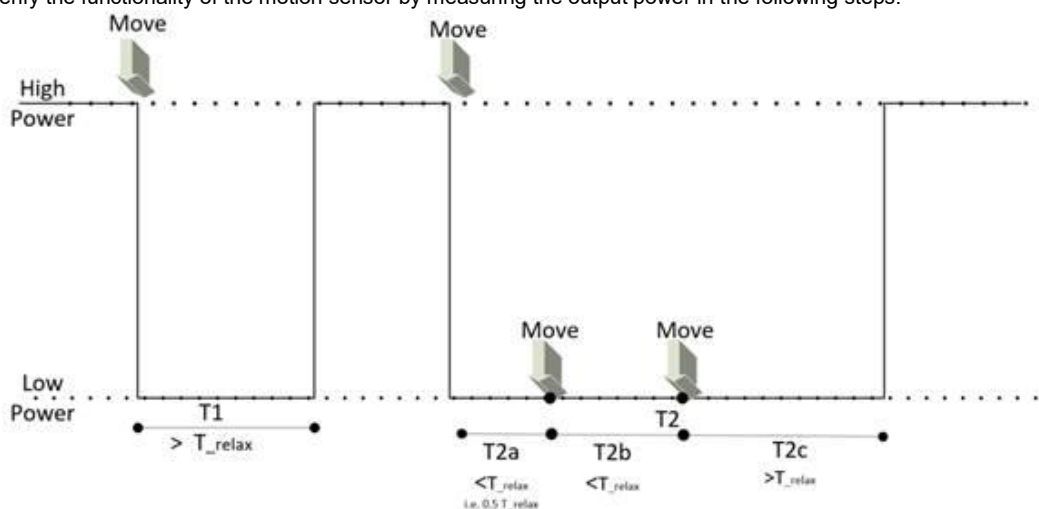


Figure 1 Illustration of the procedure for the validation of the power reduction

- Placed on a table:** Make the DUT transmit with the maximum output power by using a base station simulator.
 - Confirm that motion sensor is not triggered by letting the DUT remain stationary with no movements for the period T_{relax} for the motion sensor to reach stationary state.
 - Record P_{step1} (high power)
- In-hand:** Move the DUT to trigger the motion sensor. Apply the motion of the DUT with respect to movements in intended and reasonably foreseeable use conditions of the DUT.
 - Record P_{step2} (low power)
- For the validation of T_{relax} , wait a time period $T_1 > T_{relax}$ and confirm DUT restores to high power (P_{step1}).
- Move the DUT to trigger the motion sensor.
- Move DUT within T_{relax} to ensure T_{relax} resets when DUT is in motion.
DUT can be moved once or twice within T_{relax} , (after time periods T_{2a} and T_{2b} in Figure 1.) followed by waiting for a time period greater than T_{relax} (time period T_{2c} in Figure 1.) for DUT to restore high power. The total time duration of this step is T_2 , and the power during the whole period T_2 shall be reduced (low power – P_{step2}).

T_{relax} : 18 sec

Monitor period, T_1 : 25 sec, T_{2a} : 15 sec, T_{2b} : 15 sec, T_{2c} : 25 sec

		Output Power (data connection) (dBm)											
		Stationary Placed on a table		In hand		Stationary Placed on a table		In hand				Stationary Placed on a table	
WLAN		Full Power P_{step1}		Low Power P_{step2}		Full Power $P_{step1} \& T_1 > T_{relax}$		Low Power $P_{step2} \& T_{2a} < T_{relax}$		Low Power $P_{step2} \& T_{2b} < T_{relax}$		Full Power $P_{step1} \& T_{2c} > T_{relax}$	
Wireless technology	Antenna	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up	Measured	Max. Tune-up
WLAN5G	Main	22.74	24.00	13.37	15.00	22.74	24.00	13.37	15.00	13.37	15.00	22.74	24.00
	Aux	21.92	23.75	12.35	14.00	21.92	23.75	12.35	14.00	12.35	14.00	21.92	23.75

Appendix F. Power reduction mechanism verification

Antenna	Operation mode	Lid angle	Test Scale	802.11a 5.8G ch157
MAIN	Lid close	0°	10°	22.74
	Mode 2	10°	10°	13.37
	Mode 1	5°	5°	22.74
	Lid close	0°	1°	22.74
	Mode 1	1°	1°	22.74
	Mode 1	2°	1°	22.74
	Mode 1	3°	1°	22.74
	Mode 1	4°	1°	22.74
	Mode 1	5°	1°	22.74
	Mode 1	6°	1°	22.74
	Mode 1	7°	1°	22.74
	Mode 1	8°	1°	22.74
	Mode 1	9°	1°	22.74
	Mode 2	10°	10°	13.37
	Mode 2	20°	10°	13.37
	Mode 2	30°	10°	13.37
	Mode 2	40°	10°	13.37
	Mode 1	50°	10°	22.74
	Mode 1	45°	5°	22.74
	Mode 2	40°	1°	13.37
	Mode 1	41°	1°	22.74
	Mode 1	42°	1°	22.74
	Mode 1	43°	1°	22.74
	Mode 1	44°	1°	22.74
	Mode 1	45°	1°	22.74
	Mode 2	40°	1°	13.37
	Mode 2	39°	1°	13.37
	Mode 2	38°	1°	13.37
	Mode 2	37°	1°	13.37
	Mode 2	36°	1°	13.37
	Mode 2	35°	1°	13.37
	Mode 1	50°	10°	22.74
	Mode 1	60°	10°	22.74
	Mode 1	70°	10°	22.74
	Mode 1	80°	10°	22.74
	Mode 1	90°	10°	22.74
	Mode 1	100°	10°	22.74
	Mode 1	110°	10°	22.74
	Mode 1	120°	10°	22.74
	Mode 1	130°	10°	22.74
	Mode 1	140°	10°	22.74
	Mode 1	150°	10°	22.74
	Mode 1	160°	10°	22.74
	Mode 1	170°	10°	22.74
	Mode 1	180°	10°	22.74
	Mode 1	190°	10°	22.74
	Mode 1	200°	10°	22.74
	Mode 1	210°	10°	22.74
	Mode 2	220°	10°	13.37
	Mode 2	215°	5°	13.37
	Mode 1	210°	1°	22.74
	Mode 2	211°	1°	13.37

	Mode 2	212°	1°	13.37
	Mode 2	213°	1°	13.37
	Mode 2	214°	1°	13.37
	Mode 2	215°	1°	13.37
	Mode 1	210°	1°	22.74
	Mode 1	209°	1°	22.74
	Mode 1	208°	1°	22.74
	Mode 1	207°	1°	22.74
	Mode 1	206°	1°	22.74
	Mode 1	205°	1°	22.74
	Mode 2	220°	10°	13.37
	Mode 2	230°	10°	13.37
	Mode 2	240°	10°	13.37
	Mode 2	250°	10°	13.37
	Mode 2	260°	10°	13.37
	Mode 2	270°	10°	13.37
	Mode 2	280°	10°	13.37
	Mode 2	290°	10°	13.37
	Mode 2	300°	10°	13.37
	Mode 2	310°	10°	13.37
	Mode 2	320°	10°	13.37
	Mode 2	330°	10°	13.37
	Mode 2	340°	10°	13.37
	Mode 2	350°	10°	13.37
	Mode 2	360°	10°	13.37
	Mode 2	350°	10°	13.37
	Mode 2	340°	10°	13.37
	Mode 2	330°	10°	13.37
	Mode 2	320°	10°	13.37
	Mode 2	310°	10°	13.37
	Mode 2	300°	10°	13.37
	Mode 2	290°	10°	13.37
	Mode 2	280°	10°	13.37
	Mode 2	270°	10°	13.37
	Mode 2	260°	10°	13.37
	Mode 2	250°	10°	13.37
	Mode 2	240°	10°	13.37
	Mode 2	230°	10°	13.37
	Mode 2	220°	10°	13.37
	Mode 1	210°	10°	22.74
	Mode 2	215°	5°	13.37
	Mode 2	214°	1°	13.37
	Mode 2	213°	1°	13.37
	Mode 2	212°	1°	13.37
	Mode 2	211°	1°	13.37
	Mode 1	210°	1°	22.74
	Mode 1	209°	1°	22.74
	Mode 1	208°	1°	22.74
	Mode 1	207°	1°	22.74
	Mode 1	206°	1°	22.74
	Mode 1	205°	1°	22.74
	Mode 1	200°	10°	22.74
	Mode 1	190°	10°	22.74
	Mode 1	180°	10°	22.74
	Mode 1	170°	10°	22.74

	Mode 1	160°	10°	22.74
	Mode 1	150°	10°	22.74
	Mode 1	140°	10°	22.74
	Mode 1	130°	10°	22.74
	Mode 1	120°	10°	22.74
	Mode 1	110°	10°	22.74
	Mode 1	100°	10°	22.74
	Mode 1	90°	10°	22.74
	Mode 1	80°	10°	22.74
	Mode 1	70°	10°	22.74
	Mode 1	60°	10°	22.74
	Mode 1	50°	10°	22.74
	Mode 2	40°	10°	13.37
	Mode 2	45°	5°	13.37
	Mode 1	50°	1°	22.74
	Mode 2	49°	1°	13.37
	Mode 2	48°	1°	13.37
	Mode 2	47°	1°	13.37
	Mode 2	46°	1°	13.37
	Mode 2	45°	1°	13.37
	Mode 1	50°	1°	22.74
	Mode 1	51°	1°	22.74
	Mode 1	52°	1°	22.74
	Mode 1	53°	1°	22.74
	Mode 1	54°	1°	22.74
	Mode 1	55	1°	22.74
	Mode 2	40°	10°	13.37
	Mode 2	30°	10°	13.37
	Mode 2	20°	10°	13.37
	Mode 2	10°	10°	13.37
	Lid close	0°	10°	22.74
	Mode 1	5°	5°	22.74
	Mode 1	4°	1°	22.74
	Mode 1	3°	1°	22.74
	Mode 1	2°	1°	22.74
	Mode 1	1°	1°	22.74
	Lid close	0°	1°	22.74

Antenna	Operation mode	Lid angle	Test Scale	802.11a 5.8G ch157
AUX	Lid close	0°	10°	21.92
	Mode 2	10°	10°	12.35
	Mode 1	5°	5°	21.92
	Lid close	0°	1°	21.92
	Mode 1	1°	1°	21.92
	Mode 1	2°	1°	21.92
	Mode 1	3°	1°	21.92
	Mode 1	4°	1°	21.92
	Mode 1	5°	1°	21.92
	Mode 1	6°	1°	21.92
	Mode 1	7°	1°	21.92
	Mode 1	8°	1°	21.92
	Mode 1	9°	1°	21.92
	Mode 2	10°	10°	12.35
	Mode 2	20°	10°	12.35

	Mode 2	30°	10°	12.35
	Mode 2	40°	10°	12.35
	Mode 1	50°	10°	21.92
	Mode 1	45°	5°	21.92
	Mode 2	40°	1°	12.35
	Mode 1	41°	1°	21.92
	Mode 1	42°	1°	21.92
	Mode 1	43°	1°	21.92
	Mode 1	44°	1°	21.92
	Mode 1	45°	1°	21.92
	Mode 2	40°	1°	12.35
	Mode 2	39°	1°	12.35
	Mode 2	38°	1°	12.35
	Mode 2	37°	1°	12.35
	Mode 2	36°	1°	12.35
	Mode 2	35°	1°	12.35
	Mode 1	50°	10°	21.92
	Mode 1	60°	10°	21.92
	Mode 1	70°	10°	21.92
	Mode 1	80°	10°	21.92
	Mode 1	90°	10°	21.92
	Mode 1	100°	10°	21.92
	Mode 1	110°	10°	21.92
	Mode 1	120°	10°	21.92
	Mode 1	130°	10°	21.92
	Mode 1	140°	10°	21.92
	Mode 1	150°	10°	21.92
	Mode 1	160°	10°	21.92
	Mode 1	170°	10°	21.92
	Mode 1	180°	10°	21.92
	Mode 1	190°	10°	21.92
	Mode 1	200°	10°	21.92
	Mode 1	210°	10°	21.92
	Mode 2	220°	10°	12.35
	Mode 2	215°	5°	12.35
	Mode 1	210°	1°	21.92
	Mode 2	211°	1°	12.35
	Mode 2	212°	1°	12.35
	Mode 2	213°	1°	12.35
	Mode 2	214°	1°	12.35
	Mode 2	215°	1°	12.35
	Mode 1	210°	1°	21.92
	Mode 1	209°	1°	21.92
	Mode 1	208°	1°	21.92
	Mode 1	207°	1°	21.92
	Mode 1	206°	1°	21.92
	Mode 1	205°	1°	21.92
	Mode 2	220°	10°	12.35
	Mode 2	230°	10°	12.35
	Mode 2	240°	10°	12.35
	Mode 2	250°	10°	12.35
	Mode 2	260°	10°	12.35
	Mode 2	270°	10°	12.35
	Mode 2	280°	10°	12.35
	Mode 2	290°	10°	12.35

	Mode 2	300°	10°	12.35
	Mode 2	310°	10°	12.35
	Mode 2	320°	10°	12.35
	Mode 2	330°	10°	12.35
	Mode 2	340°	10°	12.35
	Mode 2	350°	10°	12.35
	Mode 2	360°	10°	12.35
	Mode 2	350°	10°	12.35
	Mode 2	340°	10°	12.35
	Mode 2	330°	10°	12.35
	Mode 2	320°	10°	12.35
	Mode 2	310°	10°	12.35
	Mode 2	300°	10°	12.35
	Mode 2	290°	10°	12.35
	Mode 2	280°	10°	12.35
	Mode 2	270°	10°	12.35
	Mode 2	260°	10°	12.35
	Mode 2	250°	10°	12.35
	Mode 2	240°	10°	12.35
	Mode 2	230°	10°	12.35
	Mode 2	220°	10°	12.35
	Mode 1	210°	10°	21.92
	Mode 2	215°	5°	12.35
	Mode 2	214°	1°	12.35
	Mode 2	213°	1°	12.35
	Mode 2	212°	1°	12.35
	Mode 2	211°	1°	12.35
	Mode 1	210°	1°	21.92
	Mode 1	209°	1°	21.92
	Mode 1	208°	1°	21.92
	Mode 1	207°	1°	21.92
	Mode 1	206°	1°	21.92
	Mode 1	205°	1°	21.92
	Mode 1	200°	10°	21.92
	Mode 1	190°	10°	21.92
	Mode 1	180°	10°	21.92
	Mode 1	170°	10°	21.92
	Mode 1	160°	10°	21.92
	Mode 1	150°	10°	21.92
	Mode 1	140°	10°	21.92
	Mode 1	130°	10°	21.92
	Mode 1	120°	10°	21.92
	Mode 1	110°	10°	21.92
	Mode 1	100°	10°	21.92
	Mode 1	90°	10°	21.92
	Mode 1	80°	10°	21.92
	Mode 1	70°	10°	21.92
	Mode 1	60°	10°	21.92
	Mode 1	50°	10°	21.92
	Mode 2	40°	10°	12.35
	Mode 2	45°	5°	12.35
	Mode 1	50°	1°	21.92
	Mode 2	49°	1°	12.35
	Mode 2	48°	1°	12.35
	Mode 2	47°	1°	12.35

	Mode 2	46°	1°	12.35
	Mode 2	45°	1°	12.35
	Mode 1	50°	1°	21.92
	Mode 1	51°	1°	21.92
	Mode 1	52°	1°	21.92
	Mode 1	53°	1°	21.92
	Mode 1	54°	1°	21.92
	Mode 1	55	1°	21.92
	Mode 2	40°	10°	12.35
	Mode 2	30°	10°	12.35
	Mode 2	20°	10°	12.35
	Mode 2	10°	10°	12.35
	Lid close	0°	10°	21.92
	Mode 1	5°	5°	21.92
	Mode 1	4°	1°	21.92
	Mode 1	3°	1°	21.92
	Mode 1	2°	1°	21.92
	Mode 1	1°	1°	21.92
	Lid close	0°	1°	21.92



Appendix F. Supplemental SAR Results

Band	Mode	Test Position	Gap (mm)	Antenna	User Scenario	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN2.4GHz	802.11b 1Mbps	Back	25mm	Main	Mode 2	11	2462	Sample 1	21.95	22.63	1.169	99.5	1.005	0	0.001	0.001
WLAN2.4GHz	802.11b 1Mbps	Back	25mm	Main	Mode 2	11	2462	Sample 2	21.87	22.63	1.191	99.5	1.005	0	0.001	0.001
WLAN2.4GHz	802.11b 1Mbps	Top Edge	25mm	Main	Mode 2	11	2462	Sample 1	21.95	22.63	1.169	99.5	1.005	0.08	0.091	0.107
WLAN2.4GHz	802.11b 1Mbps	Top Edge	25mm	Main	Mode 2	11	2462	Sample 2	21.87	22.63	1.191	99.5	1.005	0.01	0.093	0.111
WLAN2.4GHz	802.11b 1Mbps	Back	25mm	Aux	Mode 2	11	2462	Sample 1	19.73	20.75	1.265	100	1.000	0	0.001	0.001
WLAN2.4GHz	802.11b 1Mbps	Back	25mm	Aux	Mode 2	11	2462	Sample 2	19.79	20.75	1.247	99.5	1.005	0	0.001	0.001
WLAN2.4GHz	802.11b 1Mbps	Top Edge	25mm	Aux	Mode 2	11	2462	Sample 1	19.73	20.75	1.265	100	1.000	0	0.001	0.001
WLAN2.4GHz	802.11b 1Mbps	Top Edge	25mm	Aux	Mode 2	11	2462	Sample 2	19.79	20.75	1.247	99.5	1.005	0	0.001	0.001
WLAN5GHz	802.11a 6Mbps	Back	25mm	Main	Mode 2	52	5260	Sample 1	20.82	21.75	1.239	98	1.020	0	0.001	0.001
WLAN5GHz	802.11a 6Mbps	Back	25mm	Main	Mode 2	52	5260	Sample 2	20.78	21.75	1.250	98	1.020	0.1	0.028	0.036
WLAN5GHz	802.11a 6Mbps	Top Edge	25mm	Main	Mode 2	52	5260	Sample 1	20.82	21.75	1.239	98	1.020	0.03	0.137	0.173
WLAN5GHz	802.11a 6Mbps	Top Edge	25mm	Main	Mode 2	52	5260	Sample 2	20.78	21.75	1.250	98	1.020	-0.08	0.130	0.166
WLAN5GHz	802.11a 6Mbps	Back	25mm	Aux	Mode 2	52	5260	Sample 1	21.08	21.75	1.167	98	1.020	0	0.001	0.001
WLAN5GHz	802.11a 6Mbps	Back	25mm	Aux	Mode 2	64	5320	Sample 2	21.18	21.75	1.140	98	1.020	-0.18	0.030	0.035
WLAN5GHz	802.11a 6Mbps	Top Edge	25mm	Aux	Mode 2	52	5260	Sample 1	21.08	21.75	1.167	98	1.020	-0.08	0.126	0.150
WLAN5GHz	802.11a 6Mbps	Top Edge	25mm	Aux	Mode 2	64	5320	Sample 2	21.18	21.75	1.140	98	1.020	0.1	0.202	0.235
WLAN5GHz	802.11n-HT40 MCS0	Back	25mm	Main	Mode 2	142	5710	Sample 1	21.67	23.50	1.524	98.9	1.011	0.12	0.027	0.042
WLAN5GHz	802.11n-HT40 MCS0	Back	25mm	Main	Mode 2	142	5710	Sample 2	22.23	23.50	1.340	98.9	1.011	0.08	0.034	0.046
WLAN5GHz	802.11n-HT40 MCS0	Top Edge	25mm	Main	Mode 2	142	5710	Sample 1	21.67	23.50	1.524	98.9	1.011	-0.17	0.163	0.251
WLAN5GHz	802.11n-HT40 MCS0	Top Edge	25mm	Main	Mode 2	142	5710	Sample 2	22.23	23.50	1.340	98.9	1.011	-0.03	0.216	0.293
WLAN5GHz	802.11n-HT40 MCS0	Back	25mm	Aux	Mode 2	142	5710	Sample 1	21.93	23.50	1.435	98.9	1.011	0.14	0.043	0.062
WLAN5GHz	802.11n-HT40 MCS0	Back	25mm	Aux	Mode 2	142	5710	Sample 2	22.06	23.50	1.393	98.9	1.011	0.11	0.041	0.058
WLAN5GHz	802.11n-HT40 MCS0	Top Edge	25mm	Aux	Mode 2	142	5710	Sample 1	21.93	23.50	1.435	98.9	1.011	-0.05	0.268	0.389
WLAN5GHz	802.11n-HT40 MCS0	Top Edge	25mm	Aux	Mode 2	142	5710	Sample 2	22.06	23.50	1.393	98.9	1.011	0.18	0.295	0.415
WLAN5GHz	802.11a 6Mbps	Back	25mm	Main	Mode 2	157	5785	Sample 1	23.11	24.00	1.227	98	1.020	0.14	0.031	0.039
WLAN5GHz	802.11a 6Mbps	Back	25mm	Main	Mode 2	149	5745	Sample 2	23.43	24.00	1.140	98	1.020	-0.17	0.041	0.048
WLAN5GHz	802.11a 6Mbps	Top Edge	25mm	Main	Mode 2	157	5785	Sample 1	23.11	24.00	1.227	98	1.020	0.17	0.215	0.269
WLAN5GHz	802.11a 6Mbps	Top Edge	25mm	Main	Mode 2	149	5745	Sample 2	23.43	24.00	1.140	98	1.020	-0.05	0.281	0.327
WLAN5GHz	802.11a 6Mbps	Back	25mm	Aux	Mode 2	165	5825	Sample 1	23.04	23.88	1.213	98	1.020	0.01	0.064	0.079
WLAN5GHz	802.11a 6Mbps	Back	25mm	Aux	Mode 2	165	5825	Sample 2	23.19	23.88	1.172	98	1.020	0.1	0.046	0.055
WLAN5GHz	802.11a 6Mbps	Top Edge	25mm	Aux	Mode 2	165	5825	Sample 1	23.04	23.88	1.213	98	1.020	-0.17	0.405	0.501
WLAN5GHz	802.11a 6Mbps	Top Edge	25mm	Aux	Mode 2	165	5825	Sample 2	23.19	23.88	1.172	98	1.020	0.04	0.444	0.531
WLAN5GHz	802.11n-HT40 MCS0	Back	25mm	Main	Mode 2	167	5835	Sample 1	22.11	23.25	1.300	98.9	1.011	-0.01	0.040	0.053
WLAN5GHz	802.11n-HT40 MCS0	Back	25mm	Main	Mode 2	167	5835	Sample 2	22.58	23.25	1.167	98.9	1.011	-0.08	0.041	0.048
WLAN5GHz	802.11n-HT40 MCS0	Top Edge	25mm	Main	Mode 2	167	5835	Sample 1	22.11	23.25	1.300	98.9	1.011	0.05	0.251	0.330
WLAN5GHz	802.11n-HT40 MCS0	Top Edge	25mm	Main	Mode 2	167	5835	Sample 2	22.58	23.25	1.167	98.9	1.011	0.06	0.270	0.319
WLAN5GHz	802.11n-HT40 MCS0	Back	25mm	Aux	Mode 2	167	5835	Sample 1	22.26	23.25	1.256	98.9	1.011	-0.09	0.057	0.072
WLAN5GHz	802.11n-HT40 MCS0	Back	25mm	Aux	Mode 2	167	5835	Sample 2	22.41	23.25	1.213	98.9	1.011	-0.08	0.048	0.059
WLAN5GHz	802.11n-HT40 MCS0	Top Edge	25mm	Aux	Mode 2	167	5835	Sample 1	22.26	23.25	1.256	98.9	1.011	0.13	0.362	0.460
WLAN5GHz	802.11n-HT40 MCS0	Top Edge	25mm	Aux	Mode 2	167	5835	Sample 2	22.41	23.25	1.213	98.9	1.011	0.12	0.402	0.493
WLAN6GHz	802.11ax-HE40 MCS0	Back	25mm	Main	Mode 2	3	5965	Sample 1	21.95	22.75	1.202	98.9	1.011	0.03	0.039	0.047
WLAN6GHz	802.11ax-HE40 MCS0	Back	25mm	Main	Mode 2	3	5965	Sample 2	21.95	22.75	1.202	98.9	1.011	0.18	0.029	0.035
WLAN6GHz	802.11ax-HE40 MCS0	Top Edge	25mm	Main	Mode 2	3	5965	Sample 1	21.95	22.75	1.202	98.9	1.011	0.16	0.245	0.298
WLAN6GHz	802.11ax-HE40 MCS0	Top Edge	25mm	Main	Mode 2	3	5965	Sample 2	21.95	22.75	1.202	98.9	1.011	-0.1	0.202	0.245
WLAN6GHz	802.11ax-HE40 MCS0	Back	25mm	Aux	Mode 2	3	5965	Sample 1	22.28	22.75	1.114	98.9	1.011	0.07	0.051	0.057
WLAN6GHz	802.11ax-HE40 MCS0	Back	25mm	Aux	Mode 2	3	5965	Sample 2	22.28	22.75	1.114	98.9	1.011	0.18	0.033	0.037
WLAN6GHz	802.11ax-HE40 MCS0	Top Edge	25mm	Aux	Mode 2	3	5965	Sample 1	22.28	22.75	1.114	98.9	1.011	-0.1	0.330	0.372
WLAN6GHz	802.11ax-HE40 MCS0	Top Edge	25mm	Aux	Mode 2	3	5965	Sample 2	22.28	22.75	1.114	98.9	1.011	0.01	0.381	0.429
Bluetooth	1Mbps	Back	25mm	Aux	Mode 2	39	2441	Sample 1	14.38	15.00	1.153	76.1	1.095	0	0.001	0.001
Bluetooth	1Mbps	Back	25mm	Aux	Mode 2	39	2441	Sample 2	14.49	15.00	1.125	75.3	1.106	0	0.001	0.001
Bluetooth	1Mbps	Top Edge	25mm	Aux	Mode 2	39	2441	Sample 1	14.38	15.00	1.153	76.1	1.095	0	0.001	0.001
Bluetooth	1Mbps	Top Edge	25mm	Aux	Mode 2	39	2441	Sample 2	14.49	15.00	1.125	75.3	1.106	0	0.001	0.001