

APPENDIX A: SAR TEST PLOTS

FCC ID C3K2150	RF EXPOSURE TEST REPORT	Approved by: Technical Manager
DUT Type: Portable Computing Device	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo. 	APPENDIX A

ELEMENT

DUT: C3K2150; Type: Portable Computing Device; Serial: 7BTD32609

Communication System: UID:0, CW; MAIA: Y; Frequency: 13.600 MHz

Medium: Head Simulating Liquid; Medium parameters used:

$f = 13.600$ MHz; $\text{cond} = 0.782$ S/m; $\text{perm} = 56.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/08/2026; Ambient Temp: 22.1°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7570; ConvF:(19.27,21.05,18.22); Calibrated: 2026-02-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn859; Calibrated: 2026-02-09

Phantom: ELI V8.0; Serial: 2077

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NFC, Antenna NFC, Type B, Body SAR, Back Side

Area Scan (330.0 x 240.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (54.0 x 48.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = -0.00 W/kg; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0 W/kg

SAR(1 g) = 0.000 W/kg

Smallest distance from peaks to all points 3 dB below is 1.7 mm

Ratio of SAR at M2 to SAR at M1 = 66.4 %

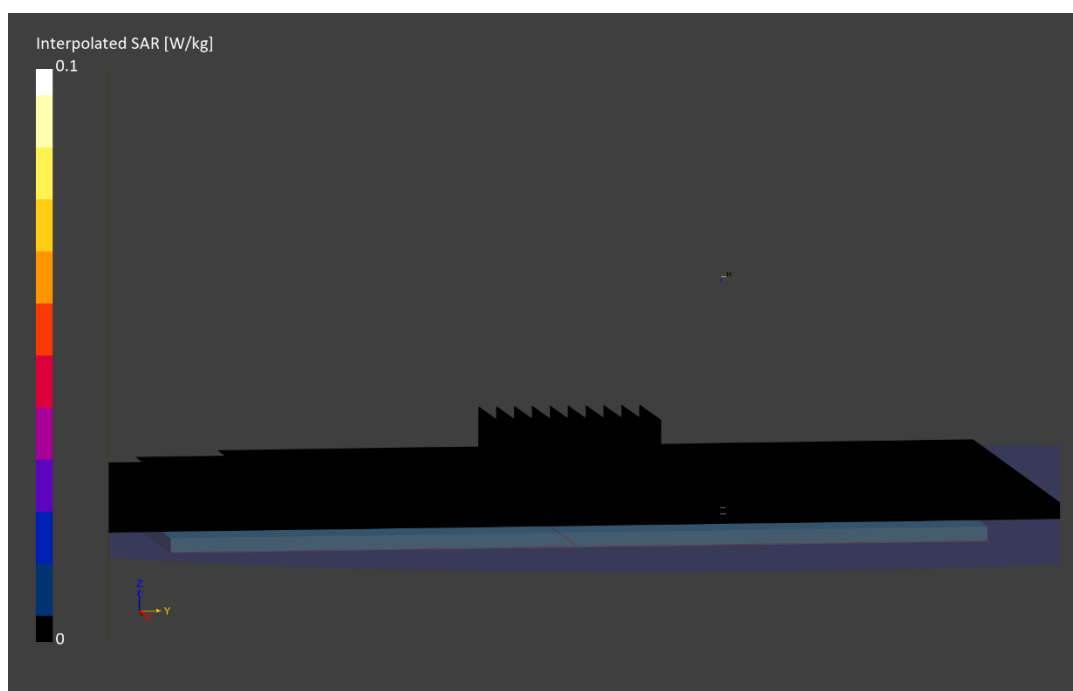

ELEMENT

DUT: C3K2150; Type: Portable Computing Device; Serial: 7BTD32609

Communication System: UID:0, CW; MAIA: Y; Frequency: 13.600 MHz
Medium: Head Simulating Liquid; Medium parameters used:
 $f = 13.600$ MHz; $\text{cond} = 0.786$ S/m; $\text{perm} = 53.5$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/22/2026; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7570; ConvF:(19.27,21.05,18.22); Calibrated: 2026-02-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn859; Calibrated: 2026-02-09
Phantom: ELI V8.0; Serial: 2077
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NFC, WPT Coil Antenna, Body SAR, Back Side

Area Scan (330.0 x 255.0): Measurement grid: $\text{dx}=15.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $\text{dx}=6.0$ mm, $\text{dy}=6.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5

Reference Value = 0.01 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.076 W/kg

SAR(1 g) = 0.007 W/kg

Smallest distance from peaks to all points 3 dB below is 3.4 mm

Ratio of SAR at M2 to SAR at M1 = 35.1 %

