

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Side_0mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437.000 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2025-10-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (80.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.796 W/kg; SAR (10g) = 0.358 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.813 W/kg; SAR (8g) = 0.385 W/kg; SAR (10g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.6 %

TSL Correction: Positive only

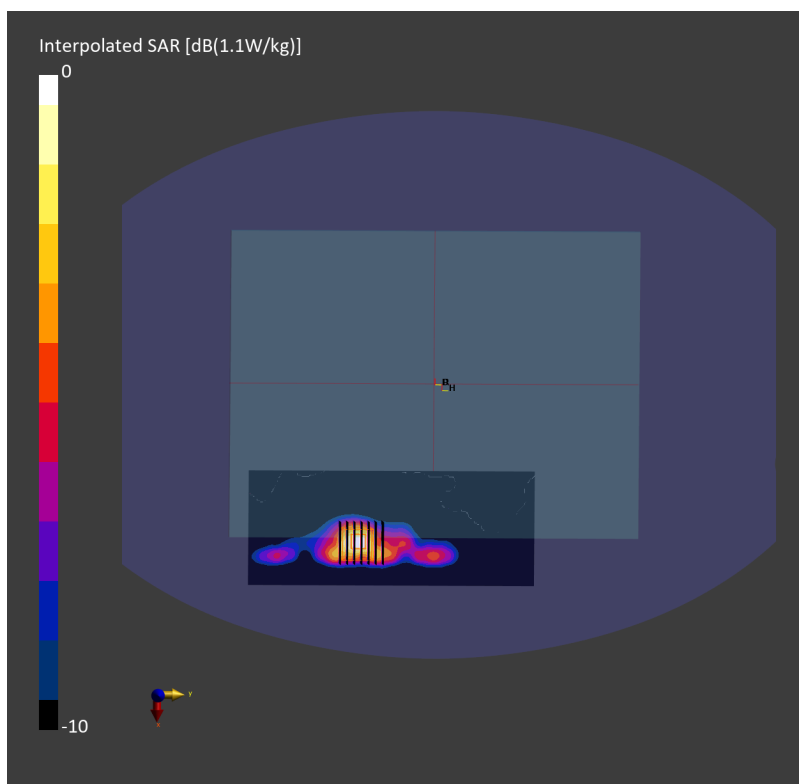

#02_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Side_0mm_Ch58

Communication System: IEEE 802.11ac WiFi; Frequency: 5290.000 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 5290.000$ MHz; $\sigma = 4.50$ S/m; $\epsilon_r = 34.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.8, 5.38, 5.76); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2025-10-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (80.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.664 W/kg; SAR (10g) = 0.240 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.16 dB

SAR (1g) = 0.741 W/kg; SAR (8g) = 0.292 W/kg; SAR (10g) = 0.259 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.6 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.16 dB

SAR (1g) = 0.627 W/kg; SAR (8g) = 0.259 W/kg; SAR (10g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.6 %

TSL Correction: Positive only

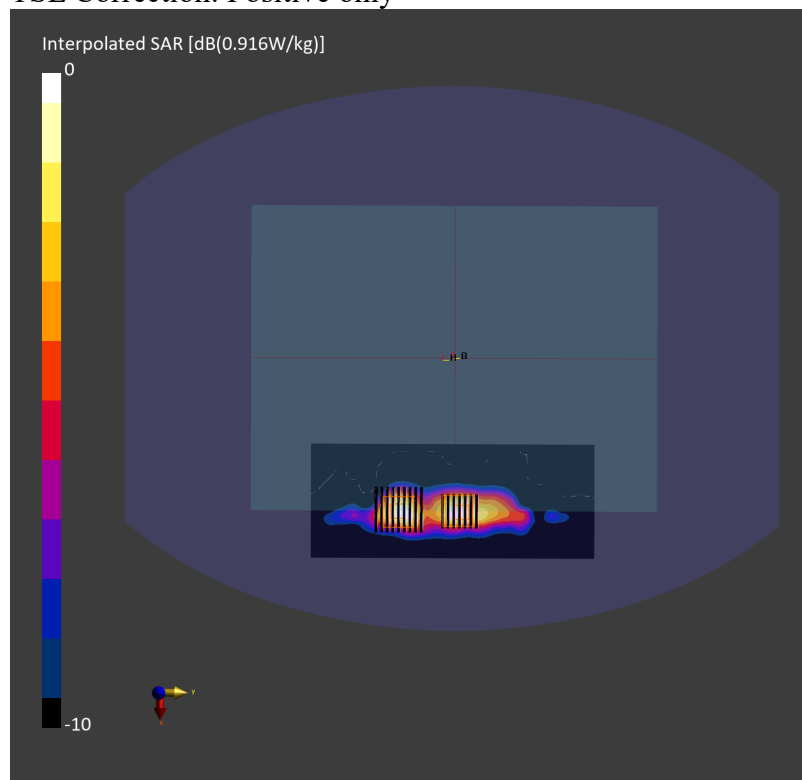

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Side_0mm_Ch106

Communication System: IEEE 802.11ac WiFi; Frequency: 5530.000 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 5530.000$ MHz; $\sigma = 4.75$ S/m; $\epsilon_r = 33.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.38, 5.0, 5.35); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2025-10-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (80.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.818 W/kg; SAR (10g) = 0.309 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 36.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.150 dB

SAR (1g) = 0.768 W/kg; SAR (8g) = 0.302 W/kg; SAR (10g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 57.7 %

TSL Correction: Positive only

Zoom Scan (32.0 mm x 36.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.150 dB

SAR (1g) = 0.888 W/kg; SAR (8g) = 0.361 W/kg; SAR (10g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 57.7 %

TSL Correction: Positive only

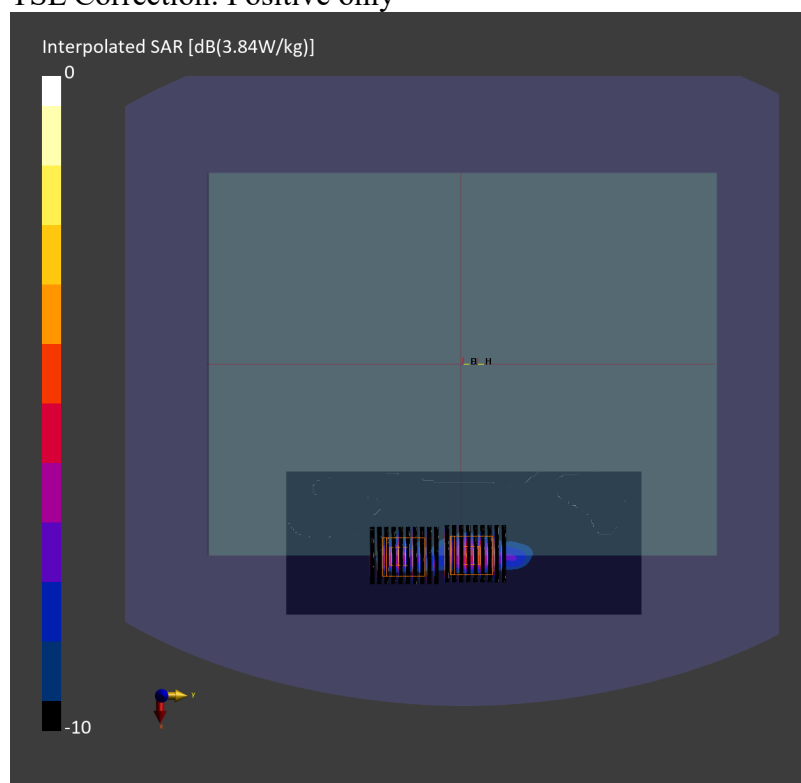

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Side_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260111 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.12$ S/m; $\epsilon_r = 35.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.86, 4.78, 4.94); Calibrated: 2025-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (80.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.786 W/kg; SAR (10g) = 0.283 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.04 dB

SAR (1g) = 0.849 W/kg; SAR (8g) = 0.318 W/kg; SAR (10g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.8 %

TSL Correction: Positive only

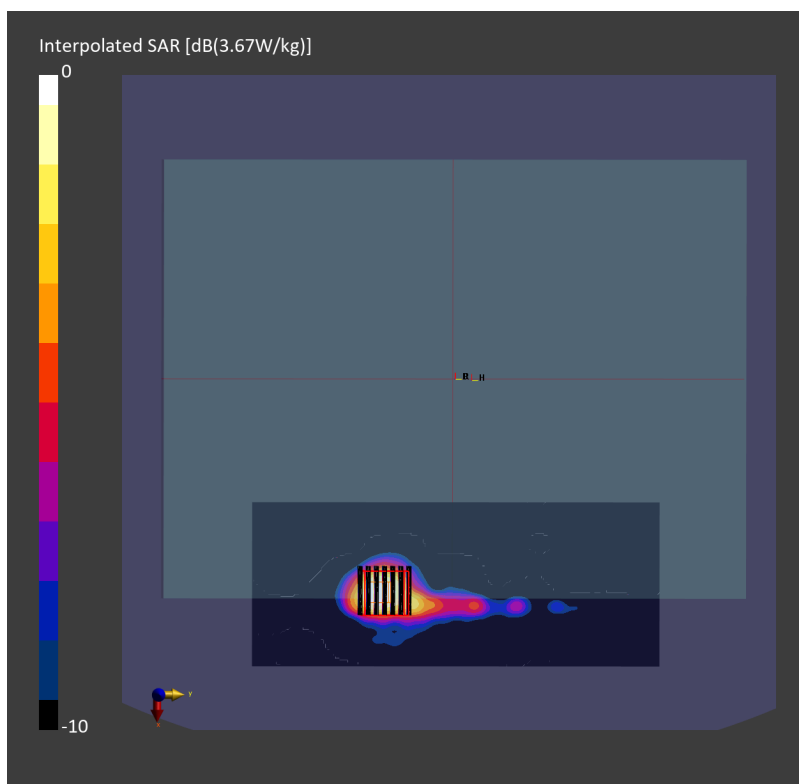

#05_WLAN5GHz_802.11ac-VHT160 MCS0_Bottom Side_0mm_Ch163

Communication System: IEEE 802.11ac WiFi; Frequency: 5815.000 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 5815.000$ MHz; $\sigma = 5.08$ S/m; $\epsilon_r = 33.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.23, 4.86, 5.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2025-10-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (80.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.639 W/kg; SAR (10g) = 0.230 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.19 dB

SAR (1g) = 0.705 W/kg; SAR (8g) = 0.280 W/kg; SAR (10g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.4 %

TSL Correction: Positive only

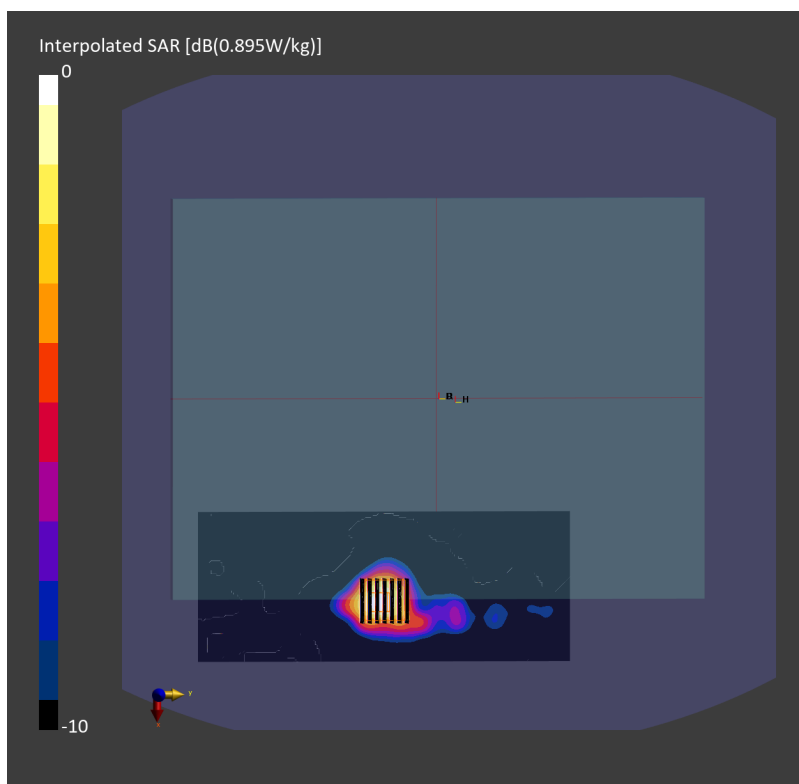

#06_WLAN6GHz_802.11be-EHT320 MCS0_Bottom Side_0mm_Ch191

Communication System: IEEE 802.11be; Frequency: 6905.000 MHz

Medium: HSL_600-7200_260111 Medium parameters used: $f = 6905.000$ MHz; $\sigma = 6.47$ S/m; $\epsilon_r = 33.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.01, 4.93, 5.1); Calibrated: 2025-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2025-05-21
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (85.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.527 W/kg; SAR (10g) = 0.151 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.19 dB


SAR (1g) = 0.602 W/kg; SAR (8g) = 0.181 W/kg; SAR (10g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 49.4 %

psAPD (1.0cm², sq) = 6.02 [W/m²]; psAPD (4.0cm², sq) = 3.61 [W/m²]

TSL Correction: Positive only

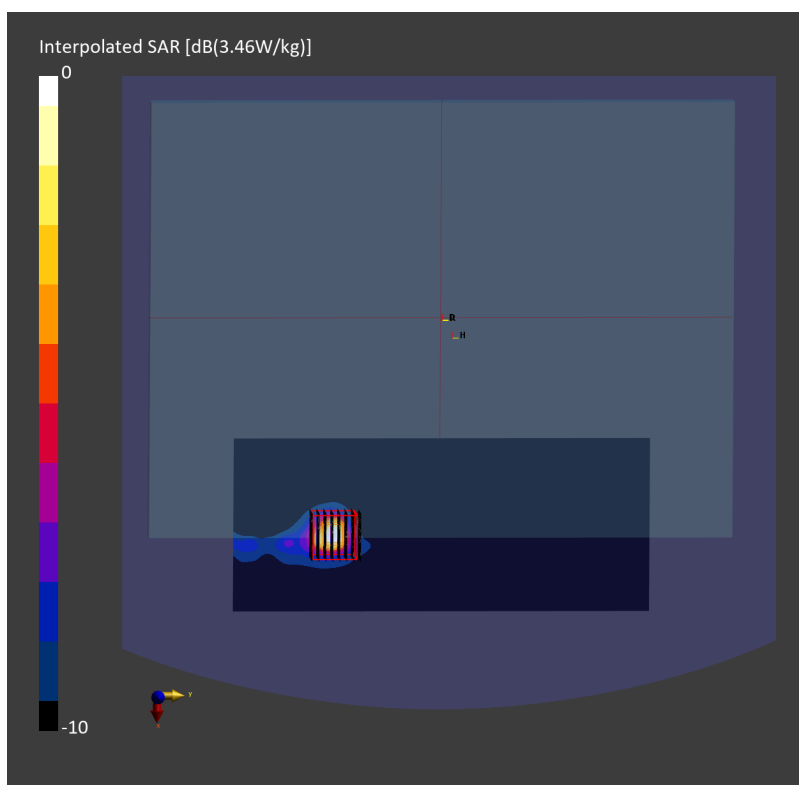

#07_Bluetooth_1Mbps_Bottom Side_0mm_Ch0

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2402.000 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2025-10-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2157; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.250 W/kg; SAR (10g) = 0.109 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.258 W/kg; SAR (8g) = 0.117 W/kg; SAR (10g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.0 %

TSL Correction: Positive only

