

FCC TEST REPORT

REPORT NO.: RF910612R04

MODEL NO.: Microsoft® Wireless Natural®
MultiMedia Keyboard

RECEIVED: June 12, 2002

TESTED: June 14 ~ June 20, 2002

APPLICANT: MICROSOFT CORPORATION

ADDRESS: ONE MICROSOFT WAY, REDMOND,
WA 98052-6399, U.S.A.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chia Pau Tsuen, Linkou Hsiang,
Taipei, Taiwan, R.O.C.

This test report consists of 18 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0

Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
3.4	DESCRIPTION OF SUPPORT UNITS	6
4	TEST procedure and result	7
4.1	CONDUCTED EMISSION MEASUREMENT	7
4.2	RADIATED EMISSION MEASUREMENT	7
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	7
4.2.2	TEST INSTRUMENT	8
4.2.3	TEST PROCEDURE	9
4.2.4	TEST SETUP	10
4.2.5	EUT OPERATING CONDITION	10
4.2.6	TEST RESULT (A)	11
4.2.7	TEST RESULT (B)	13
4.2.8	TEST RESULT (C)	15
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	17
6	INFORMATION ON THE TESTING LABORATORIES	18

1 CERTIFICATION

PRODUCT : Wireless Keyboard
BRAND NAME : Microsoft®
MODEL NO : Microsoft® Wireless Natural® MultiMedia Keyboard
APPLICANT : MICROSOFT CORPORATION
STANDARDS : 47 CFR Part 15, Subpart C (15.227)
ANSI C63.4-1992, Canada RSS 210

We, **Advance Data Technology Corporation**, hereby certify that three samples of the designation have been tested in our facility from June 14 to June 20, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY : Emily Lu , DATE : June 24, 2002
Emily Lu

APPROVED BY : Alan Lane , DATE : June 24, 2002
Dr. Alan Lane, Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	N/A	Power supply is 3VDC from batteries
15.227	Radiated Emission Test	PASS	Minimum passing margin is -19.4dBuV at 54.20MHz

NOTE: The receiver part to communicate with the EUT has been verified to comply with FCC Part 15, Subpart B, Class B (DoC). The test report can be provided upon request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Keyboard
MODEL NO.	Microsoft® Wireless Natural® MultiMedia Keyboard
POWER SUPPLY	3VDC from battery
MODULATION TYPE	FSK
CARRIER FREQUENCY OF EACH CHANNEL	27.095MHz, 27.195MHz
BANDWIDTH OF EACH CHANNEL	NA
NUMBER OF CHANNEL	2
ANTENNA TYPE	wire antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

- 1.The EUT is the transmitter part of a Wireless Keyboard.
- 2.Three identical samples were tested at Microsoft's request, the serial numbers are DVT2#146(R), DVT2#214(R) and DVT2#223(R).
- 3.For more detailed features description of the EUT, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

Two channels were provided in this EUT.

Channel	Frequency	Channel	Frequency
1	27.095MHz	2	27.195MHz

NOTE: Test result (A) is for sample serial number DVT2#214(R), test result (B) is for sample DVT2#223(R) and test result (C) is for sample DVT2#146(R).

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is the transmitter part of a Wireless Keyboard. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C (15.227)

ANSI C63.4-1992, Canada RSS 210

All tests have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

NA

4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Other Frequencies (MHz)	Field Strength of Fundamental	
	uV/meter	dBuV/meter
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
*HP Preamplifier	8447D	2944A08485	Oct. 30, 2002
HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* BICONICAL ANTENNA	VHBA9123	449	Dec. 10, 2002
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2002
SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
EMCO Horn Antenna	3115	9312-4192	April 9, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 2, 2002
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 2, 2002
Open Field Test Site	Site 5	ADT-R05	July 28, 2002
VCCI Site Registration No.	Site 5	R-1039	NA

NOTE: 1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

3. "*" = These equipment are used for the final measurement.

4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.


4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

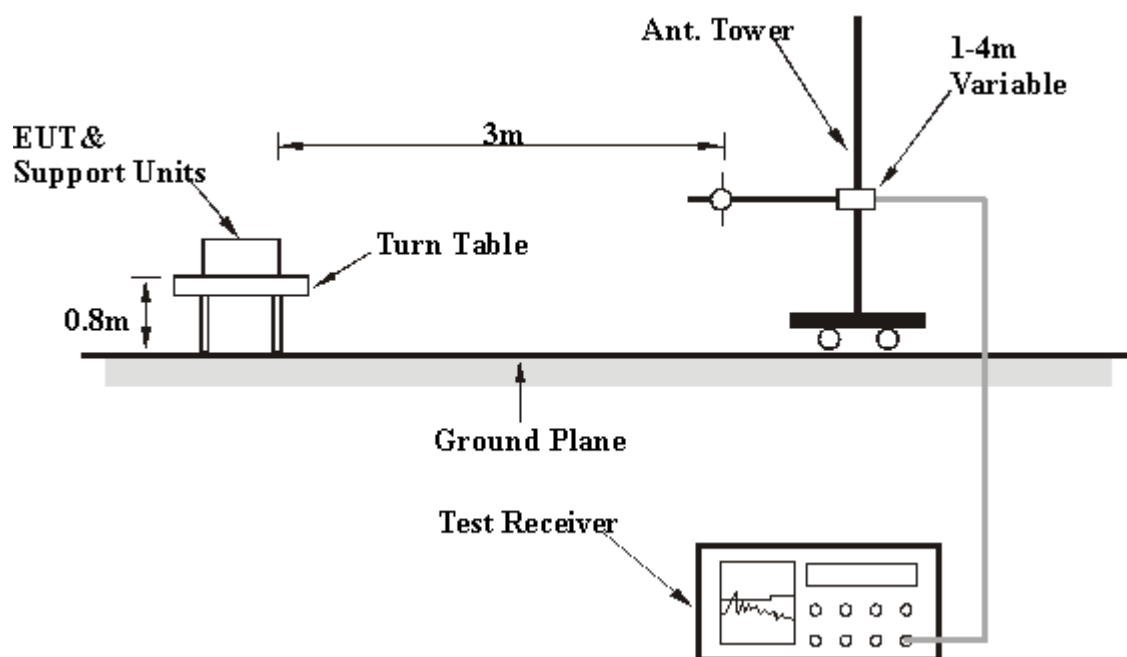

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITION

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.

4.2.6 TEST RESULT (A)

EUT	Wireless Keyboard	MODEL	Microsoft® Wireless Natural® MultiMedia Keyboard
FREQUENCY RANGE	30-1000 MHz	SERIAL NO.	DVT2#214(R)
CHANNEL	1	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
INPUT POWER	3VDC		
ENVIRONMENTAL CONDITIONS	30 deg. C, 70 % RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.20	51.0 PK	100.00	-49.00	1.70H	3	44.03	6.20	0.77	0.00	-6.97
2	*27.20	48.6 AV	80.00	-31.40	1.70H	3	41.63	6.20	0.77	0.00	-6.97
3	54.20	20.6 QP	40.00	-19.40	2.07H	105	11.80	7.94	0.86	0.00	-8.80
4	189.70	17.5 QP	43.50	-26.00	1.70H	132	7.17	8.95	1.39	0.00	-10.33
5	216.80	21.6 QP	46.00	-24.40	1.14H	227	10.12	9.97	1.51	0.00	-11.48
6	243.90	19.1 QP	46.00	-26.90	1.02H	345	5.86	11.56	1.69	0.00	-13.24
7	271.00	18.6 QP	46.00	-27.40	1.80H	292	4.36	12.47	1.77	0.00	-14.24

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.10	45.0 AV	80.00	-35.00	1.20V	4	38.03	6.20	0.77	0.00	-6.97
2	*27.10	48.4 PK	100.00	-51.60	1.20V	4	41.43	6.20	0.77	0.00	-6.97
3	54.20	15.6 QP	40.00	-24.40	1.54V	47	6.80	7.94	0.86	0.00	-8.80
4	108.40	12.6 QP	43.50	-30.90	1.10V	87	0.56	10.87	1.17	0.00	-12.04
5	216.80	13.9 QP	46.00	-32.10	1.22V	85	2.42	9.97	1.51	0.00	-11.48
6	243.90	14.6 QP	46.00	-31.40	1.36V	168	1.36	11.56	1.69	0.00	-13.24
7	271.00	13.0 QP	46.00	-33.00	1.47V	333	-1.24	12.47	1.77	0.00	-14.24

NOTE:

1. Emission level = Raw Value – Correction Factor
2. Correction Factor = Pre-Amplifier Factor - Antenna Factor - Cable Factor
(Pre-Amplifier Factor = 0, when a Pre-Amplifier is not used for the test.)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" = Fundamental frequency.

EUT	Wireless Keyboard	MODEL	Microsoft® Wireless Natural® MultiMedia Keyboard
FREQUENCY RANGE	30-1000 MHz	SERIAL NO.	DVT2#214(R)
CHANNEL	2	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
INPUT POWER	3VDC		
ENVIRONMENTAL CONDITIONS	30 deg. C, 70 % RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.20	51.0 PK	100.00	-49.00	1.86H	4	44.03	6.20	0.77	0.00	-6.97
2	*27.20	49.0 AV	80.00	-31.00	1.86H	4	42.03	6.20	0.77	0.00	-6.97
3	54.40	18.5 QP	40.00	-21.50	1.86H	33	9.70	7.94	0.86	0.00	-8.80
4	190.40	17.4 QP	43.50	-26.10	1.43H	119	7.07	8.95	1.39	0.00	-10.33
5	217.60	20.6 QP	46.00	-25.40	1.33H	186	9.12	9.97	1.51	0.00	-11.48
6	244.80	15.6 QP	46.00	-30.40	1.23H	275	2.20	11.70	1.70	0.00	-13.40
7	272.00	18.5 QP	46.00	-27.50	1.63H	36	4.19	12.53	1.78	0.00	-14.31

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.20	48.5 PK	100.00	-51.50	1.14V	7	41.53	6.20	0.77	0.00	-6.97
2	*27.20	46.3 AV	80.00	-33.70	1.14V	7	39.33	6.20	0.77	0.00	-6.97
3	54.40	15.6 QP	40.00	-24.40	1.83V	106	6.80	7.94	0.86	0.00	-8.80
4	108.80	12.6 QP	43.50	-30.90	1.26V	188	0.56	10.87	1.17	0.00	-12.04
5	217.60	14.2 QP	46.00	-31.80	1.33V	271	2.72	9.97	1.51	0.00	-11.48
6	272.00	14.2 QP	46.00	-31.80	1.42V	313	-0.11	12.53	1.78	0.00	-14.31

NOTE:

1. Emission level = Raw Value – Correction Factor
2. Correction Factor = Pre-Amplifier Factor - Antenna Factor - Cable Factor
(Pre-Amplifier Factor = 0, when a Pre-Amplifier is not used for the test.)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" = Fundamental frequency.

4.2.7 TEST RESULT (B)

EUT	Wireless Keyboard	MODEL	Microsoft® Wireless Natural® MultiMedia Keyboard
FREQUENCY RANGE	30-1000 MHz	SERIAL NO.	DVT2#223(R)
CHANNEL	1	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
INPUT POWER	3VDC		
ENVIRONMENTAL CONDITIONS	30 deg. C, 70 % RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.10	50.5 PK	100.00	-49.50	1.67H	4	43.53	6.20	0.77	0.00	-6.97
2	*27.10	48.6 AV	80.00	-31.40	1.67H	4	41.63	6.20	0.77	0.00	-6.97
3	54.20	18.6 QP	40.00	-21.40	1.63H	336	9.80	7.94	0.86	0.00	-8.80
4	216.80	23.0 QP	46.00	-23.00	1.58H	185	11.52	9.97	1.51	0.00	-11.48
5	243.90	19.8 QP	46.00	-26.20	1.81H	102	6.56	11.56	1.69	0.00	-13.24
6	271.00	16.5 QP	46.00	-29.50	1.90H	5	2.26	12.47	1.77	0.00	-14.24
7	298.10	18.0 QP	46.00	-28.00	1.64H	33	2.94	13.18	1.88	0.00	-15.06
8	325.20	20.0 QP	46.00	-26.00	1.14H	100	4.27	13.72	2.00	0.00	-15.73

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.10	48.8 PK	100.00	-51.20	1.35V	3	41.83	6.20	0.77	0.00	-6.97
2	*27.10	45.8 AV	80.00	-34.20	1.35V	3	38.83	6.20	0.77	0.00	-6.97
3	108.80	17.0 QP	43.50	-26.50	1.46V	350	4.96	10.87	1.17	0.00	-12.04
4	216.80	13.4 QP	46.00	-32.60	2.06V	262	1.92	9.97	1.51	0.00	-11.48
5	243.90	16.6 QP	46.00	-29.40	1.35V	145	3.36	11.56	1.69	0.00	-13.24
6	271.00	13.6 QP	46.00	-32.40	1.50V	60	-0.64	12.47	1.77	0.00	-14.24

NOTE:

1. Emission level = Raw Value – Correction Factor
2. Correction Factor = Pre-Amplifier Factor - Antenna Factor - Cable Factor
(Pre-Amplifier Factor = 0, when a Pre-Amplifier is not used for the test.)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" = Fundamental frequency.

EUT	Wireless Keyboard	MODEL	Microsoft® Wireless Natural® MultiMedia Keyboard
FREQUENCY RANGE	30-1000 MHz	SERIAL NO.	DVT2#223(R)
CHANNEL	2	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
INPUT POWER	3VDC		
ENVIRONMENTAL CONDITIONS	30 deg. C, 70 % RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.20	50.3 PK	100.00	-49.70	1.75H	6	43.33	6.20	0.77	0.00	-6.97
2	*27.20	48.1 AV	80.00	-31.90	1.75H	6	41.13	6.20	0.77	0.00	-6.97
3	54.40	17.6 QP	40.00	-22.40	2.16H	279	8.80	7.94	0.86	0.00	-8.80
4	190.40	18.2 QP	43.50	-25.30	1.48H	24	7.87	8.95	1.39	0.00	-10.33
5	217.60	23.5 QP	46.00	-22.50	1.26H	57	12.02	9.97	1.51	0.00	-11.48
6	244.80	18.5 QP	46.00	-27.50	1.91H	146	5.10	11.70	1.70	0.00	-13.40
7	272.00	18.3 QP	46.00	-27.70	2.33H	266	3.99	12.53	1.78	0.00	-14.31
8	299.20	16.5 QP	46.00	-29.50	1.61H	346	1.44	13.18	1.88	0.00	-15.06
9	326.40	18.6 QP	46.00	-27.40	1.19H	3	2.87	13.72	2.00	0.00	-15.73

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.20	48.0 PK	100.00	-52.00	1.11V	8	41.03	6.20	0.77	0.00	-6.97
2	*27.20	45.2 AV	80.00	-34.80	1.11V	8	38.23	6.20	0.77	0.00	-6.97
3	108.80	14.6 QP	43.50	-28.90	1.73V	247	2.56	10.87	1.17	0.00	-12.04
4	217.60	15.0 QP	46.00	-31.00	1.18V	145	3.52	9.97	1.51	0.00	-11.48
5	244.80	14.6 QP	46.00	-31.40	1.50V	1	1.20	11.70	1.70	0.00	-13.41
6	272.00	14.5 QP	46.00	-31.50	1.27V	72	0.19	12.53	1.78	0.00	-14.31

NOTE:

1. Emission level = Raw Value – Correction Factor
2. Correction Factor = Pre-Amplifier Factor - Antenna Factor - Cable Factor
(Pre-Amplifier Factor = 0, when a Pre-Amplifier is not used for the test.)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "※" = Fundamental frequency.

4.2.8 TEST RESULT (C)

EUT	Wireless Keyboard	MODEL	Microsoft® Wireless Natural® MultiMedia Keyboard
FREQUENCY RANGE	30-1000 MHz	SERIAL NO.	DVT2#146(R)
CHANNEL	1	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
INPUT POWER	3VDC		
ENVIRONMENTAL CONDITIONS	30 deg. C, 70 % RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.10	47.4 AV	80.00	-32.60	1.80H	15	40.43	6.20	0.77	0.00	-6.97
2	*27.10	50.1 PK	100.00	-49.90	1.80H	15	43.13	6.20	0.77	0.00	-6.97
3	54.20	19.6 QP	40.00	-20.40	1.75H	20	10.80	7.94	0.86	0.00	-8.80
4	216.80	23.8 QP	46.00	-22.20	1.68H	92	12.32	9.97	1.51	0.00	-11.48
5	243.90	19.4 QP	46.00	-26.60	1.52H	161	6.16	11.56	1.69	0.00	-13.24
6	271.00	18.6 QP	46.00	-27.40	1.30H	253	4.36	12.47	1.77	0.00	-14.24
7	298.00	19.0 QP	46.00	-27.00	1.46H	352	3.94	13.18	1.88	0.00	-15.06

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.10	43.5 AV	80.00	-36.50	1.32V	6	36.53	6.20	0.77	0.00	-6.97
2	*27.10	46.8 PK	100.00	-53.20	1.32V	6	39.83	6.20	0.77	0.00	-6.97
3	54.20	18.3 QP	40.00	-21.70	1.72V	248	9.50	7.94	0.86	0.00	-8.80
4	216.80	14.6 QP	46.00	-31.40	1.65V	134	3.12	9.97	1.51	0.00	-11.48
5	243.90	17.6 QP	46.00	-28.40	1.43V	68	4.36	11.56	1.69	0.00	-13.24
6	271.00	13.5 QP	46.00	-32.50	1.24V	21	-0.74	12.47	1.77	0.00	-14.24

NOTE:

1. Emission level = Raw Value – Correction Factor
2. Correction Factor = Pre-Amplifier Factor - Antenna Factor - Cable Factor
(Pre-Amplifier Factor = 0, when a Pre-Amplifier is not used for the test.)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" = Fundamental frequency.

EUT	Wireless Keyboard	MODEL	Microsoft® Wireless Natural® MultiMedia Keyboard
FREQUENCY RANGE	30-1000 MHz	SERIAL NO.	DVT2#146(R)
CHANNEL	2	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
INPUT POWER	3VDC		
ENVIRONMENTAL CONDITIONS	30 deg. C, 70 % RH, 1050 hPa	TESTED BY: Bunny Yao	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.20	49.8 PK	100.00	-50.20	1.77H	7	42.83	6.20	0.77	0.00	-6.97
2	*27.20	46.1 AV	80.00	-33.90	1.77H	7	39.13	6.20	0.77	0.00	-6.97
3	54.40	17.9 QP	40.00	-22.10	1.69H	36	9.10	7.94	0.86	0.00	-8.80
4	217.60	24.0 QP	46.00	-22.00	1.64H	96	12.52	9.97	1.51	0.00	-11.48
5	244.80	20.0 QP	46.00	-26.00	1.26H	164	6.60	11.70	1.70	0.00	-13.40
6	272.00	19.4 QP	46.00	-26.60	1.52H	264	5.09	12.53	1.78	0.00	-14.31
7	299.20	18.2 QP	46.00	-27.80	1.43H	340	3.14	13.18	1.88	0.00	-15.06

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.20	46.4 PK	100.00	-53.60	1.18V	15	39.43	6.20	0.77	0.00	-6.97
2	*27.20	43.9 AV	80.00	-36.10	1.18V	15	36.93	6.20	0.77	0.00	-6.97
3	54.40	19.0 QP	40.00	-21.00	2.17V	322	10.20	7.94	0.86	0.00	-8.80
4	108.80	15.6 QP	43.50	-27.90	1.25V	266	3.56	10.87	1.17	0.00	-12.04
5	217.60	15.9 QP	46.00	-30.10	1.60V	322	4.42	9.97	1.51	0.00	-11.48
6	244.80	19.0 QP	46.00	-27.00	1.49V	296	5.60	11.70	1.70	0.00	-13.40
7	272.00	13.9 QP	46.00	-32.10	1.24V	211	-0.41	12.53	1.78	0.00	-14.31

NOTE:

1. Emission level = Raw Value – Correction Factor
2. Correction Factor = Pre-Amplifier Factor - Antenna Factor - Cable Factor
(Pre-Amplifier Factor = 0, when a Pre-Amplifier is not used for the test.)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" = Fundamental frequency.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab:

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.