

FCC PART 22H, PART 24E  
MEASUREMENT AND TEST REPORT

For

**Dynamics Hong Kong Limited**

Room F, 16/F, Block1, Golden Dragon Industrial Center, 152-160 Tai Lin Pai Road, Kwai Chung, N.T.

**FCC ID: C89-G8**

|                                             |                                                                                                                                                                                                                                                         |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report      | <b>Product Type:</b><br>MID                                                                                                                                                                                                                             |
| <b>Test Engineer:</b> Dean Liu              | <i>Allen Qiao</i>                                                                                                                                                                                                                                       |
| <b>Report Number:</b> RDG150423001-00C      |                                                                                                                                                                                                                                                         |
| <b>Report Date:</b> 2015-05-07              |                                                                                                                                                                                                                                                         |
| <b>Reviewed By:</b> Sula Huang<br>RF Leader | <i>Sula Huang</i>                                                                                                                                                                                                                                       |
| <b>Test Laboratory:</b>                     | Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industrial Zone,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

|                                                                                                 |           |
|-------------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                                 | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                        | 4         |
| OBJECTIVE .....                                                                                 | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                              | 4         |
| TEST METHODOLOGY .....                                                                          | 4         |
| TEST FACILITY .....                                                                             | 4         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                           | <b>5</b>  |
| JUSTIFICATION .....                                                                             | 5         |
| EUT EXERCISE SOFTWARE .....                                                                     | 5         |
| EQUIPMENT MODIFICATIONS .....                                                                   | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                                        | 5         |
| CONFIGURATION OF TEST SETUP .....                                                               | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                               | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                            | <b>7</b>  |
| <b>FCC §1.1310 &amp; §2.1093- RF EXPOSURE .....</b>                                             | <b>8</b>  |
| APPLICABLE STANDARD .....                                                                       | 8         |
| TEST RESULT .....                                                                               | 8         |
| <b>FCC §2.1047 - MODULATION CHARACTERISTIC .....</b>                                            | <b>9</b>  |
| <b>FCC § 2.1046, § 22.913 (A) &amp; § 24.232 (C) - RF OUTPUT POWER.....</b>                     | <b>10</b> |
| APPLICABLE STANDARD .....                                                                       | 10        |
| TEST PROCEDURE .....                                                                            | 10        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 13        |
| TEST DATA .....                                                                                 | 13        |
| <b>FCC §2.1049, §22.917, §22.905 &amp; §24.238 - OCCUPIED BANDWIDTH .....</b>                   | <b>17</b> |
| APPLICABLE STANDARD .....                                                                       | 17        |
| TEST PROCEDURE .....                                                                            | 17        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 17        |
| TEST DATA .....                                                                                 | 17        |
| <b>FCC §2.1051, §22.917(A) &amp; §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b> | <b>24</b> |
| APPLICABLE STANDARD .....                                                                       | 24        |
| TEST PROCEDURE .....                                                                            | 24        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 24        |
| TEST DATA .....                                                                                 | 24        |
| <b>FCC §2.1053, §22.917 &amp; §24.238 - SPURIOUS RADIATED EMISSIONS .....</b>                   | <b>35</b> |
| APPLICABLE STANDARD .....                                                                       | 35        |
| TEST PROCEDURE .....                                                                            | 35        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 35        |
| TEST DATA .....                                                                                 | 36        |
| <b>FCC §22.917(A) &amp; §24.238(A) - BAND EDGES.....</b>                                        | <b>39</b> |
| APPLICABLE STANDARD .....                                                                       | 39        |
| TEST PROCEDURE .....                                                                            | 39        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 39        |
| TEST DATA .....                                                                                 | 39        |
| <b>FCC §2.1055, §22.355 &amp; §24.235 - FREQUENCY STABILITY .....</b>                           | <b>51</b> |

APPLICABLE STANDARD .....51

TEST PROCEDURE .....51

TEST EQUIPMENT LIST AND DETAILS.....52

TEST DATA .....52

FINAL

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *Dynamics Hong Kong Limited*'s product, model number: *G8 (FCC ID: C89-G8)* (the "EUT") in this report was a *MID*, which was measured approximately: 18.9 cm (L) x 11.2 cm (W) x 1.4 cm (H), rated input voltage: DC 3.7V rechargeable Li-ion battery or DC5V charging from adapter.

Adapter information: DVE  
Model: DSC-5CU-05 050100  
Input: AC100-240V~50-60Hz, 0.2A  
Output: DC5.0V, 1A

*All measurement and test data in this report was gathered from production sample serial number: 150423001 (Assigned by BACL, Dongguan). The EUT was received on 2015-04-24.*

### Objective

This report is prepared on behalf of *Dynamics Hong Kong Limited* in accordance with Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

### Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: C89-G8  
FCC Part 15C DSS submissions with FCC ID: C89-G8  
FCC Part 15C DTS submissions with FCC ID: C89-G8.

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services  
Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D-2010, ANSI C63.4-2009.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured for testing according to TIA/EIA-603-D-2010.

The test items were performed with the EUT operating at testing mode.

### EUT Exercise Software

N/A


### Equipment Modifications

No modification was made to the EUT.


### Support Equipment List and Details

| Manufacturer | Description                          | Model  | Serial Number |
|--------------|--------------------------------------|--------|---------------|
| R&S          | Universal Radio Communication Tester | CMU200 | 109038        |
| N/A          | ANTENNA                              | N/A    | N/A           |

### Configuration of Test Setup

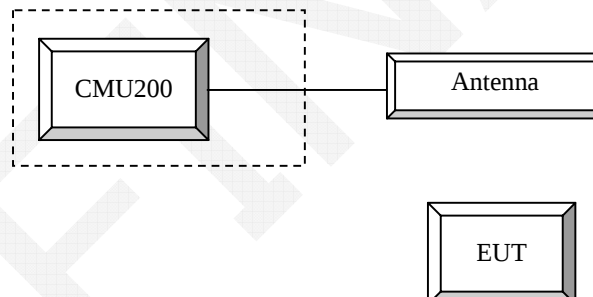

## Block Diagram of Test Setup

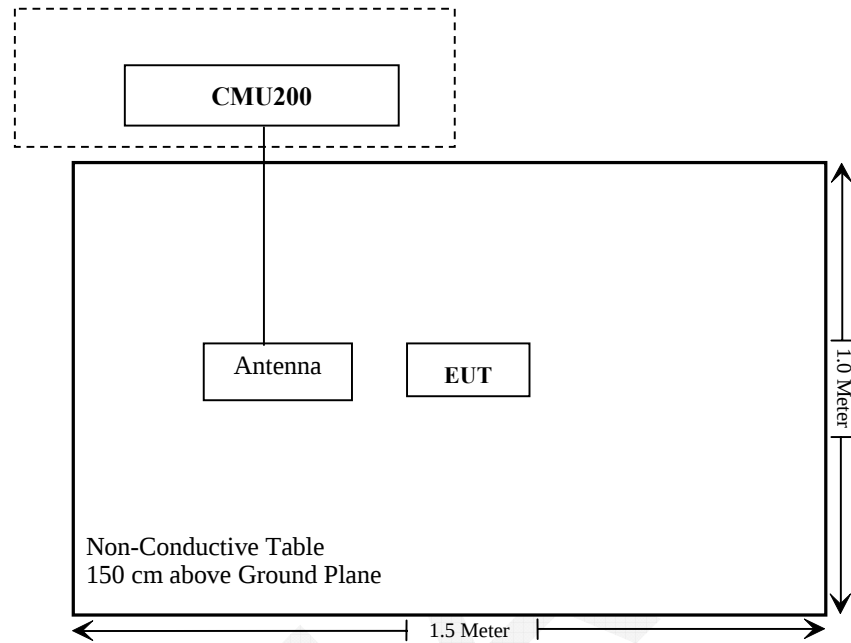

**SUMMARY OF TEST RESULTS**

| FCC Rules                                | Description of Test                                                    | Result         |
|------------------------------------------|------------------------------------------------------------------------|----------------|
| §1.1310, §2.1093                         | RF Exposure                                                            | Compliance     |
| §2.1046;<br>§ 22.913 (a); § 24.232 (c)   | RF Output Power                                                        | Compliance     |
| § 2.1047                                 | Modulation Characteristics                                             | Not Applicable |
| § 2.1049; § 22.905<br>§ 22.917; § 24.238 | Occupied Bandwidth                                                     | Compliance     |
| § 2.1051,<br>§ 22.917 (a); § 24.238 (a)  | Spurious Emissions at Antenna Terminal                                 | Compliance     |
| § 2.1053<br>§ 22.917 (a); § 24.238 (a)   | Field Strength of Spurious Radiation                                   | Compliance     |
| § 22.917 (a); § 24.238 (a)               | Out of band emission, Band Edge                                        | Compliance     |
| § 2.1055<br>§ 22.355; § 24.235           | Frequency stability vs. temperature<br>Frequency stability vs. voltage | Compliance     |

## **FCC §1.1310 & §2.1093- RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliant, please refer to the SAR report: RDG150423001-20.

FINAL

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

---

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FINAL

## **FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER**

### **Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

### **Test Procedure**

#### **GPRS/EGPRS**

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

**WCDMA-Release 99**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

|                                   |                         |              |
|-----------------------------------|-------------------------|--------------|
| <b>WCDMA<br/>General Settings</b> | Loopback Mode           | Test Mode 1  |
|                                   | Rel99 RMC               | 12.2kbps RMC |
|                                   | Power Control Algorithm | Algorithm2   |
|                                   | $\beta_c / \beta_d$     | 8/15         |

**WCDMA HSDPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                                        | Mode<br>Subset                  | HSDPA<br>1   | HSDPA<br>2 | HSDPA<br>3 | HSDPA<br>4 |
|----------------------------------------|---------------------------------|--------------|------------|------------|------------|
| <b>WCDMA<br/>General<br/>Settings</b>  | Loopback Mode                   | Test Mode 1  |            |            |            |
|                                        | Rel99 RMC                       | 12.2kbps RMC |            |            |            |
|                                        | HSDPA FRC                       | H-Set1       |            |            |            |
|                                        | Power Control Algorithm         | Algorithm2   |            |            |            |
|                                        | $\beta_c$                       | 2/15         | 12/15      | 15/15      | 15/15      |
|                                        | $\beta_d$                       | 15/15        | 15/15      | 8/15       | 4/15       |
|                                        | $\beta_d$ (SF)                  | 64           |            |            |            |
|                                        | $\beta_c / \beta_d$             | 2/15         | 12/15      | 15/8       | 15/4       |
|                                        | $\beta_{hs}$                    | 4/15         | 24/15      | 30/15      | 30/15      |
|                                        | MPR(dB)                         | 0            | 0          | 0.5        | 0.5        |
| <b>HSDPA<br/>Specific<br/>Settings</b> | DACK                            | 8            |            |            |            |
|                                        | DNAK                            | 8            |            |            |            |
|                                        | DCQI                            | 8            |            |            |            |
|                                        | Ack-Nack repetition factor      | 3            |            |            |            |
|                                        | CQI Feedback                    | 4ms          |            |            |            |
|                                        | CQI Repetition Factor           | 2            |            |            |            |
|                                        | $A_{hs} = \beta_{hs} / \beta_c$ | 30/15        |            |            |            |

**WCDMA HSUPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                                             | Mode                             | HSUPA                                                                                                                                        | HSUPA                                                | HSUPA | HSUPA                                                                                                                                        | HSUPA |
|---------------------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------|-------|
|                                             | Subset                           | 1                                                                                                                                            | 2                                                    | 3     | 4                                                                                                                                            | 5     |
| <b>WCDMA<br/>A<br/>General<br/>Settings</b> | Loopback Mode                    | Test Mode 1                                                                                                                                  |                                                      |       |                                                                                                                                              |       |
|                                             | Rel99 RMC                        | 12.2kbps RMC                                                                                                                                 |                                                      |       |                                                                                                                                              |       |
|                                             | HSDPA FRC                        | H-Set1                                                                                                                                       |                                                      |       |                                                                                                                                              |       |
|                                             | HSUPA Test                       | HSUPA Loopback                                                                                                                               |                                                      |       |                                                                                                                                              |       |
|                                             | Power Control Algorithm          | Algorithm2                                                                                                                                   |                                                      |       |                                                                                                                                              |       |
|                                             | $\beta_c$                        | 11/15                                                                                                                                        | 6/15                                                 | 15/15 | 2/15                                                                                                                                         | 15/15 |
|                                             | $\beta_d$                        | 15/15                                                                                                                                        | 15/15                                                | 9/15  | 15/15                                                                                                                                        | 0     |
|                                             | $\beta_{ec}$                     | 209/225                                                                                                                                      | 12/15                                                | 30/15 | 2/15                                                                                                                                         | 5/15  |
|                                             | $\beta_c / \beta_d$              | 11/15                                                                                                                                        | 6/15                                                 | 15/9  | 2/15                                                                                                                                         | -     |
|                                             | $\beta_{hs}$                     | 22/15                                                                                                                                        | 12/15                                                | 30/15 | 4/15                                                                                                                                         | 5/15  |
|                                             | CM(dB)                           | 1.0                                                                                                                                          | 3.0                                                  | 2.0   | 3.0                                                                                                                                          | 1.0   |
|                                             | MPR(dB)                          | 0                                                                                                                                            | 2                                                    | 1     | 2                                                                                                                                            | 0     |
| <b>HSDPA<br/>Specific<br/>Settings</b>      | DACK                             | 8                                                                                                                                            |                                                      |       |                                                                                                                                              |       |
|                                             | DNAK                             | 8                                                                                                                                            |                                                      |       |                                                                                                                                              |       |
|                                             | DCQI                             | 8                                                                                                                                            |                                                      |       |                                                                                                                                              |       |
|                                             | Ack-Nack repetition factor       | 3                                                                                                                                            |                                                      |       |                                                                                                                                              |       |
|                                             | CQI Feedback                     | 4ms                                                                                                                                          |                                                      |       |                                                                                                                                              |       |
|                                             | CQI Repetition Factor            | 2                                                                                                                                            |                                                      |       |                                                                                                                                              |       |
|                                             | Ahs= $\beta_{hs} / \beta_c$      | 30/15                                                                                                                                        |                                                      |       |                                                                                                                                              |       |
| <b>HSUPA<br/>Specific<br/>Settings</b>      | DE-DPCCH                         | 6                                                                                                                                            | 8                                                    | 8     | 5                                                                                                                                            | 7     |
|                                             | DHARQ                            | 0                                                                                                                                            | 0                                                    | 0     | 0                                                                                                                                            | 0     |
|                                             | AG Index                         | 20                                                                                                                                           | 12                                                   | 15    | 17                                                                                                                                           | 21    |
|                                             | ETFCI                            | 75                                                                                                                                           | 67                                                   | 92    | 71                                                                                                                                           | 81    |
|                                             | Associated Max UL Data Rate kbps | 242.1                                                                                                                                        | 174.9                                                | 482.8 | 205.8                                                                                                                                        | 308.9 |
|                                             | Reference E_FCI                  | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 | E-TFCI 11<br>E-TFCI PO4<br>E-TFCI 92<br>E-TFCI PO 18 |       | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 |       |
|                                             |                                  |                                                                                                                                              |                                                      |       |                                                                                                                                              |       |

Radiated method:

ANSI/TIA 603-D section 2.2.17

**Test Equipment List and Details**

| Manufacturer   | Description               | Model    | Serial Number | Calibration Date | Calibration Due Date |
|----------------|---------------------------|----------|---------------|------------------|----------------------|
| R&S            | EMI Test Receiver         | ESCI     | 100224        | 2014-05-09       | 2015-05-09           |
| Sunol Sciences | Antenna                   | JB3      | A060611-3     | 2014-07-28       | 2017-07-27           |
| HP             | Amplifier                 | 8447E    | 2434A02181    | 2014-09-01       | 2015-09-01           |
| R&S            | Spectrum Analyzer         | FSEM     | DE31388       | 2014-05-09       | 2015-05-09           |
| ETS LINDGREN   | Horn Antenna              | 3115     | 000 527 35    | 2012-09-06       | 2015-09-06           |
| Giga           | Signal Generator          | 1026     | 320408        | 2014-05-09       | 2015-05-09           |
| EMCO           | Adjustable Dipole Antenna | 3121C    | 9109-753      | N/A              | N/A                  |
| TDK RF         | Horn Antenna              | HRN-0118 | 130 084       | 2012-09-06       | 2015-09-06           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25.4 °C   |
| <b>Relative Humidity:</b> | 58 %      |
| <b>ATM Pressure:</b>      | 100.6 kPa |

*The testing was performed by Dean Liu on 2015-04-30.*

**Conducted Power****Cellular Band (Part 22H) & PCS Band (Part 24E)**

| Band     | Channel No. | Peak Output Power (dBm) |                |                |                |                |                |               |                |                |
|----------|-------------|-------------------------|----------------|----------------|----------------|----------------|----------------|---------------|----------------|----------------|
|          |             | GSM                     | GPRS 1 TX Slot | GPRS 2 TX Slot | GPRS 3 TX Slot | GPRS 4 TX Slot | EDGE 1 TX Slot | EDGE 2 X Slot | EDGE 3 TX Slot | EDGE 4 TX Slot |
| Cellular | 128         | 32.87                   | 32.26          | 31.22          | 29.65          | 28.73          | 25.76          | 23.64         | 22.41          | 21.36          |
|          | 190         | 32.92                   | 32.17          | 31.09          | 29.71          | 28.92          | 25.68          | 23.66         | 22.53          | 21.41          |
|          | 251         | 32.89                   | 32.21          | 31.04          | 29.52          | 28.51          | 25.72          | 23.71         | 22.36          | 21.13          |
| PCS      | 512         | 30.13                   | 29.14          | 28.23          | 26.44          | 25.61          | 25.37          | 23.48         | 22.32          | 21.19          |
|          | 661         | 30.18                   | 29.42          | 28.58          | 26.67          | 25.73          | 25.41          | 23.52         | 22.33          | 21.26          |
|          | 810         | 30.04                   | 29.08          | 28.07          | 26.11          | 25.49          | 25.39          | 23.42         | 22.20          | 21.09          |

**WCDMA Band II**

| Mode   | 3GPP Sub Test | Average Output Power (dBm) |                   |                             |                      |                           |                    |
|--------|---------------|----------------------------|-------------------|-----------------------------|----------------------|---------------------------|--------------------|
|        |               | Low Channel (Ave. Power)   | Low Channel (PAR) | Middle Channel (Ave. Power) | Middle Channel (PAR) | High Channel (Ave. Power) | High Channel (PAR) |
| Rel 99 | 1             | 22.42                      | 3.36              | 22.41                       | 3.35                 | 22.12                     | 3.28               |
| HSDPA  | 1             | 22.19                      | 3.11              | 22.12                       | 3.03                 | 21.86                     | 3.07               |
|        | 2             | 22.23                      | 3.06              | 22.14                       | 3.02                 | 21.93                     | 3.06               |
|        | 3             | 22.28                      | 3.12              | 22.15                       | 3.05                 | 21.81                     | 3.04               |
|        | 4             | 22.31                      | 3.09              | 22.11                       | 3.02                 | 21.85                     | 3.05               |
| HSUPA  | 1             | 22.26                      | 3.08              | 22.07                       | 3.09                 | 21.96                     | 3.11               |
|        | 2             | 22.00                      | 3.12              | 22.09                       | 3.07                 | 21.83                     | 3.12               |
|        | 3             | 22.07                      | 3.11              | 22.10                       | 3.11                 | 21.92                     | 3.13               |
|        | 4             | 22.01                      | 3.10              | 22.13                       | 3.12                 | 21.93                     | 3.09               |
|        | 5             | 22.05                      | 3.09              | 22.11                       | 3.08                 | 21.89                     | 3.07               |

**WCDMA Band V**

| Mode   | 3GPP Sub Test | Average Output Power (dBm) |                   |                             |                      |                           |                    |
|--------|---------------|----------------------------|-------------------|-----------------------------|----------------------|---------------------------|--------------------|
|        |               | Low Channel (Ave. Power)   | Low Channel (PAR) | Middle Channel (Ave. Power) | Middle Channel (PAR) | High Channel (Ave. Power) | High Channel (PAR) |
| Rel 99 | 1             | 22.14                      | 3.27              | 22.27                       | 3.31                 | 22.09                     | 3.29               |
| HSDPA  | 1             | 21.94                      | 3.01              | 21.81                       | 3.12                 | 21.75                     | 3.06               |
|        | 2             | 21.83                      | 3.03              | 21.79                       | 3.13                 | 21.71                     | 3.02               |
|        | 3             | 21.67                      | 3.02              | 21.83                       | 3.08                 | 21.62                     | 3.04               |
|        | 4             | 21.89                      | 2.98              | 21.81                       | 3.07                 | 21.69                     | 3.05               |
| HSUPA  | 1             | 21.76                      | 3.07              | 21.79                       | 3.14                 | 21.76                     | 3.14               |
|        | 2             | 21.81                      | 3.01              | 21.73                       | 3.16                 | 21.53                     | 3.16               |
|        | 3             | 21.83                      | 3.02              | 21.75                       | 3.11                 | 21.56                     | 3.15               |
|        | 4             | 21.79                      | 3.06              | 21.71                       | 3.10                 | 21.67                     | 3.12               |
|        | 5             | 21.84                      | 3.10              | 21.74                       | 3.12                 | 21.71                     | 3.11               |

## ERP &amp; EIRP

| Frequency<br>(MHz) | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method     |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------|----------------|-------------------------------|------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                    |                |                               | S.G.<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| GSM 850            |                |                               |                        |                              |                    |                            |                |                |
| 836.600            | H              | 102.12                        | 27.2                   | 0.0                          | 1                  | 26.2                       | 38.5           | 12.3           |
| 836.600            | V              | 95.24                         | 23.4                   | 0.0                          | 1                  | 22.4                       | 38.5           | 16.1           |
| EDGE 850           |                |                               |                        |                              |                    |                            |                |                |
| 836.600            | H              | 97.58                         | 22.7                   | 0.0                          | 1                  | 21.7                       | 38.5           | 16.8           |
| 836.600            | V              | 90.25                         | 18.5                   | 0.0                          | 1                  | 17.5                       | 38.5           | 21.0           |
| WCDMA Band V       |                |                               |                        |                              |                    |                            |                |                |
| 836.600            | H              | 94.87                         | 19.9                   | 0.0                          | 1                  | 18.9                       | 38.5           | 19.6           |
| 836.600            | V              | 84.43                         | 12.6                   | 0.0                          | 1                  | 11.6                       | 38.5           | 26.9           |
| PCS 1900           |                |                               |                        |                              |                    |                            |                |                |
| 1880.000           | H              | 86.00                         | 14.4                   | 11.7                         | 1.4                | 24.7                       | 33.0           | 8.3            |
| 1880.000           | V              | 78.23                         | 6.8                    | 11.7                         | 1.4                | 17.1                       | 33.0           | 15.9           |
| EDGE 1900          |                |                               |                        |                              |                    |                            |                |                |
| 1880.000           | H              | 81.41                         | 9.8                    | 11.7                         | 1.4                | 20.1                       | 33.0           | 12.9           |
| 1880.000           | V              | 76.81                         | 5.4                    | 11.7                         | 1.4                | 15.7                       | 33.0           | 17.3           |
| WCDMA Band II      |                |                               |                        |                              |                    |                            |                |                |
| 1880.000           | H              | 80.03                         | 8.4                    | 11.7                         | 1.4                | 18.7                       | 33.0           | 14.3           |
| 1880.000           | V              | 72.36                         | 0.9                    | 11.7                         | 1.4                | 11.2                       | 33.0           | 21.8           |

## FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH


### Applicable Standard

FCC §2.1049, §22.917, §22.905 and §24.238.

### Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

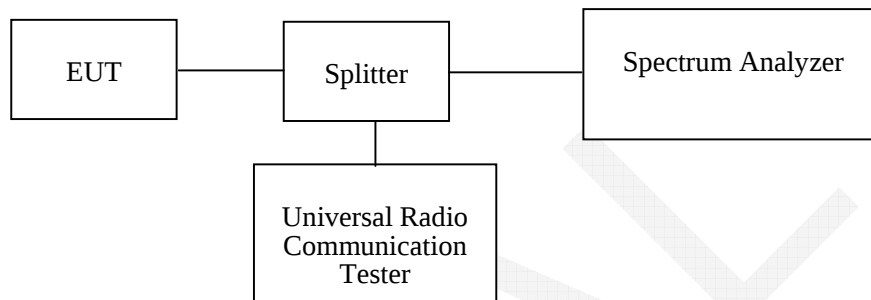

### Test Equipment List and Details

| Manufacturer | Description       | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSP 38 | 100478        | 2014-05-09       | 2015-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                    |                |
|--------------------|----------------|
| Temperature:       | 24.9-25.1 °C   |
| Relative Humidity: | 58-57 %        |
| ATM Pressure:      | 100.7-100.3kPa |


The testing was performed by Dean Liu on 2015-04-28 and 2015-05-07.



Test Mode: Transmitting

*Test Result: Compliant. Please refer to the following table and plots.*


| Band          | Channel No. | Mode   | 99% Occupied Bandwidth (kHz) | 26 dB Occupied Bandwidth (kHz) |
|---------------|-------------|--------|------------------------------|--------------------------------|
| Cellular      | 190         | GSM    | 246                          | 321                            |
|               | 190         | EDGE   | 246                          | 321                            |
| PCS           | 661         | PCS    | 246                          | 320                            |
|               | 661         | EDGE   | 246                          | 315                            |
| WCDMA Band II | 9400        | Rel 99 | 4188                         | 4769                           |
|               | 9400        | HSDPA  | 4208                         | 4769                           |
|               | 9400        | HSUPA  | 4188                         | 4749                           |
| WCDMA Band V  | 4183        | Rel 99 | 4188                         | 4749                           |
|               | 4183        | HSDPA  | 4168                         | 4749                           |
|               | 4183        | HSUPA  | 4188                         | 4749                           |

## GMSK 850 Cellular Band

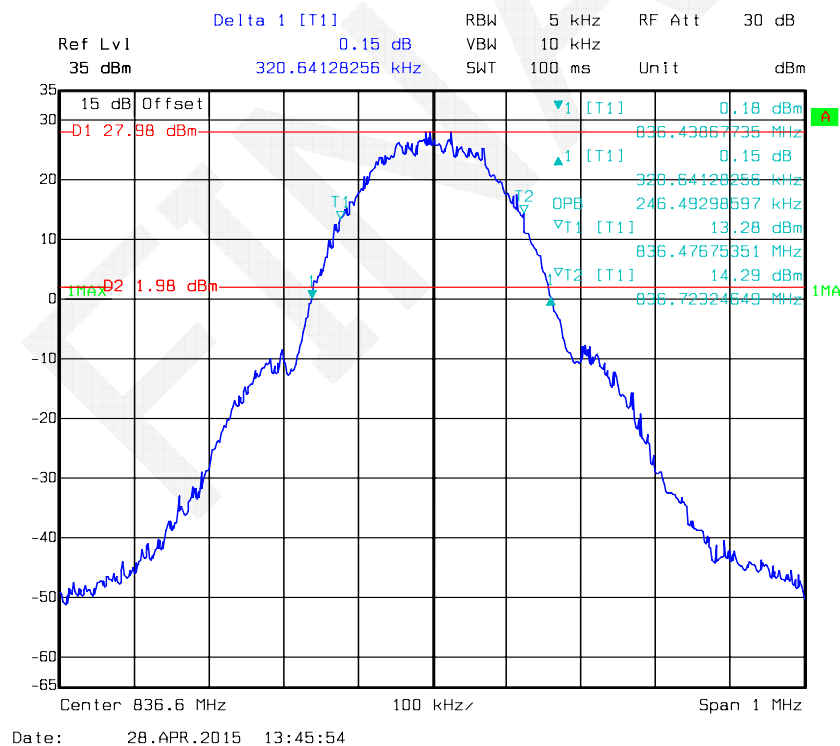


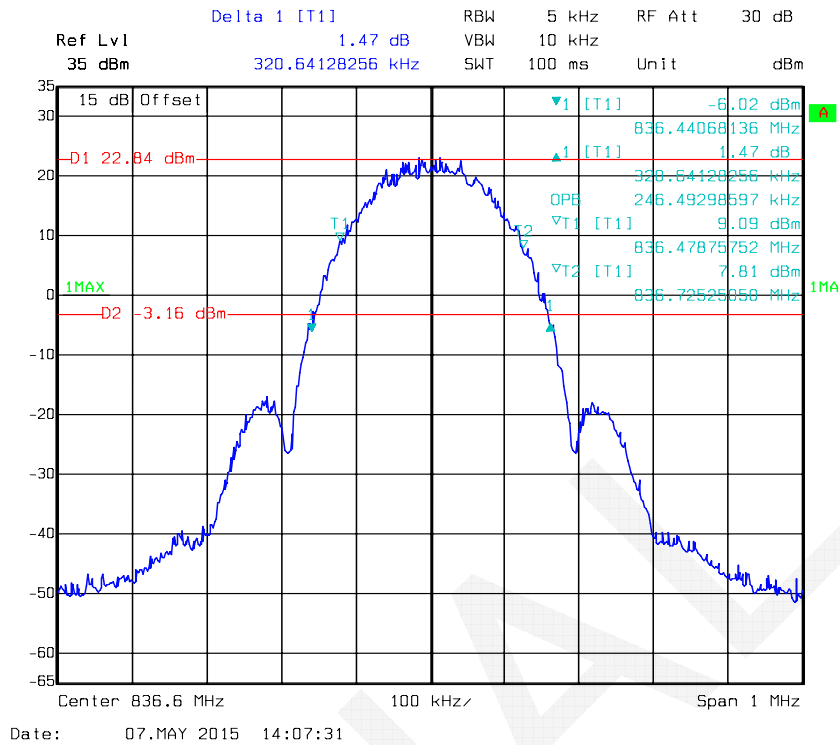
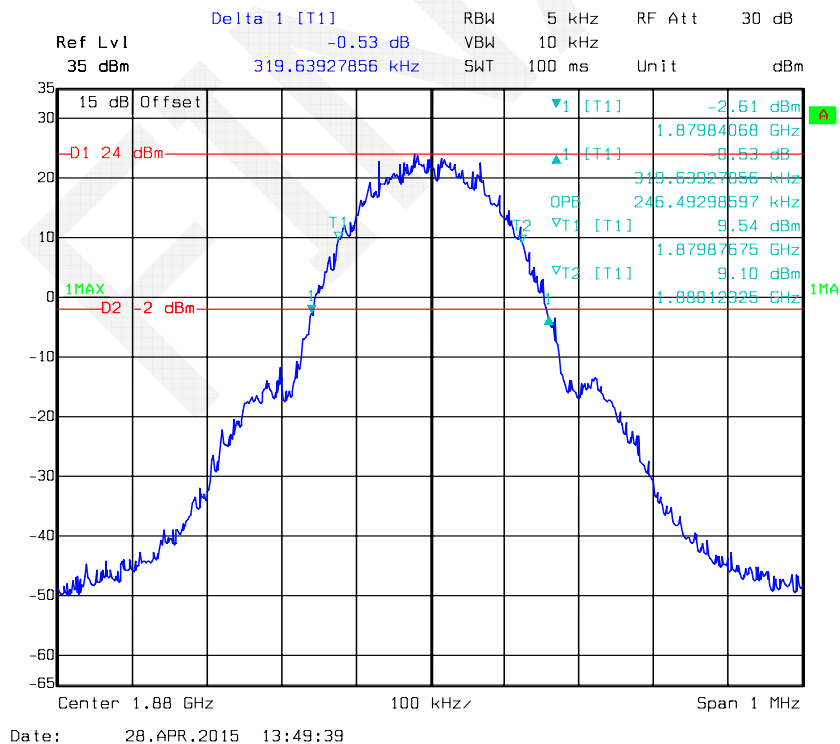
**EDGE 850 Cellular Band****GMSK PCS Band**

## EDGE PCS Band

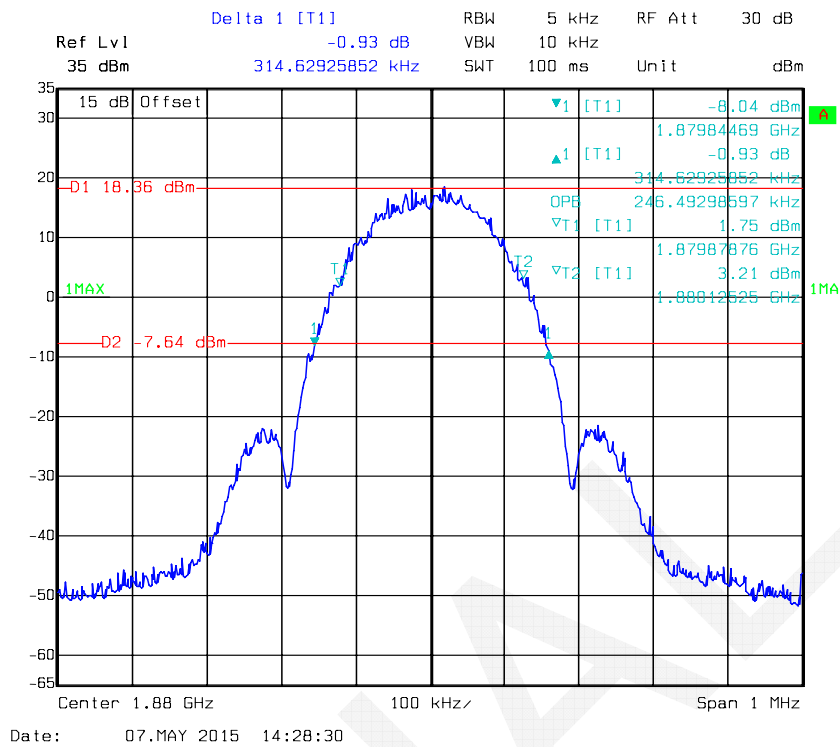


## REL99 Band II

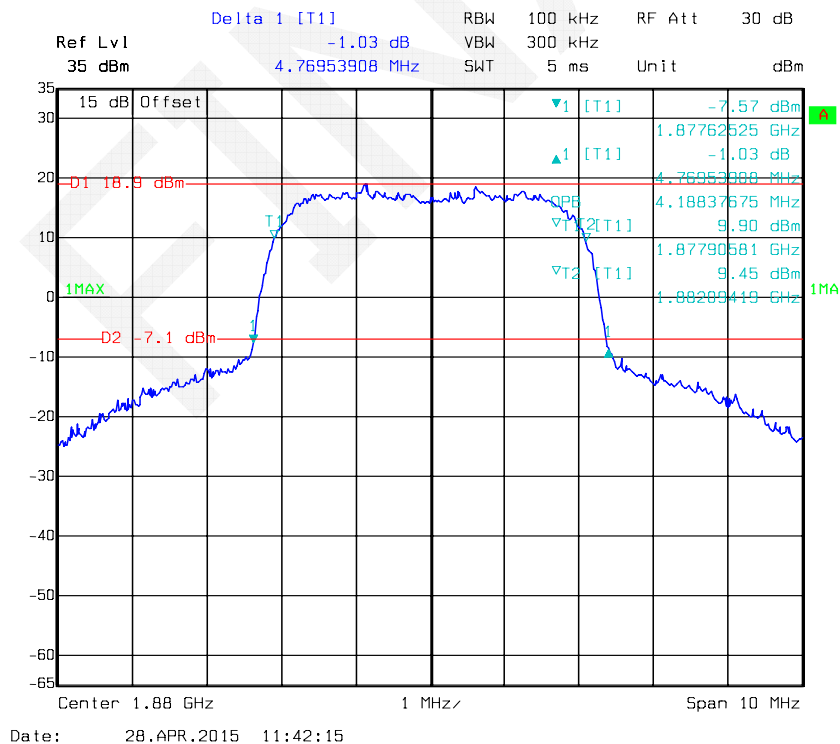


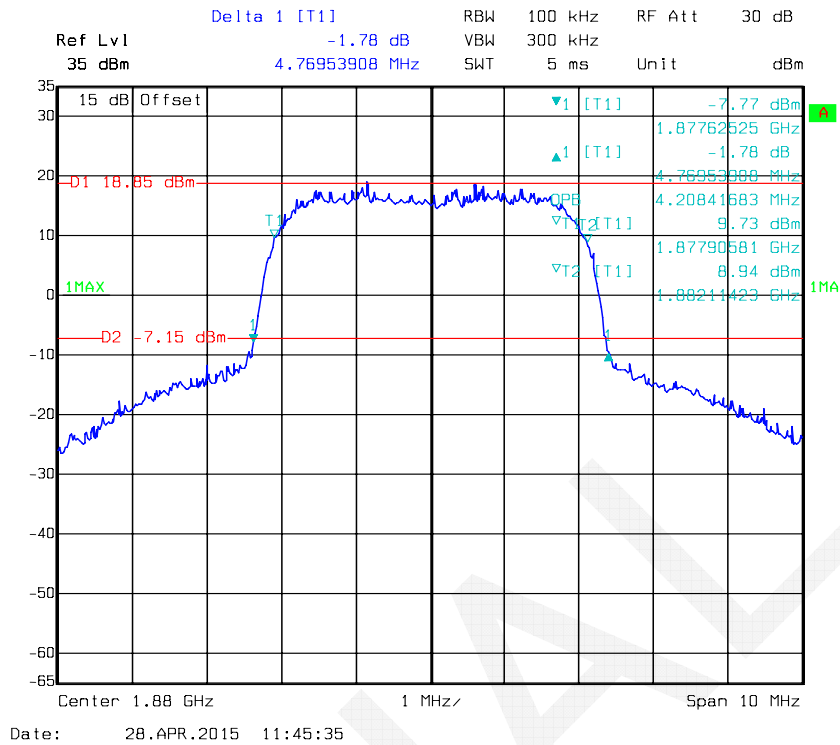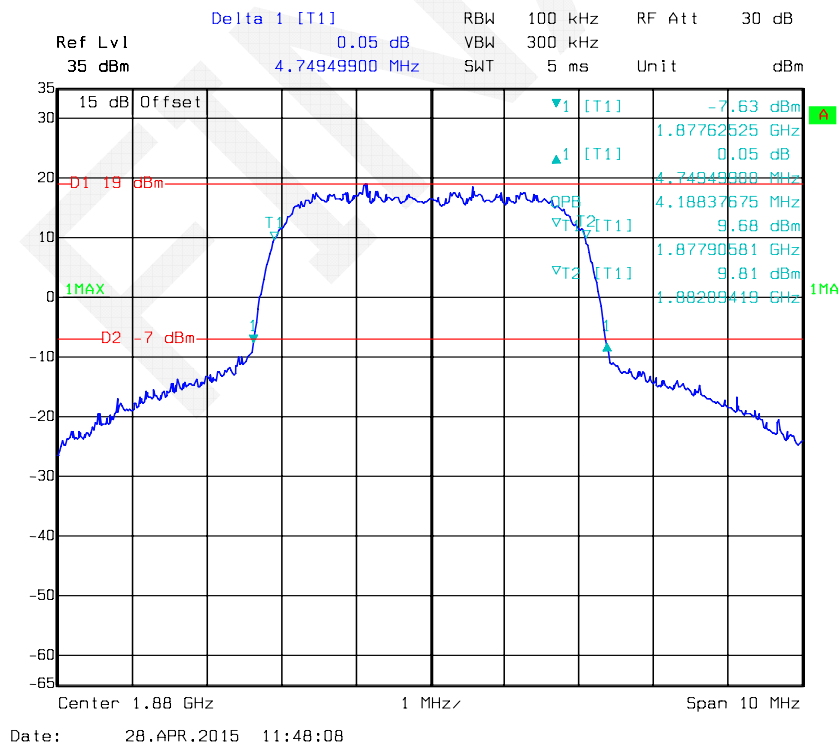**Band II\_HSDPA****Band II\_HSUPA**


## REL99 Band V

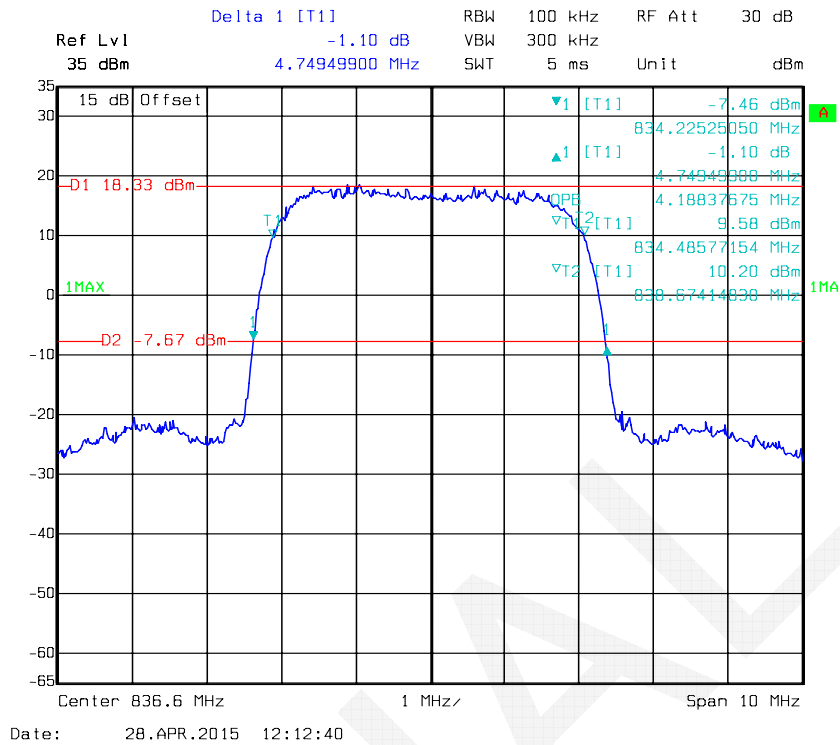

## Band V\_HSDPA

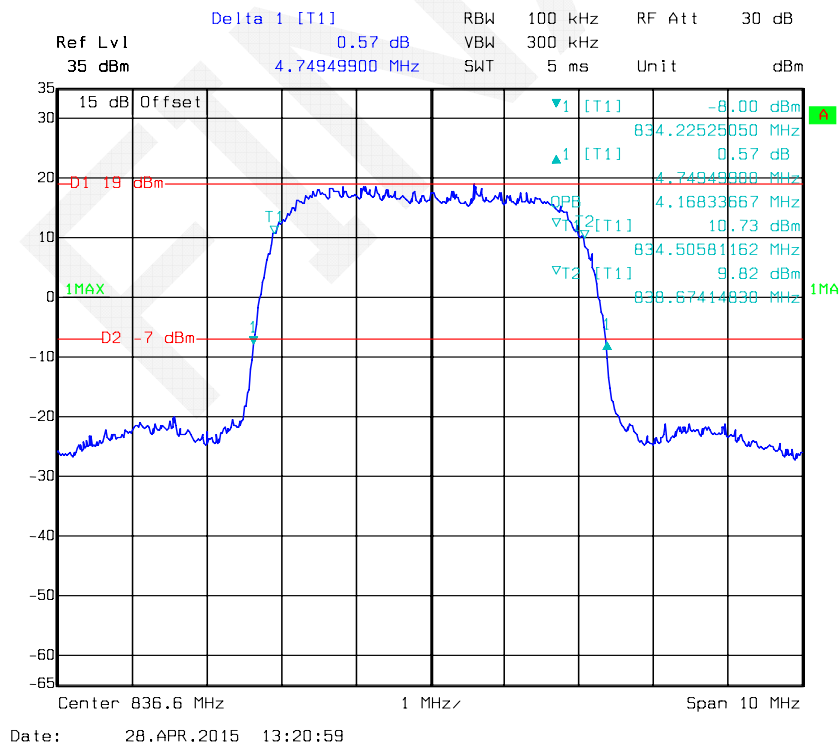

### Band V\_HSUPA

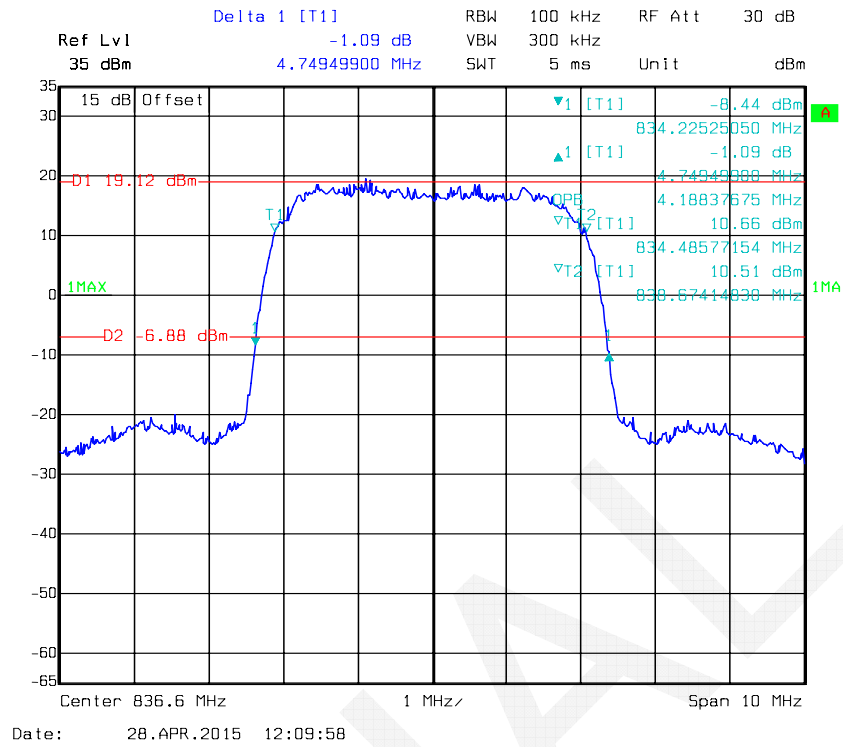

## FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


### Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

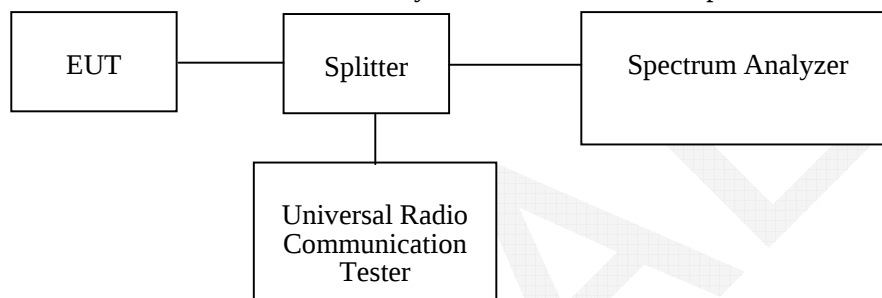

### Test Equipment List and Details

| Manufacturer | Description       | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSP 38 | 100478        | 2014-05-09       | 2015-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data



#### Environmental Conditions

|                    |                 |
|--------------------|-----------------|
| Temperature:       | 24.9-25.9 °C    |
| Relative Humidity: | 58-59 %         |
| ATM Pressure:      | 100.7-100.3 kPa |


The testing was performed by Dean Liu on 2015-04-28 and 2015-05-07.

Please refer to the following plots.


### GSM850\_Middle Channel

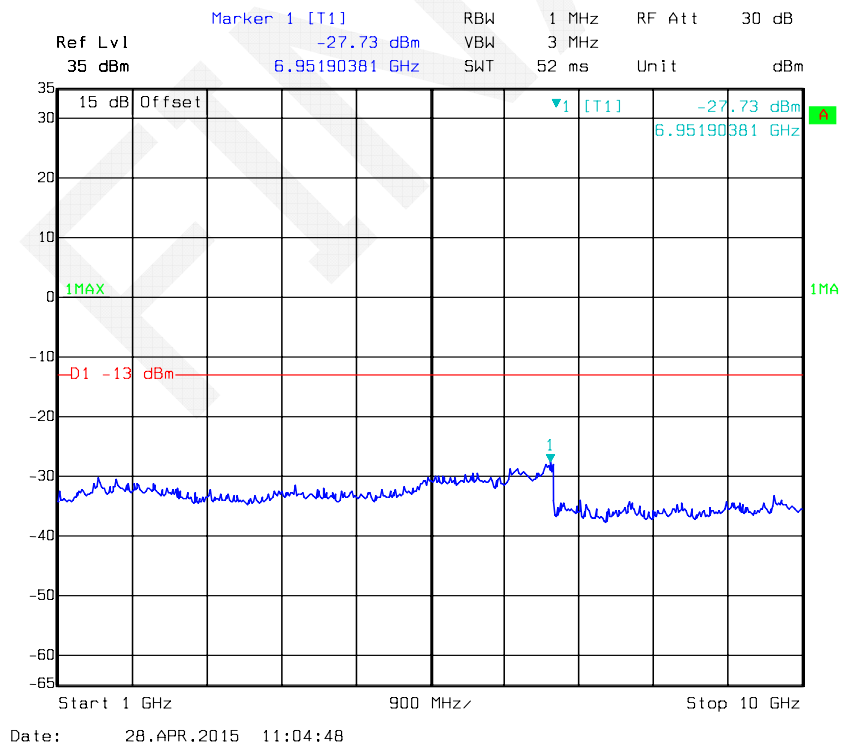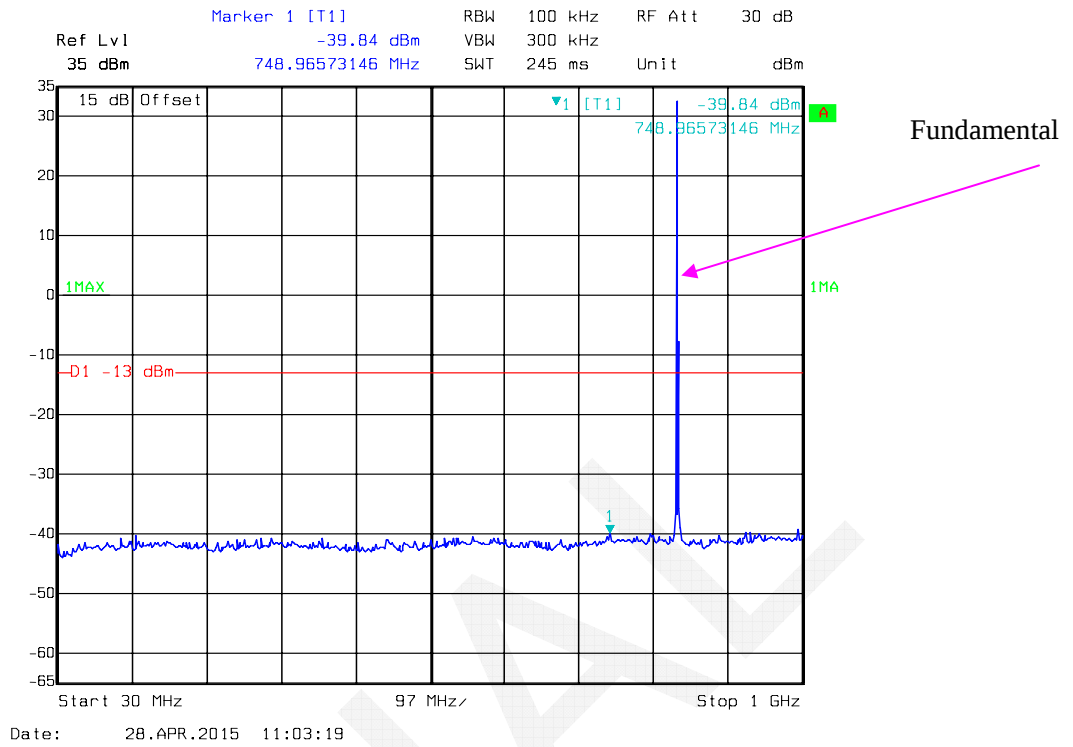


### PCS 1900\_Middle Channel

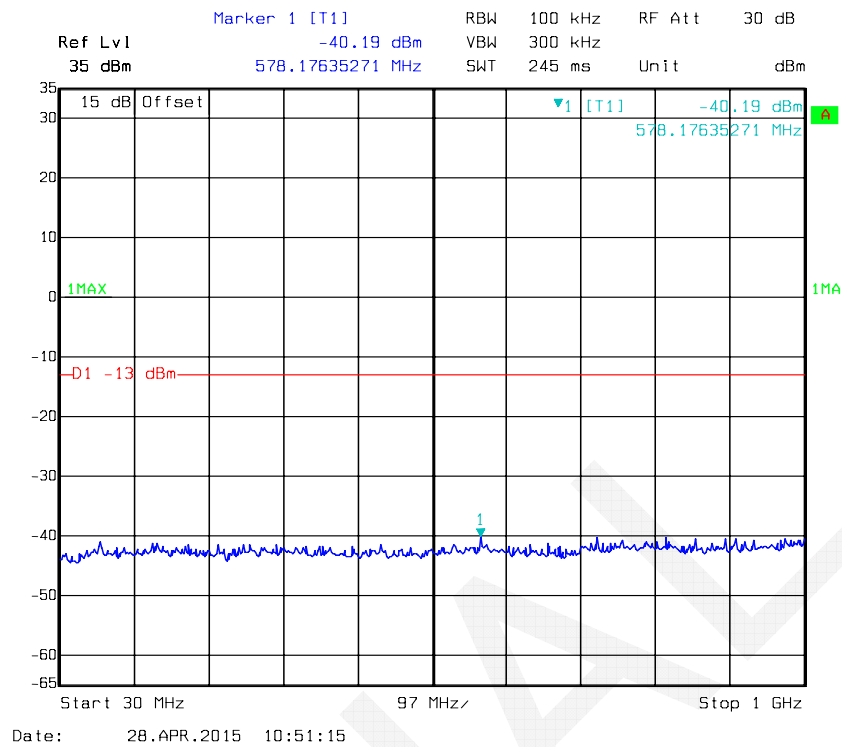




Fundamental

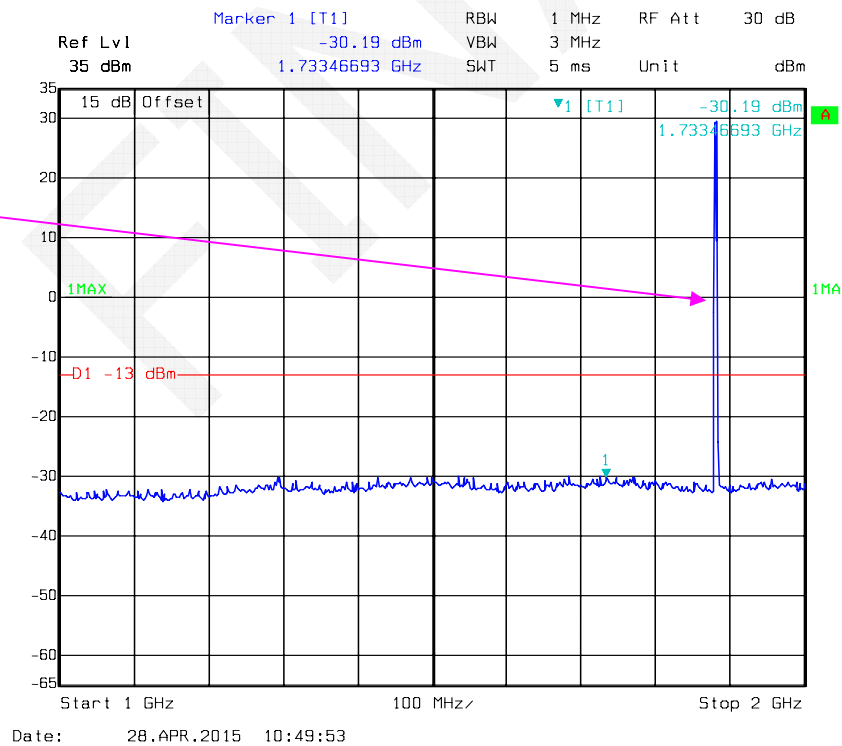


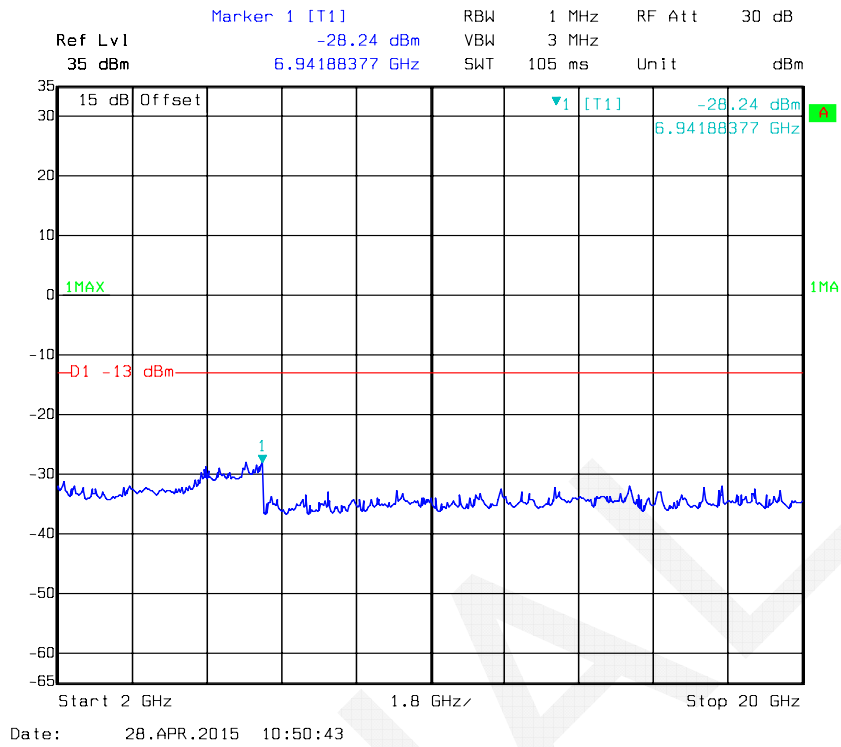



### REL99 Band II\_Middle Channel

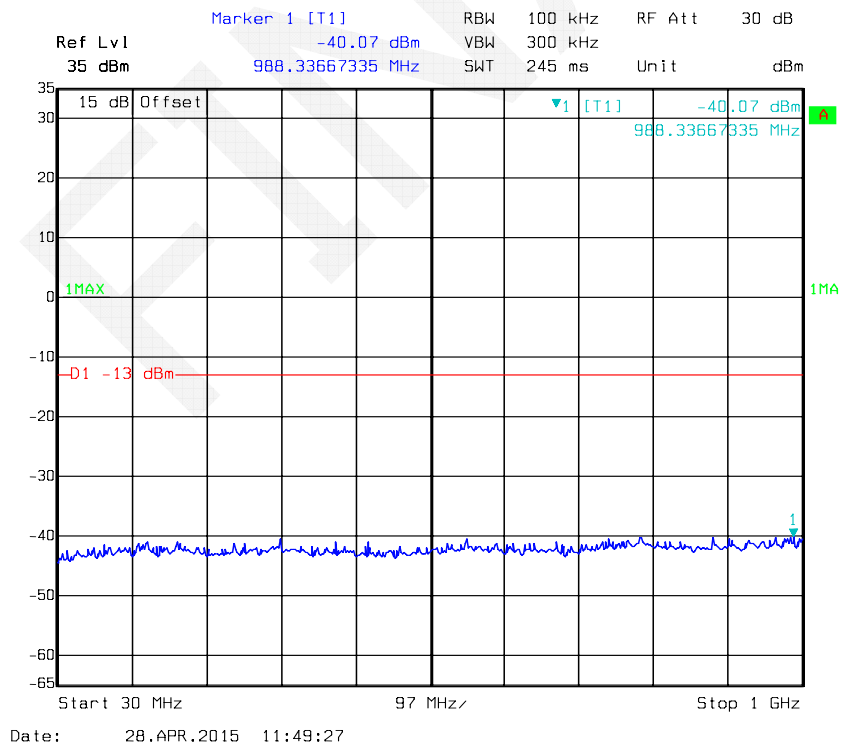

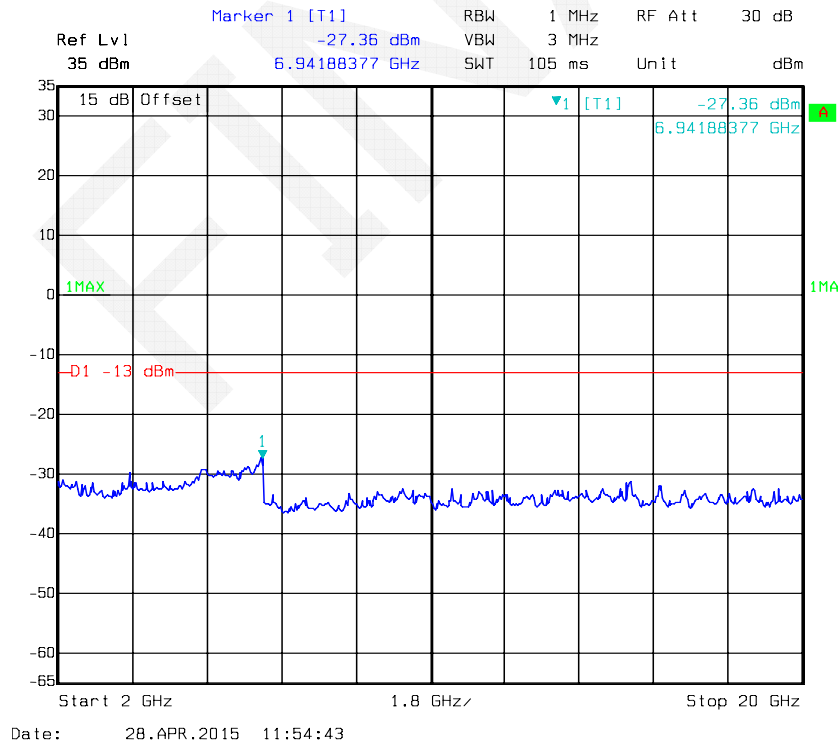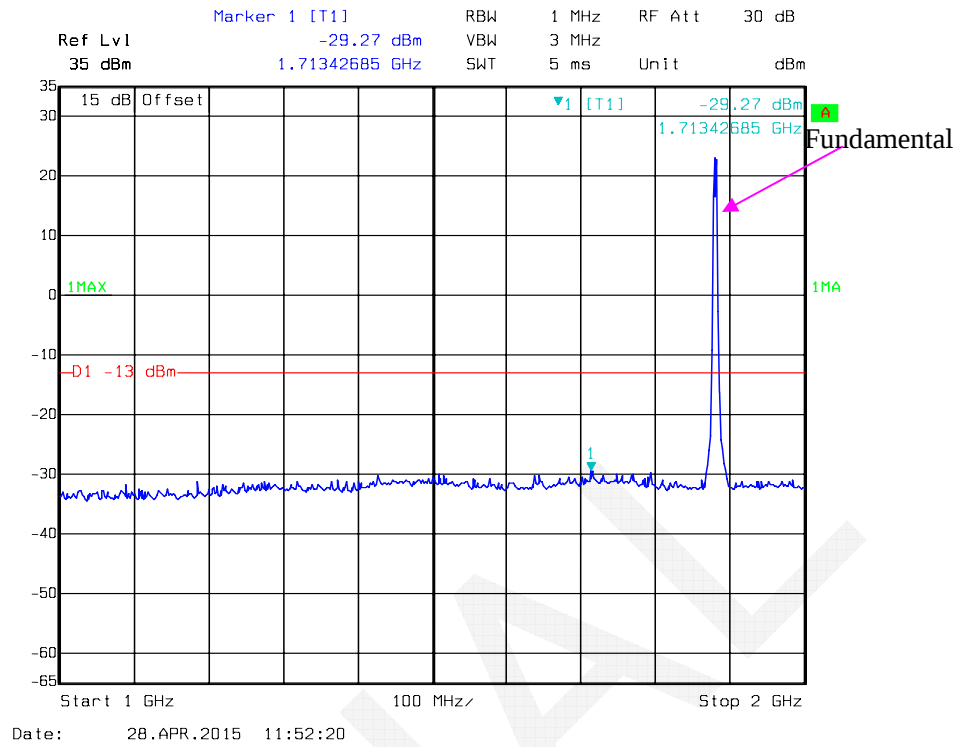




### HSDPA Band II \_Middle Channel

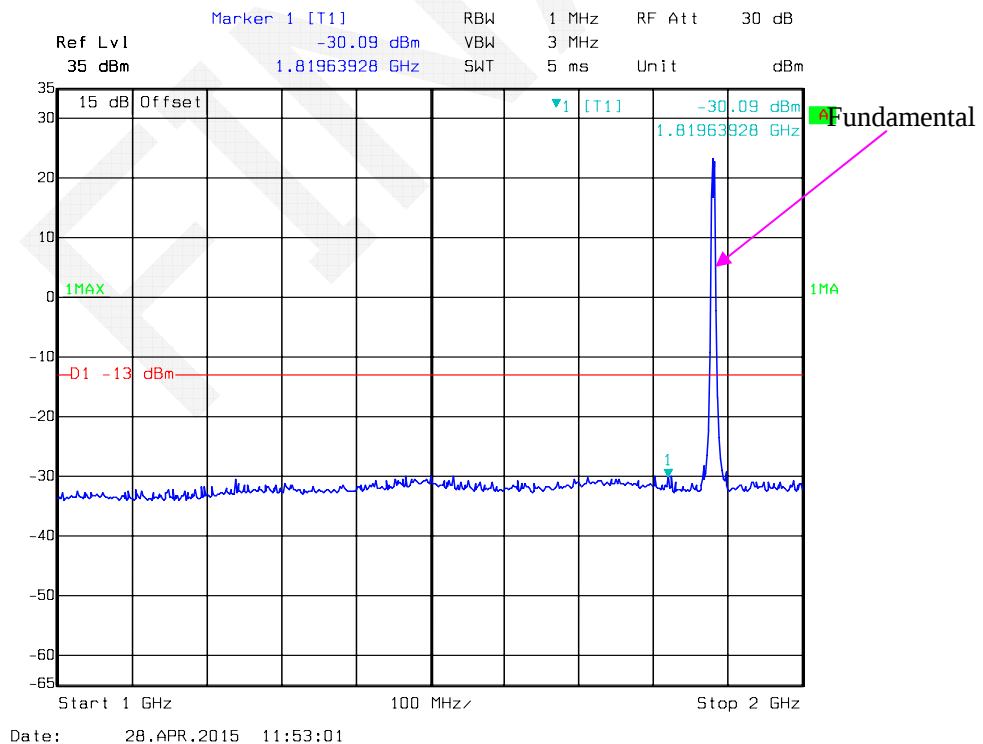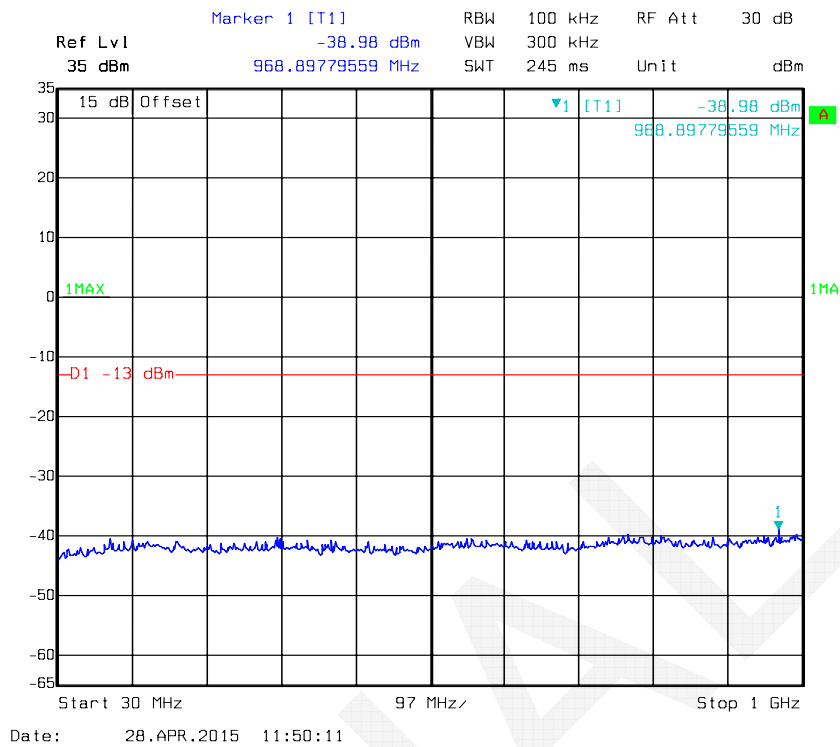


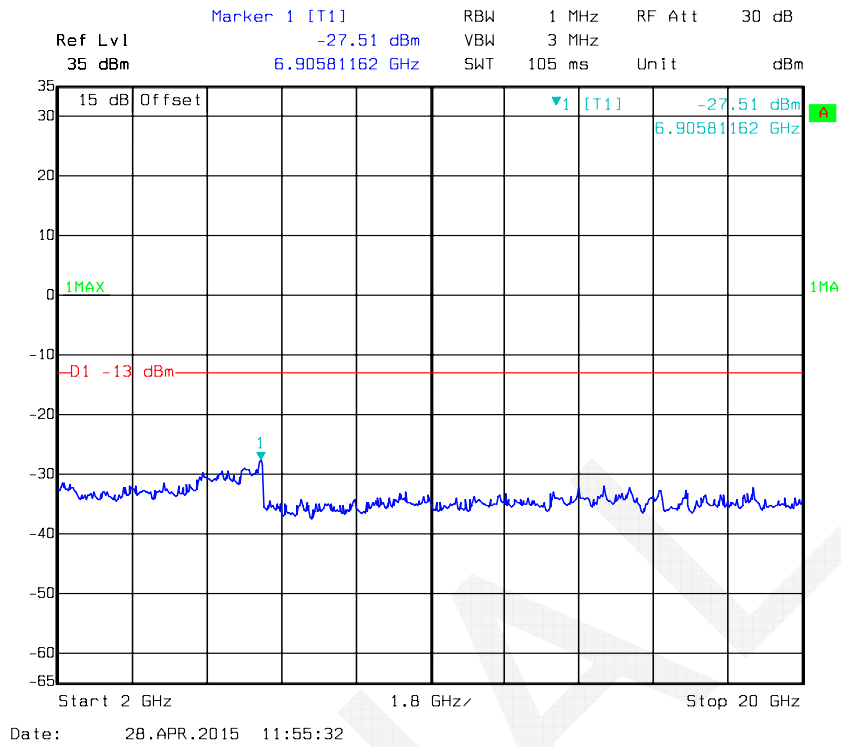


### HSUPA Band II\_Middle Channel


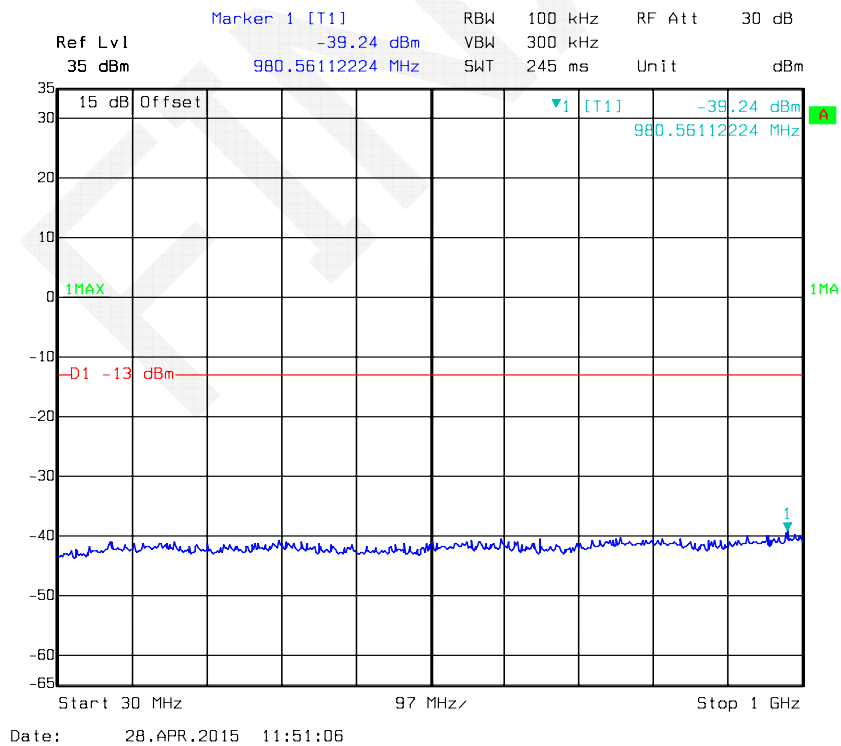


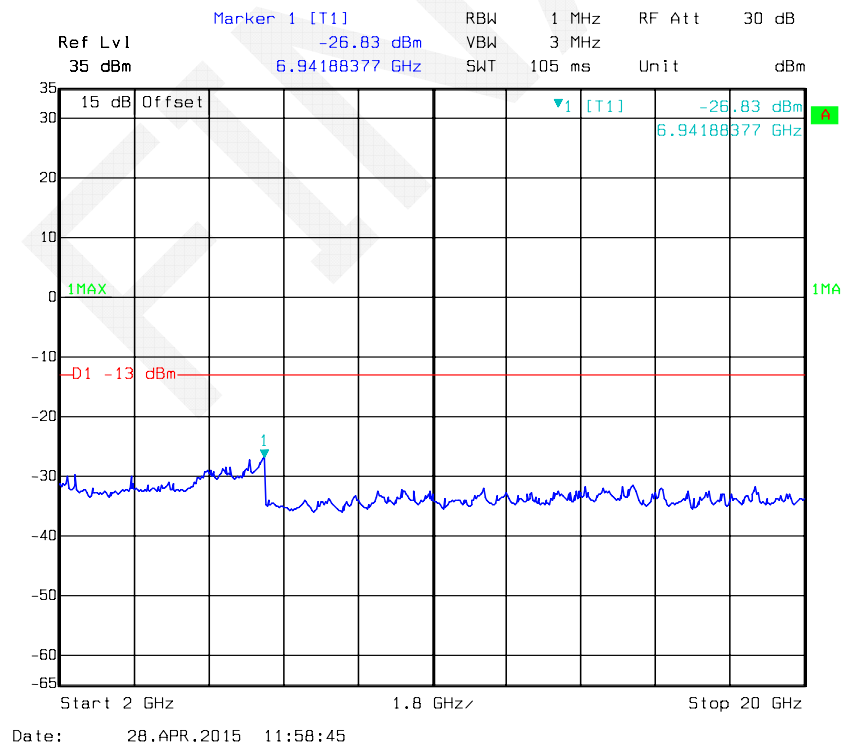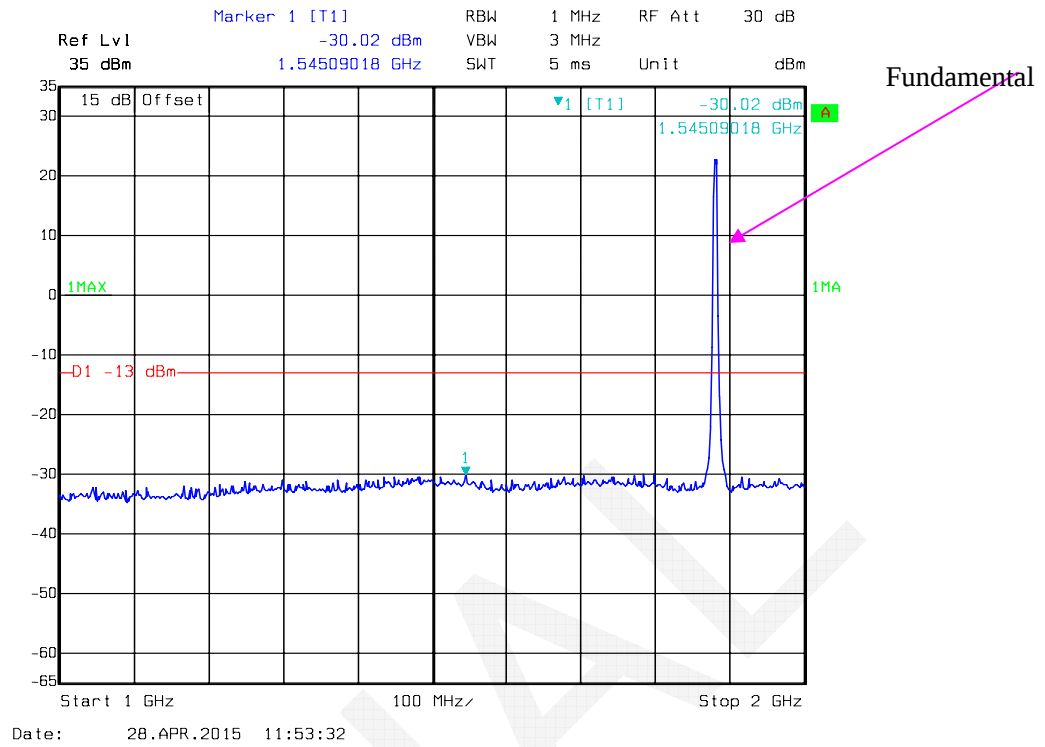



### REL99 Band V\_ Middle Channel

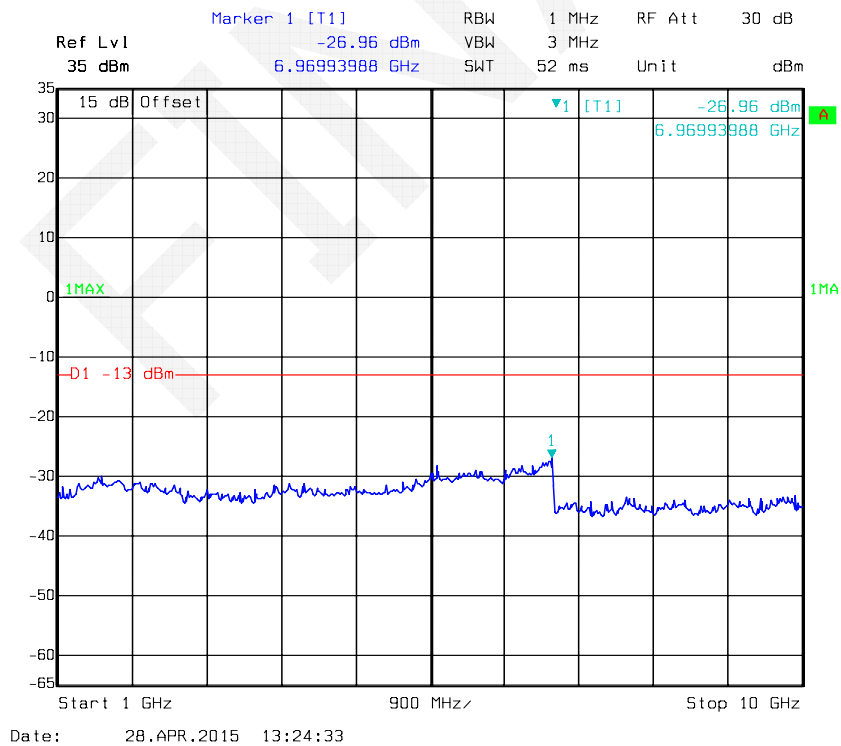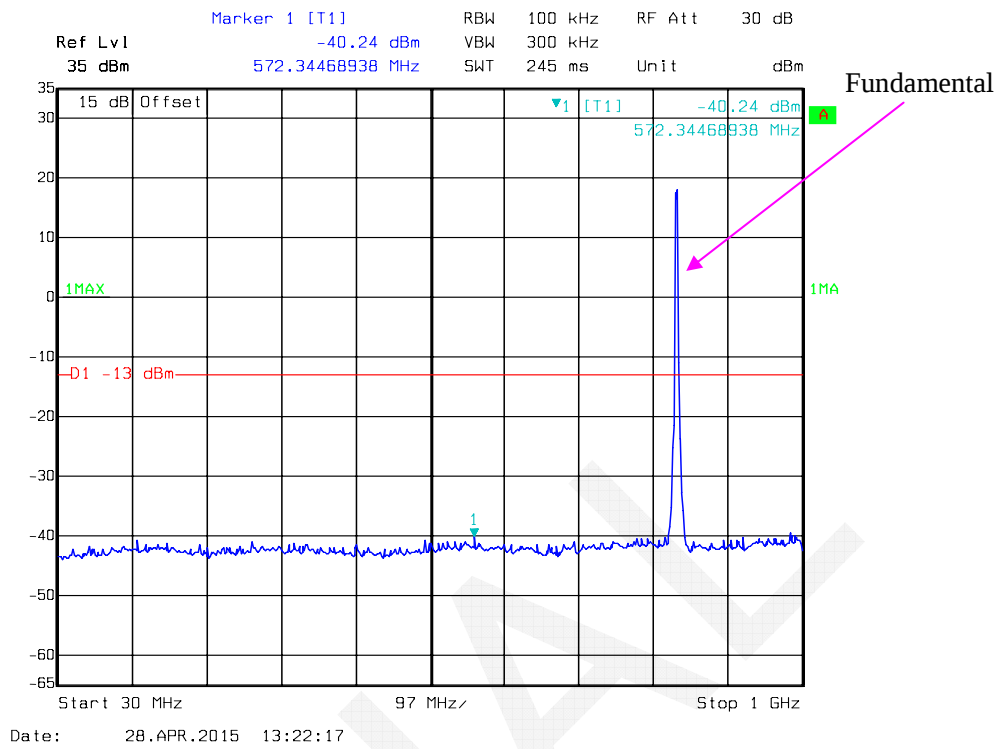

### HSDPA Band V\_ Middle Channel

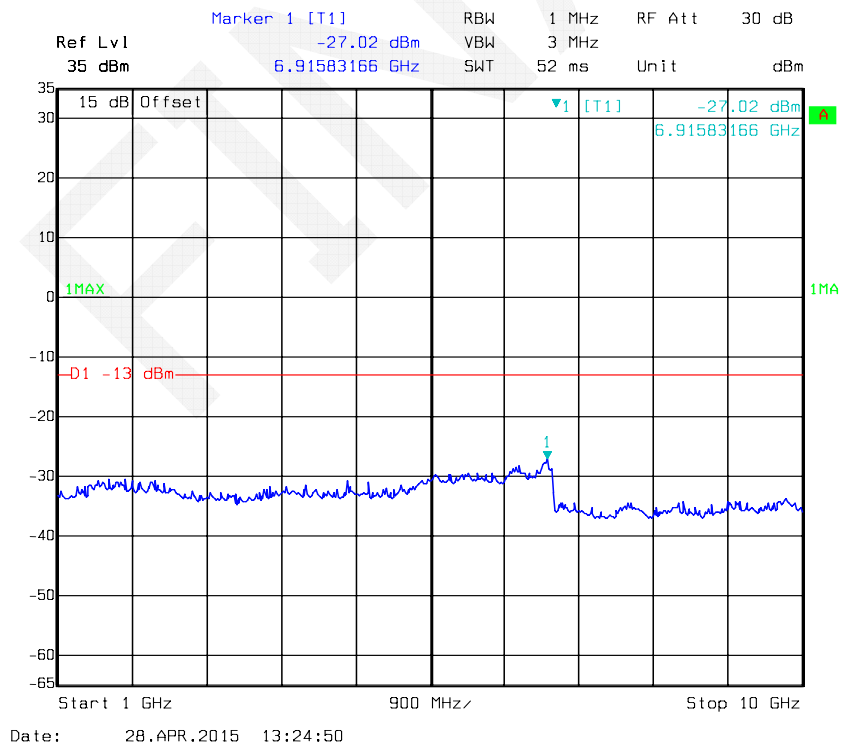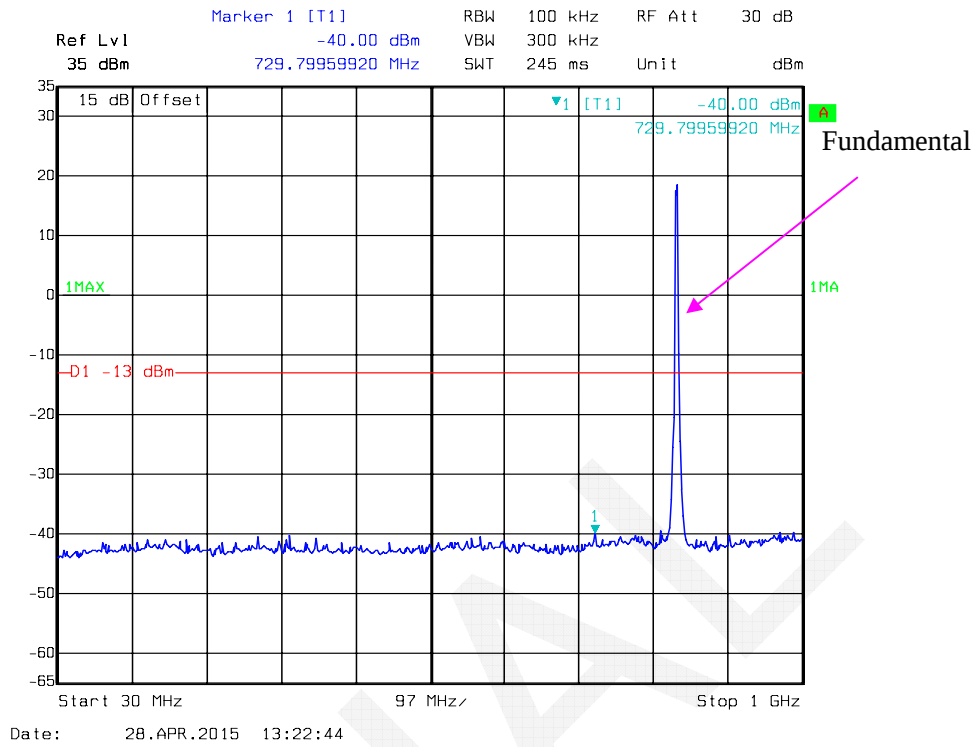

### HSUPA Band V\_ Middle Channel

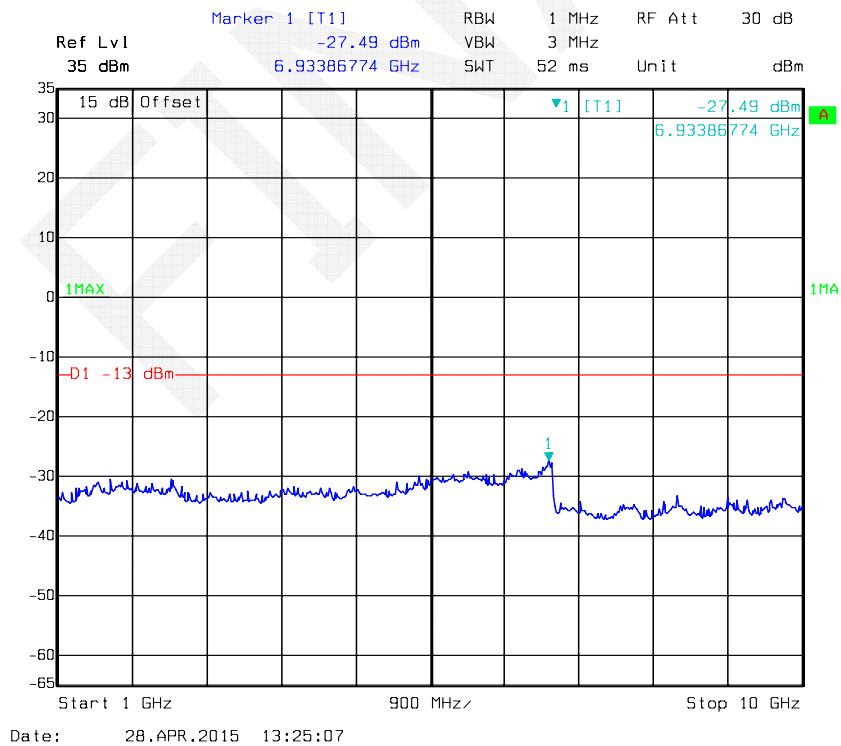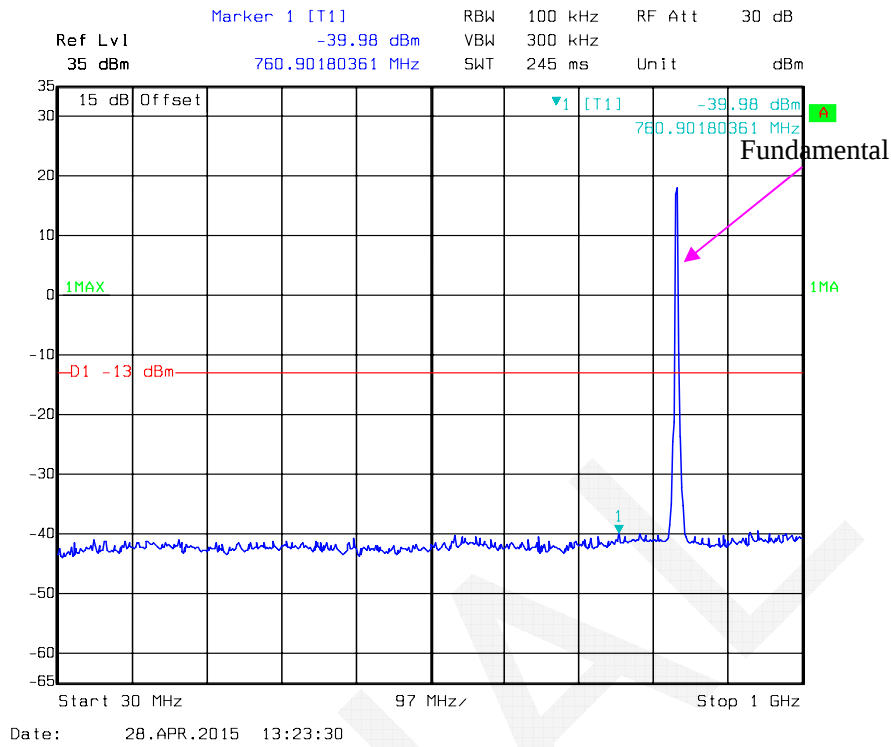

## FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

### Applicable Standard

FCC § 2.1053, §22.917 and § 24.238.

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg(\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \log_{10}(\text{power out in Watts})$

### Test Equipment List and Details

| Manufacturer   | Description               | Model      | Serial Number | Calibration Date | Calibration Due Date |
|----------------|---------------------------|------------|---------------|------------------|----------------------|
| R&S            | EMI Test Receiver         | ESCI       | 100224        | 2014-05-09       | 2015-05-09           |
| Sunol Sciences | Antenna                   | JB3        | A060611-3     | 2014-07-28       | 2017-07-27           |
| HP             | Amplifier                 | 8447E      | 2434A02181    | 2014-09-01       | 2015-09-01           |
| R&S            | Spectrum Analyzer         | FSEM       | DE31388       | 2014-05-09       | 2015-05-09           |
| ETS LINDGREN   | Horn Antenna              | 3115       | 000 527 35    | 2012-09-06       | 2015-09-06           |
| Mini-Circuit   | Amplifier                 | ZVA-213-S+ | 054201245     | 2015-02-19       | 2016-02-19           |
| Giga           | Signal Generator          | 1026       | 320408        | 2014-05-09       | 2015-05-09           |
| EMCO           | Adjustable Dipole Antenna | 3121C      | 9109-753      | N/A              | N/A                  |
| TDK RF         | Horn Antenna              | HRN-0118   | 130 084       | 2012-09-06       | 2015-09-06           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 23.8 °C   |
| <b>Relative Humidity:</b> | 66 %      |
| <b>ATM Pressure:</b>      | 100.6 kPa |

The testing was performed by Dean Liu on 2015-04-30.

EUT Operation Mode: Transmitting

**Cellular Band**

| Frequency<br>(MHz)    | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method     |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-----------------------|----------------|-------------------------------|------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                       |                |                               | S.G.<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| Frequency:824.200 MHz |                |                               |                        |                              |                    |                            |                |                |
| 1648.400              | H              | 47.31                         | -53.8                  | 10.5                         | 1.5                | -44.8                      | -13.0          | 31.8           |
| 1648.400              | V              | 48.48                         | -53.1                  | 10.5                         | 1.5                | -44.1                      | -13.0          | 31.1           |
| 2472.600              | H              | 43.96                         | -54.1                  | 12.9                         | 2.6                | -43.8                      | -13.0          | 30.8           |
| 2472.600              | V              | 44.95                         | -51.8                  | 12.9                         | 2.6                | -41.5                      | -13.0          | 28.5           |
| Frequency:836.600 MHz |                |                               |                        |                              |                    |                            |                |                |
| 1673.200              | H              | 47.51                         | -53.6                  | 10.6                         | 1.5                | -44.5                      | -13.0          | 31.5           |
| 1673.200              | V              | 48.97                         | -52.4                  | 10.6                         | 1.5                | -43.3                      | -13.0          | 30.3           |
| 2509.800              | H              | 44.28                         | -53.7                  | 13.1                         | 2.8                | -43.4                      | -13.0          | 30.4           |
| 2509.800              | V              | 45.32                         | -51.8                  | 13.1                         | 2.8                | -41.5                      | -13.0          | 28.5           |
| Frequency:848.800 MHz |                |                               |                        |                              |                    |                            |                |                |
| 1697.600              | H              | 47.87                         | -53.2                  | 10.8                         | 1.5                | -43.9                      | -13.0          | 30.9           |
| 1697.600              | V              | 49.22                         | -52                    | 10.8                         | 1.5                | -42.7                      | -13.0          | 29.7           |
| 2546.400              | H              | 44.73                         | -51.8                  | 13.1                         | 2.8                | -41.5                      | -13.0          | 28.5           |
| 2546.400              | V              | 45.61                         | -51.5                  | 13.1                         | 2.8                | -41.2                      | -13.0          | 28.2           |

For below 1GHz, all spurious emissions are 20 dB below the limit or are on the system noise floor level.

**WCDMA Band V**

| Frequency<br>(MHz)    | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method     |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-----------------------|----------------|-------------------------------|------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                       |                |                               | S.G.<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| Frequency:826.400 MHz |                |                               |                        |                              |                    |                            |                |                |
| 1652.800              | H              | 43.26                         | -57.9                  | 10.5                         | 1.5                | -48.9                      | -13.0          | 35.9           |
| 1652.800              | V              | 46.38                         | -55.2                  | 10.5                         | 1.5                | -46.2                      | -13.0          | 33.2           |
| Frequency:836.600 MHz |                |                               |                        |                              |                    |                            |                |                |
| 1673.200              | H              | 43.47                         | -57.6                  | 10.6                         | 1.5                | -48.5                      | -13.0          | 35.5           |
| 1673.200              | V              | 46.79                         | -54.6                  | 10.6                         | 1.5                | -45.5                      | -13.0          | 32.5           |
| Frequency:846.600 MHz |                |                               |                        |                              |                    |                            |                |                |
| 1693.200              | H              | 43.81                         | -57.2                  | 10.7                         | 1.5                | -48.0                      | -13.0          | 35.0           |
| 1693.200              | V              | 47.28                         | -53.9                  | 10.7                         | 1.5                | -44.7                      | -13.0          | 31.7           |

For below 1GHz, all spurious emissions are 20 dB below the limit or are on the system noise floor level.

**PCS Band**

| Frequency<br>(MHz)     | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method     |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------------------|----------------|-------------------------------|------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                        |                |                               | S.G.<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| Frequency:1850.200 MHz |                |                               |                        |                              |                    |                            |                |                |
| 3700.400               | H              | 46.28                         | -48.5                  | 14.0                         | 2.5                | -37.0                      | -13.0          | 24.0           |
| 3700.400               | V              | 47.21                         | -47.2                  | 14.0                         | 2.5                | -35.7                      | -13.0          | 22.7           |
| Frequency:1880.000 MHz |                |                               |                        |                              |                    |                            |                |                |
| 3760.000               | H              | 46.54                         | -47.8                  | 13.8                         | 2.9                | -36.9                      | -13.0          | 23.9           |
| 3760.000               | V              | 47.36                         | -45.7                  | 13.8                         | 2.9                | -34.8                      | -13.0          | 21.8           |
| Frequency:1909.800 MHz |                |                               |                        |                              |                    |                            |                |                |
| 3819.600               | H              | 46.82                         | -47                    | 13.6                         | 3.3                | -36.7                      | -13.0          | 23.7           |
| 3819.600               | V              | 47.66                         | -44.5                  | 13.6                         | 3.3                | -34.2                      | -13.0          | 21.2           |

For below 1GHz, all spurious emissions are 20 dB below the limit or are on the system noise floor level.

**WCDMA Band II**

| Frequency<br>(MHz)     | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method     |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------------------|----------------|-------------------------------|------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                        |                |                               | S.G.<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| Frequency:1852.400 MHz |                |                               |                        |                              |                    |                            |                |                |
| 3704.800               | H              | 43.65                         | -51.1                  | 13.9                         | 2.5                | -39.7                      | -13.0          | 26.7           |
| 3704.800               | V              | 49.85                         | -44.4                  | 13.9                         | 2.5                | -33.0                      | -13.0          | 20.0           |
| Frequency:1880.000 MHz |                |                               |                        |                              |                    |                            |                |                |
| 3760.000               | H              | 44.12                         | -50.2                  | 13.8                         | 2.9                | -39.3                      | -13.0          | 26.3           |
| 3760.000               | V              | 50.12                         | -42.9                  | 13.8                         | 2.9                | -32.0                      | -13.0          | 19.0           |
| Frequency:1907.600 MHz |                |                               |                        |                              |                    |                            |                |                |
| 3815.200               | H              | 45.28                         | -48.6                  | 13.6                         | 3.3                | -38.3                      | -13.0          | 25.3           |
| 3815.200               | V              | 51.39                         | -40.8                  | 13.6                         | 3.3                | -30.5                      | -13.0          | 17.5           |

For below 1GHz, all spurious emissions are 20 dB below the limit or are on the system noise floor level.

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

## FCC §22.917(a) & §24.238(a) - BAND EDGES

### Applicable Standard


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

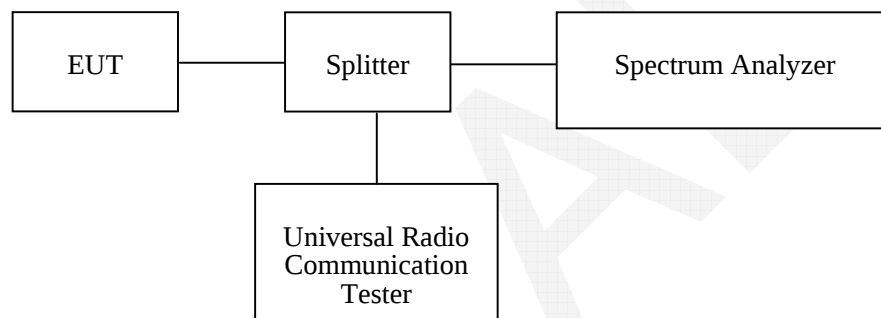

### Test Equipment List and Details

| Manufacturer | Description       | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSP 38 | 100478        | 2014-05-09       | 2015-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions



|                    |           |
|--------------------|-----------|
| Temperature:       | 24.9 °C   |
| Relative Humidity: | 58 %      |
| ATM Pressure:      | 100.7 kPa |



The testing was performed by Dean Liu on 2015-04-28.



*Test Mode: Transmitting*



*Test Result: Compliant. Please refer to the following table and plots.*

| Band          | Mode   | Band Edge | Reading | Limit |
|---------------|--------|-----------|---------|-------|
|               |        |           | dBm     | dBm   |
| Cellular      | GSM    | Left      | -13.52  | ≤-13  |
|               |        | Right     | -14.04  | ≤-13  |
|               | EDGE   | Left      | -21.84  | ≤-13  |
|               |        | Right     | -23.48  | ≤-13  |
| PCS           | GSM    | Left      | -17.07  | ≤-13  |
|               |        | Right     | -17.23  | ≤-13  |
|               | EDGE   | Left      | -26.06  | ≤-13  |
|               |        | Right     | -27.28  | ≤-13  |
| WCDMA Band II | Rel 99 | Left      | -13.60  | ≤-13  |
|               |        | Right     | -13.80  | ≤-13  |
|               | HSDPA  | Left      | -14.12  | ≤-13  |
|               |        | Right     | -13.64  | ≤-13  |
|               | HSUPA  | Left      | -14.16  | ≤-13  |
|               |        | Right     | -13.76  | ≤-13  |
| WCDMA Band V  | Rel 99 | Left      | -16.87  | ≤-13  |
|               |        | Right     | -15.18  | ≤-13  |
|               | HSDPA  | Left      | -17.40  | ≤-13  |
|               |        | Right     | -16.59  | ≤-13  |
|               | HSUPA  | Left      | -17.58  | ≤-13  |
|               |        | Right     | -17.64  | ≤-13  |

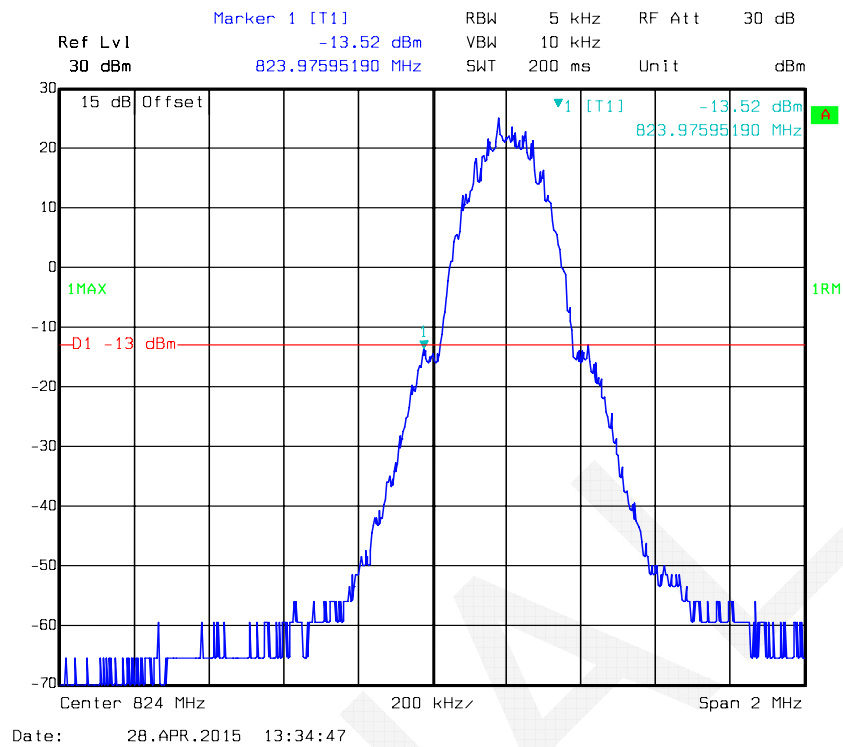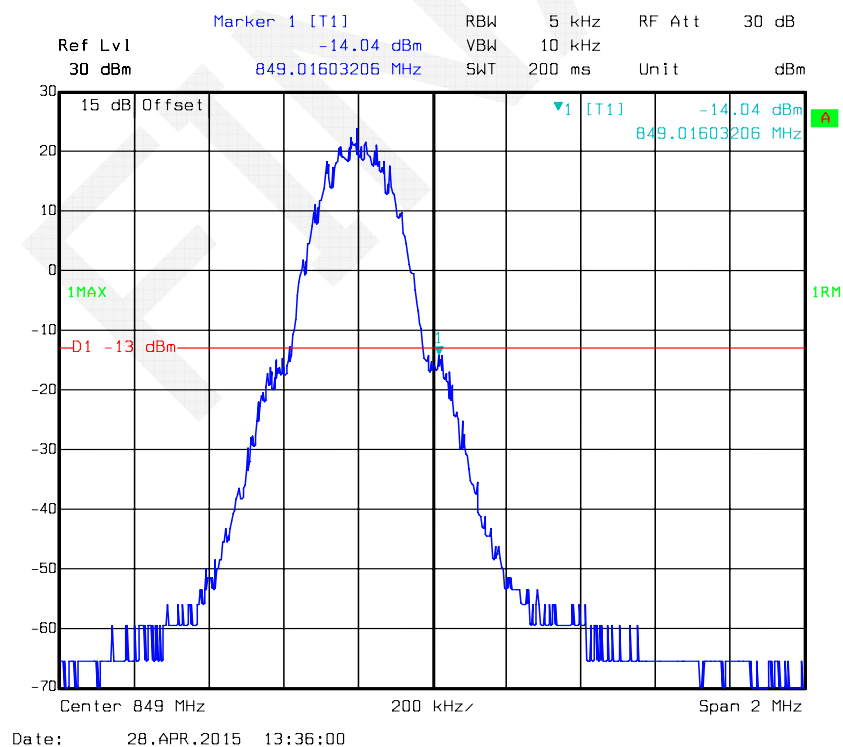
**GSM 850, Left Band Edge****GSM 850, Right Band Edge**

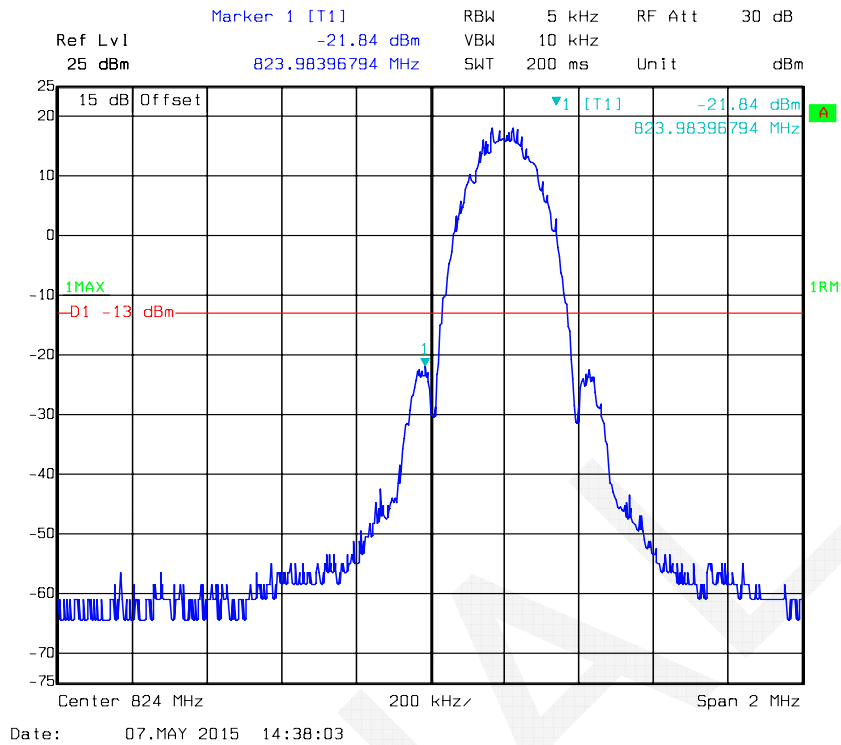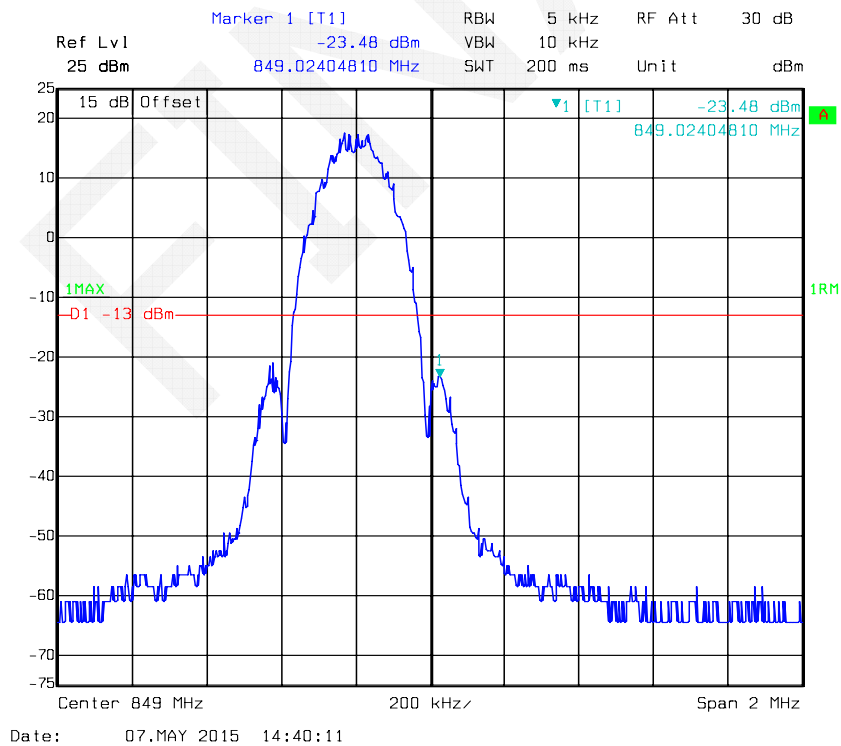**EDGE 850, Left Band Edge****EDGE 850, Right Band Edge**

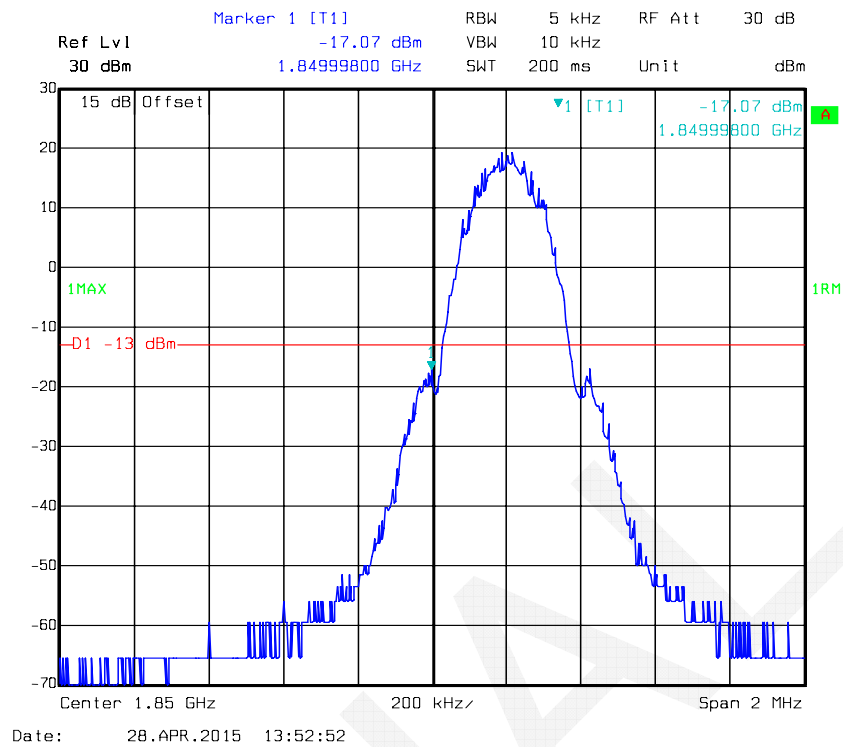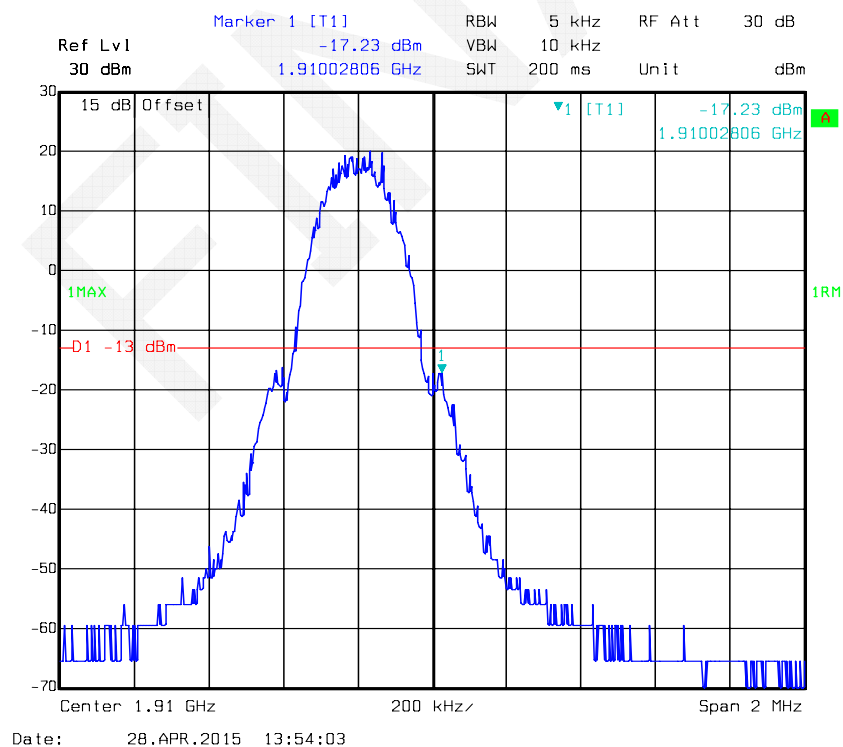
**GSM 1900, Left Band Edge****GSM 1900, Right Band Edge**

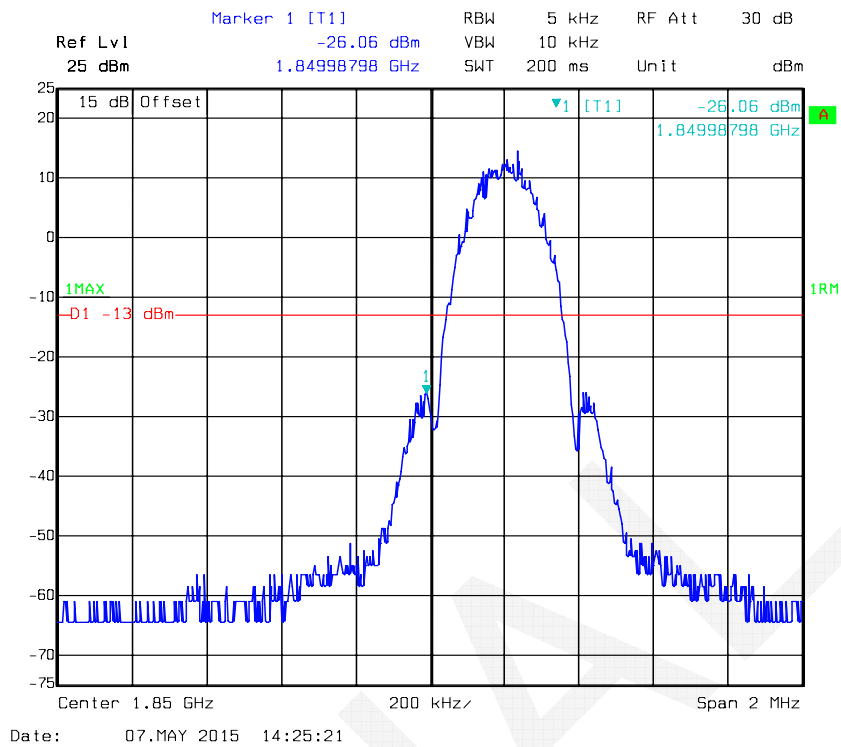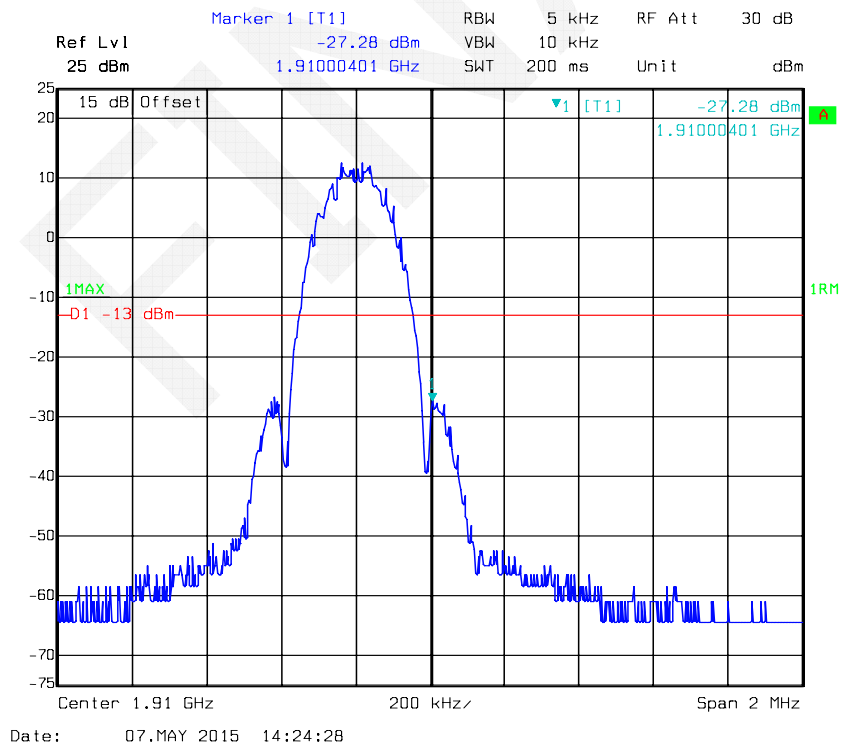**EDGE 1900, Left Band Edge****EDGE 1900, Right Band Edge**


### REL99 Band II, Left Band Edge

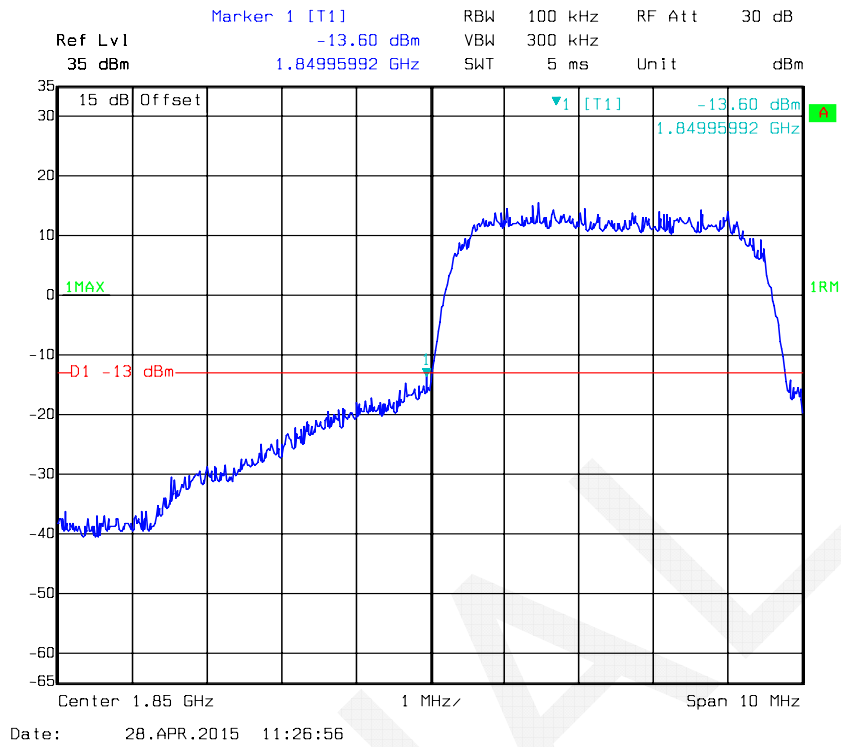


### REL99 Band II, Right Band Edge

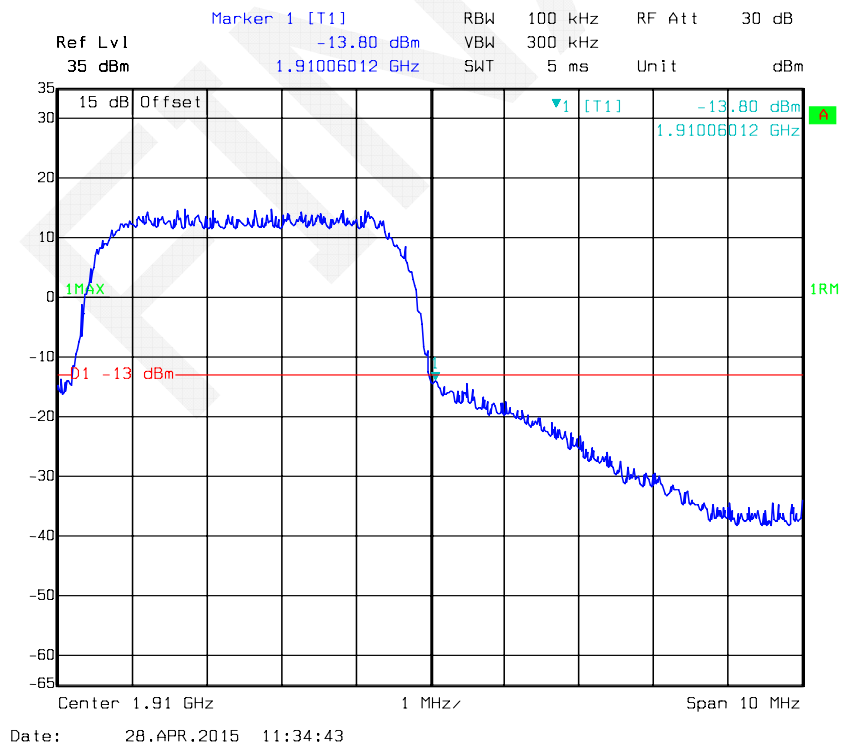


### HSDPA Band II, Left Band Edge

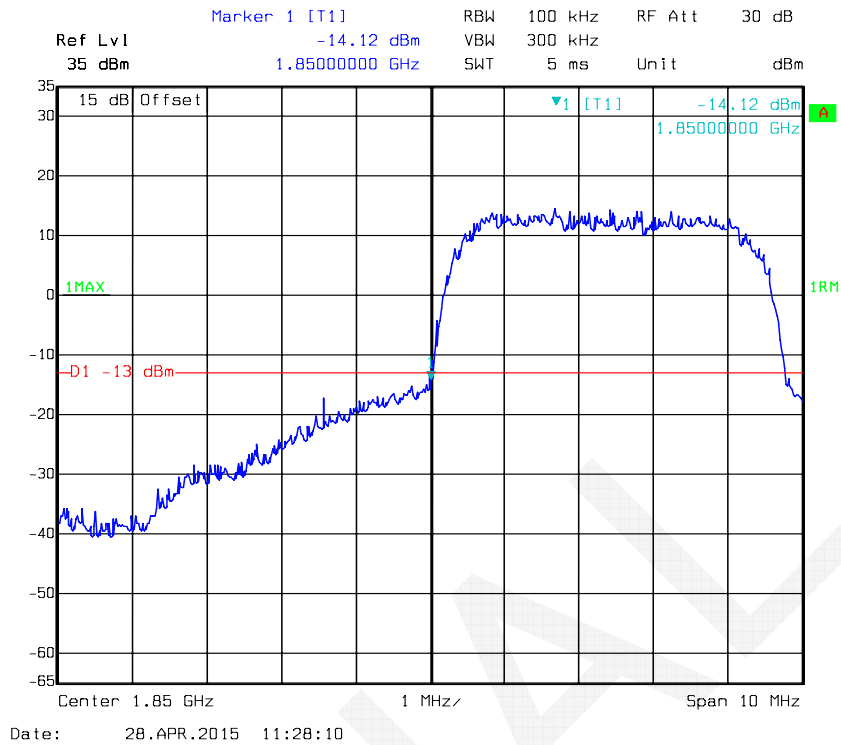


### HSDPA Band II, Right Band Edge

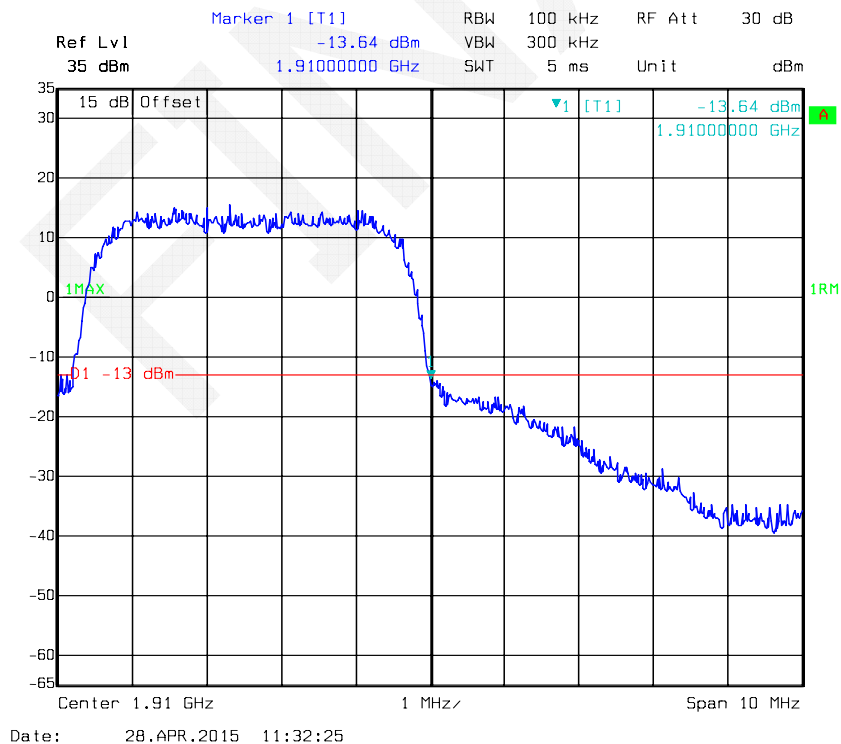


### HSUPA Band II, Left Band Edge

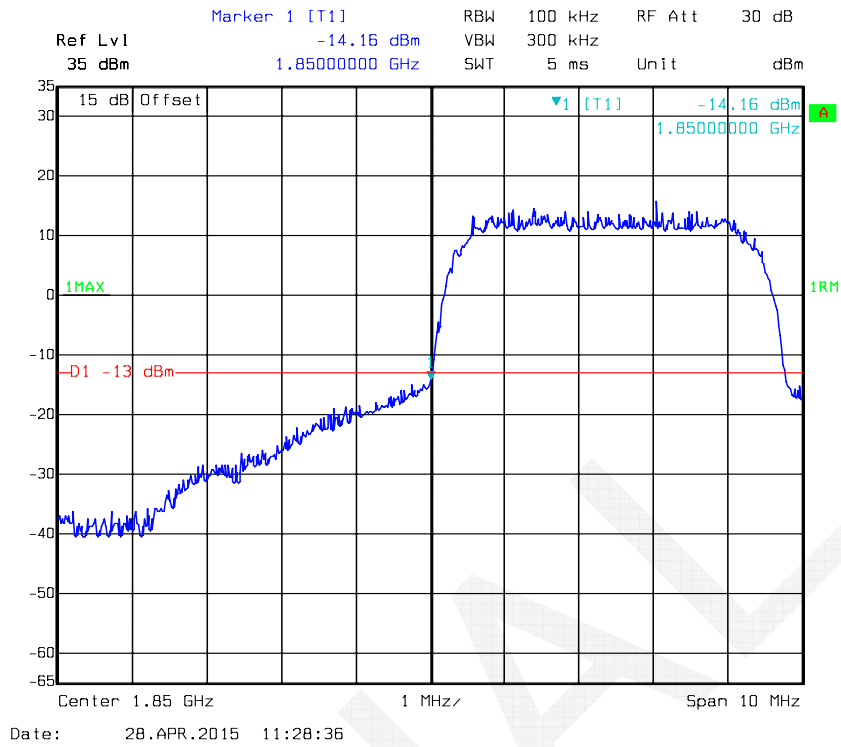


### HSUPA Band II, Right Band Edge


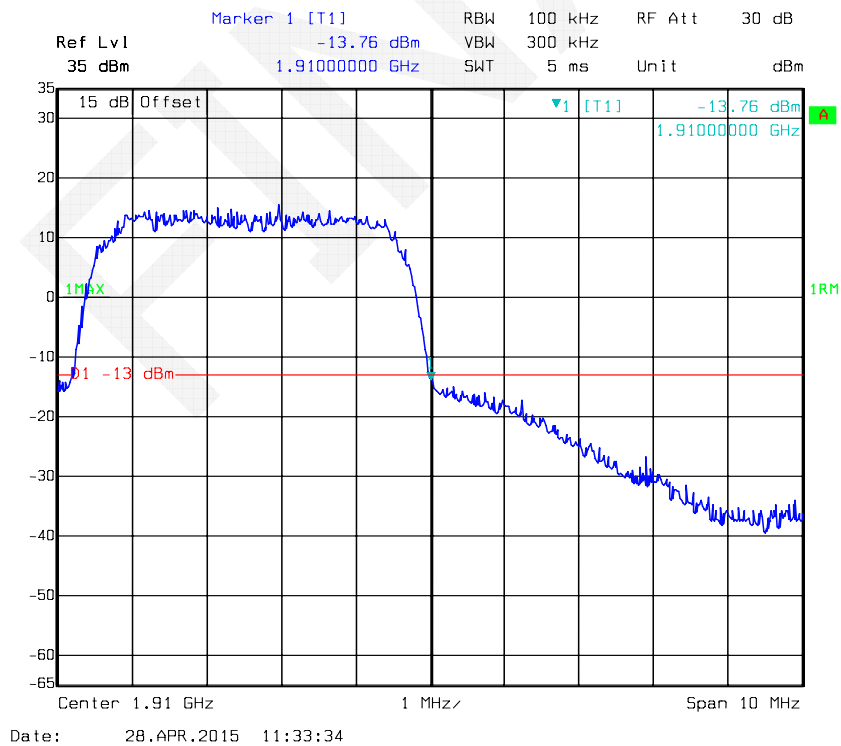


### REL99 Band V, Left Band Edge

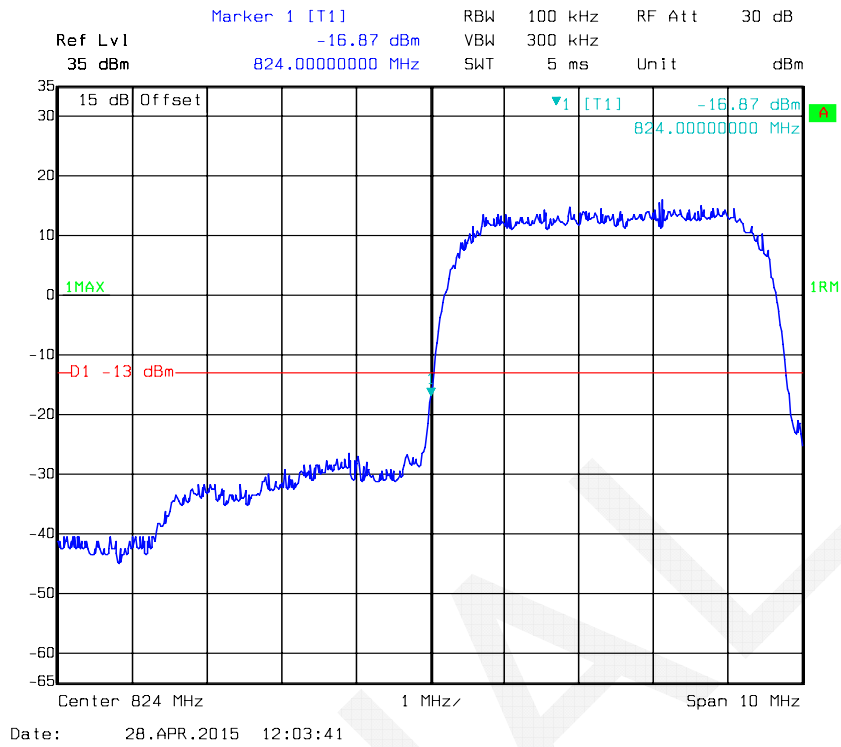


### REL99 Band V Right Band Edge

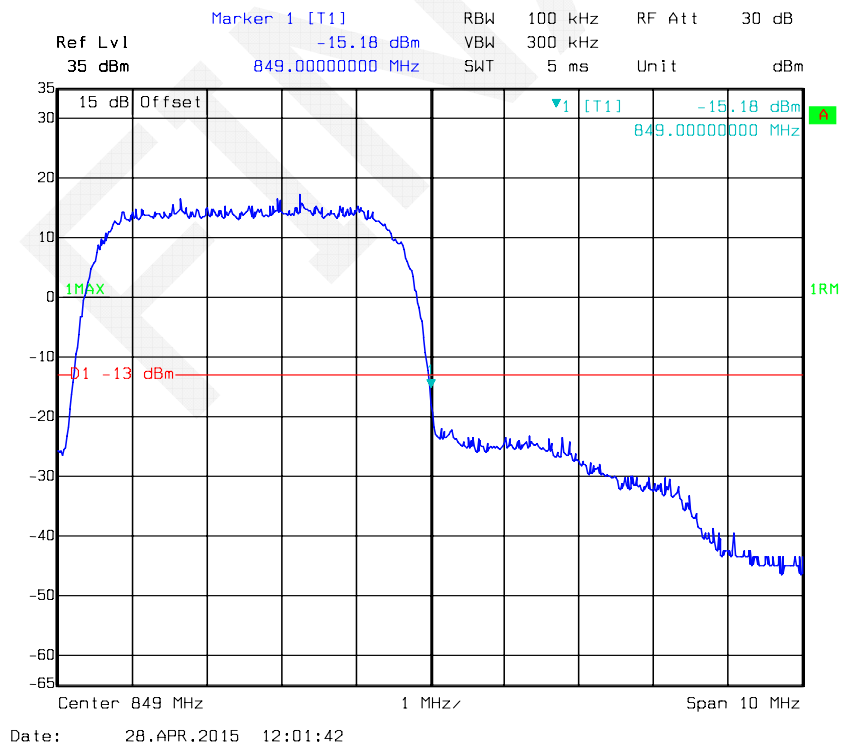


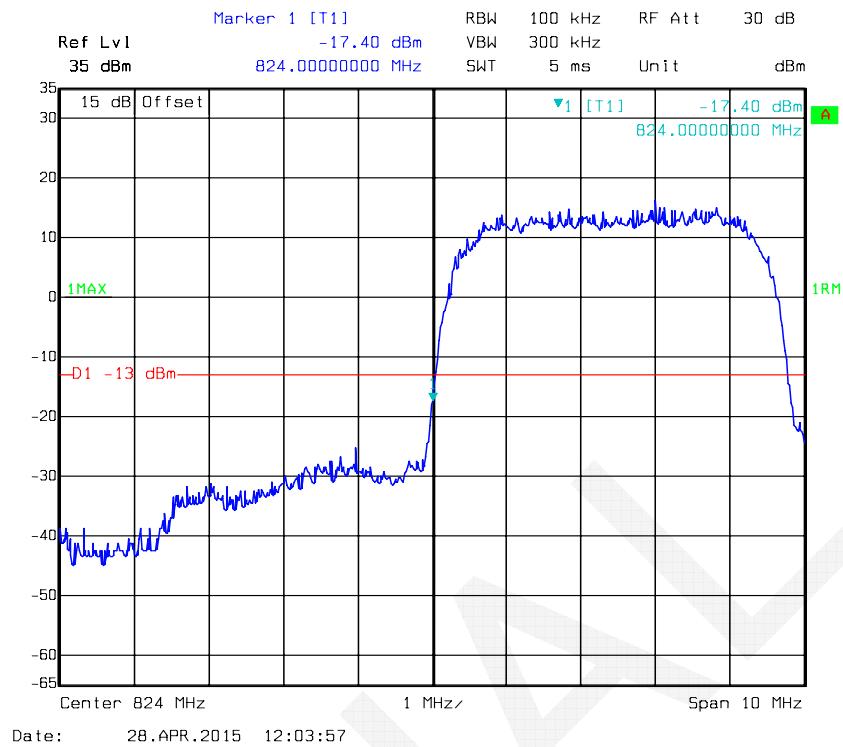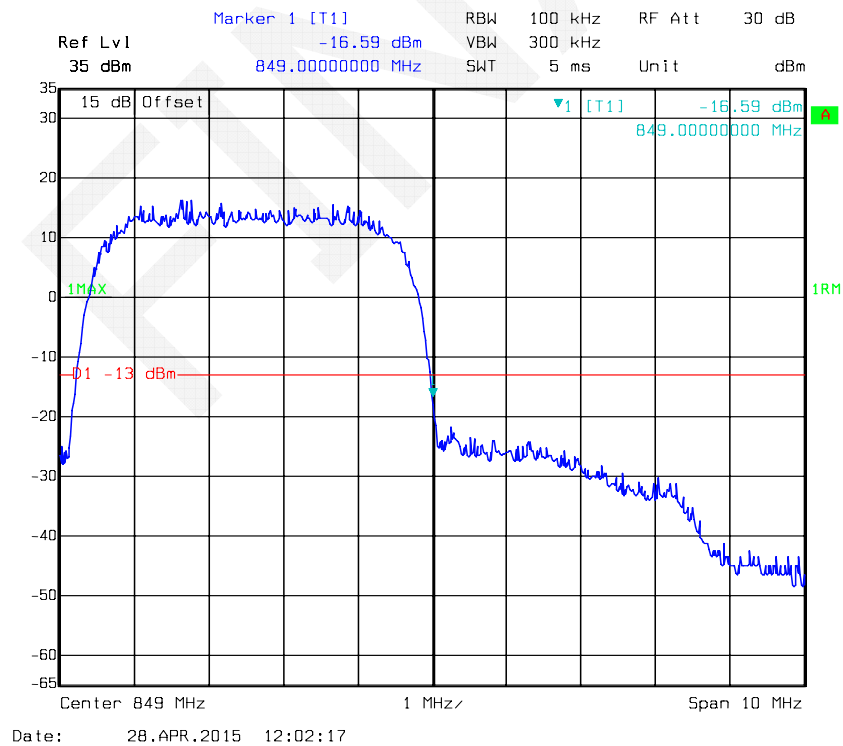**HSDPA Band V, Left Band Edge****HSDPA Band V, Right Band Edge**

### HSUPA Band V, Left Band Edge

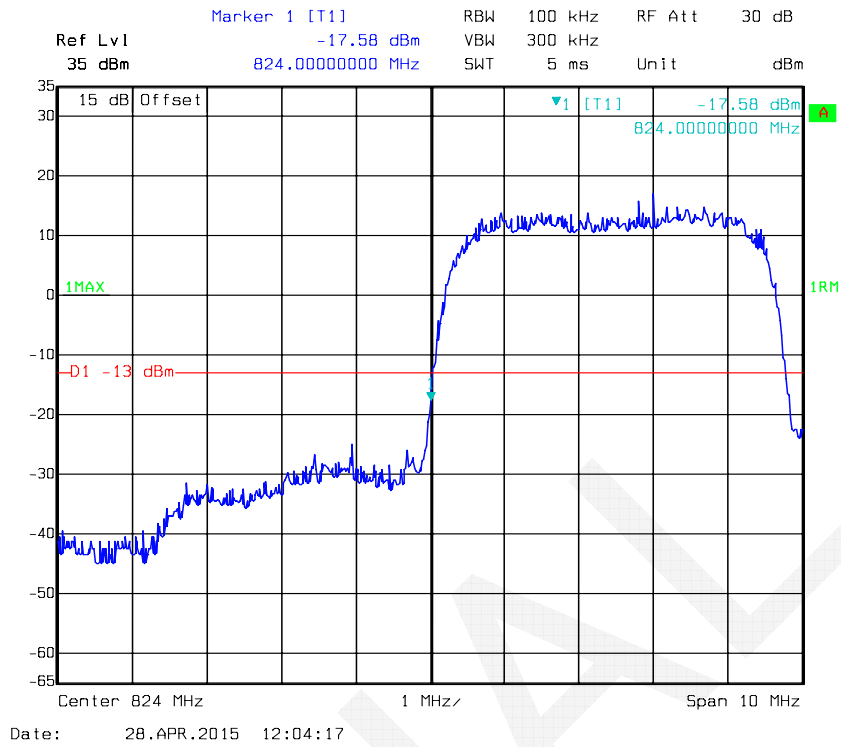

### HSUPA Band V, Right Band Edge

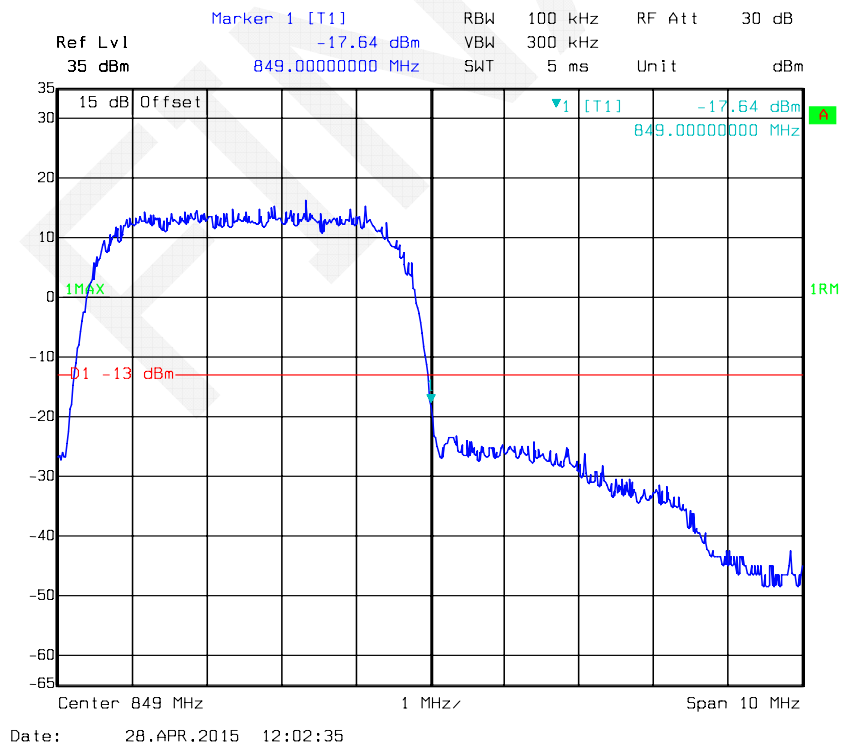

## FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY

### Applicable Standard

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

| Frequency Range (MHz) | Base, fixed (ppm) | Mobile ≤ 3 watts (ppm) | Mobile ≤ 3 watts (ppm) |
|-----------------------|-------------------|------------------------|------------------------|
| 25 to 50              | 20.0              | 20.0                   | 50.0                   |
| 50 to 450             | 5.0               | 5.0                    | 50.0                   |
| 450 to 512            | 2.5               | 5.0                    | 5.0                    |
| 821 to 896            | 1.5               | 2.5                    | 2.5                    |
| 928 to 929.           | 5.0               | N/A                    | N/A                    |
| 929 to 960.           | 1.5               | N/A                    | N/A                    |
| 2110 to 2220          | 10.0              | N/A                    | N/A                    |


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

### Test Procedure

**Frequency Stability vs. Temperature:** The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

**Frequency Stability vs. Voltage:** An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

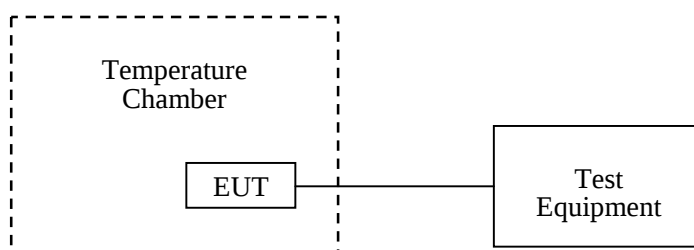

**Test Equipment List and Details**

| Manufacturer | Description                          | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------------------------|--------|---------------|------------------|----------------------|
| Dongzhixu    | High Temperature Test Chamber        | DP1000 | 201105083-3   | 2014-08-01       | 2015-08-01           |
| R&S          | Universal Radio Communication Tester | CMU200 | 109 038       | 2014-05-09       | 2015-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 23.5 °C   |
| <b>Relative Humidity:</b> | 72 %      |
| <b>ATM Pressure:</b>      | 101 .1kPa |

The testing was performed by Dean Liu on 2015-02-27.

**Cellular Band (Part 22H)**

| GMSK, Middle Channel, $f_c = 836.6$ MHz |                 |                 |                 |       |
|-----------------------------------------|-----------------|-----------------|-----------------|-------|
| Temperature                             | Voltage         | Frequency Error | Frequency Error | Limit |
| °C                                      | V <sub>DC</sub> | Hz              | ppm             | ppm   |
| -30                                     | 3.7             | 11              | 0.013           | 2.5   |
| -20                                     | 3.7             | 10              | 0.012           | 2.5   |
| -10                                     | 3.7             | 9               | 0.011           | 2.5   |
| 0                                       | 3.7             | 12              | 0.014           | 2.5   |
| 10                                      | 3.7             | 13              | 0.016           | 2.5   |
| 20                                      | 3.7             | 11              | 0.013           | 2.5   |
| 30                                      | 3.7             | 10              | 0.012           | 2.5   |
| 40                                      | 3.7             | 12              | 0.014           | 2.5   |
| 50                                      | 3.7             | 13              | 0.016           | 2.5   |
| 25                                      | 3.5             | 9               | 0.011           | 2.5   |
| 25                                      | 4.2             | 10              | 0.012           | 2.5   |

| 8PSK, Middle Channel, $f_c = 836.6$ MHz |                 |                 |                 |       |
|-----------------------------------------|-----------------|-----------------|-----------------|-------|
| Temperature                             | Voltage         | Frequency Error | Frequency Error | Limit |
| °C                                      | V <sub>DC</sub> | Hz              | ppm             | ppm   |
| -30                                     | 3.7             | 13              | 0.016           | 2.5   |
| -20                                     | 3.7             | 14              | 0.017           | 2.5   |
| -10                                     | 3.7             | 11              | 0.013           | 2.5   |
| 0                                       | 3.7             | 10              | 0.012           | 2.5   |
| 10                                      | 3.7             | 16              | 0.019           | 2.5   |
| 20                                      | 3.7             | 14              | 0.017           | 2.5   |
| 30                                      | 3.7             | 13              | 0.016           | 2.5   |
| 40                                      | 3.7             | 15              | 0.018           | 2.5   |
| 50                                      | 3.7             | 14              | 0.017           | 2.5   |
| 25                                      | 3.5             | 12              | 0.014           | 2.5   |
| 25                                      | 4.2             | 10              | 0.012           | 2.5   |

**WCDMA Band V: Re199**

| Middle Channel, $f_c = 836.6$ MHz |                 |                 |                 |       |
|-----------------------------------|-----------------|-----------------|-----------------|-------|
| Temperature                       | Voltage         | Frequency Error | Frequency Error | Limit |
| °C                                | V <sub>DC</sub> | Hz              | ppm             | ppm   |
| -30                               | 3.7             | 13              | 0.016           | 2.5   |
| -20                               | 3.7             | 10              | 0.012           | 2.5   |
| -10                               | 3.7             | 12              | 0.014           | 2.5   |
| 0                                 | 3.7             | 12              | 0.014           | 2.5   |
| 10                                | 3.7             | 11              | 0.013           | 2.5   |
| 20                                | 3.7             | 13              | 0.016           | 2.5   |
| 30                                | 3.7             | 15              | 0.018           | 2.5   |
| 40                                | 3.7             | 14              | 0.017           | 2.5   |
| 50                                | 3.7             | 13              | 0.016           | 2.5   |
| 25                                | 3.5             | 13              | 0.016           | 2.5   |
| 25                                | 4.2             | 10              | 0.012           | 2.5   |

**WCDMA Band V: HSDPA**

| Middle Channel, $f_c = 836.6$ MHz |                 |                 |                 |       |
|-----------------------------------|-----------------|-----------------|-----------------|-------|
| Temperature                       | Voltage         | Frequency Error | Frequency Error | Limit |
| °C                                | V <sub>DC</sub> | Hz              | ppm             | ppm   |
| -30                               | 3.7             | 9               | 0.011           | 2.5   |
| -20                               | 3.7             | 10              | 0.012           | 2.5   |
| -10                               | 3.7             | 11              | 0.013           | 2.5   |
| 0                                 | 3.7             | 12              | 0.014           | 2.5   |
| 10                                | 3.7             | 10              | 0.012           | 2.5   |
| 20                                | 3.7             | 8               | 0.010           | 2.5   |
| 30                                | 3.7             | 9               | 0.011           | 2.5   |
| 40                                | 3.7             | 11              | 0.013           | 2.5   |
| 50                                | 3.7             | 11              | 0.013           | 2.5   |
| 25                                | 3.5             | 12              | 0.014           | 2.5   |
| 25                                | 4.2             | 10              | 0.012           | 2.5   |

**WCDMA Band V: HSUPA**

| Middle Channel, $f_c = 836.6$ MHz |                 |                 |                 |       |
|-----------------------------------|-----------------|-----------------|-----------------|-------|
| Temperature                       | Voltage         | Frequency Error | Frequency Error | Limit |
| °C                                | V <sub>DC</sub> | Hz              | ppm             | ppm   |
| -30                               | 3.7             | 6               | 0.007           | 2.5   |
| -20                               | 3.7             | 7               | 0.008           | 2.5   |
| -10                               | 3.7             | 9               | 0.011           | 2.5   |
| 0                                 | 3.7             | 5               | 0.006           | 2.5   |
| 10                                | 3.7             | 4               | 0.005           | 2.5   |
| 20                                | 3.7             | 6               | 0.007           | 2.5   |
| 30                                | 3.7             | 7               | 0.008           | 2.5   |
| 40                                | 3.7             | 6               | 0.007           | 2.5   |
| 50                                | 3.7             | 6               | 0.007           | 2.5   |
| 25                                | 3.5             | 7               | 0.008           | 2.5   |
| 25                                | 4.2             | 8               | 0.010           | 2.5   |

**PCS Band (Part 24E)**

| <b>GMSK, Middle Channel, <math>f_c = 1880.0</math> MHz</b> |                       |                        |                        |               |
|------------------------------------------------------------|-----------------------|------------------------|------------------------|---------------|
| <b>Temperature</b>                                         | <b>Voltage</b>        | <b>Frequency Error</b> | <b>Frequency Error</b> | <b>Result</b> |
| <b>°C</b>                                                  | <b>V<sub>DC</sub></b> | <b>Hz</b>              | <b>ppm</b>             |               |
| -30                                                        | 3.7                   | 22                     | 0.012                  | Pass          |
| -20                                                        | 3.7                   | 23                     | 0.012                  | Pass          |
| -10                                                        | 3.7                   | 21                     | 0.011                  | Pass          |
| 0                                                          | 3.7                   | 24                     | 0.013                  | Pass          |
| 10                                                         | 3.7                   | 22                     | 0.012                  | Pass          |
| 20                                                         | 3.7                   | 23                     | 0.012                  | Pass          |
| 30                                                         | 3.7                   | 21                     | 0.011                  | Pass          |
| 40                                                         | 3.7                   | 23                     | 0.012                  | Pass          |
| 50                                                         | 3.7                   | 25                     | 0.013                  | Pass          |
| 25                                                         | 3.5                   | 22                     | 0.012                  | Pass          |
| 25                                                         | 4.2                   | 24                     | 0.013                  | Pass          |

| <b>8PSK, Middle Channel, <math>f_c = 1880.0</math> MHz</b> |                       |                        |                        |               |
|------------------------------------------------------------|-----------------------|------------------------|------------------------|---------------|
| <b>Temperature</b>                                         | <b>Voltage</b>        | <b>Frequency Error</b> | <b>Frequency Error</b> | <b>Result</b> |
| <b>°C</b>                                                  | <b>V<sub>DC</sub></b> | <b>Hz</b>              | <b>ppm</b>             |               |
| -30                                                        | 3.7                   | 17                     | 0.009                  | Pass          |
| -20                                                        | 3.7                   | 18                     | 0.010                  | Pass          |
| -10                                                        | 3.7                   | 12                     | 0.006                  | Pass          |
| 0                                                          | 3.7                   | 13                     | 0.007                  | Pass          |
| 10                                                         | 3.7                   | 12                     | 0.006                  | Pass          |
| 20                                                         | 3.7                   | 16                     | 0.009                  | Pass          |
| 30                                                         | 3.7                   | 17                     | 0.009                  | Pass          |
| 40                                                         | 3.7                   | 15                     | 0.008                  | Pass          |
| 50                                                         | 3.7                   | 11                     | 0.006                  | Pass          |
| 25                                                         | 3.5                   | 13                     | 0.007                  | Pass          |
| 25                                                         | 4.2                   | 18                     | 0.010                  | Pass          |

**WCDMA Band II: Re199**

| Middle Channel, $f_c = 1880.0$ MHz |                 |                 |                 |        |
|------------------------------------|-----------------|-----------------|-----------------|--------|
| Temperature                        | Voltage         | Frequency Error | Frequency Error | Result |
| °C                                 | V <sub>DC</sub> | Hz              | ppm             |        |
| -30                                | 3.7             | 13              | 0.007           | Pass   |
| -20                                | 3.7             | 12              | 0.006           | Pass   |
| -10                                | 3.7             | 14              | 0.007           | Pass   |
| 0                                  | 3.7             | 11              | 0.006           | Pass   |
| 10                                 | 3.7             | 15              | 0.008           | Pass   |
| 20                                 | 3.7             | 12              | 0.006           | Pass   |
| 30                                 | 3.7             | 13              | 0.007           | Pass   |
| 40                                 | 3.7             | 14              | 0.007           | Pass   |
| 50                                 | 3.7             | 13              | 0.007           | Pass   |
| 25                                 | 3.5             | 13              | 0.007           | Pass   |
| 25                                 | 4.2             | 14              | 0.007           | Pass   |

**WCDMA Band II: HSDPA**

| Middle Channel, $f_c = 1880.0$ MHz |                 |                 |                 |        |
|------------------------------------|-----------------|-----------------|-----------------|--------|
| Temperature                        | Voltage         | Frequency Error | Frequency Error | Result |
| °C                                 | V <sub>DC</sub> | Hz              | ppm             |        |
| -30                                | 3.7             | 26              | 0.014           | Pass   |
| -20                                | 3.7             | 24              | 0.013           | Pass   |
| -10                                | 3.7             | 25              | 0.013           | Pass   |
| 0                                  | 3.7             | 23              | 0.012           | Pass   |
| 10                                 | 3.7             | 22              | 0.012           | Pass   |
| 20                                 | 3.7             | 28              | 0.015           | Pass   |
| 30                                 | 3.7             | 24              | 0.013           | Pass   |
| 40                                 | 3.7             | 23              | 0.012           | Pass   |
| 50                                 | 3.7             | 25              | 0.013           | Pass   |
| 25                                 | 3.5             | 24              | 0.013           | Pass   |
| 25                                 | 4.2             | 23              | 0.012           | Pass   |

**WCDMA Band II: HSUPA**

| Middle Channel, $f_c = 1880.0$ MHz |                 |                 |                 |        |
|------------------------------------|-----------------|-----------------|-----------------|--------|
| Temperature                        | Voltage         | Frequency Error | Frequency Error | Result |
| °C                                 | V <sub>DC</sub> | Hz              | ppm             |        |
| -30                                | 3.7             | 28              | 0.015           | Pass   |
| -20                                | 3.7             | 26              | 0.014           | Pass   |
| -10                                | 3.7             | 27              | 0.014           | Pass   |
| 0                                  | 3.7             | 23              | 0.012           | Pass   |
| 10                                 | 3.7             | 21              | 0.011           | Pass   |
| 20                                 | 3.7             | 24              | 0.013           | Pass   |
| 30                                 | 3.7             | 25              | 0.013           | Pass   |
| 40                                 | 3.7             | 23              | 0.012           | Pass   |
| 50                                 | 3.7             | 24              | 0.013           | Pass   |
| 25                                 | 3.5             | 23              | 0.012           | Pass   |
| 25                                 | 4.2             | 21              | 0.011           | Pass   |

\*\*\*\*\* END OF REPORT \*\*\*\*\*