
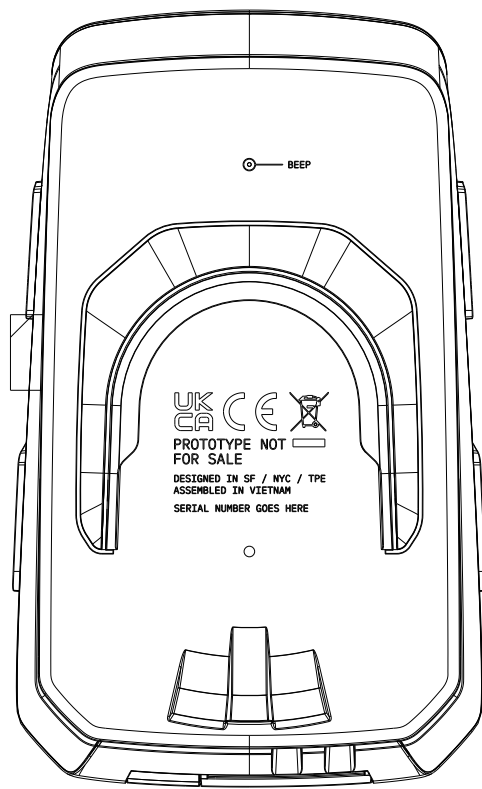
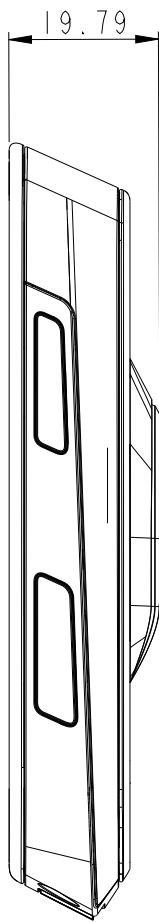
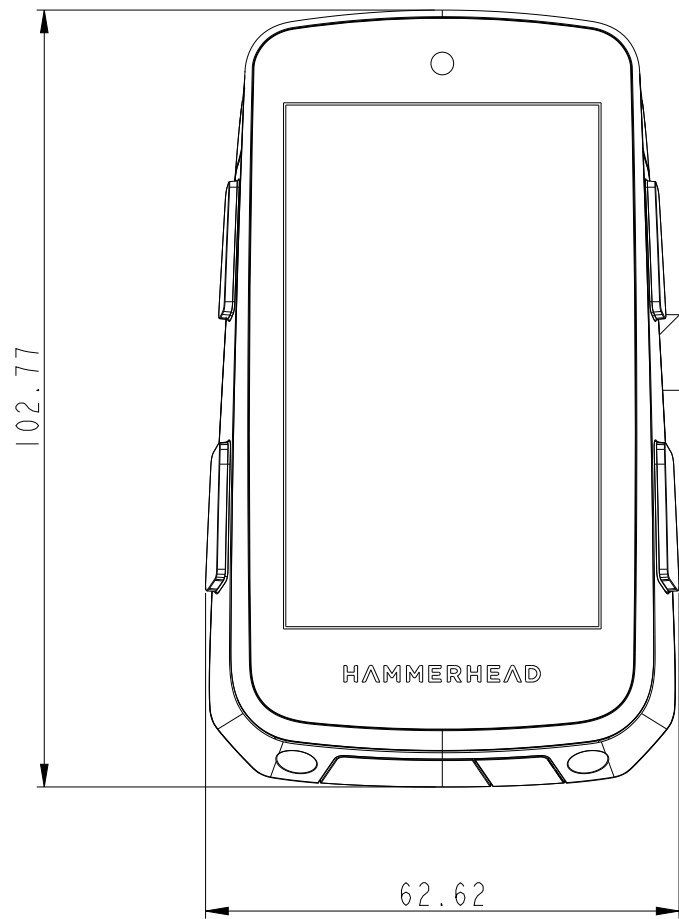


THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

REV	DESCRIPTION OF CHANGE	REV BY	DATE

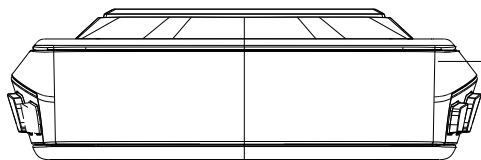

<--- Cert Label Placement

RoHS (BANNED SUBSTANCES)									
Cd	Pb	Hg	Cr6	PBBs	PBDEs	HALOGEN (Cl, Br)			
UNIT	75(*1)	1000(*3)	ND	1000	1000	CI < 900 Br < 900			
ppm	20(*2)	500(*4) 300(*5) 200(*6) 90(*7)	ND	1000	1000	CI + Br < 1500			

(*)1 ALL APPLICATIONS OTHER THAN THE ABOVE. (*)2 SOLDER.
(*)3 ALL COMPONENTS AND MATERIALS. (*)4 METAL.
(*)5 PVC CABLE. (*)6 LEATHER, TEXTILE, FABRIC, CANVAS COATING AND NYLON.
(*)7 LEAD IN PAINT, INK, PAINT, RUBBER AND BODY PARTS ON THE SYSTEM SHELL. (*)8 METAL/LEATHER.
(*)9 METAL / PLATING - ISO 3813 : NEED TO PROVIDE INFORMATION OF SAMPLE PLATING SO AS TO CALCULATE INTO mg / kg (ppm).
(*)10 METAL MATERIAL TEST RUNS 4 HEAVY METALS ONLY (Pb, Cd, Hg, Cr6+).
(*)11 HALOGEN CONTENT TEST NOT REQUIRED FOR PURE METAL MATERIAL (RAW MATERIAL).
HOWEVER, IF SURFACE OF METAL HAS SPRAY PAINTING FINISH (FINAL PRODUCT), THEN HALOGEN CONTENT TEST IS REQUIRED.

UNLESS SPECIFIED TOLERANCE ARE:
300 ABOVE : ± 0.20
300 ≥ X ≥ 150 : ± 0.15
150 > X ≥ 50 : ± 0.10
50 > X ≥ 20 : ± 0.075
20mm BELOW : ± 0.05
ANGLES : ± 1°
FLATNESS : ± 0.20
CONCENTRICITY : ± 0.05

PART NUMBER		DESCRIPTION		SPECIFICATION	
Karoo		DESIGNED BY		DRAWN BY	
MODEL		CHECKED BY		APPROVED BY	
THIRD ANGLE PROJECTION		ISSUED DATE		SCALE	UNIT
		Mar-31-23		1000	mm
		DRAWING FILE NAME			
SIZE	A2	SHEET	1 OF 2	2D REV	TOOL VER
				01	NA