

TB7300 Base Station/Repeater Specifications Manual

MBD-00002-16 · Issue 16 · April 2021

Contact Information

Tait Communications Corporate Head Office

Tait International Limited
P.O. Box 1645
Christchurch
New Zealand

For the address and telephone number of regional offices, refer to our website: www.taitradio.com

Copyright and Trademarks

All information contained in this document is the property of Tait International Limited. All rights reserved. This document may not, in whole or in part, be copied, photocopied, reproduced, translated, stored, or reduced to any electronic medium or machine-readable form, without prior written permission from Tait International Limited.

The word TAIT and the TAIT logo are trademarks of Tait International Limited.

All trade names referenced are the service mark, trademark or registered trademark of the respective manufacturers.

Disclaimer

There are no warranties extended or granted by this document. Tait International Limited accepts no responsibility for damage arising from use of the information contained in the document or of the equipment and software it describes. It is the responsibility of the user to ensure that use of such information, equipment and software complies with the laws, rules and regulations of the applicable jurisdictions.

Enquiries and Comments

If you have any enquiries regarding this document, or any comments, suggestions and notifications of errors, please contact your regional Tait office.

Updates of Manual and Equipment

This product may also be made under license under one or more of the following patents:

- US7203207, AU2004246135, CA2527142, GB2418107, HK1082608, MY134526, US8306071
- US7339917, AU2004246136, CA2526926, GB2418812, MY134217
- US7499441, AU2005262626, CA2570441, GB2430333, JP4690397, NZ551231, KR100869043, RU2351080, BRP10512052, MXPA06015241
- US 7200129, AU2005226531, CA2558551, CN1930809, GB2429378, JP4351720, BRP10508671, NZ549124, KR848483, RU2321952

In the interests of improving the performance, reliability or servicing of the equipment, Tait International Limited reserves the right to update the equipment or this document or both without prior notice.

Intellectual Property Rights

This product may also be made under license under one or more of the following patents:

- US7203207, AU2004246135, CA2527142, GB2418107, HK1082608, MY134526, US8306071
- US7339917, AU2004246136, CA2526926, GB2418812, MY134217
- US7499441, AU2005262626, CA2570441, GB2430333, JP4690397, NZ551231, KR100869043, RU2351080, BRP10512052, MXPA06015241
- US 7200129, AU2005226531, CA2558551, CN1930809, GB2429378, JP4351720, BRP10508671, NZ549124, KR848483, RU2321952

Environmental Responsibilities

Tait International Limited is an environmentally responsible company which supports waste minimization, material recovery and restrictions in the use of hazardous materials.

The European Union's Waste Electrical and Electronic Equipment (WEEE) Directive requires that this product be disposed of separately from the general waste stream when its service life is over. For more information about how to dispose of your unwanted Tait product, visit the Tait WEEE website at www.taitradio.com/weee. Please be environmentally responsible and dispose through the original supplier, or contact Tait International Limited.

Tait International Limited also complies with the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) Directive in the European Union.

In China, we comply with the Measures for Administration of the Pollution Control of Electronic Information Products. We will comply with environmental requirements in other markets as they are introduced.

Contents

Preface	5
Scope of Manual	5
Document Conventions	5
Associated Documentation	5
Publication Record	6
1 Base Station Specifications	8
1.1 Regulatory Information	9
1.2 Frequency Bands and Sub-bands	10
1.3 Identifying the Base Station	11
1.4 Power Supply	12
DC Input	12
AC Input	12
1.5 Power and Current Consumption	13
1.5.1 13.8 VDC Input	13
Transmit	13
Standby	13
1.5.2 AC Input	14
Transmit	14
Standby	14
1.6 Receiver	15
General	15
Digital RF (P25)	16
Digital RF (DMR)	17
Analog RF	18
Analog Audio - General	20
Analog Audio - CTCSS	20
Analog Audio - Gating Operation	21
1.7 Transmitter	22
General	22
Simulcast	25
Simplex	25
Analog Audio - General	26
Analog Audio - Modulation Characteristics	26
Analog Audio - CTCSS	27
1.8 Connections	27
1.8.1 External Frequency Reference Input (BNC)	27
1.8.2 Ethernet Interface (RJ45)	27
1.8.3 System Interface (DB-25)	27
External General Purpose Digital Inputs	27
1.8.4 Balanced Interface	28
Line Output - Balanced	28
Line Input - Balanced	29
1.8.5 Audio Delay	30
1.8.6 Rx Gate Output	30

	Electrical Characteristics	30
	Parameter	30
	Specification	30
	Comments	30
1.8.7	RSSI Output	31
	Parameter	31
	Value	31
	Unit	31
1.8.8	Tx Key Input	31
	Electrical Characteristics	31
	Parameter	31
	Specification	31
	Comments	31
1.8.9	Antenna Relay Output	32
	Electrical Characteristics	32
	Parameter	32
	Specification	32
	Comments	32
1.8.10	1PPS Timing Reference Input (BNC)	32
1.8.11	Channel Group Size	33
1.8.12	Digital Air Interface	33
1.9	Miscellaneous	34
1.9.1	Channel Details	34
1.9.2	Duplexer Attenuation Requirements	34
1.9.3	Operating Temperature Range	34
1.9.4	Heat Load Values	35
1.9.5	Physical Details	35
1.9.6	Reliability	35
1.9.7	Requirements for Delay, Jitter, Loss and Duplication	36
2	Compliance Standards	37
	Appendix A – Frequency Response Diagrams	39

Preface

Scope of Manual

Welcome to the Specifications Manual for the TB7300 base station. This manual provides general, performance and physical specifications for the TB7300 base station.

Document Conventions

Within this manual, four types of alerts may be given to the reader. The following paragraphs illustrate each type of alert and its associated symbol.



Warning This alert is used when there is a hazardous situation which, if not avoided, could result in death or serious injury.



Caution This alert is used when there is a hazardous situation which, if not avoided, could result in minor or moderate injury.

Notice This alert is used to highlight information that is required to ensure procedures are performed correctly. Incorrectly performed procedures could result in equipment damage or malfunction.



This icon is used to draw your attention to information that may improve your understanding of the equipment or procedure.

Associated Documentation

The current set of TB7300 product documentation is available on the Tait technical support website.

- TB7300 Installation and Operation Manual (MBD-00001-xx).
- TN9300 DMR Radio Network System Manual (MNB-00003-xx).
- Tait Core Networks Installation and Configuration Manual (MNB-00012-xx).

Technical notes are published from time to time to describe applications for Tait products, to provide technical details not included in manuals, and to offer solutions for any problems that arise. Look for new or updated technical notes on the Tait technical support website.

Publication Record

Issue	Publication Date	Description
16	April 2021	Updated for release 3.20 ■ B1 frequency band added ■ AC power variant added ■ Various minor updates ■ Receiver “Analog Audio - General” on page 20 updated ■ Receiver “Analog Audio - CTCSS” on page 20 updated ■ Transmitter “Analog Audio - Modulation Characteristics” on page 26 updated ■ “1PPS Timing Reference Input (BNC)” on page 32 updated ■ “Compliance Standards” updated
15	November 2020	General updates for version 3.15 release Various minor updates Updated compliance for H3 band Updated “Antenna Relay Output” Updated “Channel Group Size” table Added RSSI Output Table
14	August 2020	General updates for version sub-release 3.10.01 release Sub-release due to content request: Radiated spurious emissions and Conducted spurious emissions specifications updated
13	June 2020	General updates for version 3.10 release Minor updates throughout Raised supply voltage threshold to 16.5V under “Power Supply” Compliance Standards tables updated
12	November 2019	General updates for version 3.05 release Minor updates added throughout Included narrowband and wideband specs Included ‘typical’ digital unfaded sensitivity DMR specs
11	July 2019	General updates for version 3.00 release Added content about interoperability between P25/AS-IP & DMR/ MPT software applications Added Simplex information Regulatory Information updated
10	March 2019	General updates for version 2.60 release Analog Line content added Various minor updates
9	December 2018	General updates for version 2.55 release Updated limiting deviation Updated RX Hum and Noise
8	July 2018	General updates for version 2.50 release. Updated to “Tait International Limited”. Replaced “mS” with “uS” under the simulcast base station specs Changed dB from 71 to 79 under the Digital RF specs

Issue	Publication Date	Description
7	March 2018	General updates for version 2.45 release. Added H3 band to the “RF and EMC Compliances” section Updated the “Frequency Bands and Sub-Bands” table for clarity Updated limiting deviation
6	November 2017	General updates for version 2.40 release.
5	August 2017	General updates for version 2.35 release.

1 Base Station Specifications

The performance figures given in these specifications are applicable only to equipment operating as an integral part of a TB7300 base station. These performance figures are minimum figures, unless otherwise indicated, for equipment operating at standard room temperature (+22°C to +28°C [+71.6°F to +82.4°F]) and standard test voltage.

Notice The software release notes list known issues or limitations of the base station that may vary from the specifications published in this document. Please refer to the current software release notes for any variations to the specifications in this document.

1.1 Regulatory Information

Test Methods

Where applicable, the test methods used to obtain these specifications are those described in the following standards:

- EN 300 086
- EN 300 113
- EN 300 219
- EN 301 489
- CFR Title 47 Part 15
- TIA/EIA-603/603-D
- AS/NZS 4295

Emission Designators

This equipment is compatible with the emissions listed in the following table.

Emission Designator	Common Name	Modulation Scheme	Operating Modes
16K0F3E	Wideband FM	analog FM	analog voice
8K10F1E	P25 Phase 1	C4FM	digital voice
8K10F1D	P25 Phase 1	C4FM	data/control channel
8K10F7W	P25 Phase 1	C4FM	digital voice/data/ control channel
11K0F3E	FM	analog FM	analog voice
7K60F2D	MPT Control	FFSK	control channel / traffic channel data
7K60FXD	2-slot DMR	4FSK	data/control channel
7K60FXW	2-slot DMR	4FSK	digital voice/data/ control channel

You can obtain further details of test methods and the conditions which apply for compliance testing in all countries from Tait.

1.2 Frequency Bands and Sub-bands

Many of the performance figures in this manual are applicable to all frequency bands. In some cases the figures refer to specific bands or sub-bands, and these are identified with the letters listed in the following table.

Frequency Identification	Frequency Band and Sub-band	40W	50W
B band	B1 = 136 MHz to 174 MHz	x	✓
	B3 = 148 MHz to 174 MHz	x	✓
H band	H3 = 470 MHz to 520 MHz	✓	x
	H5 = 400 MHz to 470 MHz	✓	x

1.3 Identifying the Base Station

You can identify the model and hardware configuration of a TB7300 by referring to the product code printed on a label on the rear panel. The meaning of each character in the product code is explained in the table below.

Product Code	Description
TB73 <u>XX</u> -XXXX-XXXX-XXXX-10	10 = Single 40/50W base station/repeater
TB73 <u>XX</u> -XXXX-XXXX-XXXX-10	10 = DMR 40/50W base station/repeater 60 = P25 single 40/50W base station/repeater
TB73XX- <u>XXXX</u> -XXXX-XXXX-10	Frequency Band B1 = 136 MHz to 174 MHz B3 = 148 MHz to 174 MHz H3 = 470 MHz to 520 MHz H5 = 400 MHz to 470 MHz
TB73XX-XX <u>X</u> -XXXX-XXXX-10	B = 40/50W
TB73XX-XXX <u>X</u> -XXXX-XXXX-10	0 = Default
TB73XX-XXXX- <u>XXXX</u> -XXXX-10	0 = Default
TB73XX-XXXX-XXXX- <u>XXXX</u> -10	0 = 13.8VDC (nominal) input A = 120V and 230VAC input
TB73XX-XXXX-XXXX-XX <u>X</u> -10	0 = Default (no mains cable) 1 - 5 = Mains cable type
TB73XX-XXXX-XXXX-XX <u>XX</u> -10	Feature License 00 = None [Default: Analog (TBAS301)] AC = DMR Express SFE License with TDMA operation (TBAS302) AD = DMR Access SFE License with TDMA operation (TBAS303) AE = DMR conventional (TBAS304)
TB73XX-XXXX-XXXX-XXXX- <u>10</u>	10 = Default

1.4 Power Supply

DC Input

Input voltage

Operating voltage	12VDC to 16VDC
Standard test voltage	13.8VDC

Operating current

refer to [“Power and Current Consumption” on page 13](#)

Protection

Fault current (input)	15A fuse
Wrong input voltage	circuit breaker or fuse in external wiring ^a
Wrong input voltage polarity	electronic lock-out
	shunt diode

a. Provided by user.

AC Input

Input voltage

Operating voltage	100VAC to 253VAC
Standard voltages	120VAC and 230VAC

Protection

Fuse and MOV

1.5 Power and Current Consumption

The specifications in this section are typical figures.

The transmit measurements were carried out with the base station transmitting at the stated RF output power with all front panel fans running. The standby measurements were carried out with the base station not receiving or transmitting and no front panel fans running.

1.5.1 13.8VDC Input

Transmit

	A	W
B band		
Minimum RF output power (2W)	2.9A	40W
Maximum RF output power (50W)	9.6A	133W
H band		
Minimum RF output power (2W)	2.8A	38W
Maximum RF output power (40W)	8.1A	112W

Standby

	A	W
B and H bands	0.83A	11.5W

1.5.2 AC Input

Transmit

	A	W	VA
B and H bands 120VAC	1.67A	200W	200
B and H bands 230VAC	0.87A	200W	200

Standby

	A	W	VA
B and H bands 120VAC	0.20A	20W	24
B and H bands 230VAC	0.20A	20W	46

1.6 Receiver

General

Frequency bands

B1 band	136 MHz to 174 MHz
B3 band	148 MHz to 174 MHz
H3 band	470 MHz to 520MHz
H5 band	400 MHz to 470 MHz

Type	triple conversion superheterodyne; first conversion is analog, second is hybrid, and third is digital
------	---

Frequency increments

B band	2.5 kHz and 3.125 kHz
H band	5 kHz and 6.25 kHz

Switching range

B1 band	full range
B3 band ^a	±2MHz
H band	full range

a. The frequency range, measured from the tuned frequency, that can be used without needing to retune the front end or recalibrate the RSSI.

Input load impedance	50Ω nominal (VSWR <2:1)
----------------------	-------------------------

RF input protection	no degradation after 5 minutes exposure to on-channel signals at +20dBm (2.2V)
---------------------	--

Frequency stability

Internal reference	±0.5ppm –30°C to +60°C (–22°F to +140°F)
External reference	±1 Hz ± multiplied accuracy of external reference

RSSI	≤–125dBm to –30dBm
------	--------------------

General (Continued)

IF stages - B1 band

Frequencies	
Analog	21.4 MHz
Digital	21.4 MHz and 0 Hz
Analog IF bandwidth	9 kHz, -3 dB
Digital IF bandwidth	8.06 kHz, -3 dB

IF stages - B3 band

Frequencies	
Analog	16.9 MHz
Digital	16.9 MHz and 0 Hz
Analog IF bandwidth	9 kHz, -3 dB
Digital IF bandwidth	8.06 kHz, -3 dB

IF stages - H band

Frequencies	
Analog	70.1 MHz
Digital	8.66 MHz and 0 Hz
Analog IF bandwidth	9 kHz, -3 dB
Digital IF bandwidth	8.06 kHz, -3 dB

Spurious Emissions

Conducted	<-90 dBm 9 kHz to 2 GHz <-70 dBm 2 GHz to 12.75 GHz
Radiated	<-57 dBm 30 MHz to 1 GHz <-47 dBm 1 GHz to 4 GHz

Digital RF (P25)

The test methods used to obtain these figures are those described in TIA-102.CAAA-D for P25 Phase 1.

Digital unfaded sensitivity ^a	<-120 dBm @ 5% BER
--	--------------------

Digital faded sensitivity ^a	<-112 dBm @ 5% BER
--	--------------------

a. At 25°C

Digital adjacent channel rejection	60 dB
------------------------------------	-------

Digital signal displacement bandwidth	1 kHz
---------------------------------------	-------

Digital spurious response attenuation	≥100 dB
---------------------------------------	---------

Digital intermodulation response attenuation	85 dB
--	-------

Digital RF (P25) (Continued)

Digital blocking rejection

1 to 10 MHz	100 dB
-------------	--------

Digital co-channel rejection

9 dB

Digital RF (DMR)

Digital unfaded sensitivity^a

Guaranteed

< -120 dBm @ 5% BER (DAQ 2.0)
< -118.5 dBm @ 2.6% BER (DAQ 3.0)
< -118 dBm @ 2% BER (DAQ 3.4)
< -117 dBm @ 1% BER (DAQ 4.0)

Typical

< -122 dBm (0.18 µV) @ 5% BER

a. Center of switching range at 25°C.

Digital selectivity

B band	≥ 82 dB @ 1% BER
H band	≥ 79 dB @ 1% BER

Digital spurious response attenuation

≥ 90 dB

Digital intermodulation response attenuation^b

≥ 78 dB @ 1% BER unfaded

b. Up to 5 dB degradation at extremes of switching range and temperature.

Digital blocking rejection

> 1 MHz	100 dB @ 1% BER
---------	-----------------

Digital co-channel rejection

12 dB

Digital blocking rejection

> 1 MHz	100 dB @ 1% BER
---------	-----------------

Digital co-channel rejection

12 dB

Analog RF

Analogue Bandwidth

	Channel Spacing	Modulation 100% Deviation (Nominal)
Narrow Bandwidth (NB)	12.5 KHz	+/-2.5 KHz
Wideband	25 kHz	+/-5 kHz

FCC Narrowbanding Regulations

The following information applies to all base stations, not just to those sold in countries where FCC regulations apply.

From 1 January 2013 it is an FCC requirement that land mobile radio systems must not operate channels with a bandwidth greater than 12.5 kHz in the 150–174 MHz and 421–470 MHz frequency bands. From this date all base stations will be supplied with firmware that requires a software feature license to operate a wide bandwidth channel in these frequency bands.

The TBAS083 20/25 kHz Unrestricted Wideband feature license is available to any customer who is not subject to the relevant FCC regulations, or who has an FCC waiver. Note that this feature license is also required to operate a wide bandwidth channel on the spot frequencies which are exempt from the FCC requirement. To obtain the feature license, or for more information, contact your regional Tait office.

-  Unless otherwise noted, specifications in this section apply to narrowband and wideband operation.

Sensitivity^{a,b}

De-emphasised response

Centre of switching range	<–119dBm (0.25μV) at 25°C
Edge of switching range	<–117dBm (0.32μV) at 25°C

a. 12dB SINAD.

b. Up to 2dB degradation at extremes of temperature.

Maximum usable sensitivity^{c,d}

De-emphasised response

Centre of switching range	<–116dBm (0.35μV) at 25°C (narrowband)
	<–118 dBm (0.35 μV) at 25 °C (wideband)
Edge of switching range	<–114dBm (0.45μV) at 25°C (narrowband)
	<–116 dBm (0.45 μV) at 25 °C (wideband)

c. Sensitivity for 20dB SINAD, psophometrically weighted, RF source modulated at 60% deviation with 1 kHz.

d. Up to 2dB degradation at extremes of temperature.

Analog RF (Continued)

FM quieting^e

Narrowband	–113dBm
Wideband	–117 dBm

e. 20dB FM quieting, measured with de-emphasis on.

Hum and Noise (Ultimate signal-to-noise ratio) (at –47dBm)^f

B and H bands	45 dB (ANSI/TIA) (narrowband) 50 dB (CEPT - psophometric) (narrowband)
B band	55 dB (ANSI/TIA) (wideband)

f. Up to 5dB degradation at extremes of switching range and temperature.

Selectivity ^g	EIA-603 ^h	TIA/EIA-603-D	ETSI
B and H bands (narrowband)	85dB	50dB	85dB
B band (wideband)	90dB	87dB	

g. Up to 5dB degradation at extremes of switching range and temperature.

h. The EIA-603 is a single tone test method. The TIA/EIA-603-D is a two-tone test method.

Signal displacement bandwidth	≥1 kHz
-------------------------------	--------

Spurious response attenuation	≥100dB (ANSI/TIA) ≥90dB (ETSI)
-------------------------------	-----------------------------------

Intermodulation response attenuationⁱ

B and H bands	79dB (ETSI) (narrowband)
B band	85dB (ANSI/TIA) (wideband)

i. Up to 5dB degradation at extremes of switching range and temperature.

Blocking rejection

B and H bands	
1–10 MHz	100dB (ETSI)
>10 MHz	110dB (ETSI)
±1, ±2, ±5 and ±10 MHz	100dB (ANSI/TIA)

Co-channel rejection	–8dB
----------------------	------

Amplitude characteristic ^j	≤3dB (ETSI)
---------------------------------------	-------------

Co-channel rejection

Narrowband	–8 dB
Wideband	–5 dB

j. RF Input Level –107dBm to –13dBm.

Analog Audio - General

Frequency response (FM demodulator to G.711)

Bandwidth (subaudible signaling enabled)	339Hz - 3kHz
Bandwidth (subaudible signaling disabled)	185Hz - 3kHz
De emphasis	within +1, -3dB of a -6dB/octave de-emphasis curve (ref 1 kHz).
Pre emphasis	within +1, -3dB of a +6dB/octave pre-emphasis curve (ref 1 kHz)
Flat	within +1, -3dB (ref 1 kHz)

For more information refer to [“Appendix A Frequency Response Diagrams”](#) on page 54.

Extended bypass mode response for speech path set to flat (FM demodulator to G.711)	Frequency range (Hz)	Response (dB compared with 1 kHz)
	0 - 3300	+/- 1.0
	3550	-3
	4000	-30

Analog Audio - CTCSS

High pass (subaudible) filter

Hum and noise ^a	30dB minimum at 250.3 Hz 35dB typical (67 Hz to 240 Hz)
----------------------------	--

a. 1 kHz at 60% system deviation, CTCSS at 10% system deviation.

Tone detect

Tone squelch opening	better than 6dB SINAD
Tone detect bandwidth	
Accept	±2 Hz typical
Reject	±3.6 Hz typical
Response time (open)	≤150ms typical

Analog Audio - Gating Operation

SINAD gating

Opening level	6dB to 20dB SINAD
Accuracy	±3dB
RF hysteresis	4dB
Opening time	60ms typical
Closing time	60ms typical

1.7 Transmitter

FCC Narrowbanding Regulations

The following information applies to all base stations, not just to those sold in countries where FCC regulations apply.

From 1 January 2013 it is an FCC requirement that land mobile radio systems must not operate channels with a bandwidth greater than 12.5 kHz in the 150–174 MHz and 421–470 MHz frequency bands. From this date all base stations will be supplied with firmware that requires a software feature license to operate a wide bandwidth channel in these frequency bands.

The TBAS083 20/25 kHz Unrestricted Wideband feature license is available to any customer who is not subject to the relevant FCC regulations, or who has an FCC waiver. Note that this feature license is also required to operate a wide bandwidth channel on the spot frequencies which are exempt from the FCC requirement. To obtain the feature license, or for more information, contact your regional Tait office.

Unless otherwise noted, specifications in this section apply to narrowband and wideband operation.

General

Frequency bands

B1 band	136 MHz to 174 MHz
B3 band	148 MHz to 174 MHz
H3 band	470 MHz to 520MHz
H5 band	400 MHz to 470 MHz

Modulation types	11K0F3E, 7K60FXD, 7K60FXW, 7K60F2D, 8K10F1E, 8K10F1D, 8K10F7W
------------------	---

Frequency increments

B band	2.5 kHz and 3.125 kHz
H band	5 kHz and 6.25 kHz

Output load impedance	50Ω nominal
-----------------------	-------------

Frequency stability	±0.5ppm –30°C to +60°C (–22°F to +140°F)
---------------------	--

General (Continued)

Output power

B band

Rated power	50W
Range of adjustment	2W to 50W in 1W steps

H band

Rated power	40W
Range of adjustment	2W to 40W in 1W steps

Output power accuracy ^a	±1 dB into a 50Ω load
------------------------------------	-----------------------

a. Within normal operating voltages and temperatures; measured directly on PA output.

Duty cycle	100% at maximum rated output power ^b at +60°C (+140°F) ambient temperature
------------	--

b. Measured directly on PA output.

Mismatch capability

Ruggedness	open and short circuit load at any phase angle for one hour ^c
Stability	5:1 load VSWR at all phase angles ^c

c. Under power foldback.

Protection

Temperature	shutdown if PA sensor exceeds 100°C
Supply voltage	shutdown if supply is less than 11V
VSWR	gradual power foldback as VSWR increases above acceptable operating level

Steady State (All modulation types)	<−60dBc (EN 300 113 & EN 300 086)
Steady State (P25)	<−67dBc (TIA-102.CAAA)
Transient (DMR & P25)	<−50dBc (EN 300 113)

Modulation fidelity

DMR	<2% (EN 300 113)
P25	<2% TIA-102.CAAA

Intermodulation

P25/DMR	−40dBc with interfering signal at −30dBc at TB7300 base station RF output. For Europe, 70dB ratio is achieved using an external circulator/isolator with a minimum isolation of 30dB and less than 0.5dB insertion loss.
---------	--

General (Continued)

Sideband noise^d

B1 and B3

± 1.5 MHz	< -142 dBc/ Hz
$\geq \pm 4$ MHz	< -160 dBc/ Hz

H5 and H3

± 1.5 MHz	< -150 dBc/ Hz
$\geq \pm 4$ MHz	< -160 dBc/ Hz

d. No modulation, measured from center frequency at max power.

Radiated spurious emissions

Standby	< -57 dBm to 1 GHz < -47 dBm 1 GHz to 4 GHz
Transmit - B band	< -36 dBm 30 MHz to 1 GHz < -30 dBm 1 GHz to 4 GHz
Transmit - H band	< -36 dBm 30 MHz to 1 GHz < -30 dBm 1 GHz to 4 GHz ^a < -30 dBm 1 GHz to 12.75 GHz ^b

Conducted spurious emissions

Standby	< -57 dBm to 1 GHz < -47 dBm 1 GHz to 12.75 GHz
Transmit - B band	< -36 dBm 9 kHz to 1 GHz < -30 dBm 1 GHz to 4 GHz
Transmit - H band	< -36 dBm 30 MHz to 1 GHz < -30 dBm 1 GHz to 4 GHz ^a < -30 dBm 1 GHz to 12.75 GHz ^b

Transient behaviour - B and H bands	complies with EN 300 113 v2.2.1
-------------------------------------	---------------------------------

a. Transmit frequency below 470 MHz.

b. Transmit frequency above 470 MHz.

Simulcast

Launch time accuracy ^a	±1.5µs
-----------------------------------	--------

Deviation accuracy	0.2dB
--------------------	-------

Frequency accuracy ^b	<1 Hz
---------------------------------	-------

Supported simulcast modulation schemes

DMR	4FSK
P25	C4FM
Analog	FM

a. Launch time offset adjustable in 1µs increments

b. Launch time offset adjustable in 0.1Hz increments

Receive voter limitations

Maximum marshaling duration

DMR	300ms (simulcast operation)
P25	300ms (simulcast operation)
Analog	150ms (simulcast operation)

Maximum central voter packet arrival time skew

DMR	250ms
P25	100ms
Analog	100ms

Simplex

Coaxial relay operating time	30ms (maximum) ^a
------------------------------	-----------------------------

Isolation (off-state)	> 40 dB
-----------------------	---------

a. **Warning:** A coaxial relay that takes longer than 30ms to operate risks damage to the PA.

Analog Audio - General

Peak deviation	
Narrowband	≤ 2.5 kHz
Wideband	≤ 5 kHz
Nominal deviation selection ^a	55% to 65% of peak deviation
Limiting deviation ^b	94% of maximum system deviation
CWID deviation	40% of peak deviation

a. For a level of -10 dBm0 applied to the line input.

b. With modulation input driven at a frequency of 1 kHz, and at a level 20dB above the nominal level of 60% deviation.

Analog Audio - Modulation Characteristics

Frequency Response (G.711 to FM modulator)		
Bandwidth (subaudible signaling enabled)	307 Hz - 3 kHz	
Bandwidth (subaudible signaling disabled)	134 Hz - 3 kHz	
Pre-emphasized response	within +1, –3 dB of a 6 dB/octave pre-emphasis curve (ref. 1 kHz)	
Flat response	within +0.5, –1.5 dB of output level at 1 kHz	
For more information refer to “ Appendix A Frequency Response Diagrams ” on page 54.		
Extended bypass mode response for speech path set to flat (G.711 to FM modulator)	Frequency range (Hz)	Response (dB compared with 1 kHz)
	0 - 3600	+/- 1.0
	3600 - 3760	+1.0 / -3
	4000	-10
Distortion	<2%	
Hum and noise ^e		
Narrowband	–50 dB typical (ETSI)	
Wideband	–55 dB typical (ANSI/TIA)	
e. Up to 5 dB degradation at extremes of temperature.		

Analog Audio - CTCSS

Standard tones	all 37 ANSI/TIA group A, B and C tones plus 13 commonly used tones
Frequency error (from ANSI/TIA tones)	0.08% maximum
Generated tone distortion	1.2% maximum
Generated tone flatness	flat across 67 Hz to 250.3 Hz to within 1 dB
Modulation level	Adjustable
Modulated distortion	<5%

1.8 Connections

1.8.1 External Frequency Reference Input (BNC)

Frequencies ^a	10 MHz or 12.8 MHz
a. Automatically detected by the reciter.	
Lock range	±50 Hz
Input level	500mV _{pp} to 5V _{pp}
Input impedance	≥1 kΩ

1.8.2 Ethernet Interface (RJ45)

Transceiver	10/100 Base-Tx/Rx (Auto-MDIX)
IEEE-spec	IEEE802.3 and 802.3u

1.8.3 System Interface (DB-25)

External General Purpose Digital Inputs

Input low threshold	$V_{IL} < 0.6V$
Input high threshold	$V_{IH} > 2.2V$

External General Purpose Digital Inputs (Continued)

Internal pull-up (5 V)	$\geq 10 \text{ k}\Omega$
Input source current	$I_{IL} < 1 \text{ mA}$ ($V_{IL} = 0 \text{ V}$)
Continuous input voltage	$ V_{IN} < 30 \text{ V}$
Transient input voltage	$ V_{IN} < 35 \text{ V}$ ($t < 1 \text{ s}$)

1.8.4 Balanced Interface

Line Output - Balanced

Audio Headroom This is the largest sine-wave signal that meets distortion specifications	+10dBm
Output Level Range For output signal of 60% deviation at 1 kHz Adjustable over this range	-30dBm to +0dBm
Output impedance	600 Ω balanced
Return loss	> 20dB
Impedance balance about earth (ITU-T G.117)	> 46dB
Frequency response (‘speech’ setting)	300Hz
Passband ripple (compared with 1 kHz)	-3 to +1 dB
Distortion (RF to line) Applicable over level adjustment range up to the audio headroom limit Applicable over entire frequency response range	3%

Line Input - Balanced

Audio headroom	+10 dBm
Input Level Range For output signal of 60% deviation at 1kHz Adjustable over this range	-30 dBm to 0 dBm
Impedance	600 Ω balanced
Return loss	>20 dB
Impedance balance about earth ITU G.117	>46 dB
Frequency response	300 Hz to 2.55 kHz
Distortion (line to RF)	3%

1.8.5 Audio Delay

Transmit direction: 70 ms max (signal applied to balanced input)

Receive direction: 70 ms max (signal measured at balanced output)

Delay distortion: $\leq 40 \mu\text{spp}$ 300Hz to 2.55kHz (relative to 1 kHz)

Delay distortion is the pulse distortion that arises because different frequency components have different delays.

1.8.6 Rx Gate Output

The Rx gate output indicates a valid analog received signal.

Logic state: Active low

Logic type: Open drain transistor connection



The Rx Gate output is not the same as an M-wire output:

Large negative voltages traditionally associated with E&M signaling, if applied directly, can damage the reciter hardware.

Tait offers an isolation adapter that provides E&M isolated signaling (order number TBC101A).

Electrical Characteristics

Parameter	Specification	Comments
Low voltage level	$< 0.4\text{V}$	RXGATE activated
High voltage level	0 to 30V	Protection
Low level output current	$< 250\text{mA}$	
High level output current	$< 100\mu\text{A}$ at 30V	

1.8.7 RSSI Output

Parameter	Value	Unit
Configurable RF input range	-130 .. -60	dBm
Configurable Output range	0 .. 5	V
Maximum Output range Series 1	0.8 .. 4.6	V
Maximum Output range Series 2	0.5 .. 4.9	V
Accuracy	+/- 300	mV
Response time	< 70	ms
Output impedance	100	Ohm

1.8.8 Tx Key Input

The Tx Key input is a 5V logic level input that causes the base station to transmit the audio signal presented to the balanced input.



The Tx Key input is not the same as an E-wire input:

Large negative voltages traditionally associated with E&M signaling, if applied directly, can damage the reciter hardware.

Tait offers an isolation adapter that provides E&M isolated signaling (order number TBC101A).

Logic state: Active low.

Electrical Characteristics

Parameter	Specification	Comments
Low voltage level	$\leq +0.8V$	Input active
High voltage level	$\geq +2V$	Input inactive
Input Hysteresis	$\geq 0.4V$	
Input resistance	$\geq 10k\Omega$	To +5 V rail
Maximum external pull up voltage	$\leq 20V$	

1.8.9 Antenna Relay Output

The antenna relay output will be active when the base station transmits, and the antenna relay is enabled in the web user interface.

Logic state: Active low

Logic type: Open drain transistor connection



Antenna relay operation applies to P25/AS-IP, not DMR/MPT.

Electrical Characteristics

Parameter	Specification	Comments
Low voltage level	< 0.4 V	Antenna relay activated
High voltage level	0 to 30 V	Protection
Low level output current	< 250 mA	
High level output current	< 100 μ A at 30V	

1.8.10 1PPS Timing Reference Input (BNC)

Input low threshold	Vil < 0.6V
Input high threshold	Vih > 2.3V
Input termination	470 Ω + 5% (AC terminated)
Transient input voltage	Vin < 15V
Frequency	1 PPS (required for simulcast and voted DMR channel)
Polarity	rising edge represents timing reference
Maximum jitter	$\pm$ 50ns

1.8.11 Channel Group Size

The table below defines vote contributors and channel group size for each channel type.

‘Channel group size’ is the number of members (transceivers or receivers) in a channel group.

‘Vote contributors’ are the number of active receivers that will contribute to the voted output.

		Series 1	Series 2
Channel Type	Vote Contributors	Channel Group Size	Channel Group Size
P25 failsoft (trunking)	all base stations	14	28
P25 trunked control channel	all base stations	14	28
P25 trunked traffic channel Phase 1	all base stations	14	28
P25 conventional	10	20	28
P25 dual mode	10	20	28
AS-IP conventional	10	20	28
DMR (trunked and conventional)	all base stations	10	28

1.8.12 Digital Air Interface

Vocoder	AMBE+2
Digital Protocol	DMR ETSI-TS102 361 -1,-2,-3,-4

1.9 Miscellaneous


1.9.1 Channel Details

Number of channels	1000
Channel change time	300 ms

1.9.2 Duplexer Attenuation Requirements

The following graph shows the attenuation requirements for duplexers used with the base station. The dotted plot represents the attenuation required in the Rx path at the Tx frequency, while the continuous plot shows the attenuation required in the Tx path at the Rx frequency.

The quoted attenuation will ensure not more than 1 dB receiver desensitization (from the specified sensitivity), and has a 5 dB margin built in.

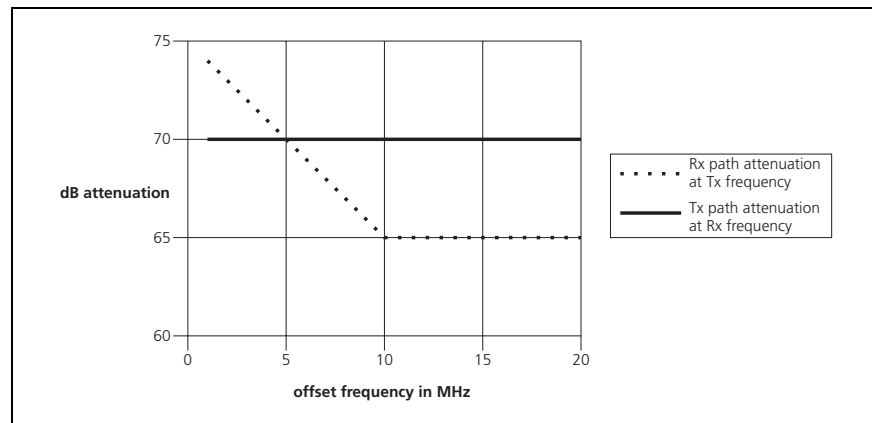

1.9.3 Operating Temperature Range

Operating temperature range	–30°C to +60°C (–22°F to +140°F) ambient temperature ^a
a. Ambient temperature is defined as the temperature of the air at the intake to the cooling fans.	

1.9.4 Heat Load Values

These measurements were carried out with the base station transmitting at its rated output power with all front panel fans running.

	W	Btu/h
B band	110W	375Btu/h
H band	95W	324Btu/h

1.9.5 Physical Details

Cooling	forced air via front panel fan
---------	--------------------------------

Connectors

RF input	BNC female
RF output	N-type female
External reference frequency input	BNC female
1PPS input	BNC female
Ethernet	RJ45
Serial	RJ12
System inputs and outputs	DB-25
DC input	screw terminal

Dimensions

Height	44mm (1.73in)
Width	436mm (17.17in)
Width with 19" rack mounting bracket	483mm (19in)
Length	400mm (15.7in)

Weight

DC variant	6.7kg (14.8lb)
AC variant	7.8kg (17.2lb)

1.9.6 Reliability

MTBF at $\geq 50,000$ hours (estimated)

1.9.7 Requirements for Delay, Jitter, Loss and Duplication

Standard Requirements	Recommended	Required
Out of order C plane and U plane packets ^a	< 0.01%	
Packet Loss	< 0.01%	
Latency	< 40ms	< 150ms
Jitter	< 20ms	< 100ms
Skew	< 40ms recommended	< 270ms
Minimum bandwidth for user traffic (voice, control channel, packet data)	64kb/s per physical channel	
Minimum bandwidth to carry management traffic (web, logs, SNMP).	100kb/s per site	
Minimum bandwidth to meet jitter requirements on non-fragmenting link	600kb/s per site up to 5 physical channels	

a. C plane and U plane are references to telco terminology distinguishing call setup and user traffic.

2 Compliance Standards

The TB7300 base station has been tested and approved to appropriate national and international compliance standards. These standards are listed on the following page.

You can obtain further details of test methods and the conditions which apply for compliance testing in all countries from Tait.

Notice The software release notes list known issues or limitations of the base station that may vary from the specifications published in this document. Please refer to the current software release notes for any variations to the specifications in this document.

RF and EMC Compliances

The following table shows which variants of the TB7300 have been tested and approved to the listed standards.

A check indicates the compliance has been received, a date indicates when the compliance is expected to be received, and a blank cell indicates there are currently no plans to apply for this compliance.

		B1 Band	B3 Band	H5 Band	H3 Band
		50W	50W	40W	40W
P25	CFR Title 47 Parts 22 and 90 (FCC)	✓	✓	✓	✓
	RSS-119 (IC)	✓	✓	✓	✗
	EN 300 113 (ETSI)	✓	✓	✓	✓
	AS/NZS 4768 Appendix A	✓	✓	✓	✓
DMR/IMPT	CFR Title 47 Parts 22 and 90 (FCC)	✓	✓	✓	✓
	RSS-119 (IC)	✓	✓	✓	✗
	EN 300 113 (ETSI)	✓	✓	✓	✓
	AS/NZS 4768 Appendix A	✓	✓	✓	✓
RF - Analog Narrowband	CFR Title 47 Parts 22 and 90 (FCC)	✓	✓	✓	✓
	RSS-119 (IC)	✓	✓	✓	✗
	EN 300 086 (ETSI)	✓	✓	✓	✓
	AS/NZS 4295 Appendix B	✓	✓	✓	✓
RF - Analog Wideband	EN 300 086 (ETSI)	✓	✓	✓	✓
	CFR Title 47 Part 80 (FCC)	✓	✓	✗	✗
	CFR Title 47 Parts 22 and 90 (FCC)	✗	✗	✓	✗
EMC	CFR Title 47 Part 15 (FCC)	✓	✓	✓	✓
	EN 301 489-1, EN 301 489-5 (ETSI)	✓	✓	✓	✓

Safety and Environmental Compliances

The TB7300 base station has been tested and approved to the following standard: IEC 62368

	Testing Method	Testing Standard
Environmental	Shock	MIL-STD-810G:2008

Appendix A – Frequency Response Diagrams

This appendix shows the transmitter and receiver frequency response diagrams.

Figure A.1 Receiver frequency response

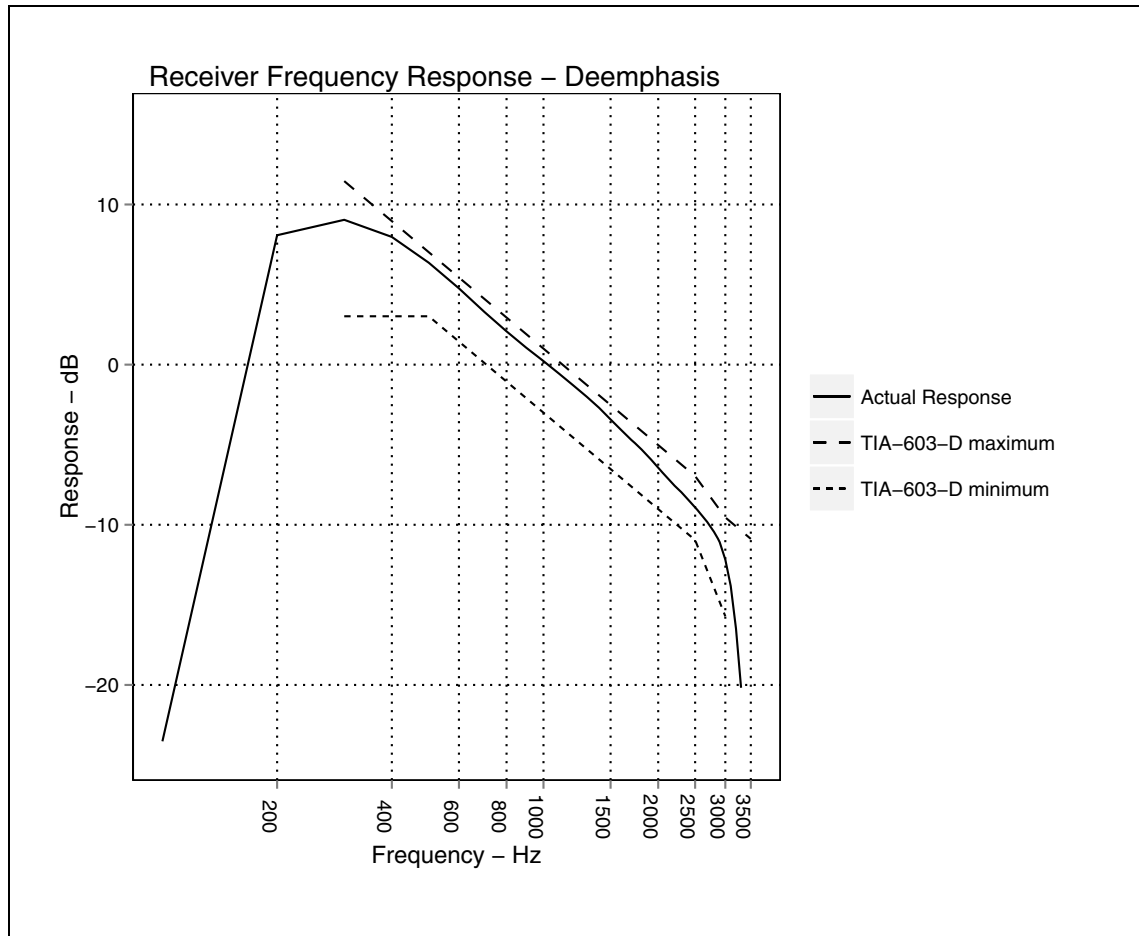


Figure A.2 Transmitter frequency response

