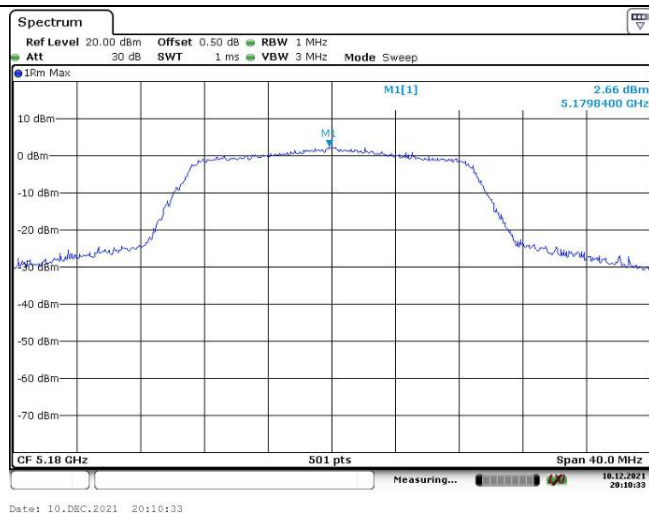
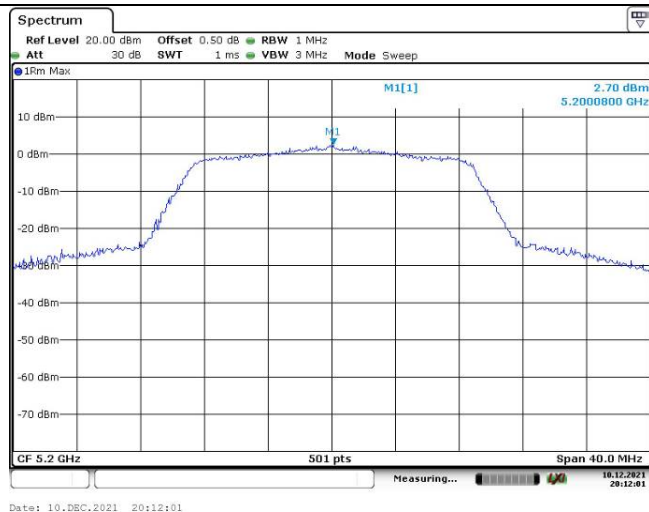
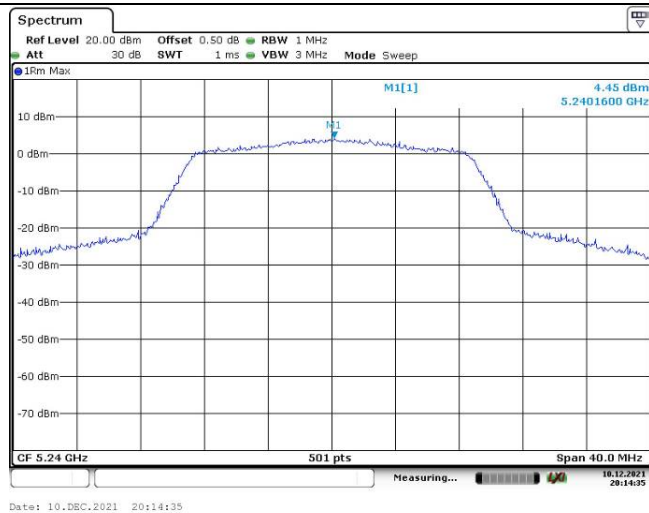
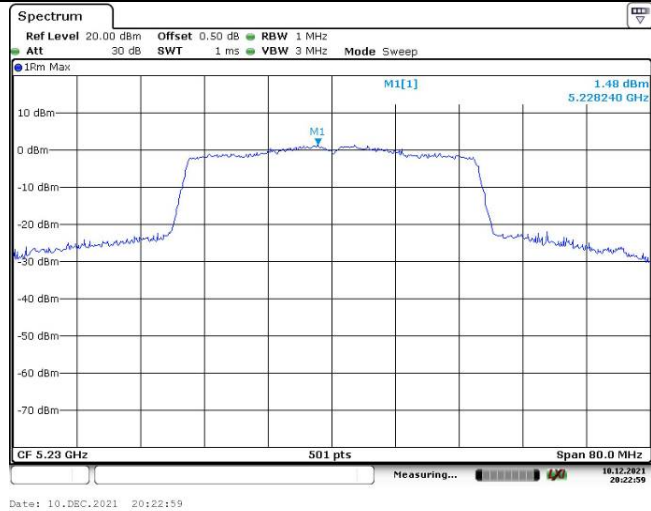
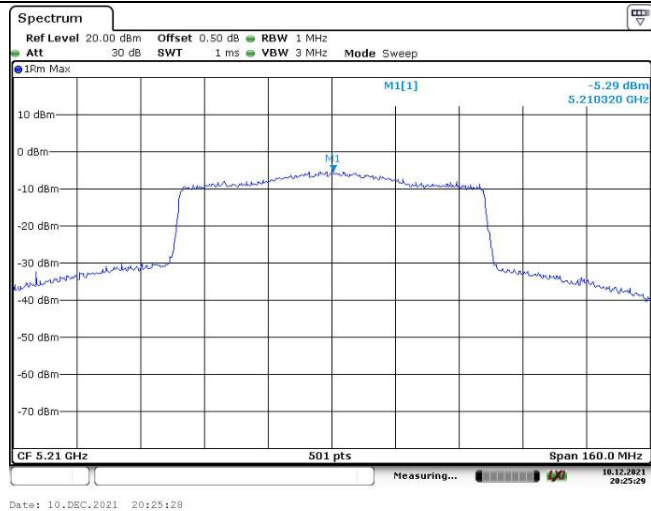
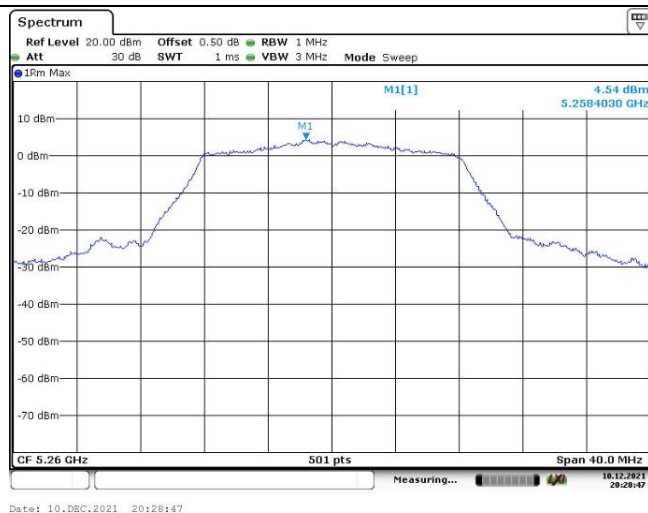
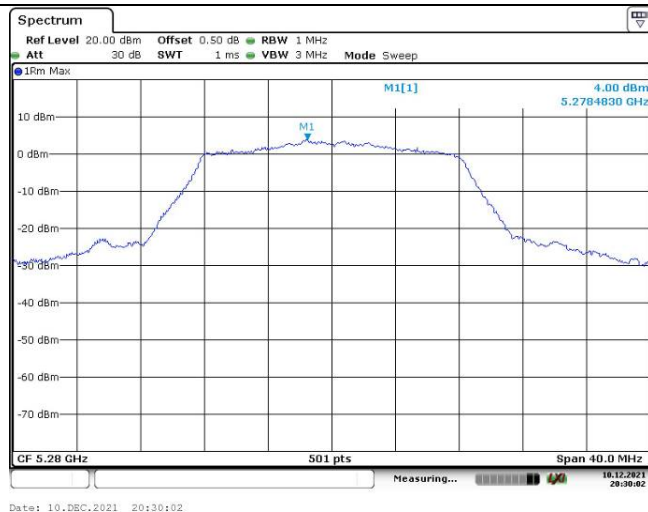
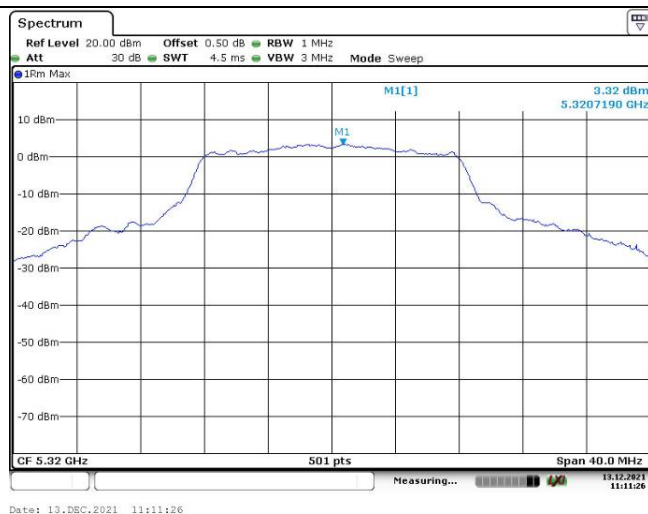


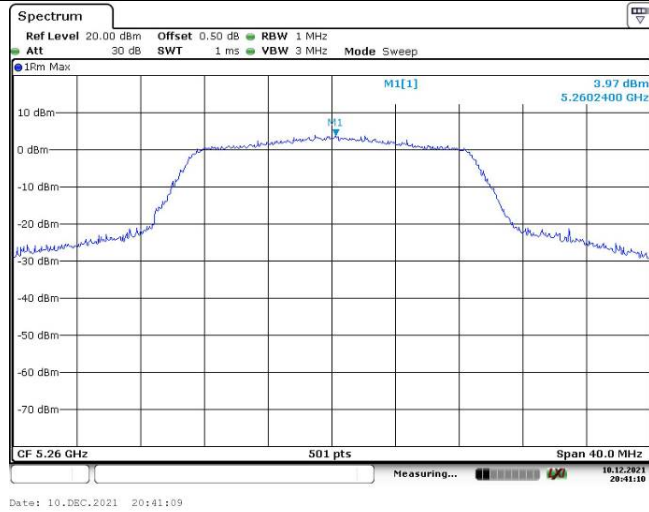
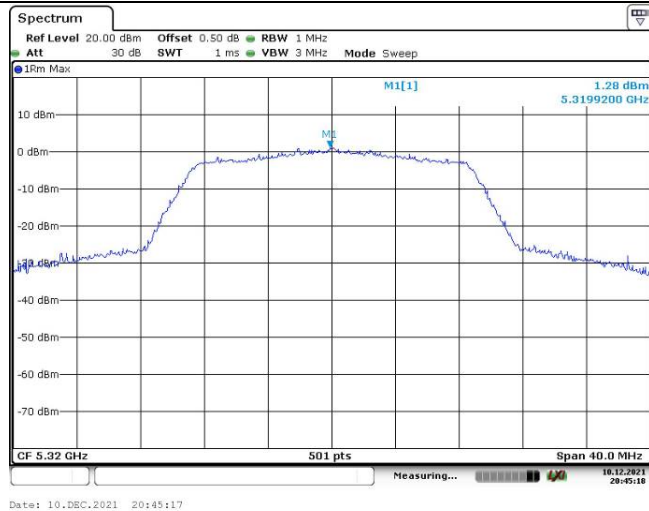
Maximum power spectral density802.11n ht20
Lowest Channel802.11n ht20
Middle Channel802.11n ht20
Highest Channel

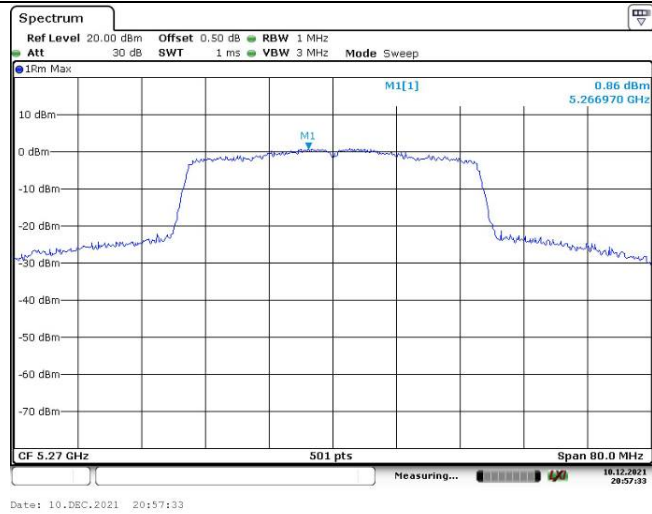
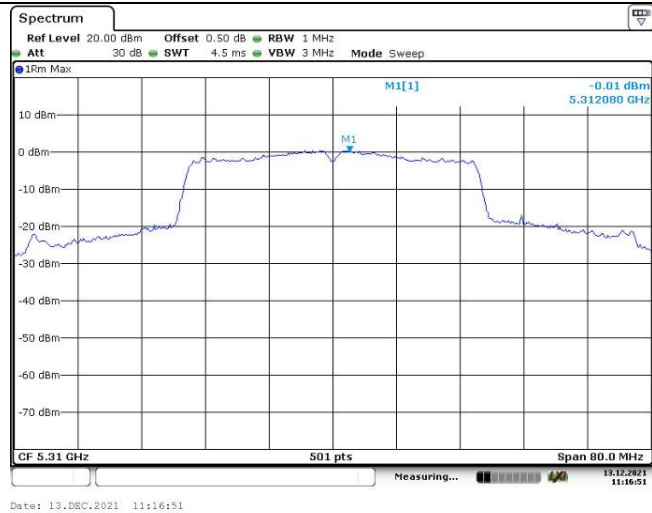
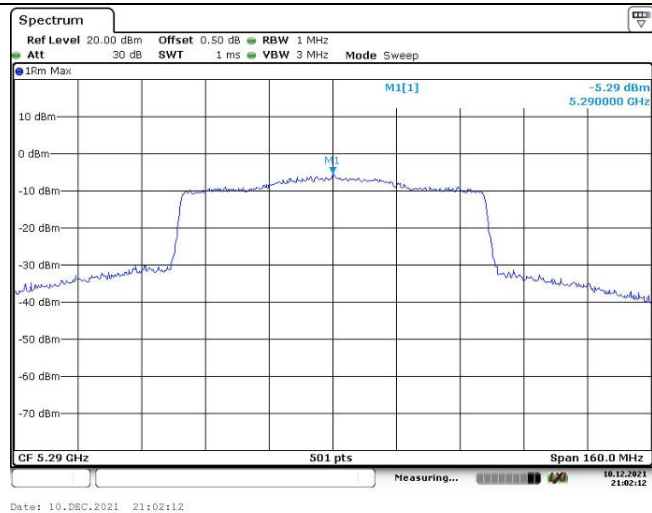
Maximum power spectral density802.11n ht40
Lowest Channel802.11n ht40
Highest Channel802.11ac vht80
Middle Channel

5250-5350 MHz:

Maximum power spectral density

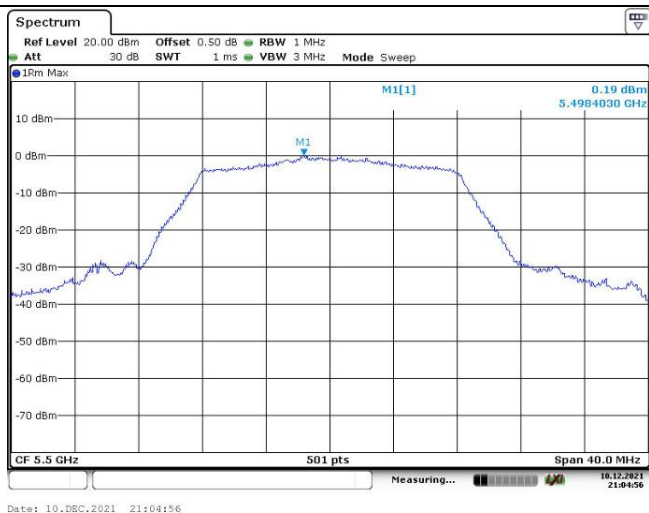
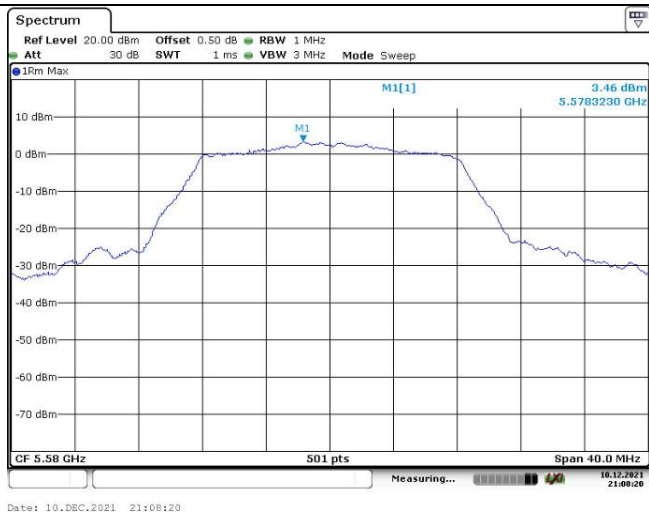
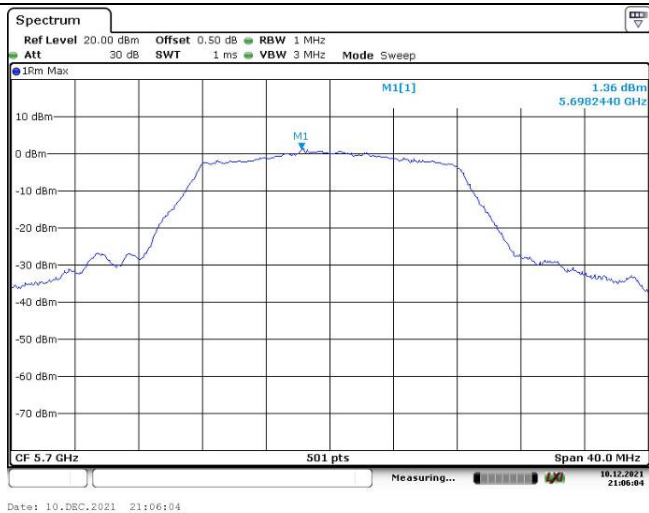
802.11a
Lowest Channel802.11a
Middle Channel802.11a
Highest Channel

Maximum power spectral density802.11n ht20
Lowest Channel802.11n ht20
Middle Channel802.11n ht20
Highest Channel

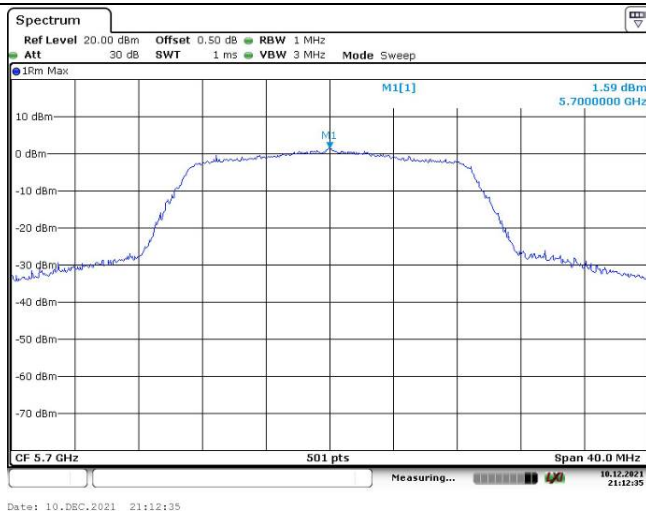
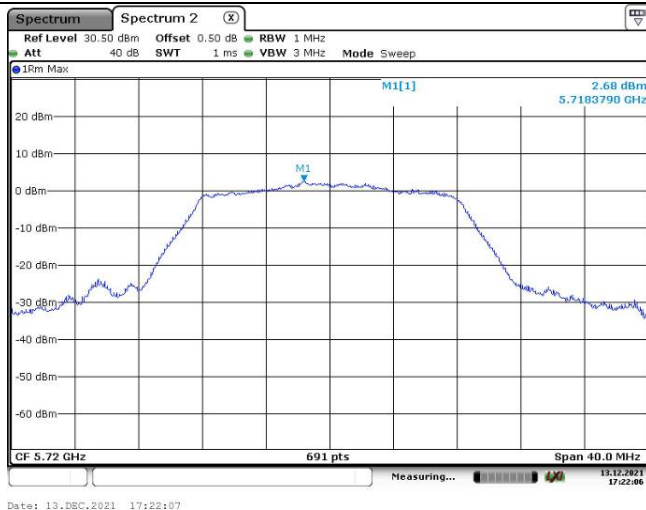
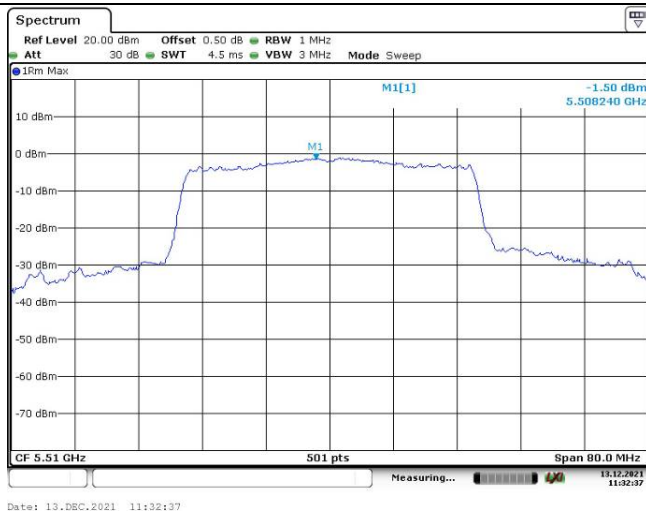
Maximum power spectral density802.11n ht40
Lowest Channel802.11n ht40
Highest Channel802.11ac vht80
Middle Channel

5470-5725 MHz:

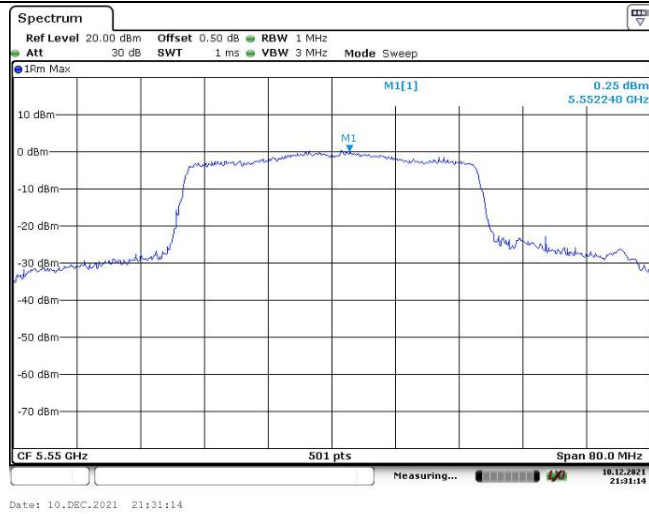
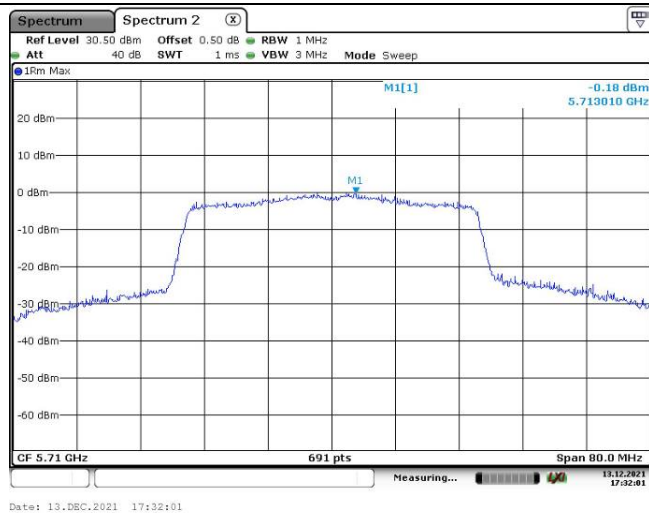
Maximum power spectral density

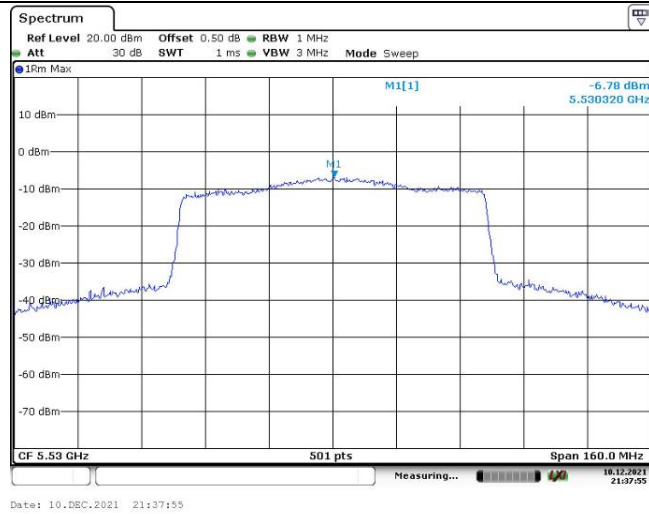
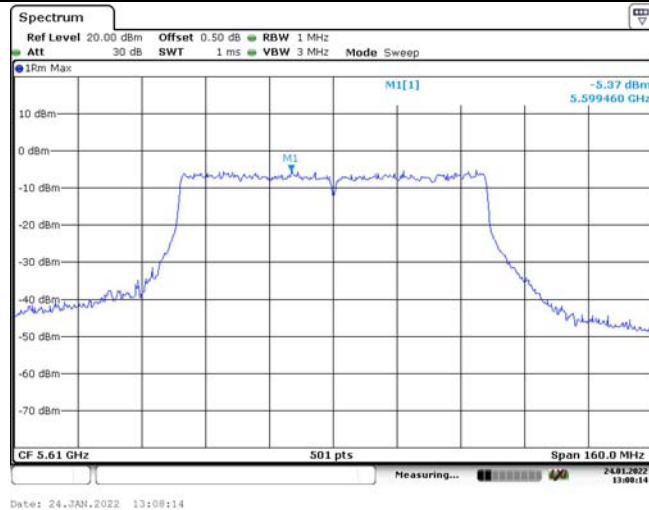
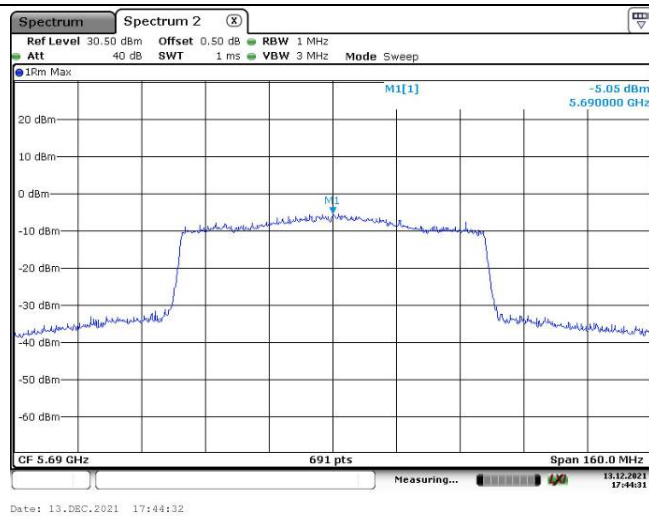
802.11a
Lowest Channel802.11a
Middle Channel802.11a
Highest Channel



Maximum power spectral density802.11n ht20
Highest Channel802.11n ht20
Additional Channel802.11n ht40
Lowest Channel

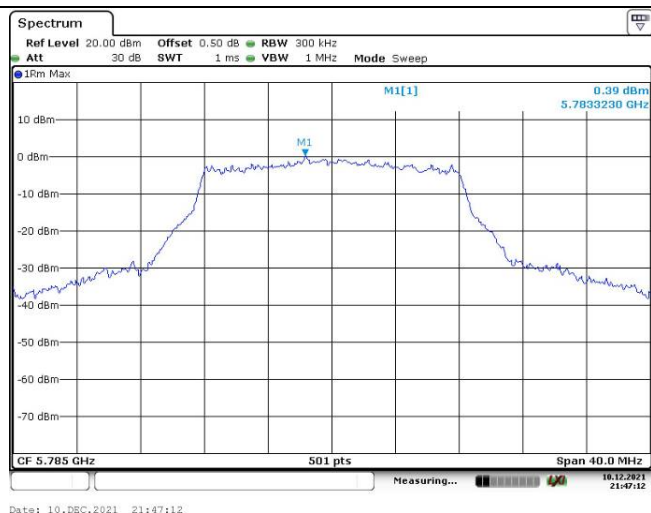
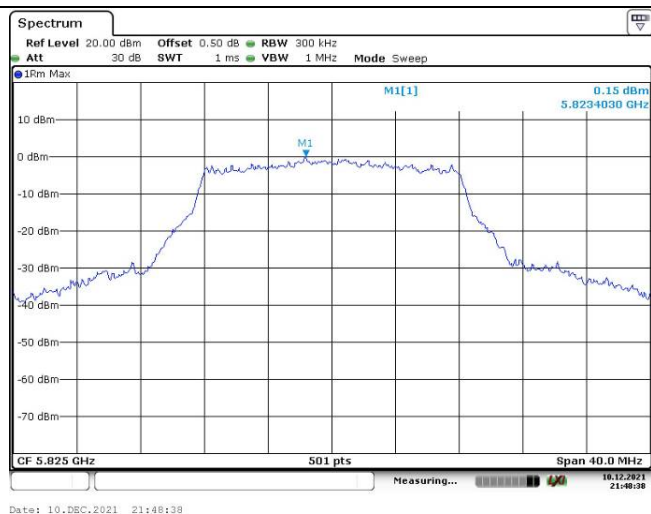
Maximum power spectral density

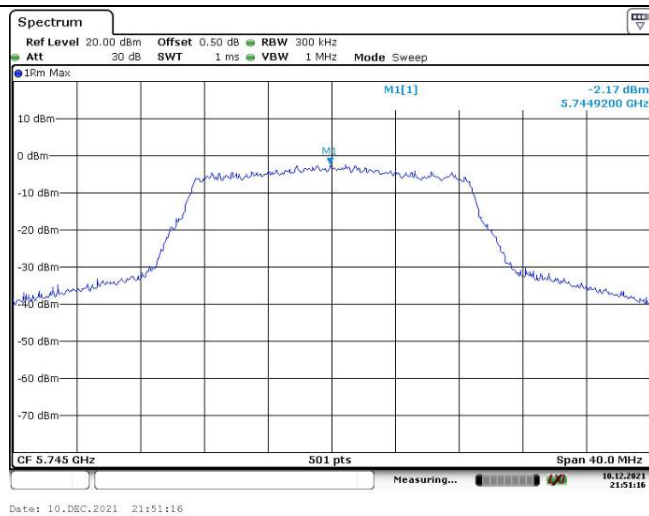
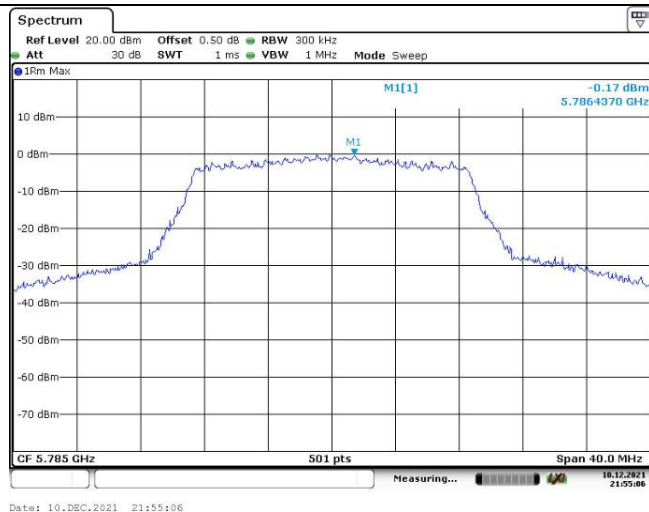
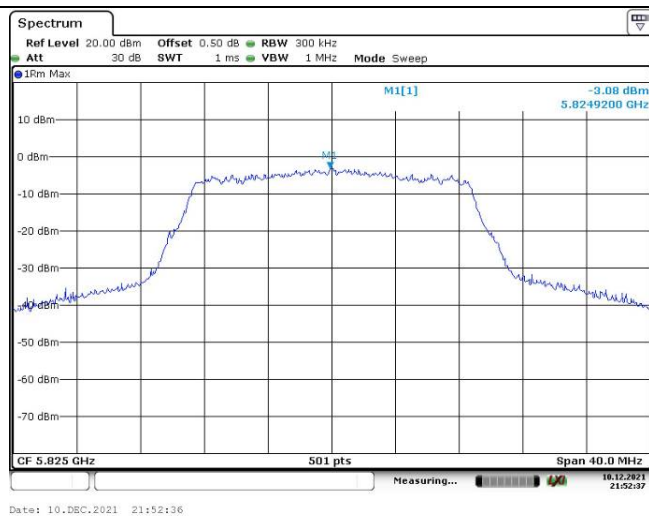
802.11n ht40
Middle Channel802.11n ht40
Highest Channel802.11n ht40
Additional Channel

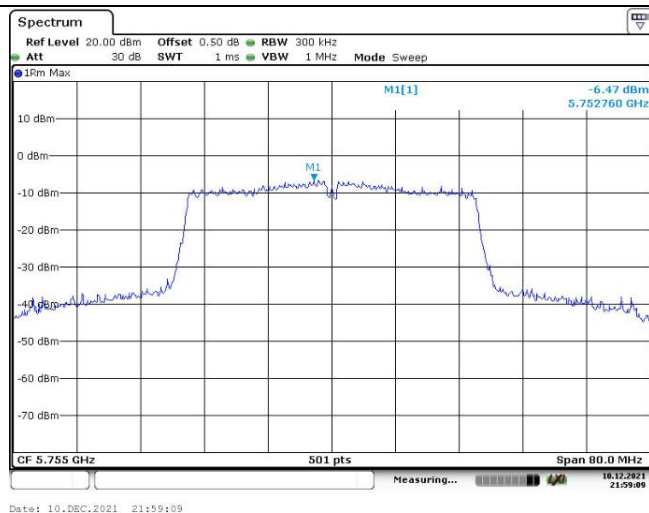
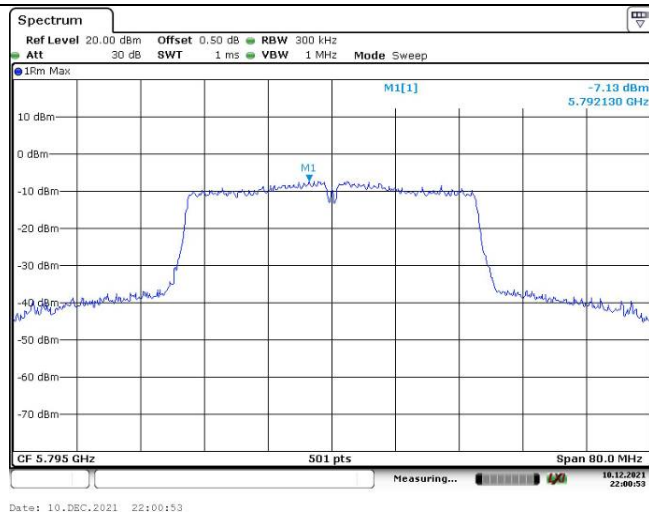
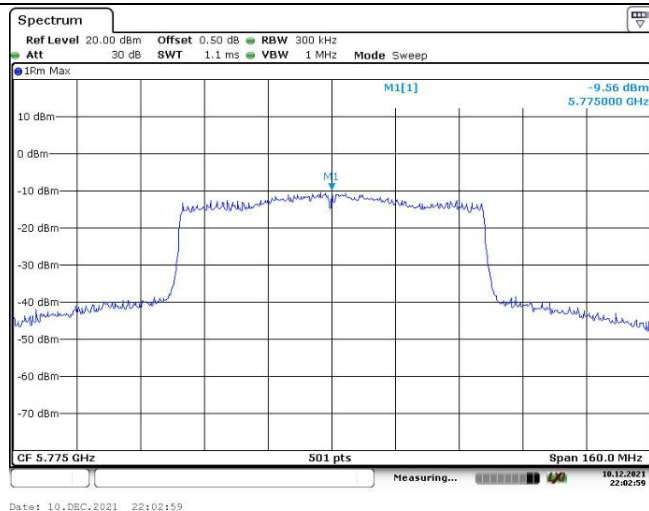
Maximum power spectral density802.11ac vht80
Lowest Channel802.11ac vht80
Middle Channel802.11ac vht80
Additional Channel

5725-5850MHz

Maximum power spectral density

802.11a
Lowest Channel802.11a
Middle Channel802.11a
Highest Channel

Maximum power spectral density802.11n ht20
Lowest Channel802.11n ht20
Middle Channel802.11n ht20
Highest Channel

Maximum power spectral density802.11n ht40
Lowest Channel802.11n ht40
Highest Channel802.11ac vht80
Middle Channel

4.6 Duty Cycle:

Serial Number:	CR21110026-RF-S1	Test Date:	2021-12-10
Test Site:	RF	Test Mode:	Transmitting
Tester:	LE Qiao	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	22.8	Relative Humidity: (%)	49	ATM Pressure: (kPa)	101.6
----------------------	------	------------------------------	----	------------------------	-------

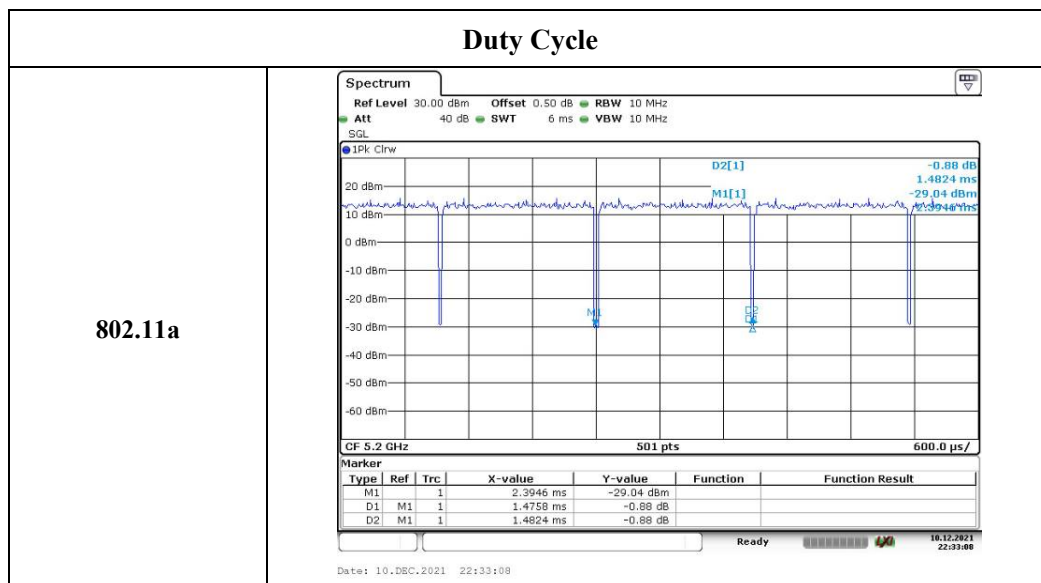
Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

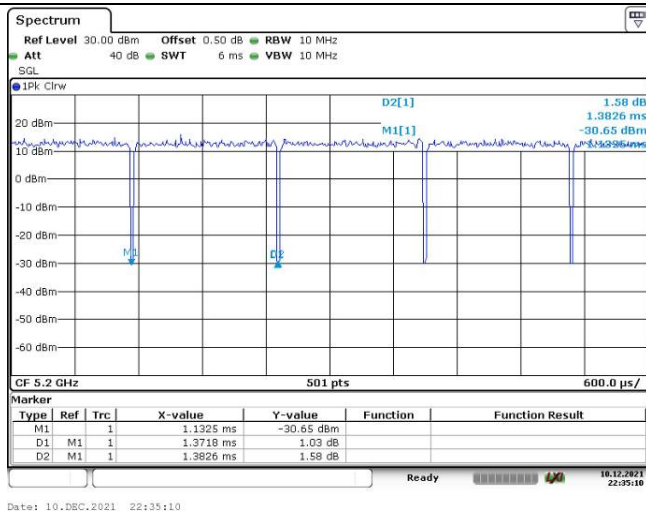
Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)
802.11a	1.476	1.482	99.60
802.11n ht20	1.372	1.382	99.28
802.11n ht40	0.689	0.705	97.73
802.11ac vht80	0.346	0.377	91.78

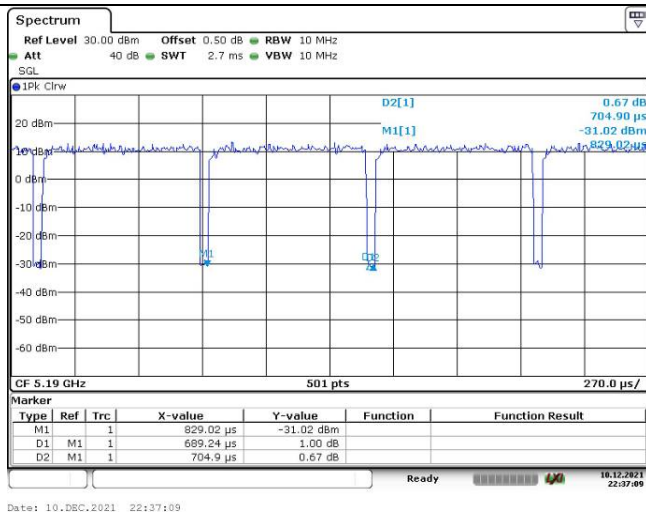
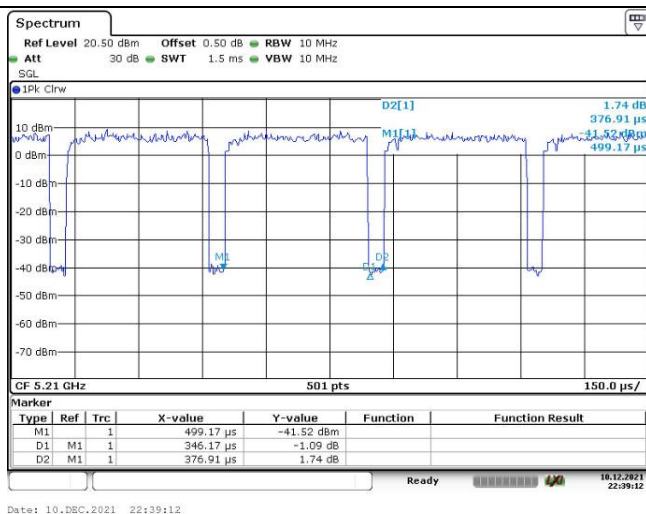


Duty Cycle

802.11n ht20



802.11n ht40

802.11ac vht80
Middle Channel

***** END OF REPORT *****