



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

Dates of Tests: October 18, 2016 ~ February 1, 2017
 Test Report S/N: LR500111702J
 Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.
 IC Application
 APPLICANT

CCECDL-3PBRBC
22254-CDL3PBRBC
COMMAX Co., Ltd.

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	DIGITAL DOOR LOCK
Manufacturer	:	COMMAX Co., Ltd.
Model name	:	CDL-3PBRBC
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247
		Subpart C ; ANSI C-63.4-2014 / ANDSI C-63.10-2013
		RSS-247 and Issue No.2 DATE : 2017
Frequency Range	:	2402 ~ 2480 MHz (Bluetooth)
Max. Output Power	:	Max -2.07 dBm – Conducted (Bluetooth)
Data of issue	:	February 1, 2017

This test report is issued under the authority of:

The test was supervised by:

Yong-Cheol, Wang / Manager

Hee-Cheon, Kwon / Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 6 dB BANDWIDTH&99% Bandwidth	-----	6
3.2.2 PEAK OUTPUT POWER	-----	10
3.2.3 POWER SPECTRAL DENSITY	-----	13
3.2.4 BAND EDGE	-----	16
3.2.5 CONDUCTED SPURIOUS EMISSIONS	-----	19
3.2.6 RADIATED SPURIOUS EMISSIONS	-----	22
 APPENDIX		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	68

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2017-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	610755	2017-04-21	FCC filing
FCC	U.S.A	649054	2017-04-13	FCC CAB
VCCI	JAPAN	R2133(10 m), C2307	2017-06-21	VCCI registration
VCCI	JAPAN	T-2009	2017-12-23	VCCI registration
VCCI	JAPAN	G-563	2018-12-13	VCCI registration
IC	CANADA	5799A-1	2019-11-07	IC filing
KOLAS	KOREA	NO.551	2017-01-08	KOLAS accredited Lab.

2. Information about test item

2-1 Client & Manufacturer

Company name : COMMAX Co., Ltd.
 Address : 513-11, Sangdaewon-Dong, Sungnam-si, Gyeonggi-do, South Korea
 Tel / Fax : TEL No : +82-31-739-3682 / FAX No : +82-31-739-3649

2-2 Equipment Under Test (EUT)

Model name : CDL-3PBRBC
 Serial number : Identical prototype
 Date of receipt : October 18, 2016
 EUT condition : Pre-production, not damaged
 Antenna type : Pattern Antenna: -2.73 dBi (Bluetooth)
 Frequency Range : 2402 ~ 2480 MHz (Bluetooth)
 RF output power : **Max -2.07 dBm – Conducted (Bluetooth)**
 Number of channels : 40 (Bluetooth)
 Type of Modulation : GFSK (Bluetooth)
 Power Source : 6.0 Vdc
 Firmware Version : V 1.0.0

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz) (Bluetooth module2)	2402	2442	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
NOTEBOOK	CR720	MS-1736	MSI

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth & 99 % Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Transmitter Peak Output Power	< 1 Watt		C
15.247(d)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	Emission	Radiated	C
15.207	AC Conducted Emissions	Emissions	Conducted	NA
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

→ Antenna Requirement

The COMMAX Co., Ltd. FCC ID: CCECDL-3PBRBC unit complies with the requirement of §15.203.

The antenna type is Pattern Antenna.

The sample was tested according to the following specification:

*FCC Parts 15.247; ANSI C-63.4-2014; ANSI C-63.10-2013

*FCC KDB Publication No. 558074 D01 v03r05

*FCC TCB Workshop 2012, April

*RSS-247 and Issue No.2 Date:2017

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth & 99 % Bandwidth

Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 5 MHz

VBW = 100 kHz (VBW $\geq$ RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data : **Complies**

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	99 % Bandwidth (MHz)
Bluetooth		
2402	0.767	1.17
2442	0.767	1.17
2480	0.760	1.30

- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth > 500 kHz

Measurement Setup



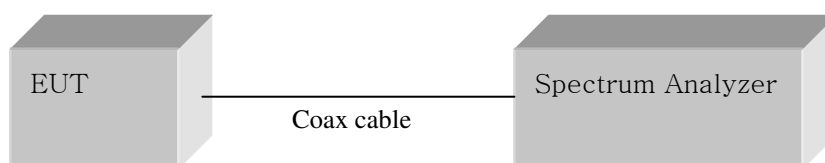


Figure 1: Measurement setup for the carrier frequency separation


Low Channel (Bluetooth)

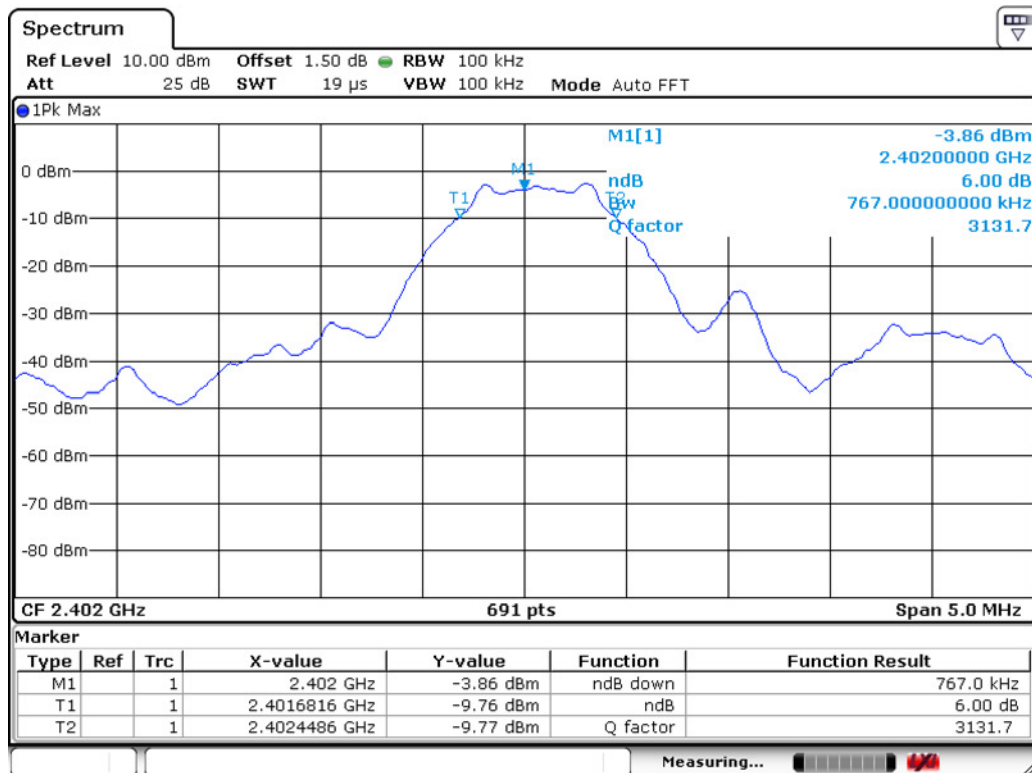


99% Bandwidth

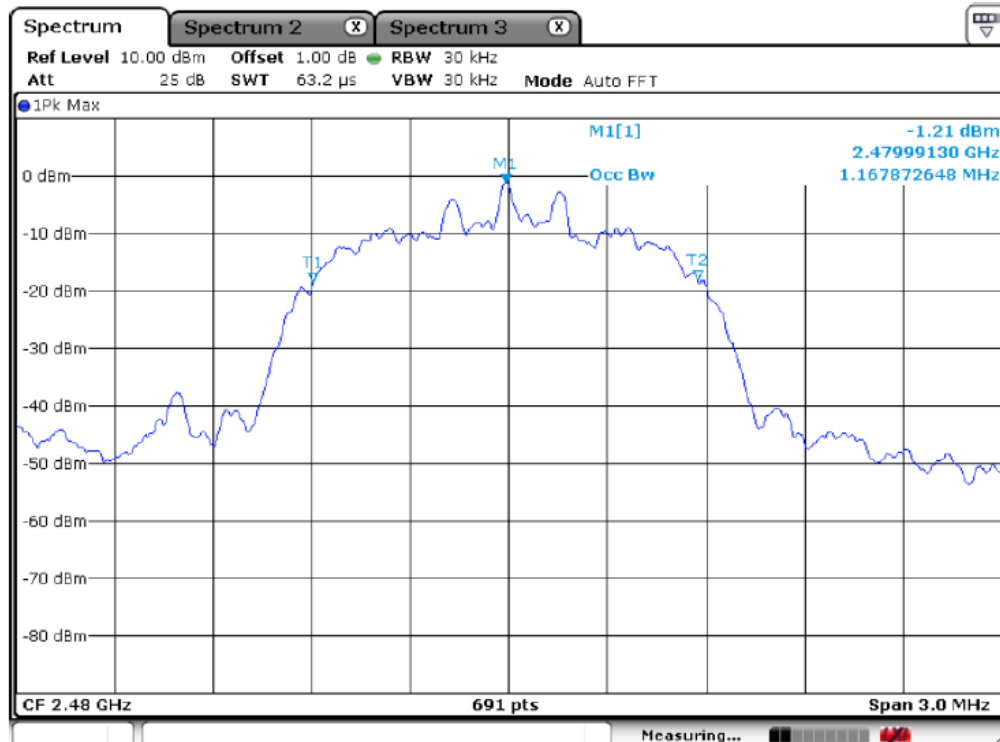


Middle Channel (Bluetooth)

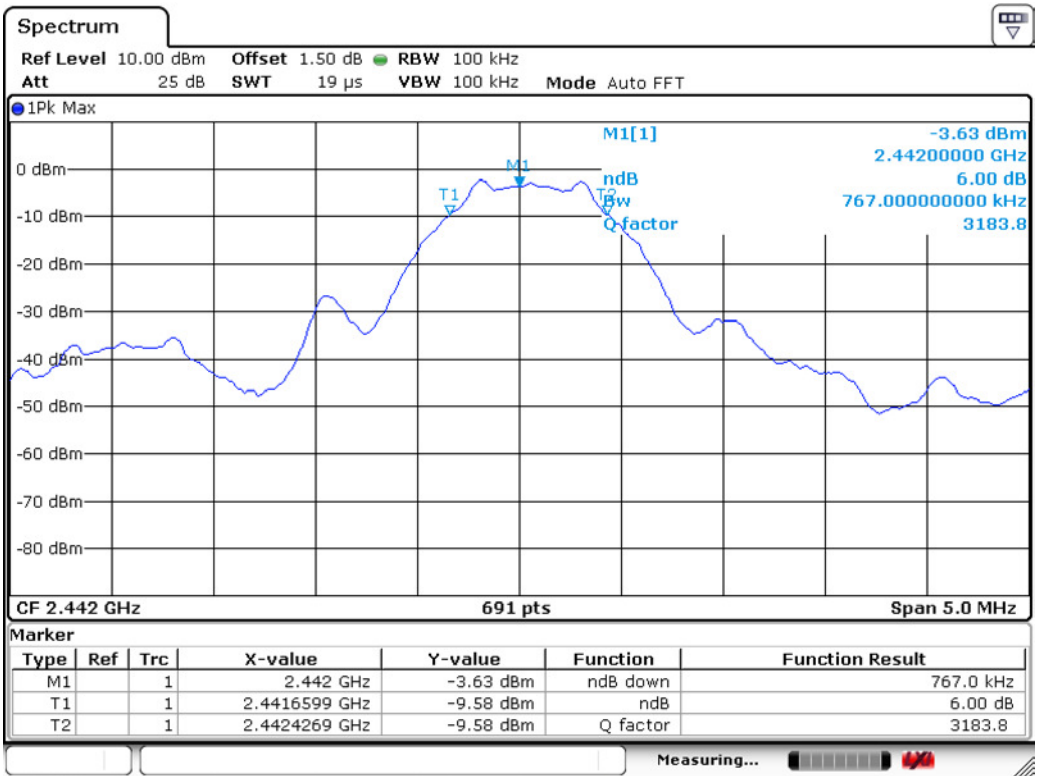


99% Bandwidth

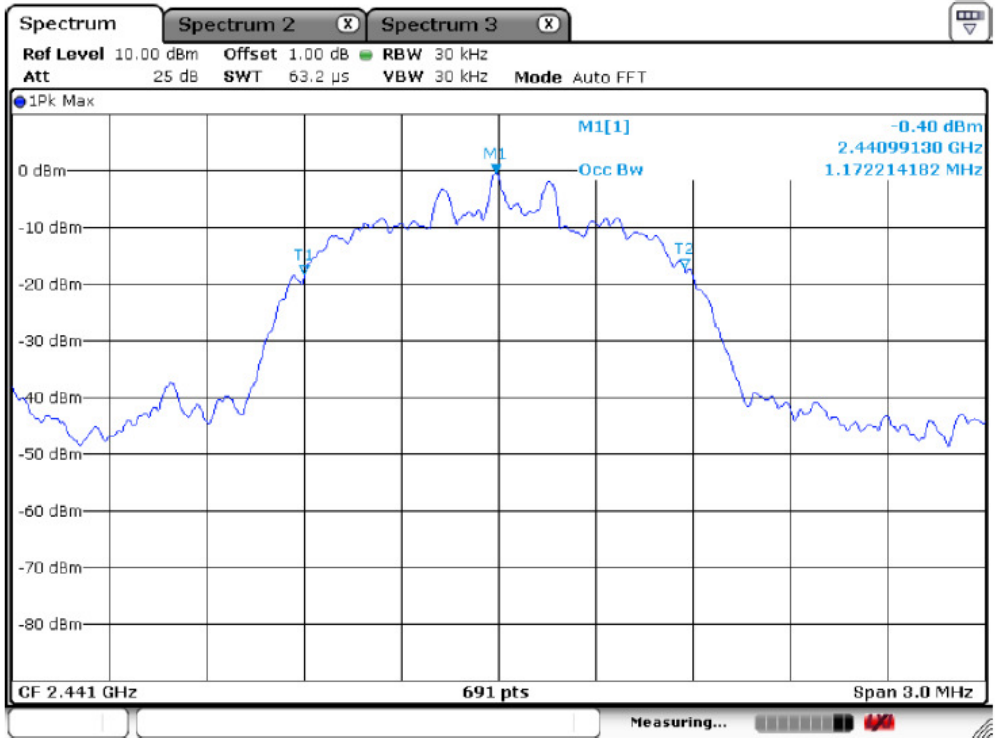

High Channel (Bluetooth)

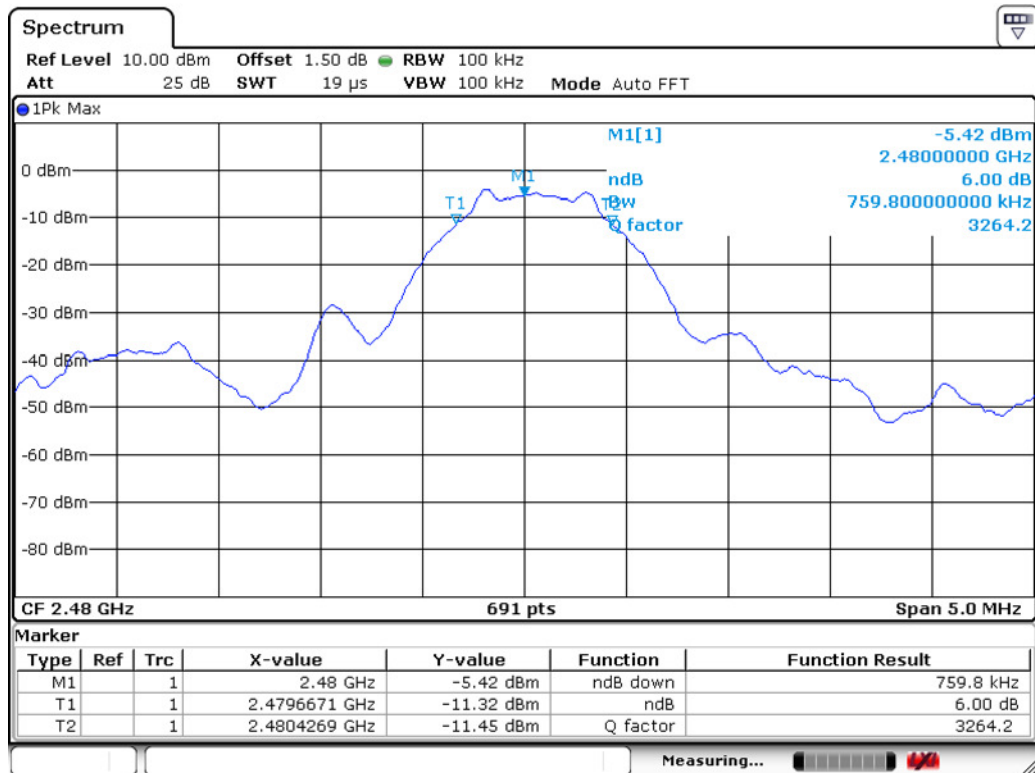

99% Bandwidth

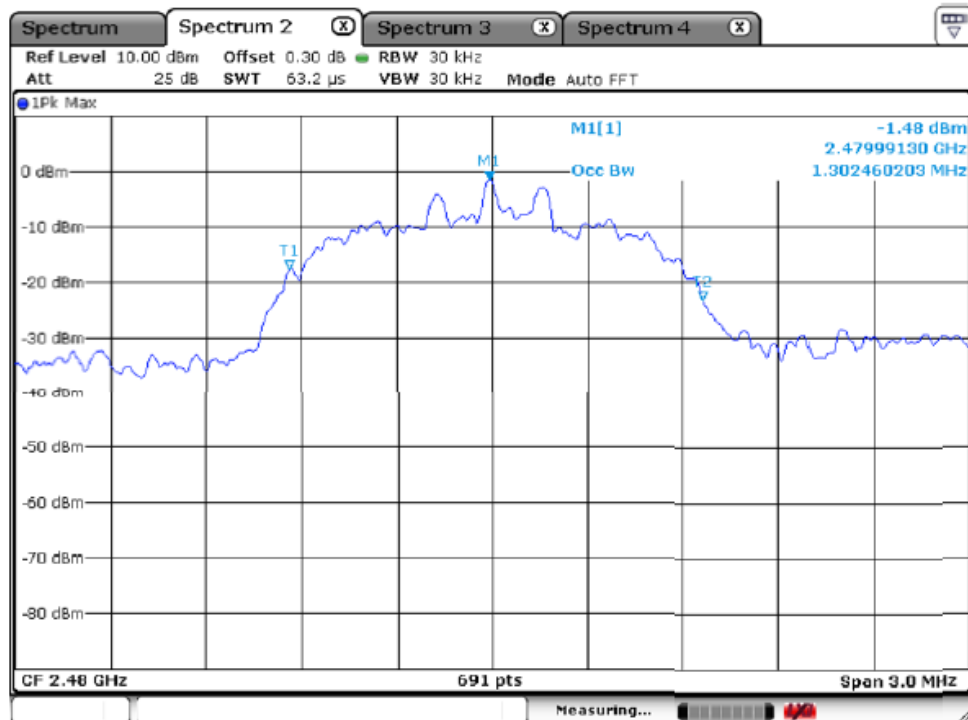

3.2.2 Peak Output Power Measurement

Procedure:

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99 % bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1 MHz

Span = auto

VBW = 1 MHz (VBW $\geq$ RBW)

Sweep = auto

Detector function = peak

Measurement Data : **Complies**

Frequency (MHz)	Test Results		
	dBm	mW	Result
Bluetooth			
2402	-2.13	0.61	Complies
2442	-2.07	0.62	Complies
2480	-3.94	0.40	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Peak output power	< 1 W
-------------------	-------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Low Channel (Bluetooth)

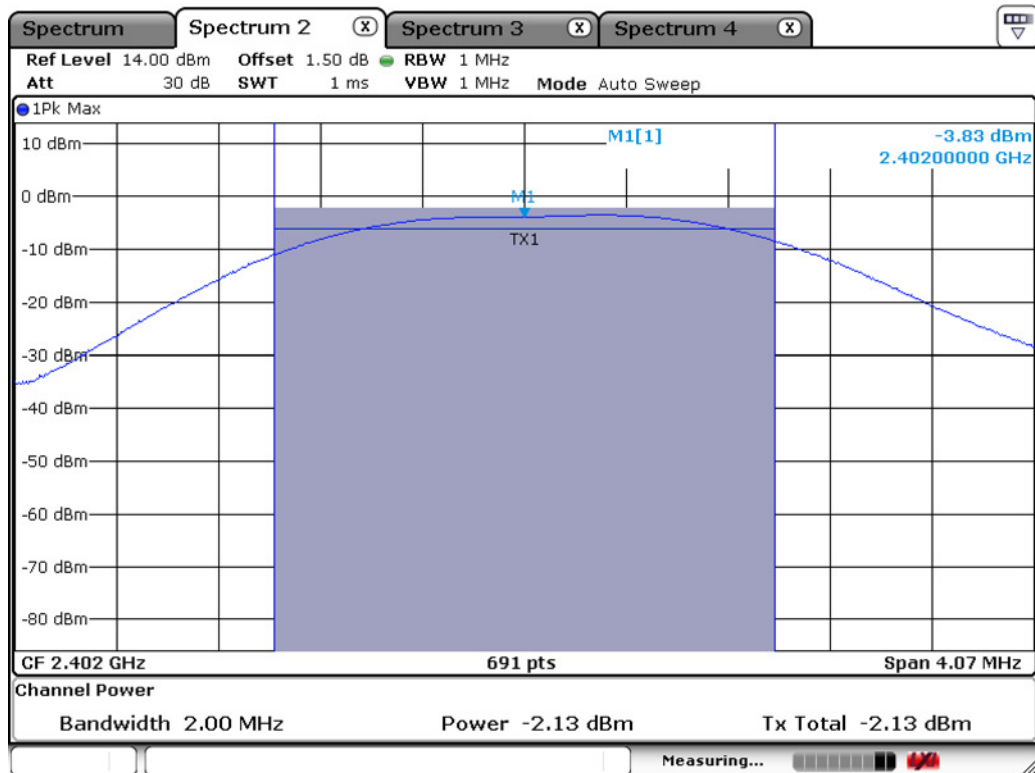

Middle Channel (Bluetooth)

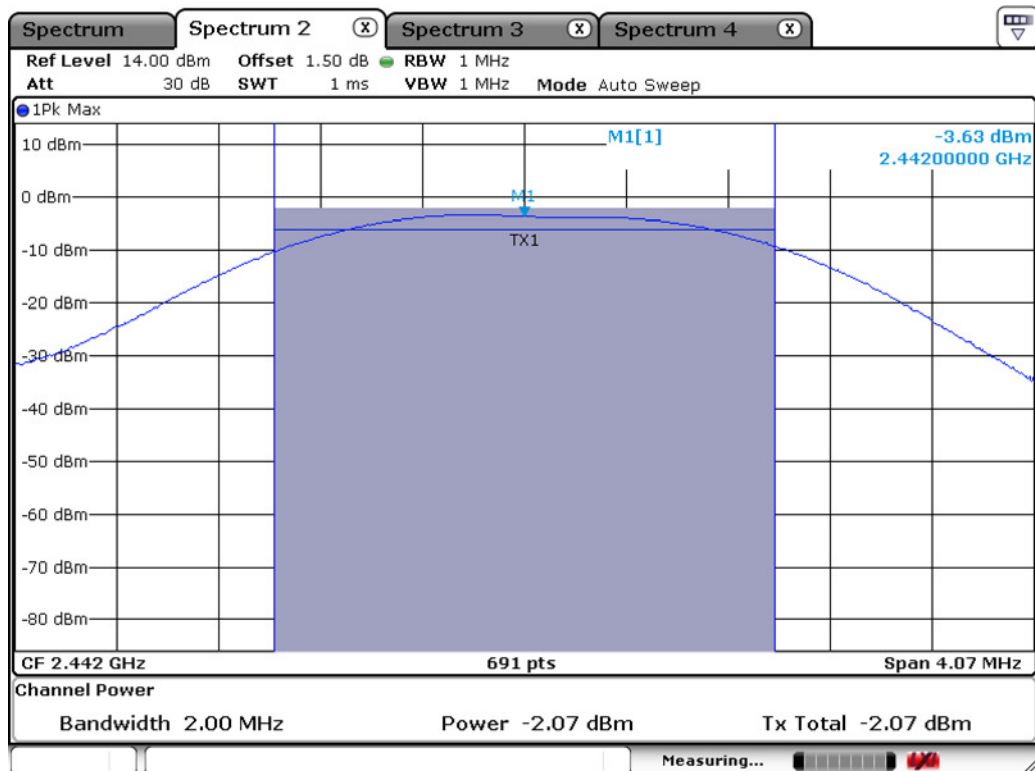

High Channel (Bluetooth)

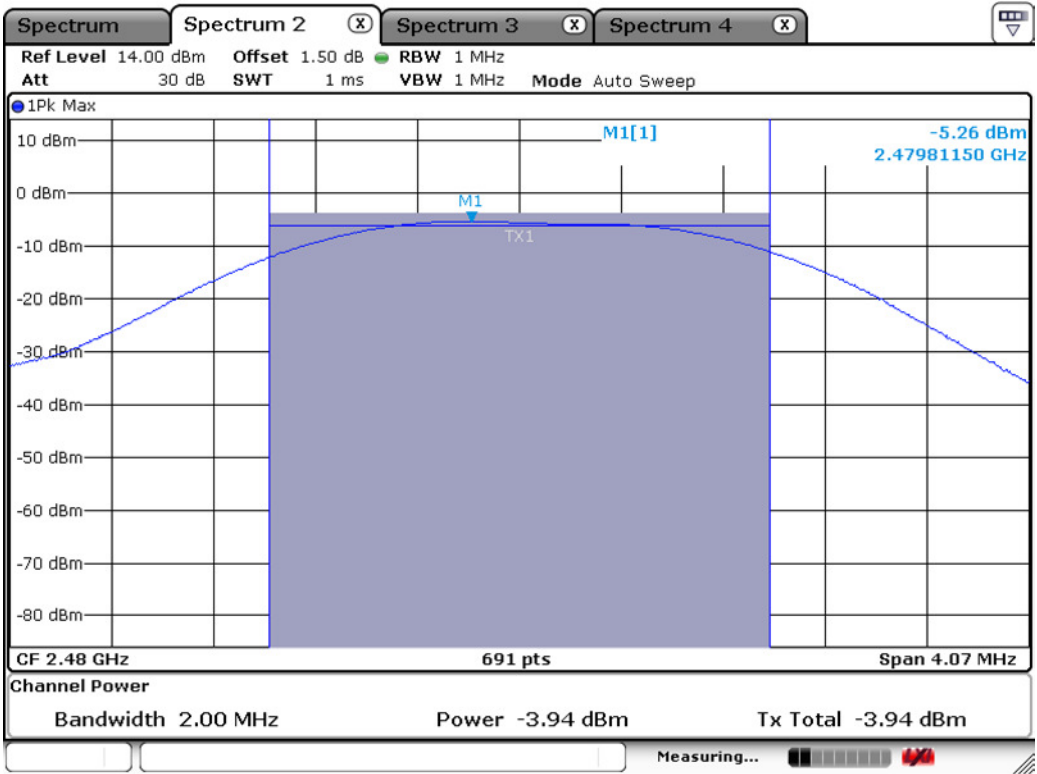

3.2.3 Power Spectral Density

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz

Span = 300 kHz

VBW = 3 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Measurement Data : **Complies**

Frequency (MHz)	Test Results	
	dBm / 3 kHz	Result
Bluetooth		
2402	-13.87	Complies
2442	-14.10	Complies
2480	-15.69	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Power Spectral Density	< 8 dBm @ 3 kHz BW
------------------------	--------------------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Power Density Measurement Low Channel (Bluetooth)

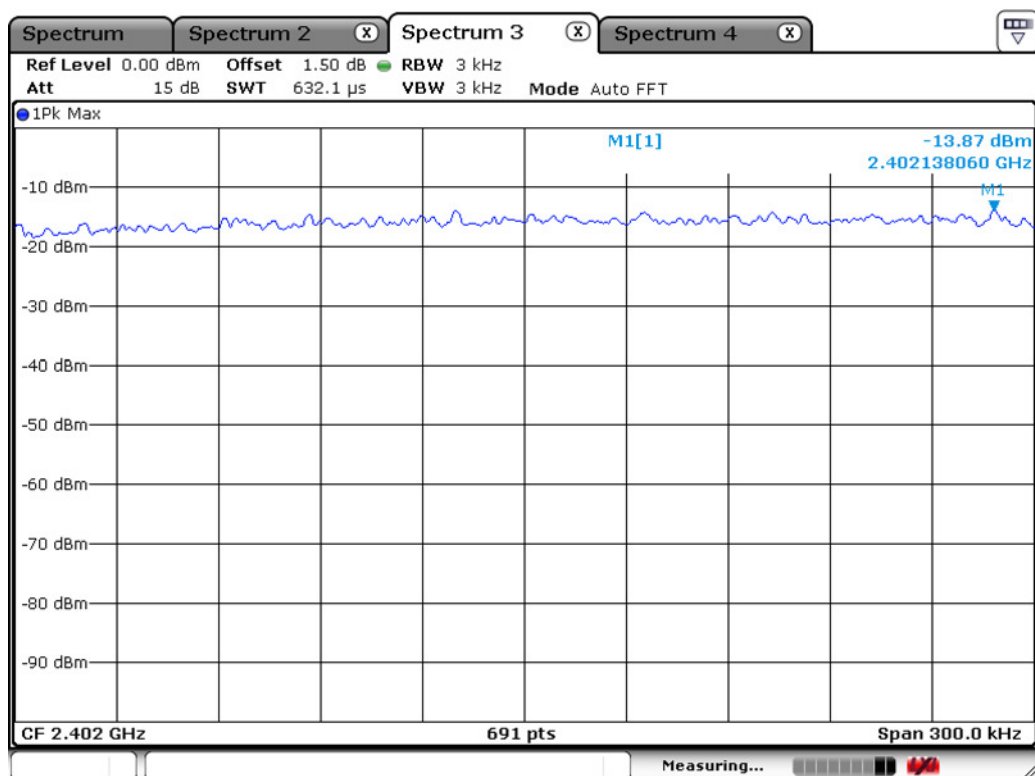

Middle Channel (Bluetooth)

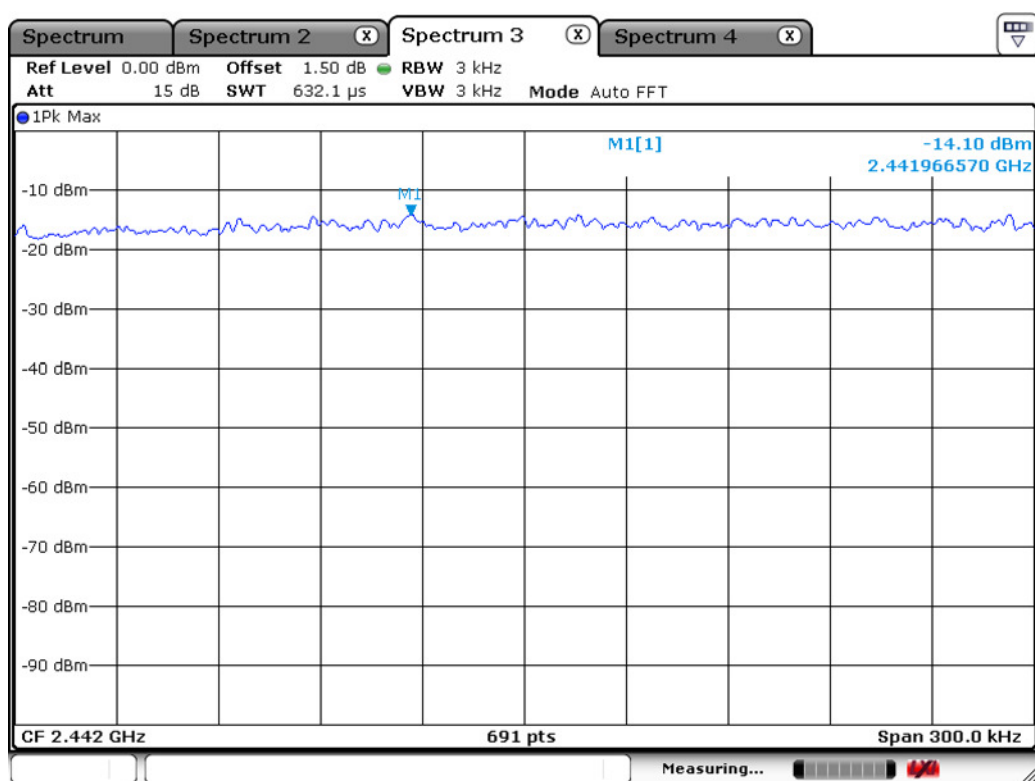

High Channel (Bluetooth)

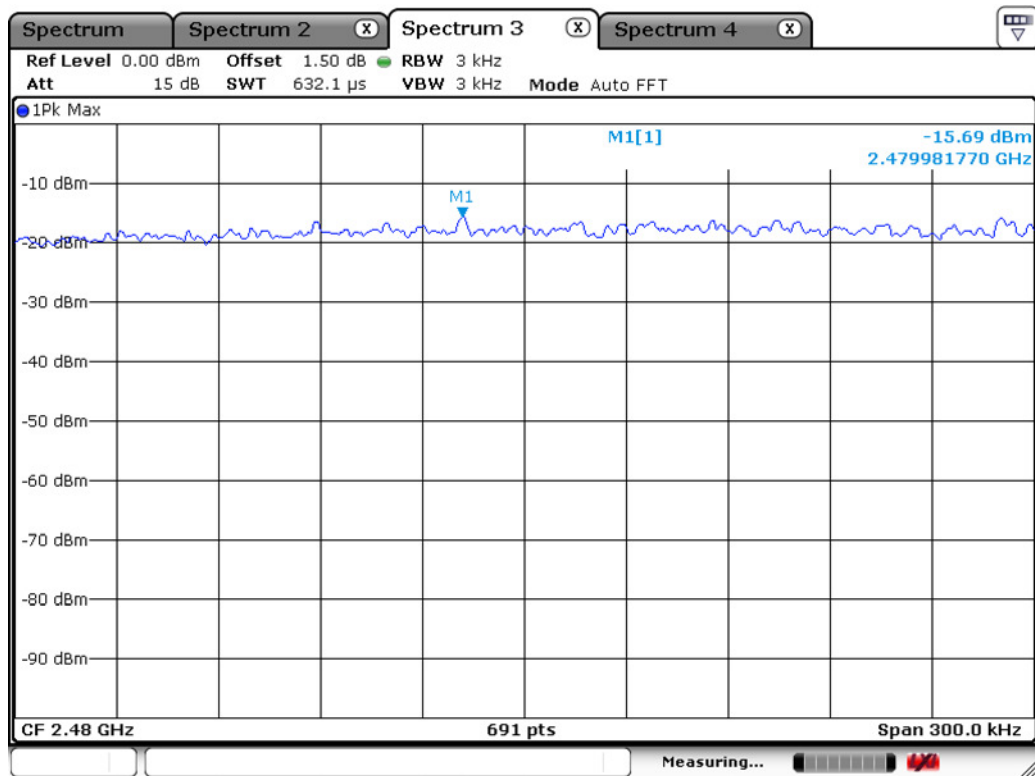

3.2.4 Band Edge

Procedure:

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 40 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Center frequency = the highest, the lowest channels

PEAK:

RBW = VBW = 1 MHz, Sweep=Auto

Average:

RBW = 1 MHz, VBW=10 Hz, Sweep=Auto

Measurement Distance:

3 m

Polarization:


Horizontal / Vertical

Measurement Data: Complies


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

Band edge Lower edge (Bluetooth)

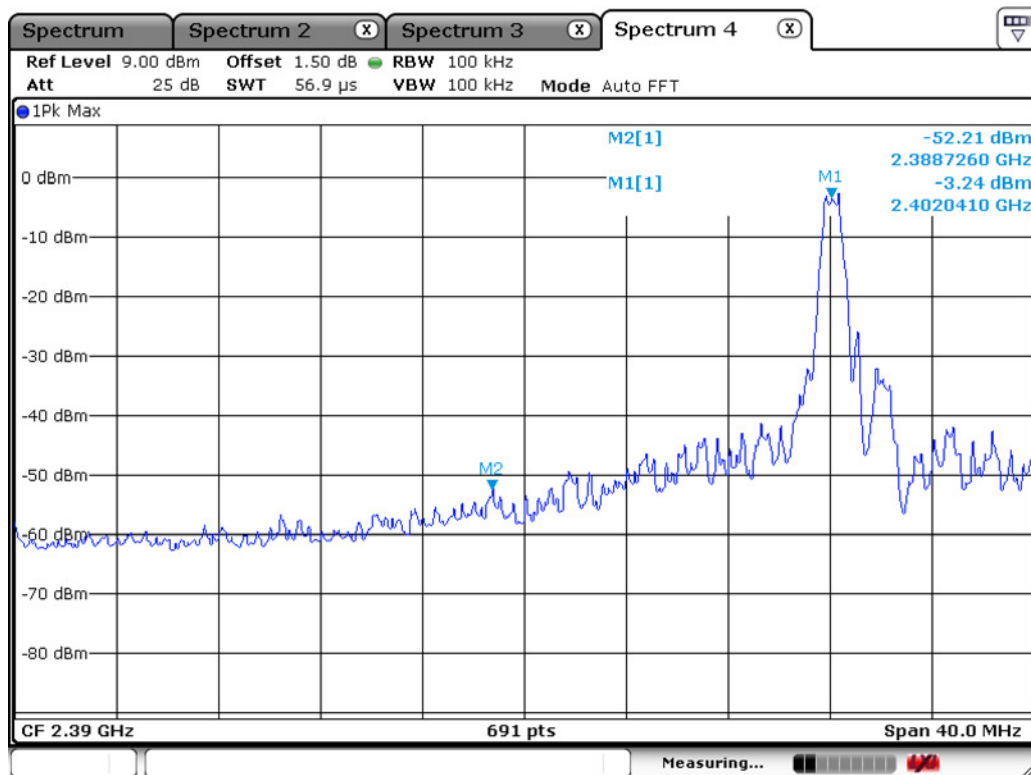

Upper edge (Bluetooth)

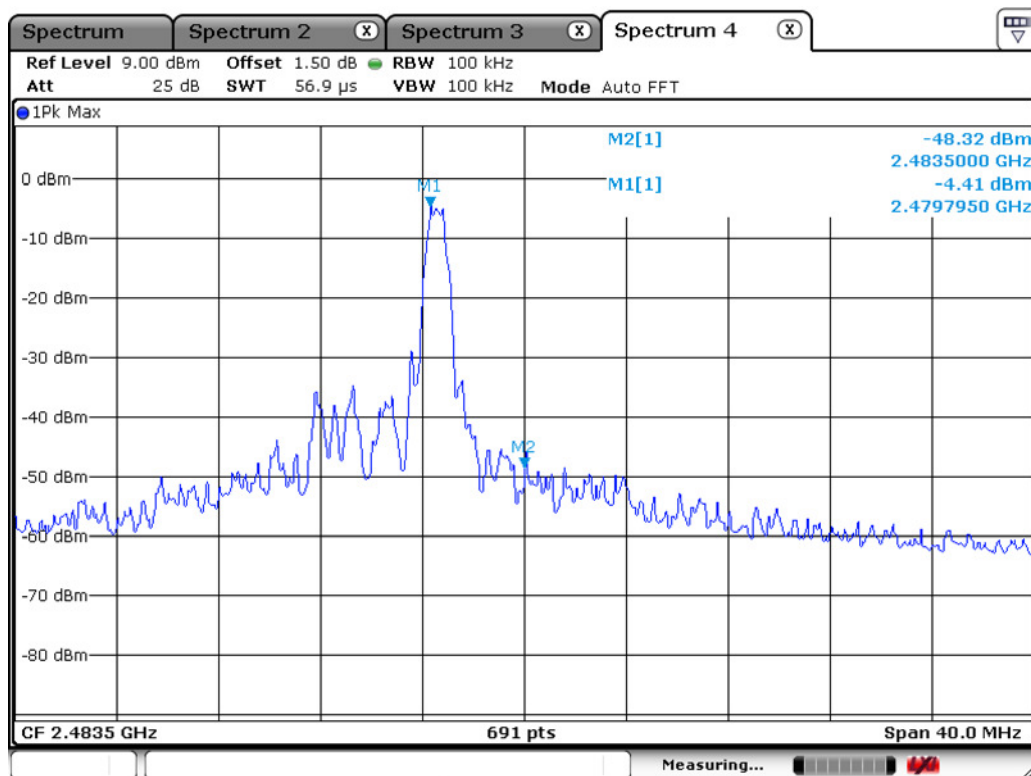

Radiated Band-edges in the restricted band 2310-2390 MHz measurement_ Bluetooth

Frequency [MHz]	Reading [dBuV/ m]		Pol.	Correction Factor		Limits [dBuV/ m]		Result [dBuV/ m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain + Cable Loss	AV / Peak	AV / Peak	AV / Peak	AV / Peak		
2390.0	27.1	35.3	H	27.9	22.9	54.0	74.0	32.1	40.3	21.9	33.7

Radiated Band-edges in the restricted band 2483.5-2500 MHz measurement_ Bluetooth

Frequency [MHz]	Reading [dBuV/ m]		Pol.	Correction Factor		Limits [dBuV/ m]		Result [dBuV/ m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain + Cable Loss	AV / Peak	AV / Peak	AV / Peak			
2483.5	26.7	34.8	H	27.9	22.9	54.0	74.0	31.7	39.8	22.3	34.2

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented

3.2.5 Conducted Spurious Emissions

Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold



Measurement Data: **Complies**

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


Minimum Standard:	> 20 dBc
--------------------------	----------

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

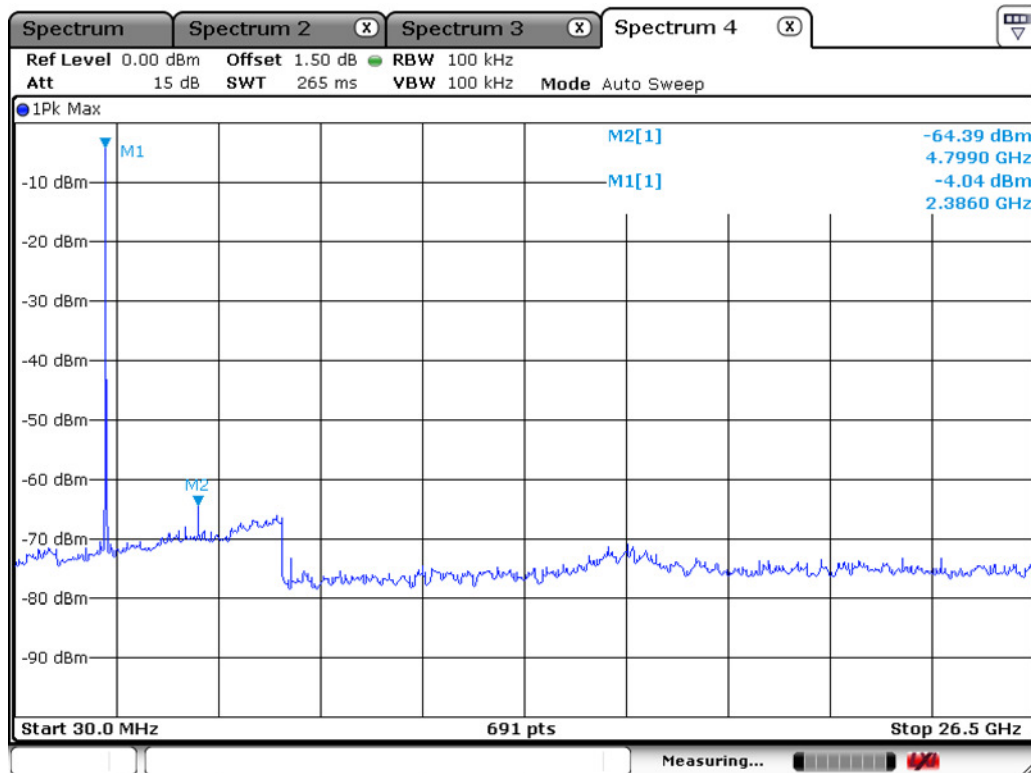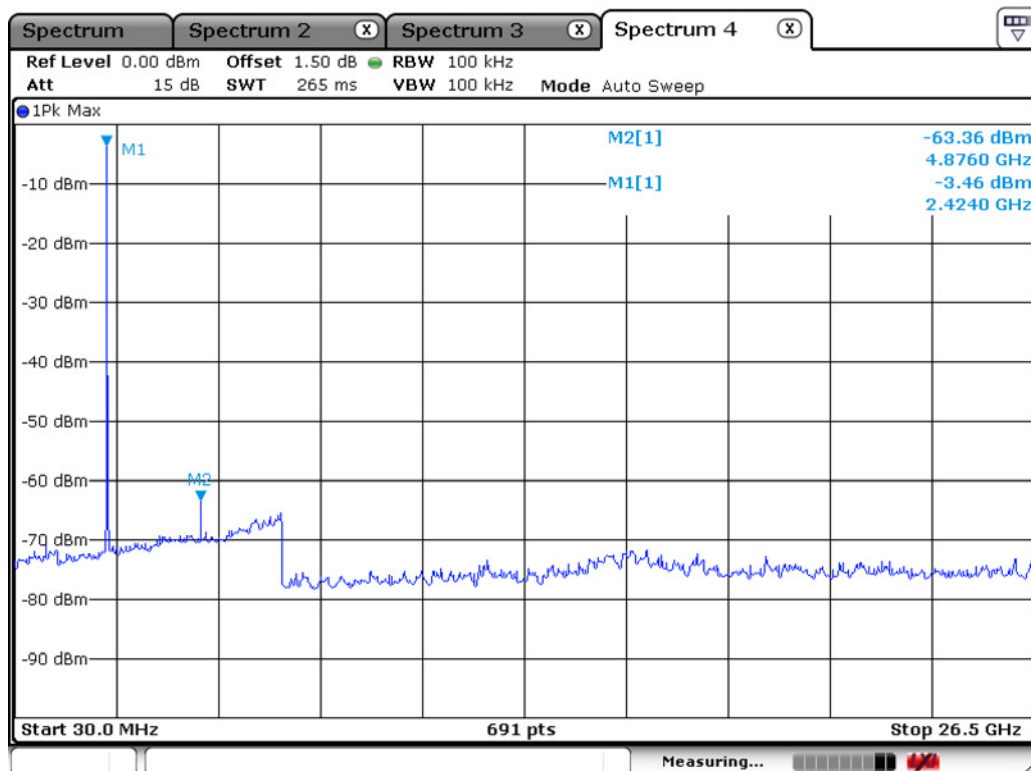Unwanted Emission – Low Channel (Bluetooth)**Frequency Range = 30 MHz ~ 26.5 GHz****Unwanted Emission – Middle Channel (Bluetooth)****Frequency Range = 30 MHz ~ 26.5 GHz**

Unwanted Emission – High Channel (Bluetooth)
Frequency Range = 30 MHz ~ 26.5 GHz

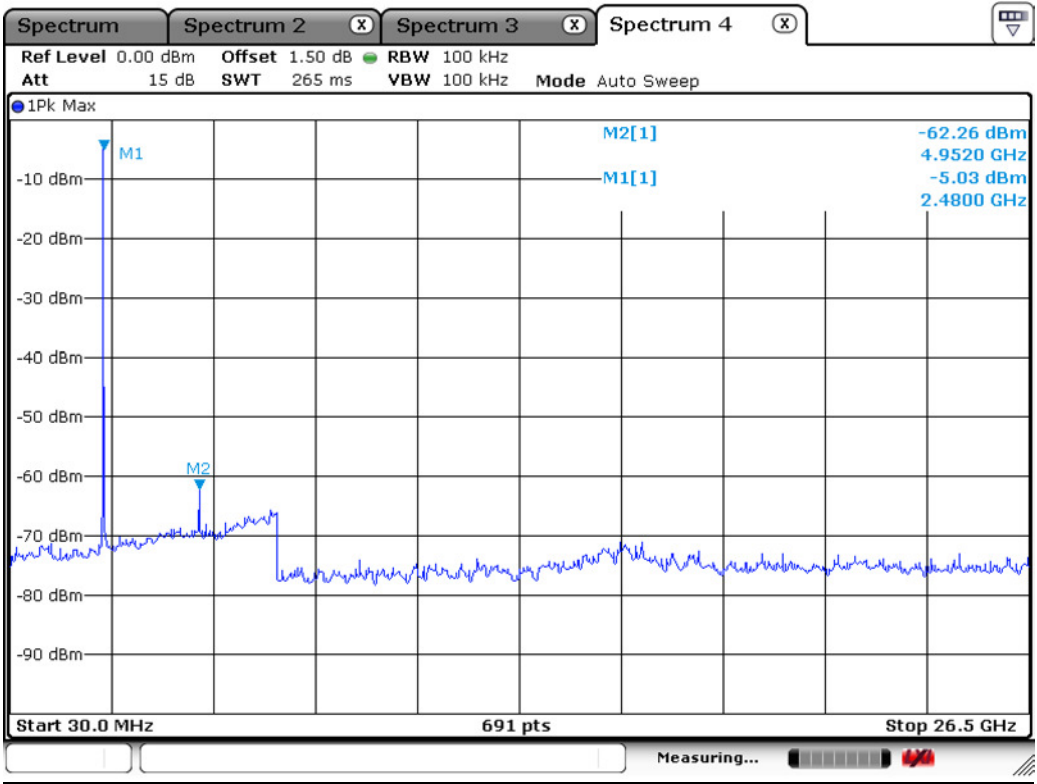

3.2.6 Radiated Spurious Emissions

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 100 kHz (30 MHz ~ 1 GHz)

VBW $\geq$ RBW

= 1 MHz (1 GHz ~ 10th harmonic)


Span = 100 MHz

Detector function = peak


Trace = max hold

Sweep = auto


below 30 MHz

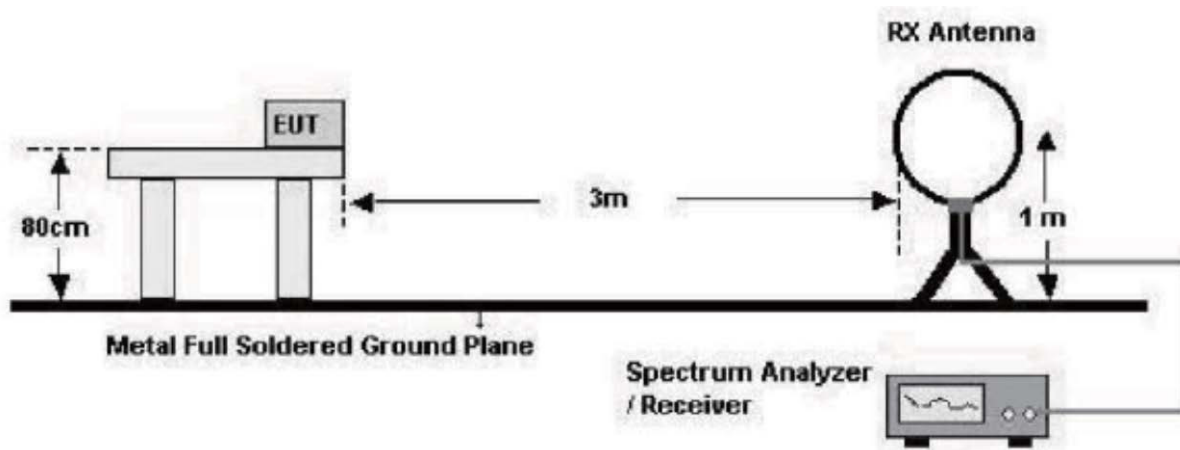

below 1 GHz (30 MHz to 1 GHz)

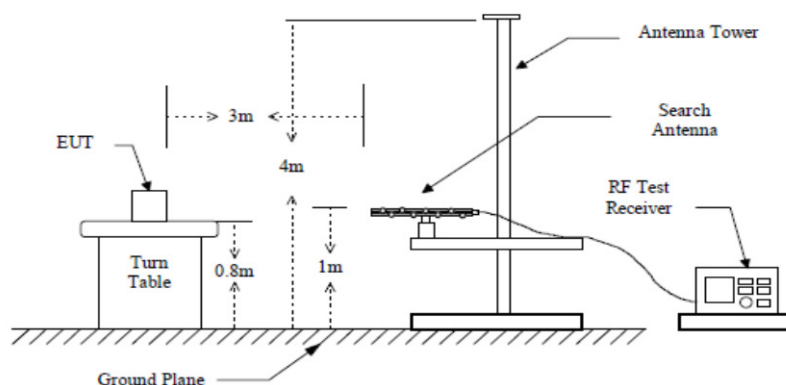

above 1 GHz

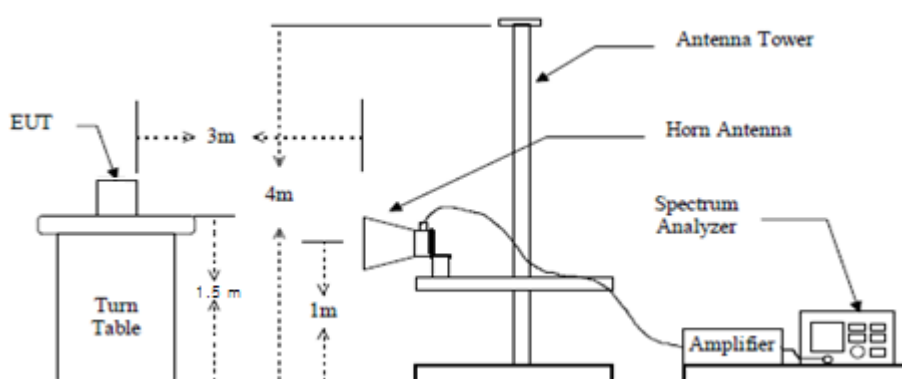

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30 MHz.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data : (Above 1 GHz) – Bluetooth

Frequency [MHz]	Reading [dBuV/ m] AV / Peak		Pol.	Correction Factor		Limits [dBuV/ m] AV/ Peak		Result [dBuV/ m] AV/ Peak		Margin [dB] AV / Peak	
				Antenna	Amp.Gain+ Cable						
7462.7	15.45	25.45	H	37.15	4.20	54.0	74.0	48.40	58.40	5.60	15.60
7511.5	15.51	25.51	H	37.18	3.64	54.0	74.0	49.05	59.05	4.95	14.95
7614.1	17.29	27.29	H	37.04	4.68	54.0	74.0	49.65	59.65	4.35	14.35

- No other emissions were detected at a level greater than 20 dB below limit.

Measurement Data : (9 kHz – 30 MHz)

Frequency [MHz]	Reading [dBuV/ m] AV / Peak		Pol.	Correction Factor		Limits [dBuV/ m] AV / Peak		Result [dBuV/ m] AV / Peak		Margin [dB] AV / Peak	
				Antenna	Amp.Gain+ Cable						
-	-	-	-	-	-	-	-	-	-	-	-
No emissions were detected at a level greater than 20 dB below limit.											
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

*No emissions were detected at a level greater than 20 dB below limit.

Radiated Emissions (Below 1 GHz) – 2.4GHz Bluetooth mode (LOW)

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: CDL-3PBR

TEST MODE: Bluetooth LOW mode


Temp Humi : 0 / 50

Tested by: BANG Y H

Data: 294

Level (dBuV/m)

Date: 2016-12-28

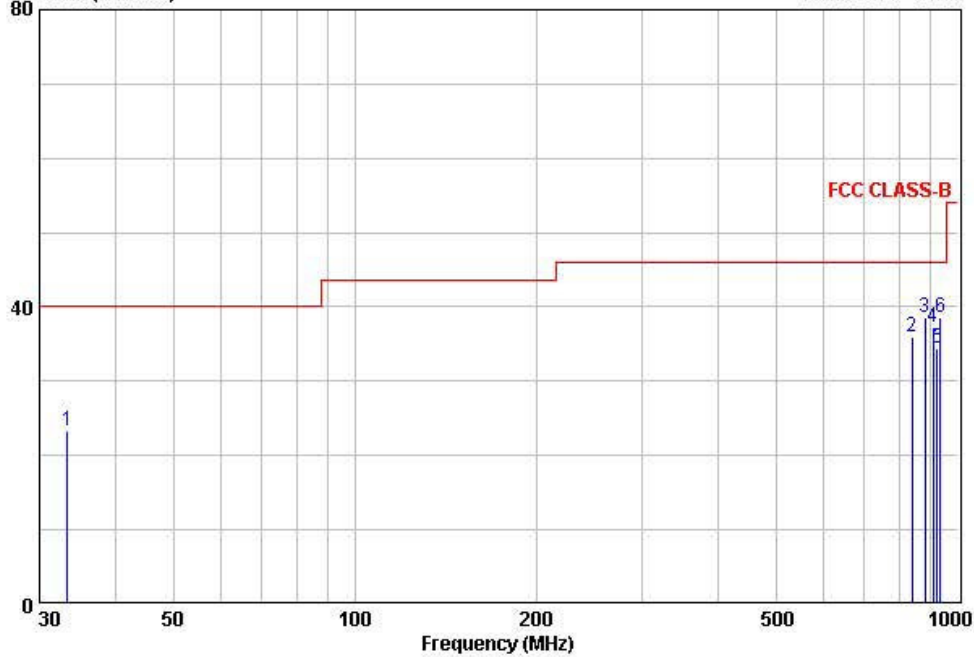

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV	dB	dBuV/m	QP dBuV/m	dB	cm	deg	
1	33.40	42.10	-18.83	23.27	40.00	16.73	100	124	VERTICAL
2	839.40	36.10	-0.14	35.96	46.00	10.04	344	189	HORIZONTAL
3	881.65	37.90	0.70	38.60	46.00	7.40	314	11	HORIZONTAL
4	910.41	35.90	1.28	37.18	46.00	8.82	300	84	HORIZONTAL
5	924.50	32.80	1.55	34.35	46.00	11.65	199	65	HORIZONTAL
6	935.10	36.80	1.76	38.56	46.00	7.44	317	84	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions (Below 1 GHz) – 2.4GHz Bluetooth mode (MID)

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: CDL-3PER

TEST MODE: Bluetooth mid mode


Temp Humi : 0 / 50

Tested by: BANG Y H

Data: 295

Level (dBuV/m)

Date: 2016-12-28

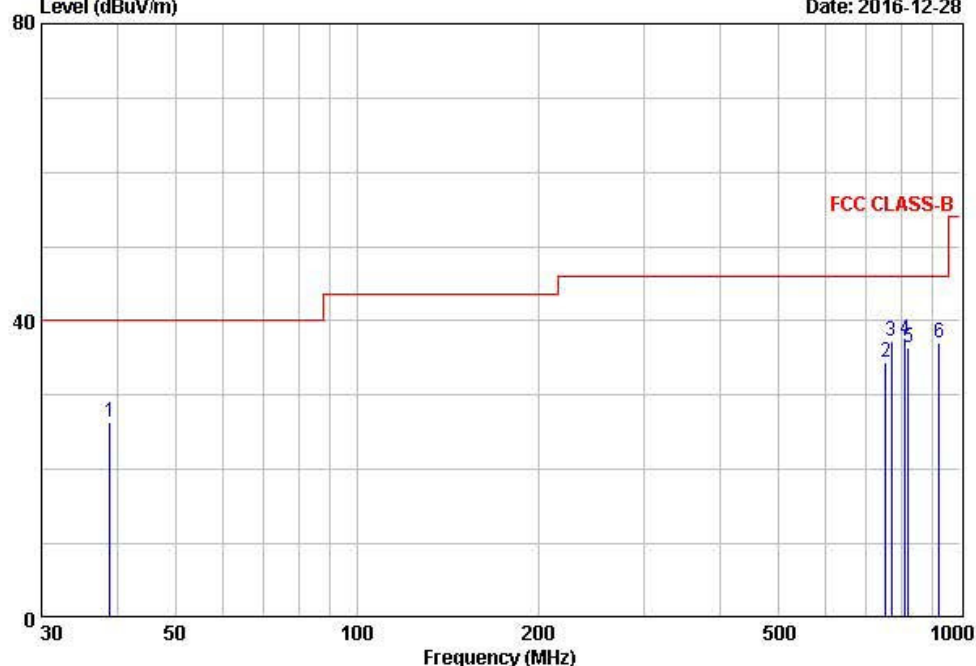

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV	dB	dBuV/m	QP dBuV/m	dB	cm	deg	
1	38.90	44.50	-18.23	26.27	40.00	13.73	100	188	VERTICAL
2	754.10	36.10	-1.67	34.43	46.00	11.57	318	54	HORIZONTAL
3	768.90	38.60	-1.41	37.19	46.00	8.81	311	184	HORIZONTAL
4	810.40	38.10	-0.69	37.41	46.00	8.59	304	8	HORIZONTAL
5	821.40	36.80	-0.48	36.32	46.00	9.68	400	84	HORIZONTAL
6	924.10	35.60	1.55	37.15	46.00	8.85	311	77	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions(Below 1 GHz) – 2.4GHz Bluetooth mode (HIGH)

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: CDL-3PBR

TEST MODE: Bluetooth mid mode


Temp Humi : 0 / 50

Tested by: BANG Y H

Data: 295

Level (dBuV/m)

Date: 2016-12-28

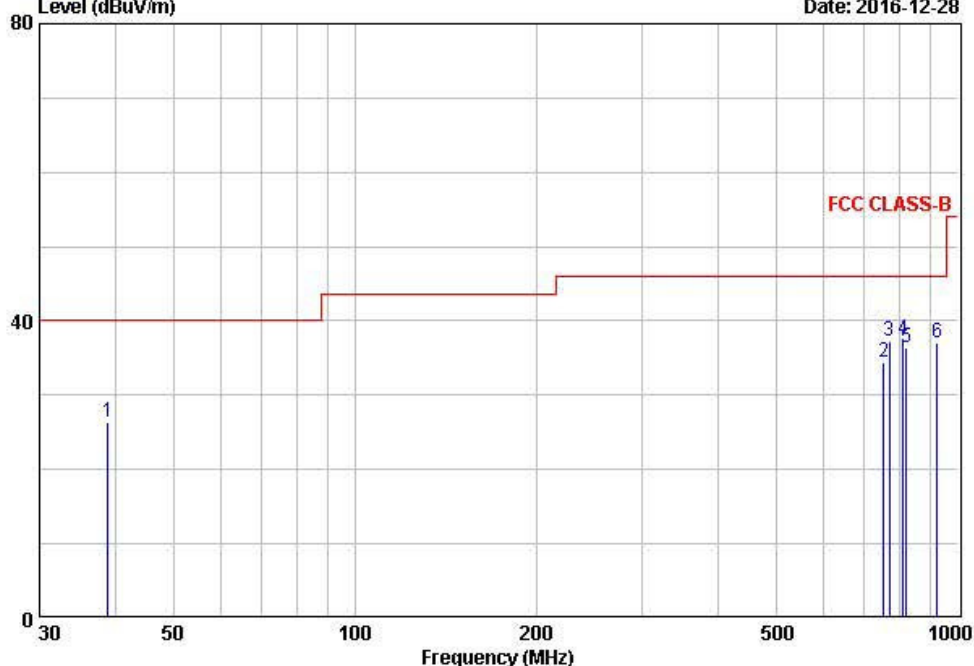

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV	dB	dBuV/m	QP dBuV/m	dB	cm	deg	
1	38.90	44.50	-18.23	26.27	40.00	13.73	100	188	VERTICAL
2	754.10	36.10	-1.67	34.43	46.00	11.57	318	54	HORIZONTAL
3	768.90	38.60	-1.41	37.19	46.00	8.81	311	184	HORIZONTAL
4	810.40	38.10	-0.69	37.41	46.00	8.59	304	8	HORIZONTAL
5	821.40	36.80	-0.48	36.32	46.00	9.68	400	84	HORIZONTAL
6	924.10	35.60	1.55	37.15	46.00	8.85	311	77	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions (Above 1 GHz) – 2.4GHz Bluetooth mode (LOW)

EMI Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010


EUT/Model No. : CDL-3PBR

Test Mode: Bluetooth LOW mode

Tested by : BANG Y H

Temp/Humi: 19 / 43

Data: 136 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1612-1.EMI (144)
Level (dBuV/m) Date: 2016-12-27 Time: 18:28:11

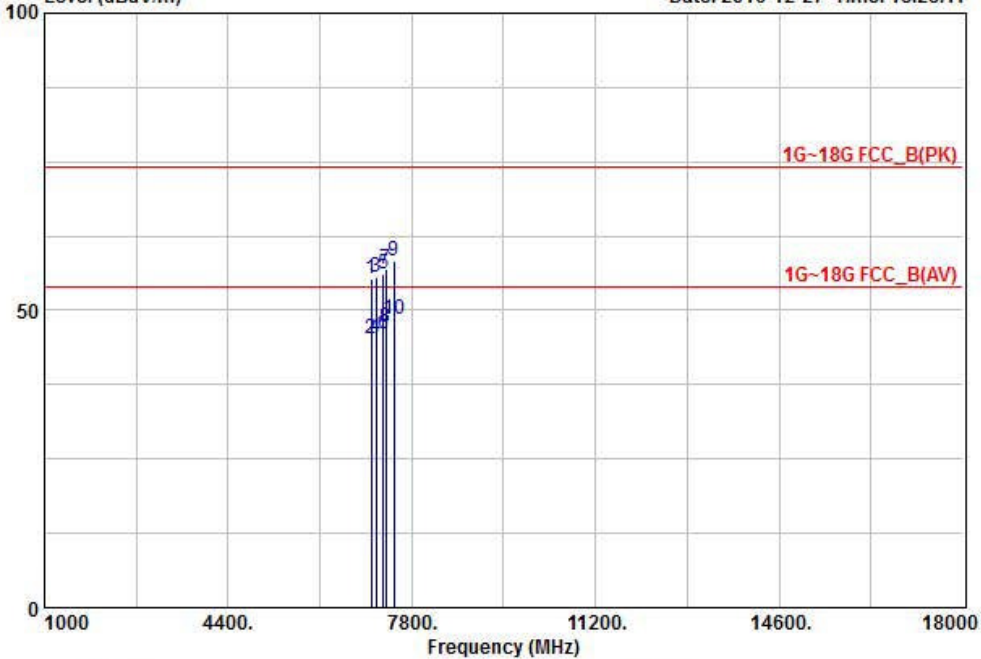

	Freq	Reading	C.F	Result	Limit	Margin	Polarity
	MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1	7054.12	33.40	21.83	55.23	74.00	18.77	HORIZONTAL
2	7054.12	23.40	21.83	45.23	54.00	8.77	HORIZONTAL
3	7146.12	32.80	22.84	55.64	74.00	18.36	HORIZONTAL
4	7146.12	22.80	22.84	45.64	54.00	8.36	HORIZONTAL
5	7266.50	31.90	24.15	56.05	74.00	17.95	HORIZONTAL
6	7266.50	21.90	24.15	46.05	54.00	7.95	HORIZONTAL
7	7314.65	32.40	24.68	57.08	74.00	16.92	HORIZONTAL
8	7314.65	22.40	24.68	47.08	54.00	6.92	HORIZONTAL
9	7462.65	32.10	26.30	58.40	74.00	15.60	HORIZONTAL
10	7462.65	22.10	26.30	48.40	54.00	5.60	HORIZONTAL


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal



EMI I Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010

EUT/Model No. : CDL-3PBR
Test Mode: Bluetooth LOW mode
Tested by : BANG Y H
Temp/Humi: 19 / 43

Data: 137 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1612-1.EMI (137)
Level (dBuV/m) Date: 2016-12-27 Time: 18:30:14

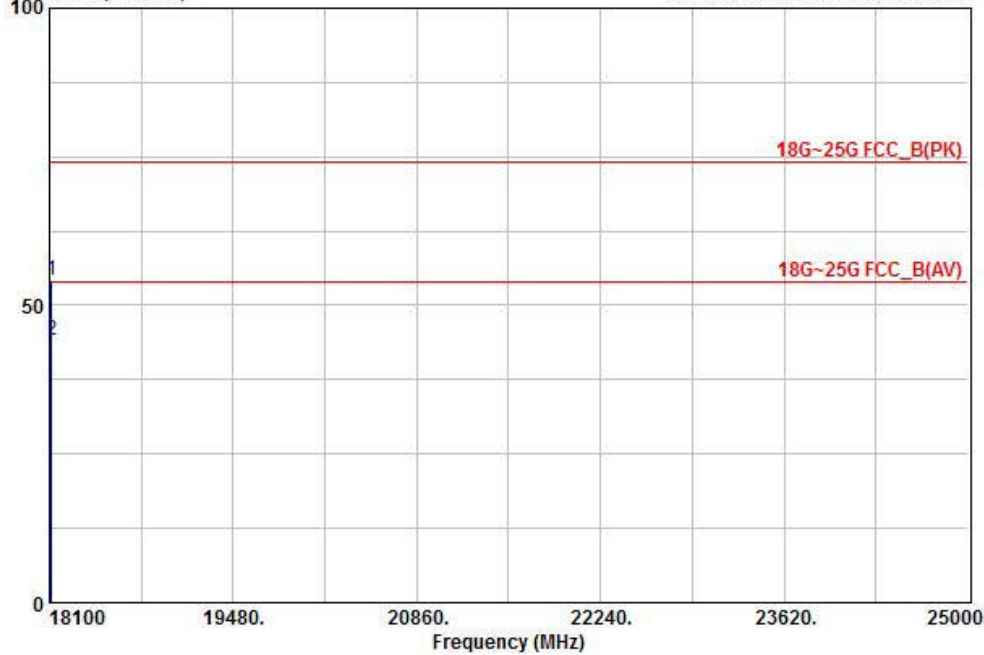

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
118112.40	41.10	13.11	54.21	74.00	19.79	HORIZONTAL
218112.40	31.10	13.11	44.21	54.00	9.79	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

Radiated Emissions (Above 1 GHz) – 2.4GHz Bluetooth mode (MID)

EMI Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010


EUT/Model No. : CDL-3PBR

Test Mode: Bluetooth mid mode

Tested by : BANG Y H

Temp/Humi: 19 / 43

Data: 138 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1612-1.EMI (144)
Level (dBuV/m) Date: 2016-12-27 Time: 11:11:34

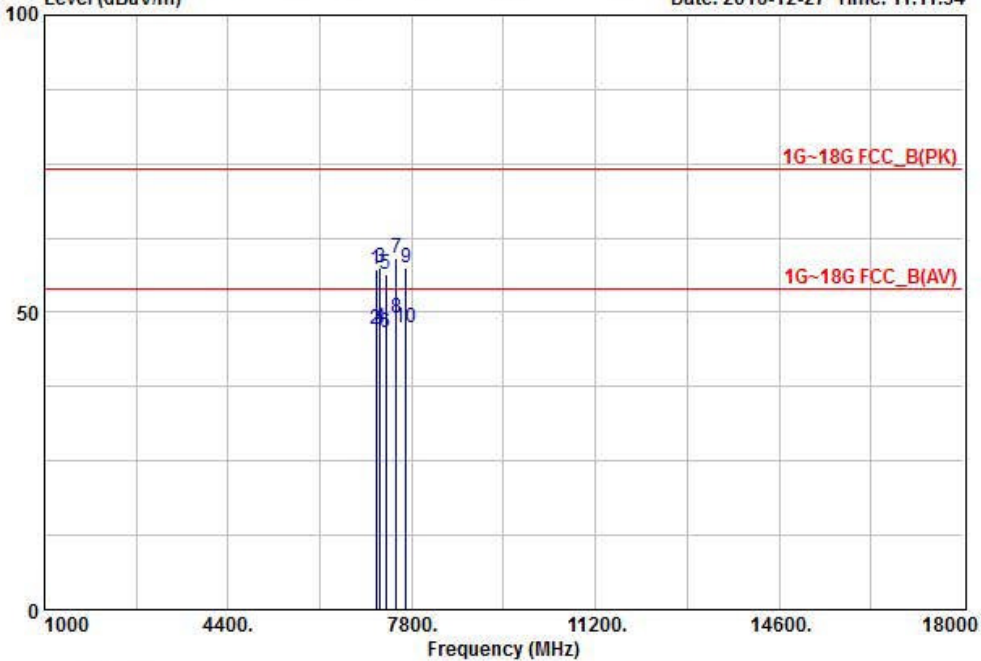

	Freq	Reading	C.F	Result	Limit	Margin	Polarity
	MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1	7144.56	34.40	22.82	57.22	74.00	16.78	HORIZONTAL
2	7144.56	24.40	22.82	47.22	54.00	6.78	HORIZONTAL
3	7216.45	33.80	23.61	57.41	74.00	16.59	HORIZONTAL
4	7216.45	23.80	23.61	47.41	54.00	6.59	HORIZONTAL
5	7318.99	31.80	24.73	56.53	74.00	17.47	HORIZONTAL
6	7318.99	21.80	24.73	46.53	54.00	7.47	HORIZONTAL
7	7511.45	32.40	26.65	59.05	74.00	14.95	HORIZONTAL
8	7511.45	22.40	26.65	49.05	54.00	4.95	HORIZONTAL
9	7695.54	31.80	25.75	57.55	74.00	16.45	HORIZONTAL
10	7695.54	21.80	25.75	47.55	54.00	6.45	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal



EMI I Chamber of LTA CO.,LTD.
 4, Songjuro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010


EUT/Model No. : CDL-3PBR

Test Mode: Bluetooth mid mode

Tested by : BANG Y H

Temp/Humi: 19 / 43

Data: 139 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1612-1.EMI (139)
 Level (dBuV/m) Date: 2016-12-27 Time: 11:14:33

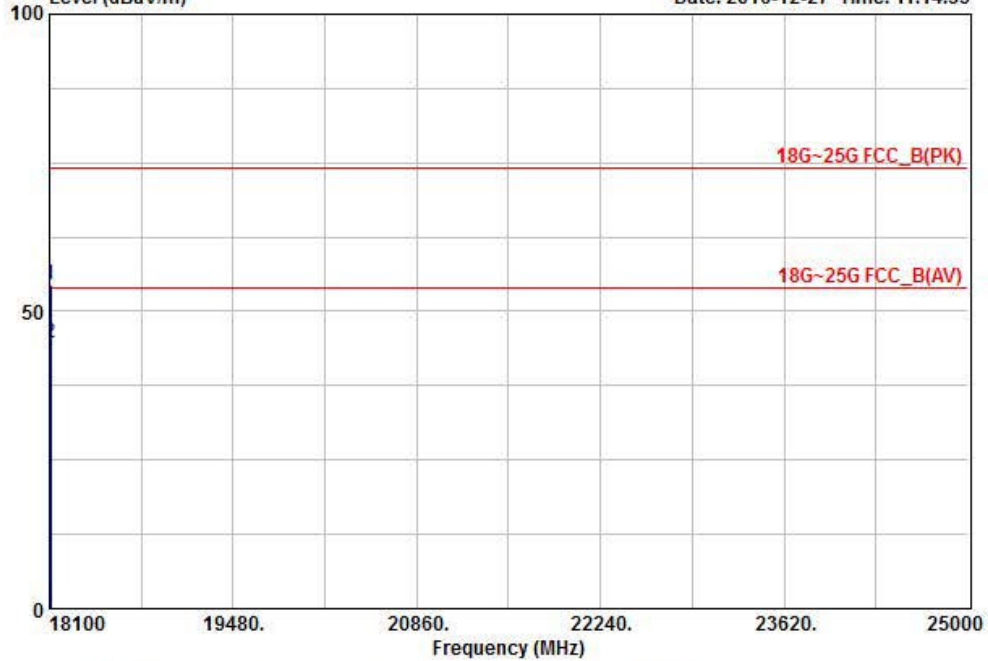

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
118111.40	41.50	13.11	54.61	74.00	19.39	HORIZONTAL
218111.40	31.50	13.11	44.61	54.00	9.39	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal

Radiated Emissions (Above 1 GHz) – 2.4GHz Bluetooth mode (HIGH)

EMI Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010


EUT/Model No. : CDL-3PBR

Test Mode: Bluetooth High mode

Tested by : BANG Y H

Temp/Humi: 19 / 43

Data: 140 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1612-1.EMI (144)
Level (dBuV/m) Date: 2016-12-27 Time: 10:23:12

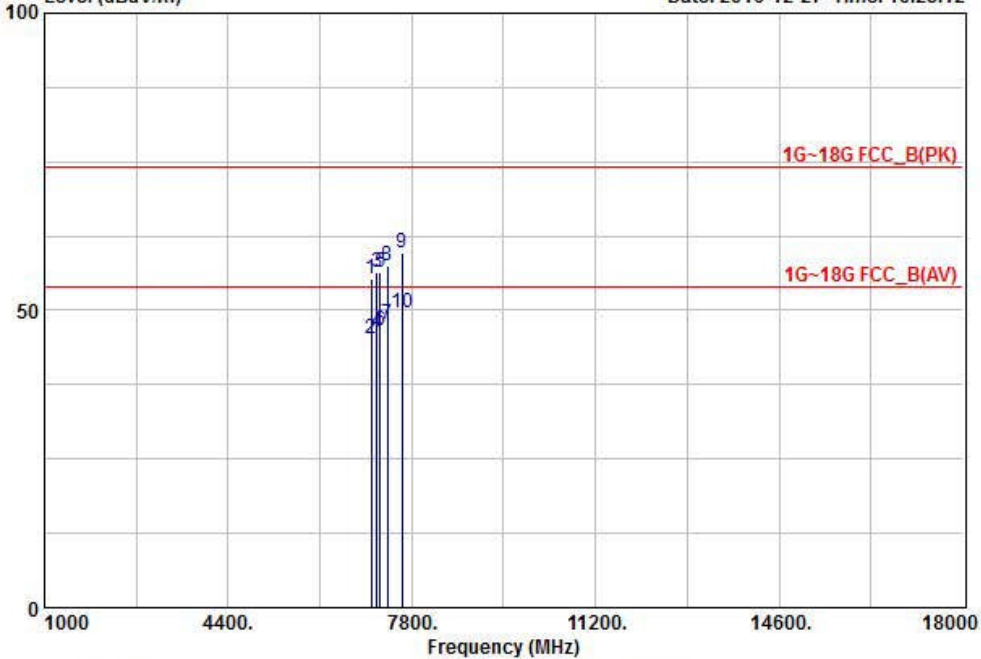

	Freq	Reading	C.F	Result	Limit	Margin	Polarity
	MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1	7054.84	33.40	21.84	55.24	74.00	18.76	HORIZONTAL
2	7054.84	23.40	21.84	45.24	54.00	8.76	HORIZONTAL
3	7154.40	33.50	22.93	56.43	74.00	17.57	HORIZONTAL
4	7154.40	23.50	22.93	46.43	54.00	7.57	HORIZONTAL
5	7215.40	32.90	23.60	56.50	74.00	17.50	HORIZONTAL
6	7215.40	22.90	23.60	46.50	54.00	7.50	HORIZONTAL
7	7354.90	22.50	25.12	47.62	54.00	6.38	HORIZONTAL
8	7354.90	32.50	25.12	57.62	74.00	16.38	HORIZONTAL
9	7614.12	33.50	26.15	59.65	74.00	14.35	HORIZONTAL
10	7614.12	23.50	26.15	49.65	54.00	4.35	HORIZONTAL


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal



EMI I Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010

EUT/Model No. : CDL-3PBR
Test Mode: BLE HIGH mode
Tested by : BANG Y H
Temp/Humi: 19 / 43

Data: 141 File: D:\LTA_e3\3_backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1612-1.EMI (141)
Level (dBuV/m) Date: 2016-12-27 Time: 10:26:32

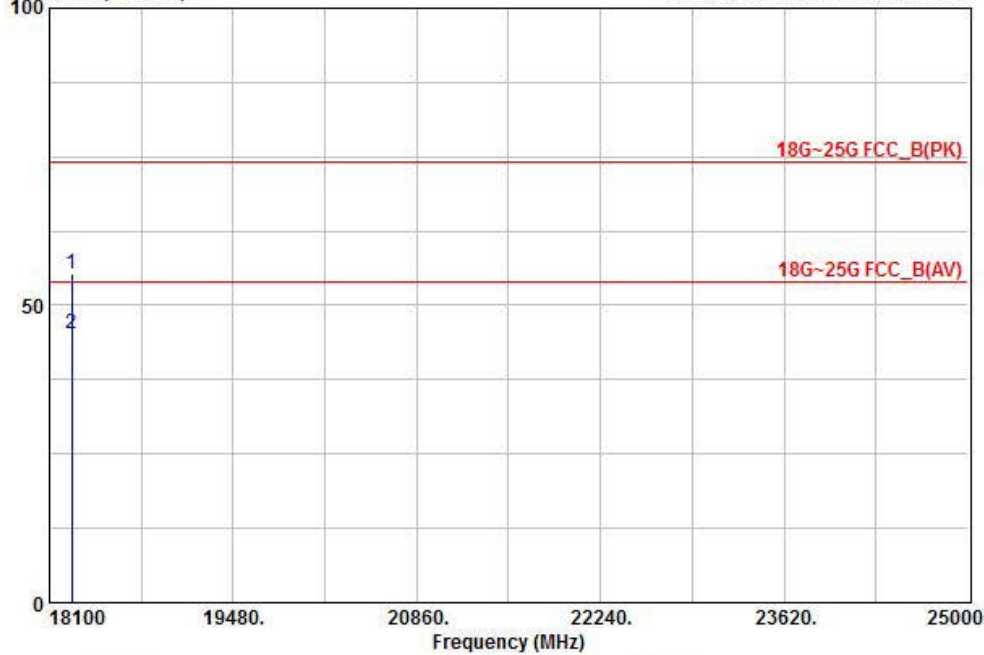

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
118264.40	42.10	13.22	55.32	74.00	18.68	HORIZONTAL
218264.40	32.10	13.22	45.32	54.00	8.68	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Signal Analyzer (9 kHz ~ 30 GHz)	FSV-30	100757	R&S	1 year	2016-03-22
2	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2016-03-21
3	SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2016-03-21
4	Attenuator (3 dB)	8491A	37822	HP	1 year	2016-09-12
5	Attenuator (10 dB)	8491A	63196	HP	1 year	2016-09-12
6	Test Receiver (~30 MHz)	ESHS10	828404/009	R&S	1 year	2016-03-21
7	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2016-09-12
8	RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2016-09-12
9	RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2016-03-21
10	Horn Antenna (1~18 GHz)	3115	00114105	ETS	1 year	2016-04-21
11	DRG Horn (Small)	3116B	81109	ETS-Lindgren	1 year	2016-05-03
12	DRG Horn (Small)	3116B	133350	ETS-Lindgren	1 year	2016-05-03
13	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2015-04-21
14	Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2016-03-22
15	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
16	Power Divider	11636A	06243	HP	1 year	2016-09-12
17	DC Power Supply	6674A	3637A01657	Agilent	-	-
18	Frequency Counter	5342A	2826A12411	HP	1 year	2016-03-21
19	Power Meter	EPM-441A	GB32481702	HP	1 year	2016-03-22
20	Power Sensor	8481A	3318A94972	HP	1 year	2016-12-31
21	Audio Analyzer	8903B	3729A18901	HP	1 year	2016-09-12
22	Modulation Analyzer	8901B	3749A05878	HP	1 year	2016-09-12
23	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2016-09-12
24	Stop Watch	HS-3	812Q08R	CASIO	2 year	2016-03-22
25	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2016-09-12
26	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2016-03-21
27	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2016-03-21
28	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2016-03-21
29	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2016-03-21
30	Active Loop Antenna	FMZB1519	1519-031	SCHWARZBECK	2 year	2016-01-12
31	OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2016-03-22
32	Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2016-03-22
33	Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2016-03-22