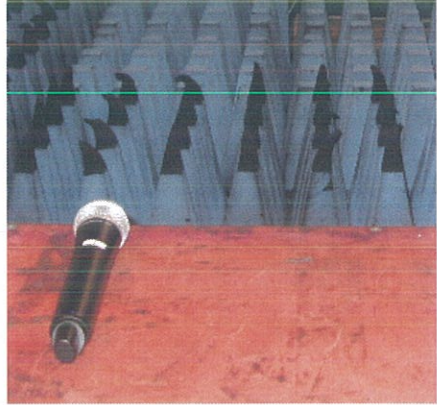



Prüfbericht-Nr.: <i>Test Report No.:</i>	16060045 001		Auftrags-Nr.: <i>Order No.:</i>	174020628	Seite 1 von 30 Page 1 of 30
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	352690		Auftragsdatum: <i>Order date.:</i>	30.Mar.2014	
Auftraggeber: <i>Client:</i>	Sam Ash Music Corporation 262 Duffy Avenue Hicksville, NY 11801 United States				
Prüfgegenstand: <i>Test item:</i>	USB Digital Wireless System				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	Stage HXD1	FCC ID: <i>FCC ID</i>	CCRHXD1		
Auftrags-Inhalt: <i>Order content:</i>	TUV Rheinland - EMC service				
Prüfgrundlage: <i>Test specification:</i>	ANSI C63.4: 2009 FCC Part 15: October 1, 2013 Subpart C section 15.207, 15.209 and 15.247				
Wareneingangsdatum: <i>Date of receipt:</i>	31.Mar.2014				
Prüfmuster-Nr.: <i>Test sample No.:</i>	N/A				
Prüfzeitraum: <i>Testing period:</i>	Refer to test report				
Ort der Prüfung: <i>Place of testing:</i>	Refer to section 2.1				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Guangdong) Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:			kontrolliert von / reviewed by:		
14.May.2014 Frank Du/ Project Manager  <i>Date Name/Position Signature</i>			14.May.2014 Liangdong Xie/Project Manager  <i>Date Name/Position Signature</i>		
Sonstiges / Other:					
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 2 von 30
Page 2 of 30

Test Summary

FCC Rules		Test items	Result
Paragraph	Released Date		
Part 15 Per Section 15.207(a)	October 1, 2013	Conducted Emission	Pass
Part 15 Per Section 15.209(a)	October 1, 2013	Radiated Spurious Emission	Pass
Part 15 Per Section 15.203	October 1, 2013	Antenna requirement	N/A
Part 15 Per Section 15.247(b)(1)	October 1, 2013	Maximum Peak Output power	Pass
Part 15 Per Section 15.247(a)(1)	October 1, 2013	6dB Bandwidth	Pass
Part 15 Per Section 15.247(a)(1)	October 1, 2013	Hopping Channel Carrier Frequency Separation	N/A
Part 15 Per Section 15.247(a)(1)(iii)	October 1, 2013	Number of Hopping Frequency Used	N/A
Part 15 Per Section 15.247(a)(1)(iii)	October 1, 2013	Time of Occupancy (Dwell Time)	N/A
Part 15 Per Section 15.247(d)	October 1, 2013	Bandedge Emission	Pass
Part 15 Per Section 15.247(e)	October 1, 2013	Power spectral density	Pass
Part 15 Per Section 15.247(d)	October 1, 2013	Out-Of-Band Emission measurement	Pass
Safety Human exposure	RSS-102 Issue 4 FCC KDB Publication 447498	Electromagnetic Fields	Pass

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 3 von 30
Page 3 of 30

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2	TEST SITES.....	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS.....	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODE.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SET-UP.....	11
5	TEST RESULTS EMISSION	14
5.1	CONDUCTED EMISSION	14
5.2	RADIATED SPURIOUS EMISSION	15
5.3	ANTENNA REQUIREMENT	16
5.4	MAXIMUM PEAK OUTPUT POWER.....	17
5.5	6dB BANDWIDTH	18
5.6	HOPPING CHANNEL CARRIER FREQUENCY SEPARATION	19
5.7	NUMBER OF HOPPING FREQUENCY USED	20
5.8	TIME OF OCCUPANCY (DWELL TIME)	21
5.9	BANDEDGE EMISSION.....	22
5.10	POWER SPECTRAL DENSITY	24

5.11	OUT-OF-BAND EMISSION	25
6	Safety Human exposure	27
7	LIST OF PHOTOGRAPHS	28

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 5 von 30
Page 5 of 30

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

No.102, 1F of Southwest Warehouse Building, No.767 TianYuan Road,
Tianhe District, Guangzhou, P.R.China, 510650

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 6 von 30
Page 6 of 30

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
EMI Test Receiver	ESCI-3	Rohde & Schwarz	100216	16.Mar.2015	1 year
Spectrum Analyzer	FSP30	Rohde & Schwarz	100286	16.Mar.2015	1 year
Trilog-Broadband Antenna	VULB9168 (30MHz-1GHz)	SCHWARZBECK MESSELEKTRONIK	209	16.Mar.2015	2 years
Double-Ridged Waveguide Horn Antenna	HF906 (1-18GHz)	Rohde & Schwarz	100385	16.Mar.2015	2 years
Pre-amplifier	AFS42-00101800-25-S-42	MITEQ	1101599	16.Mar.2015	2 years
Band Reject Filter	BRM50702	Micro-Tronics	023	16.Mar.2015	2 years
Standard Gain Horn Antenna	3160-09 (18-26.5GHz)	EMCO	21642	16.Mar.2015	5 years
Pre-amplifier	AFS33-18002650-30-8P-44	MITEQ	1108282	16.Mar.2015	2 years
3m Anechoic Chamber	N/A	Albatross Project GmbH	N/A	16.Mar.2015	1 year
Loop Antenna	HFH2-Z2 (<30MHz)	Rohde & Schwarz	100111	16.Mar.2015	2 years
EMI Test Receiver	ESCS30	Rohde & Schwarz	100316	16.Mar.2015	1 year
Two-Line V-Network	ESH3-Z5	Rohde & Schwarz	100308	16.Mar.2015	1 year
Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100701	16.Mar.2015	1 year

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 7 von 30
Page 7 of 30

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications.

2.5 Measurement Uncertainty

Uncertainty for conducted emissions measurements is 2.68dB.

Uncertainty for radiated emissions measurements is 5.16dB (30M-1GHz) and 4.88dB (> 1GHz)

The reported expanded uncertainty is based on a standard uncertainty multiply by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

2.6 Location of original data

The original copies of test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangdong) file for certification follow-up purposes.

2.7 Status of facility used for testing

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; No.102, 1F of Southwest Warehouse Building, No.767 TianYuan Road, Tianhe District, Guangzhou, P.R.China is listed on the US Federal Communications Commission list of facilities approved to perform measurements, the register no. 833845.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 8 von 30
Page 8 of 30

3 General Product Information

The submitted sample Stage HXD1 is a wireless transmitter. It uses digital modulation technics and operates in 2400 frequency band.

For details refer to the User Manual and Circuit Diagram.

3.1 Product Function and Intended Use

Refer to the Technical Documentation and user manual.

3.2 Ratings and System Details

Type Designation	:	Stage HXD1
Frequency range	:	2404.0 MHz –2476.0MHz
Number of employed channels	:	5 channels
Channel Spacing	:	2MHz
Modulation Type	:	GFSK
Type of antenna	:	Integral antenna
Power supply	:	DC3.0V(battery powered)
Equipment type	:	Portable Equipment
Protection Class	:	III

Refer to the Technical Documentation for further information.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 9 von 30
Page 9 of 30

3.3 Independent Operation Modes

A. Transmitting.

For further information refer to User Manual.

3.4 Submitted Documents

Block Diagram
Schematics
Operation Description
Components List
FCC label and location
User Manual
Internal Photos
External Photos
Application form

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

None.

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

4.5 Test set-up

Diagram 1 of Configuration for Testing Radiated Emission 30MHz -1 GHz

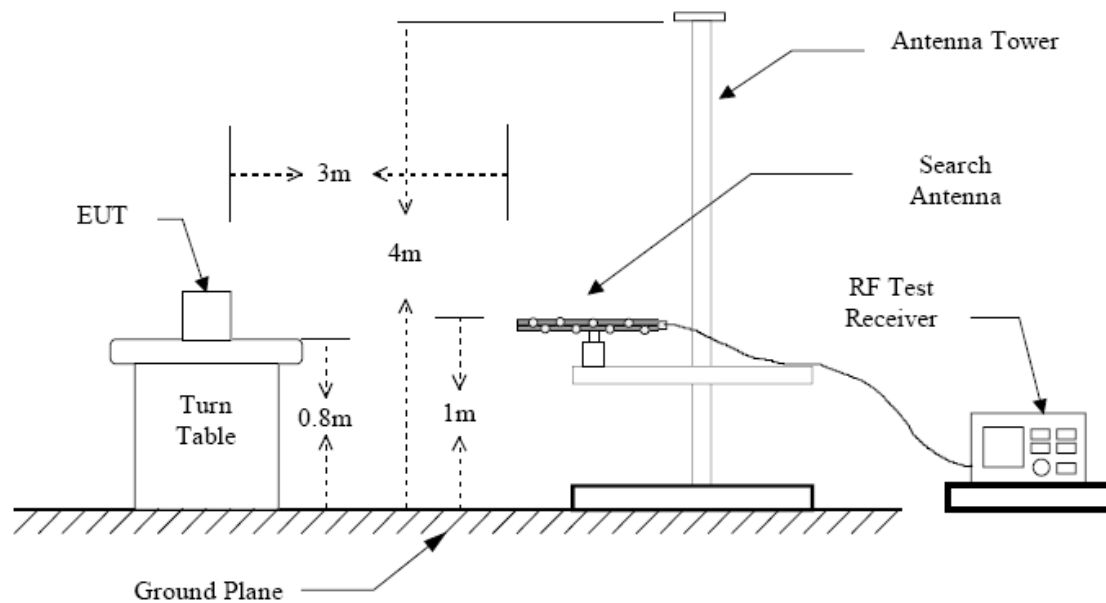


Diagram 2 of Configuration for Testing Radiated Emission above 1 GHz

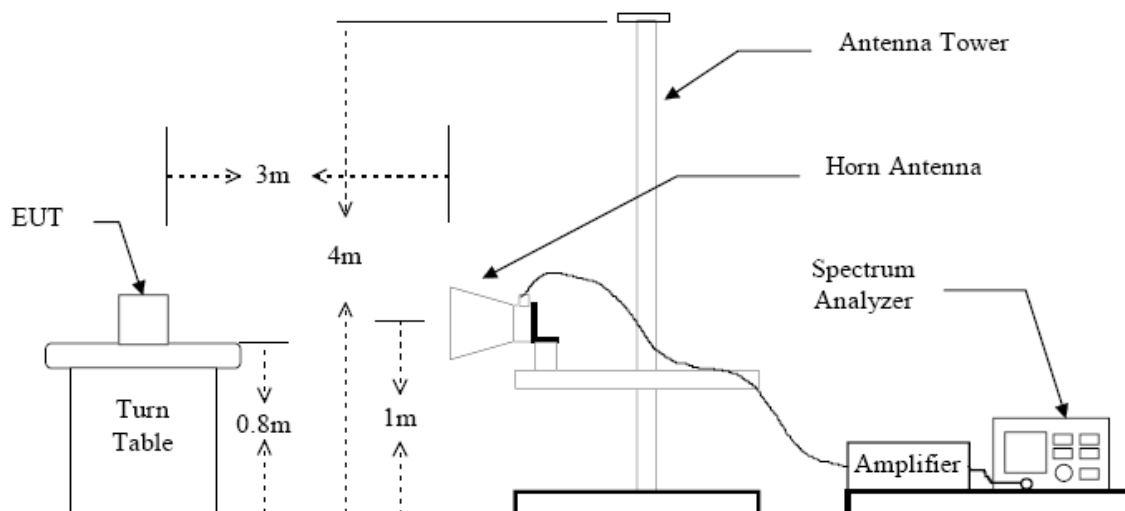


Diagram 3 of Configuration for Testing Conducted Emission


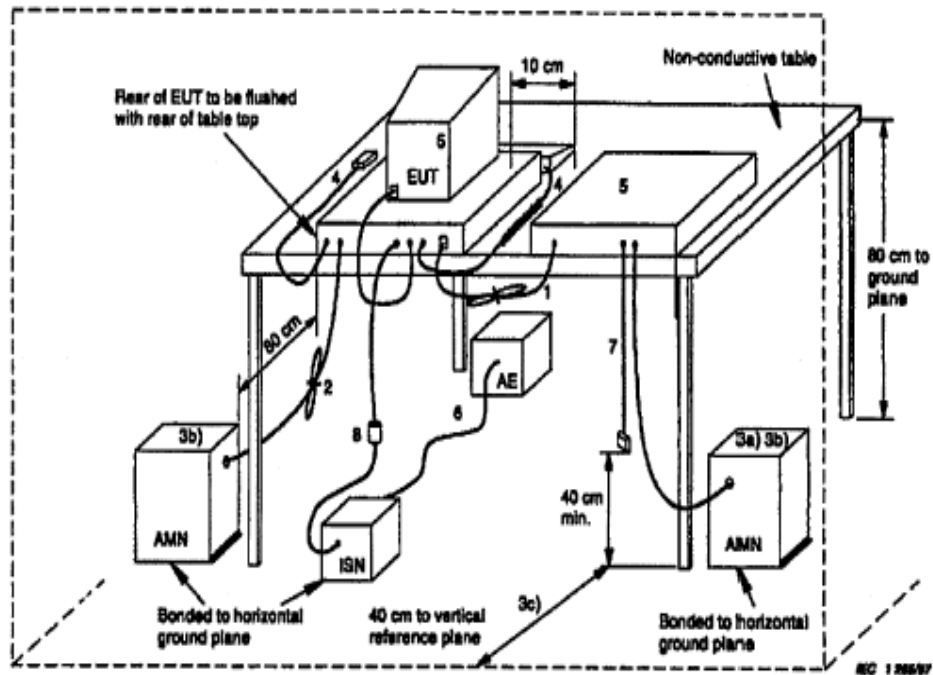


Diagram 4 of Configuration for Testing Radiated Emission below 30MHz

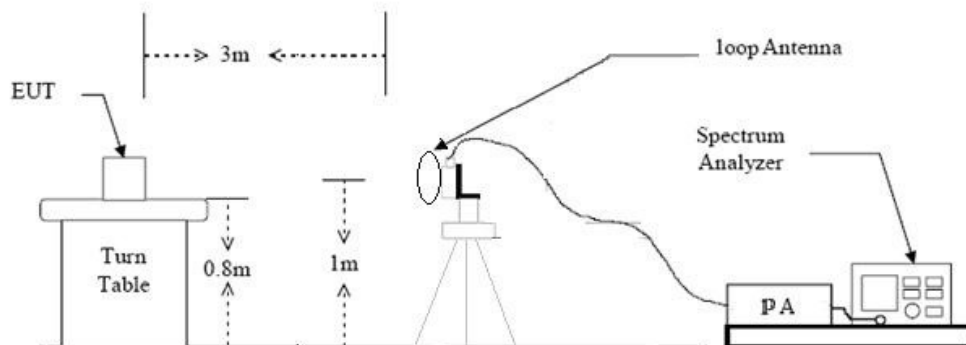


Prüfbericht - Nr.: 16060045 001

Test Report No.:

Seite 13 von 30

Page 13 of 30

Diagram 5 of Configuration for Testing other test items

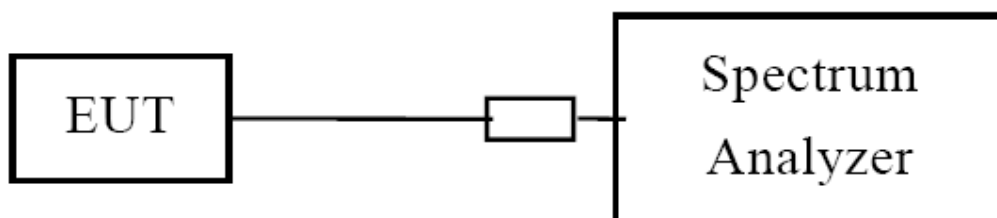

5 Test Results EMISSION

5.1 Conducted Emission

RESULT: N/A

Date of testing	:	--.--.----
Test specification	:	FCC Part 15 Per Section 15.207(a)
Limits	:	FCC Part 15 Per Section 15.207(a)
Test procedure	:	Procedure specified in ANSI C63.4 were followed
Deviations from Standard Test	:	
Procedures	:	None
Kind of test site	:	Shielded room
Operation mode	:	--
Power supply	:	--
Temperature	:	--
Humidity	:	--

Test procedure:

For tabletop device, the EUT and its peripherals were placed on a wooden table, 0.8cm above the horizontal reference plane and 40cm away from vertical reference plane in a shielded room. For floor-standing device, the EUT shall be placed either directly on the reference ground plane or on insulating material as described in ANSI C63.4 Clause 6.3.2.1.

The EUT was connected to input power source through a line impedance stabilization network (LISN). The excess length of the power cord between the EUT and the LISN shall be folded back and forth at the center of the lead to form a bundle not exceeding 40cm in length.

The EUT was tested in a typical model of operation in accordance with ANSI C63.4:2009, Pre-test was performed in peak and average detection mode. final measurement was performed using quasi-peak and average detection on the live and neutral lines with the worst case.

The test software Rohde & Schwarz EMC32 was used during the test.

If the result of the measurement with the Quasi Peak detector is below the Average limit, the measurement with Average Detector may be omitted.

EUT is powered by battery, has no connection to Mains port, therefore this test is not applicable.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 15 von 30
Page 15 of 30

5.2 Radiated Spurious Emission

RESULT:

Pass

Date of testing	:	Apr.28.2014
Test specification	:	FCC Part 15 Per Section 15.209(a)
Limits	:	FCC Part 15 Per Section 15.209(a)
Test procedure	:	Procedure specified in ANSI C63.4
Deviations from Standard Test procedures	:	None
Kind of test site	:	3m Semi-anechoic chamber
Operation mode	:	Transmitting at fix channel with max power (High, Low, Mid)
Power supply	:	DC3.0V(powered by battery)
Temperature	:	23°C
Humidity	:	50%

Test procedure:

For tabletop device, the and its peripherals were placed on a wooden table, 80cm above ground plane in semi-anechoic chamber. For floor-standing equipment, the EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material in semi-anechoic chamber.

The EUT was set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower. Test shall be made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height shall be varied from 1m to 4m. The table was rotated 360 degrees to detect the suspected emission frequency points. The position of the worst radiation case with both horizontal and vertical receiving antenna polarization was recorded together with the suspected emission frequency points above-mentioned.

The EUT was tested in a typical model of operation in accordance with ANSI C63.4:2009, Pre-test was performed in peak detection mode. Final measurement was performed using quasi-peak detection with the worst case.

The test software Rohde & Schwarz EMC32 was used during the test.

Note:

While testing, the EUT is connected with a serial port bridge board for test mode setup. The length of the communication cable between the EUT and the bridge board, which including Tx, Rx, GND serial pins, is minimized to reduce the unwanted influence to test result. The bridge board can be connected to a host computer with standard DB9 com port cable for running of the test setup software. After setup successfully, the EUT can keep the test mode with the host computer and the cable removed.

Refer to appendix 1 for test result.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 16 von 30
Page 16 of 30

5.3 Antenna requirement

RESULT:

Pass

Date of testing : ---
Test specification : FCC Part 15 Per Section 15.203
FCC Part 15 Per Section 15.247(b)

For intentional device, according to 15.203, and intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to 15.247(b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by amount in dB than the directional gain of the antenna exceeds of 6dBi.

As the antenna is permanently printed on RF Board, there is no consideration of replacement.

And the max gain of the antenna is 0dBi.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 17 von 30
Page 17 of 30

5.4 Maximum Peak Output Power

RESULT:

Pass

Date of testing : Apr. 17, 2014
Test specification : FCC Part 15 Per Section 15.247(b)(3)
Limits : FCC Part 15 Per Section 15.247(b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands:
1 Watt.

Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : Transmitting on the measured channel.
Power supply : DC3.0V(powered by battery)
Temperature : 23°C
Humidity : 50%

Table 2: Peak Conducted Power

Channel	Frequency (MHz)	Power Reading(dBm)	Cable Loss(dB)	Output Power		Limit (mW)*
				(dBm)	(mW)	
Low	2403.8	-1.27	0.40	-0.87	0.82	1000
Mid	2447.8	-3.62	0.40	-3.22	0.44	1000
High	2471.8	-3.17	0.40	-2.77	0.53	1000

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 18 von 30
Page 18 of 30

5.5 6dB Bandwidth

RESULT:

Pass

Date of testing : May.14, 2014
Test specification : FCC Part 15 Per Section 15.247(a)(2)
Limits : FCC Part 15 Per Section 15.247(a)(2)

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4
Operation mode : Transmitting on the measured channel.
Kind of test site : Shielded room
Power supply : DC3.0V(powered by battery)
Temperature : 22°C
Humidity : 52%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency= measured channel, RBW=10kHz,VBW=30kHz.
4. Mark the peak power frequency point and the -6dB upper and lower frequency points.
5. Read the frequency delta value between the -6dB upper and lower frequency points.
6. Repeat step 2 to 5 until all the channels required are finished.

Table 3: 6dB Bandwidth

Channel	Frequency (MHz)	Test Result (kHz)
Low	2403.8	680
High	2471.8	670

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 19 von 30
Page 19 of 30

5.6 Hopping Channel Carrier Frequency Separation

RESULT:

N/A

Date of testing : ---
Test specification : FCC Part 15 Per Section 15.247(a)(1)
Limits : FCC Part 15 Per Section 15.247(a)(1)

Frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : ---
Power supply : ---
Temperature : ---
Humidity : ---

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 30 kHz, VBW = 100 kHz, Frequency Span = wide enough to cover the adjacent channel.
4. Mark the peak power frequency point of the measured channel and its adjacent channel(s)
5. Read the frequency delta value between the measured channel and its adjacent channel(s)
6. Repeat step 3 to 5 until all the channels measured are finished.

EUT does not use Frequency hopping technics, therefore this test is not applicable.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 20 von 30
Page 20 of 30

5.7 Number of Hopping Frequency Used

RESULT: N/A

Date of testing	:	---
Test specification	:	FCC Part 15 Per Section 15.247(a)(1)(iii)
Limits	:	FCC Part 15 Per Section 15.247(a)(1)(iii) Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels
Deviations from Standard Test procedures	:	None
Test procedure	:	Procedure specified in ANSI C63.4
Kind of test site	:	Shielded room
Operation mode	:	---
Power supply	:	---
Temperature	:	---
Humidity	:	---

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 100 kHz, VBW $\geq$ RBW, Frequency Span = wide enough to cover the channels to be plotted.
4. Set the spectrum analyzer to Max-hold mode and plot the result(s) with record of all hopping channel.

EUT does not use Frequency hopping technics, therefore this test is not applicable.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 21 von 30
Page 21 of 30

5.8 Time of Occupancy (Dwell Time)

RESULT:

N/A

Date of testing	:	---
Test specification	:	FCC Part 15 Per Section 15.247(a)(1)(iii)
Limits	:	FCC Part 15 Per Section 15.247(a)(1)(iii)

For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Deviations from Standard Test procedures	:	None
Test Procedure	:	Procedure specified in ANSI C63.4
Kind of test site	:	Shielded room
Operation mode	:	---
Power supply	:	---
Temperature	:	---
Humidity	:	---

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 1MHz, VBW $\geq$ RBW, Frequency Span = 0 Hz.
4. Set sweep time properly to capture the entire dwell time per hopping channel.
5. Set detector type to Peak and trace mode to Max Hold and make the measurement.
6. Repeat step 3-5 until all channels measured were complete.

EUT does not use Frequency hopping technics, therefore this test is not applicable.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 22 von 30
Page 22 of 30

5.9 Bandedge Emission

RESULT:

Pass

Date of testing : Apr.28.2014
Test specification : FCC Part 15 Per Section 15.247(d)
Limits : FCC Part 15 Per Section 15.247(d)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

In addition:
FCC Part 15 - radiated emission which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Deviations from Standard Test procedures : None
Test Procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : Transmitting at the highest and lowest channel (band edge)
Power supply : DC3.0V(powered by battery)
Temperature : 22°C
Humidity : 55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 100 kHz, VBW ≥ RBW.
4. Set proper frequency span respectively for out-of-band emission measurement of the band edge and the whole range (up to 10 times of the carrier frequency.)
5. Set the trace mode to Max Hold and mark the peak reading of any spurious emission recorded.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 23 von 30
Page 23 of 30

Table 4: Band Edges Emission in the Restricted Bands by Marker Delta Method

Frequency [MHz]	dBc [dB]	PK [dB μ V/m]	AV [dB μ V/m]	Polarity (H/V)	PK limit [dB μ V/m]	AV limit [dB μ V/m]
2483.5	53.38	52.06	---	V	74	54
2400.0	53.96	54.4	---	H	74	54

NOTE:

1. The Peak carrier field strength of the highest/lowest channel is 105.06dBuV/m, 108.40dBuV/m.
The above field strength levels were measured in horizontal polarity which is the worst case.
2. The dBc value between the carrier maximum power and band edge emission power of the frequency listed in the table is calculated from the test record showed in Appendix 1.
3. Peak value of the high/low band edge emission listed in the table is calculated by the below formula: PK value of band edge emission = Peak carrier field strength – dBc value in item2

*Note: Please refer to Appendix 1 for measurement data. Disturbances other than those mentioned above are small or not detectable. Please refer to the Appendix 1 for the noise floor of the band edge emission.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 24 von 30
Page 24 of 30

5.10 Power spectral density

RESULT:

Pass

Date of testing : Apr.28.2014
Test specification : FCC Part 15 Per Section 15.247(e)
Limits : FCC Part 15 Per Section 15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : Transmitting on the measured channel.
Power supply : DC3.0V(powered by battery)
Temperature : 23°C
Humidity : 50%

Table 5: power spectral density

Channel	Frequency (MHz)	Power Reading(dBm)	Limit dBm/3kHz
Low	2403.8	-10.10	8.0
Mid	2447.8	-15.40	8.0
High	2471.8	-7.44	8.0

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 25 von 30
Page 25 of 30

5.11 Out-of-Band Emission

RESULT:

Pass

Date of testing : Apr.24, 2014
Test specification : FCC Part 15 Per Section 15.247(d)
Limits : FCC Part 15 Per Section 15.247(d)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

In addition:

FCC Part 15 - radiated emission which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Deviations from Standard Test procedures

: None
Test Procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : Transmitting at the highest and lowest channel
Power supply : DC3.0V(powered by battery)
Temperature : 22°C
Humidity : 55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 100 kHz, VBW ≥ RBW.
4. Set proper frequency span respectively for out-of-band emission measurement of the band edge and the whole range (up to 10 times of the carrier frequency.)
5. Set the trace mode to Max Hold and mark the peak reading of any spurious emission recorded.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 26 von 30
Page 26 of 30

Table 6: Out-Of-Band Emission measurement (conducted)

Emission (Carrier operating at Channel low, mid and high)	Attenuation	Limit (dB)
30MHz to 25GHz	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$

Note: Refer to Appendix 1 for measurement data.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 27 von 30
Page 27 of 30

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:
Passed

Test standard : RSS-102 Issue 4
FCC KDB Publication 447498

The maximum peak output power of the transmitter is 0.82mW only, which less than 20mW.
Hence the EUT is exempted from routine evaluation limits (SAR Evaluation) according to clause 2.5.1 of RSS-102 Issue 4.



The minimum distance for the EUT is 5mm, since maximum peak output power of the transmitter is 0.82mW <10mW, hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile and Portable RF Exposure.Guidance v05.

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 28 von 30
Page 28 of 30

7. Photographs of the Test Set-Up


Photograph 1: Set-up for Radiation Measurement below 1GHz

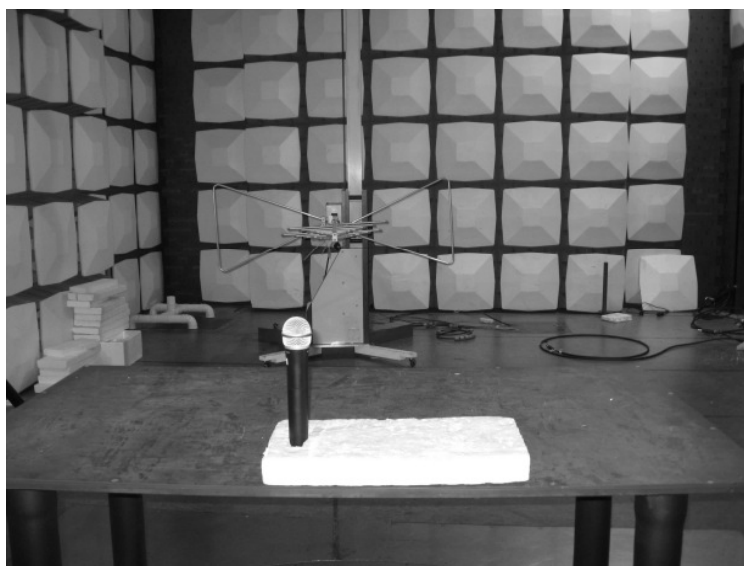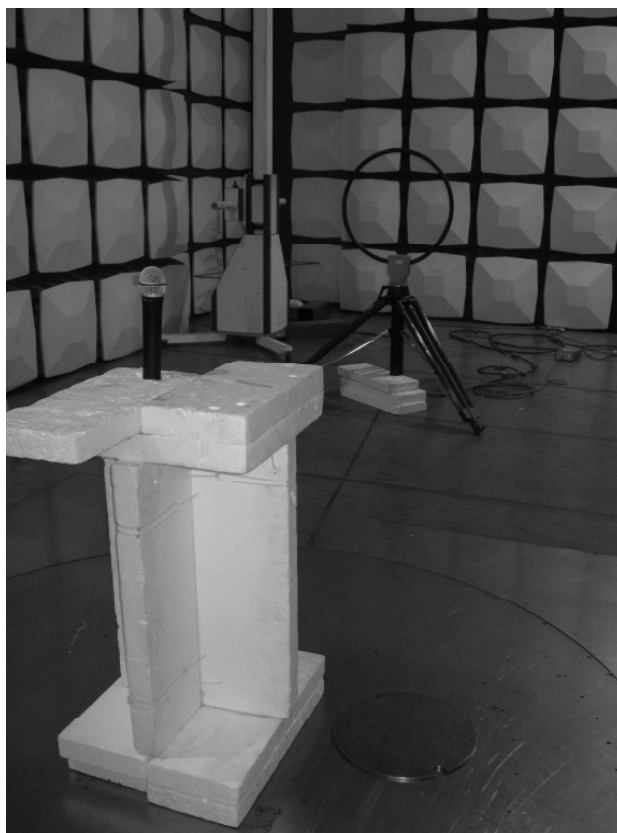

Prüfbericht - Nr.: 16060045 001
Test Report No.:

Seite 29 von 30
Page 29 of 30

Photograph 2: Set-up for Radiation Measurement above 1GHz

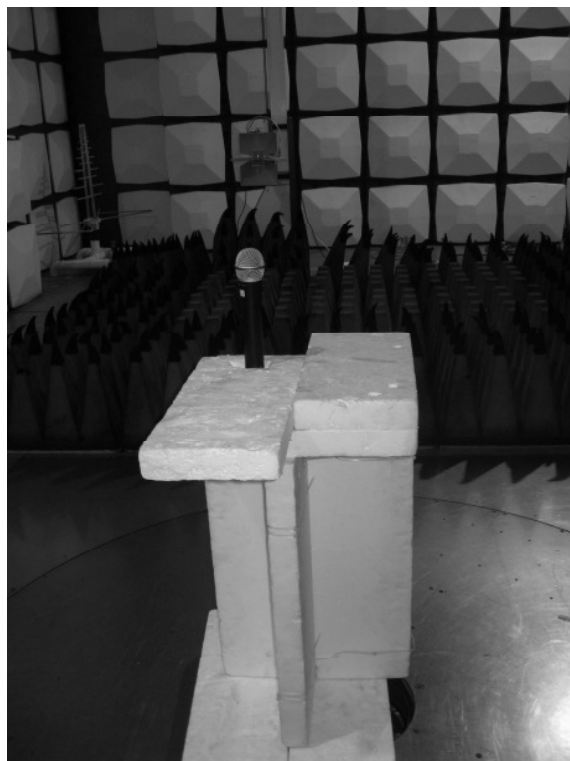

6 List of Tables

Table 1: List of Test and Measurement Equipment	6
Table 2: Peak Conducted Power	17
Table 3: 6dB Bandwidth.....	18
Table 4: Band Edges Emission in the Restricted Bands by Marker Delta Method.....	23
Table 5: power spectral density	24

7 List of Photographs

Photograph 1: Set-up for Radiation Measurement below 1GHz.....	28
Photograph 2: Set-up for Radiation Measurement above 1GHz.....	29

Prüfbericht - Nr.:

16060045 001

Seite 1 von 39

Test Report No.

Page 1 of 39

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ High channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1
Frequency Range: 9K-30MHz
Receiver: TUV ESCI 3
Transducer: TUV SAC HFH2-Z2/ TUV ESCI 3-TUV SAC HFH2-Z2

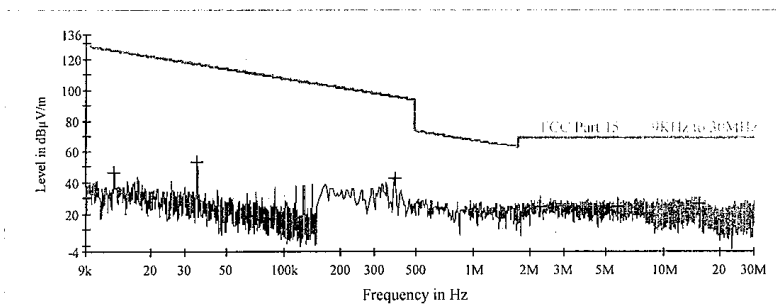

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
0.012760	/	46.4	1000.0	0.200	H	20.9	79.1	125.6
0.034840	/	53.3	1000.0	0.200	H	20.5	63.5	116.8
0.386000	/	42.8	1000.0	9.000	H	20.8	53.0	95.9
2.266000	24.8	/	1000.0	9.000	H	20.6	44.7	69.5
5.730000	24.3	/	1000.0	9.000	H	20.6	45.2	69.5
15.406000	26.8	/	1000.0	9.000	H	22.3	42.7	69.5

Sign-off Test Data



Date: 4/28/2014 - Time: 1:36:32

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 2 von 39

Test Report No.

Page 2 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ High channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range:


9K-30MHz

Receiver:

TUV ESCI 3

Transducer:

TUV SAC HFH2-Z2/ TUV ESCI 3-TUV SAC HFH2-Z2

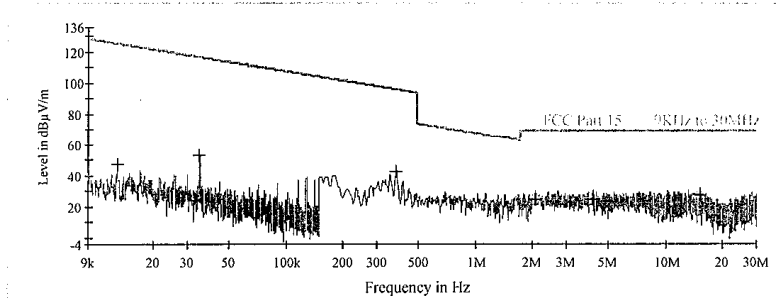

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
0.012840	/	47.5	1000.0	0.200	V	20.9	78.1	125.5
0.034840	/	53.1	1000.0	0.200	V	20.5	63.7	116.8
0.382000	/	42.4	1000.0	9.000	V	20.8	53.6	96.0
2.046000	25.0	/	1000.0	9.000	V	20.7	44.5	69.5
4.126000	24.5	/	1000.0	9.000	V	20.8	45.0	69.5
15.150000	27.1	/	1000.0	9.000	V	22.8	42.4	69.5

Sign-off Test Data



Date: 4/28/2014 - Time: 1:40:20

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 3 von 39

Test Report No.

Page 3 of 39

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Mid channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1
Frequency Range: 9K-30MHz
Receiver: TUV ESCI 3
Transducer: TUV SAC HFH2-Z2/ TUV ESCI 3-TUV SAC HFH2-Z2

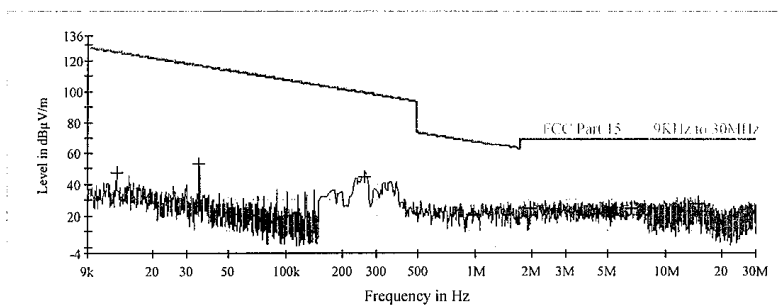

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
0.012840	/	47.6	1000.0	0.200	H	20.9	77.9	125.5
0.034840	/	53.2	1000.0	0.200	H	20.5	63.7	116.8
0.262000	/	44.9	1000.0	9.000	H	21.0	54.3	99.3
1.950000	24.8	/	1000.0	9.000	H	20.7	44.7	69.5
6.582000	24.7	/	1000.0	9.000	H	20.7	44.8	69.5
14.770000	27.1	/	1000.0	9.000	H	23.0	42.4	69.5

Sign-off Test Data



Date: 4/28/2014 - Time: 1:46:41

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 4 von 39

Test Report No.

Page 4 of 39

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Mid channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1
Frequency Range: 9K-30MHz
Receiver: TUV ESCI 3
Transducer: TUV SAC HFH2-Z2/ TUV ESCI 3-TUV SAC HFH2-Z2

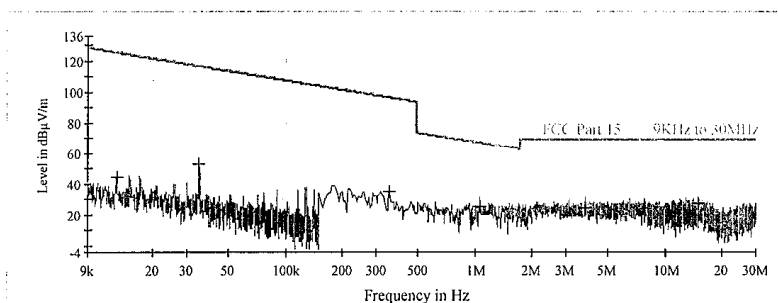

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
0.012920	/	44.3	1000.0	0.200	V	20.9	81.1	125.5
0.034840	/	53.2	1000.0	0.200	V	20.5	63.6	116.8
0.350000	/	35.3	1000.0	9.000	V	20.9	61.5	96.7
1.054000	25.3	/	1000.0	9.000	V	20.4	41.9	67.2
3.786000	24.6	/	1000.0	9.000	V	20.7	44.9	69.5
15.006000	27.2	/	1000.0	9.000	V	23.1	42.3	69.5

Sign-off Test Data



Date: 4/28/2014 - Time: 1:44:05

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Test Report No.

Seite 5 von 39

Page 5 of 39

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Low channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1
Frequency Range: 9K-30MHz
Receiver: TUV ESCI 3
Transducer: TUV SAC HFH2-Z2/ TUV ESCI 3-TUV SAC HFH2-Z2

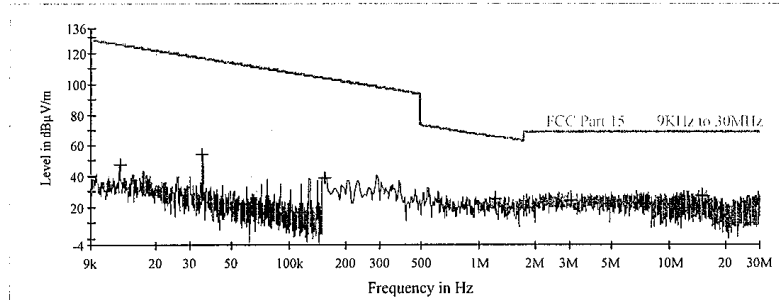

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
0.012840	/	47.5	1000.0	0.200	H	20.9	78.0	125.5
0.034920	/	54.5	1000.0	0.200	H	20.5	62.3	116.8
0.154000	/	38.4	1000.0	9.000	H	20.5	65.5	103.9
1.218000	25.3	/	1000.0	9.000	H	20.5	40.6	65.9
3.042000	24.4	/	1000.0	9.000	H	20.4	45.1	69.5
14.914000	27.2	/	1000.0	9.000	H	23.1	42.3	69.5

Sign-off Test Data



Date: 4/28/2014 - Time: 1:49:56

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 6 von 39

Test Report No.

Page 6 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Low channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range:


9K-30MHz

Receiver:

TUV ESCI 3

Transducer:

TUV SAC HFH2-Z2/ TUV ESCI 3-TUV SAC HFH2-Z2

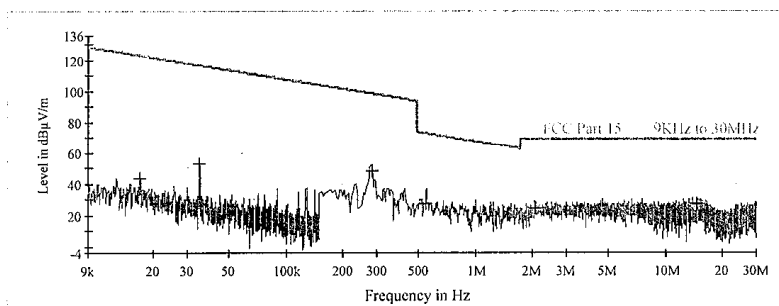

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
0.017000	/	43.6	1000.0	0.200	V	20.7	79.4	123.1
0.034840	/	53.1	1000.0	0.200	V	20.5	63.7	116.8
0.282000	/	48.5	1000.0	9.000	V	20.9	50.1	98.6
0.546000	27.1	/	1000.0	9.000	V	20.7	45.8	72.9
2.062000	24.9	/	1000.0	9.000	V	20.7	44.6	69.5
14.594000	27.0	/	1000.0	9.000	V	23.0	42.5	69.5

Sign-off Test Data



Date: 4/28/2014 - Time: 1:52:55

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Test Report No.

Seite 7 von 39

Page 7 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless receiver System.
Identification: HXD1 (Highest frequency)
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: A
Climate Condition: 23°C ; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1

Frequency Range:


30M-1GHz

Receiver:

TUV ESCI

Transducer:

TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

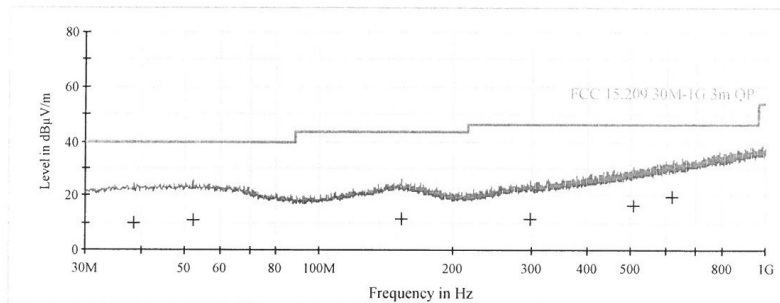

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
38.750000	9.6	1000.0	120.000	H	14.6	30.4	40.0
52.300000	10.7	1000.0	120.000	H	15.0	29.3	40.0
153.300000	11.4	1000.0	120.000	H	15.7	32.1	43.5
298.550000	11.6	1000.0	120.000	H	15.9	34.4	46.0
504.350000	16.4	1000.0	120.000	H	20.9	29.6	46.0
615.520000	19.6	1000.0	120.000	H	23.1	26.4	46.0

Sign-off Test Data



Date: 4/15/2014 - Time: 2:33:33

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 8 von 39

Test Report No.

Page 8 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless receiver System
Identification: HXD1 (Highest frequency)
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: A
Climate Condition: 23°C ; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range:


30M-1GHz

Receiver:

TUV ESCI

Transducer:

TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

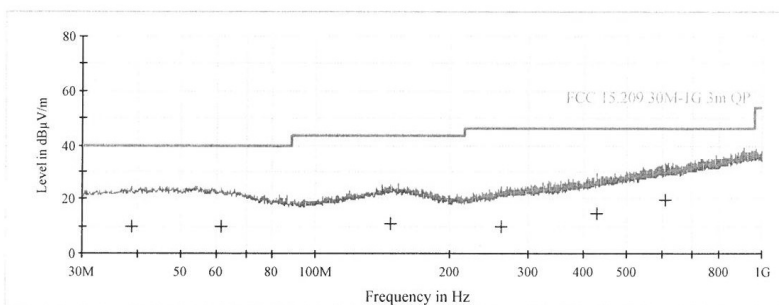

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
38.850000	9.7	1000.0	120.000	V	14.6	30.3	40.0
61.650000	9.8	1000.0	120.000	V	14.4	30.2	40.0
147.250000	10.9	1000.0	120.000	V	15.5	32.6	43.5
261.000000	9.9	1000.0	120.000	V	14.6	36.1	46.0
426.600000	14.7	1000.0	120.000	V	19.3	31.3	46.0
605.800000	19.6	1000.0	120.000	V	23.1	26.4	46.0

Sign-off Test Data



Date: 4/15/2014 - Time: 2:36:44

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 9 von 39

Test Report No.

Page 9 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless receiver System
Identification: HXD1 (Mid frequency)
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: A
Climate Condition: 23°C ; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range:


30M-1GHz

Receiver:

TUV ESCI

Transducer:

TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

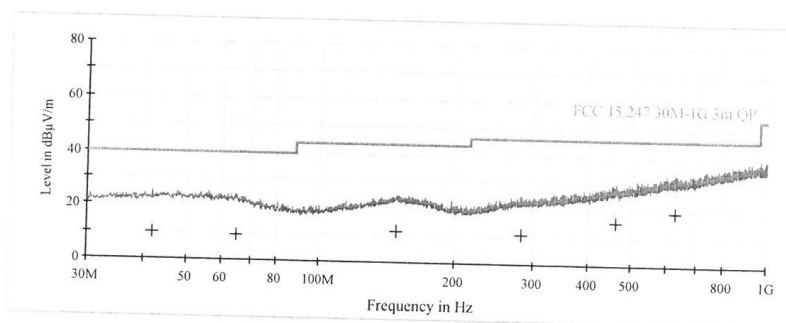

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
41.900000	9.9	1000.0	120.000	V	14.8	30.1	40.0
65.150000	9.5	1000.0	120.000	V	14.0	30.5	40.0
149.050000	11.5	1000.0	120.000	V	15.6	32.0	43.5
283.650000	11.0	1000.0	120.000	V	15.6	35.0	46.0
461.550000	15.5	1000.0	120.000	V	20.0	30.5	46.0
624.500000	19.8	1000.0	120.000	V	23.5	26.2	46.0

Sign-off Test Data

Date: 4/15/2014 - Time: 2:22:26

Tested by:

Reviewed by:



Prüfbericht - Nr.:

16060045 001

Seite 10 von 39

Test Report No.

Page 10 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless receiver System
Identification: HXD1 (Mid frequency)
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: A
Climate Condition: 23°C ; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1

Frequency Range:


30M-1GHz

Receiver:

TUV ESCI

Transducer:

TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

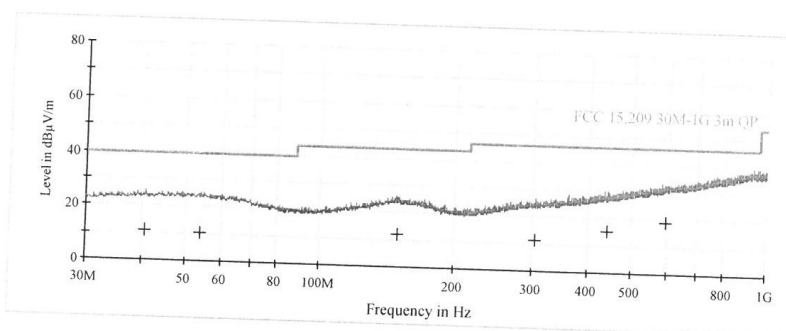

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
40.800000	11.0	1000.0	120.000	H	14.8	29.0	40.0
54.250000	10.3	1000.0	120.000	H	14.9	29.7	40.0
150.050000	11.8	1000.0	120.000	H	15.6	31.7	43.5
305.700000	11.6	1000.0	120.000	H	16.1	34.4	46.0
442.350000	15.2	1000.0	120.000	H	19.7	30.8	46.0
594.800000	19.3	1000.0	120.000	H	22.8	26.7	46.0

Sign-off Test Data



Date: 4/15/2014 - Time: 2:12:09

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 11 von 39

Page 11 of 39

Test Report No.

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless receiver System
Identification: HXD1 (Low frequency)
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: A
Climate Condition: 23°C ; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1

Frequency Range:


30M-1GHz

Receiver:

TUV ESCI

Transducer:

TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

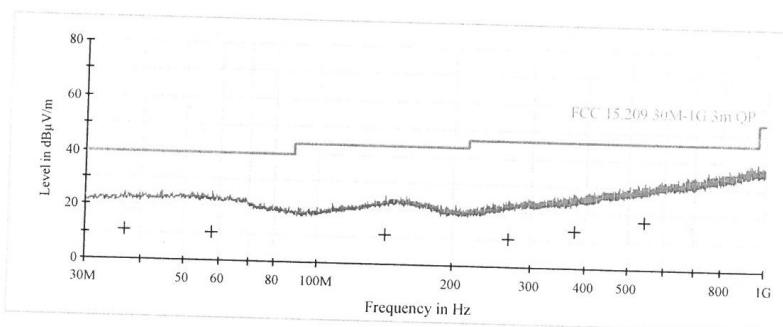

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
36.800000	10.9	1000.0	120.000	H	14.5	29.1	40.0
58.000000	10.3	1000.0	120.000	H	14.7	29.7	40.0
141.550000	10.8	1000.0	120.000	H	15.1	32.7	43.5
267.050000	10.3	1000.0	120.000	H	14.9	35.7	46.0
376.800000	13.4	1000.0	120.000	H	18.0	32.6	46.0
540.450000	17.5	1000.0	120.000	H	21.5	28.5	46.0

Sign-off Test Data



Date: 4/15/2014 - Time: 2:29:34

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 12 von 39

Page 12 of 39

Test Report No.

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless receiver System
Identification: HXD1 (Low frequency)
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: A
Climate Condition: 23°C ; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range:


30M-1GHz

Receiver:

TUV ESCI

Transducer:

TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

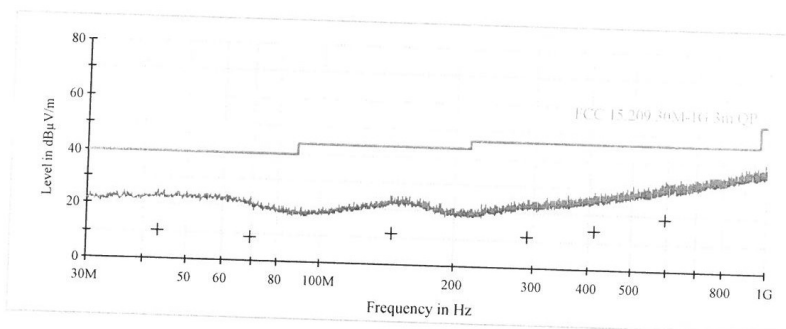

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
43.200000	10.4	1000.0	120.000	V	14.9	29.6	40.0
69.400000	8.9	1000.0	120.000	V	13.2	31.1	40.0
144.700000	11.2	1000.0	120.000	V	15.3	32.3	43.5
291.800000	11.3	1000.0	120.000	V	15.8	34.7	46.0
410.350000	14.1	1000.0	120.000	V	18.8	31.9	46.0
595.500000	19.3	1000.0	120.000	V	22.8	26.7	46.0

Sign-off Test Data



Date: 4/15/2014 - Time: 2:26:19

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 13 von 39

Test Report No.

Page 13 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ High channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060045 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range: 1GHz-18GHz
Receiver: TUV FSP30
Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

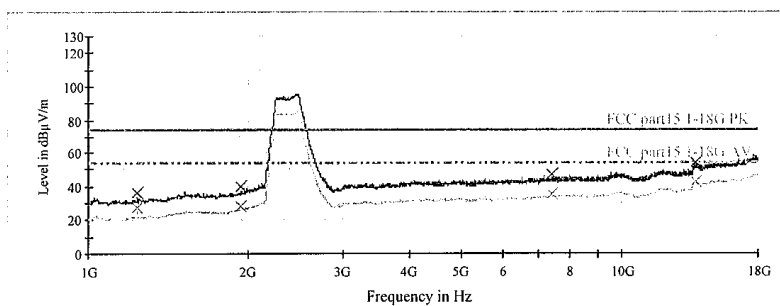

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/)
1236.000000	36.0	1000.0	1000.000	V	-14.4	38.0	74.0
1931.000000	39.7	1000.0	1000.000	V	-10.0	34.3	74.0
7415.000000	46.6	1000.0	1000.000	V	0.1	27.4	74.0
13788.000000	54.2	1000.0	1000.000	V	4.7	19.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/)
1236.000000	27.2	1000.0	1000.000	V	-14.4	26.8	54.0
1931.000000	28.4	1000.0	1000.000	V	-10.0	25.6	54.0
7415.000000	35.0	1000.0	1000.000	V	0.1	19.0	54.0
13788.000000	42.4	1000.0	1000.000	V	4.7	11.6	54.0



Date: 4/23/2014 - Time: 6:09:06

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 14 von 39

Test Report No.

Page 14 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information


Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ High channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range: 1GHz-18GHz

Receiver: TUV FSP30

Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

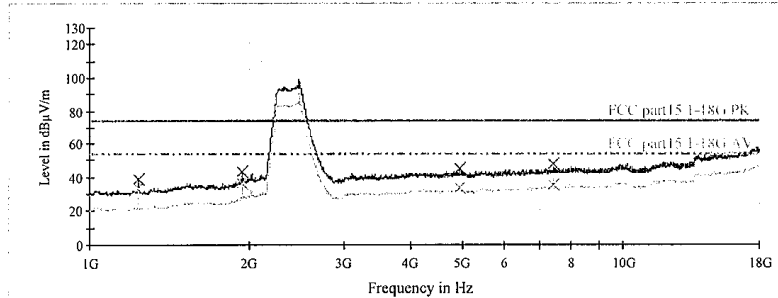

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1236.000000	39.1	1000.0	1000.000	H	-14.4	34.9	74.0
1931.000000	43.8	1000.0	1000.000	H	-10.0	30.2	74.0
4944.000000	45.5	1000.0	1000.000	H	-3.3	28.5	74.0
7415.000000	47.7	1000.0	1000.000	H	0.1	26.3	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1236.000000	33.8	1000.0	1000.000	H	-14.4	20.2	54.0
1931.000000	36.5	1000.0	1000.000	H	-10.0	17.5	54.0
4944.000000	33.7	1000.0	1000.000	H	-3.3	20.3	54.0
7415.000000	35.3	1000.0	1000.000	H	0.1	18.7	54.0



Date: 4/23/2014 - Time: 6:03:51

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 15 von 39

Test Report No.

Page 15 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Mid channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range:


1GHz-18GHz

Receiver:

TUV FSP30

Transducer:

TUV SAC HF907/ TUV FSP30-TUV SAC HF907

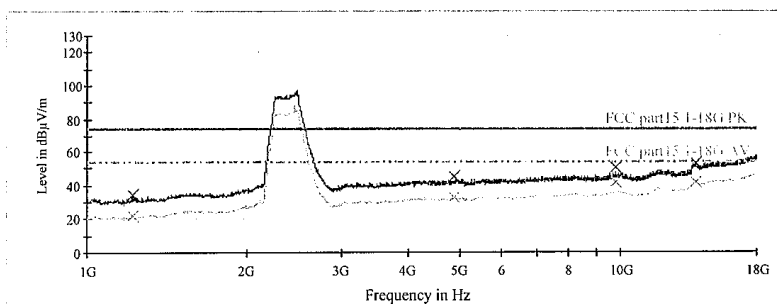

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/)
1223.000000	34.9	1000.0	1000.000	V	-14.5	39.1	74.0
4895.000000	44.8	1000.0	1000.000	V	-3.5	29.2	74.0
9791.000000	50.7	1000.0	1000.000	V	4.3	23.3	74.0
13833.000000	53.4	1000.0	1000.000	V	4.8	20.6	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/)
1223.000000	22.5	1000.0	1000.000	V	-14.5	31.5	54.0
4895.000000	32.5	1000.0	1000.000	V	-3.5	21.5	54.0
9791.000000	41.3	1000.0	1000.000	V	4.3	12.7	54.0
13833.000000	42.0	1000.0	1000.000	V	4.8	12.0	54.0



Date: 4/23/2014 - Time: 5:45:36

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 16 von 39

Test Report No.

Page 16 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information


Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Mid channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1

Frequency Range: 1GHz-18GHz

Receiver: TUV FSP30

Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

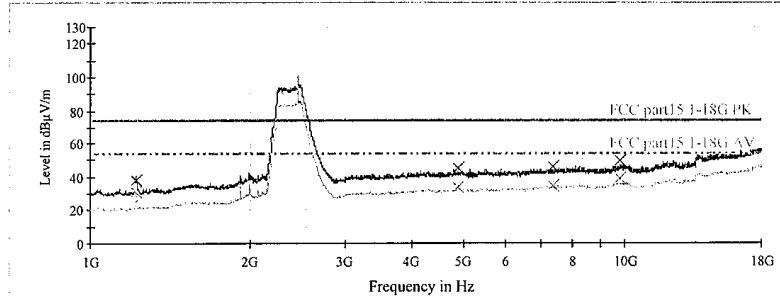

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1223.000000	38.2	1000.0	1000.000	H	-14.5	35.8	74.0
4895.000000	44.8	1000.0	1000.000	H	-3.5	29.2	74.0
7343.000000	46.1	1000.0	1000.000	H	-0.3	27.9	74.0
9791.000000	49.4	1000.0	1000.000	H	4.3	24.6	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1223.000000	30.9	1000.0	1000.000	H	-14.5	23.1	54.0
4895.000000	33.6	1000.0	1000.000	H	-3.5	20.4	54.0
7343.000000	34.2	1000.0	1000.000	H	-0.3	19.8	54.0
9791.000000	39.1	1000.0	1000.000	H	4.3	14.9	54.0



Date: 4/23/2014 - Time: 5:38:54

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 17 von 39

Test Report No.

Page 17 of 39

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Low channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060045 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1
Frequency Range: 1GHz-18GHz
Receiver: TUV FSP30
Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

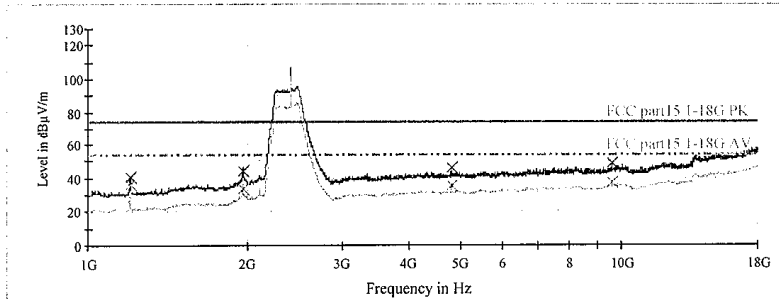

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/)
1202.000000	40.3	1000.0	1000.000	H	-14.5	33.7	74.0
1952.000000	44.5	1000.0	1000.000	H	-9.6	29.5	74.0
4808.000000	46.0	1000.0	1000.000	H	-3.7	28.0	74.0
9815.000000	48.5	1000.0	1000.000	H	4.2	25.5	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/)
1202.000000	36.0	1000.0	1000.000	H	-14.5	18.0	54.0
1952.000000	34.0	1000.0	1000.000	H	-9.6	20.0	54.0
4808.000000	35.7	1000.0	1000.000	H	-3.7	18.3	54.0
9815.000000	37.5	1000.0	1000.000	H	4.2	16.5	54.0

Date: 4/23/2014 - Time: 5:58:09

Tested by:  Reviewed by: 

Prüfbericht - Nr.:

16060045 001

Seite 18 von 39

Test Report No.

Page 18 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information


Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Low channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060045 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range: 1GHz-18GHz

Receiver: TUV FSP30

Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

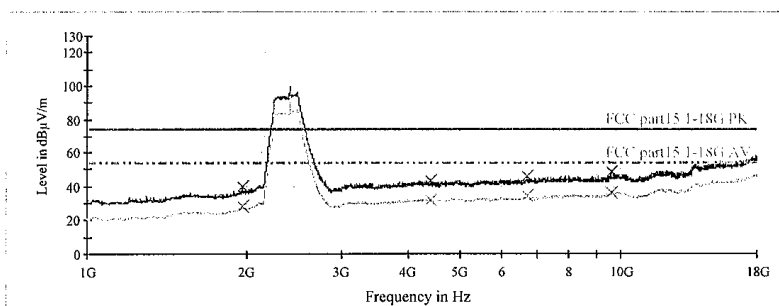

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1952.000000	40.1	1000.0	1000.000	V	-9.6	33.9	74.0
4417.000000	43.4	1000.0	1000.000	V	-4.1	30.6	74.0
6695.000000	46.3	1000.0	1000.000	V	-0.5	27.7	74.0
9617.000000	48.4	1000.0	1000.000	V	4.2	25.6	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1952.000000	28.3	1000.0	1000.000	V	-9.6	25.7	54.0
4417.000000	31.8	1000.0	1000.000	V	-4.1	22.2	54.0
6695.000000	34.1	1000.0	1000.000	V	-0.5	19.9	54.0
9617.000000	36.3	1000.0	1000.000	V	4.2	17.7	54.0



Date: 4/23/2014 - Time: 5:52:53

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 19 von 39

Test Report No.

Page 19 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ High channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1

Frequency Range:

2GHz-3GHz


Receiver:

TUV FSP30

Transducer:

TUV SAC HF907/ TUV FSP30-TUV SAC HF907

Pre TUV 1 to 18G HF907

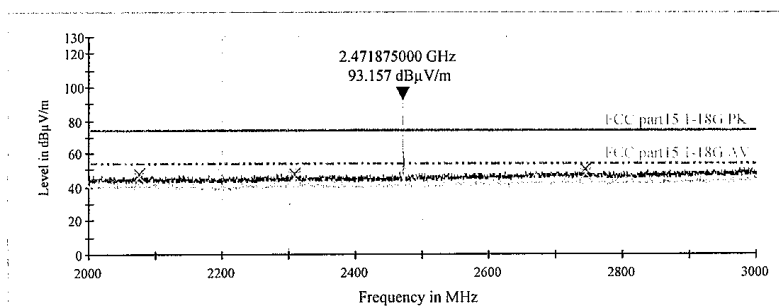

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2076.000000	47.5	1000.0	1000.000	H	32.0	26.5	74.0
2309.000000	48.0	1000.0	1000.000	H	32.1	26.0	74.0
2744.000000	50.2	1000.0	1000.000	H	33.5	23.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2076.000000	45.7	1000.0	1000.000	H	32.0	8.4	54.0
2309.000000	46.1	1000.0	1000.000	H	32.1	7.9	54.0
2744.000000	48.0	1000.0	1000.000	H	33.5	6.0	54.0

Sign-off Test Data



Date: 4/24/2014 - Time: 9:55:40

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 20 von 39

Test Report No.

Page 20 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ High channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range:


2GHz-3GHz

Receiver:

TUV FSP30

Transducer:

TUV SAC HF907/ TUV FSP30-TUV SAC HF907

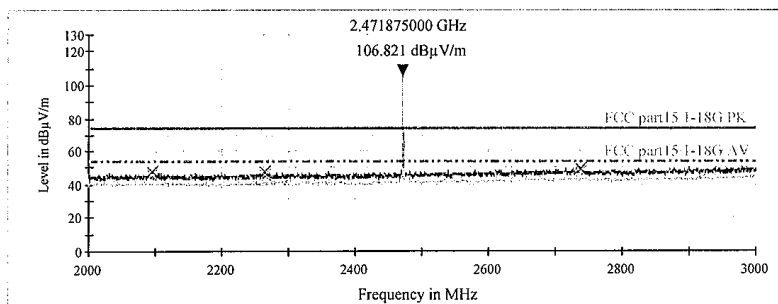

Limit and Margin PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2095.000000	48.1	1000.0	1000.000	V	31.8	25.9	74.0
2264.000000	47.5	1000.0	1000.000	V	32.1	26.5	74.0
2737.000000	49.8	1000.0	1000.000	V	33.5	24.2	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2095.000000	45.7	1000.0	1000.000	V	31.8	8.3	54.0
2264.000000	46.2	1000.0	1000.000	V	32.1	7.8	54.0
2737.000000	48.1	1000.0	1000.000	V	33.5	5.9	54.0

Date: 4/24/2014 - Time: 9:59:31

Tested by:  Reviewed by: 



Prüfbericht - Nr.:

16060045 001

Seite 21 von 39

Test Report No.

Page 21 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Mid channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1

Frequency Range:


2GHz-3GHz

Receiver:

TUV FSP30

Transducer:

TUV SAC HF907/ TUV FSP30-TUV SAC HF907

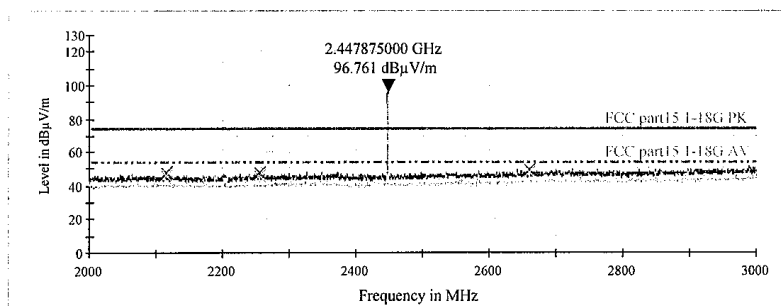

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2116.000000	47.6	1000.0	1000.000	H	31.8	26.4	74.0
2255.000000	48.0	1000.0	1000.000	H	32.0	26.0	74.0
2661.000000	49.2	1000.0	1000.000	H	33.9	24.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2116.000000	45.8	1000.0	1000.000	H	31.8	8.2	54.0
2255.000000	46.0	1000.0	1000.000	H	32.0	8.0	54.0
2661.000000	47.6	1000.0	1000.000	H	33.9	6.4	54.0



Date: 4/24/2014 - Time: 9:50:30

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 22 von 39

Test Report No.

Page 22 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Mid channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range: 2GHz-3GHz
Receiver: TUV FSP30
Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

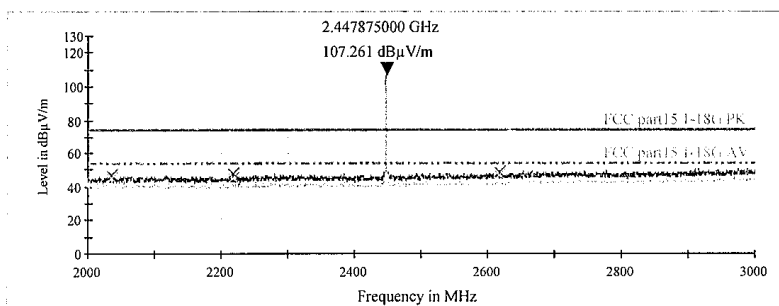

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2036.000000	46.6	1000.0	1000.000	V	32.1	27.4	74.0
2218.000000	47.5	1000.0	1000.000	V	31.9	26.5	74.0
2618.000000	49.0	1000.0	1000.000	V	33.8	25.0	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2036.000000	45.1	1000.0	1000.000	V	32.1	8.9	54.0
2218.000000	45.4	1000.0	1000.000	V	31.9	8.6	54.0
2618.000000	47.2	1000.0	1000.000	V	33.8	6.8	54.0

Date: 4/24/2014 - Time: 9:46:31

Tested by: _____ Reviewed by: _____



Prüfbericht - Nr.:

16060045 001

Seite 23 von 39

Test Report No.

Page 23 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Low channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1

Frequency Range:


2GHz-3GHz

Receiver:

TUV FSP30

Transducer:

TUV SAC HF907/ TUV FSP30-TUV SAC HF907

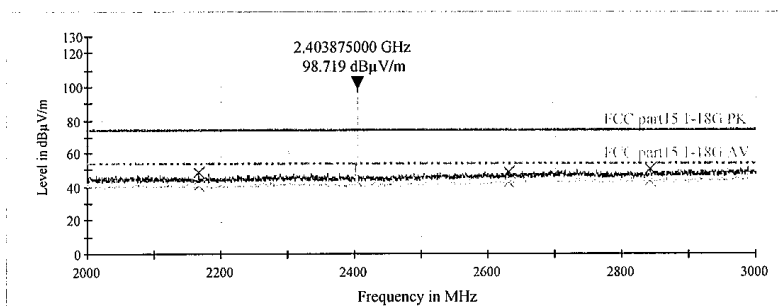


Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2166.000000	48.4	1000.0	1000.000	H	31.7	25.6	74.0
2631.000000	49.1	1000.0	1000.000	H	33.8	24.9	74.0
2842.000000	50.1	1000.0	1000.000	H	33.8	23.9	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2166.000000	40.4	1000.0	1000.000	H	31.7	13.6	54.0
2631.000000	42.1	1000.0	1000.000	H	33.8	11.9	54.0
2842.000000	43.0	1000.0	1000.000	H	33.8	11.0	54.0



Date: 4/24/2014 - Time: 9:29:16

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 24 von 39

Test Report No.

Page 24 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information


Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Low channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range: 2GHz-3GHz

Receiver: TUV FSP30

Transducer: TUV SAC HF907/ TUV FSP30-TUV SAC HF907

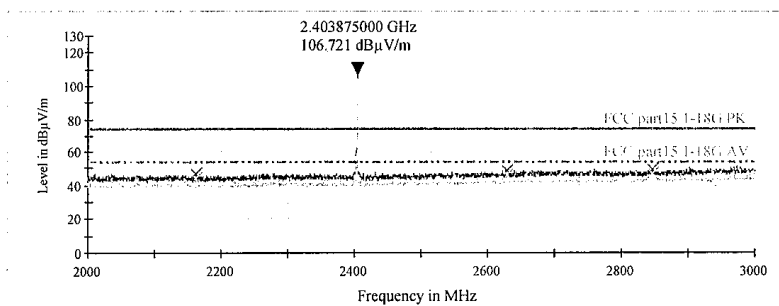

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2162.000000	46.7	1000.0	1000.000	V	31.7	27.3	74.0
2628.000000	49.0	1000.0	1000.000	V	33.8	25.0	74.0
2847.000000	49.9	1000.0	1000.000	V	33.8	24.1	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2162.000000	44.2	1000.0	1000.000	V	31.7	9.8	54.0
2628.000000	46.2	1000.0	1000.000	V	33.8	7.8	54.0
2847.000000	47.2	1000.0	1000.000	V	33.8	6.8	54.0



Sign-off Test Data



Date: 4/24/2014 - Time: 9:38:07

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060045 001

Seite 25 von 39

Test Report No.

Page 25 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ High channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1

Frequency Range: 18GHz-25GHz
Receiver: TUV FSP30
Transducer: TUV SAC 3160-09/ TUV FSP30-TUV SAC 3160-09

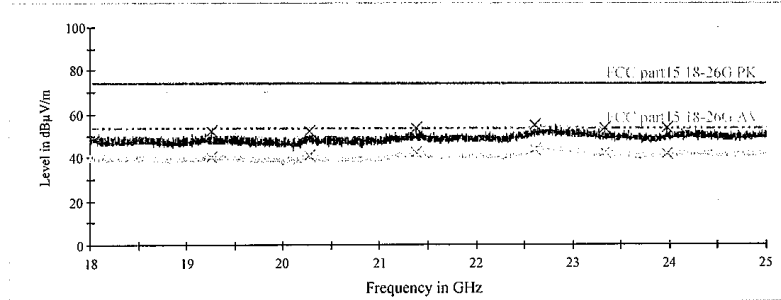

Limit and Margin PK


Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
19264.000000	52.2	1000.0	1000.000	H	5.0	21.8	74.0
20269.000000	52.6	1000.0	1000.000	H	4.8	21.4	74.0
21377.000000	53.9	1000.0	1000.000	H	6.0	20.1	74.0
22612.000000	55.1	1000.0	1000.000	H	9.0	18.9	74.0
23328.000000	53.8	1000.0	1000.000	H	6.8	20.2	74.0
23970.000000	63.7	1000.0	1000.000	H	5.9	20.3	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
19264.000000	40.0	1000.0	1000.000	H	5.0	14.0	54.0
20269.000000	40.8	1000.0	1000.000	H	4.8	13.2	54.0
21377.000000	41.9	1000.0	1000.000	H	6.0	12.1	54.0
22612.000000	43.6	1000.0	1000.000	H	9.0	10.4	54.0
23328.000000	42.1	1000.0	1000.000	H	6.8	11.9	54.0
23970.000000	41.7	1000.0	1000.000	H	5.9	12.3	54.0

Date: 4/24/2014 - Time: 2:44:03

Sign-off Test Data
Tested by: 

Reviewed by: 



Prüfbericht - Nr.:

16060045 001

Seite 26 von 39

Test Report No.

Page 26 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information


Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ High channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range: 18GHz-25GHz

Receiver: TUV FSP30

Transducer: TUV SAC 3160-09/ TUV FSP30-TUV SAC 3160-09

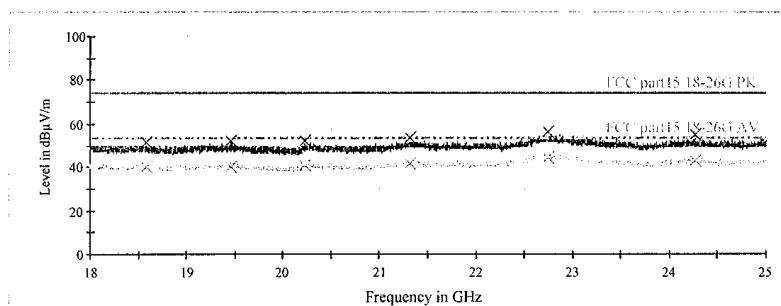

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/)
18587.000000	52.0	1000.0	1000.000	V	4.4	22.0	74.0
19460.000000	52.5	1000.0	1000.000	V	4.9	21.5	74.0
20226.000000	52.4	1000.0	1000.000	V	4.8	21.6	74.0
21319.000000	54.0	1000.0	1000.000	V	5.9	20.0	74.0
22747.000000	56.3	1000.0	1000.000	V	9.0	17.7	74.0
24262.000000	54.8	1000.0	1000.000	V	5.9	19.2	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/)
18587.000000	40.0	1000.0	1000.000	V	4.4	14.0	54.0
19460.000000	40.3	1000.0	1000.000	V	4.9	13.7	54.0
20226.000000	40.9	1000.0	1000.000	V	4.8	13.1	54.0
21319.000000	41.8	1000.0	1000.000	V	5.9	12.2	54.0
22747.000000	44.5	1000.0	1000.000	V	9.0	9.5	54.0
24262.000000	42.9	1000.0	1000.000	V	5.9	11.1	54.0

Date: 4/24/2014 - Time: 2:46:24

Sign-off Test Data
Tested by: [Signature]
Checked by: [Signature]

Reviewed by: [Signature]
HCH
2014-04-24

Prüfbericht - Nr.:

16060045 001

Seite 27 von 39

Test Report No.

Page 27 of 39

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Mid channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1
Frequency Range: 18GHz-25GHz
Receiver: TUV FSP30
Transducer: TUV SAC 3160-09/ TUV FSP30-TUV SAC 3160-09

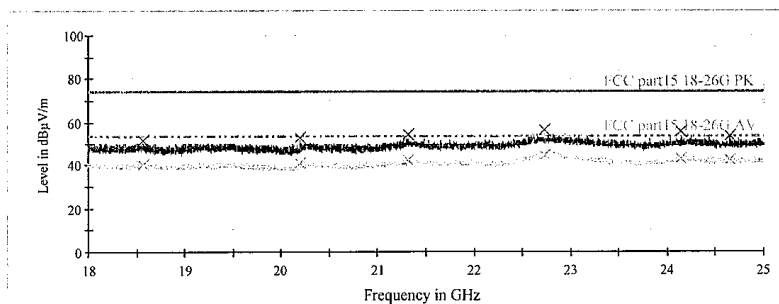

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/)
18569.000000	51.7	1000.0	1000.000	H	4.3	22.3	74.0
20202.000000	53.0	1000.0	1000.000	H	4.7	21.0	74.0
21313.000000	54.5	1000.0	1000.000	H	5.9	19.5	74.0
22726.000000	56.4	1000.0	1000.000	H	9.0	17.6	74.0
24143.000000	55.6	1000.0	1000.000	H	5.9	18.4	74.0
24650.000000	53.5	1000.0	1000.000	H	6.2	20.5	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/)
18569.000000	40.2	1000.0	1000.000	H	4.3	13.8	54.0
20202.000000	40.5	1000.0	1000.000	H	4.7	13.5	54.0
21313.000000	41.9	1000.0	1000.000	H	5.9	12.1	54.0
22726.000000	44.5	1000.0	1000.000	H	9.0	9.5	54.0
24143.000000	42.9	1000.0	1000.000	H	5.9	11.1	54.0
24650.000000	41.9	1000.0	1000.000	H	6.2	12.1	54.0

Date: 4/24/2014 - Time: 2:40:48

Tested by:  Checked:  Reviewed by: 

Prüfbericht - Nr.:

16060045 001

Seite 28 von 39

Test Report No.

Page 28 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Mid channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal vertical.

Subrange 1

Frequency Range: 18GHz-25GHz
Receiver: TUV FSP30
Transducer: TUV SAC 3160-09/ TUV FSP30-TUV SAC 3160-09

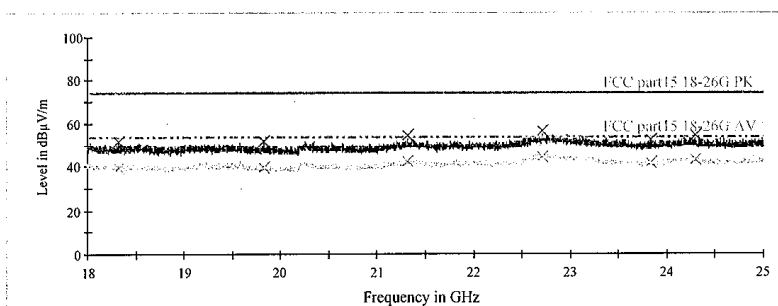


Limit and Margin PK


Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBμV)
18326.000000	51.4	1000.0	1000.000	V	4.0	22.6	74.0
19832.000000	51.4	1000.0	1000.000	V	4.7	22.6	74.0
21321.000000	54.1	1000.0	1000.000	V	5.9	19.9	74.0
22718.000000	56.3	1000.0	1000.000	V	9.0	17.7	74.0
23833.000000	52.6	1000.0	1000.000	V	5.7	21.4	74.0
24291.000000	54.7	1000.0	1000.000	V	5.9	19.3	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBμV)
18326.000000	39.8	1000.0	1000.000	V	4.0	14.2	54.0
19832.000000	39.7	1000.0	1000.000	V	4.7	14.3	54.0
21321.000000	42.2	1000.0	1000.000	V	5.9	11.8	54.0
22718.000000	44.4	1000.0	1000.000	V	9.0	9.6	54.0
23833.000000	41.2	1000.0	1000.000	V	5.7	12.8	54.0
24291.000000	42.9	1000.0	1000.000	V	5.9	11.1	54.0

Date: 4/24/2014 - Time: 2:38:27

Tested by:  Reviewed by: 

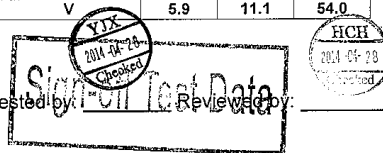

Prüfbericht - Nr.:

16060045 001

Seite 29 von 39

Test Report No.

Page 29 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Low channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1

Frequency Range: 18GHz-25GHz
Receiver: TUV FSP30
Transducer: TUV SAC 3160-09/ TUV FSP30-TUV SAC 3160-09

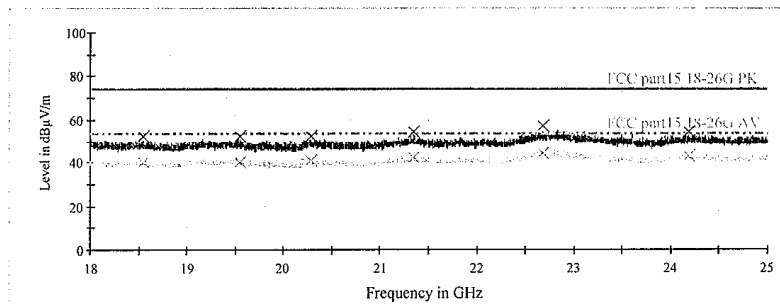

Limit and Margin PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/)
18547.000000	52.2	1000.0	1000.000	H	4.3	21.8	74.0
19558.000000	52.7	1000.0	1000.000	H	4.8	21.3	74.0
20290.000000	52.5	1000.0	1000.000	H	4.8	21.5	74.0
21342.000000	54.2	1000.0	1000.000	H	6.0	19.8	74.0
22680.000000	56.9	1000.0	1000.000	H	9.1	17.1	74.0
24189.000000	54.6	1000.0	1000.000	H	6.0	19.4	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/)
18547.000000	40.3	1000.0	1000.000	H	4.3	13.7	54.0
19558.000000	40.3	1000.0	1000.000	H	4.8	13.7	54.0
20290.000000	40.7	1000.0	1000.000	H	4.8	13.3	54.0
21342.000000	42.0	1000.0	1000.000	H	6.0	12.0	54.0
22680.000000	44.4	1000.0	1000.000	H	9.1	9.6	54.0
24189.000000	42.9	1000.0	1000.000	H	6.0	11.1	54.0

Date: 4/24/2014 - Time: 2:32:16

Tested by:  Checked:  Reviewed by:



Prüfbericht - Nr.:

16060045 001

Seite 30 von 39

Test Report No.

Page 30 of 39

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless System
Identification: HXD1
Test Standard: FCC Part 15.209
Test Detail: RE
Operation Mode: Tx @ Low channel
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.0V
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range: 18GHz-25GHz
Receiver: TUV FSP30
Transducer: TUV SAC 3160-09/ TUV FSP30-TUV SAC 3160-09

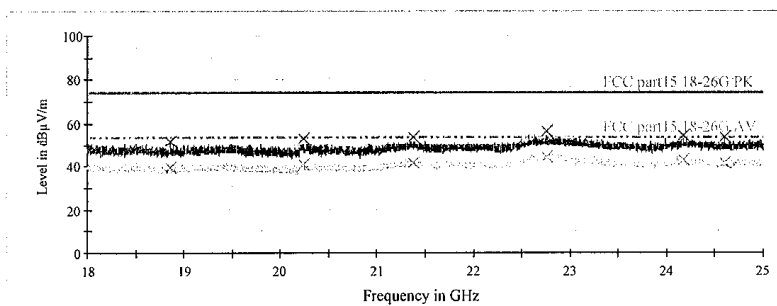

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/)
18858.000000	51.5	1000.0	1000.000	V	4.7	22.5	74.0
20234.000000	52.9	1000.0	1000.000	V	4.8	21.1	74.0
21378.000000	53.9	1000.0	1000.000	V	6.0	20.1	74.0
22757.000000	56.1	1000.0	1000.000	V	8.9	17.9	74.0
24176.000000	54.6	1000.0	1000.000	V	6.0	19.4	74.0
24602.000000	53.7	1000.0	1000.000	V	6.1	20.3	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/)
18858.000000	39.3	1000.0	1000.000	V	4.7	14.7	54.0
20234.000000	40.9	1000.0	1000.000	V	4.8	13.1	54.0
21378.000000	41.7	1000.0	1000.000	V	6.0	12.3	54.0
22757.000000	44.4	1000.0	1000.000	V	8.9	9.6	54.0
24176.000000	42.8	1000.0	1000.000	V	6.0	11.2	54.0
24602.000000	41.8	1000.0	1000.000	V	6.1	12.2	54.0

Date: 4/24/2014 - Time: 2:35:15

Tested by:  Data
Reviewed by: 
Checked: 


Prüfbericht - Nr.:

16060045 001

Seite 31 von 39

Test Report No.

Page 31 of 39

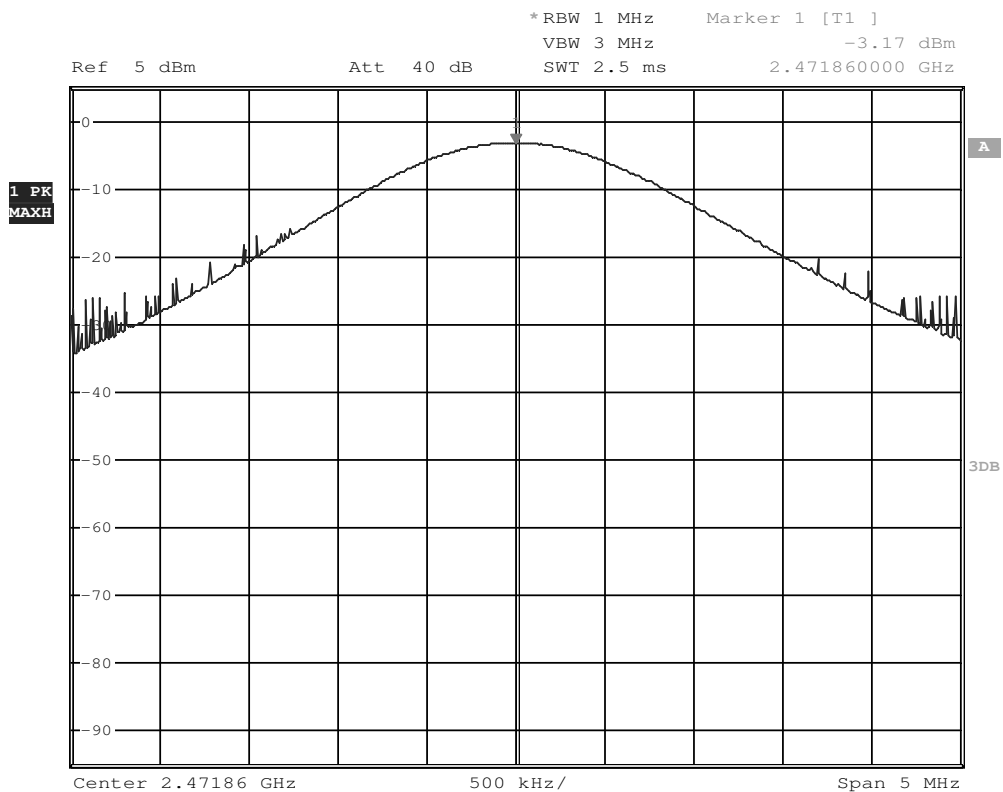

Date: 28.MAY.2014 02:01:47


Prüfbericht - Nr.:

16060045 001

Seite 32 von 39

Test Report No.

Page 32 of 39

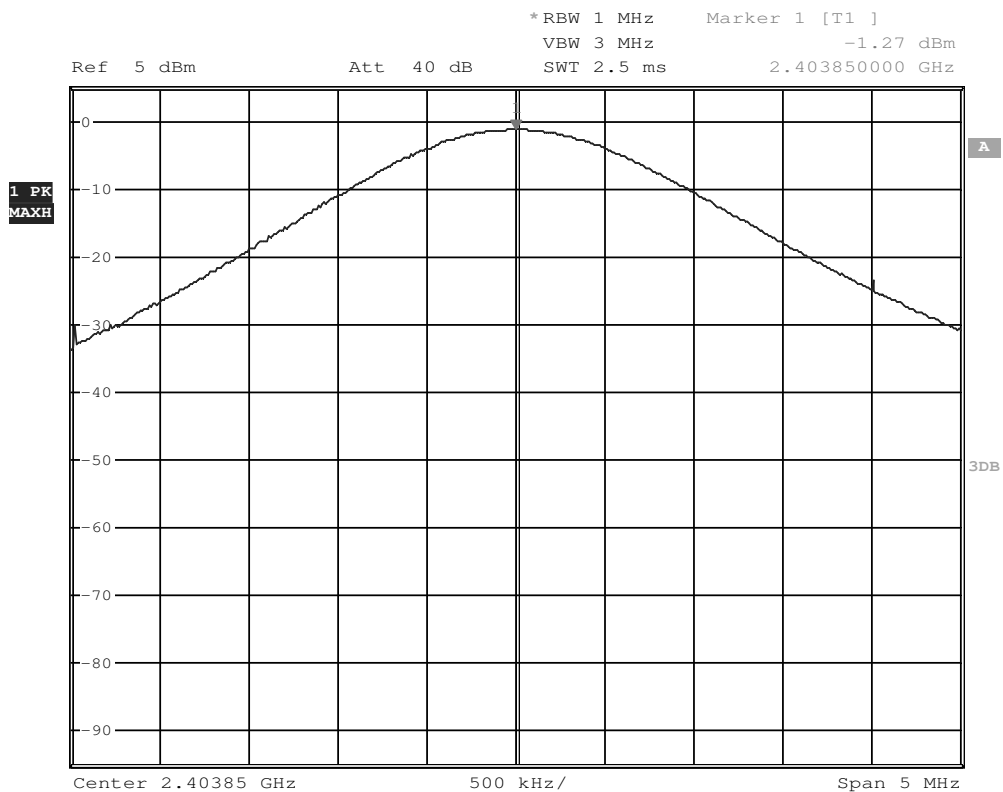

Date: 28.MAY.2014 01:47:35


Prüfbericht - Nr.:

16060045 001

Seite 33 von 39

Test Report No.

Page 33 of 39

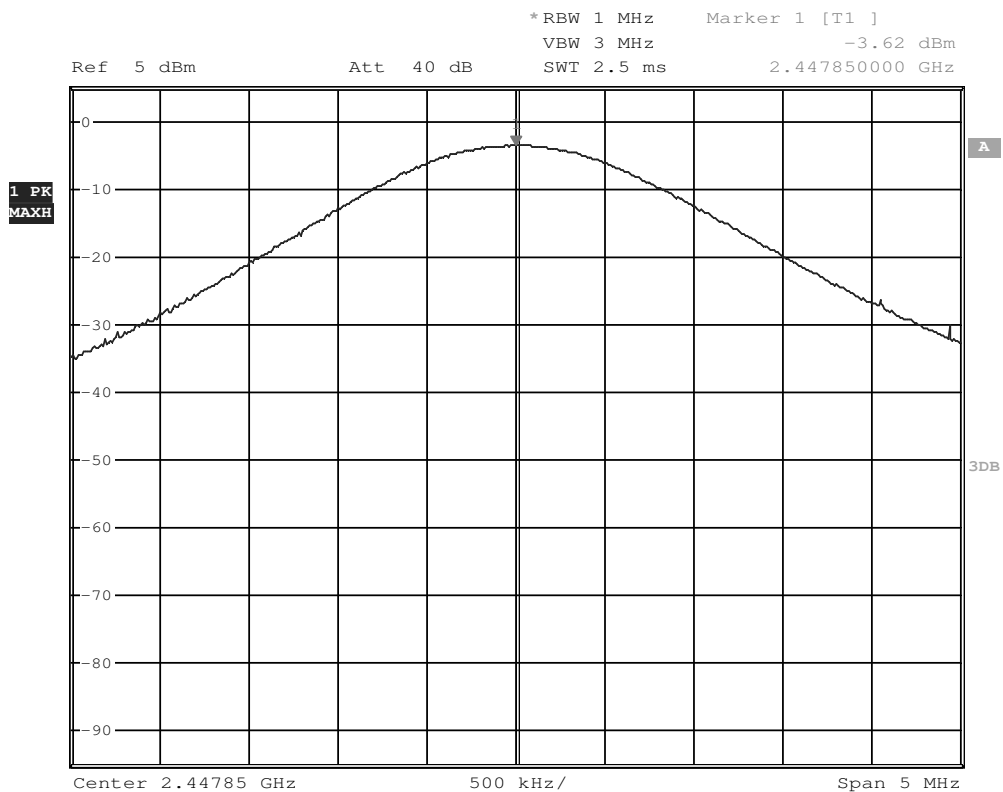

Date: 28.MAY.2014 01:56:31

Prüfbericht - Nr.:


16060045 001

Test Report No.


Seite 34 von 39

Page 34 of 39

6dB Bandwidth

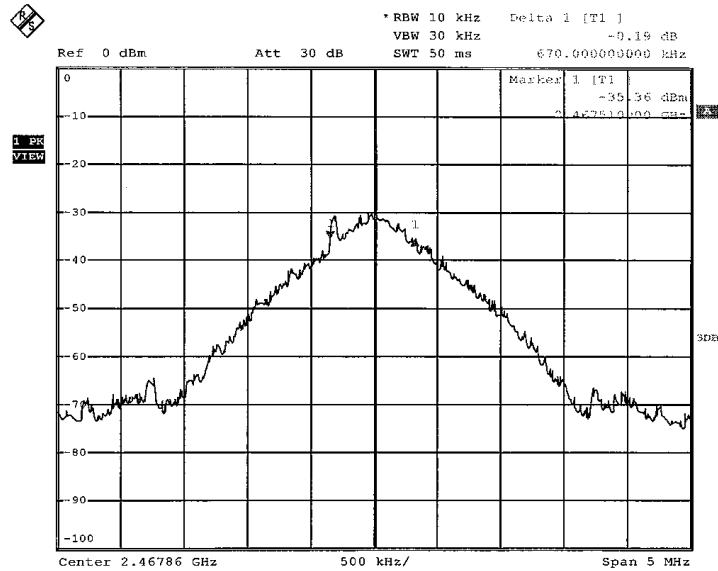

Date: 13.MAY.2014 22:22:54

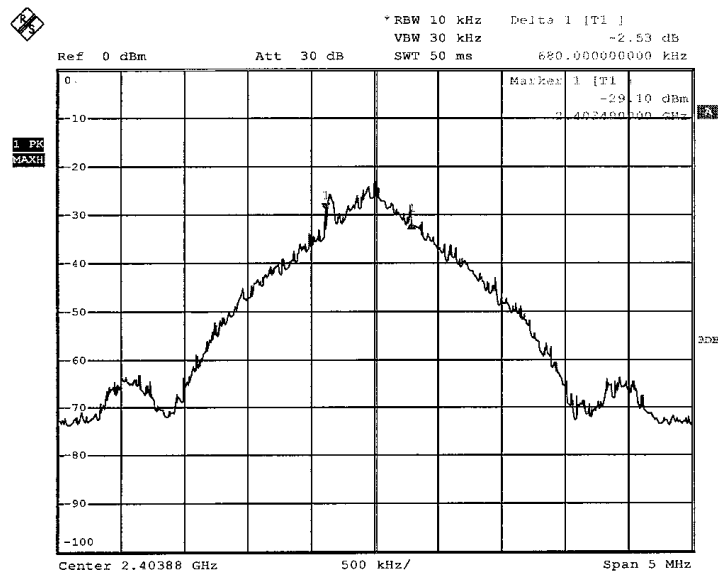

Date: 13.MAY.2014 22:01:28

Prüfbericht - Nr.:


16060045 001

Test Report No.


Seite 35 von 39

Page 35 of 39

Band edge Emission

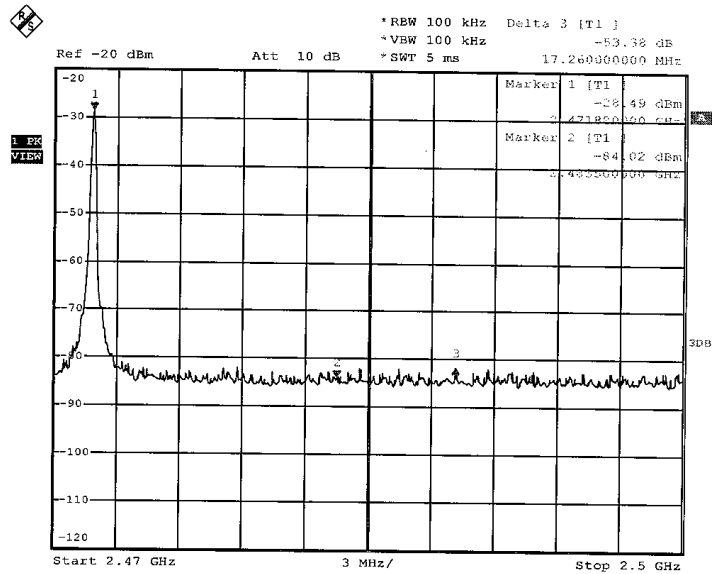

Date: 24.APR.2014 23:46:16

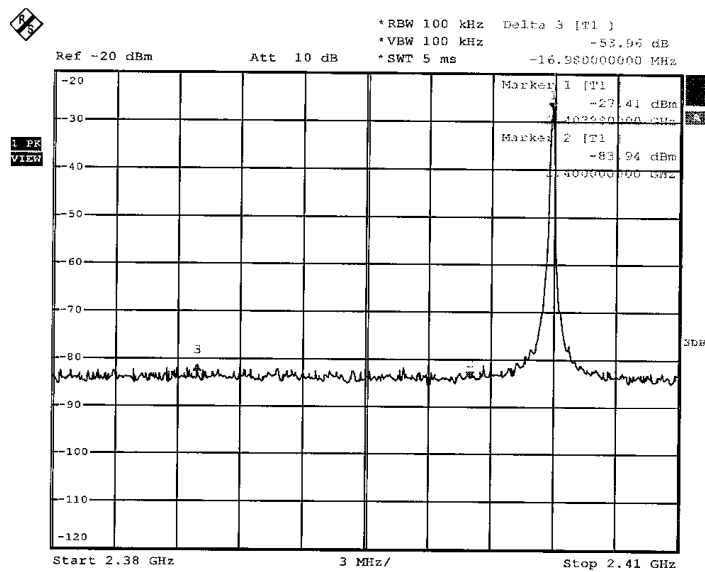

Date: 24.APR.2014 23:54:05


Prüfbericht - Nr.:

16060045 001


Seite 36 von 39

Test Report No.


Page 36 of 39

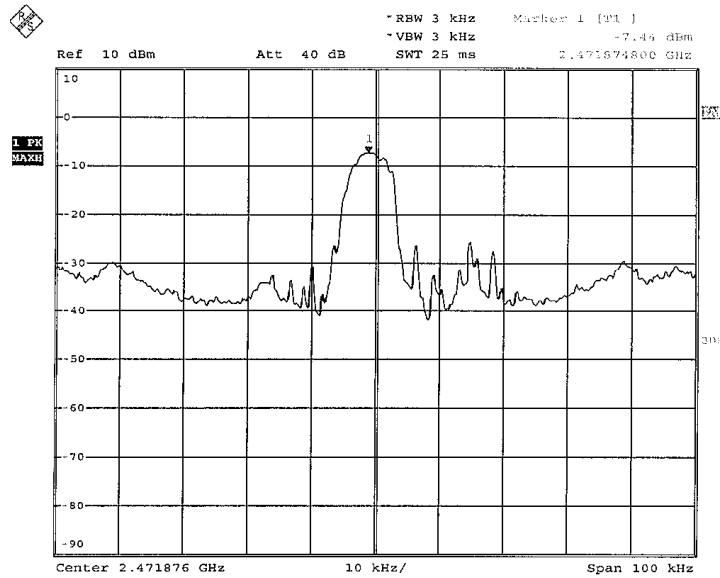

20140425 HXD1 Power spectral density H

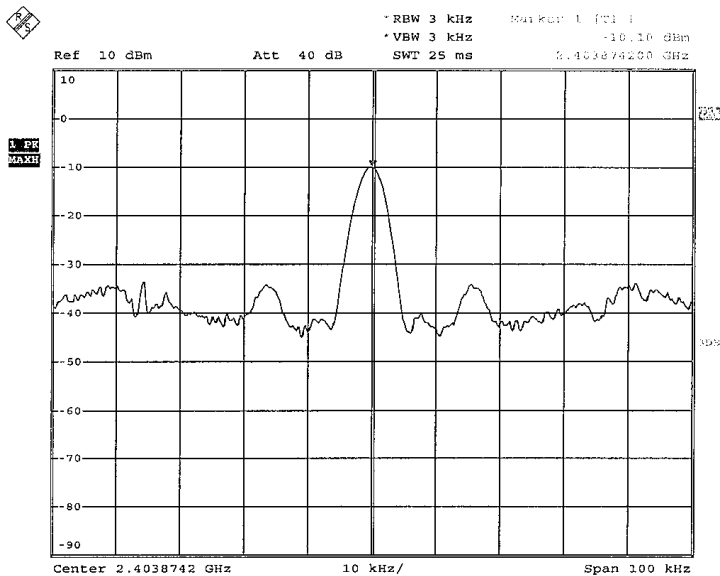

20140425 HXD1 Power spectral density L




Prüfbericht - Nr.:

16060045 001


Seite 37 von 39

Test Report No.

Page 37 of 39

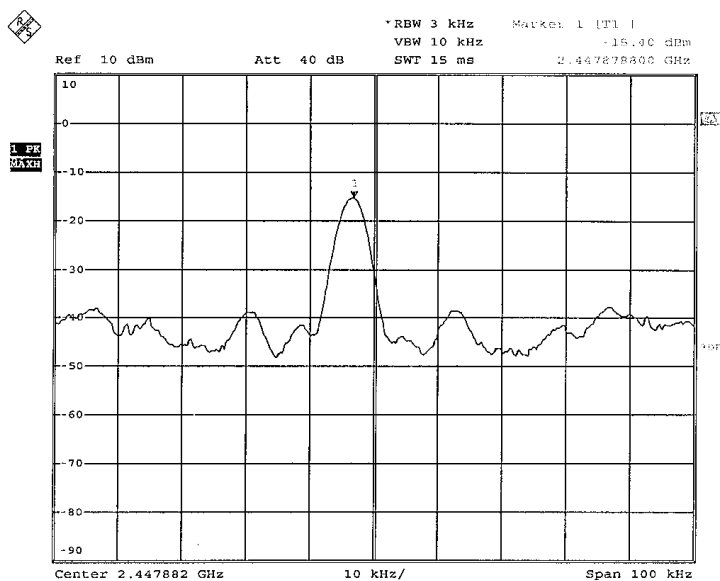

20140425 HXD1 Power spectral density M



Prüfbericht - Nr.:


16060045 001

Seite 38 von 39


Page 38 of 39

Test Report No.

Out-of-Band Emission

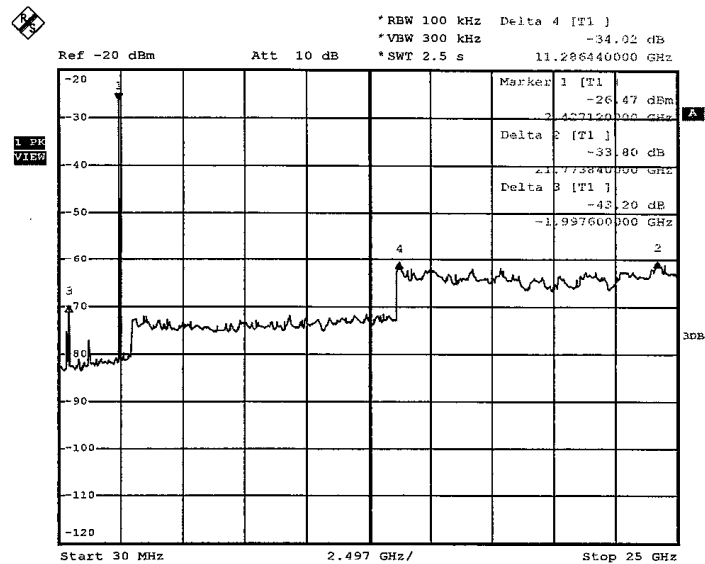


Date: 24.APR.2014 23:27:26

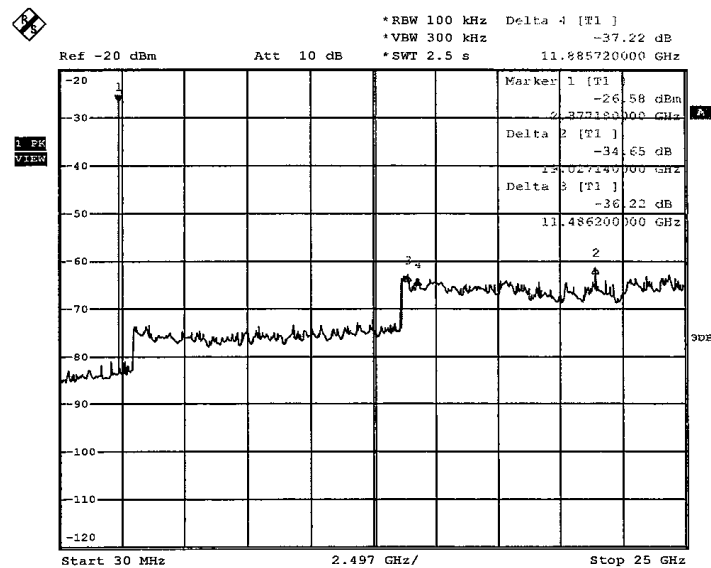

Date: 24.APR.2014 23:30:17

Prüfbericht - Nr.: 16060045 001
Test Report No.

Seite 39 von 39
Page 39 of 39

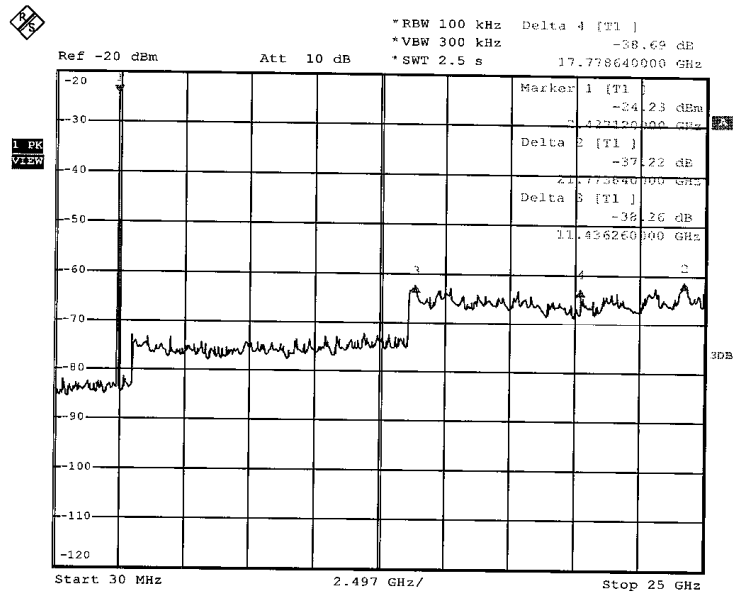

Date: 24.APR.2014 23:36:50