


Prüfbericht-Nr.: Test Report No.:	16060046 001	Auftrags-Nr.: Order No.:	174020628	Seite 1 von 15 Page 1 of 15	
Kunden-Referenz-Nr.: Client Reference No.:	352690	Auftragsdatum: Order date.:	30.Mar.2014		
Auftraggeber: Client:	Seikaku Technical Group Limited Offshore Chambers, P.O. Box 217 Apia, Samoa.				
Prüfgegenstand: Test item:	USB Digital Wireless System				
Bezeichnung / Typ-Nr.: Identification / Type No.:	RXD1	FCC ID: FCC ID	CCRRXD1		
Auftrags-Inhalt: Order content:	TUV Rheinland - EMC service				
Prüfgrundlage: Test specification:	Conducted Emission limits describes at FCC 47 CFR Part 15 (October 1, 2013) Subpart B section 15.107 (a) Radiated Emission limits describes at FCC 47 CFR Part 15 (October 1, 2013) Subpart B section 15.109 (a) Test method was quoted from ANSI C63.4:2009.				
Wareneingangsdatum: Date of receipt:	10.Apr.2014				
Prüfmuster-Nr.: Test sample No.:	N/A				
Prüfzeitraum: Testing period:	Refer to the test report				
Ort der Prüfung: Place of testing:	Refer to section 2.1				
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Guangdong) Ltd.				
Prüfergebnis*: Test result*:	Pass				
geprüft von / tested by:		kontrolliert von / reviewed by:			
15.May.2014 Frank Du/Project Manager 		15.May.2014 Liangdong Xie/Project Manager 			
Datum Date	Name/Stellung Name/Position	Unterschrift Signature	Datum Date	Name/Stellung Name/Position	Unterschrift Signature
Sonstiges / Other:					
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:			Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.					

Prüfbericht - Nr.: 16060046 001
*Test Report No.:***Seite 2 von 15**
Page 2 of 15

TEST SUMMARY

5.1 CONDUCTED EMISSION FOR FCC 47 CFR PART 15 SECTION 15.107(A)
RESULT: Pass

5.2 RADIATED EMISSION FOR FCC 47 CFR PART 15 SECTION 15.109(A)
RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS.....	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	SUBMITTED DOCUMENTS	8
4	TEST SET-UP AND OPERATION MODE.....	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	9
4.2	TEST OPERATION AND TEST SOFTWARE	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	9
4.5	TEST SET-UP	10
5	TEST RESULTS OF EMISSIONS	11
5.1	<i>Conducted Emission for FCC 47 CFR Part 15 Section 15.107(a).....</i>	<i>11</i>
5.2	<i>Radiated Emission for FCC 47 CFR Part 15 Section 15.109(a)</i>	<i>12</i>
6	PHOTOGRAPHS OF THE TEST SET-UP.....	13
7	LIST OF TABLES.....	15
8	LIST OF PHOTOGRAPHS	15

Prüfbericht - Nr.: 16060046 001
*Test Report No.:***Seite 4 von 15**
Page 4 of 15

1 General Remarks

When basic standards are applied in this test report, the latest amendments are always included.

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test Result

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

No.102, 1F of Southwest Warehouse Building, No.767 TianYuan Road,
Tianhe District, Guangzhou, P.R.China, 510650

Prüfbericht - Nr.: 16060046 001
Test Report No.:

Seite 5 von 15
Page 5 of 15

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Last Calibrated	Calibration Interval
TÜV Rheinland (Guangdong) Ltd. EMC Laboratory					
EMI Test Receiver	Rohde & Schwarz	ESCS30	100316	16.03.2014	1 year
EMI Test Receiver	Rohde & Schwarz	ESCI-3	100216	16.03.2014	1 year
Spectrum Analyser	Rohde & Schwarz	FSP30	100286	16.03.2014	1 year
Bi-log Antenna	Schwarzbeck	VULB9168	209	16.03.2014	1 year
Horn Antenna	Rohde & Schwarz	HF906	100385	16.03.2014	1 year
Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100114	16.03.2014	1 year
1-18GHz Amplifier	MITEO	AFS42-0101800-25-S-42	1101599	16.03.2014	1 year
3m Semi Anechoic Chamber	Albatross Projects	---	---	16.03.2014	1 year

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

Prüfbericht - Nr.: 16060046 001
Test Report No.:

Seite 6 von 15
Page 6 of 15

2.5 Measurement Uncertainty

Uncertainty of conducted emissions measurements 2.68 dB

Uncertainty of radiated emissions measurements 5.16dB (30-1000 MHz)

The reported expanded uncertainty is based on a standard uncertainty multiply by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangdong) file for certification follow-up purposes.

2.7 Status of facility used for testing

TÜV Rheinland (Guangdong) Ltd. is listed on the US Federal Communications Commission list of facilities approved to perform measurements, whose registration number is 833845.

3 General Product Information

The submitted sample RXD1 is a wireless receiver, it operates with transmitter HXD1. It uses digital modulation technics and operates in 2400 frequency band.

For details refer to the User Manual and Circuit Diagram.

3.1 Product Function and Intended Use

Refer to Technical Documentation and User Manual.

3.2 Ratings and System Details

Type Designation	:	RXD1
Frequency range	:	2404.0 MHz –2476.0MHz
Number of employed channels	:	5 channels
Channel Spacing	:	2MHz
Modulation Type	:	GFSK
Type of antenna	:	Integral antenna
Power supply	:	DC5.0V(USB powered)
Equipment type	:	Portable Equipment
Protection Class	:	III

Refer to the Technical Documentation for further information.

Prüfbericht - Nr.: 16060046 001
Test Report No.:

Seite 8 von 15
Page 8 of 15

3.3 Independent Operation Modes

The basic operation modes are:

A. receiving

Refer to user manual for further information.

3.4 Submitted Documents

Construction Drawing
Circuit Diagram
PCB Layout
Parts List
Rating Label
User Manual

Prüfbericht - Nr.: 16060046 001
Test Report No.:

Seite 9 von 15
Page 9 of 15

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment


None.

4.4 Countermeasures to achieve EMC Compliance


No additional countermeasures to the submitted test sample(s) were employed to achieve compliance.

4.5 Test set-up

Radiated Emission Setup

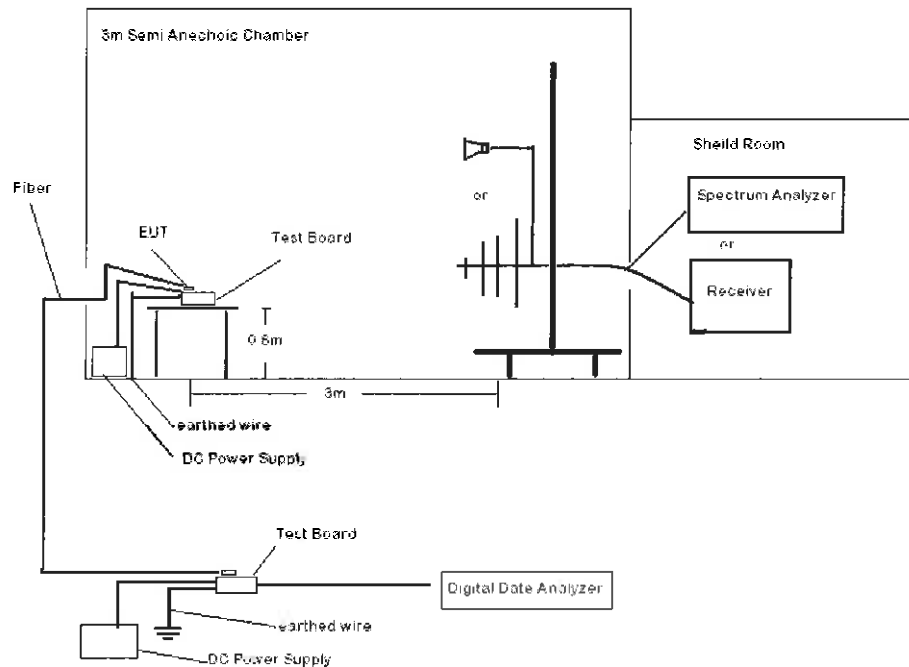

Conducted Emission Setup

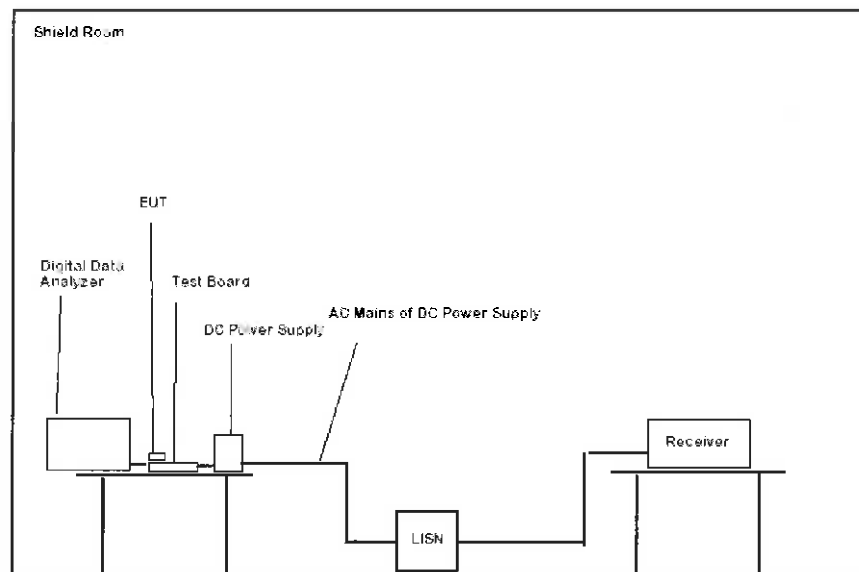

Prüfbericht - Nr.: 16060046 001
Test Report No.:Seite 11 von 15
Page 11 of 15

5 Test Results of Emissions

5.1 Conducted Emission for FCC 47 CFR Part 15 Section 15.107(a)

RESULT:**Pass**

Date of testing	:	15.04.2014
Test procedure	:	ANSI C63.4:2009, Clause 7.2
Equipment class	:	B
Limits	:	FCC 47 CFR Part 15 Subpart B Section 15.107 (a), limit for Class B equipment.

Test Setup

Input voltage	:	AC120V, 60Hz
Operation mode	:	A. Receiving
Temperature	:	20°C
Humidity	:	50%

Test procedure:

For tabletop device, the EUT and its peripherals were placed on a wooden table, 0.8cm above the horizontal reference plane and 40cm away from vertical reference plane in a shielded room. For floor-standing device, the EUT shall be placed either directly on the reference ground plane or on insulating material as described in ANSI C63.4 Clause 6.3.2.1. The EUT was connected to input power source through a line impedance stabilization network (LISN). The excess length of the power cord between the EUT and the LISN shall be folded back and forth at the center of the lead to form a bundle not exceeding 40cm in length.

The EUT was tested in a typical model of operation in accordance with ANSI C63.4:2009, Pre-test was performed in peak and average detection mode. final measurement was performed using quasi-peak and average detection on the live and neutral lines with the worst case.

The test software Rohde & Schwarz EMC32 was used during the test.

If the result of the measurement with the Quasi Peak detector is below the Average limit, the measurement with Average Detector may be omitted.

Refer to appendix 1 for test result.

Prüfbericht - Nr.: 16060046 001
Test Report No.:

Seite 12 von 15
Page 12 of 15

5.2 Radiated Emission for FCC 47 CFR Part 15 Section 15.109(a)

RESULT:

Pass

Date of testing	:	15.04.2014
Test procedure	:	ANSI C63.4:2009, Clause 8.3
Equipment class	:	B
Limits	:	FCC 47 CFR Part 15 Subpart B section 15.109 (a), limit for Class B equipment.

Test Setup

Input voltage	:	AC120V, 60Hz
Operation mode	:	A. Receiving
Temperature	:	20°C
Humidity	:	50%

Test procedure:

For tabletop device, the and its peripherals were placed on a wooden table, 80cm above ground plane in semi-anechoic chamber. For floor-standing equipment, the EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material in semi-anechoic chamber.

The EUT was set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower. Test shall be made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height shall be varied from 1m to 4m. The table was rotated 360 degrees to detect the suspected emission frequency points. The position of the worst radiation case with both horizontal and vertical receiving antenna polarization was recorded together with the suspected emission frequency points above-mentioned.

The EUT was tested in a typical model of operation in accordance with ANSI C63.4:2009, Pre-test was performed in peak detection mode. Final measurement was performed using quasi-peak detection with the worst case.

The test software Rohde & Schwarz EMC32 was used during the test.

Refer to appendix 1 for test result. The highest frequency of the internal sources of the EUT is less than 108MHz. The measurement shall only be made up to 1000MHz.

Prüfbericht - Nr.: 16060046 001
Test Report No.:

Seite 13 von 15
Page 13 of 15

6 Photographs of the Test Set-Up


Photograph 1: Set-up for Conducted Emission



Prüfbericht - Nr.: 16060046 001
Test Report No.:

Seite 14 von 15
Page 14 of 15

Photograph 2: Set-up for Radiated Emission (30MHz-1GHz)

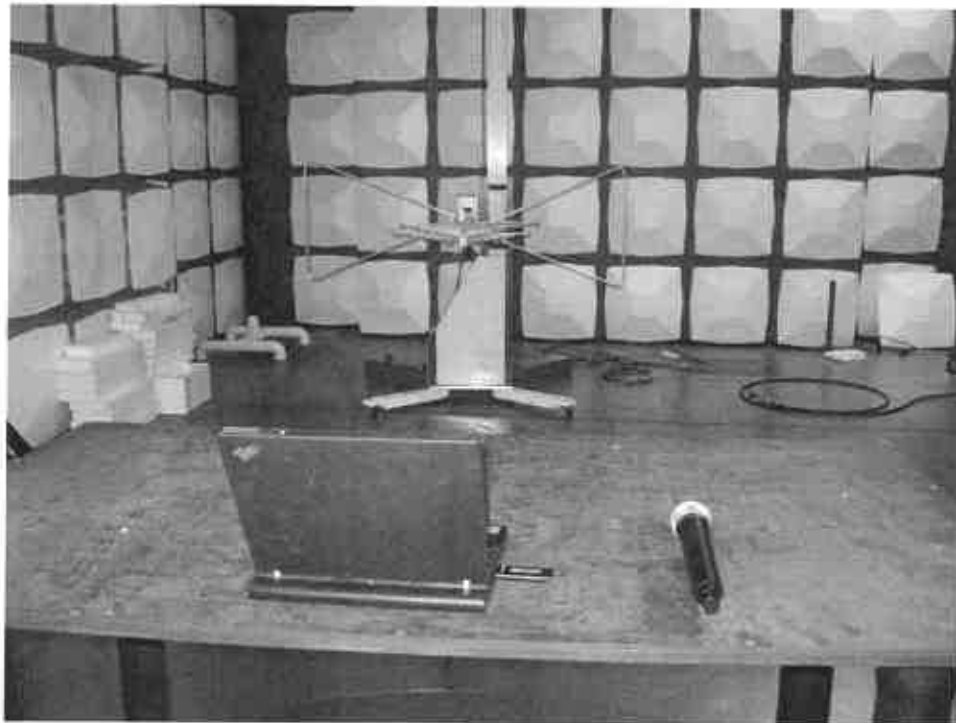

Prüfbericht - Nr.: 16060046 001
Test Report No.:

Seite 15 von 15
Page 15 of 15

7 List of Tables

Table 1: List of Test and Measurement Equipment.....5

8 List of Photographs

Photograph 1: Set-up for Conducted Emission 13
Photograph 2: Set-up for Radiated Emission (30MHz-1GHz)..... 14

Prüfbericht - Nr.:

16060046 001

Seite 1 von 4

Test Report No.

Page 1 of 4

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

EMC Test Record (EMISSION)


Common Information

Manufacturer: Seikaku
Test Item: Wireless receiver
Identification: RXD1 & HXD1
Test Standard: FCC Part 15, (D)
Test Detail: Conducted Emission
Operation Mode: A
Climate Condition: 20°C; 50%RH; 101kPa.
Test Voltage/ Freq.: AC 120 V/ 60 Hz
Port / Line: AC Mains(L1+N)
Receipt No.: 174020628
Report No.: 16060046 001
Result: Pass
/



Hardware Setup: 1phase LISN ESH3-Z5 to ESS
Level Unit: dBμV

Subrange	Detectors	IF Bandwidth	Step Size	Meas. Time	Receiver
150kHz - 30MHz	Peak, Average	9kHz	4.5kHz	10ms	ESS

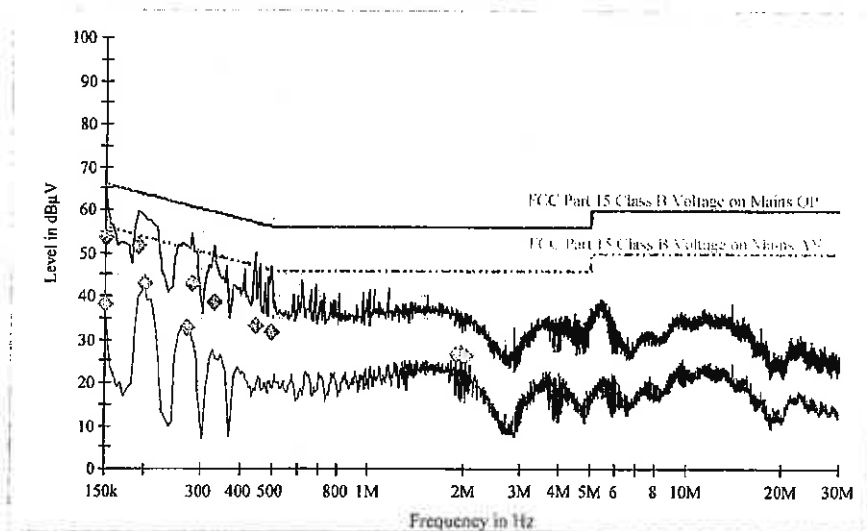

Sign-off To



4/15/2014, 10:37:55

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060046 001

Seite 2 von 4

Test Report No.

Page 2 of 4

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	53.3	2000.0	10.000	GND	L1	10.1	12.7	66.0	
0.190500	51.6	2000.0	10.000	GND	L1	10.0	12.4	64.0	
0.280500	43.1	2000.0	10.000	GND	N	10.0	17.7	60.8	
0.330000	38.6	2000.0	10.000	GND	N	10.1	20.9	59.5	
0.442500	33.1	2000.0	10.000	GND	N	10.1	23.9	57.0	
0.496500	31.5	2000.0	10.000	GND	N	10.2	24.6	56.1	

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	38.2	2000.0	10.000	GND	L1	10.1	17.8	56.0	
0.199500	42.9	2000.0	10.000	GND	L1	10.0	10.7	53.6	
0.271500	32.7	2000.0	10.000	GND	L1	10.0	18.4	51.1	
1.887000	26.5	2000.0	10.000	GND	N	10.2	19.5	46.0	
1.954500	26.9	2000.0	10.000	GND	N	10.1	19.1	46.0	
2.022000	26.2	2000.0	10.000	GND	N	10.2	19.8	46.0	

Sign-off Test Data



4/15/2014, 10:37:55

Tested by: _____ Reviewed by: _____

Prüfbericht - Nr.:

16060046 001

Seite 3 von 4

Test Report No.

Page 3 of 4

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless receiver
Identification: RXD1
Test Standard: FCC Part 15.109
Test Detail: RE
Operation Mode: A
Climate Condition: 23°C ; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1
Frequency Range: 30M-1GHz
Receiver: TUV ESCI
Transducer: TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

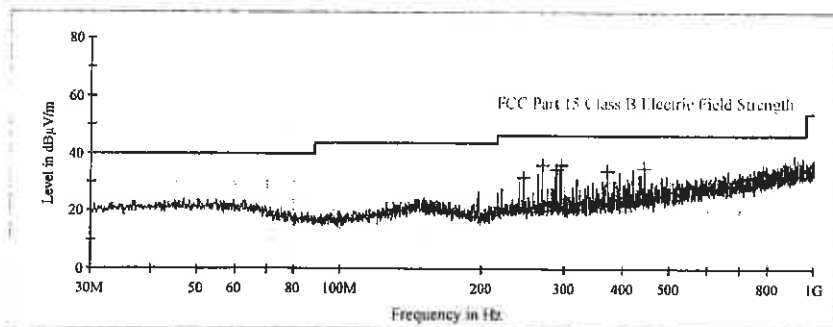

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
245.700000	31.4	1000.0	120.000	H	14.1	14.6	46.0
270.300000	36.9	1000.0	120.000	H	15.0	10.1	46.0
288.250000	34.2	1000.0	120.000	H	15.7	11.8	46.0
294.950000	35.7	1000.0	120.000	H	15.8	10.3	46.0
368.650000	33.7	1000.0	120.000	H	17.8	12.3	46.0
442.350000	34.7	1000.0	120.000	H	19.7	11.3	46.0

Sign-off Test Data

Date: 4/15/2014 - Time: 1:08:30

Tested by:

Reviewed by:



Prüfbericht - Nr.:

16060046 001

Seite 4 von 4

Test Report No.

Page 4 of 4

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: Seikaku
Test Item: Wireless receiver
Identification: RXD1
Test Standard: FCC Part 15.109
Test Detail: RE
Operation Mode: A
Climate Condition: 23°C ; 50 %RH; 101 kPa.
Test Voltage/ Freq: AC 120 V/ 60 Hz
Receipt No: 174020628
Report No: 16060046 001
Result: Pass
Comment: Test distance is 3m, Vertical

Subrange 1

Frequency Range: 30M-1GHz
Receiver: TUV ESCI
Transducer: TUV SAC UVLB 9168/ TUV ESCI -TUV SAC UVLB 9168

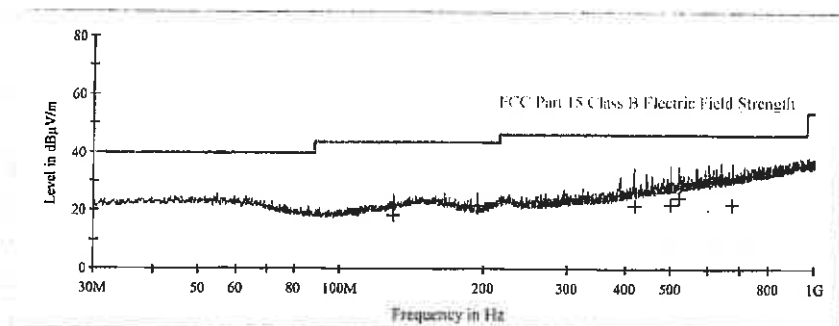

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
129.900000	18.4	1000.0	120.000	V	13.8	25.1	43.5
194.900000	21.5	1000.0	120.000	V	12.8	22.0	43.5
416.550000	21.9	1000.0	120.000	V	19.0	24.1	46.0
499.100000	22.1	1000.0	120.000	V	20.7	23.9	46.0
519.350000	24.7	1000.0	120.000	V	21.2	21.3	46.0
671.900000	22.5	1000.0	120.000	V	24.0	23.5	46.0

Sign-off Test Data

Date: 4/15/2014 - Time: 1:13:18

Tested by: _____ Reviewed by: _____

