



**Nemko Test Report:** 2014 263545 FCC PT101

**Applicant:** Fujitsu Network Communications, Inc.  
Two Blue Hill Plaza  
2<sup>nd</sup> Floor  
Pearl River, NY 10965

**Equipment Under Test:  
(E.U.T.)** GX4000

**FCC Identifier:** CFDGX4000

**In Accordance With:** **CFR 47, Part 101, Subpart C**  
Fixed Microwave Services

**Tested By:** Nemko USA, Inc.  
2210 Faraday Ave, Suite 150  
Carlsbad, CA 92008

**TESTED BY:**

A handwritten signature in black ink, appearing to read 'David Light'.

David Light, Senior Wireless Engineer

**DATE:** 28 July 2014

**APPROVED BY:**

A handwritten signature in black ink, appearing to read 'TBKattasing'.

**DATE:** 13 Aug 2014

Number of pages: 38

**Table of Contents**

|                                                          |    |
|----------------------------------------------------------|----|
| Section 1. Summary of Test Results .....                 | 3  |
| Section 2. General Equipment Specification .....         | 5  |
| Section 3. RF Power Output.....                          | 6  |
| Section 4. Occupied Bandwidth.....                       | 9  |
| Section 5. Spurious Emissions at Antenna Terminals ..... | 12 |
| Section 6. Field Strength of Spurious .....              | 27 |
| Section 7. Test Equipment List.....                      | 28 |
| Annex A - Test Details.....                              | 29 |

**Section 1. Summary of Test Results**

Manufacturer: Fujitsu Network Communications, Inc.

Model No.: GX4000\*

Serial No.: DC version 130003  
AC version 130007

|                              |                    |              |
|------------------------------|--------------------|--------------|
| Part numbers are as follows: | AC upper band unit | TA04011-B939 |
|                              | AC lower band unit | TA04011-B938 |
|                              | DC upper band unit | TA04011-B931 |
|                              | DC lower band unit | TA04011-B930 |

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 101, Subpart C.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



NVLAP LAB CODE 200116-0

Nemko USA, Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA, Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

**Summary Of Test Data**

| NAME OF TEST                               | PARA.<br>NO. | SPEC.         | RESULT   |
|--------------------------------------------|--------------|---------------|----------|
| RF Power Output                            | 101.113      | 55 dBW EIRP   | Complies |
| Occupied Bandwidth                         | 101.111      | 5000 MHz      | Complies |
| Spurious Emissions at Antenna<br>Terminals | 101.111      | -13 dBm/4 kHz | Complies |
| Field Strength of Spurious Emissions       | 101.111      | -13 dBm ERP   | Complies |
| Frequency Stability                        | 101.107      | 101.107       | NA       |

**Footnotes:**

- 1) This test does not apply to equipment operating in this band.

**Section 2. General Equipment Specification**

|                              |                                            |
|------------------------------|--------------------------------------------|
| <b>Supply Voltage Input:</b> | 120 Vac or -48 Vdc                         |
| <b>Frequency Bands: TX</b>   | 71000 to 76000 MHz and 81000 to 86000 MHz  |
| <b>Antenna Gain(dBi):</b>    | 1' antenna = 43 dBi<br>2' antenna = 48 dBi |
| <b>Output Impedance:</b>     | 50 ohms                                    |
| <b>RF Output (Rated):</b>    | 10 dBm                                     |

**System Description**

70/80 GHz point to point microwave radio.

**Section 3. RF Power Output**

|                               |                    |
|-------------------------------|--------------------|
| NAME OF TEST: RF Power Output | PARA. NO.: 101.113 |
| TESTED BY: David Light        | DATE: 21 July 2014 |

**Test Results:** Complies.

**Measurement Data:**

| Frequency<br>(MHz) | Measured<br>Output<br>Power<br>(dBm) | Measured<br>Output Power<br>(mW) |
|--------------------|--------------------------------------|----------------------------------|
| 72903.000          | 10.3                                 | 10.7                             |
| 82995.288          | 10.8                                 | 12.0                             |
|                    |                                      |                                  |


**Equipment Used:** 1036-FA001525

**Measurement Uncertainty:** +/- 1.7 dB


**Temperature:** 23 °C

**Relative Humidity:** 35 %

Test Data

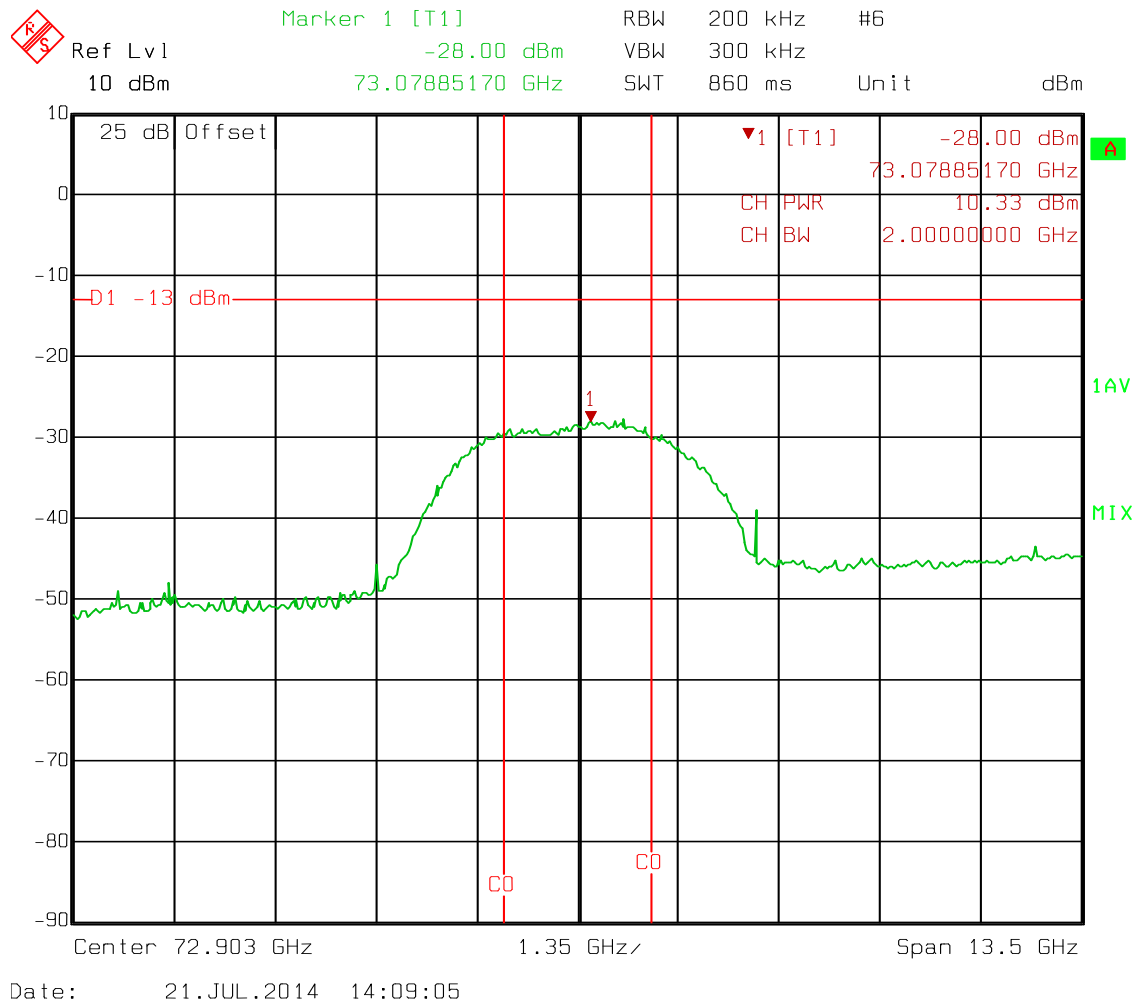

## Test Data

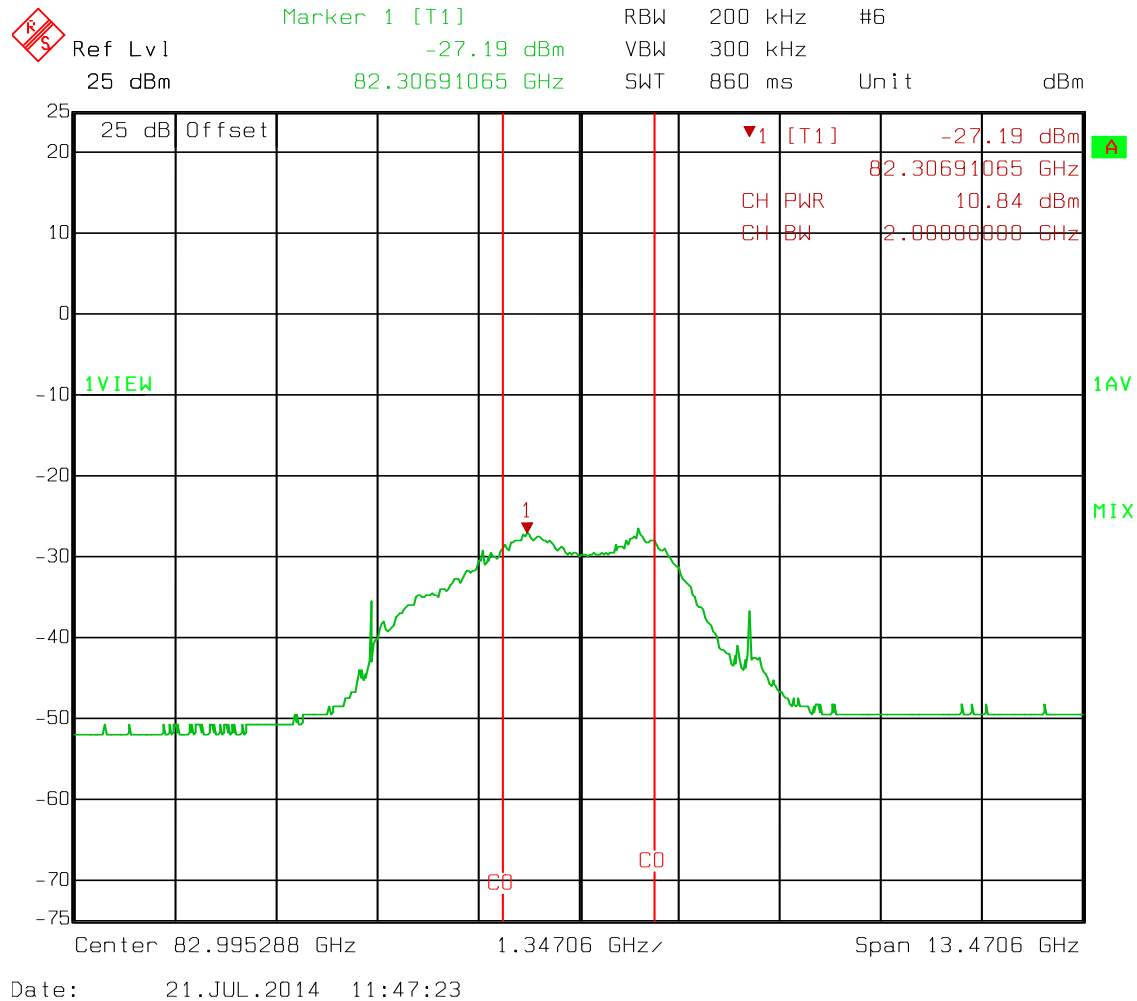

## **Section 4. Occupied Bandwidth**

|                                  |                    |
|----------------------------------|--------------------|
| NAME OF TEST: Occupied Bandwidth | PARA. NO.: 101.111 |
| TESTED BY: David Light           | DATE: 21 July 2014 |

**Test Results:** Complies.

**Measurement Data:** See attached plots


**Equipment Used:** 1036-FA001525

**Measurement Uncertainty:** +/- 1.7 dB


**Temperature:** 23 °C

**Relative Humidity:** 35 %

## Test Data

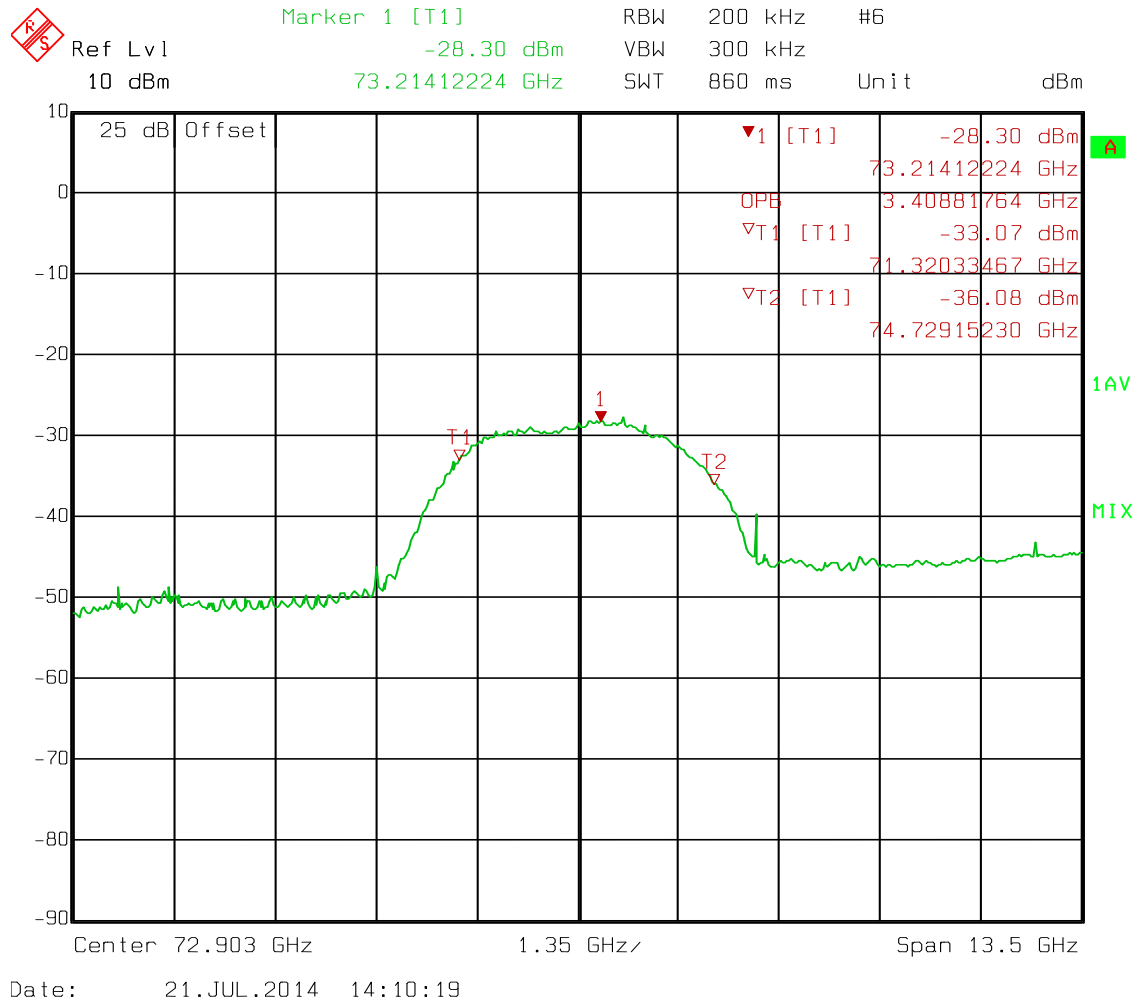

Test Data

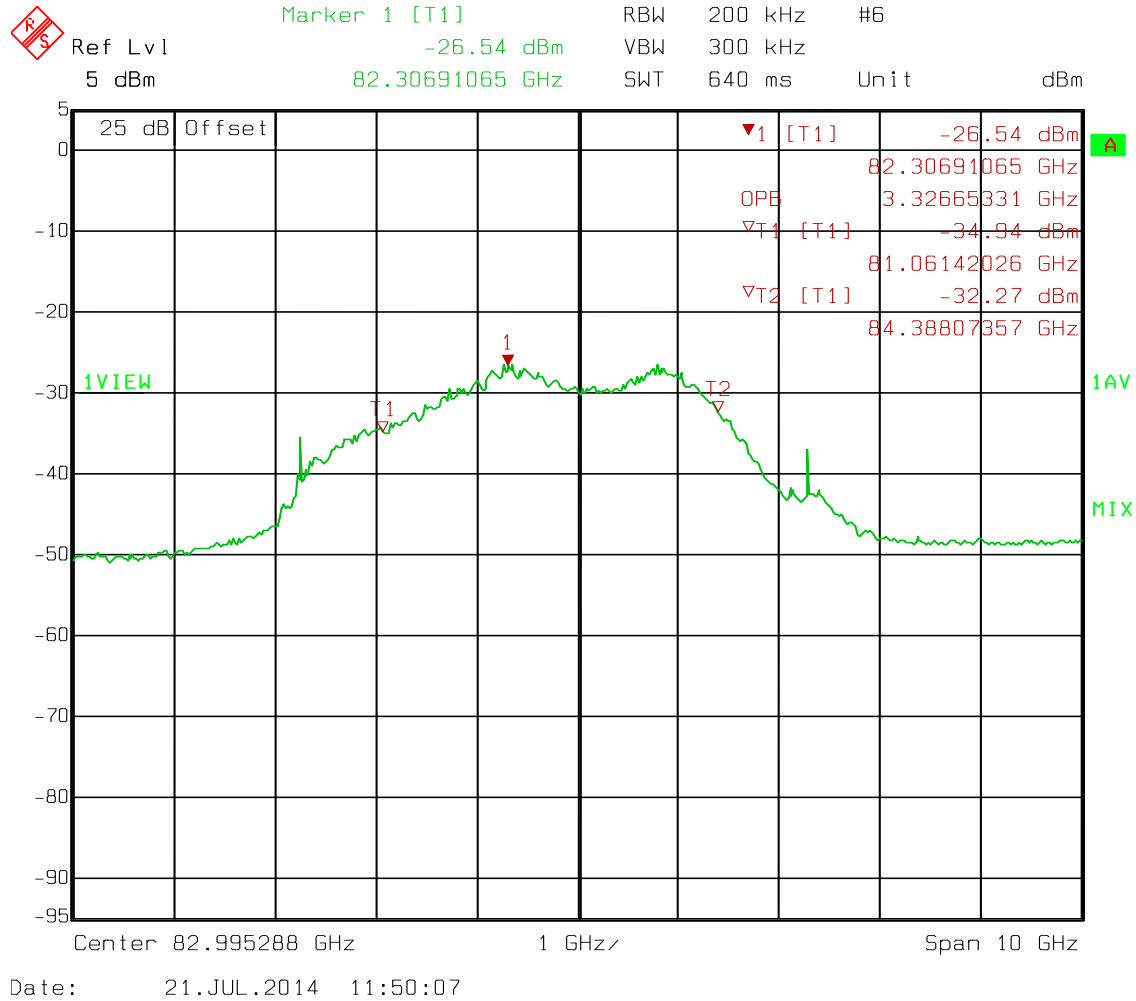

## **Section 5. Spurious Emissions at Antenna Terminals**

|                                             |                             |
|---------------------------------------------|-----------------------------|
| NAME OF TEST: Spurious Emissions at Antenna | PARA. NO.: 101.111(a)(2)(v) |
| TESTED BY: David Light                      | DATE: 21 July 2014          |

**Test Results:** Complies.

**Measurement Data:** See attached plots

**Equipment Used:** 1036-FA001525-FA001526-FDA001524-FA002322


**Measurement Uncertainty:** +/- 1.7 dB

**Temperature:** 23 °C

**Relative Humidity:** 35 %

## Test Data


70 GHz Unit

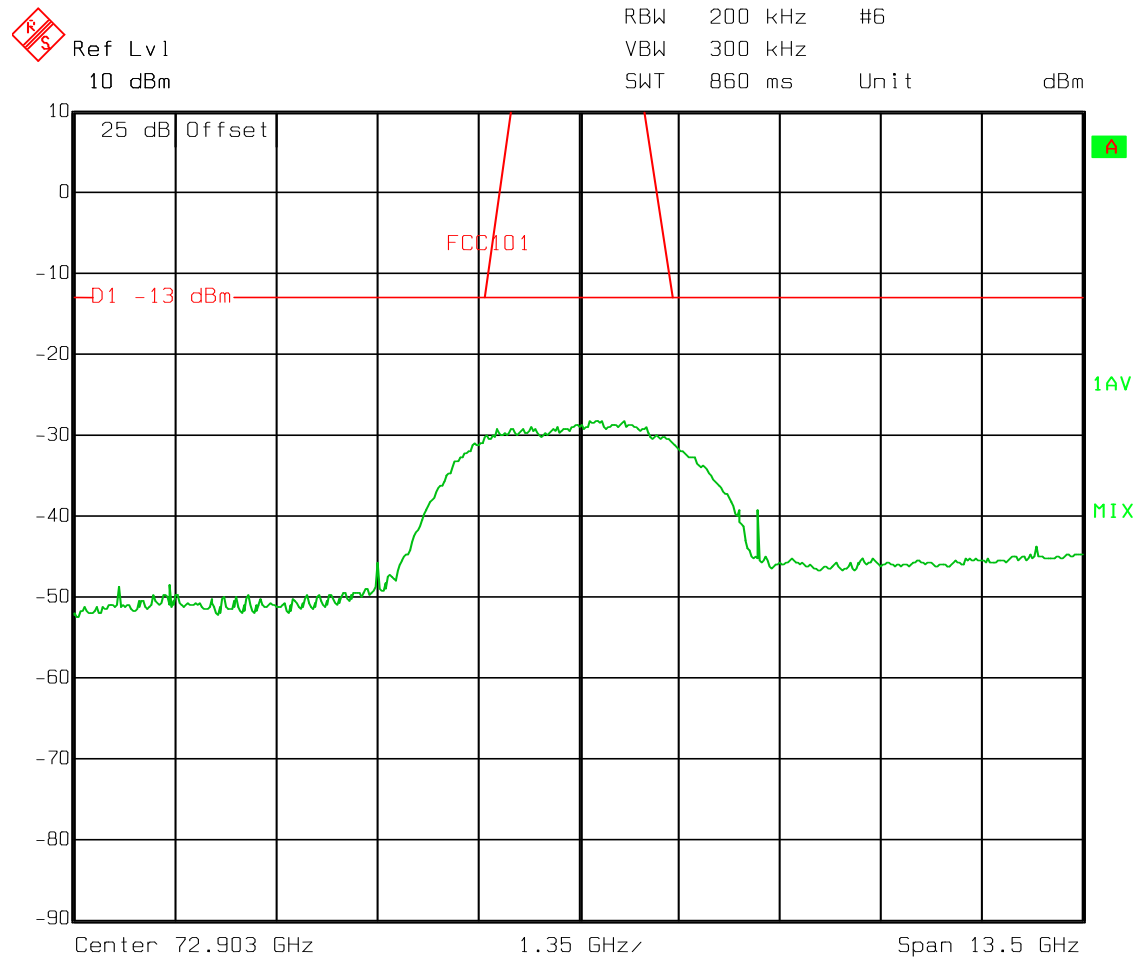

Date: 21.JUL.2014 14:12:12

Test Data


70 GHz Unit

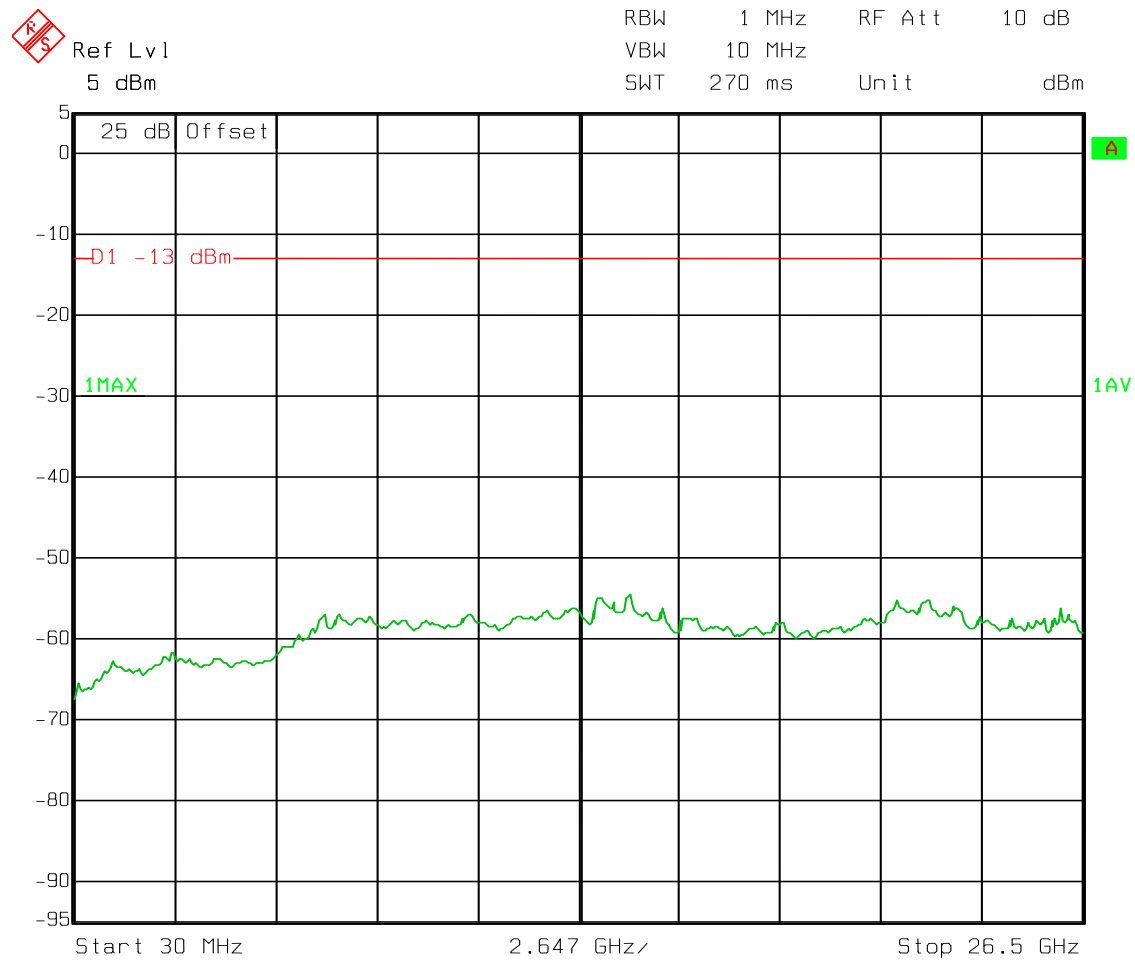

Date: 21.JUL.2014 14:32:15

## Test Data


70 GHz Unit

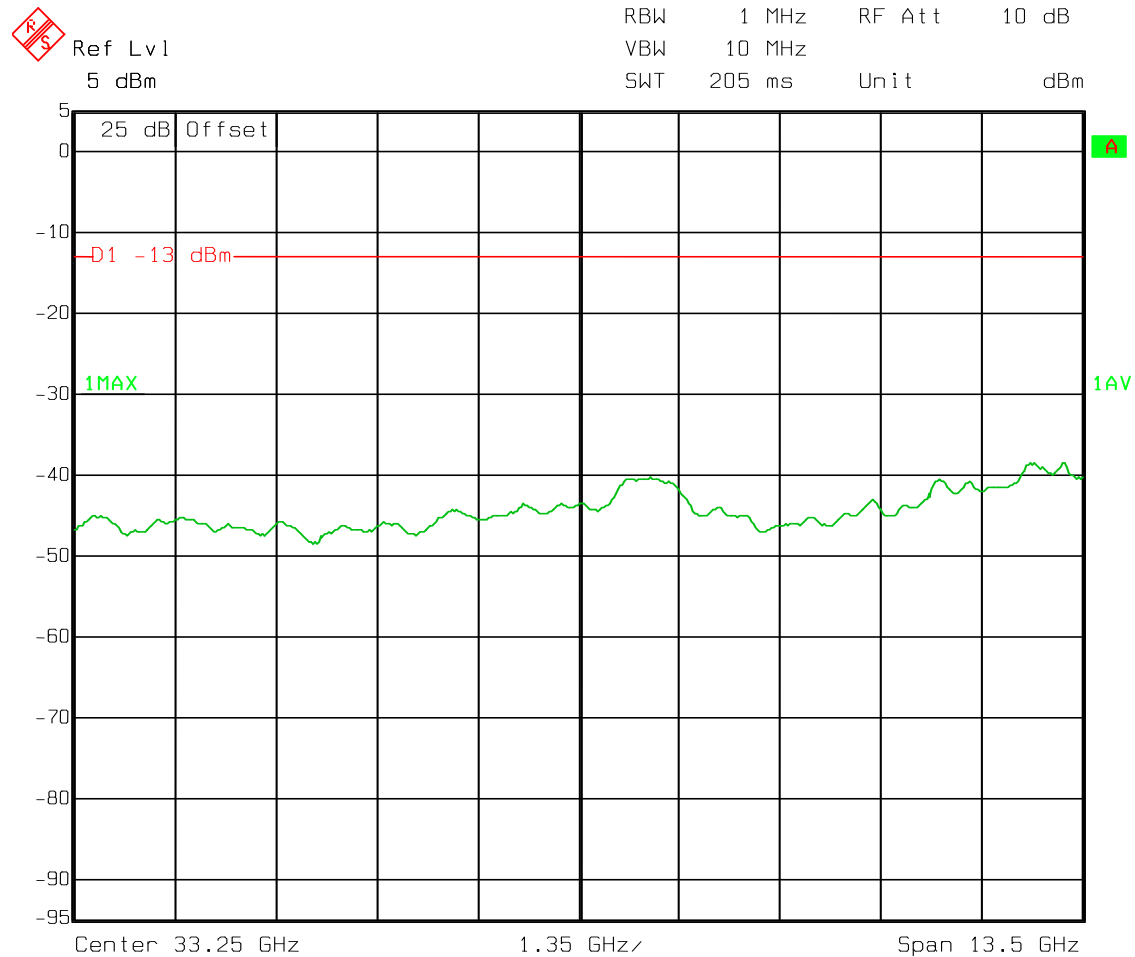

Date: 21.JUL.2014 14:31:36

## Test Data


### 70 GHz Unit

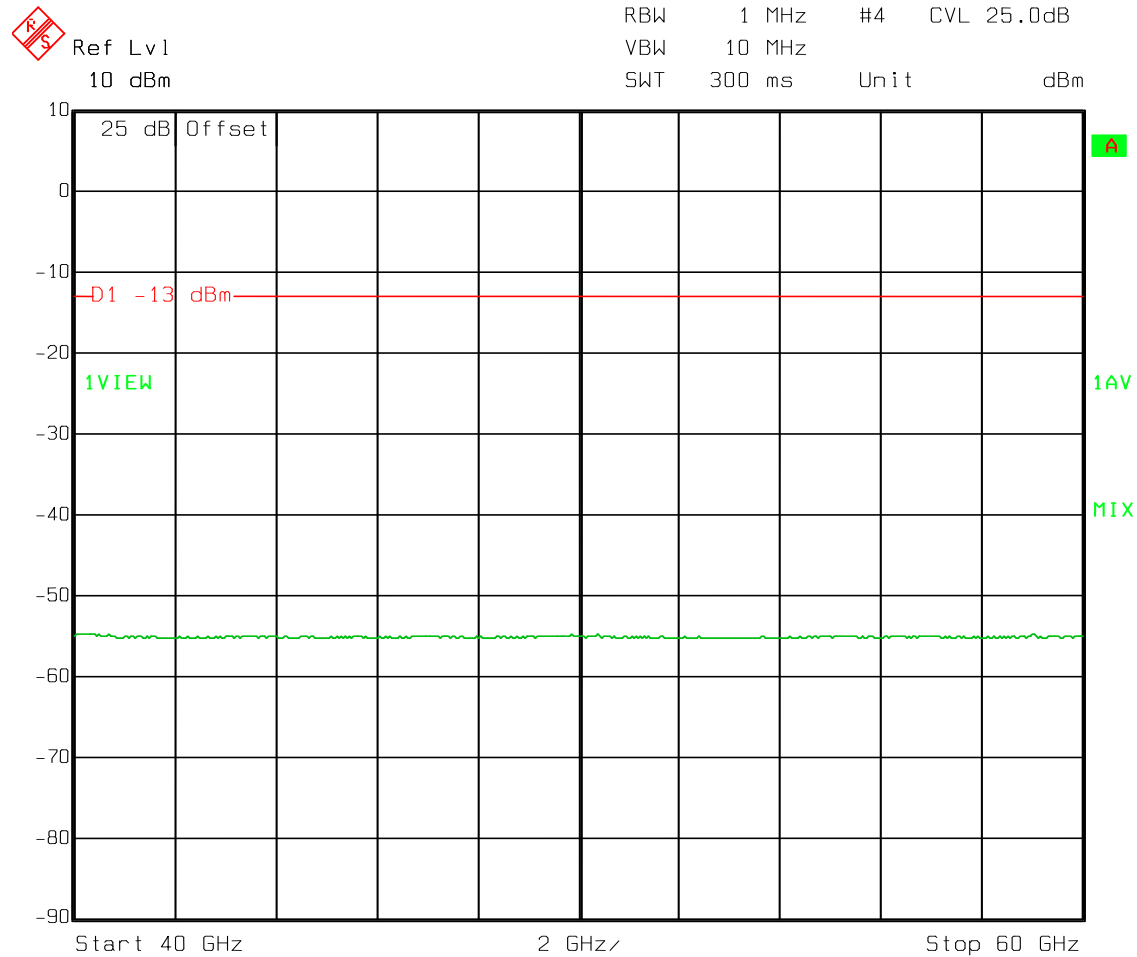

Date: 21.JUL.2014 14:29:07

## Test Data


70 GHz Unit

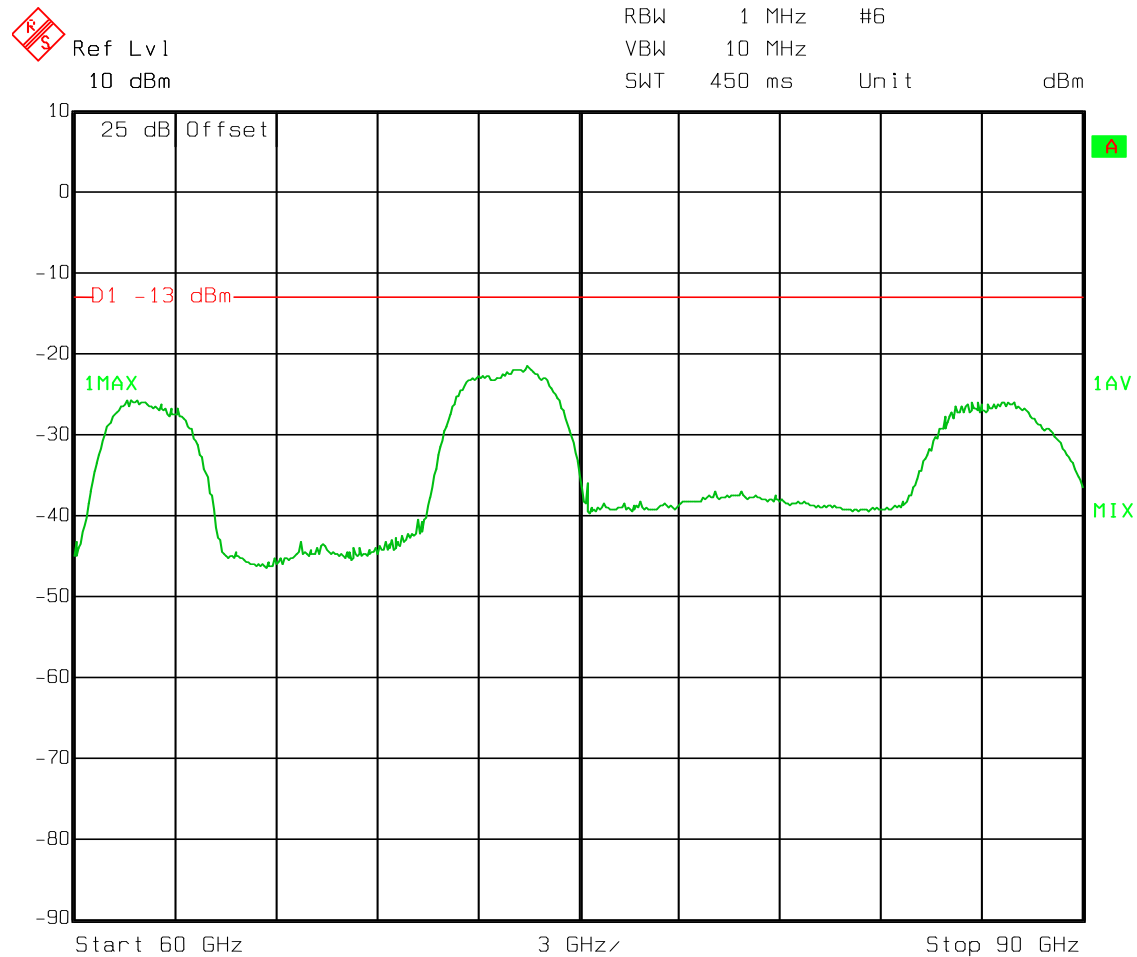

Date: 21.JUL.2014 14:18:03

## Test Data


70 GHz Unit

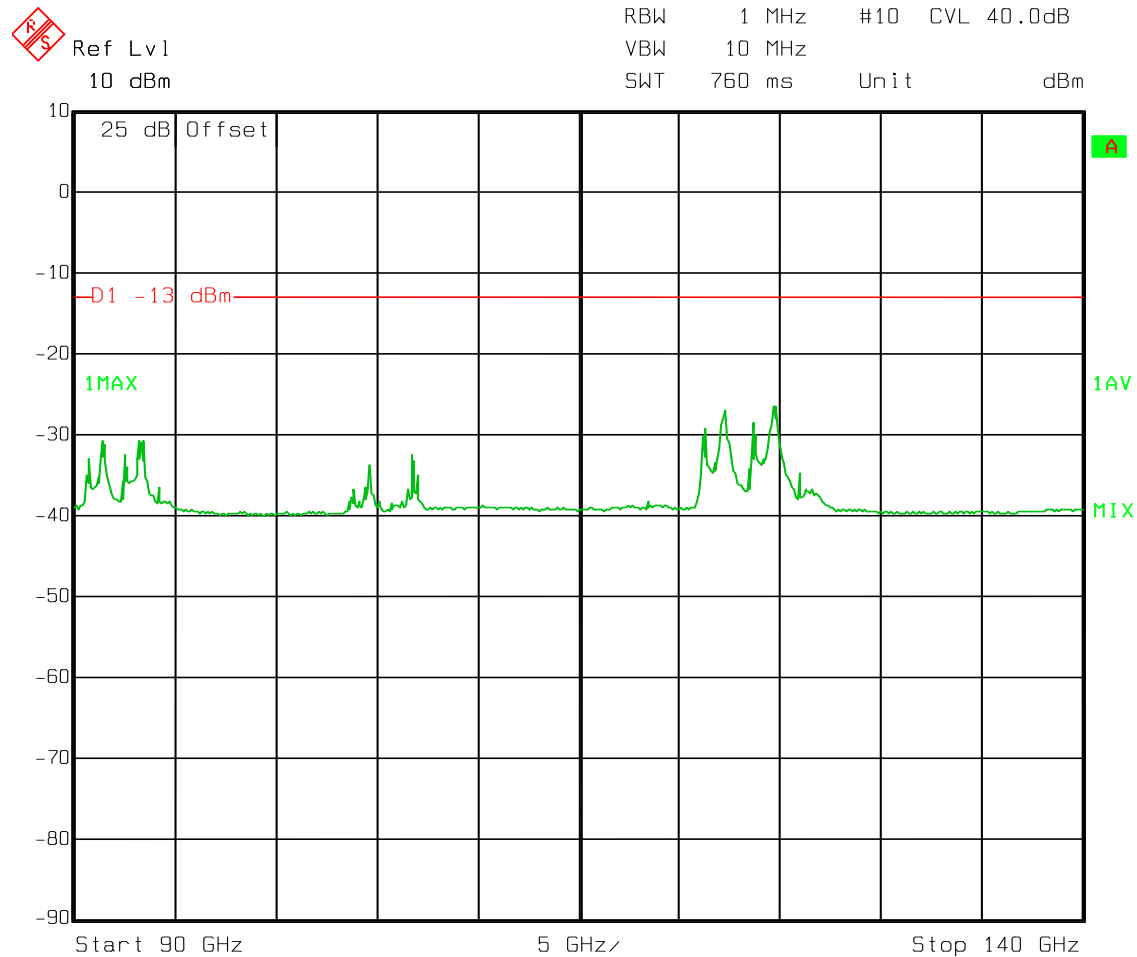

Date: 21.JUL.2014 14:16:29

Test Data


70 GHz Unit

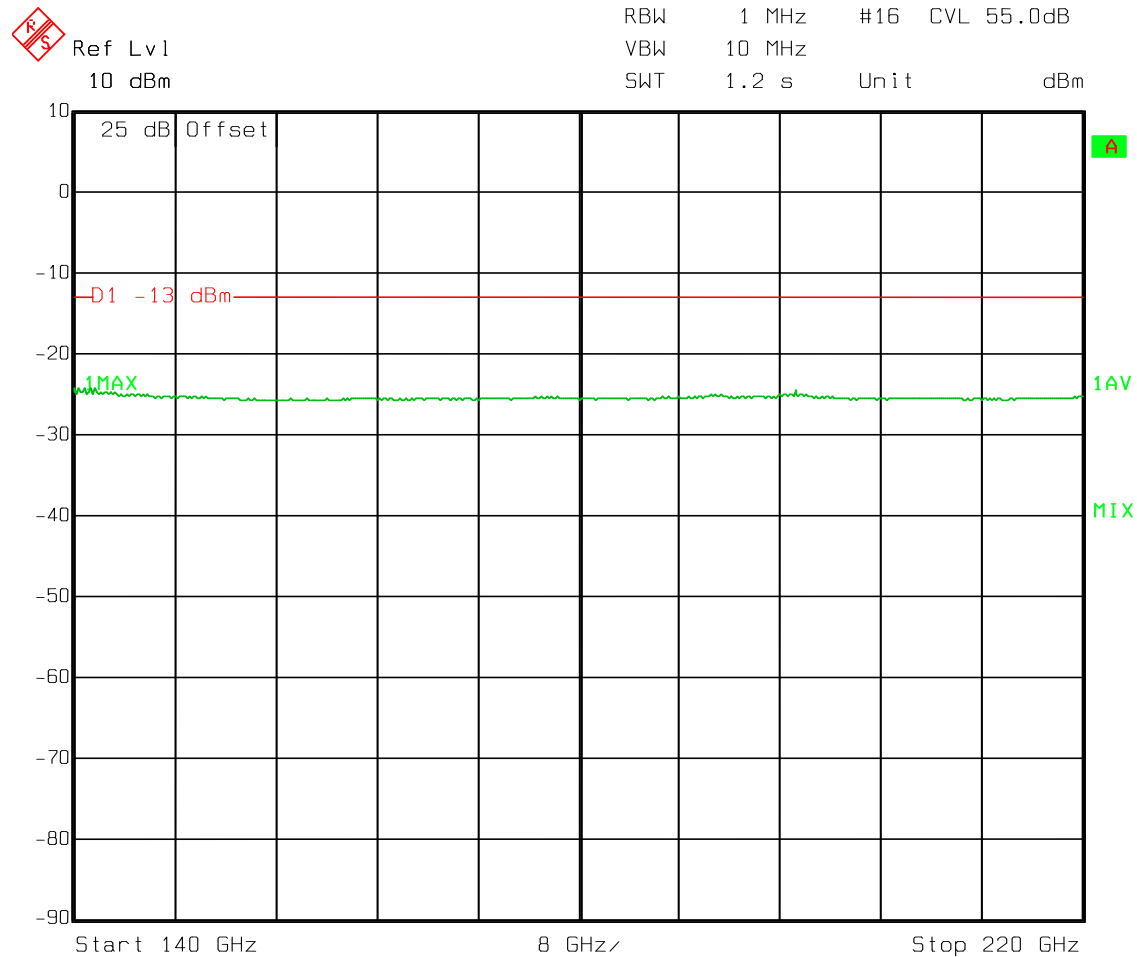

Date: 21.JUL.2014 14:22:15

# Test Data


80 GHz Unit

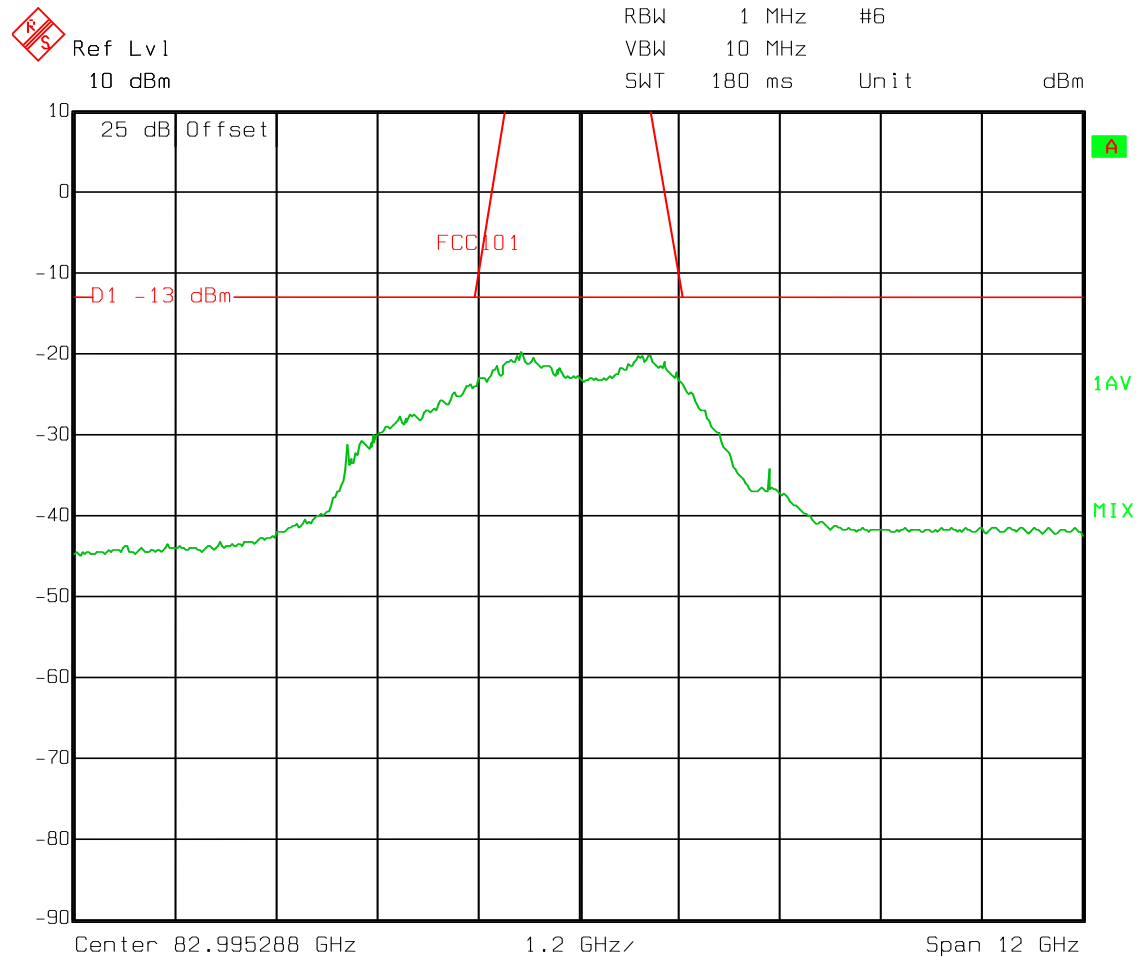

Date: 21.JUL.2014 12:40:54

# Test Data


## 80 GHz Unit

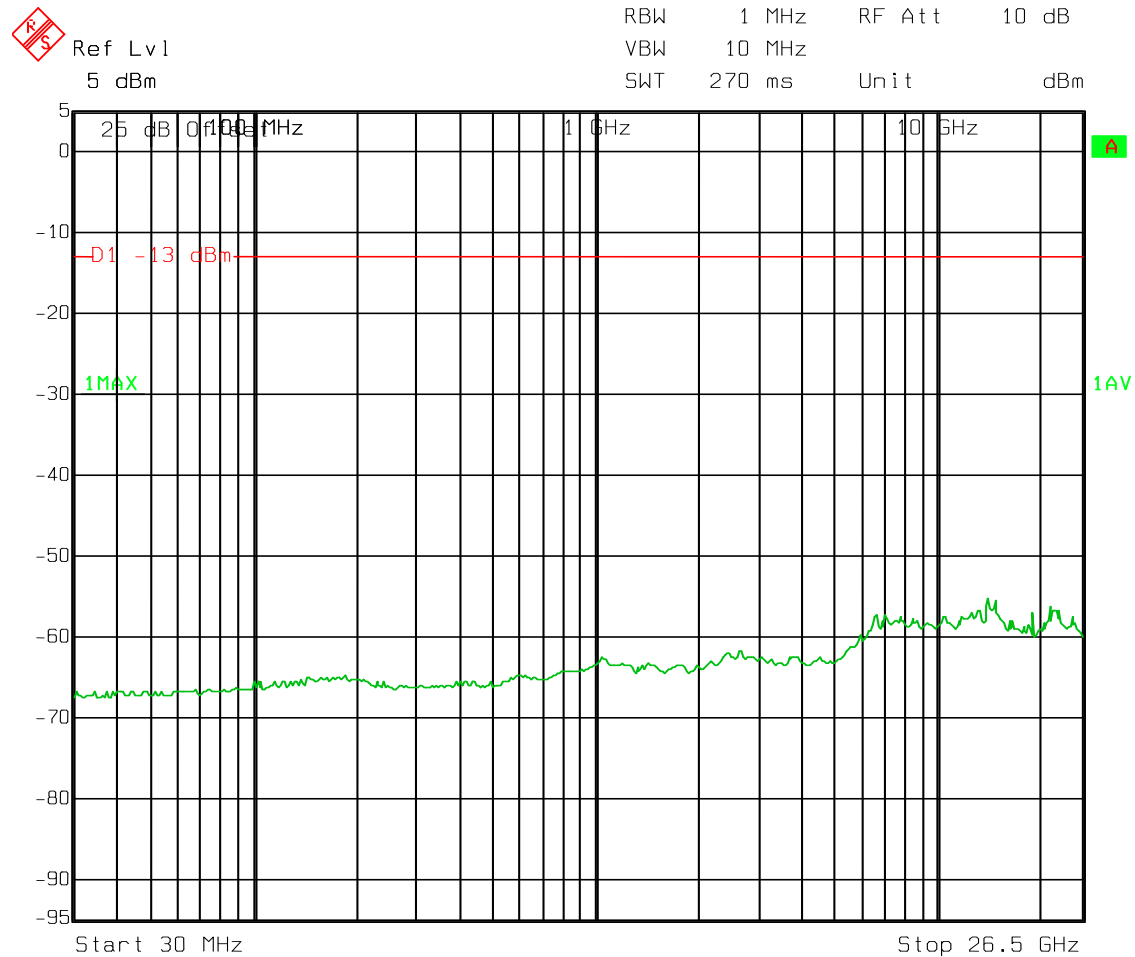

Date: 21.JUL.2014 13:38:27

## Test Data


80 GHz Unit

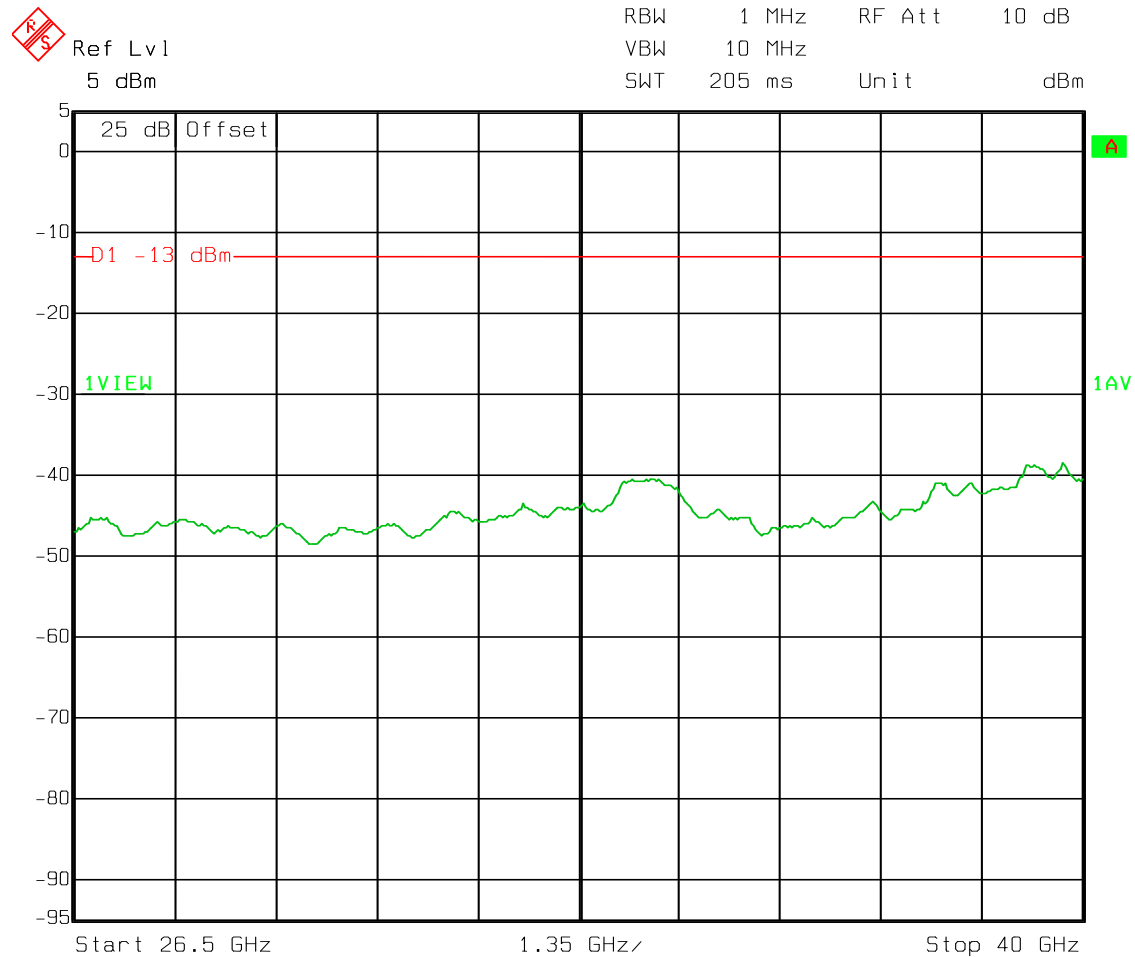

Date: 21.JUL.2014 13:23:17

Test Data


80 GHz Unit

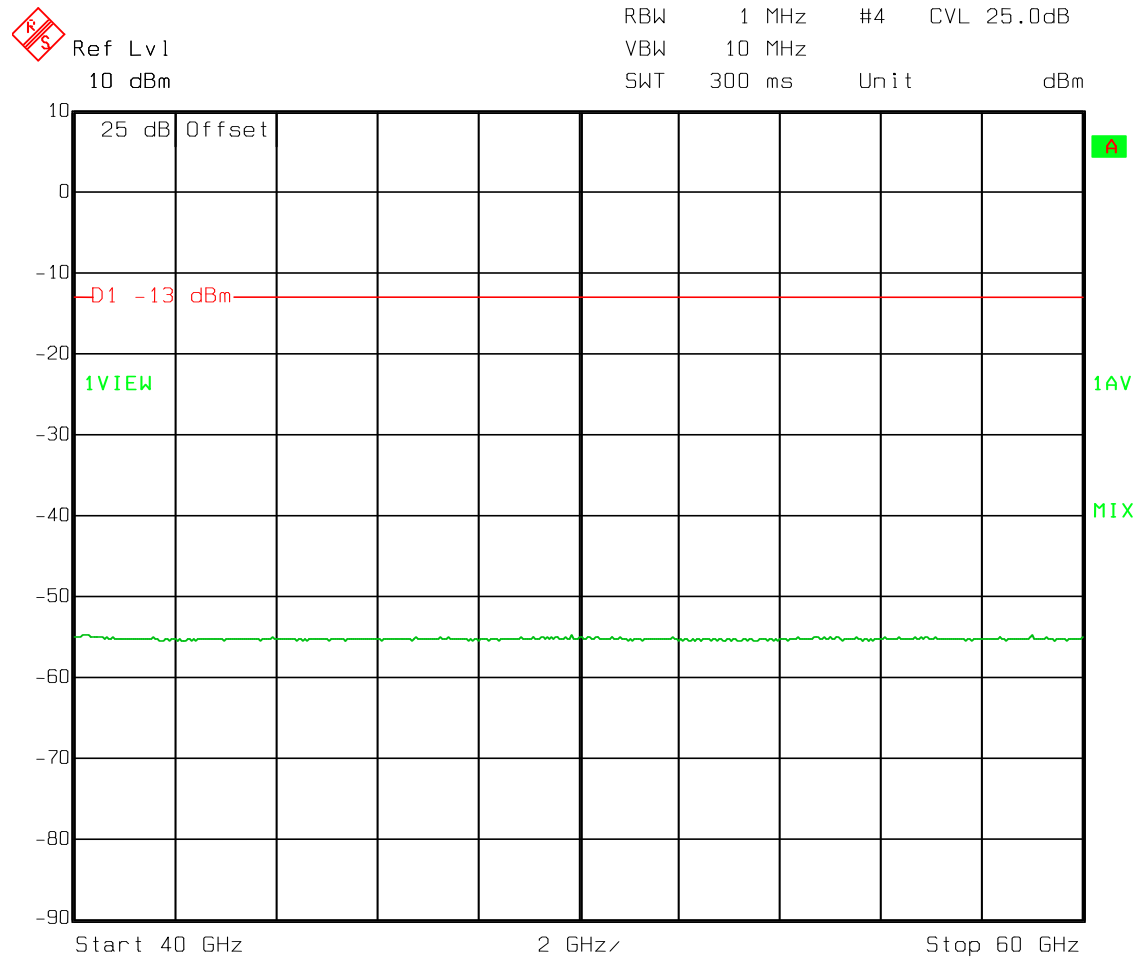

Date: 21.JUL.2014 13:21:46

## Test Data


80 GHz Unit

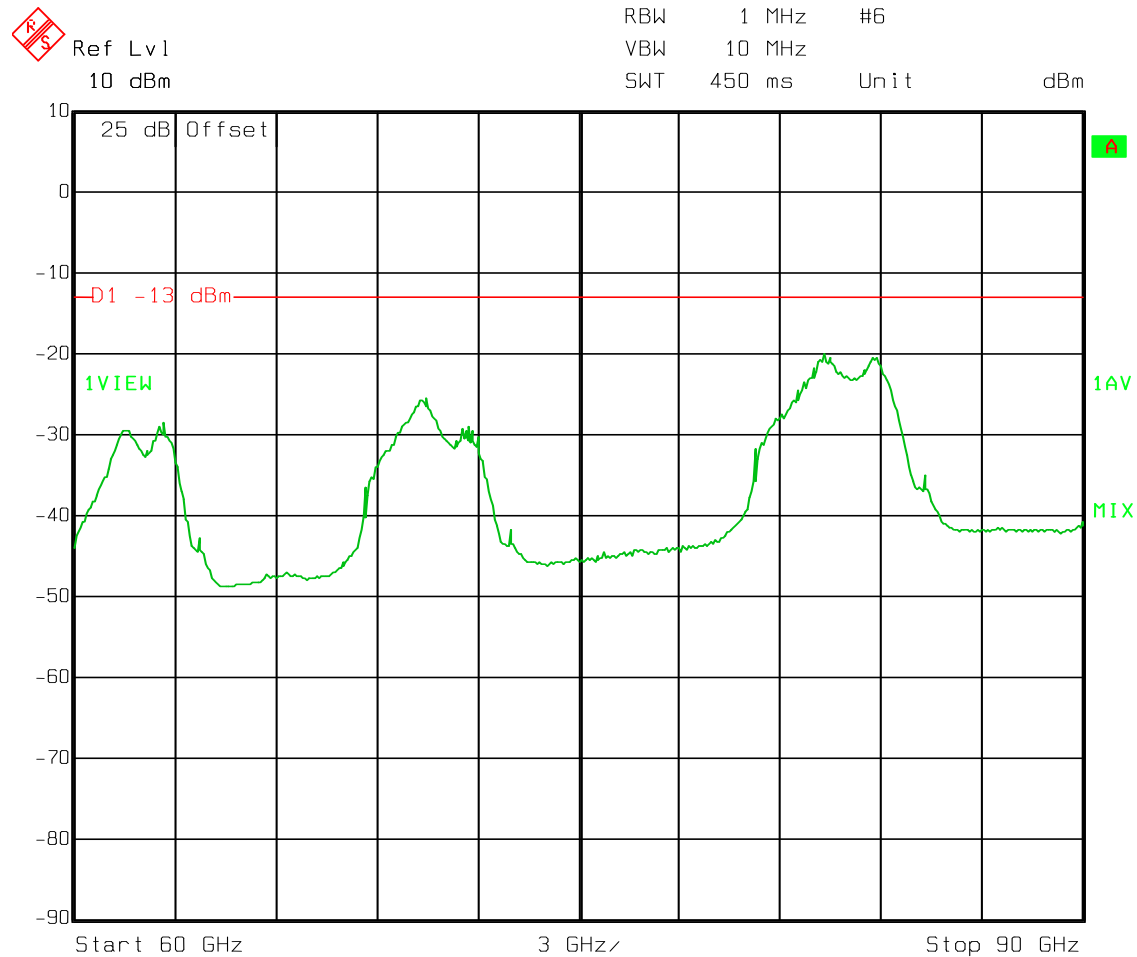

Date: 21.JUL.2014 12:42:57

## Test Data


80 GHz Unit

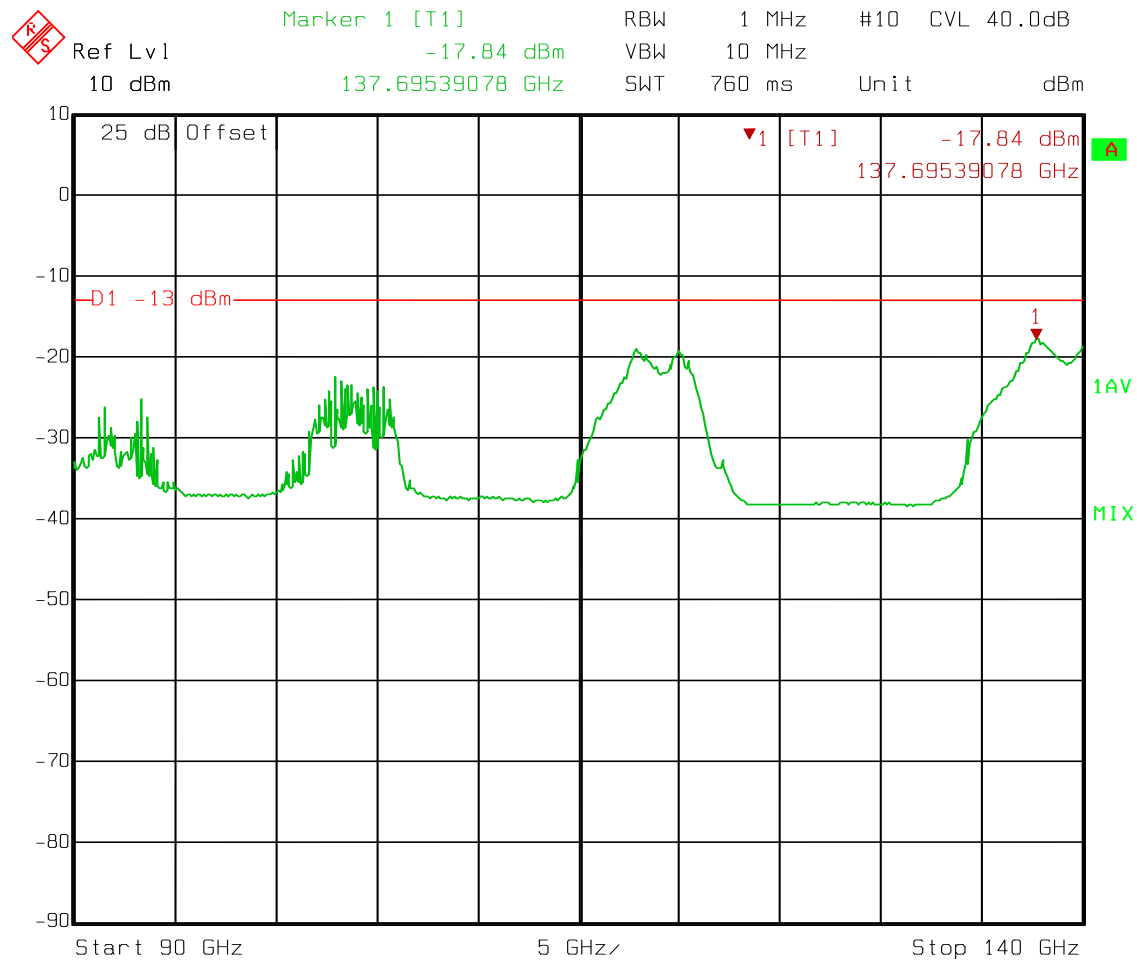

Date: 21.JUL.2014 12:49:55

# Test Data

## 80 GHz Unit

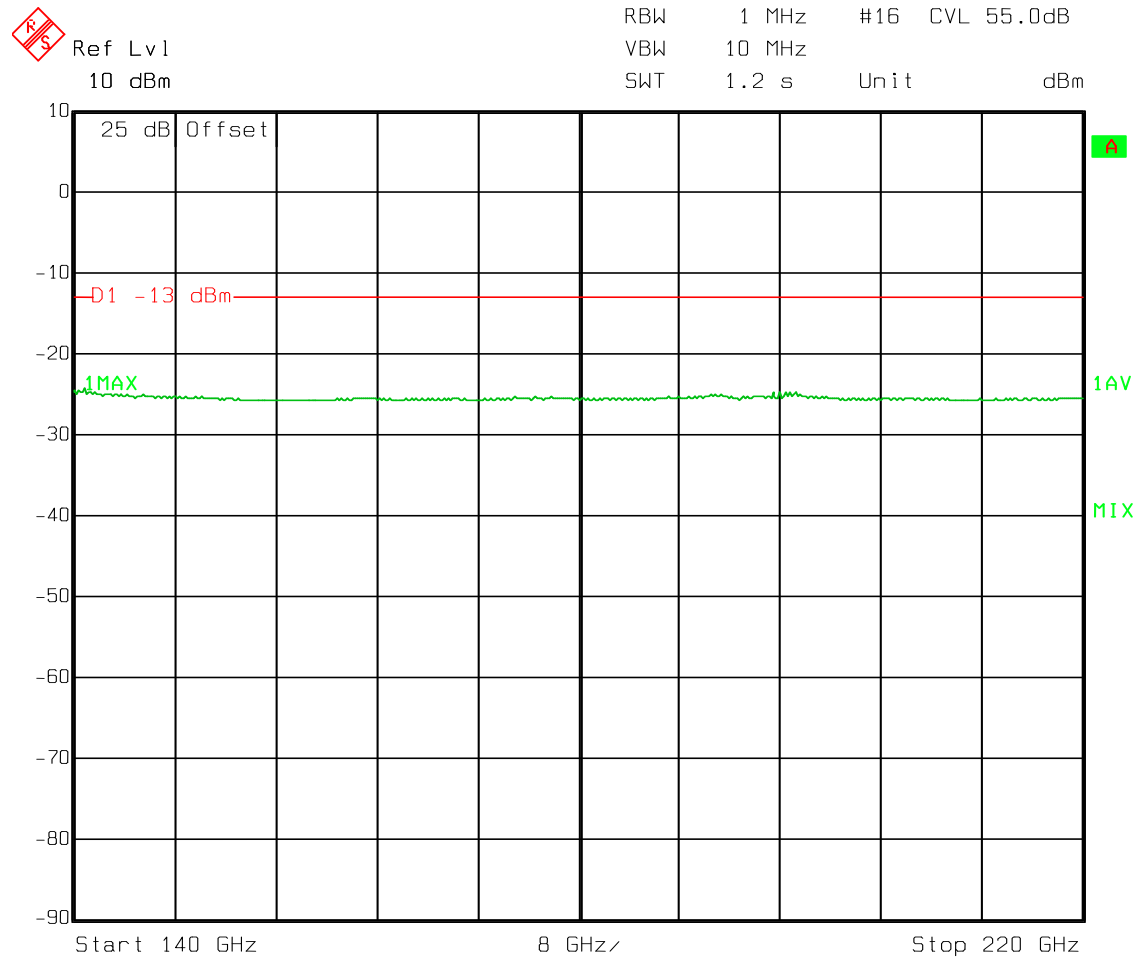

Date: 21.JUL.2014 12:53:45

**Section 6. Field Strength of Spurious**

|                                          |                             |
|------------------------------------------|-----------------------------|
| NAME OF TEST: Field Strength of Spurious | PARA. NO.: 101.111(a)(2)(v) |
| TESTED BY: David Light                   | DATE: 21 July 2014          |

**Test Results:** Complies.

**Measurement Data:** There were no emissions detected above the noise floor which was at least 20 dB below the specification limit of -13 dBm.

**Equipment Used:** 1036-FA001525-FA001526-FDA001524-FA002322-529-1016-1480-901

**Measurement Uncertainty:** +/- 1.7 dB

**Temperature:** 23 °C

**Relative Humidity:** 35 %

**Section 7. Test Equipment List**

| Asset Tag | Description        | Manufacturer     | Model    | Serial #   | Last Cal          | Next Cal    |
|-----------|--------------------|------------------|----------|------------|-------------------|-------------|
| 529       | Antenna, DRWG      | EMCO             | 3115     | 2505       | 31-Oct-2012       | 31-Oct-2014 |
| 901       | Preamplifier       | Sonoma           | 310 N    | 130607     | 21-Nov-2013       | 21-Nov-2014 |
| 1016      | Preamplifier       | Hewlett Packard  | 8449A    | 2749A00159 | 20-Aug-2013       | 20-Aug-2014 |
| 1036      | Spectrum Analyzer  | Rohde & Schwartz | FSEK30   | 830844/006 | 15-Jul-2013       | 15-Jul-2015 |
| 1480      | Antenna, Bilog     | Schaffner-Chase  | CBL6111C | 2572       | 02-Apr-2014       | 02-Apr-2015 |
| FA001526  | Mixer/Horn antenna | OML/Millitec h   | WR-05    | G91220-1   | Verify before use | NA          |
| FA001525  | Mixer/Horn antenna | OML/Millitec h   | WR-08    | F19220-1   | Verify before use | NA          |
| FA001524  | Mixer/Horn antenna | OML/Millitec h   | WR-12    | E91220-1   | Verify before use | NA          |
| FA002322  | Mixer/Horn antenna | OML/Millitec h   | WR-19    | 110317-1   | Verify before use | NA          |

## **Annex A - Test Details**

NAME OF TEST: RF Power Output

PARA. NO.: 101.113

Minimum Standard: §101.113 Transmitter power limitations.

(a) On any authorized frequency, the average power delivered to an antenna in this service must be the minimum amount of power necessary to carry out the communications desired. Application of this principle includes, but is not to be limited to, requiring a licensee who replaces one or more of its antennas with larger antennas to reduce its antenna input power by an amount appropriate to compensate for the increased primary lobe gain of the replacement antenna(s). In no event shall the average equivalent isotropically radiated power (EIRP), as referenced to an isotropic radiator, exceed the values specified below. In cases of harmful interference, the Commission may, after notice and opportunity for hearing, order a change in the effective radiated power of this station. Further, the output power of a transmitter on any authorized frequency in this service may not exceed the following:

| Frequency band (MHz)     | Maximum allowable EIRP <sup>1 2</sup> |              |
|--------------------------|---------------------------------------|--------------|
|                          | Fixed <sup>1 2</sup> (dBW)            | Mobile (dBW) |
| 928.0-929.0(2)           | +17                                   |              |
| 932.0-932.5(2)           | +17                                   |              |
| 932.5-935.0              | +40                                   |              |
| 941.0-941.5(2)           | +30                                   | +14          |
| 941.5-944.0              | +40                                   |              |
| 952.0-960.0(2)           | +40                                   | +14          |
| 1,850-1,990              | +45                                   |              |
| 2,110-2,150              | +45                                   |              |
| 2,150-2,180 <sup>3</sup> | +45                                   |              |
| 2,180-2,200              | +45                                   |              |
| 2,450-2,500              | +45                                   |              |
| 2,500-2,686              |                                       |              |
| 2,686-2,690              | +45                                   |              |
| 3,700-4,200              | +55                                   |              |
| 5,925-6,425              | +55                                   |              |
| 6,425-6,525              |                                       | +35          |
| 6,525-6,875              | +55                                   |              |

| Frequency band (MHz)            | Maximum allowable EIRP <sup>1 2</sup> |              |
|---------------------------------|---------------------------------------|--------------|
|                                 | Fixed <sup>1 2</sup> (dBW)            | Mobile (dBW) |
| 6,875-7,125                     | +55                                   |              |
| 10,550 to 10,600 <sup>5</sup>   | +55                                   |              |
| 10,600 to 10,680 <sup>5</sup>   | +40                                   |              |
| 10,700-11,700                   | +55                                   |              |
| 12,200-12,700 <sup>11</sup>     | +50                                   |              |
| 12,700-13,200 <sup>4</sup>      | +50                                   |              |
| 13,200-13,250 <sup>4</sup>      | +55                                   |              |
| 14,200-14,400 <sup>12</sup>     | +45                                   |              |
| 17,700-18,600                   | +55                                   |              |
| 18,600-18,800 <sup>6</sup>      | +35                                   |              |
| 18,800-19,700                   | <sup>5</sup> +55                      |              |
| 21,200-23,600 <sup>10</sup>     | +55                                   |              |
| 24,250-25,250                   | <sup>5</sup> +55                      |              |
| 27,500-28,350 <sup>9</sup>      | +55                                   |              |
| 29,100-29,250                   | ( <sup>7</sup> )                      |              |
| 31,000 to 31,075 <sup>8 9</sup> | 30 dBW/MHz                            | 30 dBW/MHz   |
| 31,075 to 31,225 <sup>8 9</sup> | 30 dBW/MHz                            | 30 dBW/MHz   |
| 31,225 to 31,300 <sup>8 9</sup> | 30 dBW/MHz                            | 30 dBW/MHz   |
| 38,600-40,000                   | +55                                   |              |
| 71,000-76,000 <sup>13</sup>     | +55                                   | +55          |
| 81,000-86,000 <sup>13</sup>     | +55                                   | +55          |
| 92,000-95,000                   | +55                                   | +55          |

**Method Of Measurement:**Detachable Antenna:

The average channel power at antenna terminals is measured using a spectrum analyzer with channel power measurement function.

**NAME OF TEST: Occupied Bandwidth****PARA. NO.: 101.109****Minimum Standard:****101.109 Bandwidth.**

(a) Each authorization issued pursuant to these rules will show, as the emission designator, a symbol representing the class of emission which must be prefixed by a number specifying the necessary bandwidth. This figure does not necessarily indicate the bandwidth actually occupied by the emission at any instant. In those cases where part 2 of this chapter does not provide a formula for the computation of the necessary bandwidth, the occupied bandwidth may be used in the emission designator.

(b) Stations in this service will be authorized any type of emission, method of modulation, and transmission characteristic, consistent with efficient use of the spectrum and good engineering practice, except that Type B, damped-wave emission will not be authorized.

(c) The maximum bandwidth which will be authorized per frequency assigned is set out in the table that follows. Regardless of the maximum authorized bandwidth specified for each frequency band, the Commission reserves the right to issue a license for less than the maximum bandwidth if it appears that a lesser bandwidth would be sufficient to support an applicant's intended communications.

| Frequency band (MHz)       | Maximum authorized bandwidth |
|----------------------------|------------------------------|
| 928 to 929                 | 25 kHz <sup>1 5 6</sup>      |
| 932 to 932.5, 941 to 941.5 | 12.5 kHz <sup>1 5 6</sup>    |
| 932.5 to 935, 941.5 to 944 | 200 kHz <sup>1</sup>         |
| 952 to 960                 | 200 KHz <sup>1 5 6</sup>     |
| 1,850 to 1,990             | 10 MHz <sup>1</sup>          |
| 2,110 to 2,130             | 3.5 MHz                      |
| 2,130 to 2,150             | 800 or 1600 KHz <sup>1</sup> |
| 2,150 to 2,160             | 10 MHz                       |
| 2,160 to 2,180             | 3.5 MHz                      |
| 2,180 to 2,200             | 800 or 1600 KHz <sup>1</sup> |
| 2,450 to 2,483.5           | 625 KHz <sup>2</sup>         |
| Frequency band (MHz)       | Maximum authorized bandwidth |
| 2,483.5 to 2,500           | 800 KHz                      |

|                               |                       |
|-------------------------------|-----------------------|
| 3,700 to 4,200                | 20 MHz                |
| 5,925 to 6,425                | <sup>1</sup> 60       |
| 6,425 to 6,525                | 25 MHz                |
| 6,525 to 6,875                | 30 MHz. <sup>1</sup>  |
| 6,875 to 7,125                | 25 MHz <sup>1</sup>   |
| 10,550 to 10,680              | 5 MHz <sup>1</sup>    |
| 10,700 to 11,700              | <sup>1</sup> 80       |
| 12,200 to 12,700 <sup>8</sup> | 500 megahertz         |
| 12,700 to 13,150              | 50 MHz                |
| 13,200 to 13,250              | 25 MHz                |
| 17,700 to 18,140              | 220 MHz <sup>1</sup>  |
| 18,140 to 18,142              | 2 MHz                 |
| 18,142 to 18,580              | 6 MHz                 |
| 18,580 to 18,820              | 20 MHz <sup>1</sup>   |
| 18,820 to 18,920              | 10 MHz                |
| 18,920 to 19,160              | 20 MHz <sup>1</sup>   |
| 19,160 to 19,260              | 10 MHz                |
| 19,260 to 19,700              | 220 MHz <sup>1</sup>  |
| 21,200 to 23,600              | 50 MHz <sup>1 4</sup> |
| 24,250 to 25,250              | 40 MHz <sup>7</sup>   |
| 27,500 to 28,350              | 850 MHz               |
| 29,100 to 29,250              | 150 MHz               |
| 31,000 to 31,075              | 75 MHz                |
| 31,075 to 31,225              | 150 MHz               |
| 31,225 to 31,300              | 75 MHz                |
| 38,600 to 40,000              | 50 MHz <sup>7</sup>   |
| 71,000 to 76,000              | 5000 MHz              |
| 81,000 to 86,000              | 5000 MHz              |
| 92,000 to 95,000              | ( <sup>3</sup> )      |

**Method of Measurement:**

The measurement is made using 99% bandwidth function on spectrum analyzer.

|                                                                 |                           |
|-----------------------------------------------------------------|---------------------------|
| <b>NAME OF TEST: Spurious Emission at Antenna<br/>Terminals</b> | <b>PARA. NO.: 101.111</b> |
|-----------------------------------------------------------------|---------------------------|

**Minimum Standard:** (ii) For operating frequencies above 15 GHz, in any 1 MHz band, the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 250 percent of the authorized bandwidth: As specified by the following equation but in no event less than 11 decibels:

$A = 11 + 0.4(P-50) + 10 \log_{10} B$ . (Attenuation greater than 56 decibels or to an absolute power of less than -13 dBm/1MHz is not required.)

(iii) In any 1 MHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log_{10}$  (the mean output power in watts) decibels, or 80 decibels, whichever is the lesser attenuation. The authorized bandwidth includes the nominal radio frequency bandwidth of an individual transmitter/modulator in block-assigned bands. Equipment licensed prior to April 1, 2005 shall only be required to meet this standard in any 4 kHz band.

#### Method Of Measurement:

Spectrum analyzer settings:

RBW: 5 kHz or 10 kHz

VBW:  $\geq$  RBW

Sweep: Auto

To demonstrate compliance in any 4 kHz bandwidth, the RBW is set to the next higher setting and the emission limit is increased by a factor of  $10 \log(RBW/4)$ . For example, if a setting of 5 kHz is used for the measurement, the emission limit is increased by 0.969 dB.

|                                                    |                    |
|----------------------------------------------------|--------------------|
| NAME OF TEST: Field Strength of Spurious Radiation | PARA. NO.: 101.111 |
|----------------------------------------------------|--------------------|

**Minimum Standard:** (ii) For operating frequencies above 15 GHz, in any 1 MHz band, the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 250 percent of the authorized bandwidth: As specified by the following equation but in no event less than 11 decibels:

$A = 11 + 0.4(P-50) + 10 \log_{10} B$ . (Attenuation greater than 56 decibels or to an absolute power of less than -13 dBm/1MHz is not required.)

(iii) In any 1 MHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log_{10}$  (the mean output power in watts) decibels, or 80 decibels, whichever is the lesser attenuation. The authorized bandwidth includes the nominal radio frequency bandwidth of an individual transmitter/modulator in block-assigned bands. Equipment licensed prior to April 1, 2005 shall only be required to meet this standard in any 4 kHz band.

#### Method Of Measurement:

The EUT is placed on a turntable at a distance of 3 meters. For emissions above 1 GHz a closer distance may be used. The emission level of spurious emissions is measured and the turntable orientation and receive antenna height are adjusted to obtain maximum emission level. The EUT is then replaced with a reference antenna of known gain and fed with a signal source. The level of the signal source is adjusted to repeat the measured emission level. The ERP is the resulting reference antenna input level after correction for the reference antenna gain with respect to a dipole antenna.

NAME OF TEST: Frequency Stability

PARA. NO.: 2.1055

**Minimum Standard:** (a) The carrier frequency of each transmitter authorized in these services must be maintained within the following percentage of the reference frequency except as otherwise provided in paragraph (b) of this section or in the applicable subpart of this part (unless otherwise specified in the instrument of station authorization the reference frequency will be deemed to be the assigned frequency):

| Frequency (MHz)                 | Frequency tolerance (percent) |
|---------------------------------|-------------------------------|
| 928 to 929 <sup>5</sup>         | 0.0005                        |
| 932 to 932.5                    | 0.00015                       |
| 932.5 to 935                    | 0.00025                       |
| 941 to 941.5                    | 0.00015                       |
| 941.5 to 944                    | 0.00025                       |
| 952 to 960 <sup>5</sup>         | 0.0005                        |
| 1,850 to 1,990                  | 0.002                         |
| 2,110 to 2,200                  | 0.001                         |
| 2,450 to 2,500 <sup>1</sup>     | 0.001                         |
| 3,700 to 4,200 <sup>1</sup>     | 0.005                         |
| 5,925 to 6,875 <sup>1</sup>     | 0.005                         |
| 6,875 to 7,125 <sup>1</sup>     | 0.005                         |
| 10,550 to 11,700 <sup>1 2</sup> | 0.005                         |
| 11,700 to 12,200 <sup>1</sup>   | 0.005                         |
| 12,200 to 13,250 <sup>4</sup>   | 0.005                         |
| 14,200 to 14,400                | 0.03                          |
| 17,700 to 18,820 <sup>3</sup>   | 0.003                         |
| 18,820 to 18,920 <sup>3</sup>   | 0.001                         |
| 928 to 929 <sup>5</sup>         | 0.0005                        |
| 18,920 to 19,700 <sup>3</sup>   | 0.003                         |
| 19,700 to 27,500 <sup>4 7</sup> | 0.001                         |
| 27,500 to 28,350                | 0.001                         |

| Frequency (MHz)               | Frequency tolerance (percent) |
|-------------------------------|-------------------------------|
| 29,100 to 29,250              | 0.001                         |
| 31,000 to 31,300 <sup>6</sup> | 0.001                         |
| 31,300 to 40,000 <sup>4</sup> | 0.03                          |
| 71,000 to 76,000 <sup>8</sup> |                               |
| 81,000 to 86,000 <sup>8</sup> |                               |
| 92,000 to 95,000 <sup>8</sup> |                               |

<sup>1</sup>Applicable only to common carrier LTTS stations. Tolerance for 2450-2500 MHz is 0.005%. Beginning Aug. 9, 1975, this tolerance will govern the marketing of LTTS equipment and the issuance of all such authorizations for new radio equipment. Until that date new equipment may be authorized with a frequency tolerance of .03% in the frequency range 2,200 to 10,500 MHz and .05% in the range 10,500 MHz to 12,200 MHz, and equipment so authorized may continue to be used for its life provided that it does not cause interference to the operation of any other licensee. Beginning March 1, 2005, new LTTS operators will not be licensed and existing LTTS licensees will not be renewed in the 11.7-12.2 GHz band.

<sup>2</sup>See subpart G of this part for the stability requirements for transmitters used in the Digital Electronic Message Service.

<sup>3</sup>Existing type accepted equipment with a frequency tolerance of  $\pm 0.03\%$  may be marketed until December 1, 1988. Equipment installed and operated prior to December 1, 1988 may continue to operate after that date with a minimum frequency tolerance of  $\pm 0.03\%$ . However, the replacement of equipment requires that the current tolerance be met.

<sup>4</sup>Applicable to private operational fixed point-to-point microwave and stations providing MVDDS.

<sup>5</sup>For private operational fixed point-to-point microwave systems, with a channel greater than or equal to 50 KHz bandwidth,  $\pm 0.0005\%$ ; for multiple address master stations, regardless of bandwidth,  $\pm 0.00015\%$ ; for multiple address remote stations with 12.5 KHz bandwidths,  $\pm 0.00015\%$ ; for multiple address remote stations with channels greater than 12.5 KHz bandwidth,  $\pm 0.0005\%$ .

<sup>6</sup>For stations authorized prior to March 11, 1997, transmitter tolerance shall not exceed 0.03%.

<sup>7</sup>The frequency tolerance for stations authorized on or before April 1, 2005 is 0.03%. Existing licensees and pending applicants on that date may continue to operate after that date with a frequency tolerance of 0.03%, provided that it does not cause harmful interference to the operation of any other licensee. For analog systems, if the channel

bandwidth is greater than 30 MHz up to 50 MHz, the frequency tolerance standard will be 0.03%; if the channel bandwidth is 30 MHz or less, then the frequency tolerance standard will be 0.003%. This analog standard is conditional provided that harmful interference is not caused to digital stations operating within the 0.001% tolerance standards. If harmful interference is caused to stations operating with the more stringent standard, the onus shall be on the operators with the less stringent parameters to develop an engineering solution to the problem. For exceptions, see §101.147 and §101.507.

<sup>8</sup>Equipment authorized to be operated in the 71,000-76,000 MHz, 81,000-86,000 MHz, 92,000-94,000 MHz and 94,100-95,000 MHz bands is exempt from the frequency tolerance requirement noted in the table of paragraph (a) of this section.

(b) Heterodyne microwave radio systems may be authorized at a somewhat less restrictive frequency tolerance (up to .01 percent) to compensate for frequency shift caused by numerous repeaters between base band signal insertion. Where such relaxation is sought, applicant must provide all calculations and indicate the desired tolerance over each path. In such instances the radio transmitters and receivers used must individually be capable of complying with the tolerance specified in paragraph (a) of this section. Heterodyne operation is restricted to channel bandwidth of 10 MHz or greater.

(c) As an additional requirement in any band where the Commission makes assignments according to a specified channel plan, provisions must be made to prevent the emission included within the occupied bandwidth from radiating outside the assigned channel at a level greater than that specified in §101.111.

#### **Method Of Measurement:**

##### Frequency Stability With Voltage Variation

The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

##### Frequency Stability With Temperature Variation

The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.