

InterLab[®]

Final Report on Cellular Device

according to FCC Part 27, Subpart H

Report Reference: MDE_HONEY_1602_FCCc

Date: February 17, 2017

Test Laboratory:

7layers GmbH
Borsigstraße 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-00

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350
www.7layers.com

Geschäftsführer /
Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht registered in:
Düsseldorf, HRB 75554
USt-IdNr VAT No.:
DE203159652
TAX No. 147/5869/0385
A Bureau Veritas Group Company

1 Administrative Data

1.1 Project Data

Project Responsible: Dirk Bratsch
Date Of Test Report: 2017/02/17
Date of first test: 2016/12/21
Date of last test: 2017/01/18

1.2 Applicant Data

Company Name: 7layers Inc.
Street: 15 Musick
City: 92618 Irvine CA
Country: United States of America

Contact Person: Mrs. Denise Trevayne-Smith
Phone: +1 (949) 297 8061
Mobile: +1 949 874 7062

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:


7 layers DE

Company Name : 7layers GmbH
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : Michael.Albert@7Layers.com

Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Radiated Emissions	Mr. Marco Kullik Mr. Jens Dörwald	DAkKS-Registration no. D-PL-12140-01-00 ISED OATS registration number 3699A-1 FCC accreditation registration number 929146

1.4 Signature of the Testing Responsible


 Imad Hjiye
 responsible for tests performed in: Lab 1

1.5 Signature of the Accreditation Responsible


 Accreditation scope responsible person
 responsible for Lab 1

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: Cellular Device

Parameter List:

Parameter name	Value
AC Power Supply	120V/60Hz AC
highest channel	9538 (1907.6MHz) for FDD2 4233 (846.6MHz) for FDD5 1513 (1752.6MHz) for FDD4 19175 (1907.5MHz) for eFDD2 20625 (846.5MHz) for eFDD5 20375 (1752.5MHz) for eFDD4 23825 (713.5MHz) for eFDD17
lowest channel	9262 (1852.4MHz)for FDD2 4132 (826.4MHz) for FDD5 1312 (1712.4MHz) for FDD4 18625 (1852.5MHz) for eFDD2 20425 (826.5MHz) for eFDD5 19975 (1712.5MHz) for eFDD4 23755 (706.5MHz) for eFDD17
mid channel	9400 (1880MHz) for FDD2 4183 (836.6MHz) for FDD5 1412 (1732.4MHz)/1450 (1740.0MHz) for FDD4 18900 (1880MHz) for eFDD2 20525 (836.5MHz) for eFDD5 20175 (1732.5MHz) for eFDD4 23790 (710MHz) for eFDD17

2.2 Detailed Description of OUT Samples

Sample : aa02

<i>OUT Identifier</i>	Cellular Device
<i>Sample Description</i>	Sample #03
<i>Serial No.</i>	014606000000602
<i>HW Status</i>	1.0
<i>SW Status</i>	1.00

Sample : ab01

<i>OUT Identifier</i>	Cellular Device
<i>Sample Description</i>	Sample #02
<i>Serial No.</i>	014606000000644
<i>HW Status</i>	1.0
<i>SW Status</i>	1.00

2.3 OUT Features

Features for OUT: Cellular Device

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
DC	The OUT is powered by or connected to DC		
eFDD2			
eFDD4			
eFDD5			
eFDD17			
HSDPA-FDD2	EUT supports UMTS FDD2 HSDPA in the band 1850 MHz - 1910 MHz		
HSDPA-FDD4	EUT supports UMTS FDD4 HSDPA in the band 1710 MHz - 1755 MHz		
HSDPA-FDD5	EUT supports UMTS FDD5 HSDPA in the band 824 MHz - 849 MHz		
HSUPA-FDD2	EUT supports UMTS FDD2 HSUPA in the band 1850 MHz - 1910 MHz		
HSUPA-FDD4	EUT supports UMTS FDD4 HSUPA in the band 1710 MHz - 1755 MHz		
HSUPA-FDD5	EUT supports UMTS FDD5 HSUPA in the band 824 MHz - 849 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		

2.4 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

Setup No.	List of OUT samples	List of auxiliary equipment
Sample No.	Sample Description	AE No. AE Description
S01_AA02	(Setup #03)	
Sample: aa02	Sample #03	
S01_AB01	(Setup #02)	
Sample: ab01	Sample #02	

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

Note:

1. This report contains the abbreviated information content pertaining to services rendered. Supporting documentation not included herein is maintained and available at the laboratory.

2. All tests are performed under environmental conditions within the requirements of the specifications. Environmental conditions are available at the laboratory.

3. Testing was done on customers demand.

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

Designation	Description
FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	Part 27, Subpart C - Technical Standards

3.3 List of Test Specification

Test Specification:	FCC part 2 and 27
Version	10-1-13 Edition
Title:	PART 2 - GENERAL RULES AND REGULATIONS PART 27 - MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

3.4 Summary

Test Case Identifier / Name Test (condition)	Cat	Result	Date of Test	Lab Ref.	Setup
27.4 Field strength of spurious radiation §2.1053, §27.53					
27.4; Frequency Band = eFDD17, Mode = QPSK 5MHz, Channel = 23755, Frequency = 706.5MHz, Method = radiated	-	Passed	2016/12/29	Lab 1	S01_AB01
27.4; Frequency Band = eFDD17, Mode = QPSK 5MHz, Channel = 23790, Frequency = 710MHz, Method = radiated	-	Passed	2017/01/13	Lab 1	S01_AA02
	-	Passed	2016/12/29	Lab 1	S01_AB01
27.4; Frequency Band = eFDD17, Mode = QPSK 5MHz, Channel = 23825, Frequency = 713.5MHz, Method = radiated	-	Passed	2016/12/29	Lab 1	S01_AB01
27.4; Frequency Band = eFDD4, Mode = QPSK 5MHz, Channel = 19975, Frequency = 1712.5MHz, Method = radiated	-	Passed	2016/12/29	Lab 1	S01_AB01
27.4; Frequency Band = eFDD4, Mode = QPSK 5MHz, Channel = 20175, Frequency = 1732.5MHz, Method = radiated	-	Passed	2017/01/13	Lab 1	S01_AA02
	-	Passed	2016/12/29	Lab 1	S01_AB01
27.4; Frequency Band = eFDD4, Mode = QPSK 5MHz, Channel = 20375, Frequency = 1752.5MHz, Method = radiated	-	Passed	2016/12/29	Lab 1	S01_AB01
27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1312, Frequency = 1712.4MHz	-	Passed	2016/12/24	Lab 1	S01_AB01
27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1412, Frequency = 1732.4MHz	-	Passed	2017/01/13	Lab 1	S01_AA02
	-	Passed	2016/12/21	Lab 1	S01_AB01
27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1450, Frequency = 1740.0MHz	-	Passed	2016/12/21	Lab 1	S01_AB01
27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1513, Frequency = 1752.6MHz	-	Passed	2016/12/24	Lab 1	S01_AB01
27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1312, Frequency = 1712.4MHz	-	Passed	2016/12/28	Lab 1	S01_AB01
27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1412, Frequency = 1732.4MHz	-	Passed	2017/01/13	Lab 1	S01_AA02
	-	Passed	2016/12/28	Lab 1	S01_AB01
27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1450, Frequency = 1740.0MHz	-	Passed	2016/12/28	Lab 1	S01_AB01
27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1513, Frequency = 1752.6MHz	-	Passed	2016/12/28	Lab 1	S01_AB01
27.4; Frequency Band = FDD4, Mode = W-CDMA, Channel = 1312, Frequency = 1712.4MHz	-	Passed	2017/01/18	Lab 1	S01_AB01
27.4; Frequency Band = FDD4, Mode = W-CDMA, Channel = 1412, Frequency = 1732.4MHz	-	Passed	2017/01/17	Lab 1	S01_AB01
	-	Passed	2017/01/17	Lab 1	S01_AA02
27.4; Frequency Band = FDD4, Mode = W-CDMA, Channel = 1513, Frequency = 1752.6MHz	-	Passed	2017/01/18	Lab 1	S01_AB01


3.5 Detailed Results

3.5.1 27.4 Field strength of spurious radiation §2.1053, §27.53

Test: 27.4; Frequency Band = eFDD17, Mode = QPSK 5MHz, Channel = 23755, Frequency = 706.5MHz, Method = radiated

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AB01
<i>Date of Test:</i>	2016/12/29 17:46
<i>Body:</i>	FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES
<i>Test Specification:</i>	FCC part 2 and 27

Detailed Results:

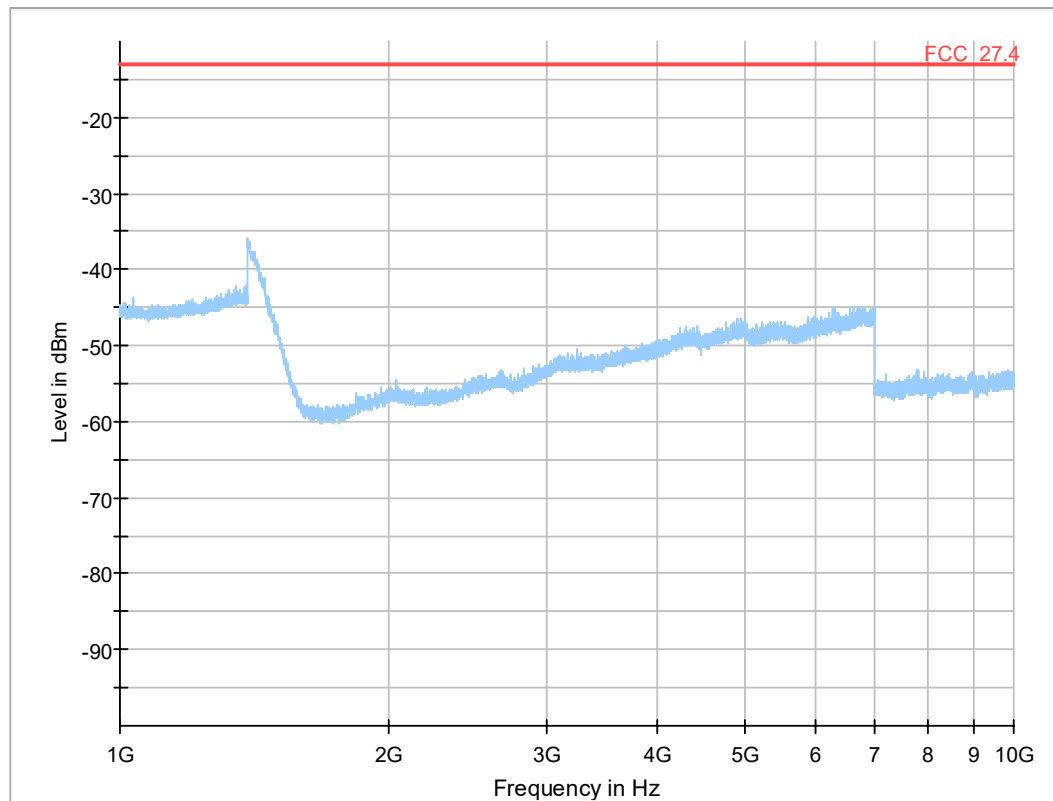


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

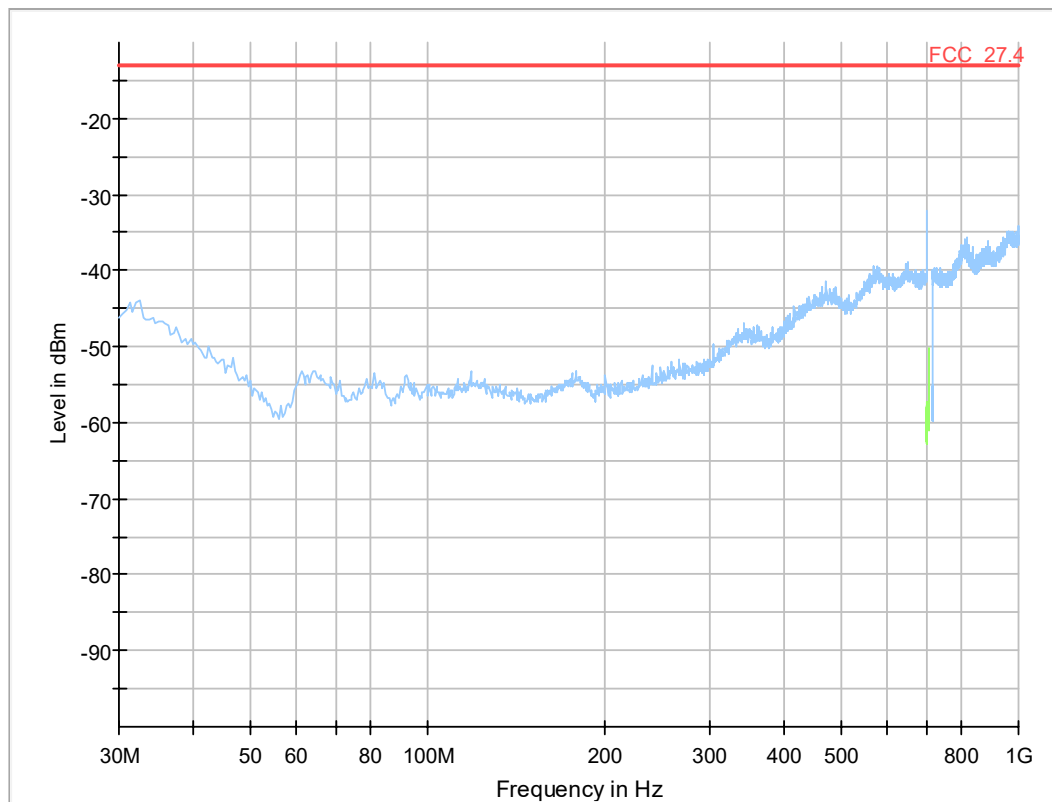

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test1: 27.4; Frequency Band = eFDD17, Mode = QPSK 5MHz, Channel = 23790, Frequency = 710MHz, Method = radiated

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/29 17:47

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

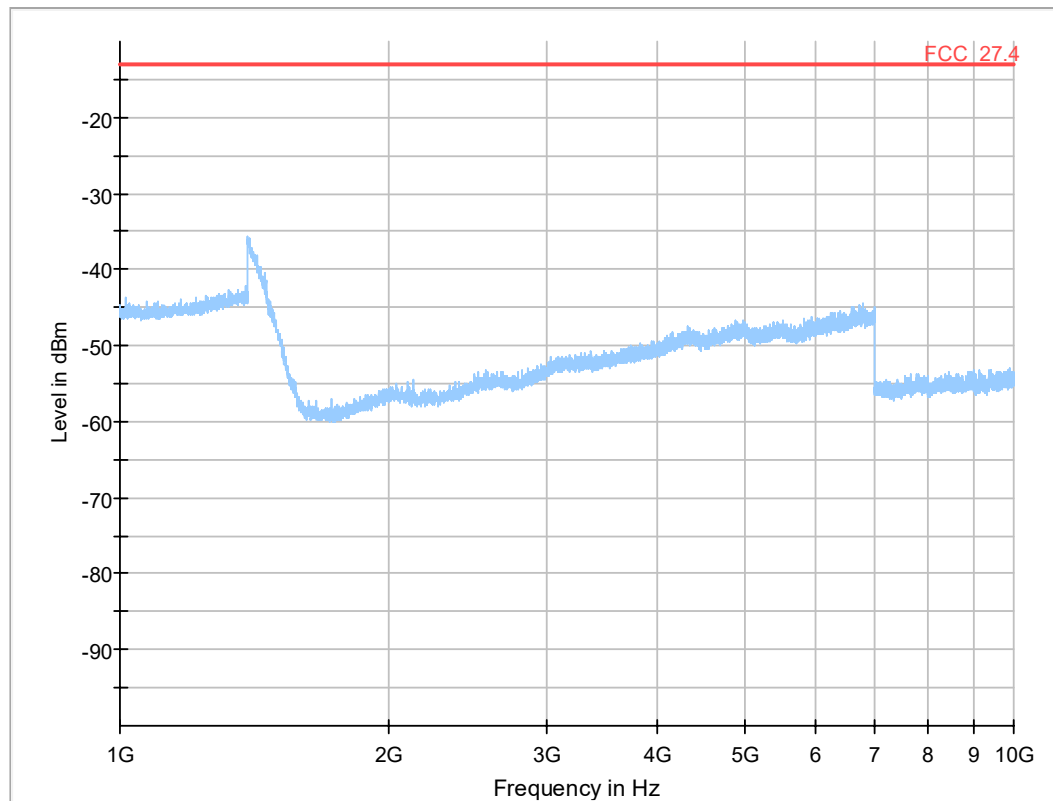


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

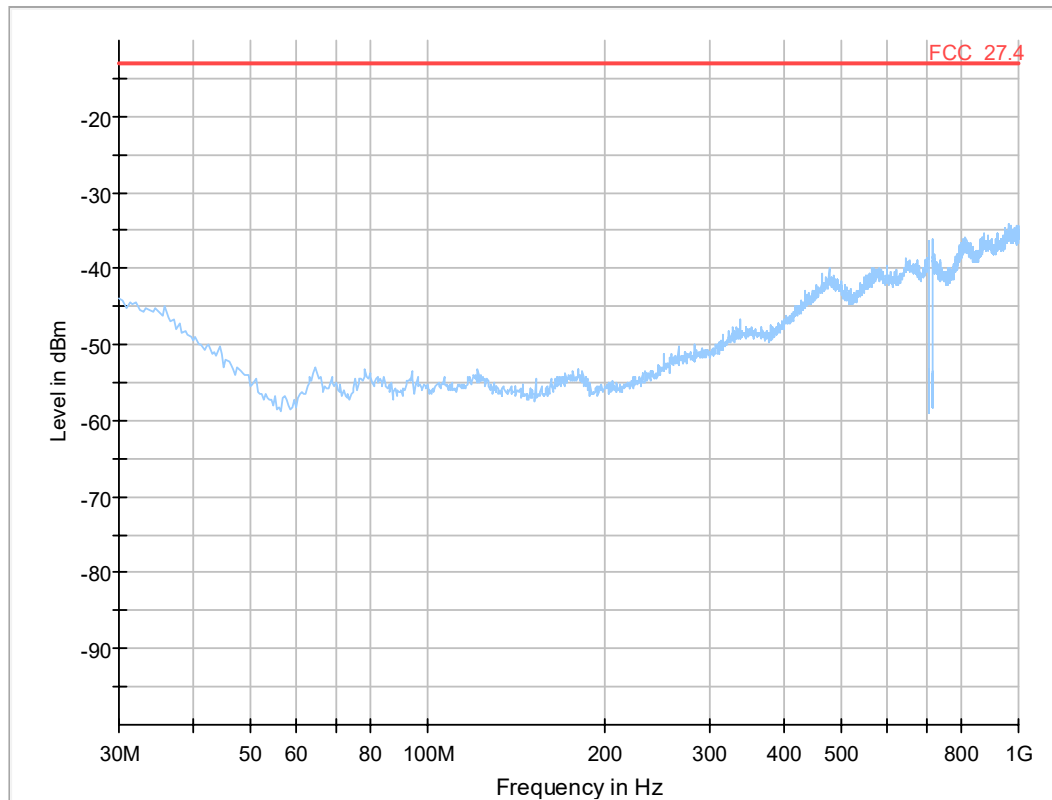

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test2: 27.4; Frequency Band = eFDD17, Mode = QPSK 5MHz, Channel = 23790, Frequency = 710MHz, Method = radiated

Result: Passed


Setup No.: S01_AA02

Date of Test: 2017/01/13 14:35

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

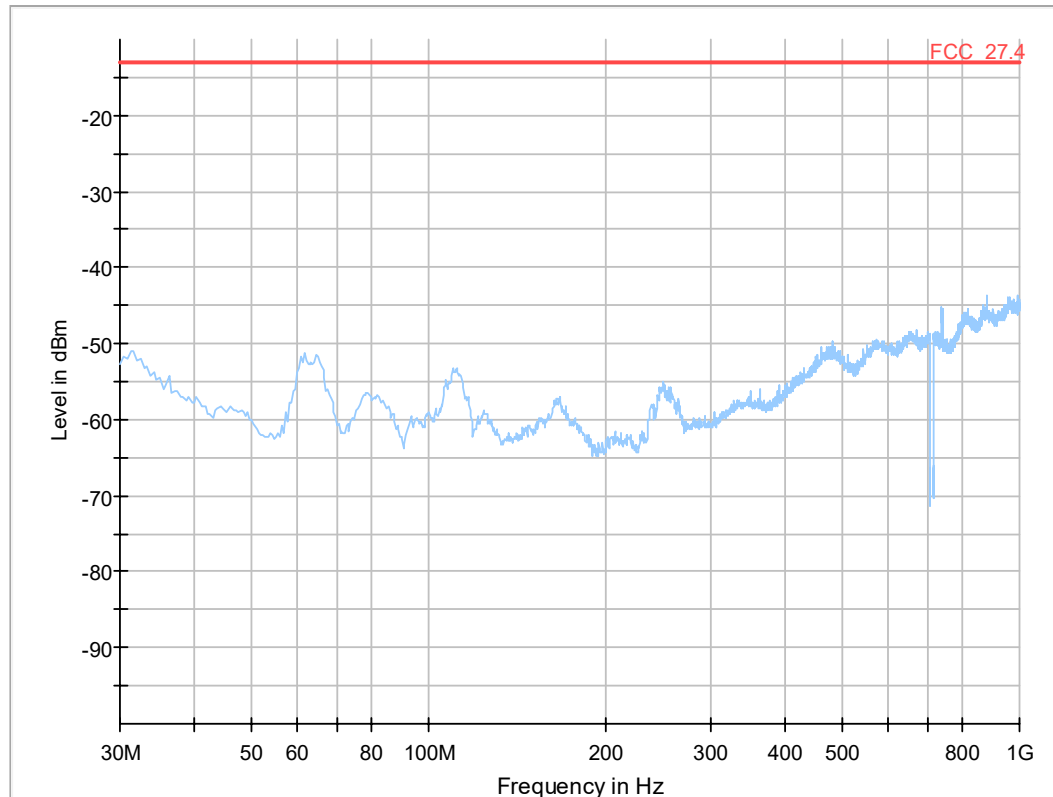


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

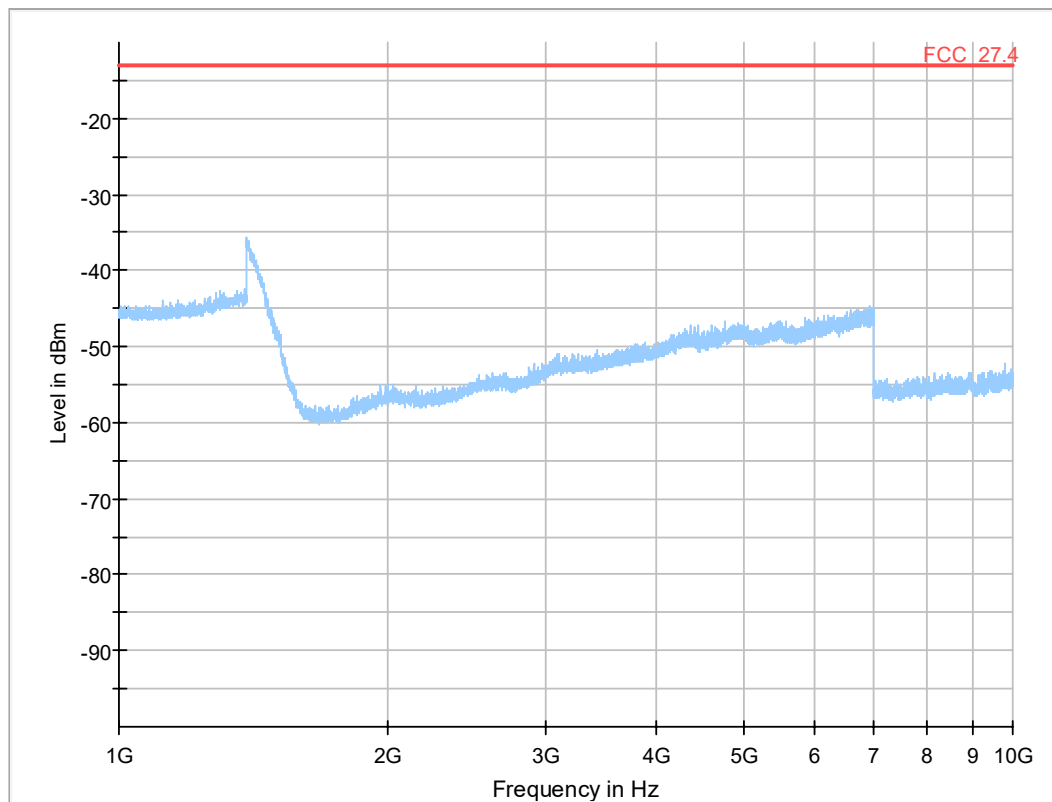

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test: 27.4; Frequency Band = eFDD17, Mode = QPSK 5MHz, Channel = 23825, Frequency = 713.5MHz, Method = radiated

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/29 15:25

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

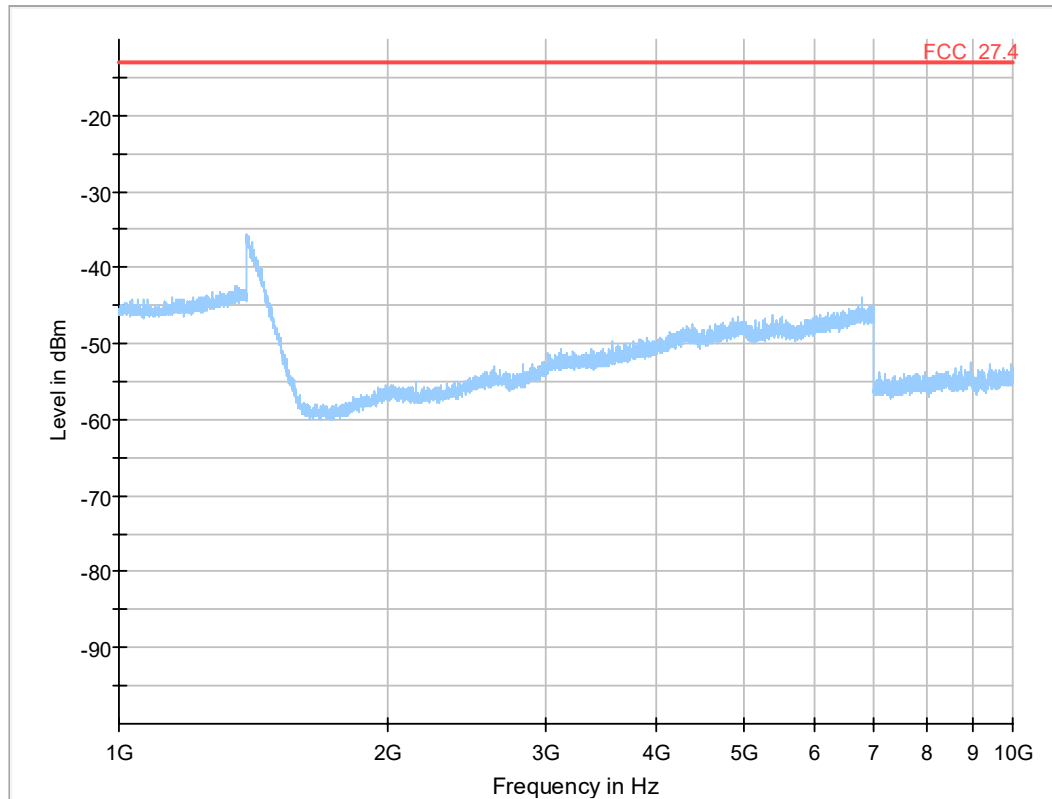


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

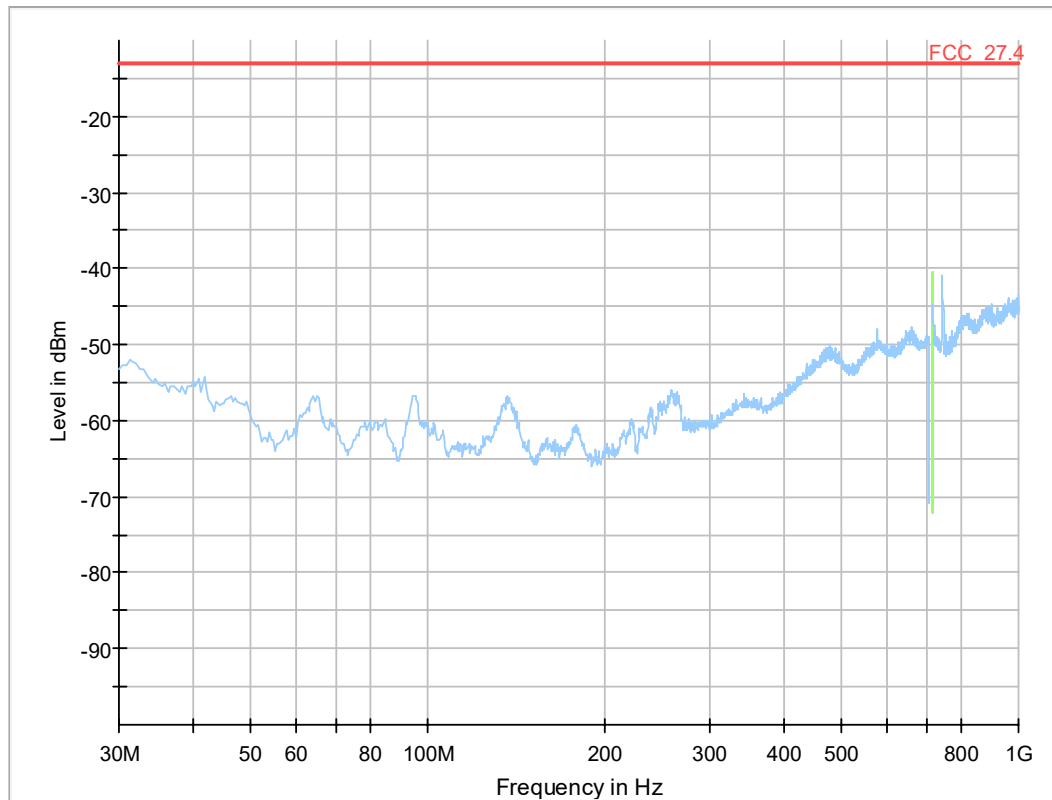

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test: 27.4; Frequency Band = eFDD4, Mode = QPSK 5MHz, Channel = 19975, Frequency = 1712.5MHz, Method = radiated

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/29 13:20

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

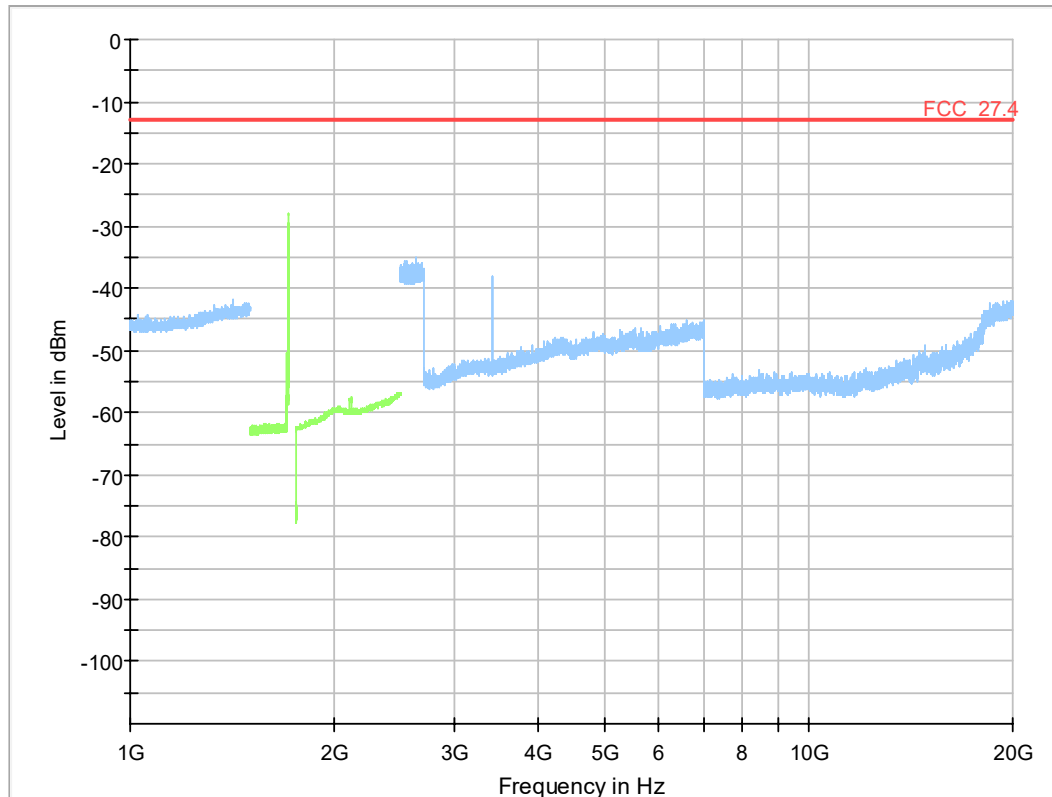


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

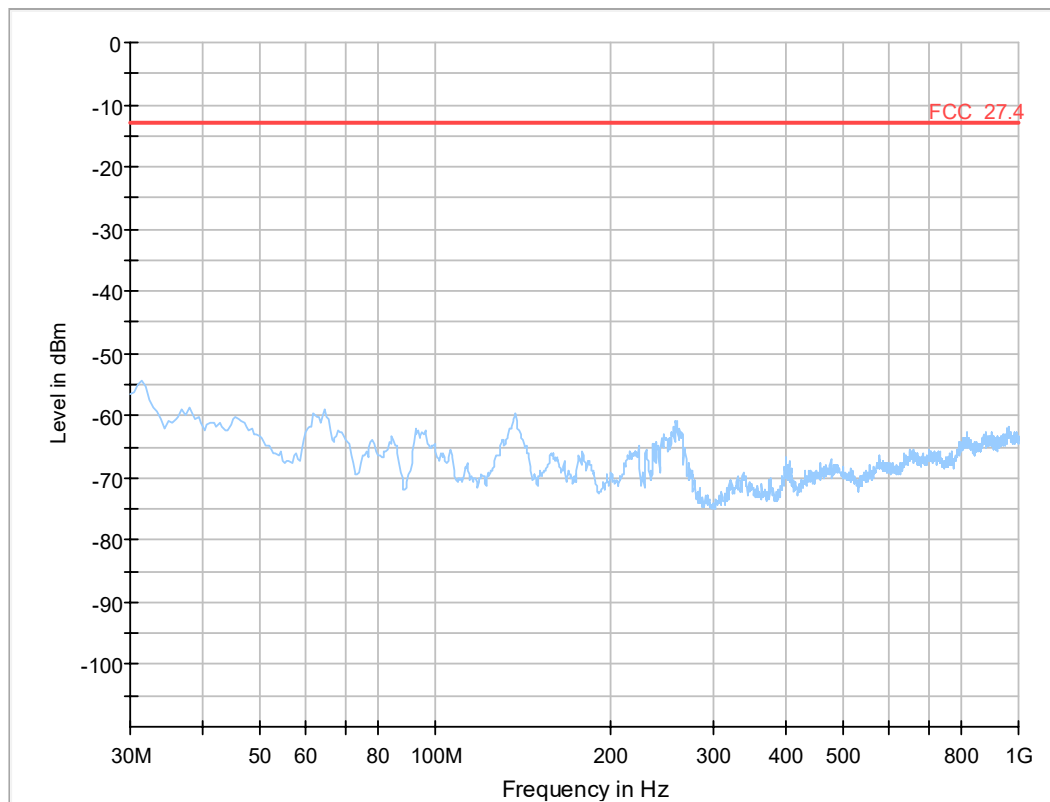

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test1: 27.4; Frequency Band = eFDD4, Mode = QPSK 5MHz, Channel = 20175, Frequency = 1732.5MHz, Method = radiated

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/29 13:17

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

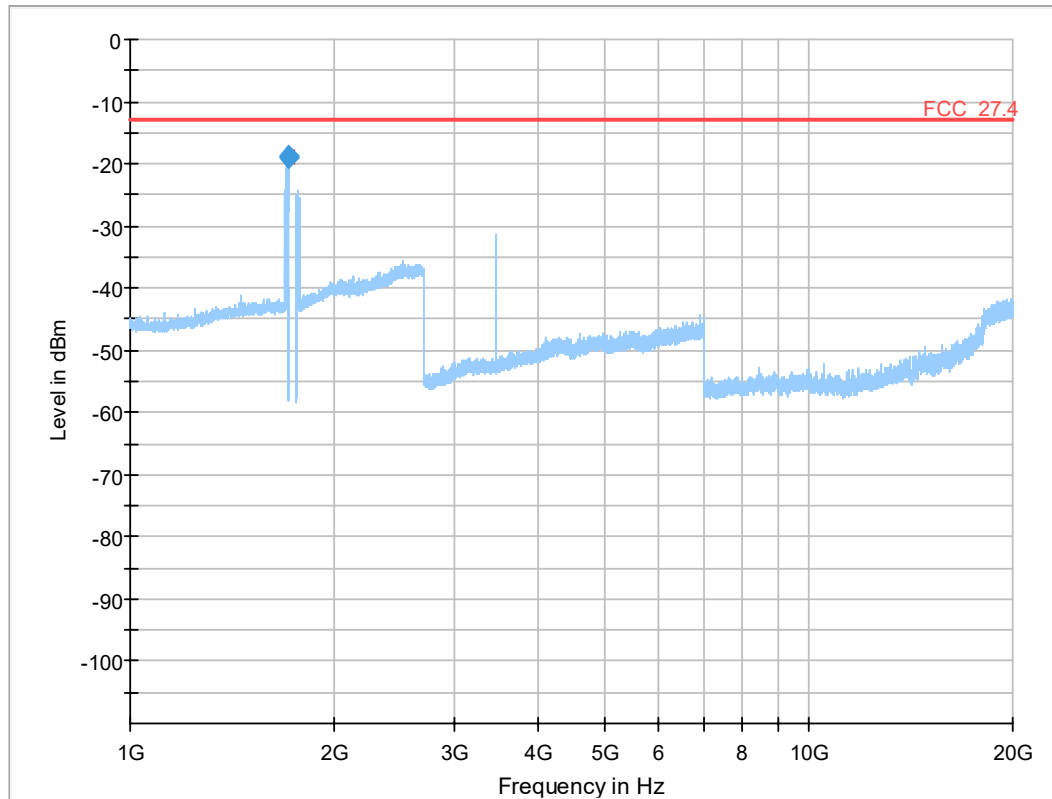


Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1706.467857	-18.98	-13.00	5.98	1000.0	1000.000	150.0	H	45.0	90.0	-65.3
1707.987143	-18.87	-13.00	5.87	1000.0	1000.000	150.0	V	90.0	90.0	-65.3

Final Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1706.467857	-18.98	-13.00	5.98	1000.0	1000.000	150.0	H	45.0	90.0	-65.3
1707.987143	-18.87	-13.00	5.87	1000.0	1000.000	150.0	V	90.0	90.0	-65.3

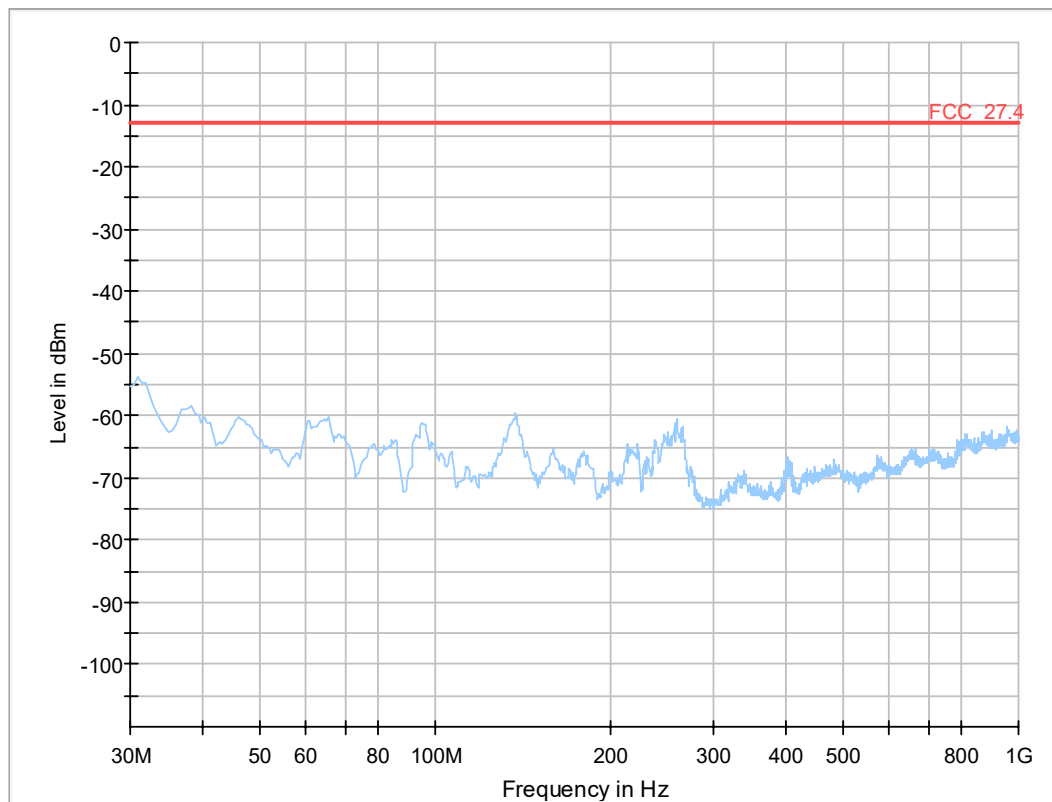

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test2: 27.4; Frequency Band = eFDD4, Mode = QPSK 5MHz, Channel = 20175, Frequency = 1732.5MHz, Method = radiated

Result: Passed


Setup No.: S01_AA02

Date of Test: 2017/01/13 14:37

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

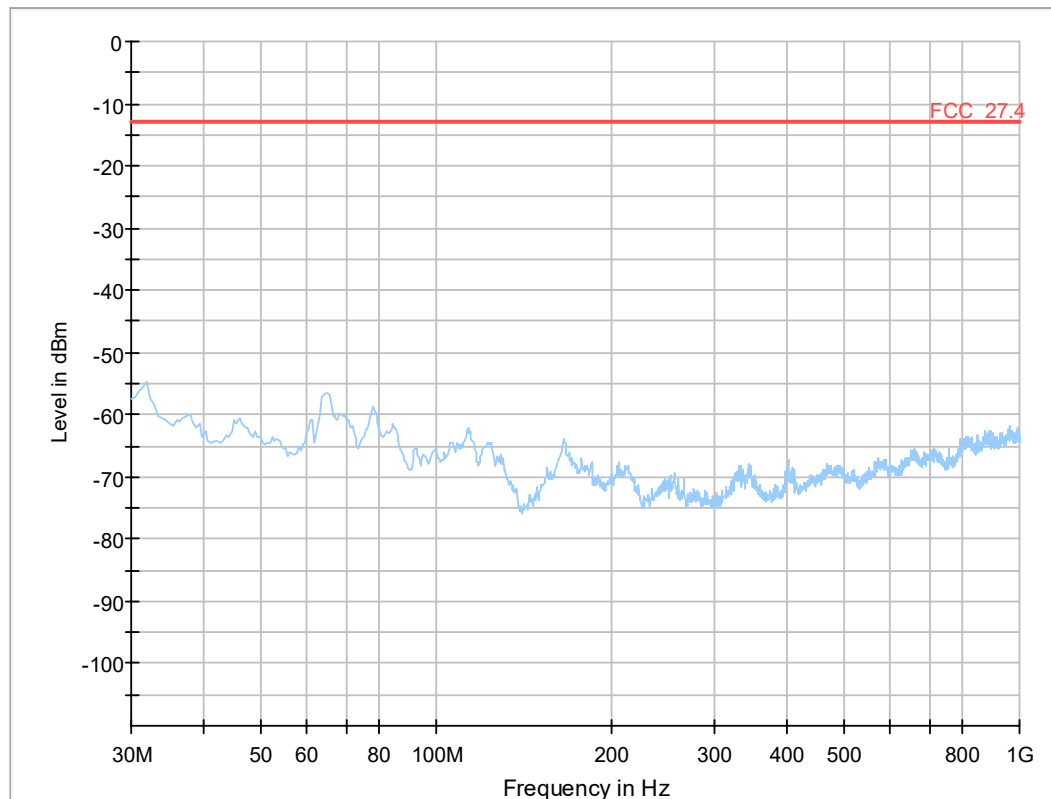


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

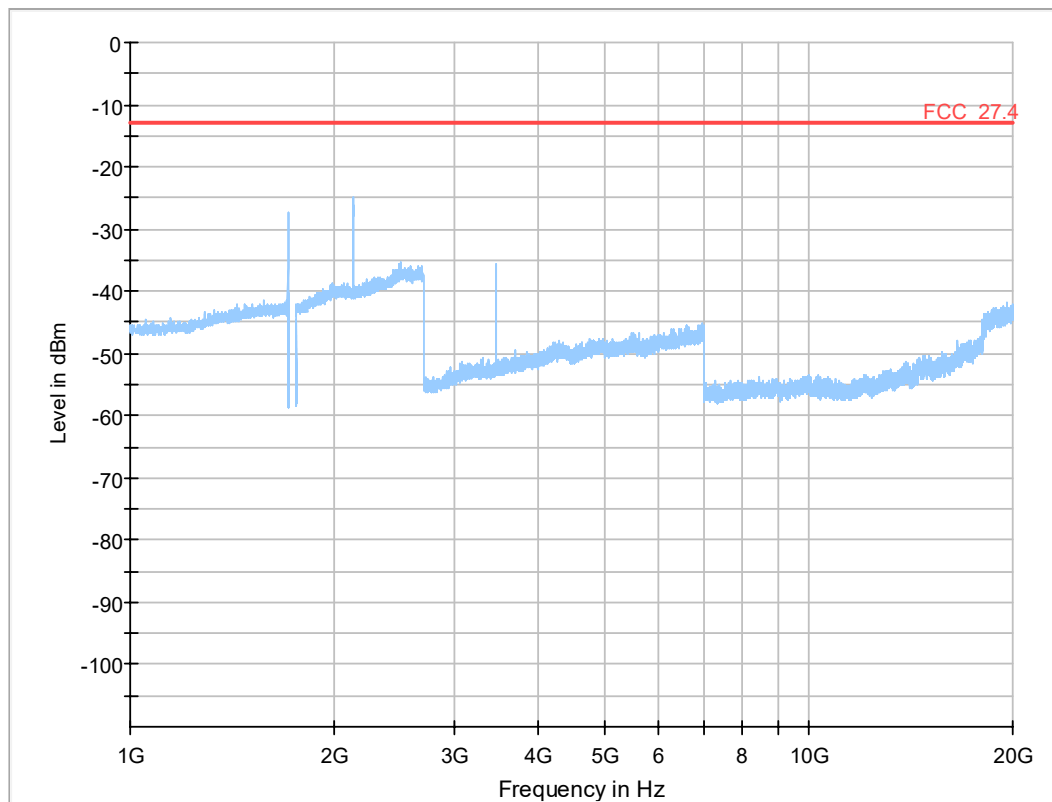

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test: 27.4; Frequency Band = eFDD4, Mode = QPSK 5MHz, Channel = 20375, Frequency = 1752.5MHz, Method = radiated

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/29 13:21

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

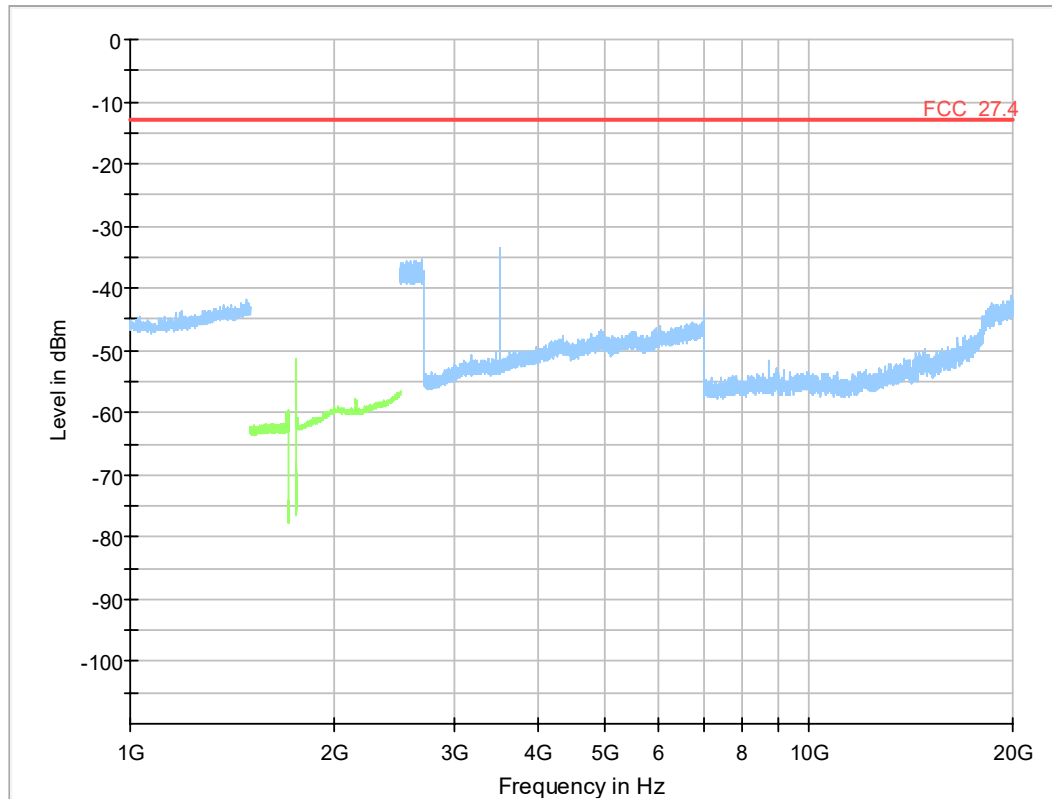


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---	---	---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---	---	---	---	---

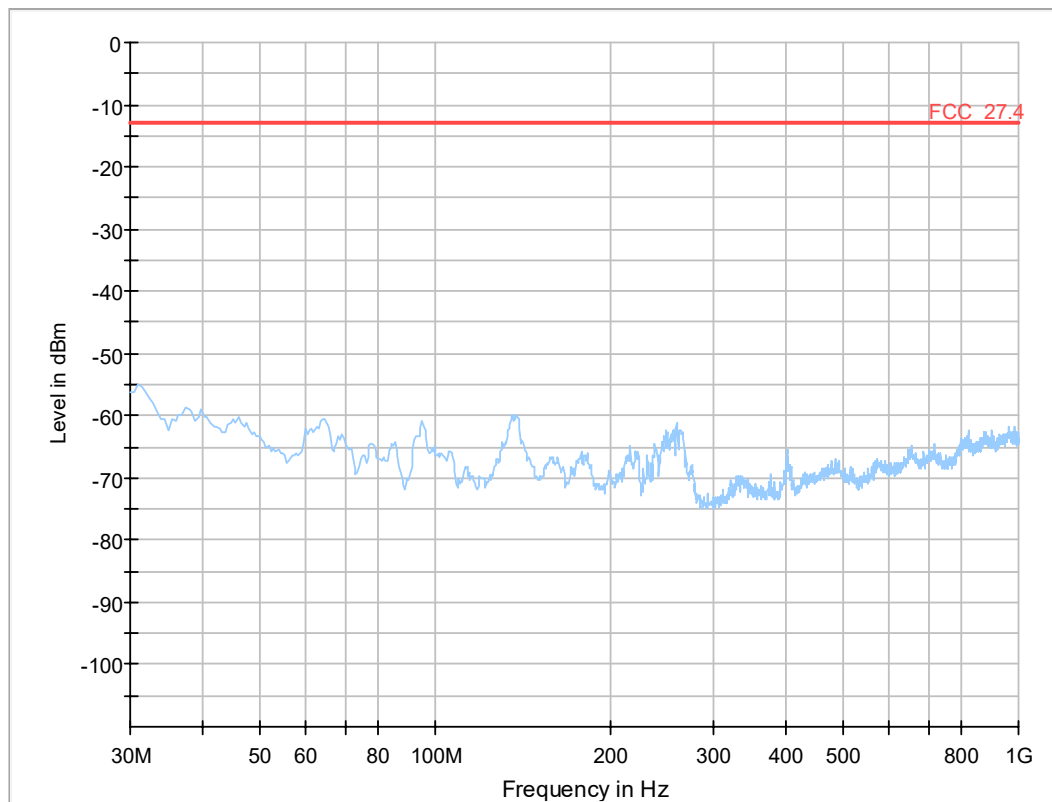

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test: 27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1312, Frequency = 1712.4MHz

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/24 20:45

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

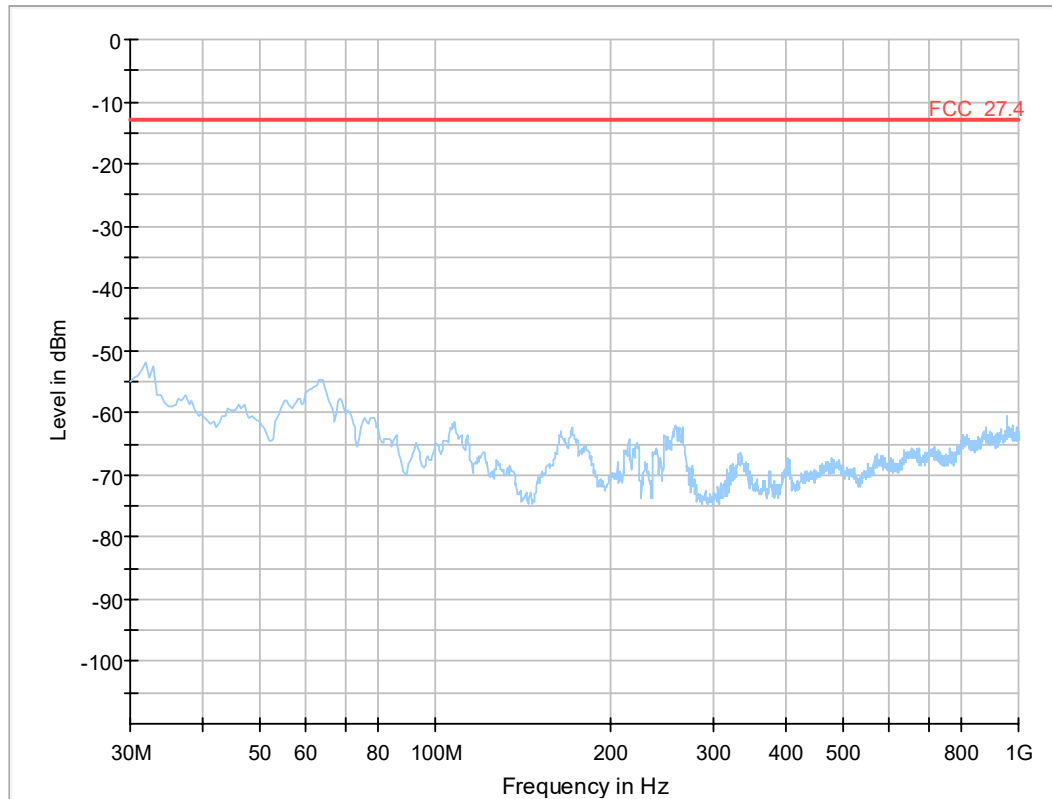


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

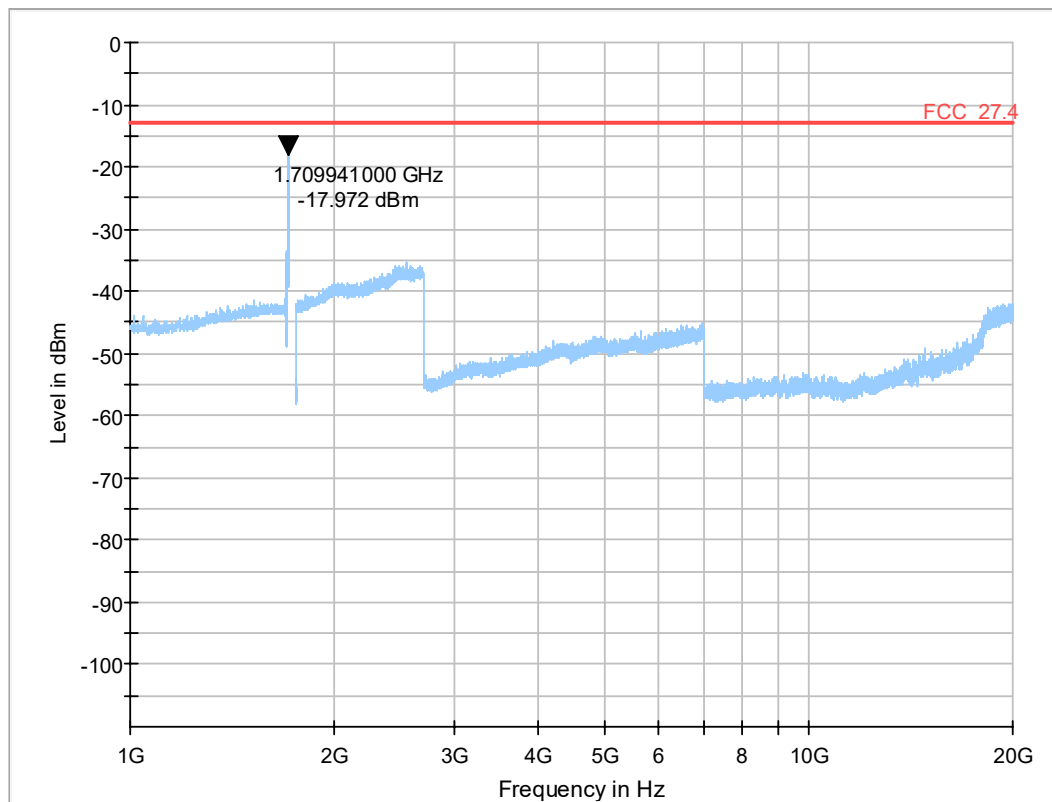

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---


Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test1: 27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1412, Frequency = 1732.4MHz

Result: Passed
Setup No.: S01_AB01
Date of Test: 2016/12/21 20:00
Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 27

Detailed Results:

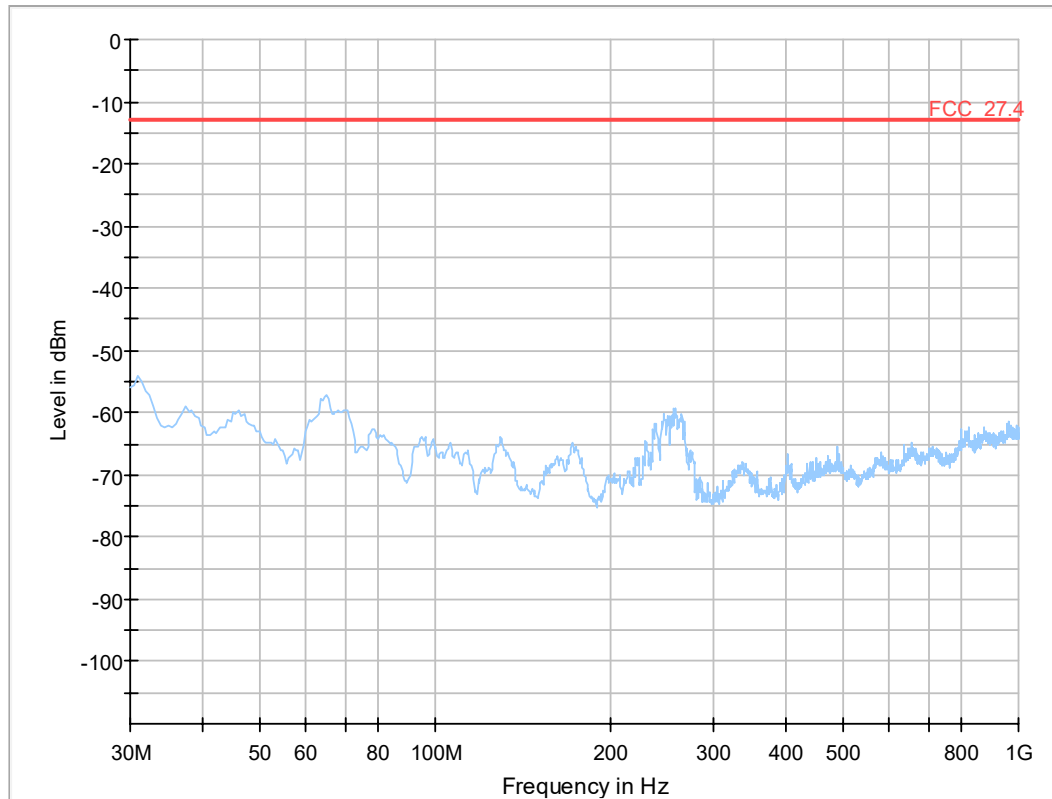


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

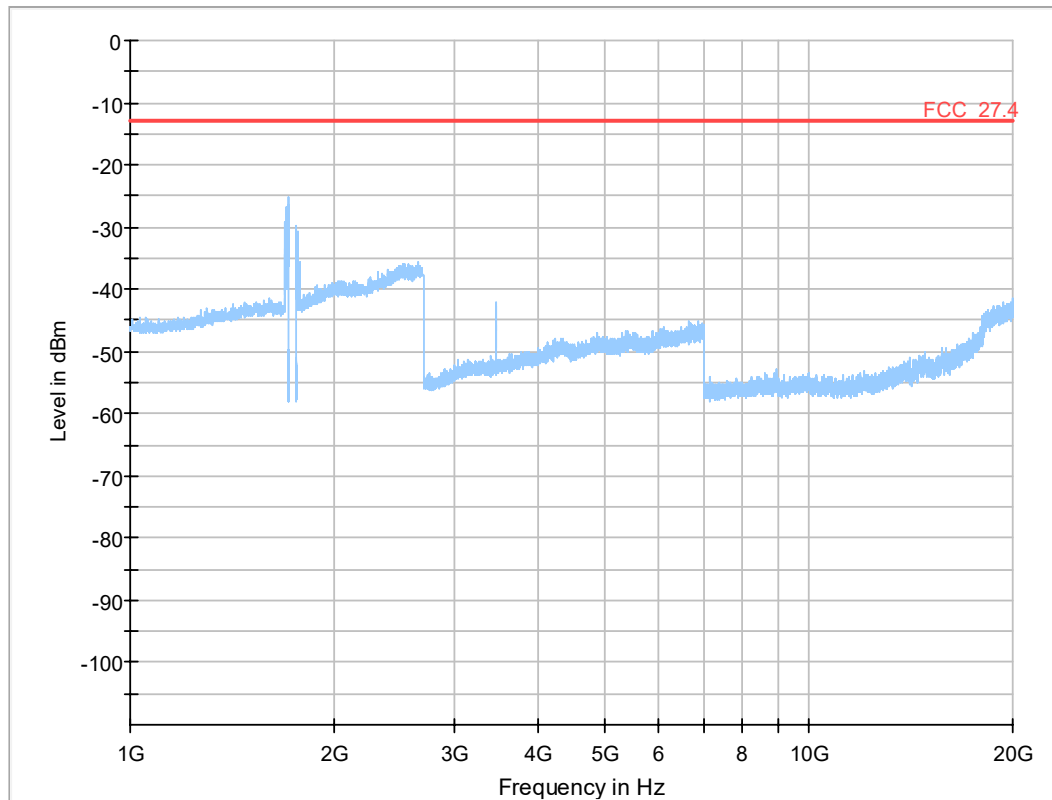

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test2: 27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1412, Frequency = 1732.4MHz

Result: Passed


Setup No.: S01_AA02

Date of Test: 2017/01/13 14:37

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

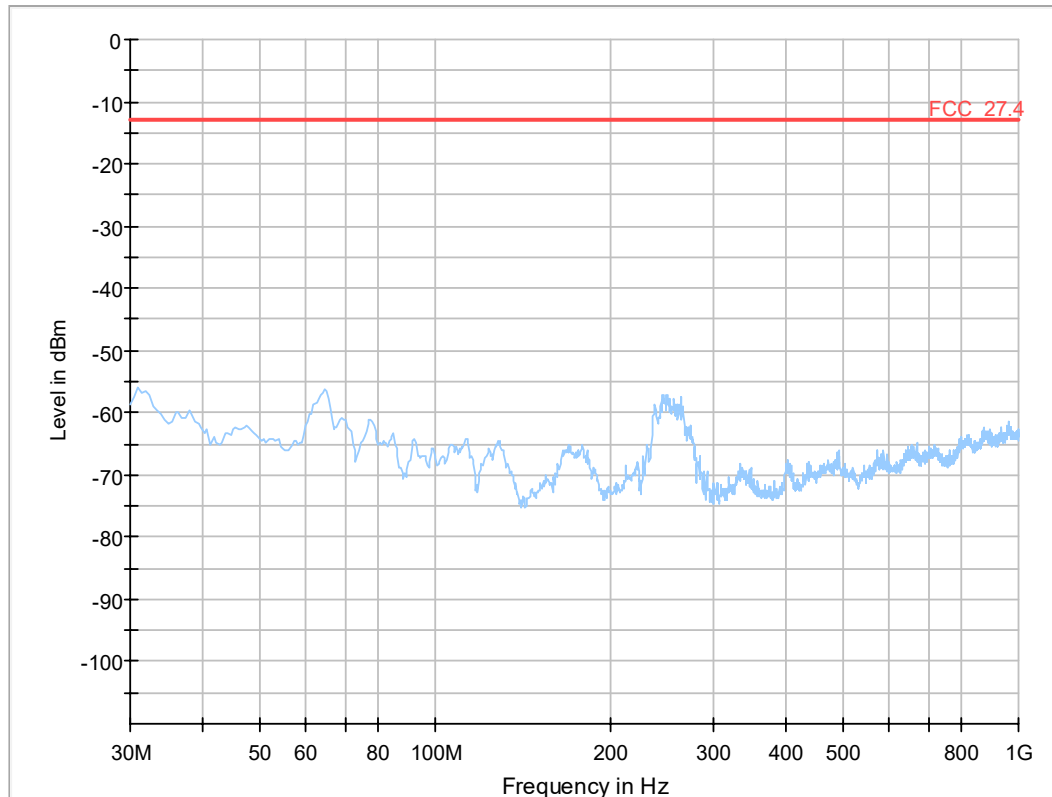


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

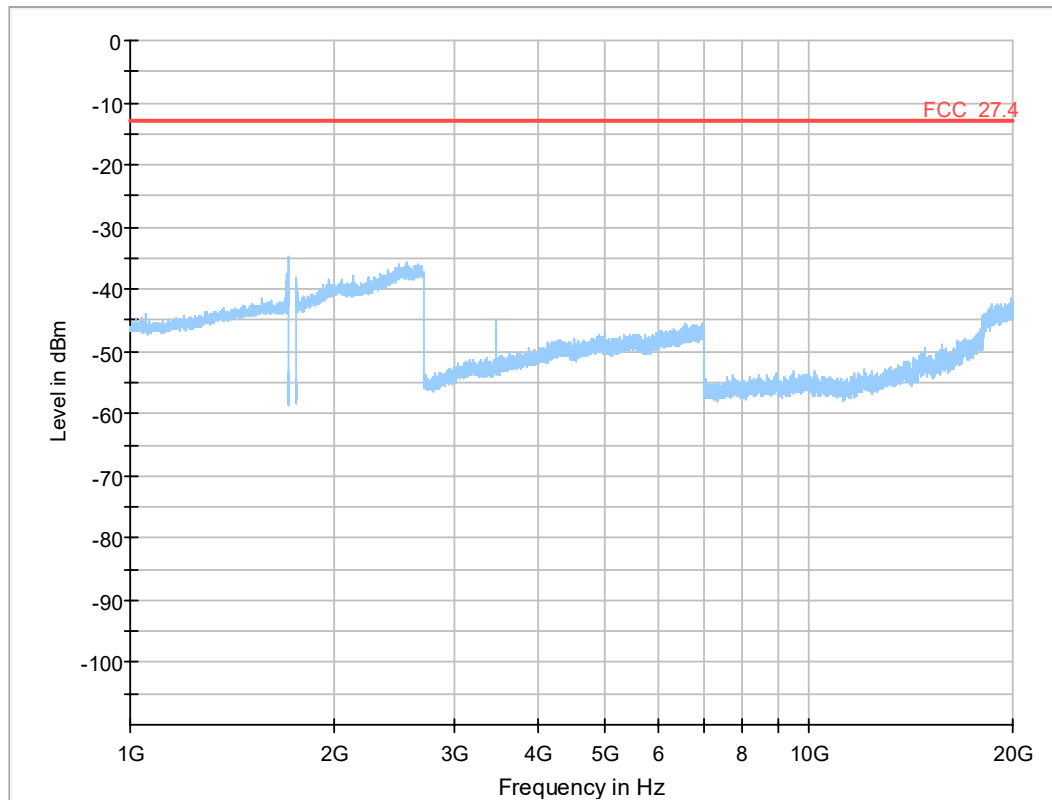

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test: 27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1450, Frequency = 1740.0MHz

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/21 21:00

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

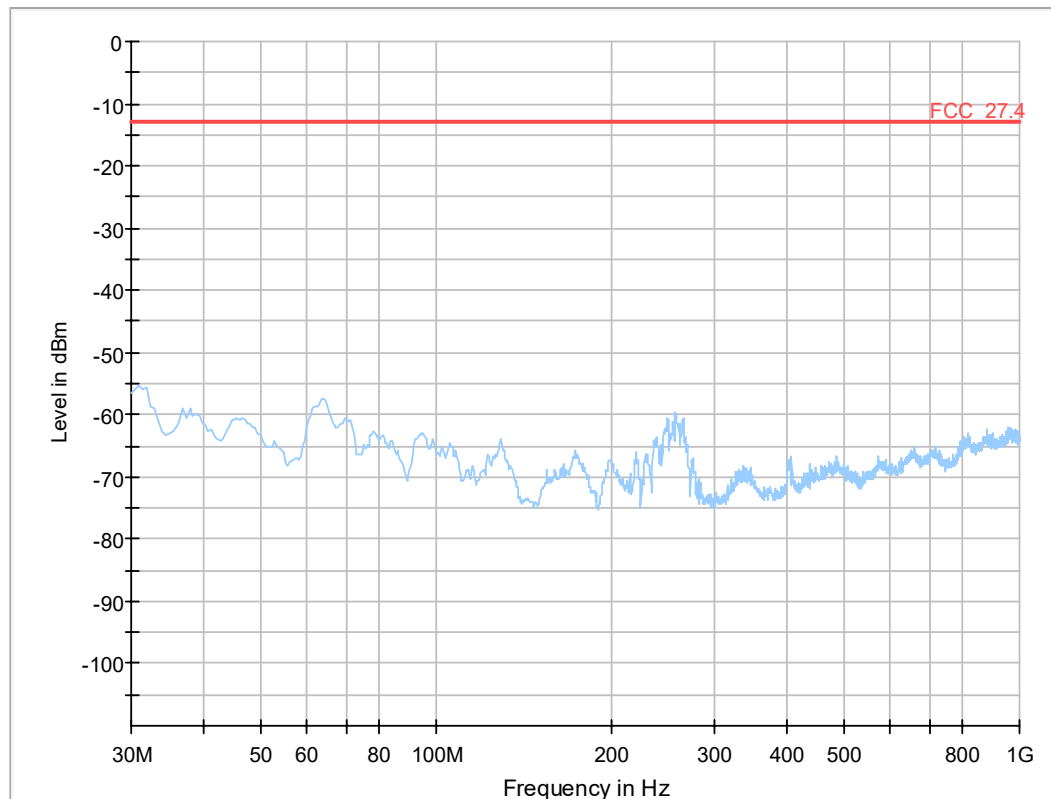


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

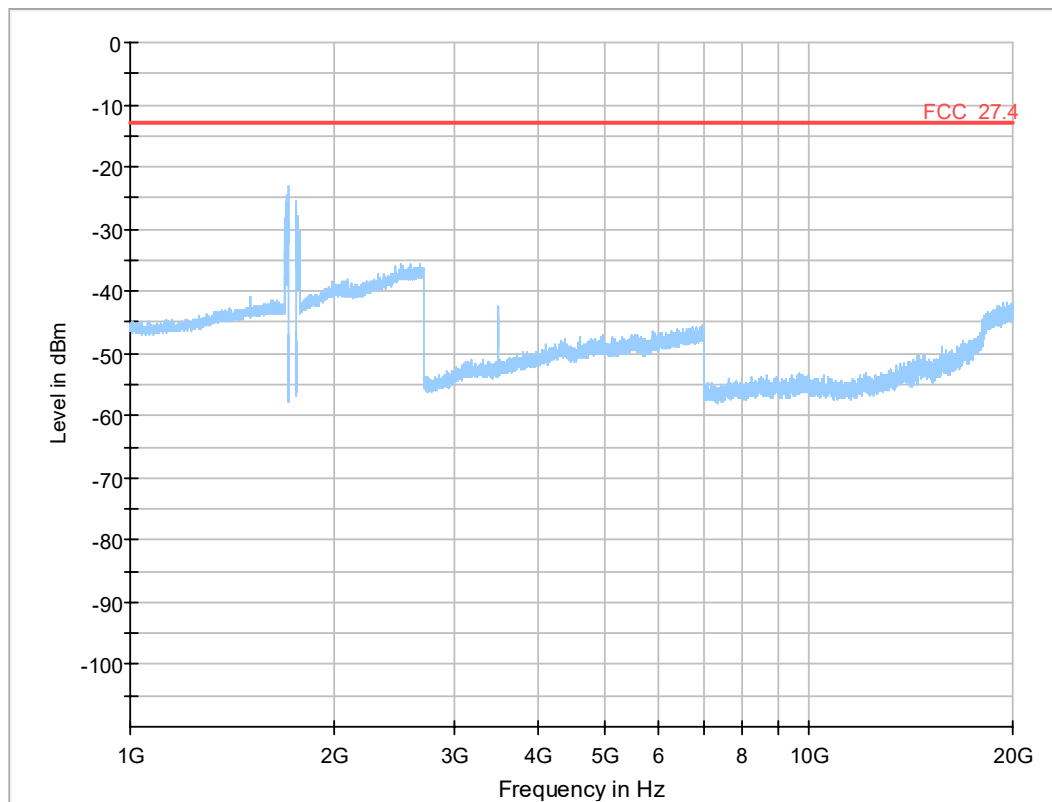

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---


Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test: 27.4; Frequency Band = FDD4, Mode = HSDPA, Channel = 1513, Frequency = 1752.6MHz

Result: Passed
Setup No.: S01_AB01
Date of Test: 2016/12/24 22:00
Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 27

Detailed Results:

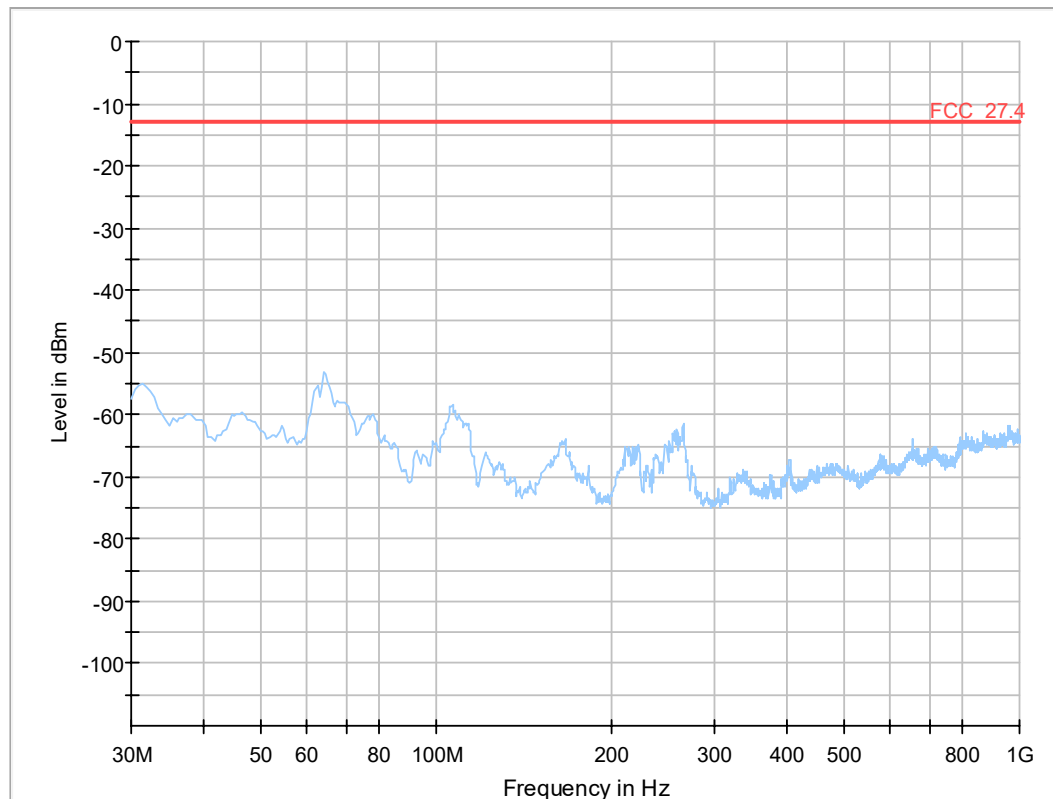


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

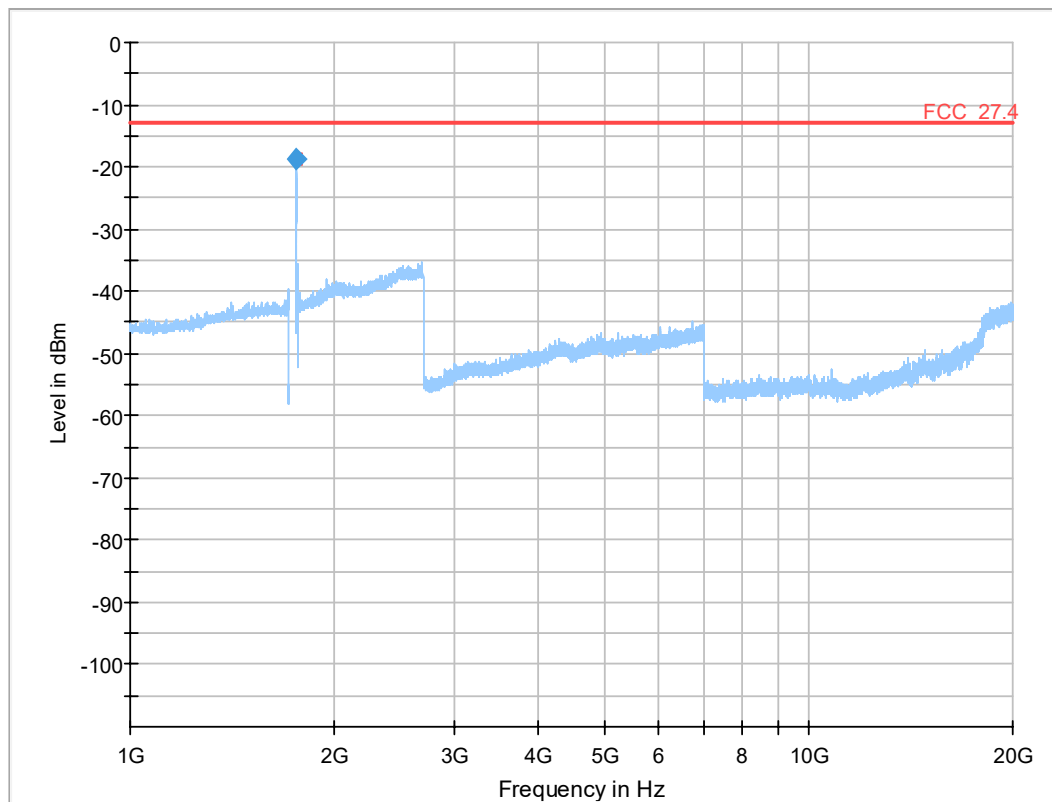

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1756.261000	-18.88	-13.00	5.88	1000.0	100.000	150.0	H	45.0	0.0	-65.0

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1756.261000	-18.88	-13.00	5.88	1000.0	100.000	150.0	H	45.0	0.0	-65.0

Test: 27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1312, Frequency = 1712.4MHz

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/28 21:11

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

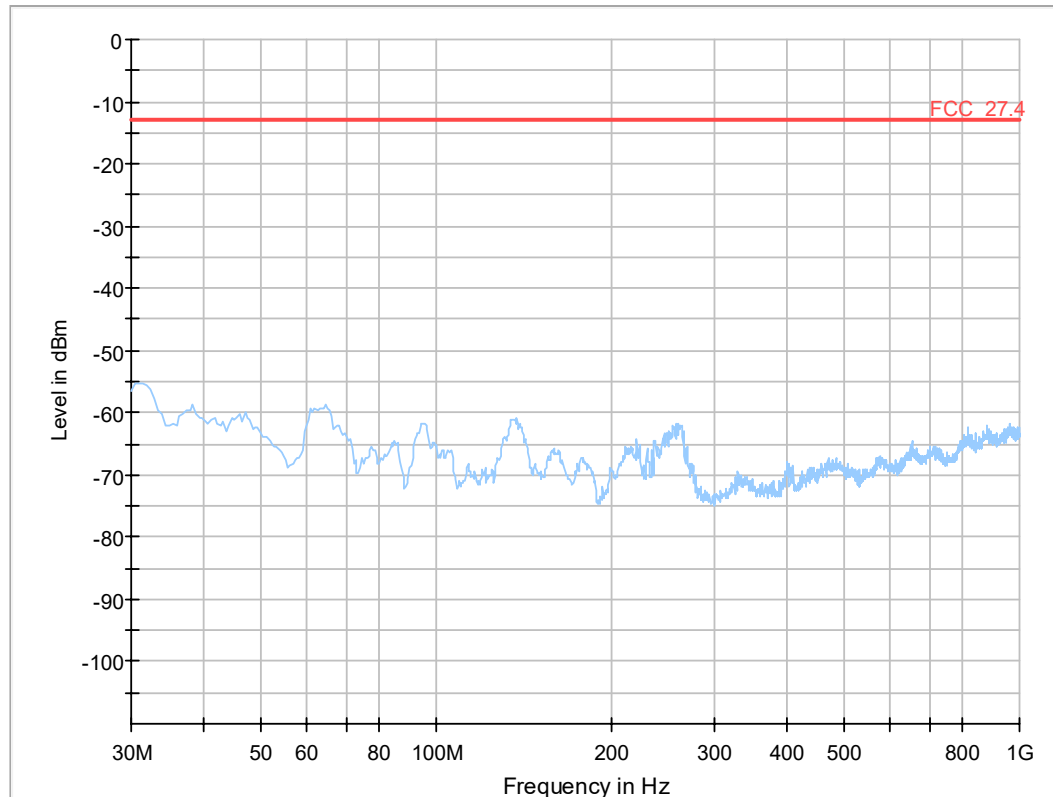


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

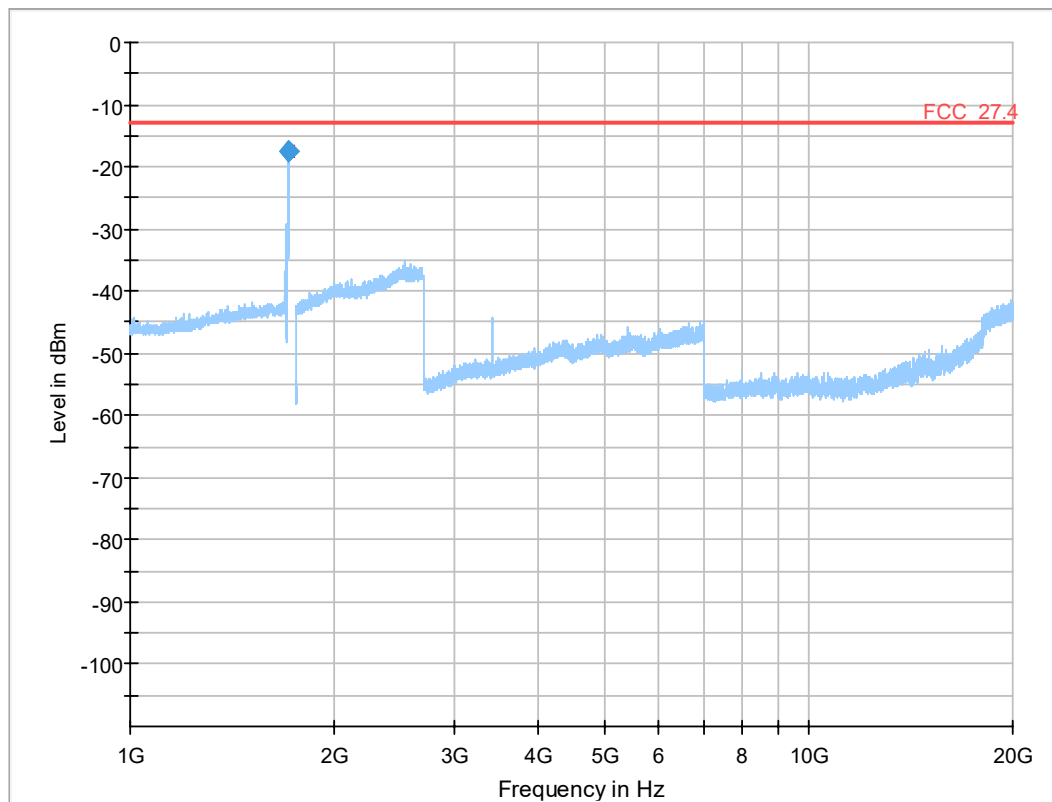

Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1708.946000	-17.66	-13.00	4.66	1000.0	100.000	150.0	H	135.0	90.0	-65.3
1709.885000	-17.65	-13.00	4.65	1000.0	50.000	150.0	H	45.0	0.0	-65.3

Final Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1708.946000	-17.66	-13.00	4.66	1000.0	100.000	150.0	H	135.0	90.0	-65.3
1709.885000	-17.65	-13.00	4.65	1000.0	50.000	150.0	H	45.0	0.0	-65.3

Test1: 27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1412, Frequency = 1732.4MHz

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/28 21:12

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

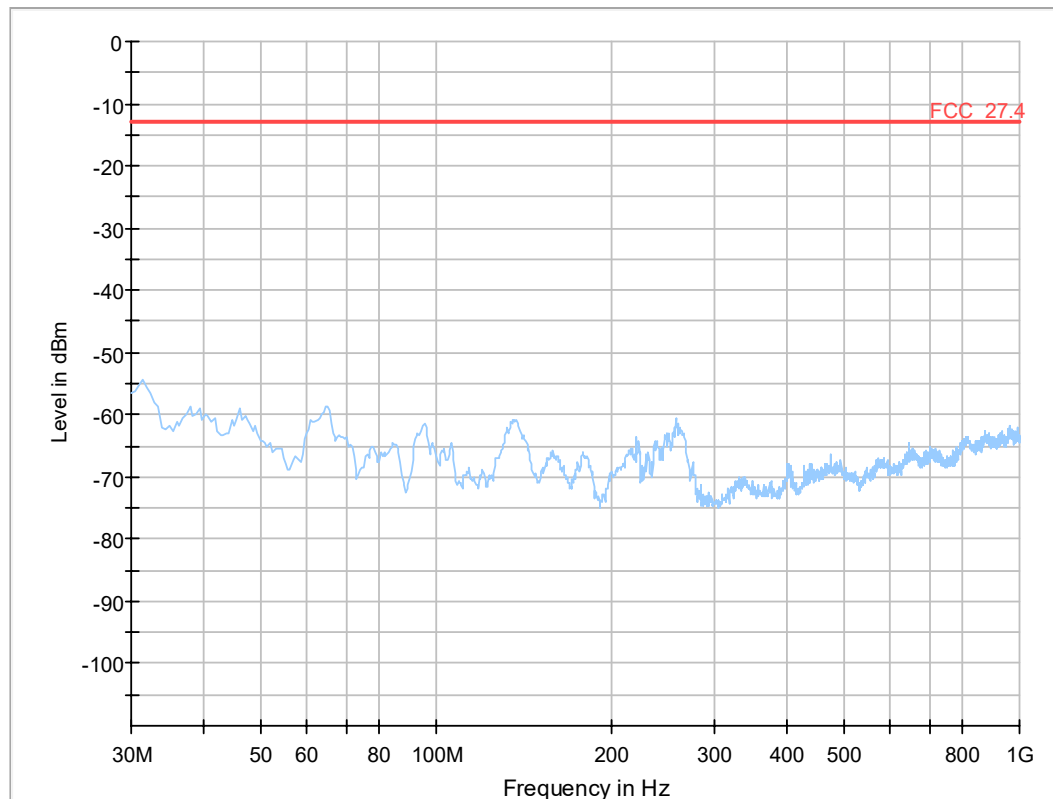


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

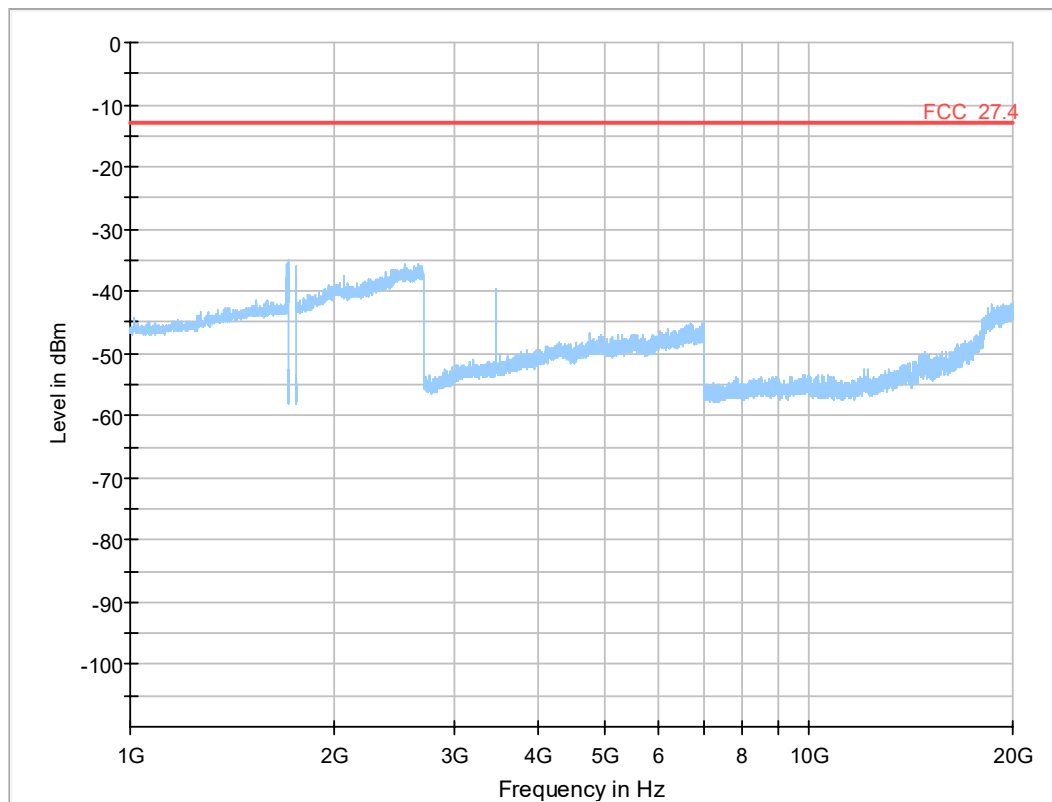

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test2: 27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1412, Frequency = 1732.4MHz

Result: Passed


Setup No.: S01_AA02

Date of Test: 2017/01/13 14:39

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

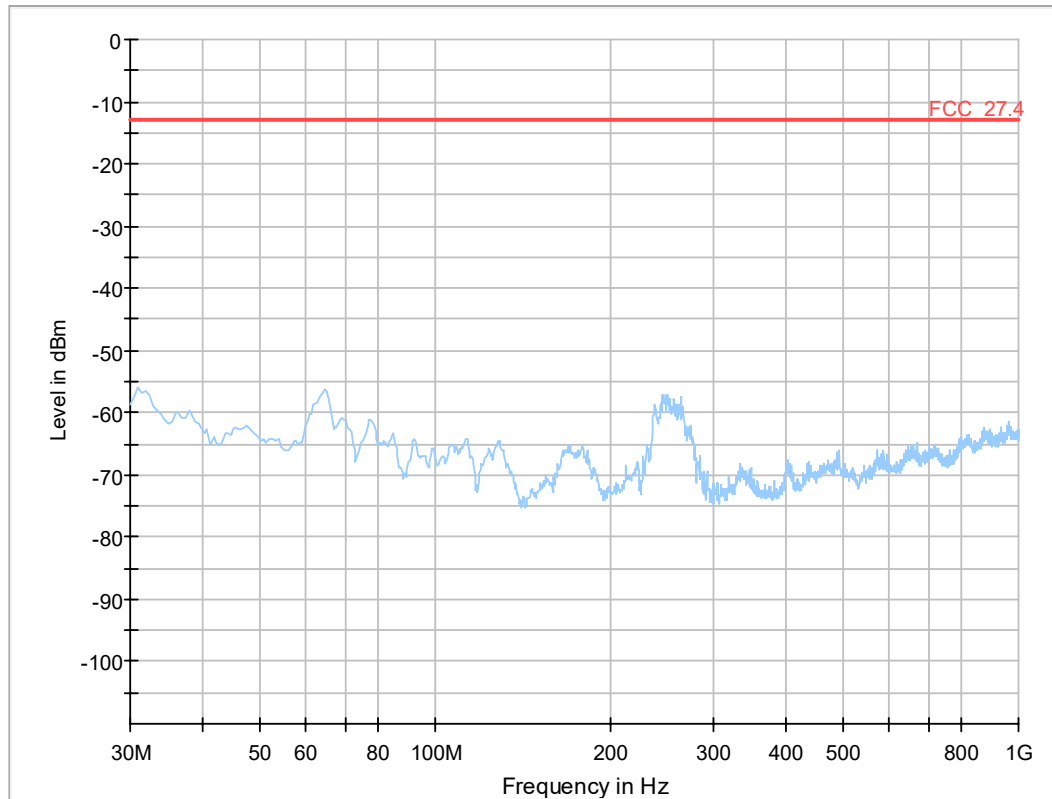


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

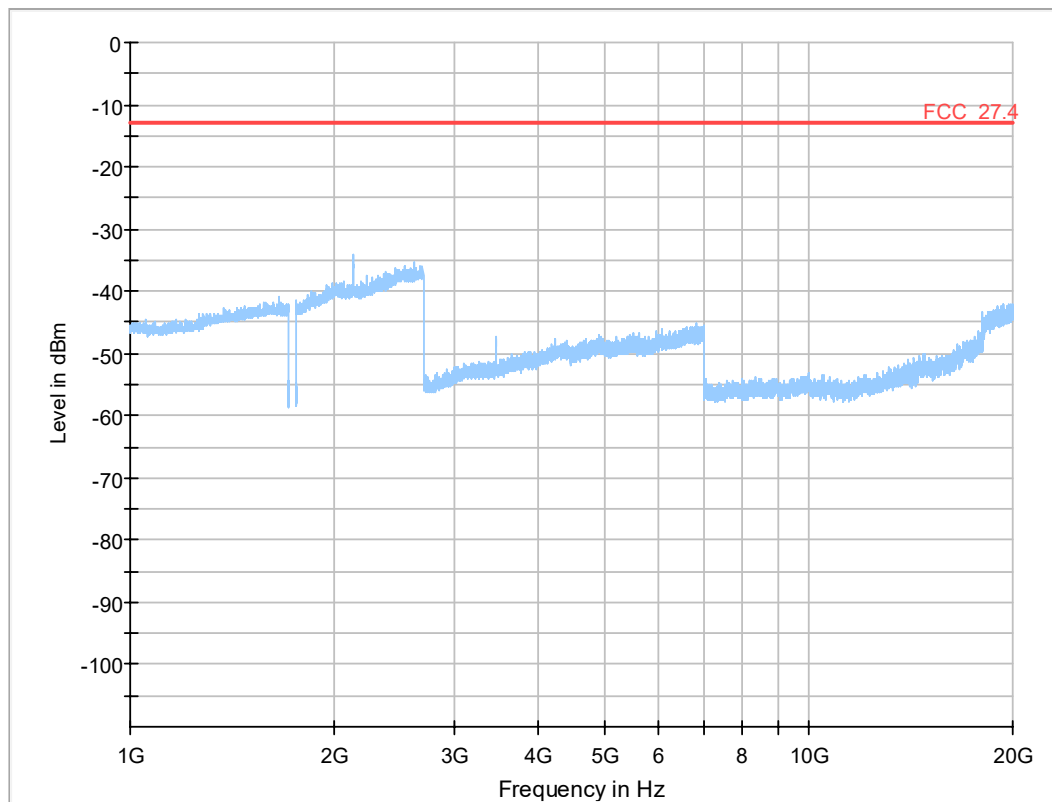

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test: 27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1450, Frequency = 1740.0MHz

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/28 21:12

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

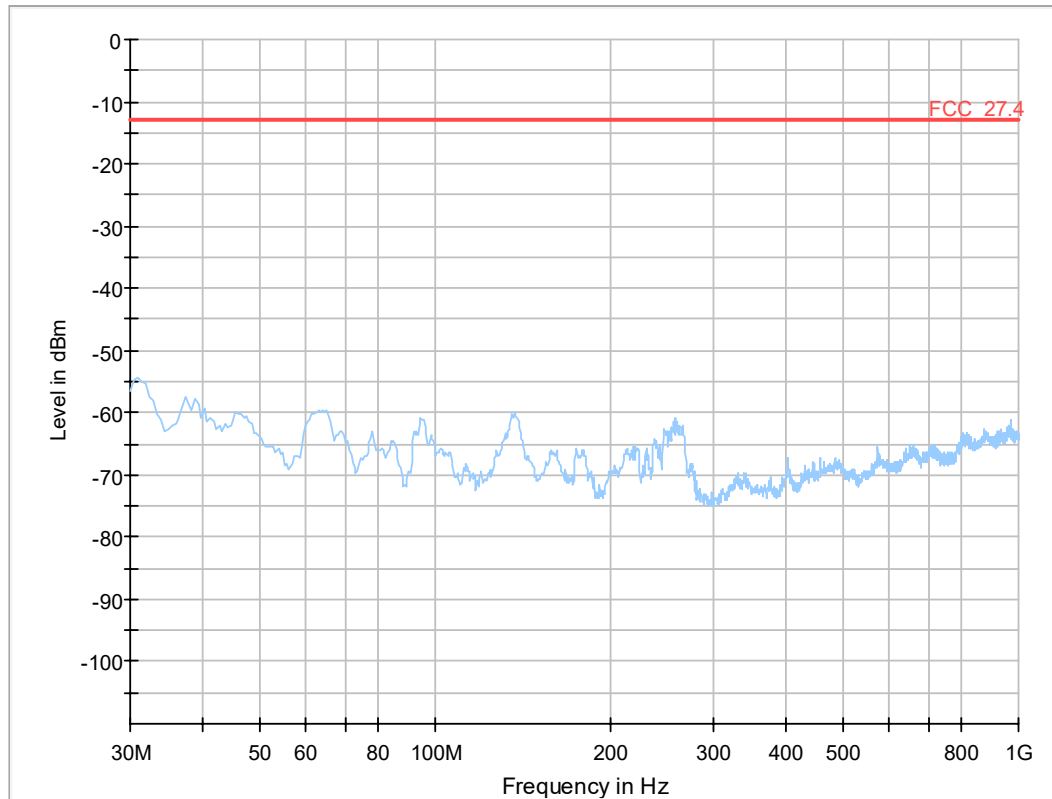


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

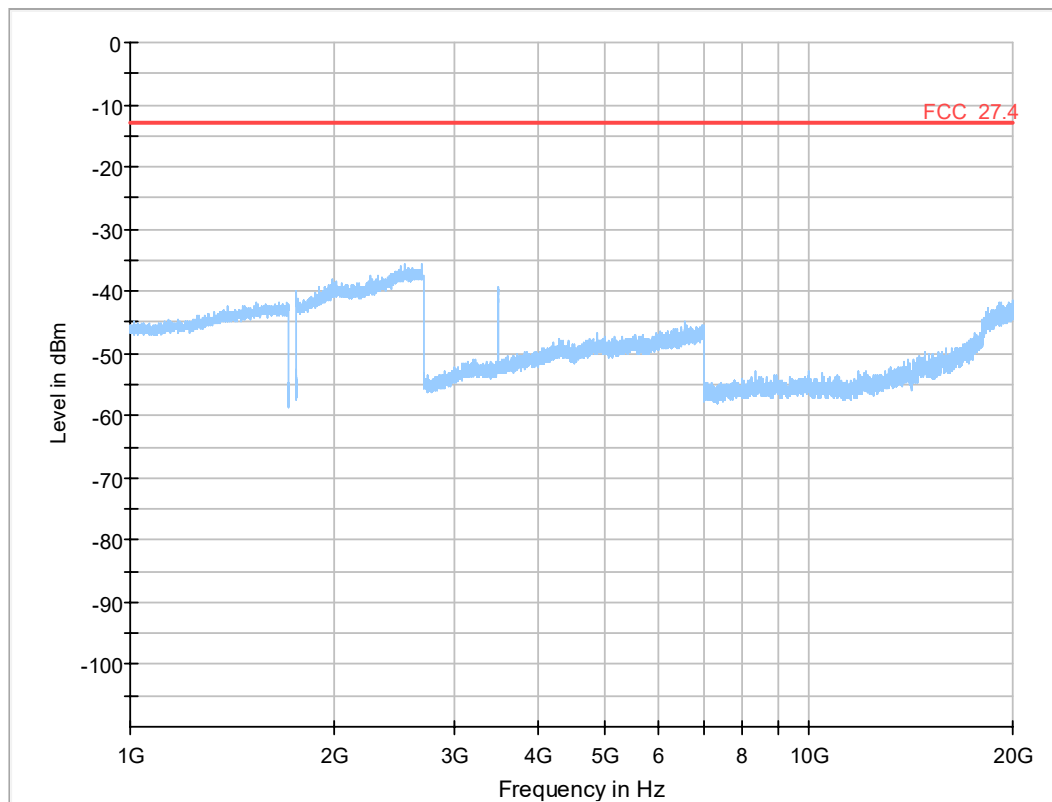

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test: 27.4; Frequency Band = FDD4, Mode = HSUPA, Channel = 1513, Frequency = 1752.6MHz

Result: Passed


Setup No.: S01_AB01

Date of Test: 2016/12/28 21:12

Body: FCC47CFRChIPART27MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 27

Detailed Results:

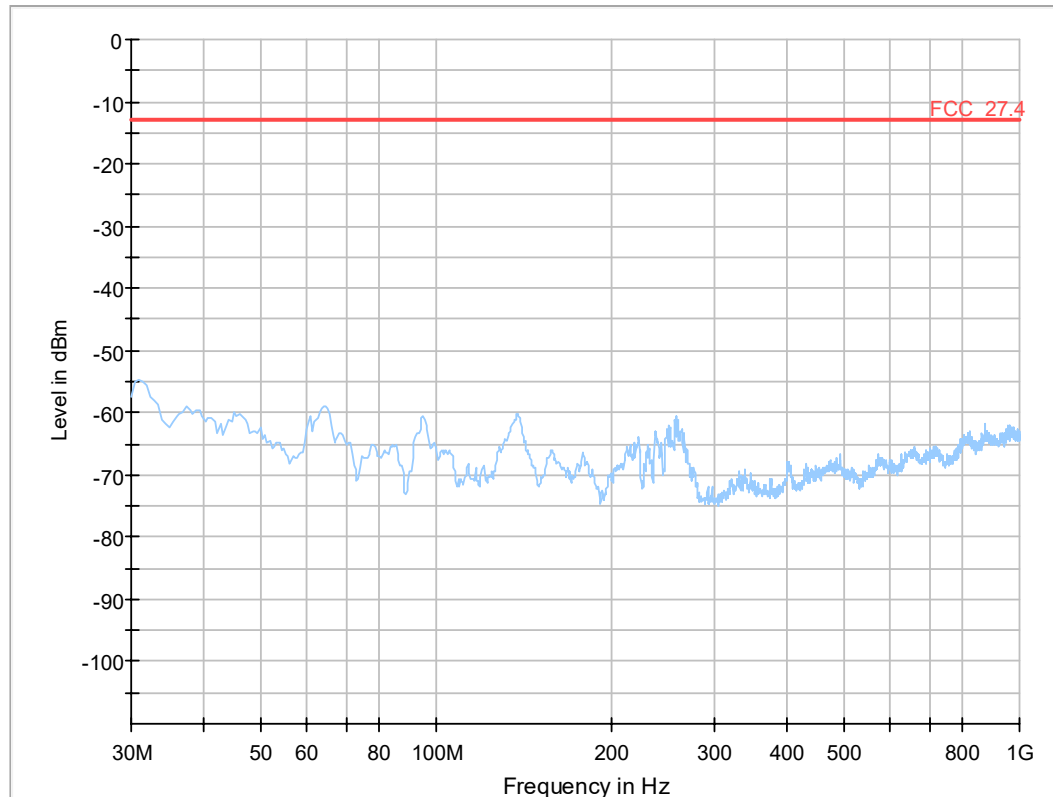


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

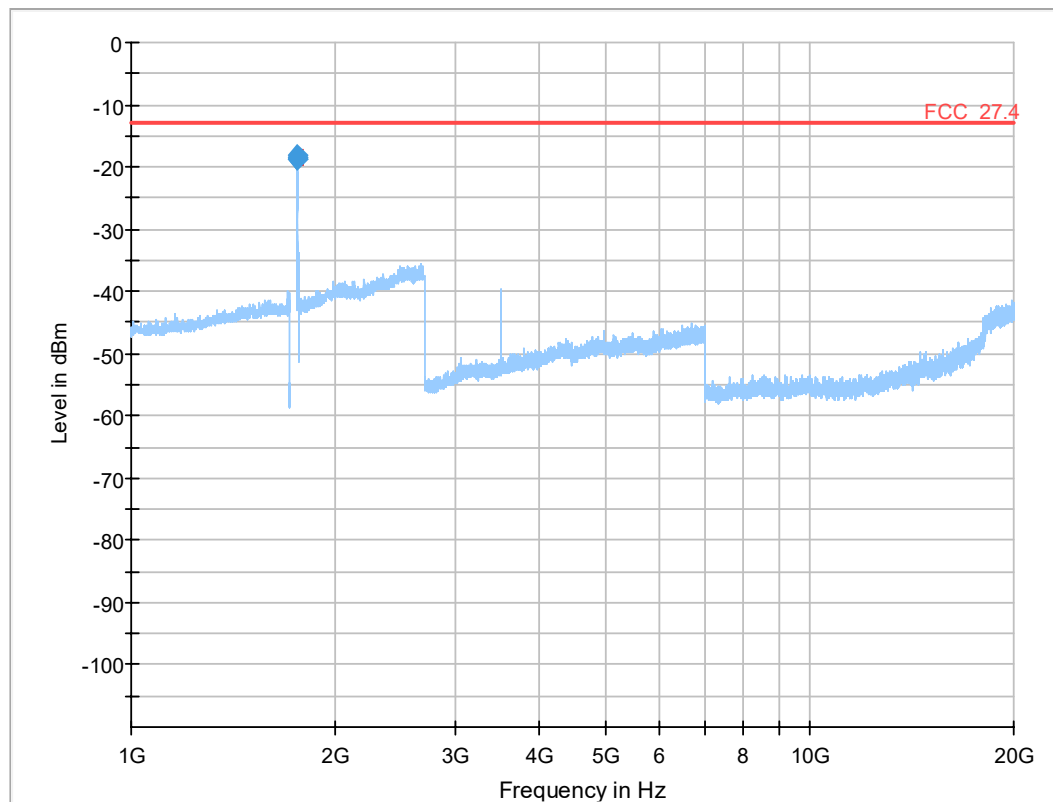

Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1755.121000	-18.83	-13.00	5.83	1000.0	50.000	150.0	H	45.0	0.0	-65.0
1756.000000	-18.41	-13.00	5.41	1000.0	100.000	150.0	H	45.0	0.0	-65.0
1756.189000	-18.00	-13.00	5.00	1000.0	100.000	150.0	H	135.0	90.0	-65.0
1756.261000	-18.73	-13.00	5.73	1000.0	100.000	150.0	H	45.0	0.0	-65.0

Final Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1755.121000	-18.83	-13.00	5.83	1000.0	50.000	150.0	H	45.0	0.0	-65.0
1756.000000	-18.41	-13.00	5.41	1000.0	100.000	150.0	H	45.0	0.0	-65.0
1756.189000	-18.00	-13.00	5.00	1000.0	100.000	150.0	H	135.0	90.0	-65.0
1756.261000	-18.73	-13.00	5.73	1000.0	100.000	150.0	H	45.0	0.0	-65.0

Test: 27.4; Frequency Band = FDD4, Mode = W-CDMA, Channel = 1312, Frequency = 1712.4MHz

Result: Passed


Setup No.: S01_AB01

Date of Test: 2017/01/18 15:40

Body: NO BODY

Test Specification: FCC part 2 and 27

Detailed Results:

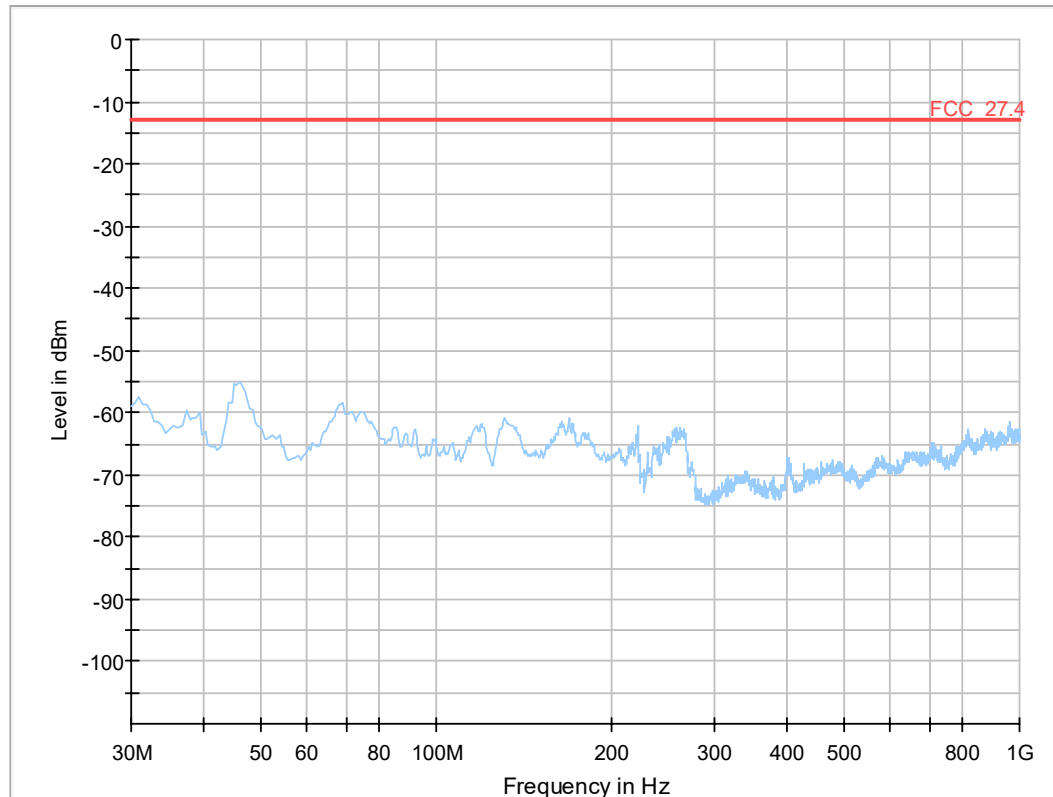


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

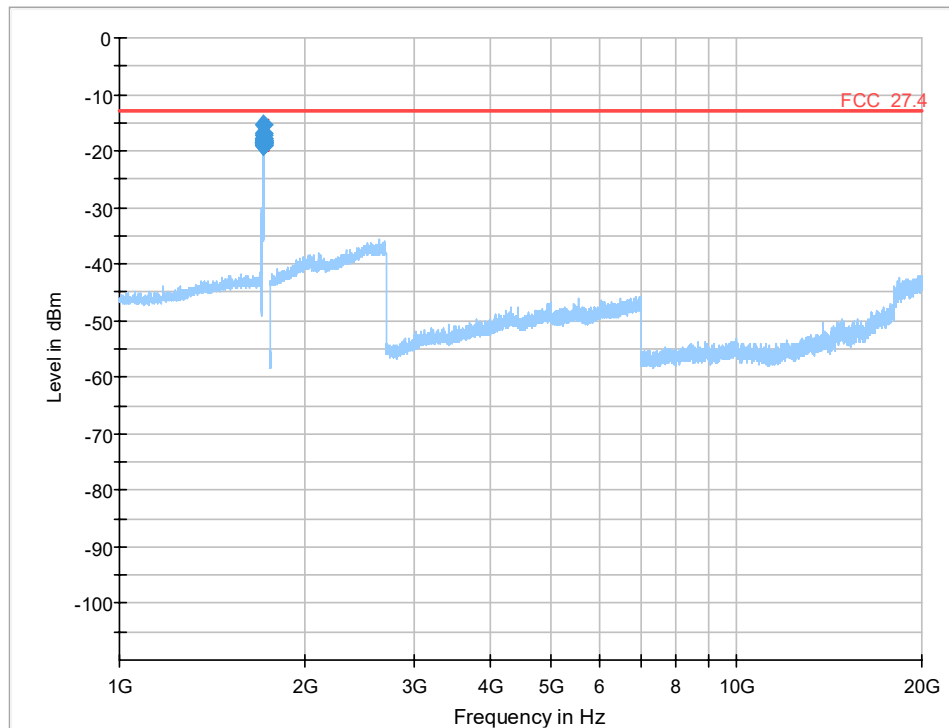

Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1708.469000	-18.79	-13.00	5.79	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.496000	-18.50	-13.00	5.50	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.595000	-18.66	-13.00	5.66	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.604000	-18.07	-13.00	5.07	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.649000	-18.52	-13.00	5.52	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.811000	-18.98	-13.00	5.98	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.856000	-18.99	-13.00	5.99	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.901000	-17.91	-13.00	4.91	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.919000	-18.50	-13.00	5.50	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.946000	-18.00	-13.00	5.00	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.964000	-18.42	-13.00	5.42	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.973000	-18.39	-13.00	5.39	1000.0	100.000	150.0	H	-135.0	0.0	-65.3
1708.982000	-16.98	-13.00	3.98	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1709.285000	-18.69	-13.00	5.69	1000.0	50.000	150.0	H	45.0	0.0	-65.3
1709.485000	-17.68	-13.00	4.68	1000.0	50.000	150.0	H	45.0	0.0	-65.3
1709.786000	-15.31	-13.00	2.31	1000.0	50.000	150.0	H	45.0	0.0	-65.3
1709.845000	-17.18	-13.00	4.18	1000.0	50.000	150.0	H	-135.0	0.0	-65.3
1709.946000	-18.39	-13.00	5.39	1000.0	50.000	150.0	H	45.0	0.0	-65.3
1709.960000	-18.56	-13.00	5.56	1000.0	50.000	150.0	H	45.0	0.0	-65.3


Final Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
1708.469000	-18.79	-13.00	5.79	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.496000	-18.50	-13.00	5.50	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.595000	-18.66	-13.00	5.66	1000.0	100.000	150.0	H	45.0	0.0	-65.3
1708.604000	-18.07	-13.00	5.07	1000.0	100.000	150.0	H	45.0	0.0	-65.3

Test1: 27.4; Frequency Band = FDD4, Mode = W-CDMA, Channel = 1412, Frequency = 1732.4MHz

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AB01
<i>Date of Test:</i>	2017/01/17 18:25
<i>Body:</i>	NO BODY
<i>Test Specification:</i>	FCC part 2 and 27

Detailed Results:

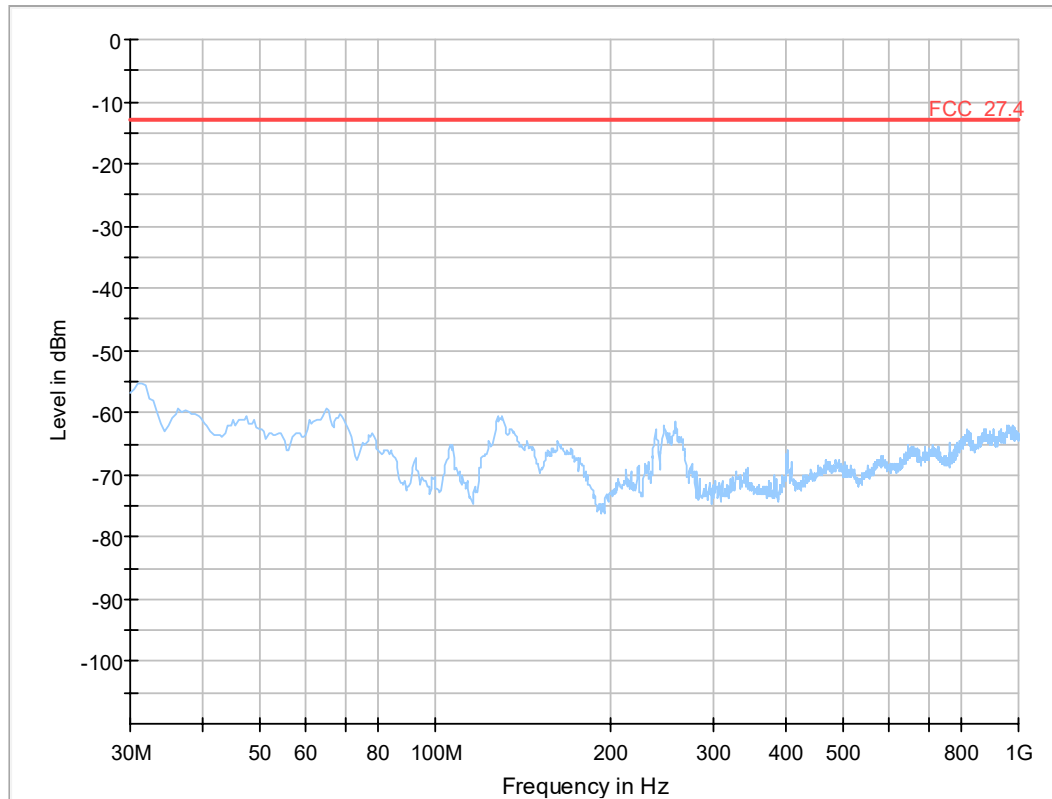


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

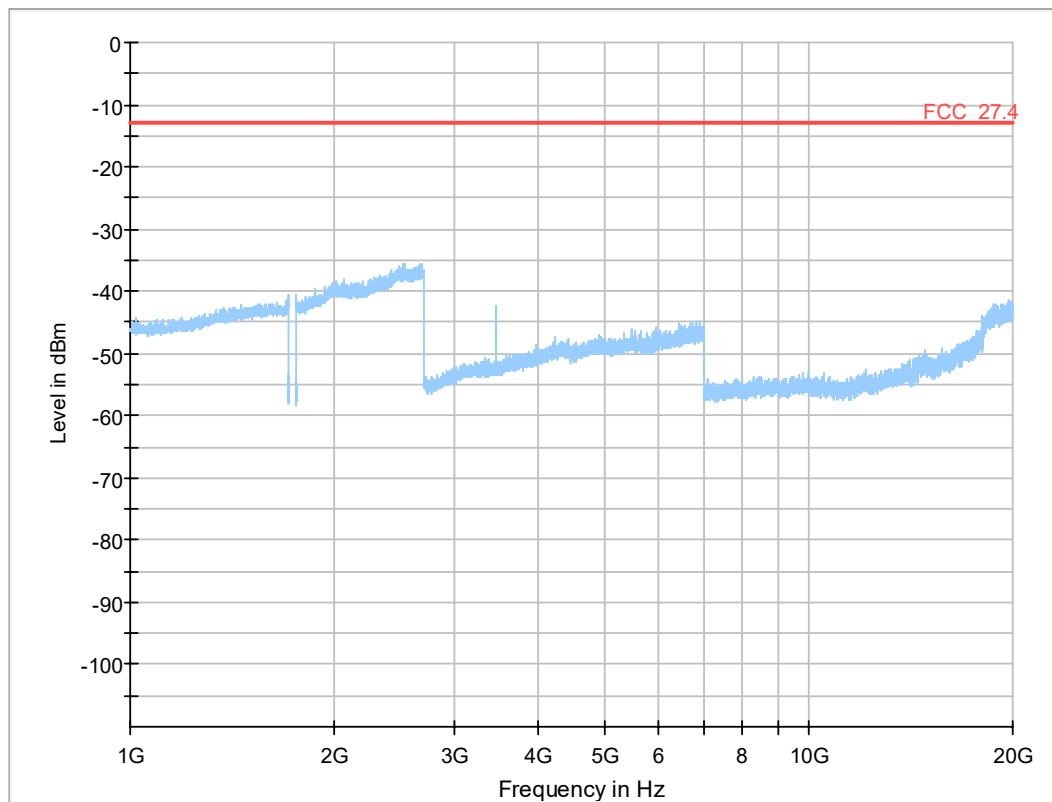

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test2: 27.4; Frequency Band = FDD4, Mode = W-CDMA, Channel = 1412, Frequency = 1732.4MHz

Result: Passed


Setup No.: S01_AA02

Date of Test: 2017/01/17 18:23

Body: NO BODY

Test Specification: FCC part 2 and 27

Detailed Results:

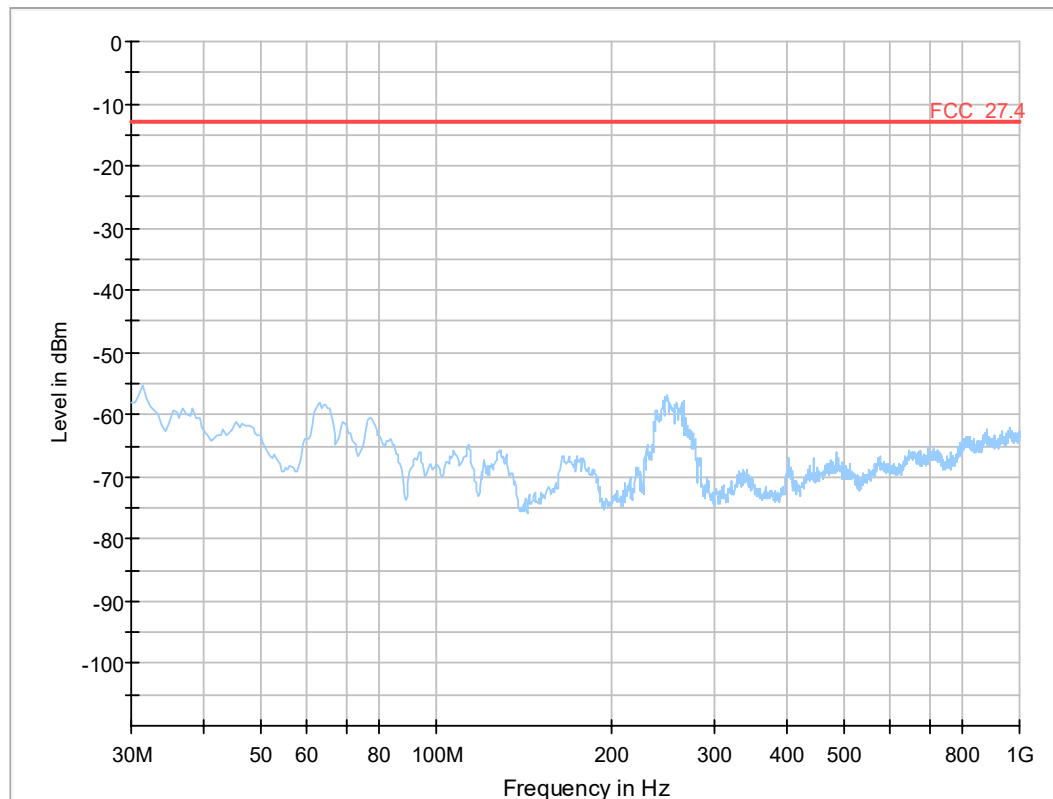


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

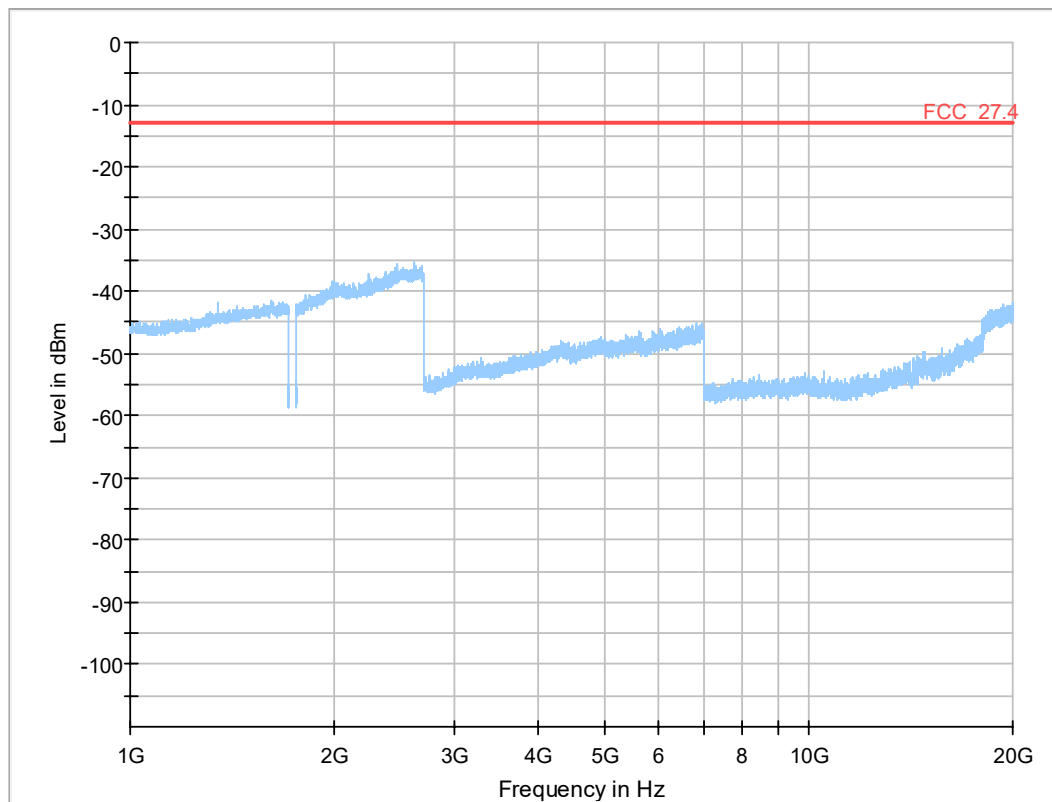

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Test: 27.4; Frequency Band = FDD4, Mode = W-CDMA, Channel = 1513, Frequency = 1752.6MHz

Result: Passed


Setup No.: S01_AB01

Date of Test: 2017/01/18 16:02

Body: NO BODY

Test Specification: FCC part 2 and 27

Detailed Results:

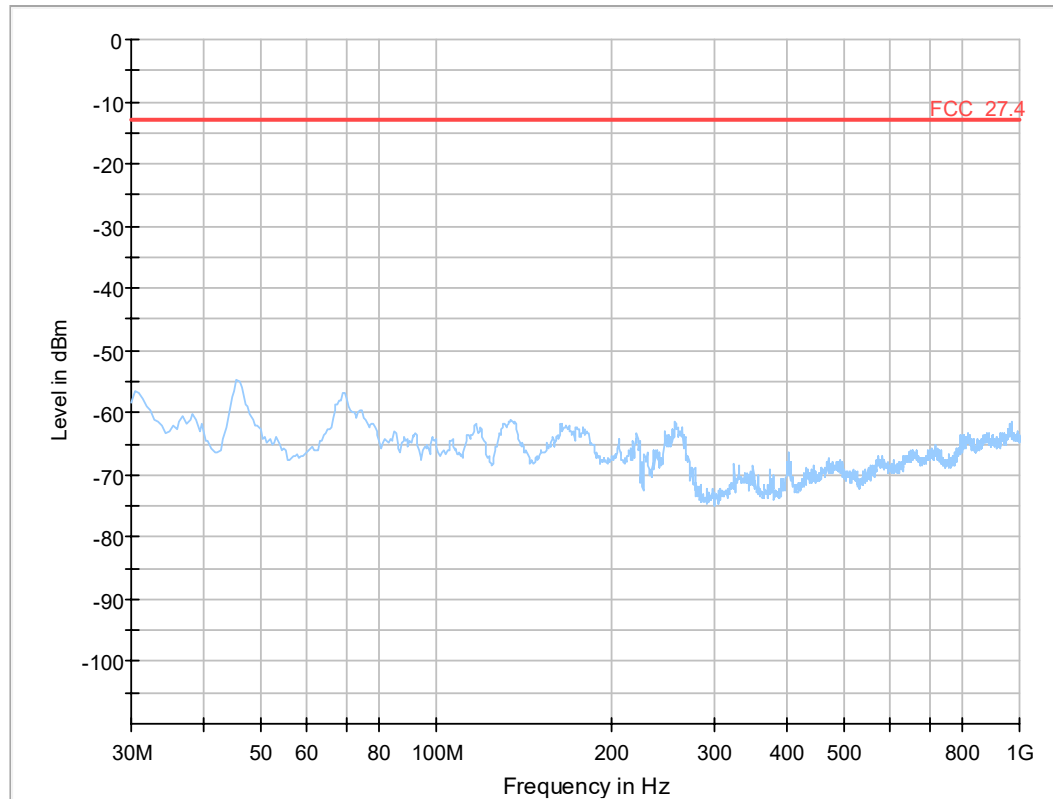


Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

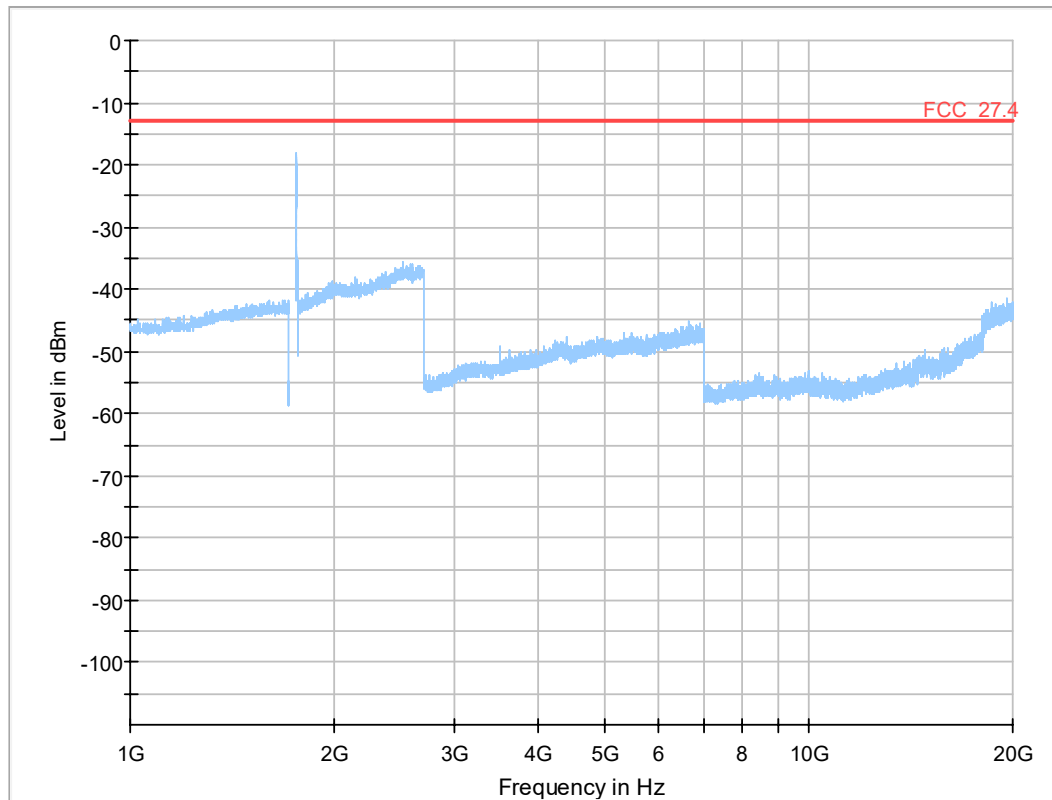

Critical_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

Final_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
---	---	---	---	---	---	---		---	---	---

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 1		
<i>Description:</i>	Anechoic Chamber for radiated testing		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Execution</i>
	NSA (FCC)	2014/01/09	2017/01/09

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Execution</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Anechoic Chamber	8.8m x 4.6m x 4.05 m	B83117-S40-X191	Albatross Projects GmbH
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	
EMC camera Nr.2	CCD-400E	0005033	
Filter ISDN	B84312-C110-E1		
Filter Universal 1A	BB4312-C30-H3	-	

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID:	Lab 1
<i>Description:</i>	Equipment for emission measurements
<i>Serial Number:</i>	see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	
Biconical dipole	VUBA 9117	9117-108	
Broadband Amplifier 1 GHz - 4 GHz	AFS4-01000400-1Q-10P-4	-	
Broadband Amplifier 18 GHz - 26 GHz	JS4-18002600-32-5P	849785	
Broadband Amplifier 30 MHz - 18 GHz	JS4-00101800-35-5P	896037	
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	
Cable "ESI to Horn Antenna"	SucoFlex	W18.02-2+W38.02-2	
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Execution</i>
	Standard Calibration	2015/06/23	2018/06/22

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Double-ridged horn	HF 907	102444	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	Standard Calibration		2015/05/11	2018/05/10
Double-ridged horn-duplicated 2015-07-15 10:47:55	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG	
High Pass Filter	4HC1600/12750-1.5-KK	9942011		
High Pass Filter	5HC2700/12750-1.5-KK	9942012		
High Pass Filter	5HC3500/18000-1.2-KK	200035008		
High Pass Filter	WHKX 7.0/18G-8SS	09		
Horn Antenna Schwarzbeck 15-26.5 GHz BBHA 9170	BBHA 9170	BBHA9170262		
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG	
Log.-per. Antenna (upgraded)	HL 562 Ultralog new biconicals	830547/003	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	Standard Calibration		2015/06/30	2018/06/29
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	DKD Calibration		2014/11/27	2017/11/27
Standard Gain / Pyramidal Horn Antenna 40 GHz	3160-10	00086675		
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH	

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 1
<i>Description:</i>	Single Devices for various Test Equipment
<i>Type:</i>	various
<i>Serial Number:</i>	none

Single Devices for Auxiliary Test Equipment

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>		
Broadband Power Divider N (Aux)	1506A / 93459	LM390			
Broadband Power Divider SMA	WA1515	A855			
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383			
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Execution</i>
	DAkKS Calibration			2016/02/04	2018/02/28
Digital Multimeter 13 (Clamp Meter)	Fluke 325	31270091WS	FLUKE		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Execution</i>
	DAkKS-Calibration			2016/02/04	2019/02/28
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018			
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018			
Isolating Transformer	LTS 604	1888			
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24			
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Execution</i>
	DKD calibration			2016/02/25	2018/02/24
Spectrum Analyser	FSU26	200418			
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Execution</i>
	Standard calibration			2016/11/03	2017/11/02
Spectrum Analyzer	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Execution</i>
	DKD calibration			2015/06/23	2018/06/22
Vector Signal Generator	SMIQ 03B	832492/061			

Test Equipment Digital Signalling Devices

Lab ID:

Lab 1

Description:

Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer	
CMW500	CMW500	107500		
	Calibration Details			
	Standard calibration		Last Execution	Next Execution
			2015/07/13	2017/07/14
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details			
	DKD calibration		Last Execution	Next Execution
			2014/12/02	2017/12/01
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details			
	DKD calibration			
	HW/SW Status			
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 --- SW: K62, K69			
			2007/01/02	
			2008/11/03	
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG	

Test Equipment Emission measurement devices

Lab ID: **Lab 1**
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer	
EMI Receiver / Spectrum Analyzer	ESR 7	101424		
	Calibration Details		Last Execution	Next Execution
	DKD Calibration		2016/11/29	2018/11/28
Personal Computer	Dell	30304832059		
Power Meter	NRVD	828110/016		
	Calibration Details		Last Execution	Next Execution
	Standard calibration		2016/05/24	2017/05/23
Sensor Head A	NRV-Z1	827753/005		
	Calibration Details		Last Execution	Next Execution
	Standard calibration		2016/05/27	2017/05/26
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Execution
	Standard Calibration		2014/06/24	2017/06/23
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Execution
	DAkKS Calibration (DK)		2015/12/09	2017/12/08
	HW/SW Status		Date of Start	Date of End
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03	
Spectrum Analyzer	FSW 43	103779		
	Calibration Details		Last Execution	Next Execution
	DKD calibration		2016/12/02	2018/12/01

Test Equipment Multimeter 03

Lab ID: **Lab 1**
Description: Fluke 177
Serial Number: 86670383

Single Devices for Multimeter 03

Single Device Name	Type	Serial Number	Manufacturer	
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383		
	Calibration Details		Last Execution	Next Execution
	DAkKS Calibration		2016/02/04	2018/02/28

Test Equipment T/A Logger 13

Lab ID: **Lab 1**
Description: Lufft Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer	
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936		
	Calibration Details		Last Execution	Next Execution
	Customized calibration		2015/02/27	2017/02/26

Test Equipment T/H Logger 12

Lab ID: **Lab 1**
Description: Lufft Opus10
Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer	
ThermoHygro Datalogger 12 (Environ)	Opus10 THI (8152.00)	12482		
	Calibration Details		Last Execution	Next Execution
	Customized calibration		2015/03/10	2017/03/09

5 Annex

5.1 Additional Information for Report

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for a GSM cellular radiotelephone device

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 69. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

- § 2.1046 Measurement required: RF power output
- § 2.1049 Measurement required: Occupied bandwidth
- § 2.1051 Measurement required: Spurious emissions at antenna terminals
- § 2.1053 Measurement required: Field strength of spurious radiation
- § 2.1055 Measurement required: Frequency stability
- § 2.1057 Frequency spectrum to be investigated

Part 27, Subpart C—Technical Standards

- § 27.50 Power and antenna height limits
- § 27.53 Emissions limits
- § 27.54 Frequency stability

additional documents

ANSI TIA-603-D-2004

Description of Methods of Measurements

RF Power Output

Standard FCC Part 27, Subpart C

The test was performed according to: FCC §2.1046

Test Description (conducted measurement procedure)

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
 - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
 - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Channel (Frequency): please refer to the detailed results
- 4) The transmitted power of the EUT was recorded by using a spectrum analyser.

Test Description (radiated measurement procedure)

- 1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.
 - 2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
 - Channel: please refer to the detailed results
- 3) A substitution procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a $\lambda/2$ dipole).
 - 4) The output power was measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case power all orientations (X, Y, Z) of the EUT have been measured.
 - 5) The test procedure according to TIA-603-D-2004 has been considered.

Test Requirements / Limits

§2.1046 Measurements Required: RF Power Output

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the output terminals when this test is made shall be stated.

§27.50 Power and antenna height limits.

(d) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands:

(2) Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to a peak EIRP of 1 watt. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground, and mobile and portable stations must employ a means for limiting power to the minimum necessary for successful communications.

Emission and Occupied Bandwidth

Standard FCC Part 27, Subpart C

The test was performed according to: FCC §2.1049

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
 - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
 - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
 - Channel: please refer to the detailed results
- 4) Important Analyser Settings:
- Resolution Bandwidth: >1% of the manufacturer's stated occupied bandwidth
- 5) The maximum spectral level of the modulated signal was recorded as the reference.
 - 6) The emission bandwidth is measured as follows:
the two furthest frequencies above and below the frequency of the maximum reference level where the spectrum is -26 dB down have to be found.
 - 7) The occupied bandwidth (99% Bandwidth) is measured as follows:
the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper

frequency limits, the mean powers are each equal to 0.5 percent of the total mean power.

Test Requirements / Limits

§ 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions (as applicable):

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

Spurious emissions at antenna terminals

Standard FCC Part 27, Subpart C

The test was performed according to FCC §2.1051

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
 - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
 - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
 - Channel: please refer to the detailed results
- 4) Important Analyser Settings:
- [Resolution Bandwidth]:
 - a) [$\geq 1\%$ of wanted signal bandwidth] in the Span of 1 MHz directly below and above the Band,
 - b) otherwise [1 MHz]
 - c) [reduced resolution bandwidth] in case the curve of the analyser IF-Filter or the wanted EUT signal leads to an exceeding of the limit, in this case a correction factor was used
 - Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth
- 5) The spurious emissions peaks were measured in the frequency range from 9 kHz to 18 GHz (up to the 10th harmonic) during the call is established

Test Requirements / Limits

§ 2.1051 Spurious emissions at antenna terminals

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in Sec. 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 2.1057 Frequency spectrum to be investigated.

- (a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:
- (1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
 - (b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.
 - (c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value

need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 27.53 Emission limits

(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

Remark of the test laboratory: This is calculated to be -13 dBm.

(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(3) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Field strength of spurious radiation

Standard FCC Part 27, Subpart C

The test was performed according to: FCC §2.1053

Test Description

1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.

2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel : please refer to the detailed results

3) A pre-calibration procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a $\lambda/2$ dipole).

4) All spurious radiation measurements were made with spectrum analyser and the appropriate calibrated antennas for the frequency range of 30 MHz to 18 GHz (up to the 10th harmonic of the transmit frequency). The frequency range from 9 kHz to 30 MHz has been examined during the conducted spurious emission measurements.

5) Important Analyser Settings

- [Resolution Bandwidth / Video Bandwidth]:

a) [3 kHz / 10 kHz] in the Span of 1 MHz directly below and above the Band,

b) [10 kHz / 30 kHz] in case the curve of the analyser IF-Filter leads to an exceeding of the limit, in this case a worst case correction factor of 20 dB (1 MHz -> 10 kHz) was used

c) [1 MHz / 3 MHz] otherwise

- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

6) The spurious emissions peaks were measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case peaks all orientations (X, Y, Z) of the EUT have been measured.

7) After this initial test, a final test according to TIA-603-D 2.2.12 Unwanted Emissions is performed on signals which are identified as being close to the limit. For any emissions found to be within 10 dB of the limit, a specific signal substitution measurement is performed at the frequency of the emission to determine the exact e.i.r.p. value.

Test Requirements / Limits

§ 2.1053 Measurements required: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet,

control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of Sec. 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:
(2) All equipment operating on frequencies higher than 25 MHz.

§ 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 27.53 Emission limits

(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

Remark of the test laboratory: This is calculated to be -13 dBm (effective radiated power) which corresponds to 84.6 dBµV/m (field strength) in a distance of 3 m.

(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(3) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Frequency stability

Standard FCC Part 27, Subpart C

The test was performed according to FCC §2.1055

Test Description

- 1) The EUT was placed inside a temperature chamber.
- 2) The EUT was coupled to a Digital Communication Tester. Refer to chapter "Setup Drawings".
- 3) The climatic chamber was cycled down/up to a certain temperature, starting with the EUT minimum temperature.
- 4) After the temperature was stabilized the EUT was switched on and a call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Mid Channel

5) The frequency error of the EUT was recorded by using an internal measurement function of the Digital Communication Tester immediately after the call was established, five minutes after the call was established and ten minutes after the call was established.

6) This measurement procedure was performed for temperature variation from -30°C to $+50^{\circ}\text{C}$ in increments of 10°C , if not otherwise stated in the detailed results.

When the EUT did not operate at certain temperature levels, these measurements were left out.

Test Requirements / Limits

§2.1055 Measurements required: Frequency stability

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

§27.54 Frequency stability

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

7Layers interpretation of limit:

To ensure that the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block following limit was used:

± 2.5 ppm = 4350 Hz for channel 1450, frequency 1740.0 MHz

± 2.5 ppm = 4331 Hz for channel 1412, frequency 1732.4 MHz

in accordance with FCC Part 22, Subpart H, §22.355, table C-1: Frequency tolerance for the carrier frequency of mobile transmitters in the Public Mobile Service in the frequency range 821 to 896 MHz.

Band edge compliance

Standard FCC Part 27, Subpart C

The test was performed according to: FCC §27.53

Test Description

1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".

2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Channel: please refer to the detailed results

4) Important Analyser Settings:

- Resolution Bandwidth = Video Bandwidth: >1% of the manufacturer's stated occupied bandwidth

For LTE band eFDD13 in the ranges of 765-775MHz and 793-805MHz.

These frequency ranges are part of spurious conducted and measured with 10kHz RBW.

Test Requirements / Limits

§ 27.53 Effective radiated power limits

Refer to chapter "Field strength of spurious radiation".

Appendix 1

Subtests HSDPA

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: γ_{ACK}, γ_{NACK} and $\gamma_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, γ_{ACK} and $\gamma_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\gamma_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							


Subtests HSUPA

Subtest	Mode	Loopback Mode	Rel99 RMC	HSDPA FRC	HSUPA Test	Number of E-DPDCH Channels
1	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
2	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
3	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	2
4	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
5	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1

Subtest	Max UL Data Rate (kb/s)	β_c/β_d	β_{hs}	β_{ed}	CM
1	242.1	11/15	22/15	1309/225	1
2	161.3	6/15	12/15	94/75	3
3	524.7	15/9	30/15	47/15	2
4	197.6	2/15	4/15	56/75	3
5	299.6	15/15	30/15	134/15	1

Appendix 2


Setup Drawings

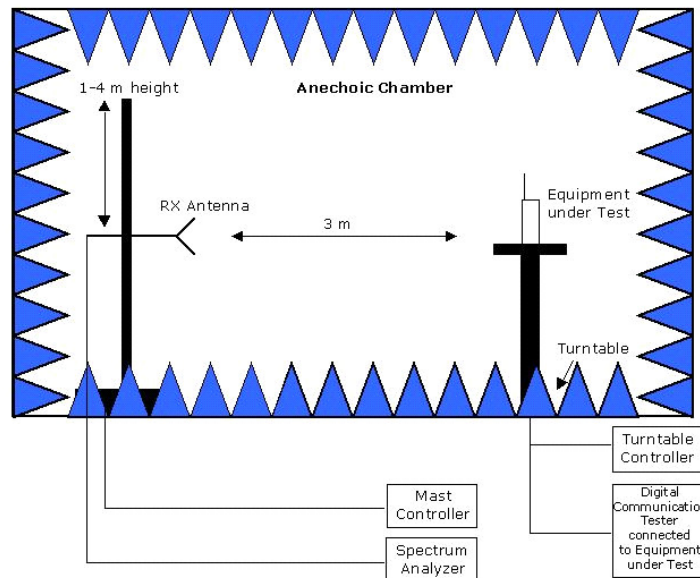

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.


Principle set-up for radiated measurements

Appendix 3

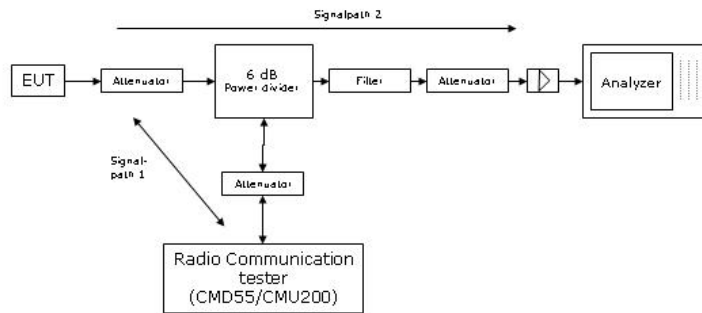

Remark: Depending on the frequency range suitable attenuators and/or filters and/or amplifiers are used.

Principle set-up for conducted measurements under nominal conditions

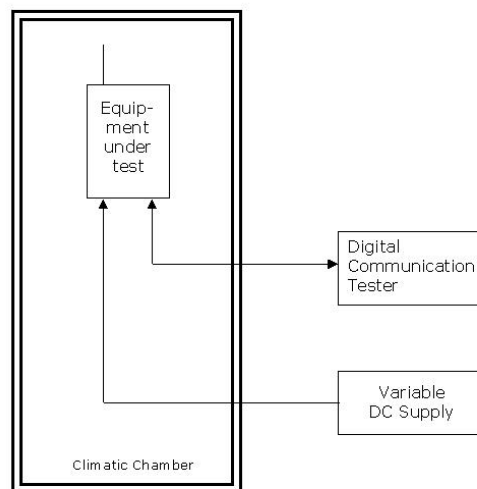

Principle set-up for tests under extreme test conditions

Appendix 4

6 Index

1 Administrative Data	2
1.1 Project Data	2
1.2 Applicant Data	2
1.3 Test Laboratory Data	2
1.4 Signature of the Testing Responsible	3
1.5 Signature of the Accreditation Responsible	3
2 Test Object Data	3
2.1 General OUT Description	3
2.2 Detailed Description of OUT Samples	4
2.3 OUT Features	4
2.4 Setups used for Testing	5
3 Results	5
3.1 General	5
3.2 List of the Applicable Body	5
3.3 List of Test Specification	5
3.4 Summary	6
3.5 Detailed Results	7
3.5.1 27.4 Field strength of spurious radiation §2.1053, §27.53	7
4 Test Equipment Details	53
4.1 List of Used Test Equipment	53
5 Annex	59
5.1 Additional Information for Report	59
6 Index	70