



Electromagnetic Compatibility Test Report

Tests Performed on a Westell, Inc.

Media Terminal, Model A90-WMT1030-00

Radiometrics Document RP-5833



Product Detail:

FCC ID: **CH8A90WMT-00**

Equipment type: 2.4 GHz Digitally Modulated Transmitter

Test Standards:

US CFR Title 47, Chapter I, FCC Part 15 Subpart C

FCC Part 15 CFR Title 47: 2006

This report concerns: Original Grant for Certification

FCC Part 15.247

Tests Performed For:

Westell, Inc.

750 N. Commons Dr.

Aurora, IL 60504

Phone: 630-898-2500

Test Facility:

Radiometrics Midwest Corporation

12 East Devonwood

Romeoville, IL 60446

Phone: (815) 293-0772

e-mail: info@radiomet.com

Test Date(s): (Month-Day-Year)

May 11 and 15, 2006

Document RP-5833 Revisions:

Rev.	Issue Date	Affected Pages	Revised By
0	June 23, 2006		



Table of Contents

1 ADMINISTRATIVE DATA	3
2 TEST SUMMARY AND RESULTS	3
3 EQUIPMENT UNDER TEST (EUT) DETAILS	4
3.1 EUT Description	4
3.1.1 FCC Section 15.203 Antenna Requirements	4
3.2 Related Submittals	4
4 TESTED SYSTEM DETAILS	4
4.1 Tested System Configuration	4
4.2 Special Accessories	5
4.3 Equipment Modifications	5
5 TEST SPECIFICATIONS AND RELATED DOCUMENTS.....	5
6 RADIOMETRICS' TEST FACILITIES	5
7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS.....	6
8 CERTIFICATION	6
9 TEST EQUIPMENT TABLE	6
10 TEST SECTIONS	7
10.1 AC Conducted Emissions; Section 15.207.....	7
Figure 1. Conducted Emissions Test Setup.....	8
10.2 Occupied Bandwidth (6 dB).....	9
10.3 Peak Output Power	12
10.4 Power Spectral Density	13
10.5 Band-edge Compliance of RF Conducted Emissions	13
10.6 Spurious RF Conducted Emissions.....	17
10.7 Spurious Radiated Emissions (Restricted Band)	27
10.7.1 Radiated Emissions Field Strength Sample Calculation.....	28
Figure 2. Drawing of Radiated Emissions Setup	29
10.7.2 Spurious Radiated Emissions Test Results (Restricted Band).....	30

Notice: This report must not be reproduced (except in full) without the written approval of Radiometrics Midwest Corporation.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report	
Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal	

1 ADMINISTRATIVE DATA

<i>Equipment Under Test:</i> A Westell, Inc., Media Terminal Model: A90-WMT1030-00 Serial Number: None This will be referred to as the EUT in this Report	
<i>Date EUT Received at Radiometrics: (Month-Day-Year)</i> May 11, 2006	<i>Test Date(s): (Month-Day-Year)</i> May 11 and 15, 2006
<i>Test Report Written By:</i> Joseph Strzelecki Senior EMC Engineer	<i>Test Witnessed By:</i> Dan Wood Westell, Inc.
<i>Radiometrics' Personnel Responsible for Test:</i>  Joseph Strzelecki Senior EMC Engineer NARTE EMC-000877-NE	<i>Test Report Approved By</i>  Chris W. Carlson Director of Engineering NARTE EMC-000921-NE

2 TEST SUMMARY AND RESULTS

The EUT (Equipment Under Test) is a Media Terminal, Model A90-WMT1030-00, manufactured by Westell, Inc. The detailed test results are presented in a separate section. The following is a summary of the test results. This report pertains to the 802.11 section and the unintentional radiator section of the media terminal.

Emissions Tests Results

Environmental Phenomena	Frequency Range	Basic Standard	Test Result
RF Radiated Emissions	30 MHz to 25 GHz	FCC Part 15	Pass
Conducted Emissions, AC Mains	0.15 - 30 MHz	FCC Part 15	Pass

Spread Spectrum Transmitter Requirements

Environmental Phenomena	Frequency Range	FCC Section	Test Result
6 dB Bandwidth Test	2400 to 2483 MHz	15.247 a	Pass
Peak Output Power	2400 to 2483 MHz	15.247 b	Pass
Band-edge Compliance of RF Conducted Emissions	2400 to 2483 MHz	15.247 c	Pass
Spurious RF Conducted Emissions	30 MHz to 25 GHz	15.247 c	Pass
Spurious Radiated Emissions	30 MHz to 25 GHz	15.247 c	Pass
Power Spectral Density	2400 to 2483 MHz	15.247 d	Pass

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report
Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

3 EQUIPMENT UNDER TEST (EUT) DETAILS

3.1 EUT Description

The EUT is a Media Terminal, Model A90-WMT1030-00, manufactured by Westell, Inc. The EUT was in good working condition during the tests, with no known defects. A "Client" or "Terminal" device connected to the LAN/WLAN. The WMT is designed with two LAN interfaces of which only one will be active at any given time and also supports a single POTS line.

3.1.1 FCC Section 15.203 Antenna Requirements

The 2.4 GHz antenna is internal to the case of the EUT. It is not accessible to the end user.

3.2 Related Submittals

Westell, Inc. is not submitting any other products simultaneously for equipment authorization related to the EUT.

4 TESTED SYSTEM DETAILS

4.1 Tested System Configuration

The system was configured for testing in a typical fashion. The EUT was placed on an 80-cm high, nonconductive test stand. The testing was performed in conditions as close as possible to installed conditions. Wiring was consistent with manufacturer's recommendations.

The EUT was tested as a remotely located device. Power was supplied at 115 VAC, 60 Hz single-phase to its external power supply. The identification for all equipment, plus descriptions of all cables used in the tested system, are:

Tested System Configuration List

Item	Description	Type*	Manufacturer	Model Number	Serial Number
1	Wireless Gateway	E	Westell, Inc.	A90-WMT1030-00	06B406711251
2	Wireless Handset	E	Westell, Inc.	B90-HS2058-00	00005507
3	Power Supply	E	Westell, Inc.	085-200056	None
4	Laptop PC	S	MPC	Transport T2000	G34891AWA00510
5	Wireless/Ethernet Bridge	S	Westell, Inc.	B90-VZ1015-06	06B406711250
6	Telephone Line Simulator	S	Teltone Corp	TLS-3A-01	015748

* Type: E = EUT, P = Peripheral, S = Support Equipment; H = Host Computer

List of System Cables

QTY	Length (m)	Cable Description	Connected to (Item #)	Shielded?
1	1.8	AC Cord	#1 and #3	No
1	15.2	Ethernet Cable	#1 and #5	No
1	21	Phone Cable	#1 and #6	No

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report
Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

4.2 Special Accessories

No special accessories were used during the tests in order to achieve compliance.

4.3 Equipment Modifications

No modifications were made to the EUT at Radiometrics' test facility in order to comply with the standards listed in this report.

5 TEST SPECIFICATIONS AND RELATED DOCUMENTS

Document	Date	Title
FCC CFR Title 47	2006	Code of Federal Regulations Title 47, Chapter 1, Federal Communications Commission, Part 15 - Radio Frequency Devices
ANSI C63.4-2003	2003	Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
FCC DA 00-705	2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
FCC 558074	2005	Measurement of Digital Transmission Systems Operating under Section 15.247

The test procedures used are in accordance with the FCC DA 00-705, <or> FCC 558074, Industry Canada RSS-212 and ANSI document C63.4-2003, "Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The specific procedures are described herein. Radiated testing was performed at an antenna to EUT distance of 3 meters. The antenna was raised and lowered from 1 to 4 meters.

6 RADIOMETRICS' TEST FACILITIES

The results of these tests were obtained at Radiometrics Midwest Corp. in Romeoville, Illinois, USA. Radiometrics is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025: 1999 "General Requirements for the Competence of Calibration and Testing Laboratories". Radiometrics' Lab Code is 121191 and Certification Number is 1495.01. Radiometrics' scope of accreditation includes all of the test methods listed herein. A copy of the accreditation can be accessed on our web site (www.radiomet.com). Radiometrics accreditation status can be verified at A2LA's web site (www.a2la2.org).

The following is a list of shielded enclosures located in Romeoville, Illinois used during the tests:

Chamber E: Is a custom made anechoic chamber that measures 52' L X 30' W X 18' H. The walls and ceiling are fully lined with RF absorber. Pro-shield of Collinsville, Oklahoma manufactured the chamber.

Test Station F: Is an area that measures 10' D X 12' W X 10' H. The floor and back wall are metal shielded. This area is used for conducted emissions measurements.

A separate ten-foot long, brass plated, steel ground rod attached via a 6 inch copper braid grounds each of the above chambers. Each enclosure is also equipped with low-pass power line filters.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report							
Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal							

Open Area Test Site (OATS): Is located on 8625 Helmar Road in Newark, Illinois, USA and measures 56' L X 24' W X 17' H. The entire open field test site has a metal ground screen. The FCC has accepted these sites as test site number US1065. The FCC test site Registration Number is 732175. Details of the site characteristics are on file with the Industry Canada as file number IC3124.

A complete list of the test equipment is provided herein. The calibration due dates are indicated on the equipment list. The equipment is calibrated in accordance to ANSI/NCSL Z540-1 with traceability to the National Institute of Standards and Technology (NIST).

7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS

There were no deviations or exclusions from the test specifications.

8 CERTIFICATION

Radiometrics Midwest Corporation certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specification. The results relate only to the EUT listed herein. Any modifications made to the EUT subsequent to the indicated test date will invalidate the data and void this certification.

9 TEST EQUIPMENT TABLE

RMC ID	Manufacturer	Description	Model No.	Serial No.	Frequency Range	Cal Period	Cal Date
AMP-05	RMC/Celeritek	Pre-amplifier	MW110G	1001	1.0-12GHz	12 Mo.	12/07/04
AMP-12	MITEQ	Pre-amplifier	AM-1431	530935	0.01-1000MHz	12 Mo.	12/29/04
AMP-16	MITEQ	Pre-amplifier	AM-1300	608852	0.01-1000MHz	12 Mo.	12/29/04
AMP-20	Avantek	Pre-amplifier	SF8-0652	15221	8-18GHz	12 Mo.	12/07/04
AMP-22	Anritsu	Pre-amplifier	MH648A	M23969	0.1-1200MHz	12 Mo.	12/07/04
ANT-06	EMCO	Log-Periodic Ant.	3146	1248	200-1000MHz	N/A	NCR
ANT-12	RMC	Dipole Antenna Set	HW1010	202	25-1000MHz	24 Mo.	07/12/04
ANT-13	EMCO	Horn Antenna	3115	2502	1.0-18GHz	24 Mo.	10/13/04
ANT-42	EMCO	Bicon Antenna	3104C	9512-4713	25-300MHz	24 Mo.	01/26/06
ANT-44	Impossible Machine	Super Log Antenna	SL-20M2G	1002	20-2000MHz	24 Mo.	06/15/04
ATT-02	KDI	Attenuator	A710N	RMC1	DC-10GHz	24 Mo.	04/20/05
ATT-03	KDI	Attenuator	A710N	RMC3	DC-10GHz	24 Mo.	04/20/05
HPF-01	Solar	High Pass Filter	7930-100	HPF-1	0.15-30MHz	24 Mo.	04/20/05
HPF-02	Microwave Cir.	High Pass Filter	H2G09G02	HPF-2	1.5-11 GHz	24 Mo.	12/31/03
LSN-01	Electrometrics	50 uH LISN	FCC/VDE 50/2	1001	0.01-30MHz	24 Mo.	04/25/05
LSN-03	Farnell	50 uH LISN	1EXLSN30B	000314	0.01-30MHz	24 Mo.	04/25/05
PRE-01	Hewlett Packard	Preselector	85685A	2510A00143	20 Hz-2GHz	12 Mo.	01/20/05
REC-01	Hewlett Packard	Spectrum Analyzer	8566A	2106A02115, 2209A01349	30Hz-22GHz	12 Mo.	08/17/04
REC-03	Anritsu	Spectrum Analyzer	MS2601B	MT94589	0.01-2200MHz	12 Mo.	11/11/04
REC-07	Anritsu	Spectrum Analyzer	MS2601A	MT53067	0.01-2200MHz	12 Mo.	01/04/05
REC-08	Hewlett Packard	Spectrum Analyzer	8566B	2648A13481 2209A01436	30Hz-22GHz	12 Mo.	06/14/05
THM-01	Extech Inst.	Temp/Humid Meter	4465CF	001106557	N/A	24 Mo.	01/28/04

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report
Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

Note: All calibrated equipment is subject to periodic checks.

10 TEST SECTIONS

10.1 AC Conducted Emissions; Section 15.207

A computer-controlled analyzer was used to perform the conducted emissions measurements. The frequency range was divided into 500 subranges equally spaced on a logarithmic scale. The computer recorded the peak of each subrange. This data was then plotted on semi-log graph paper generated by the computer and plotter. Adjusting the positions of the cables and orientation of the test system then maximizes the highest emissions.

Mains Conducted emission measurements were performed using a 50 Ohm/50 uH Line Impedance Stabilization Network (LISN) as the pick-up device. Measurements were repeated on both leads within the power cord. If the EUT power cord exceeded 80 cm in length, the excess length of the power cord was made into a 30 to 40 cm bundle near the center of the cord. The LISN was placed on the floor at the base of the test platform and electrically bonded to the ground plane.

Broadband conducted emissions may exceed the following limits by no more than 13 dB. An emission is defined as broadband if the average detector amplitude is 6 dB or more under the quasi-peak detector amplitude.

FCC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dBuV)	
	Quasi-Peak	Average
0.150 - 0.50*	66 - 56	56 - 46
0.5 - 5.0	56	46
5.0 - 30	60	50
* The limit decreases linearly with the logarithm of the frequency in this range.		

The initial step in collecting conducted data is a peak detector scan and the plotting of the measurement range. Significant peaks are then marked as shown on the following table, and these signals are then measured with the quasi-peak detector. The following represents the worst case emissions from the EUT power cord, after testing all modes of operation.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

Test Date : May 11, 2006

The Amplitude is the final corrected value with cable and LISN Loss.


EUT Mode	Lead Tested	Frequency MHz	QP Amplitude dBuV	QP Limit dBuV	Average Amplitude dBuV	Average Limit dBuV	Margin Under Limit dB
Wired	AC Neutral	1.49	39.64	56.00	29.45	46.00	16.36
Wired	AC Neutral	9.45	41.04	60.00	29.68	50.00	18.96
Wired	AC Neutral	10.44	42.15	60.00	32.61	50.00	17.39
Wired	AC Neutral	20.26	42.10	60.00	33.29	50.00	16.71
Wired	AC Hot	0.17	44.05	65.14	36.94	55.14	18.2
Wired	AC Hot	1.00	39.36	56.00	30.01	46.00	15.99
Wired	AC Hot	19.71	43.38	60.00	35.63	50.00	14.37
Wireless	AC Neutral	1.49	38.32	56.00	29.45	46.00	16.55
Wireless	AC Neutral	10.44	40.91	60.00	30.11	50.00	19.09
Wireless	AC Hot	0.15	44.37	65.91	37.00	55.91	18.91
Wireless	AC Hot	10.44	41.90	60.00	30.73	50.00	18.1

The above are the worst case results with three frequencies test for each EUT

* QP readings are quasi-peak with a 9 kHz bandwidth and no video filter.

Judgment: Passed by 14.4 dB

Figure 1. Conducted Emissions Test Setup

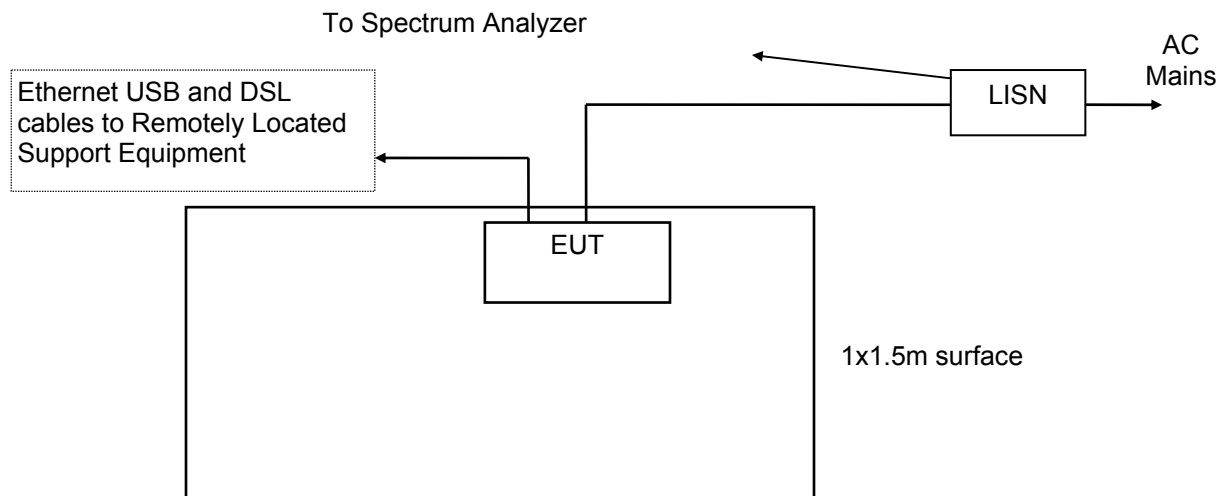

Notes:

- LISN's at least 80 cm from EUT chassis
- Vertical conductive plane 40 cm from rear of table top
- EUT power cord bundled

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal


10.2 Occupied Bandwidth (6 dB)

The spectrum analyzer was set to the MAX HOLD mode to record the worst case of the modulation. The EUT was transmitting at its maximum data rate. The trace was allowed to stabilize.

The marker-to-peak function was set to the peak of the emission. Then the marker-delta function was used to measure 6 dB down one side of the emission. The marker-delta function was reset and then moved to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

	802.11b	802.11g
Channel	6 dB EBW MHz	6 dB EBW MHz
1	11.4	16.5
6	11.7	16.7
11	11.8	16.7

Judgement: Pass

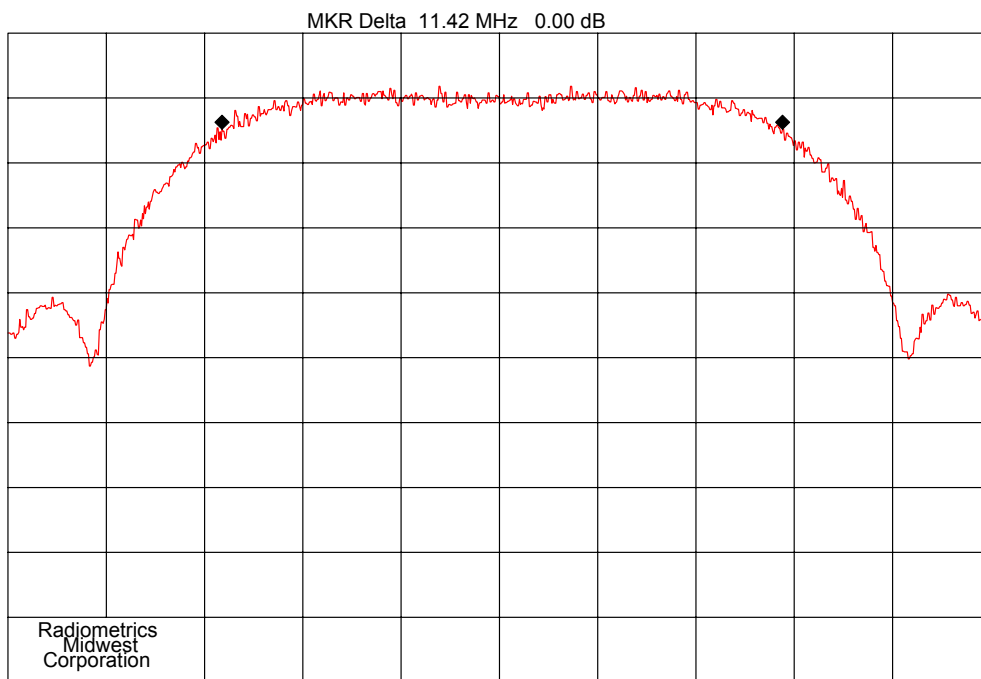

COMPANY : Westell
CENTER 2.412 0 GHz
RES BW 100 kHz
10 dB/


ITEM : A90-WMT1030-00
REF 10.0 dBm
VBW 300 kHz
TIME : 17:08

DATE : 05-15-2006
SPAN 20.0 MHz
ATTEN 30 dB
SWP 20.0 msec

NOTES : Bandwidth Test, 802.11b; Ch 1

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

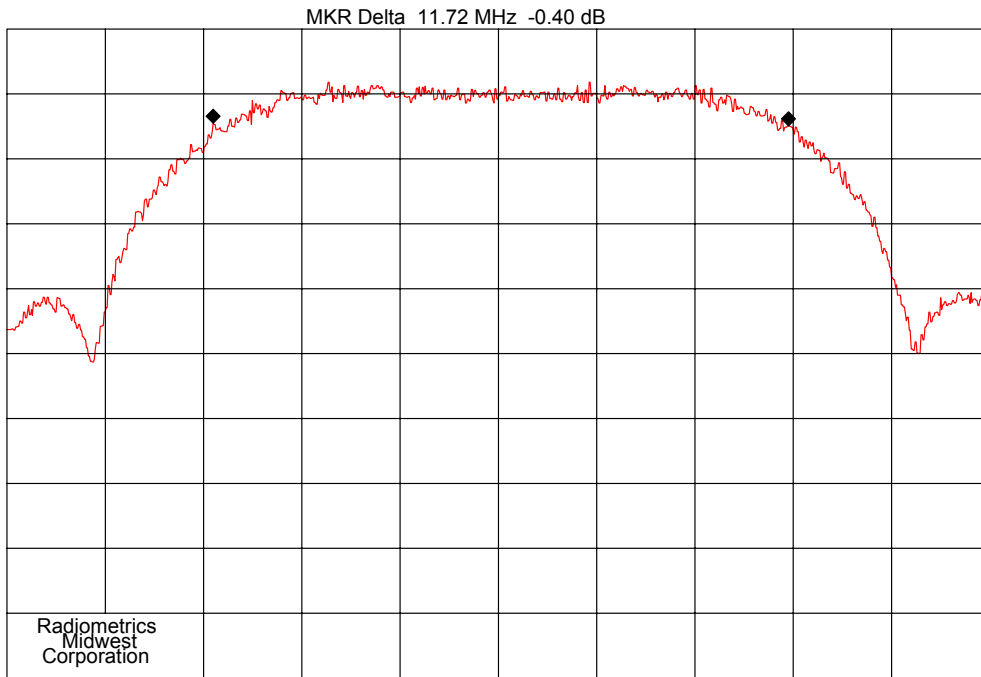


COMPANY : Westell
CENTER 2.437 0 GHz
RES BW 100 kHz
10 dB/

ITEM : A90-WMT1030-00
REF 10.0 dBm
VBW 300 kHz
TIME : 17:03

DATE : 05-15-2006
SPAN 20.0 MHz
ATTEN 30 dB
SWP 20.0 msec

NOTES : Bandwidth Test, 802.11b; Ch 6

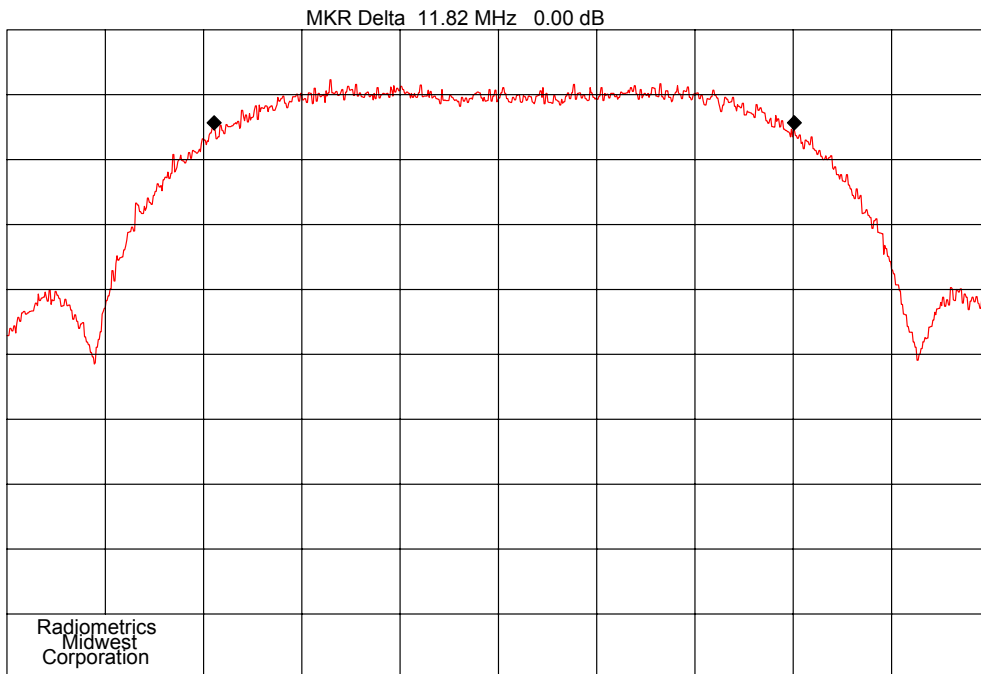

COMPANY : Westell
CENTER 2.462 0 GHz
RES BW 100 kHz
10 dB/


ITEM : A90-WMT1030-00
REF 10.0 dBm
VBW 300 kHz
TIME : 17:10

DATE : 05-15-2006
SPAN 20.0 MHz
ATTEN 30 dB
SWP 20.0 msec

NOTES : Bandwidth Test, 802.11b; Ch 11

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

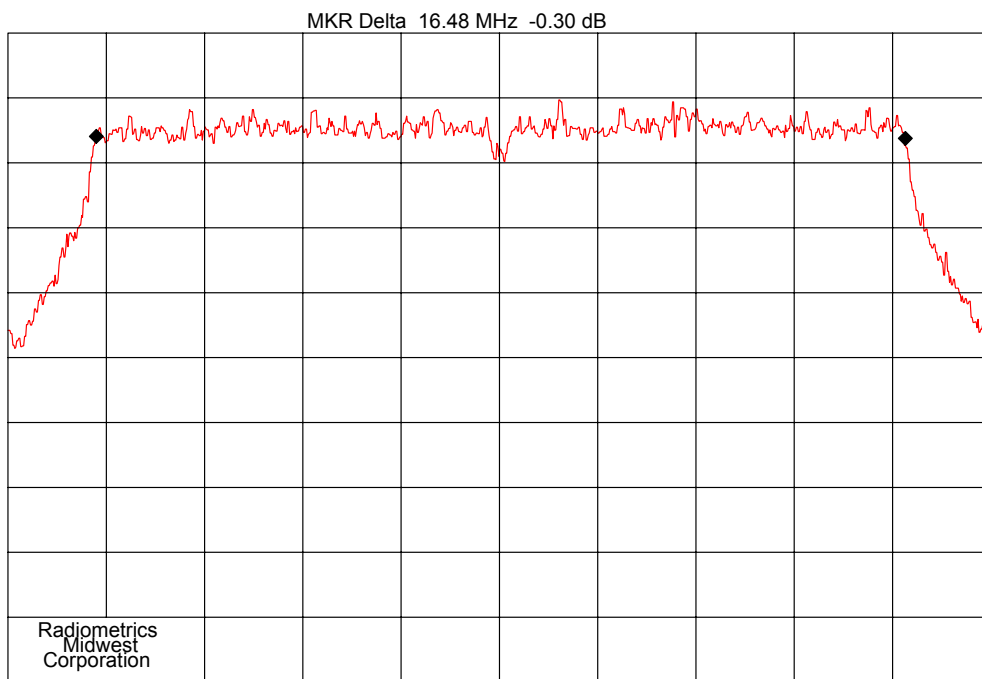


COMPANY : Westell
CENTER 2.412 0 GHz
RES BW 100 kHz
10 dB/

ITEM : A90-WMT1030-00
REF 10.0 dBm
VBW 300 kHz
TIME : 17:07

DATE : 05-15-2006
SPAN 20.0 MHz
ATTEN 30 dB
SWP 20.0 msec

NOTES : Bandwidth Test, 802.11g; Ch 1

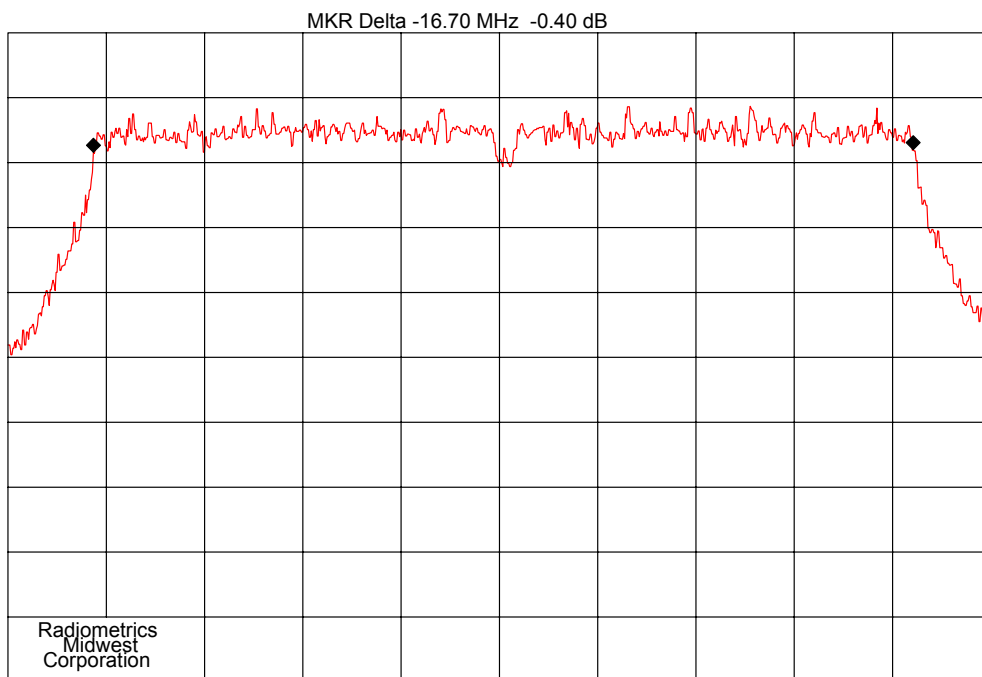

COMPANY : Westell
CENTER 2.437 0 GHz
RES BW 100 kHz
10 dB/


ITEM : A90-WMT1030-00
REF 10.0 dBm
VBW 300 kHz
TIME : 17:05

DATE : 05-15-2006
SPAN 20.0 MHz
ATTEN 30 dB
SWP 20.0 msec

NOTES : Bandwidth Test, 802.11g; Ch 6

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

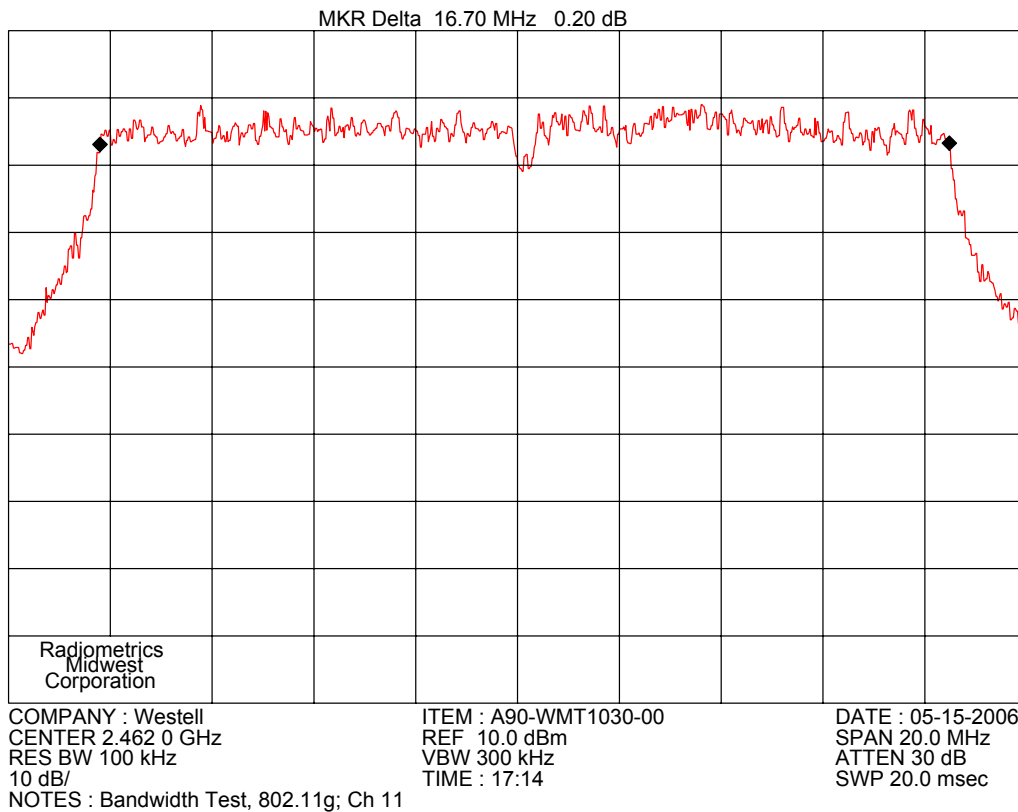

10.3 Peak Output Power

The spectrum analyzer was set to the following settings:

Span = 2 MHz (approximately 5 times the 20 dB bandwidth, centered on a hopping channel)

RBW = 3 MHz (> the 20 dB bandwidth of the emission being measured)

VBW = 3 MHz

Sweep = auto

Detector function = peak

Trace = max hold

The trace was allowed to stabilize. The marker-to-peak function was used to measure the peak of the emission. The indicated level is the peak output power. Note 30 dBm = 1 watt. Since the gain of the antenna is always less than 6dB, the limit is not reduced.

Mode	Freq. (MHz)	Reading (dBm)	BW Corr Factor (dB)	Cable Loss (dB)	Total Power (dBm)		Limit (dBm)
					dBm	Watts	
802.11b	2412	11.1	10.4	0.3	21.8	0.151	30
802.11b	2437	11.8	10.4	0.3	22.5	0.178	30
802.11b	2462	11.4	10.3	0.3	22.0	0.158	30
802.11g	2412	10.1	12.2	0.3	22.6	0.182	30
802.11g	2437	10.8	12.2	0.3	23.3	0.214	30
802.11g	2462	9.8	12.2	0.3	22.3	0.170	30

Judgement: Pass

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

10.4 Power Spectral Density

The power output option 2; Method #3 from FCC rules 558074 was used for this test. The spectrum analyzer was set to the following settings:

Span = 2 MHz

RBW = 1 MHz

VBW = 3 MHz

Sweep = auto

Detector function = peak

Trace = max hold

The trace was allowed to stabilize. The marker-to-peak function was used to measure the peak of the emission. The indicated level is the peak output power. Note 30 dBm = 1 watt. Since the gain of the antenna is always less than 6dB, the limit is not reduced.


Mode	Frequency (MHz)	Reading dBm	Cable Loss (dB)	3 kHz Spectral Density (dBm)	Limit (dBm)
802.11b	2412	-11.2	0.3	-10.9	8.0
802.11b	2437	-10.7	0.3	-10.4	8.0
802.11b	2462	-10.8	0.3	-10.5	8.0
802.11g	2412	-11.4	0.3	-11.1	8.0
802.11g	2437	-12.1	0.3	-11.8	8.0
802.11g	2462	-12.5	0.3	-12.2	8.0

10.5 Band-edge Compliance of RF Conducted Emissions

The spectrum analyzer was set to the MAX HOLD mode to record the worst case of the modulation at the band-edge, with the EUT set to the lowest frequency. The trace was allowed to stabilize.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

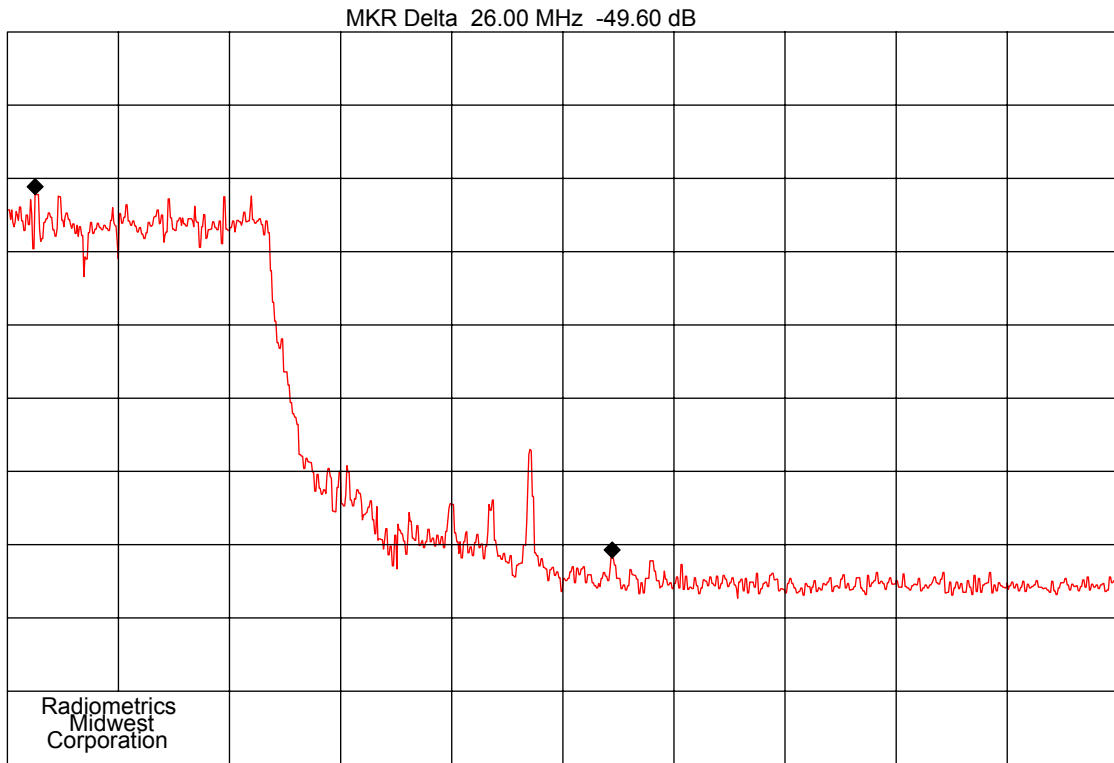


COMPANY : Westell
 CENTER 2.483 5 GHz
 RES BW 100 kHz
 10 dB/
 NOTES : Band Edge, 802.11g; Ch 11

ITEM : A90-WMT1030-00
 REF 20.0 dBm
 VBW 300 kHz
 TIME : 15:29

DATE : 05-15-2006
 SPAN 50.0 MHz
 ATTEN 30 dB
 SWP 20.0 msec

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

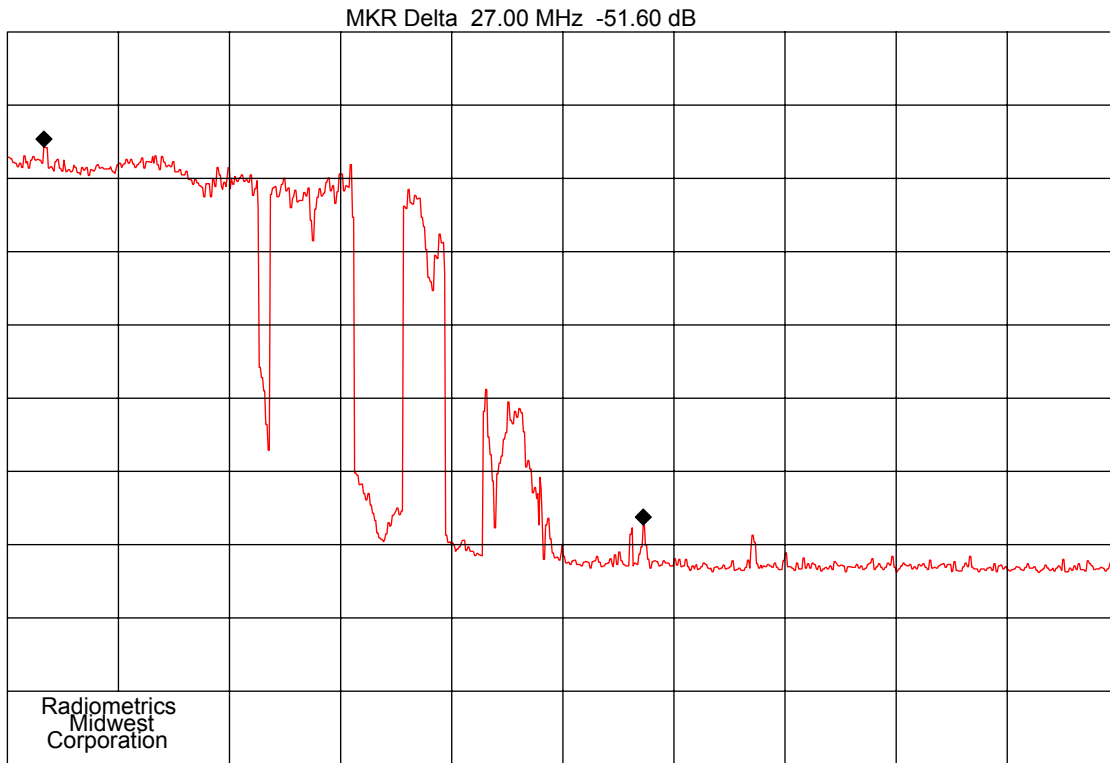

COMPANY : Westell
CENTER 2.483 5 GHz
RES BW 100 kHz
10 dB/


NOTES : Band Edge, 802.11b; Ch 11

ITEM : A90-WMT1030-00
REF 20.0 dBm
VBW 300 kHz
TIME : 15:39

DATE : 05-15-2006
SPAN 50.0 MHz
ATTEN 30 dB
SWP 20.0 msec

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

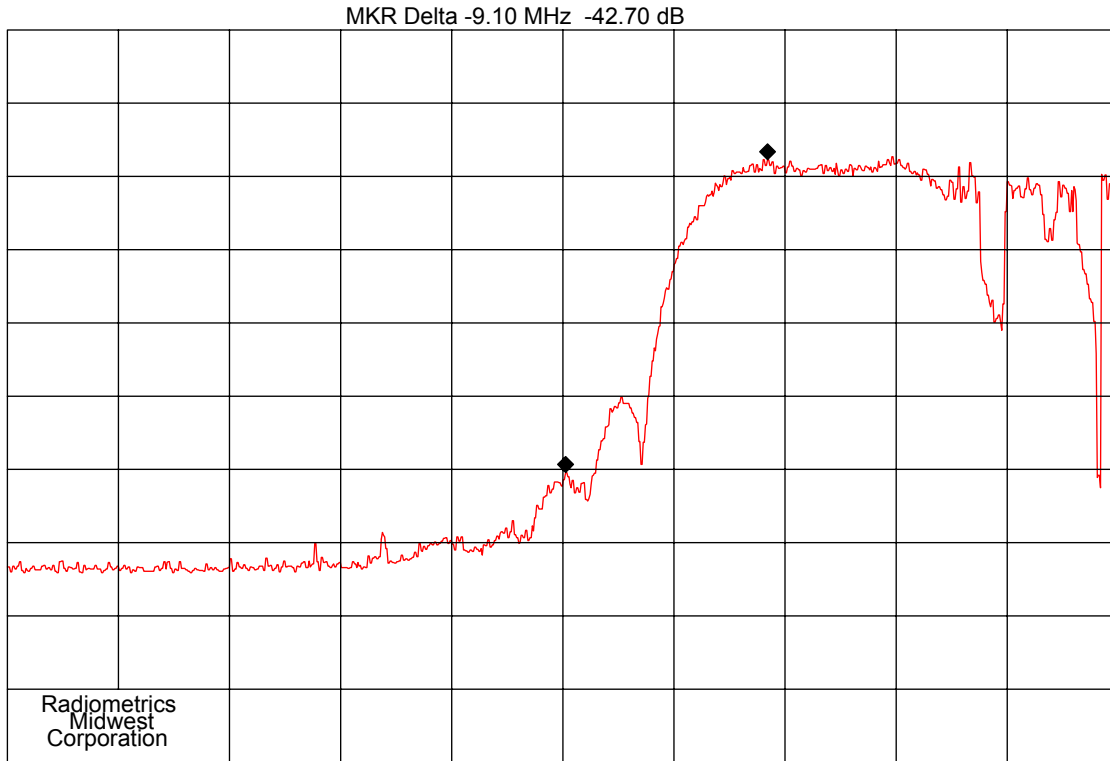


COMPANY : Westell
CENTER 2.400 0 GHz
RES BW 100 kHz
10 dB/
NOTES : Band Edge, 802.11b; Ch 1

ITEM : A90-WMT1030-00
REF 20.0 dBm
VBW 300 kHz
TIME : 15:45

DATE : 05-15-2006
SPAN 50.0 MHz
ATTEN 30 dB
SWP 20.0 msec

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

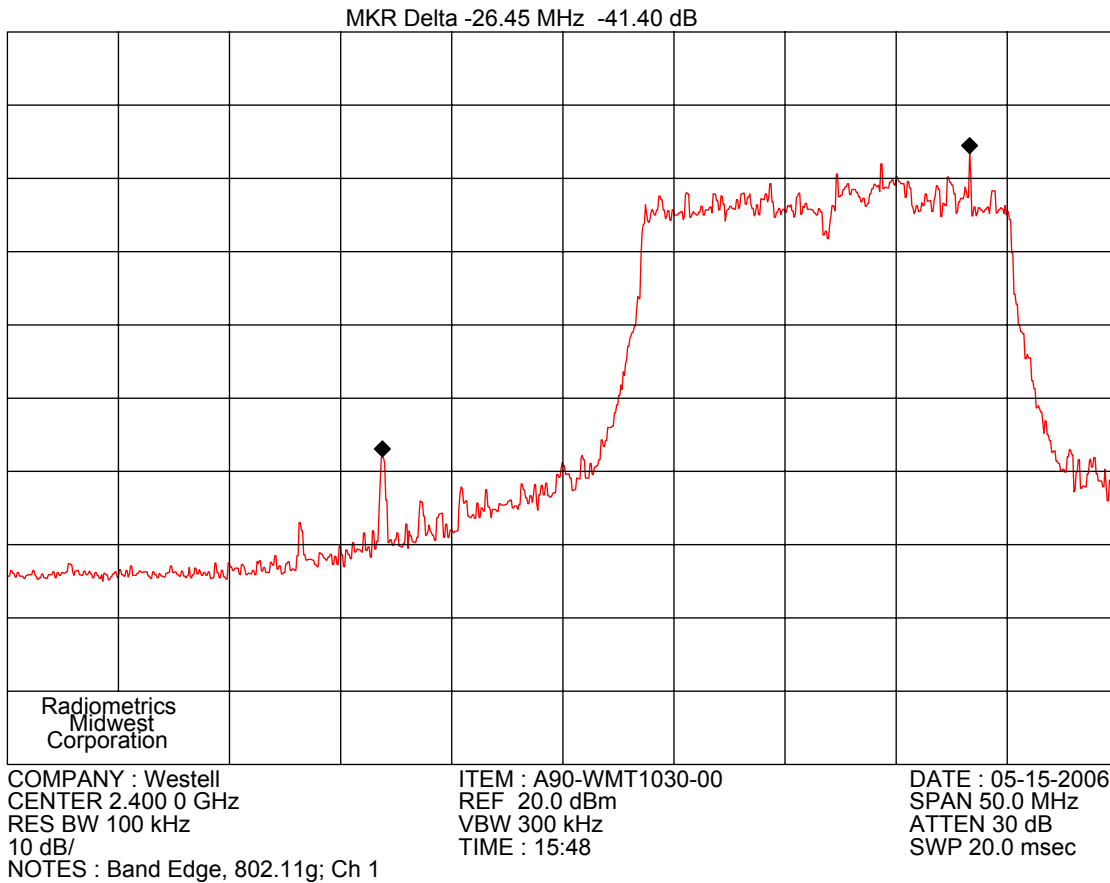

Judgement: Pass


10.6 Spurious RF Conducted Emissions

The spectrum analyzer was set to the MAX HOLD mode to measure all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic. The trace was allowed to stabilize.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

MKR Delta -805 MHz -57.80 dB

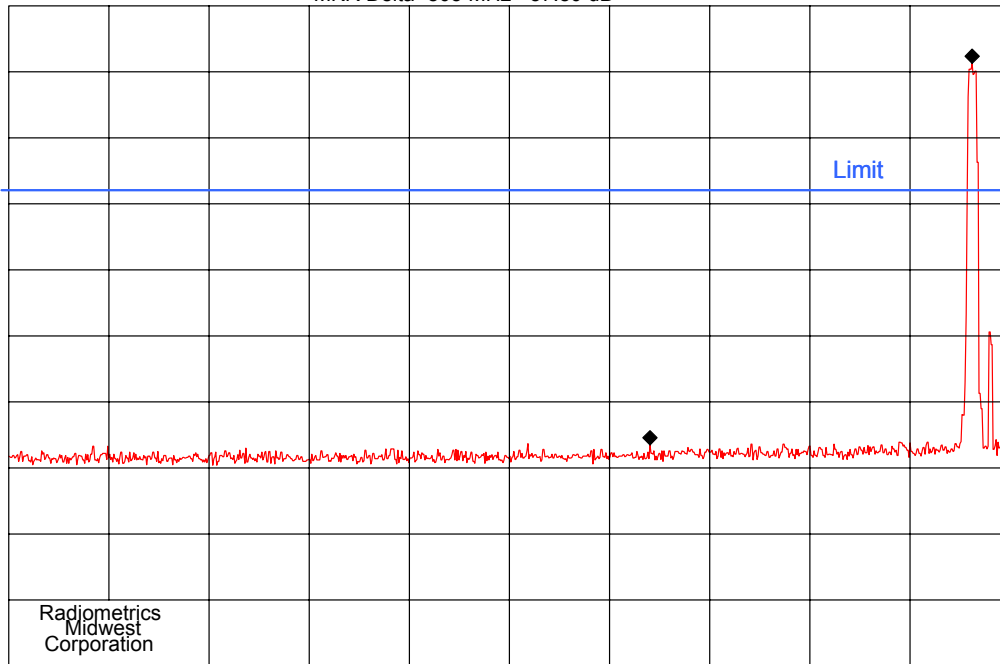


COMPANY : Westell
START 1 MHz
RES BW 100 kHz
10 dB/
NOTES : Spurious Conducted Emissions, 802.11b; Ch 1

ITEM : A90-WMT1030-00
REF 10.0 dBm
VBW 300 kHz
TIME : 16:22

DATE : 05-15-2006
STOP 2.50 GHz
ATTEN 30 dB
SWP 750 msec



MKR Delta -1.215 GHz -55.00 dB


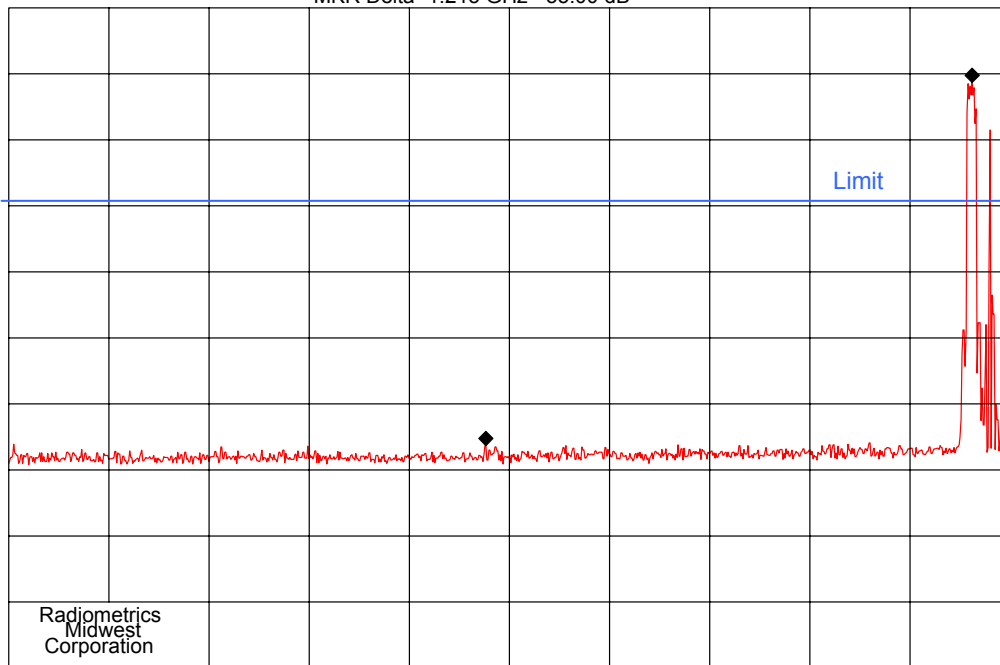



COMPANY : Westell
START 1 MHz
RES BW 100 kHz
10 dB/
NOTES : Spurious Conducted Emissions, 802.11g; Ch 1

ITEM : A90-WMT1030-00
REF 10.0 dBm
VBW 300 kHz
TIME : 16:20

DATE : 05-15-2006
STOP 2.50 GHz
ATTEN 30 dB
SWP 750 msec

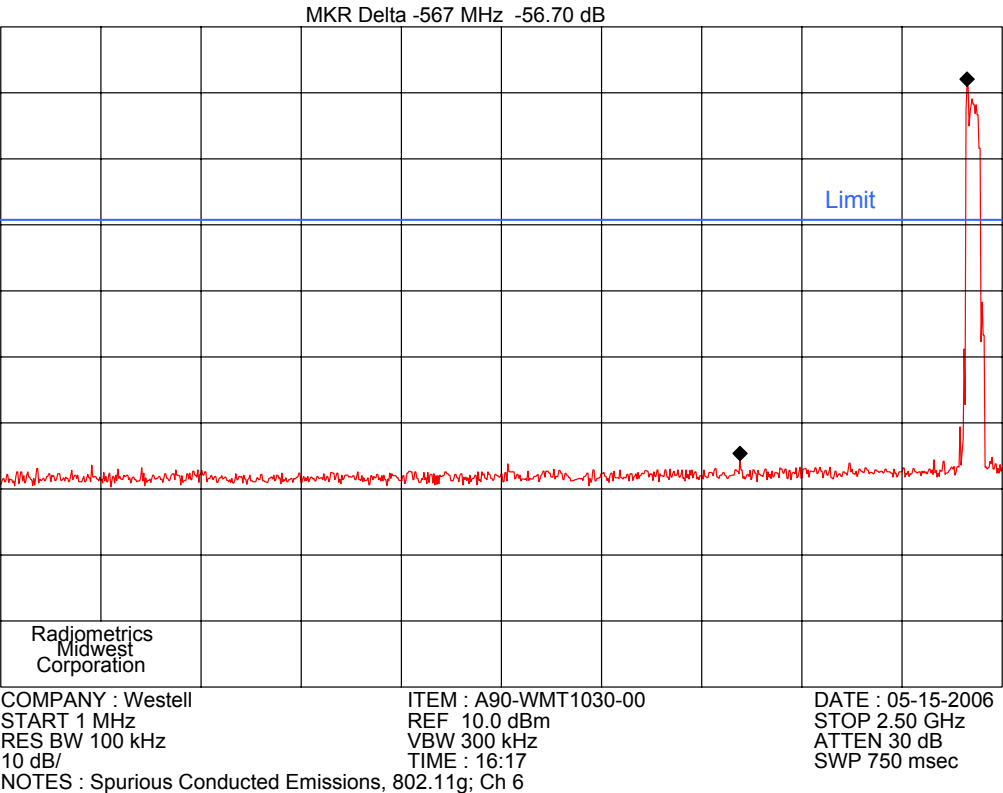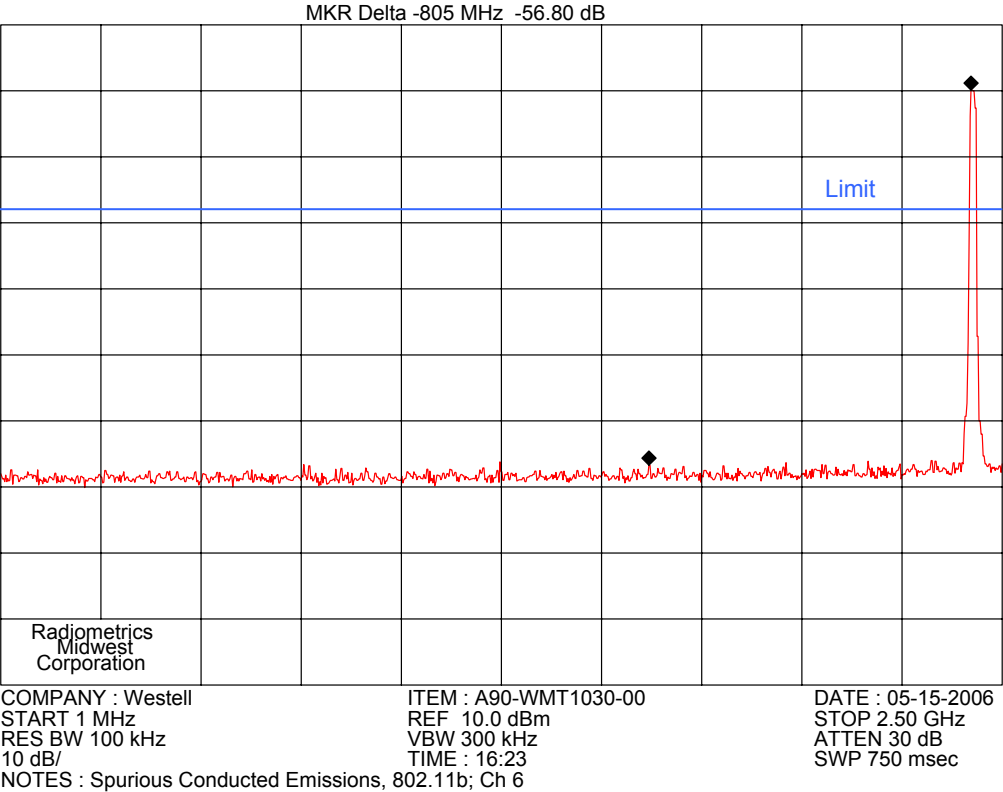

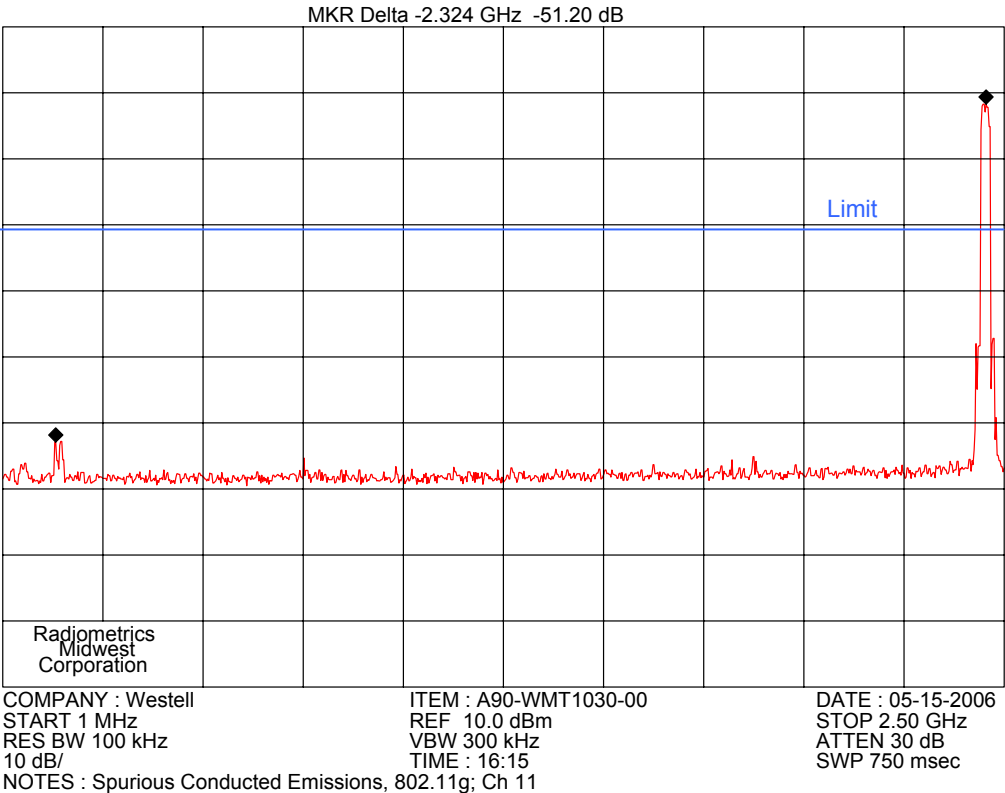
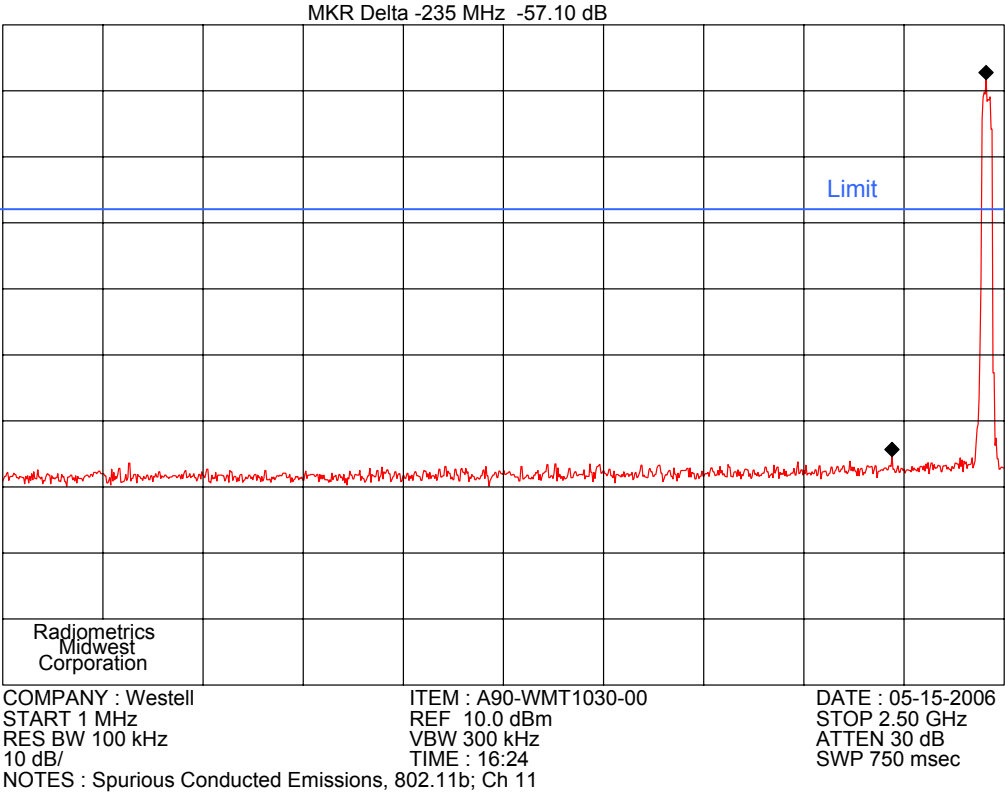



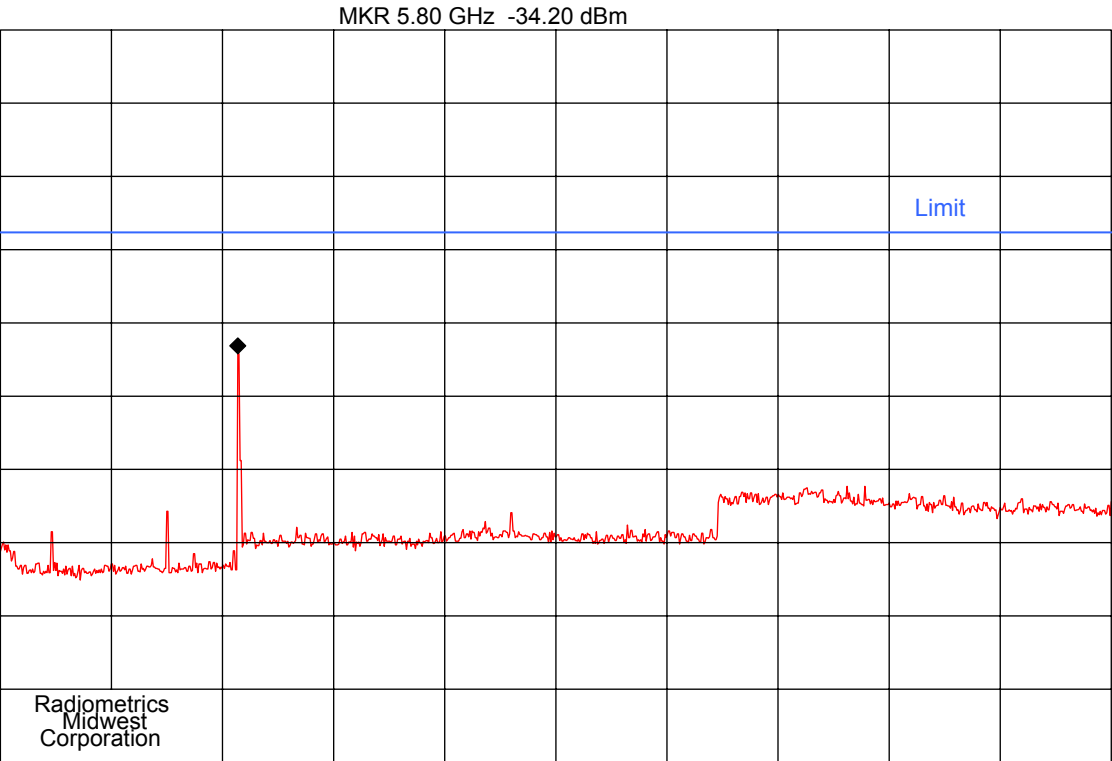


COMPANY : Westell START 2.5 GHz RES BW 100 kHz 10 dB/	ITEM : A90-WMT1030-00 REF 10.0 dBm VBW 300 kHz TIME : 16:32 NOTES : Spurious Conducted Emissions, 802.11b; Ch 1	DATE : 05-15-2006 STOP 18.0 GHz ATTEN 20 dB SWP 4.65 sec
--	---	---

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report


Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

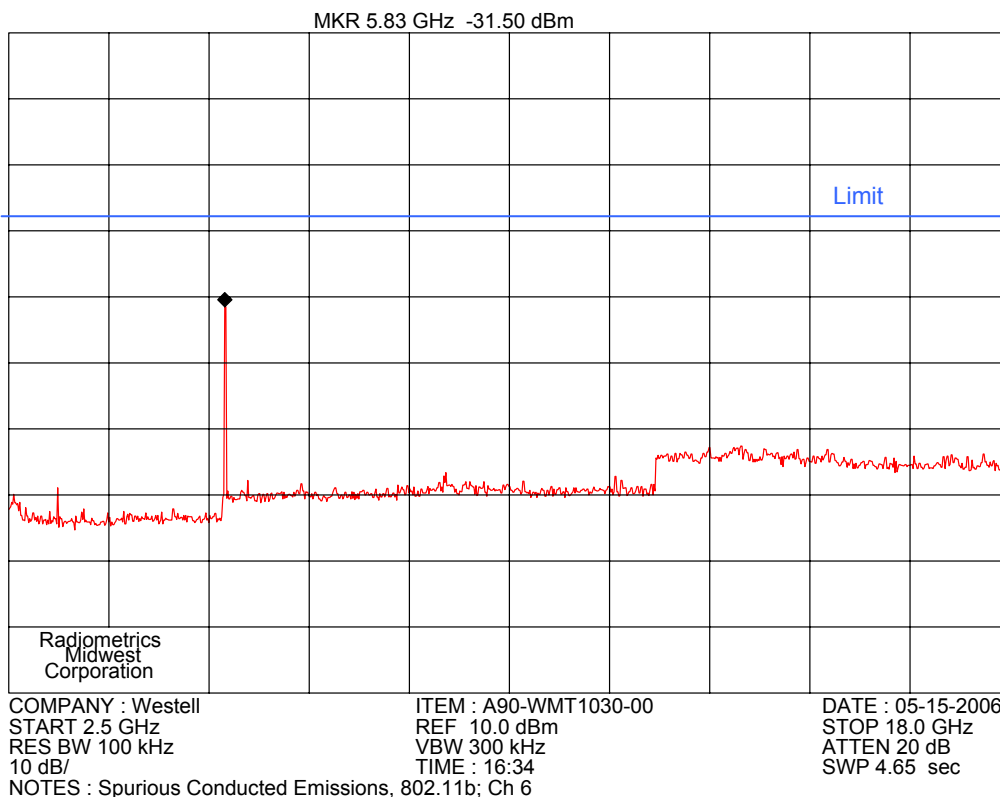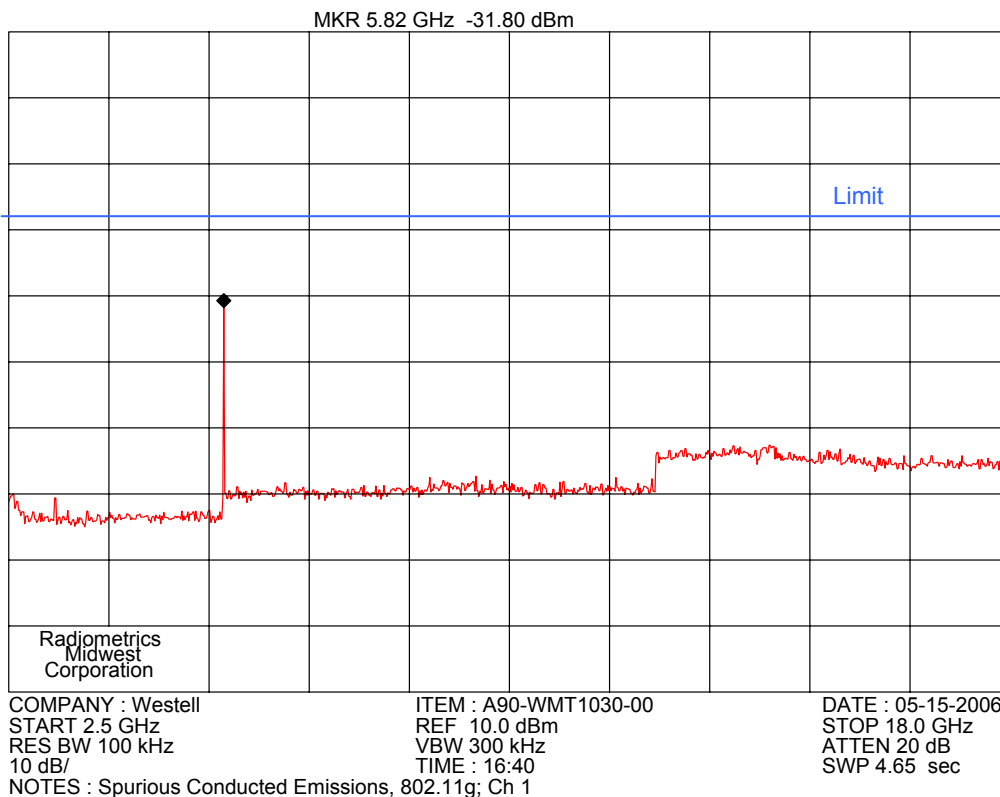

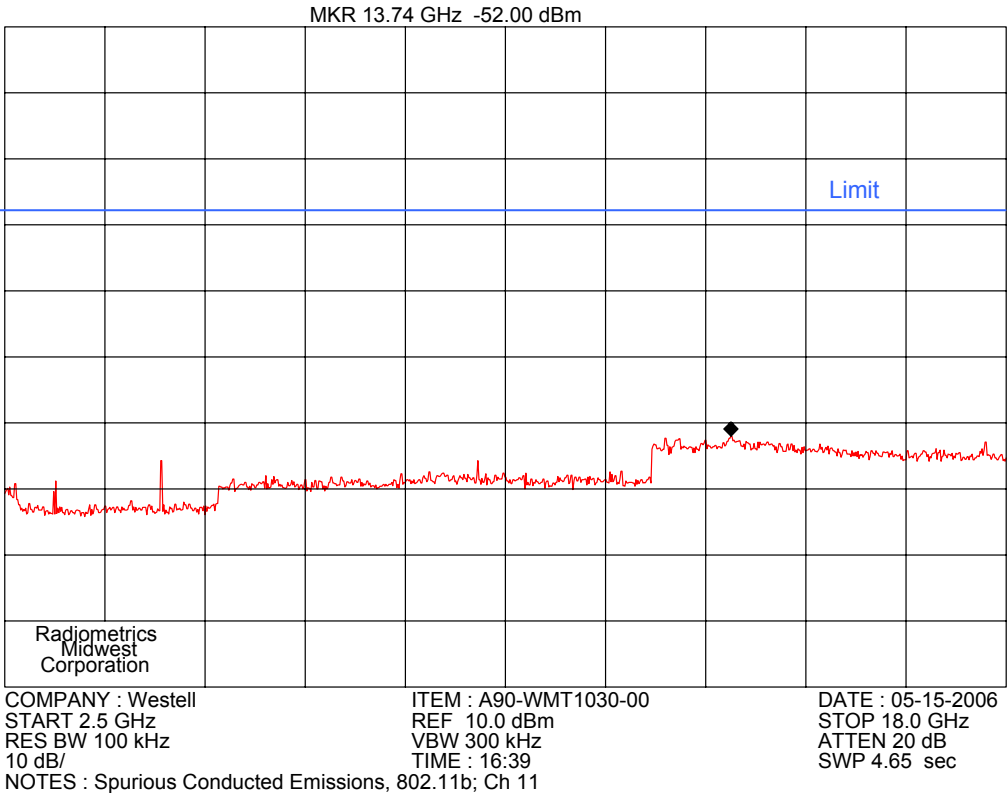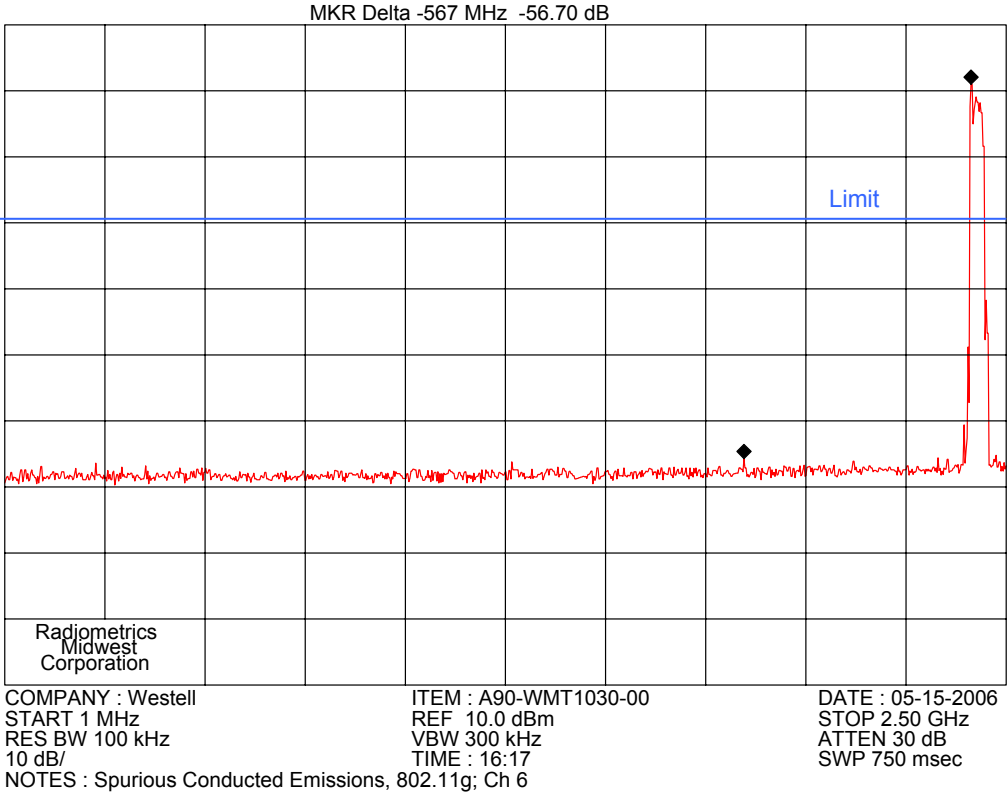

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

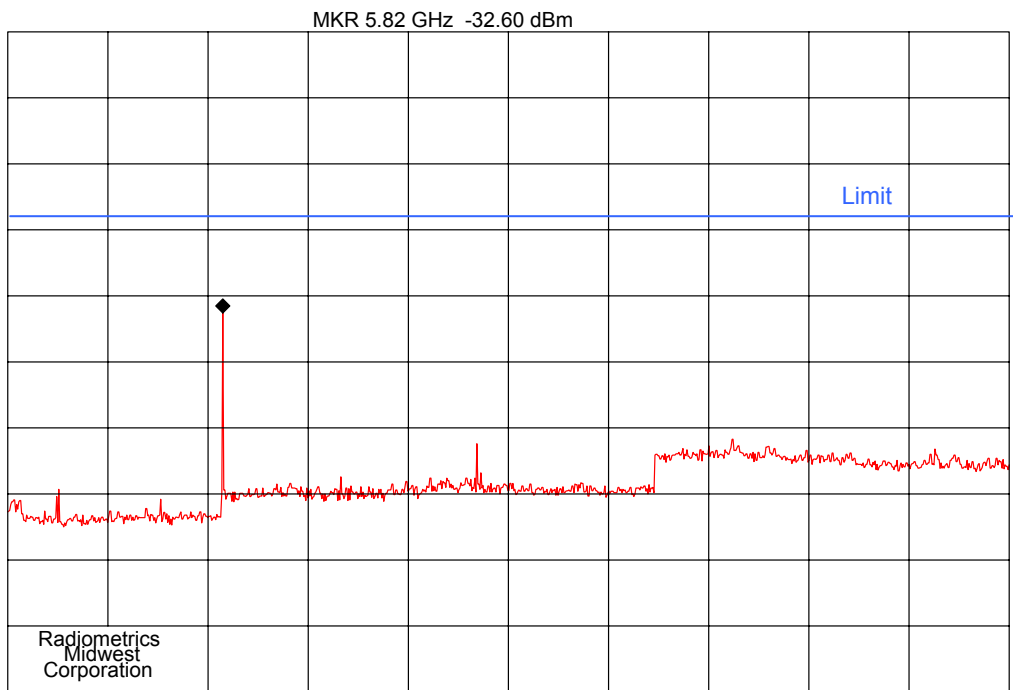

COMPANY : Westell

START 2.5 GHz

RES BW 100 kHz

10 dB/

NOTES : Spurious Conducted Emissions, 802.11g; Ch 11

ITEM : A90-WMT1030-00

REF 10.0 dBm

VBW 300 kHz


TIME : 16:43

DATE : 05-15-2006

STOP 18.0 GHz

ATTEN 20 dB

SWP 4.65 sec

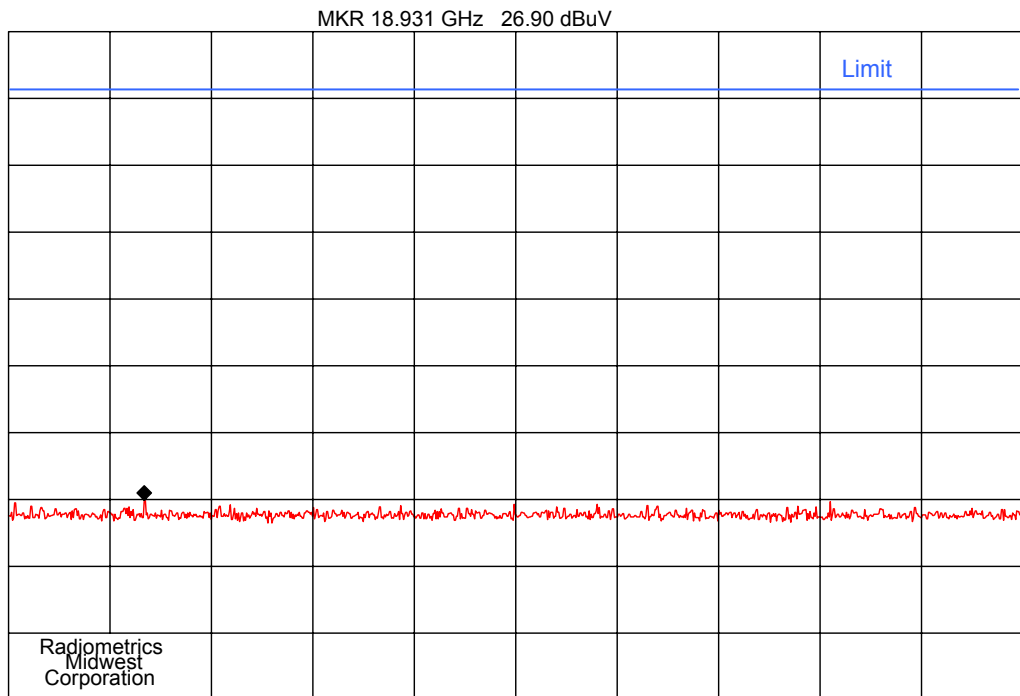

COMPANY : Westell

START 18.00 GHz

RES BW 100 kHz

10 dB/

NOTES : Spurious Conducted Emissions, Ch 1; 802.11b

ITEM : A90-WMT1030-00

REF 97.0 dBuV

VBW 300 kHz

TIME : 14:58



DATE : 05-15-2006

STOP 25.00 GHz



HARMONIC 6

SWP 2.10 sec

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal



RADIOMETRICS MIDWEST CORPORATION - EMC Test Report
Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

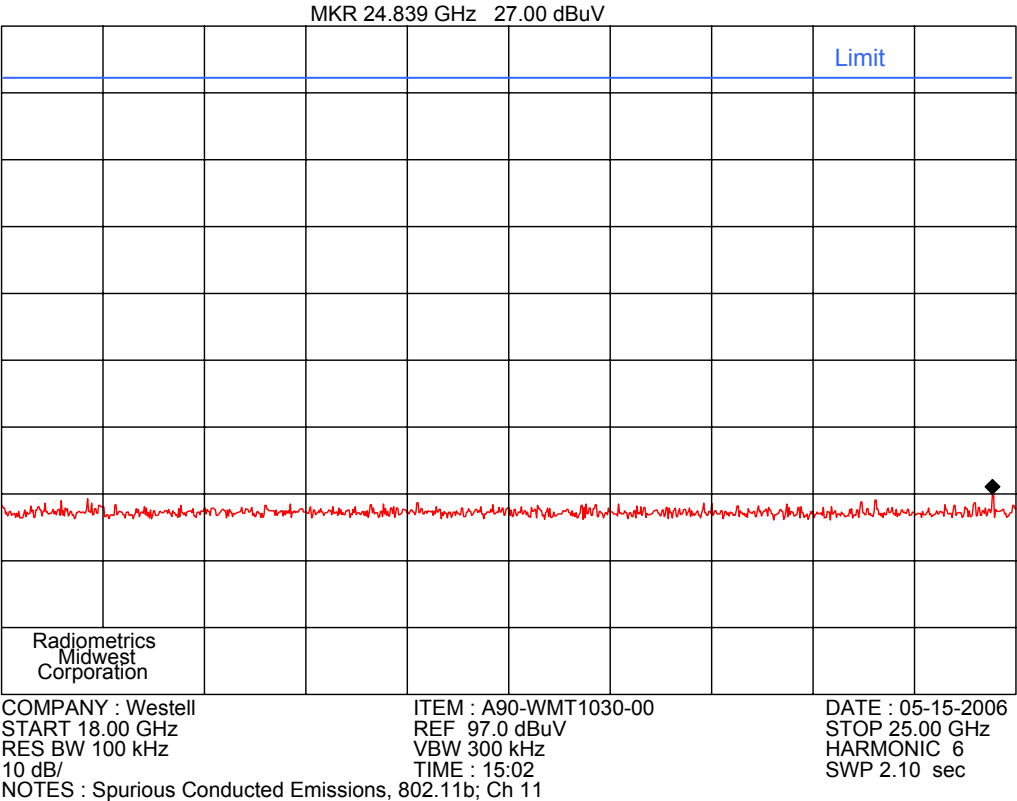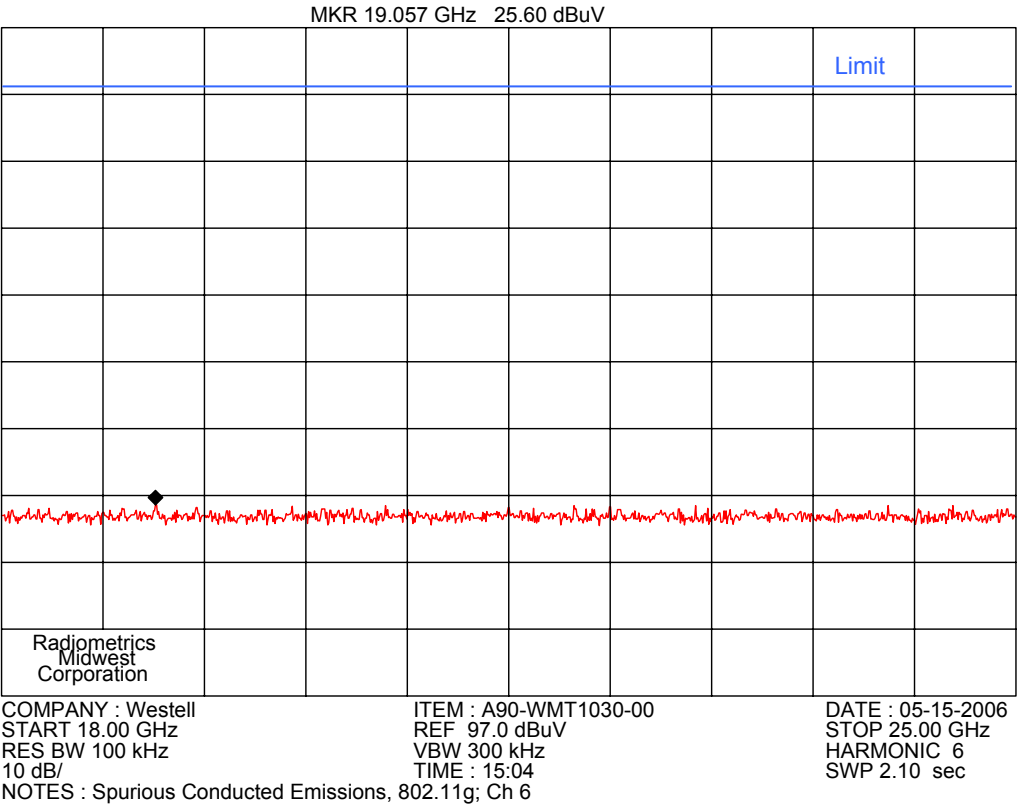

Final radiated emissions measurements were performed in Chamber E at a test distance of 3 meters. The entire frequency range from 30 MHz to 25 GHz was slowly scanned and the emissions in the restricted frequency bands were recorded. Measurements were performed using the peak detector function. The detected emission levels were maximized by rotating the EUT, adjusting the positions of all cables, and by scanning the measurement antenna from 1 to 4 meters above the ground. The anechoic test chamber has a metal ground screen.

10.7.1 Radiated Emissions Field Strength Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

$$FS = RA + AF + CF - AG - HPF$$

Where: FS = Field Strength

RA = Receiver Amplitude


AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

HPF = High pass Filter Loss

Figure 2. Drawing of Radiated Emissions Setup

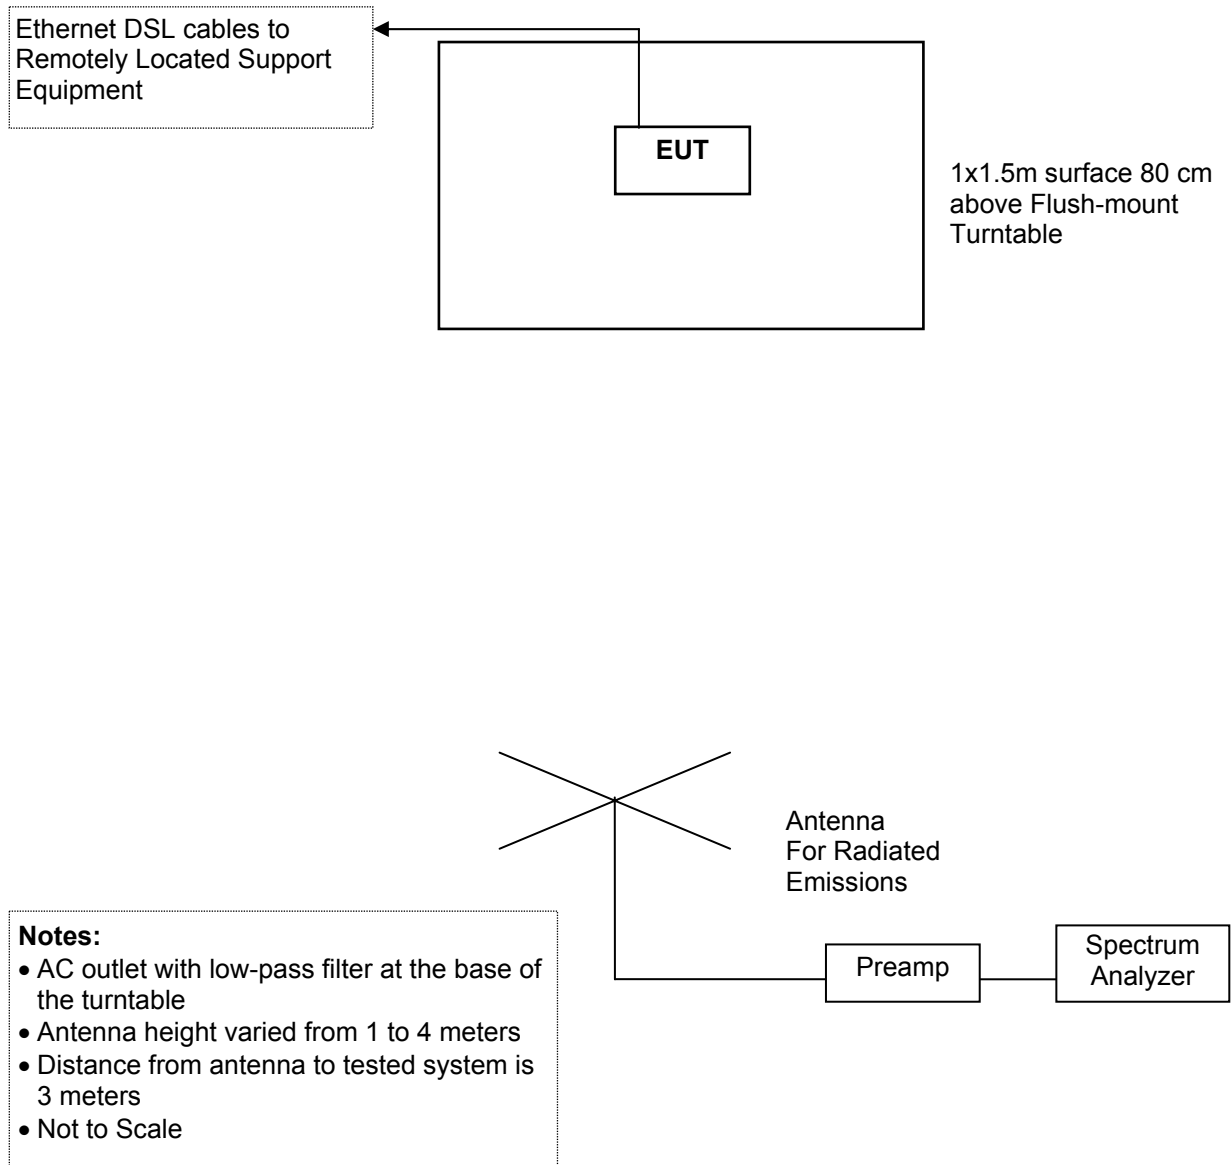

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

10.7.2 Spurious Radiated Emissions Test Results (Restricted Band)

The following spectrum analyzer settings were used.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

A Video Bandwidth of 10 Hz was used for Average measurements.

hrm #	Tx Freq	Ant Pol.	802.11b		802.11g		Corr. Fact. dB	EUT Emission Freq MHz	Field Strength from EUT		Field Strength Limit		Margin Under Limit dB
			Peak	Ave	Peak	Ave			Peak	Ave	Peak	Ave	
1	2412	V	101.0	60.5	99.6	71.0	10.4	2412	110.0	81.4	125.0	105.0	15.0
1	2412	H	99.2	57.2	98.5	70.6	10.4	2412	108.9	81.0	125.0	105.0	16.1
BE	2412	V	49.5	32.5	58.8	35.0	10.4	2389	69.2	45.4	74.0	54.0	4.8
BE	2412	H	46.3	33.0	59.7	36.5	10.4	2390	70.1	46.9	74.0	54.0	3.9
2	2412	V	36.1	25.7	34.0	25.2	13.4	4824	49.5	39.1	74.0	54.0	14.9
2	2412	H	35.7	26.4	34.5	25.1	13.4	4824	49.1	39.8	74.0	54.0	14.2
3	2412	V	34.1	24.0	34.5	24.0	19.4	7236	53.9	43.4	74.0	54.0	10.6
3	2412	H	35.5	24.0	33.9	24.0	19.4	7236	54.9	43.4	74.0	54.0	10.6
1	2437	V	100.7	80.0	100.5	80.0	10.5	2437	111.2	90.5	125.0	105.0	13.8
1	2437	H	99.5	78.6	97.6	71.7	10.5	2437	110.0	89.1	125.0	105.0	15.0
2	2437	V	34.4	24.4	34.0	24.1	13.4	4874	47.8	37.8	74.0	54.0	16.2
2	2437	H	33.5	24.7	33.9	23.9	13.4	4874	47.3	38.1	74.0	54.0	15.9
3	2437	V	34.1	24.0	35.2	24.0	19.5	7311	54.7	43.5	74.0	54.0	10.5
3	2437	H	35.2	24.0	33.6	24.0	19.5	7311	54.7	43.5	74.0	54.0	10.5
1	2462	V	100.9	80.0	100.9	79.9	10.8	2462	111.7	90.8	125.0	105.0	13.3
1	2462	H	99.1	79.0	100.0	79.0	10.8	2462	110.8	89.8	125.0	105.0	14.2
BE	2462	V	57.4	39.6	57.6	35.0	10.9	2483.5	68.5	50.5	74.0	105.0	5.5
BE	2462	H	52.9	32.9	55.9	33.9	10.9	2483.5	66.8	44.8	74.0	105.0	7.2
2	2462	V	37.4	26.3	38.4	23.8	13.7	4924	52.1	40.0	74.0	54.0	14.0
2	2462	H	35.4	24.9	37.0	24.3	13.7	4924	50.7	38.6	74.0	54.0	15.4
3	2462	V	34.5	24.0	35.2	24.0	19.7	7386	54.9	43.7	74.0	54.0	10.3
3	2462	H	35.2	24.0	33.9	24.0	19.7	7386	54.9	43.7	74.0	54.0	10.3

* Noise Floor of analyzer; No detectable emission

Notes: 1. hrm = Harmonic; BE = Band Edge emissions; V = Vertical; H = Horizontal

2. The margin (last column) is the worst case margin under the peak or average limits for that row. It is also the worst case margin for the 802.11b and 802.11g modes.

3. Corr. Factors = Cable Loss – Preamp Gain + Antenna Factor

Judgment: Passed by 3.9 dB

No other emissions were detected in the restricted bands from 1 to 25 GHz.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report			
Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal			

Radiated Emissions below 2 GHz including unrestricted bands

Manufacturer	Westell, Inc.	Specification	FCC Part 15 Subpart C & RSS-210
Model	A90-WMT1030-00	Test Date	05-11-2006
Serial Number	None	Test Distance	3 Meters
Abbreviations	Pol = Antenna Polarization; V = Vertical; H = Horizontal; BC = Biconical (ANT-3); LP = Log-Periodic (ANT-6); HN = Horn (ANT-13) P = peak; Q = QP		
Notes	Corr. Factors = Cable Loss – Preamp Gain		

The following is the worst case emissions from EUT below 2 GHz. The results include intentional and unintentional emissions.

Freq. MHz	Meter Reading dBuV	Antenna		Corr. Factors dB	Field Strength dBuV/m		Margin Under Limit dB
		Factor dB	Pol/ Type		EUT	Limit	
35.5	36.6 P	17.1	H/44	-27.6	26.2	40.0	13.8
64.5	40.2 P	9.4	H/44	-27.0	22.6	40.0	17.4
192.0	50.6 Q	10.3	H/44	-25.6	35.3	43.5	8.2
208.0	53.1 P	10.5	H/44	-25.4	38.2	43.5	5.3
216.0	54.2 P	11.1	H/44	-25.3	40.0	43.5	3.5
240.0	56.3 Q	12.2	H/44	-25.2	43.7	46.0	2.3
256.3	45.0 P	12.6	H/44	-25.0	32.5	46.0	13.5
264.4	47.0 P	13.0	H/44	-25.0	35.0	46.0	11.0
288.4	42.5 P	13.0	H/44	-24.8	30.6	46.0	15.4
300.5	42.3 P	13.7	H/44	-24.7	31.3	46.0	14.7
352.0	38.6 P	16.0	H/44	-24.4	30.2	46.0	15.8
432.1	37.6 P	16.3	H/44	-24.0	29.9	46.0	16.1
480.4	36.0 P	18.0	H/44	-23.6	30.4	46.0	15.6
560.5	37.6 P	19.0	H/44	-23.0	33.7	46.0	12.3
625.2	36.7 P	19.4	H/44	-22.7	33.4	46.0	12.6
634.6	38.0 P	19.4	H/44	-22.6	34.8	46.0	11.2
750.4	32.3 P	20.9	H/44	-21.7	31.4	46.0	14.6
34.8	45.9 P	15.9	V/44	-27.6	34.3	40.0	5.7
37.3	43.4 P	15.5	V/44	-27.5	31.4	40.0	8.6
47.6	43.0 P	14.8	V/44	-27.3	30.5	40.0	9.5
62.8	50.8 Q	11.2	V/44	-27.0	34.9	40.0	5.1
63.0	48.0 P	11.1	V/44	-27.0	32.1	40.0	7.9
63.2	50.1 P	11.0	V/44	-27.0	34.0	40.0	6.0
74.0	45.1 P	6.9	V/44	-26.9	25.1	40.0	14.9
94.2	47.4 P	10.1	V/44	-26.5	31.0	43.5	12.5
98.6	47.9 P	11.7	V/44	-26.5	33.1	43.5	10.4
104.7	50.7 Q	12.5	V/44	-26.4	36.7	43.5	6.8
127.9	42.8 P	15.0	V/44	-26.2	31.6	43.5	11.9
143.4	47.8 P	11.7	V/44	-26.0	33.5	43.5	10.0
184.1	45.8 P	9.9	V/44	-25.7	30.0	43.5	13.5
192.0	48.9 P	10.3	V/44	-25.6	33.6	43.5	9.9
208.0	44.6 P	11.1	V/44	-25.4	30.3	43.5	13.2
216.0	45.9 P	11.8	V/44	-25.3	32.3	43.5	11.2
232.0	46.5 P	12.4	V/44	-25.2	33.7	46.0	12.3
239.9	49.9 P	12.8	V/44	-25.2	37.5	46.0	8.5
300.5	41.3 P	13.8	V/44	-24.7	30.4	46.0	15.6
312.4	40.0 P	14.0	V/44	-24.7	29.3	46.0	16.7
336.1	40.3 P	16.4	V/44	-24.5	32.2	46.0	13.8

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of the Westell, Inc., Model A90-WMT1030-00, Media Terminal

Freq. MHz	Meter Reading dBuV	Antenna		Corr. Factors dB	Field Strength dBuV/m		Margin Under Limit dB
		Factor dB	Pol/ Type		EUT	Limit	
352.0	38.6 P	16.7	V/44	-24.4	30.8	46.0	15.2
400.2	38.1 P	16.2	V/44	-24.2	30.1	46.0	15.9
416.1	38.0 P	16.5	V/44	-24.1	30.4	46.0	15.6
432.1	38.3 P	16.4	V/44	-24.0	30.7	46.0	15.3
440.0	40.0 P	16.6	V/44	-23.9	32.8	46.0	13.2
480.4	37.8 P	17.8	V/44	-23.6	32.1	46.0	13.9
576.3	35.8 P	18.6	V/44	-22.9	31.5	46.0	14.5
625.2	37.5 P	19.0	V/44	-22.7	33.8	46.0	12.2
1404.5	28.9 P	25.1	V/44	-19.5	34.5	54.0	19.5
Notes wireless mode							
191.9	54.1 P	10.3	H/44	-25.6	38.8	43.5	4.7
215.9	48.6 P	11.1	H/44	-25.3	34.3	43.5	9.2
231.9	47.9 P	11.7	H/44	-25.2	34.3	46.0	11.7
239.9	53.8 P	12.2	H/44	-25.2	40.9	46.0	5.1
240.0	56.0 Q	12.2	H/44	-25.2	43.0	46.0	3.0
255.9	50.3 P	12.6	H/44	-25.0	37.8	46.0	8.2
263.9	51.7 P	13.0	H/44	-25.0	39.7	46.0	6.3
299.5	47.4 P	13.6	H/44	-24.8	36.3	46.0	9.7
311.5	42.6 P	14.0	H/44	-24.7	31.9	46.0	14.1
48.1	43.8 P	14.6	V/44	-27.3	31.1	40.0	8.9
96.5	43.5 P	11.0	V/44	-26.5	28.0	43.5	15.5
100.1	47.5 P	12.2	V/44	-26.5	33.2	43.5	10.3
127.7	47.4 P	15.0	V/44	-26.2	36.2	43.5	7.3
167.3	52.7 P	10.4	V/44	-25.8	37.2	43.5	6.3
168.3	50.4 P	10.3	V/44	-25.8	34.9	43.5	8.6
207.3	49.5 P	11.0	V/44	-25.4	35.1	43.5	8.4
215.3	50.7 P	11.8	V/44	-25.3	37.2	43.5	6.3
215.9	53.5 P	11.8	V/44	-25.3	40.0	43.5	3.5
222.9	49.7 P	12.0	V/44	-25.3	36.4	46.0	9.6
231.9	50.4 P	12.4	V/44	-25.2	37.6	46.0	8.4
239.9	49.4 P	12.8	V/44	-25.2	37.0	46.0	9.0
263.5	45.7 P	13.2	V/44	-25.0	33.9	46.0	12.1
264.5	44.3 P	13.2	V/44	-25.0	32.5	46.0	13.5
352.1	41.4 P	16.7	V/44	-24.4	33.7	46.0	12.3
576.1	37.0 P	18.6	V/44	-22.9	32.7	46.0	13.3
576.3	38.0 P	18.6	V/44	-22.9	33.7	46.0	12.3
639.7	38.2 P	19.2	V/44	-22.6	34.8	46.0	11.2
1020.3	31.9 P	22.5	V/44	-21.1	33.2	54.0	20.8
1080.0	30.9 P	22.9	V/44	-20.9	33.0	54.0	21.0
1361.0	30.9 P	24.8	V/44	-19.6	36.1	54.0	17.9
1428.2	30.0 P	25.2	V/44	-19.4	35.8	54.0	18.2
1452.2	28.3 P	25.4	V/44	-19.3	34.4	54.0	19.6
1474.0	32.3 P	25.7	V/44	-19.2	38.8	54.0	15.2

Judgment: Passed by 2.3 dB