
Communication Microwave Corp
395 Oakhill Road
Mountaintop, PA 18707

Technical Manual


HPB250-A
250 Watt Booster System



Created by: Kimberly Simeone

This document is the property of the Communication Microwave Corp, unauthorized use, reproduction, or distribution without written permission is strictly prohibited.

HPB250-A Top Level Description

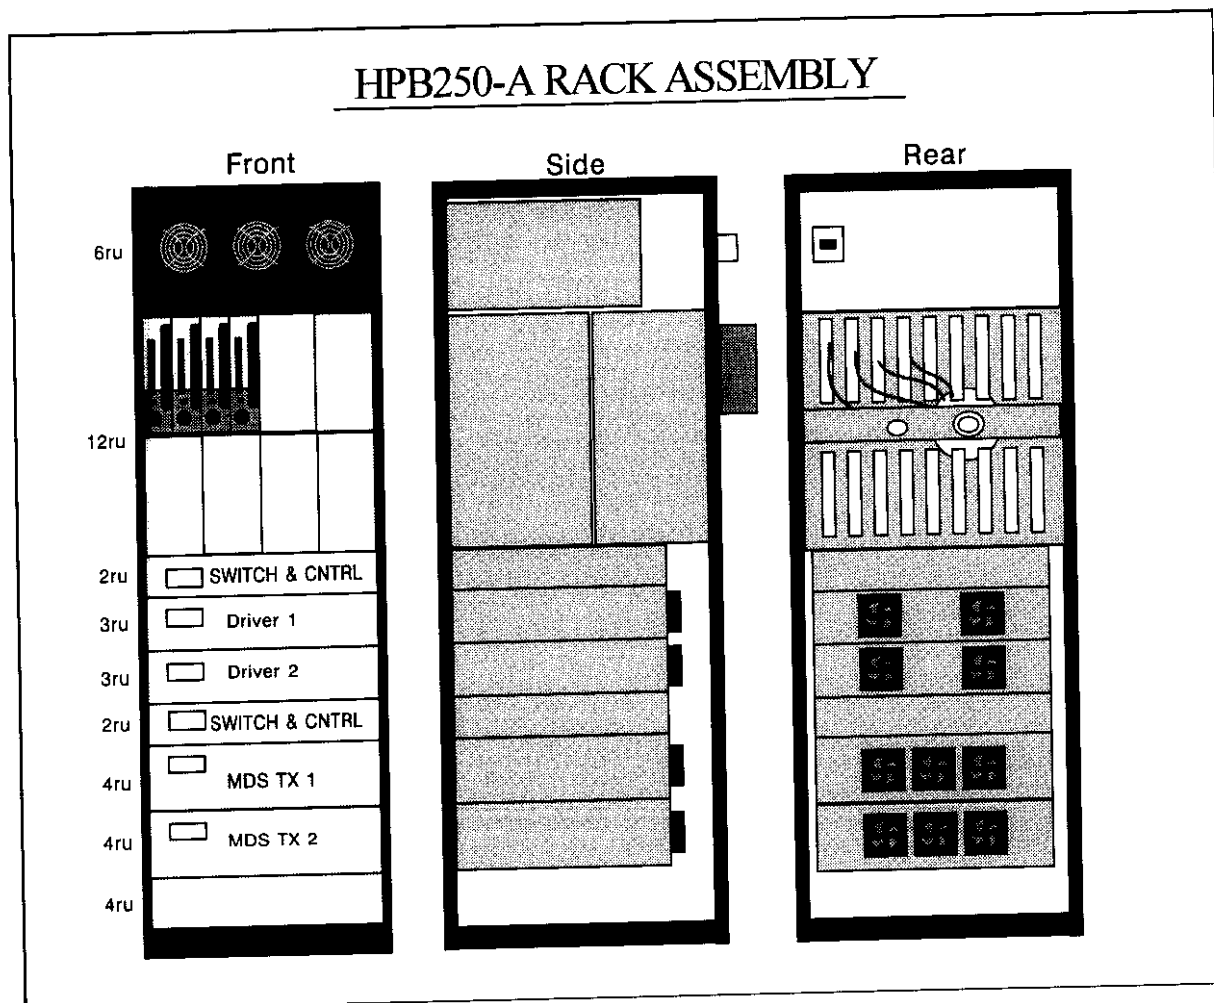


The HPB250-A is a high power and high gain, on-channel signal booster. It receives and retransmits multiple television signals to fill in shadowed service areas where line-of-site access to the headend is obscured. The HPB250-A consists of two or three power supplies, eight Power Amplifier Segments, two Backup System Controllers, and four Drivers which are contained within a Rack and Sub-rack. The HPB250-A is fully redundant. The Power Supplies and Power Amplifier Segments allow hot replacement. Identical drivers are provided for both MDS and ITFS frequencies. A Backup System Controller indicates output power and enables the secondary driver should a failure occur in the primary driver.

The HPB Series of Boosters is available in both Upgradeable and Non-Upgradeable models. A Non-Upgradeable model provides maximum space efficiency; where, the modular system architecture of an Upgradeable model allows it to be easily upgraded from 1 Watt per channel to 4 Watts per channel. Similarly, it may also be downgraded; and the Power Amplifier Segments may be used elsewhere or kept as spares for hot replacement. As the output power is modified, the model name will change respectively (refer to the following table). The Federal

(refer to the following table). The Federal Communications Commission Identifier (FCC ID) will also be altered corresponding to the new model and power level.

<i>Model Name</i>	<i>Output Power per channel</i>	<i>FCC ID</i>
HPB250-A	1 Watt	CHP8BUHPB250-A
HPB500-A	2 Watts	CHP8BUHPB500-A
HPB1000-A	4 Watts	CHP8BUHPB1000-A

A new front panel label is needed to accommodate each FCC ID. The label is located on the Backup System Controller as shown in the diagram below and will be replaced with each upgrade as needed.

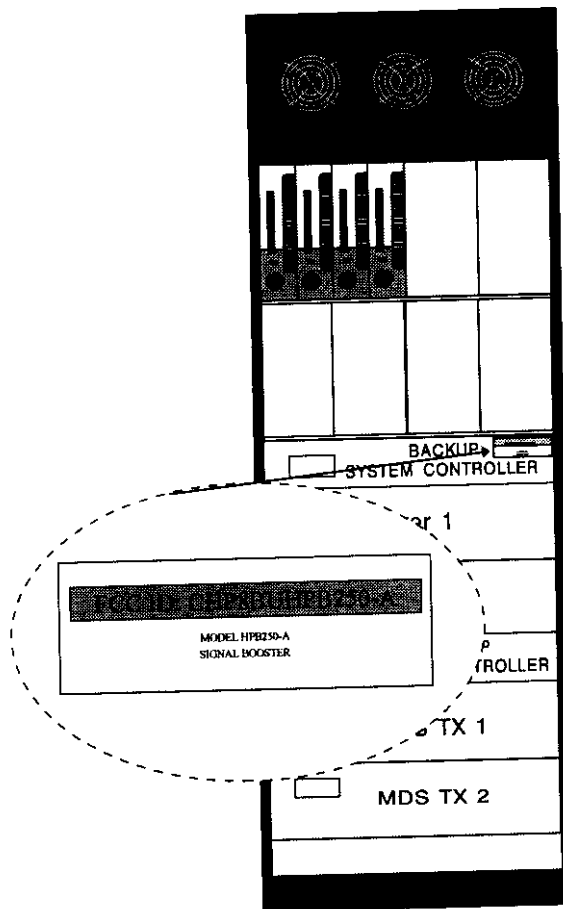

In order to maximize power density, both the Rack and Sub-rack are integral subsystems of the booster design. The Rack provides phase to phase AC power to the Drivers, DC power to the Sub-rack, and the cooling for the Power Amplifier Segments. Similarly, the Sub-rack provides an interface between the Power Amplifier Segments and the entire system.

HPB250-A/HPB500-A/HPB1000-A - HP Series of Boosters Specifications

Parameter	Specification	Notes/Test Conditions
Peak of Sync Output Power per Carrier	28.5 / 31.5 / 34.5 dBm; 32 / 35.0 / 38 dBm; 36.5 / 39.5 / 42 dBm; 40 / 43.0 / 46.0 dBm; 45.0 / 48.0 / 51.0 dBm	17-31 occupied channels; 9-16 occupied channels; 5-8 occupied channels; 3-4 occupied channels; 2 occupied channels; Referenced to booster RF output
Input/Output Connectors/Impedance	Input N female 50 ohms Output EIA7/8 50 ohms	
Input Frequency	2500 - 2686 MHz	31 occupied channels
Input Signal Level per carrier	-55 to -25 dBm	31 occupied channels
Frequency Response	±1.0 dB	2500 - 2686 MHz
Output Frequency	2500 - 2686 MHz	
Noise Figure	≤11 dB without LNA ≤5 dB with optional LNA	Referenced to RF input signal splitter; Referenced to system LNA input
Carrier to Noise Ratio	> 52 dB	31 carriers at -40 dBm peak of sync input power per carrier; Referenced to RF input signal splitter
AGC Range	> 30 dB	
Harmonics ¹	≤ -60 dBc	Relative to peak of sync output power per channel; 30 kHz RBW; Referenced to booster RF output

***Specifications subject to change without notice.**

Parameter	Specification	Notes/Test Conditions
Spurious ²	≤ -60 dBc	Relative to peak of sync output power per channel; 30 kHz RBW
In-Band Intermodulation Distortion ³	≤ -60 dB	Relative to in-band peak power per channels; 30 kHz RBW; Referenced to booster RF output
Out-of-band Intermodulation Distortion ³	≤ -60 dB	Relative to peak of sync output power per channels; 30 kHz RBW; Referenced to booster RF output
RF Output Power Variation	$\leq \pm 0.2$ dB	Referenced to booster RF output
Hum and Noise	≤ -60 dB	Referenced to peak of output power per carrier
Functional Operating Temperature Range	0°C to +50°C	Frequency stability and equipment functionality guaranteed
Specified Operating Temperature Range	13° to +33°C	All Specified parameters guaranteed
Relative Humidity	95% Non-condensing	

Parameter	HPB250-A 250 Watt Booster	HPB500-A 500 Watt Booster	HPB1000-A 1000 Watt Booster
AC Power (Max) 230 V _{AC} , 50/60 Hz Line PF ≥ 0.95	<1950 VA	<3200 VA	<5800 VA
Weight (max) ⁴	335 lbs	375 lbs	470 lbs
Mechanical Dimensions ⁵	50.75"H x 19.00"W x 30.00" D 129 cm H x 48. 3cm W x 76.2 cm D	50.75"H x 19.00"W x 30.00" D 129 cm H x 48. 3cm W x 76.2 cm D	50.75"H x 19.00"W x 30.00" D 129 cm H x 48. 3cm W x 76.2 cm D

Notes:

1. Undesired signal power 2 dB higher than the nominal average power of the adjacent spectral regions that is harmonically related to the fundamental carrier frequency.
2. Undesired signal power 2 dB higher than the nominal average power of the adjacent spectral regions that is harmonically related to internal system signals such as clock, LOs, etc.
3. All factory test measurements made at approximately 23°C.
4. Weight includes rack.
5. The HPB250-A and HPB500-A includes space for power upgrades to an HPB1000-A.
6. No bandpass filter is required since both in-band and out-of-band intermodulation distortion is less than 60 dB relative to in band peak of sync output power.


Rack Theory of Operation

The Rack is an integral part of the transmitter assembly. It supplies three phase AC power to the transmitters, DC power to the Sub-Rack, and the cooling for the Power Amplifier Segments. The rack is available in different sizes to accommodate the various physical configurations of the HP Series of transmitters/boosters and to allow for future upgrades to higher output power levels. The table below describes the types of HPSC Transmitters and the Rack configurations required by each type.

<i>System Description</i>	<i>Transmitter Size RU (Rack Units)</i>	<i>Rack Size RU/Inch</i>	<i>Transmitters/Rack</i>	<i>Spare Rack Units</i>	<i>Overall Size</i>	<i>Notes:</i>
50 W Average Power (150 W Analog)	10	40/70"	4	0	77.125"H 21.063"W 34.500"D	Highest Power Density Upgradeable
100 W Average Power (300 W Analog)	10	40/70"	4	0	77.125"H 21.063"W 34.500"D	Highest Power Density Not Upgradeable
100 W-200 W Average Power (300 W - 600 W Analog)	15	45/78"	3	0	85.875"H 21.063"W 34.500"D	High Power Density Possible to Increment Output Power in 12.5W Steps. (37.5 Analog)
100 W Average Power Upgradeable (300 W Analog)	16	40/70"	2	8	77.125"H 21.063"W 34.500"D	Upgrade Path to All Power Levels Due to Lower Power Density.

Three Phase AC Power enters the AC Power Distribution Box, which is located on the top of the rack. It is connected to the AC Power Harness which distributes both three phase and phase to phase power to the entire rack.

Each transmitter requires an AC to DC Front End Converter, which is mounted behind the blanking panel, to supply the DC Power to the Sub-Rack. This power supply is connected to the Power Amplifier Segments via the DC Power Harness. The DC Power Harness connects the AC to DC Front End Converter and the Sub-Rack.

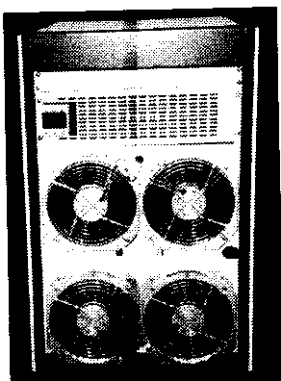


Fans attached to the rear door of the Rack supply cooling for the Power Amplifier Segments. Each fan pulls cool air from the front of the rack to the rear. The transmitters will be automatically placed into standby when the rear door of the rack is opened. This will prevent thermal shutdown of the Power Amplifier Segments. *Note: The number of fans is dependent upon transmitter configuration.*

SD10000/HPB/SBM Rear View


SD/SDA/HPB/SBM HIGH POWER SERIES

BLOCK DIAGRAM OF RACK

SINGLE TRANSMITTER SHOWN

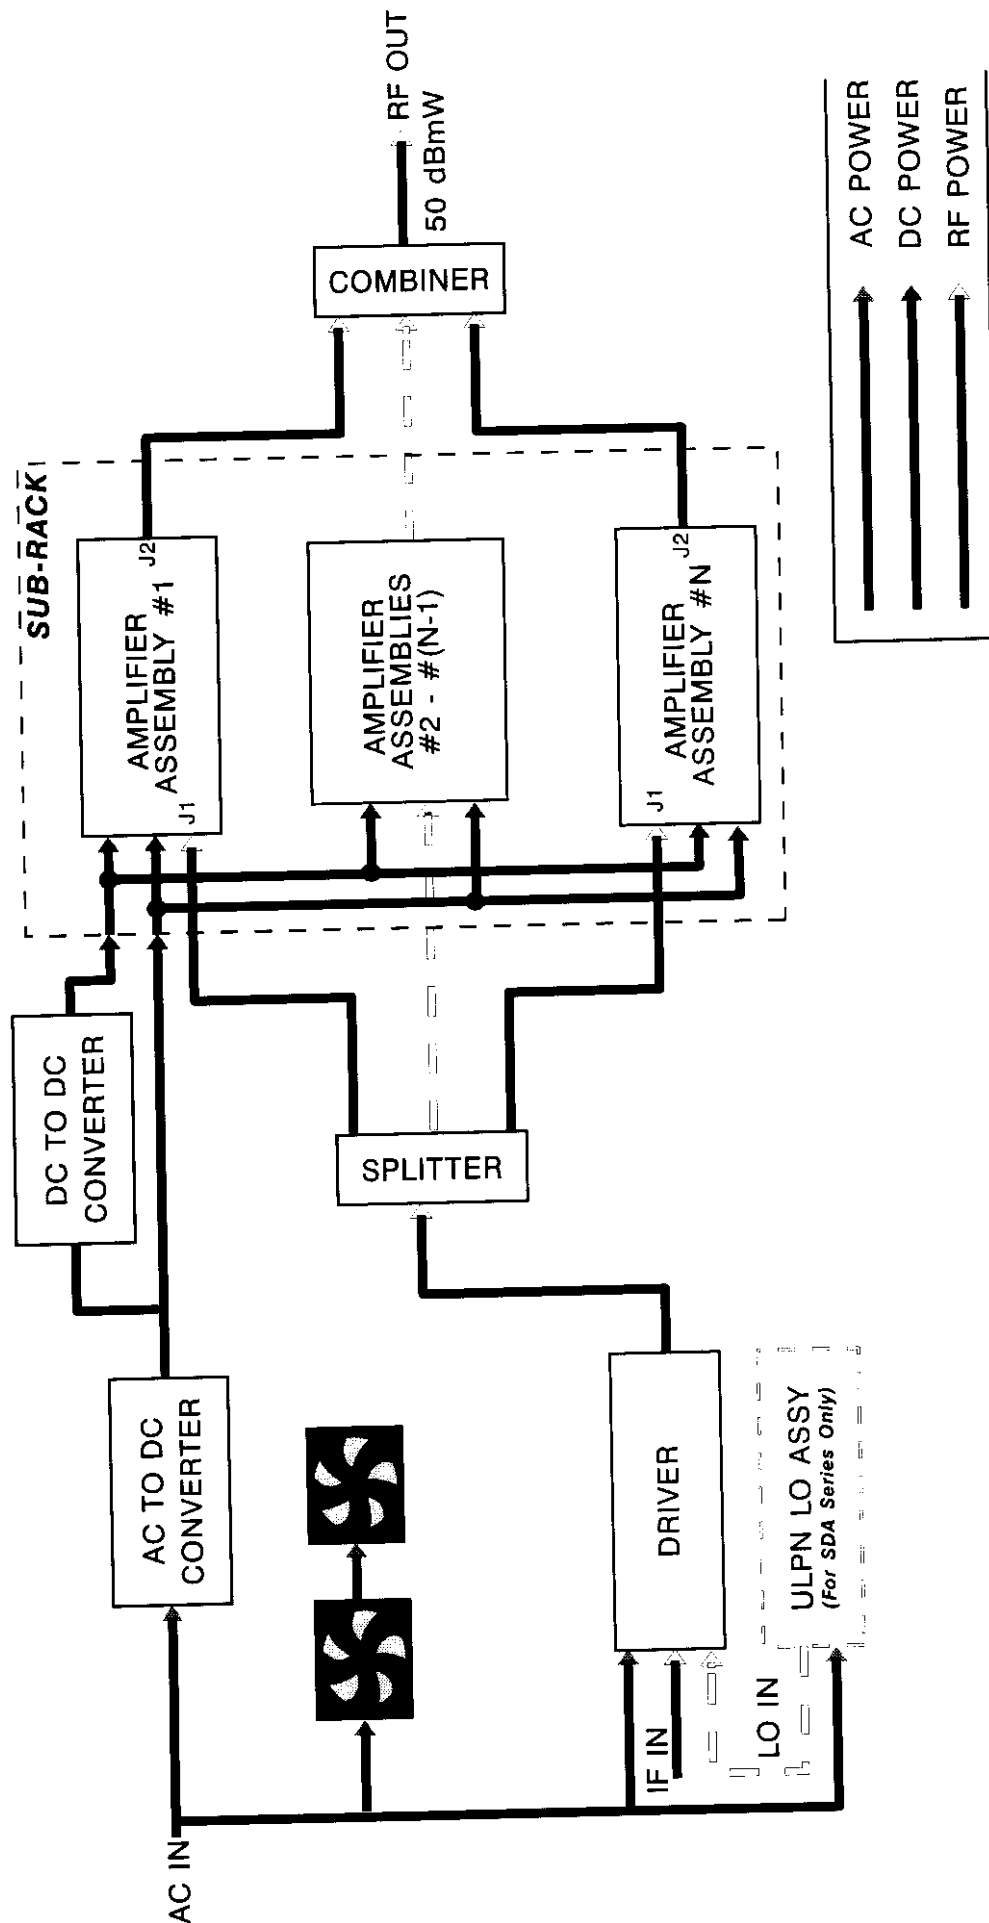

Rack Power Supply for High Power Booster Series

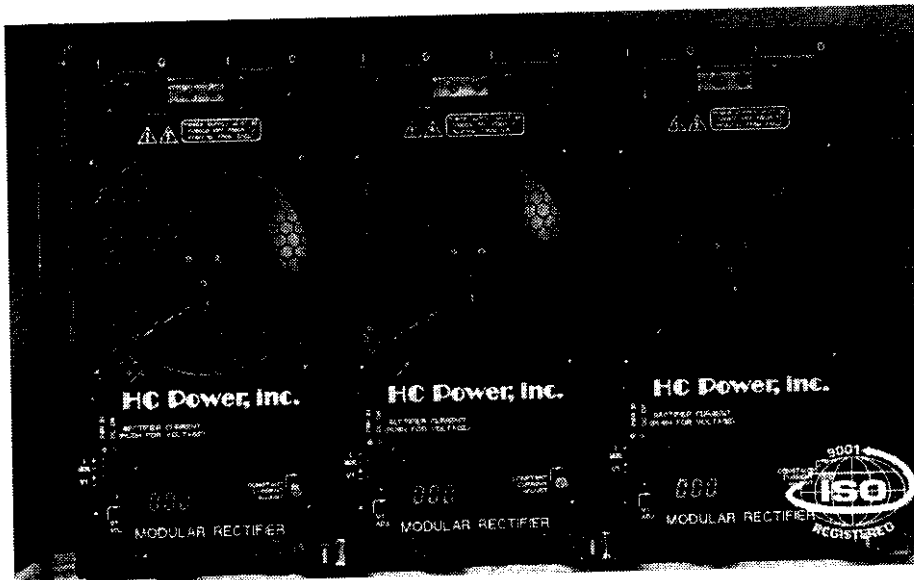

The Power Supply for the rack consists of three 48-Volt modules in a rectifier shelf designed to minimize installation and maintenance time. Hotswap insertion technology (hot replacement) allows easy system power upgrades. The Power Supply is equipped with logic and visual status indications, automatic load sharing and complete front access.

Front panel features include PWR IN and DC OK LED indicators, output voltage and current limit adjustments, voltage and current monitor test points, and digital display indication current or voltage output of the Power Supply.

The modules are housed in a three bay rectifier shelf to provide easy-guide module insertion and extraction. Forced air cools the Power Supply by drawing ambient air through the intake on the front of the Power Supply and exhausting out the rear of the shelf.

Protection is provided against overvoltage, overcurrent, and overtemperature. The Power Supply will shut off if the voltage exceeds the nominal voltage by 20%. The AC input or the remote on/off must be recycled to restart the rectifier. The Power Supply will also shut down if the internal temperature reaches an unsafe level. Restart is automatic when the Power Supply returns to normal operating range.

AC Power Interconnections

The AC Power Interconnections include an AC Power Distribution Box, 15 Ampere circuit breaker, terminal strip, AC to DC Front End Converter, Driver Chassis, Ultra Low Phase Noise Drawer (*Agile applications only*) and fans. The AC Power Interconnections provide phase-to-phase 208 VAC and three phase-208 VAC* to each transmitter in the Rack.


The three-phase power is connected to the Rack through the AC Power Distribution Box, which is located on the top of the Rack. The AC Power Distribution Box distributes the three phase power via two or three 350 Ampere, 600 VAC, three pole terminal blocks. The number of terminal blocks depends upon the number of transmitters in each Rack. Each transmitter has its own 15-Ampere circuit breaker, which trips at 20 Amperes. The 15-Ampere circuit breaker is connected to the AC Power Distribution Box via 6 AWG, 3000 Volt, and stranded-tinned-copper wire with Polyvinylchloride insulation. The circuit breaker is located on the rear of the Rack. A plastic cover to prevent accidental shut down of the transmitter protects it.

The terminal strip is connected to the circuit breaker via 12 AWG Polyolefin-insulated wire, rated at 600 Volts with a breakdown voltage of 6000 Volts. The terminal strip is constructed of Phenolic-insulated material with a breakdown voltage of 9000 Volts. The Zinc-plated Steel terminals are rated at 30 Amperes of current. The terminal strip distributes the three phase power to the AC to DC Front End Converter and phase-to-phase 208 VAC to the Driver, Ultra Low Phase Noise Drawer (*Agile applications only*) and the fans. The Driver and Ultra Low Phase Noise Drawer require phase to phase 208 VAC, which is delivered by a 14 AWG-three conductor line cord. The terminal strip also supplies phase-to-phase power to the 208 VAC, 80-Watt, 600-CFM fans, which are mounted on the rear door of the Rack. The number of fans per transmitter is dependent upon the transmitter model. The fan power harness is constructed of eight 14 AWG wires. Two wires are required for each fan; the unused wires are fastened in place and terminated to allow for future upgrades.

The table below illustrates the configuration of a Rack for different models and the possible output power levels of each transmitter.

Parameter	Upgradeable SD/SDA5000		SD/SDA 10000	Upgradeable SD/SDA10000 (SD/SDA15000)				SD/SDA 20000
Output Power								
Digital (Fixed)	50 W	75 W	100 W	100 W	125 W	150 W	175 W	200 W
Analog (Fixed)	150 W	225 W	300 W	300 W	375 W	450 W	525 W	600 W
Digital (Agile)	40 W	60 W	80 W	80 W	100 W	120 W	140 W	160 W
Analog (Agile)	120 W	180 W	240 W	240 W	300 W	360 W	420 W	480 W
Power Supplies	4 @ 1.024 KVA	4 @ 1.504 KVA	4 @ 2.048 KVA	3 @ 2.048 KVA	3 @ 2.56 KVA	3 @ 3.072 KVA	3 @ 3.584 KVA	3 @ 4.097 KVA
Fans	4 @ 80 VA		8 @ 80 VA	6 @ 80 VA		8 @ 80 VA	12 @ 80 VA	12 @ 80 VA
Drivers	4 @ 100 VA		4 @ 100 VA	3 @ 100 VA				3 @ 100 VA
VA TOTALS	4816 VA	6736 VA	9232 VA	6924 VA	8460 VA	10156 VA	12012 VA	13551VA

*Other power options available upon request.

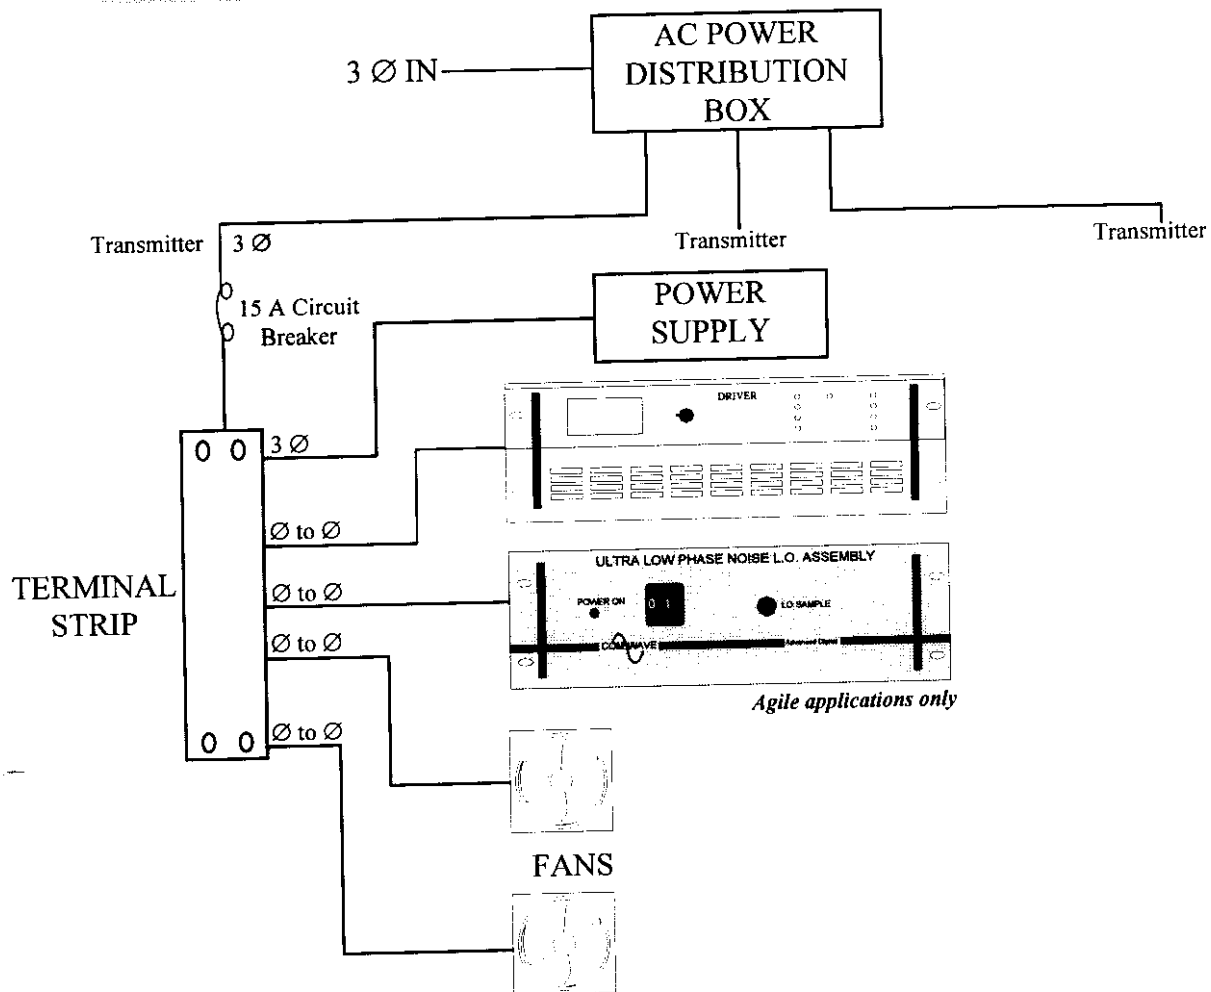AC Power Interconnections Block Diagram

DC Power Interconnections

The DC Power Interconnection for each transmitter includes an AC to DC Front End Converter, a DC Power Harness, a DC to DC Converter, and a Mother Board.

The AC to DC Front End Converter accepts a $208 V_{AC}$ 3-phase input and converts it to $48 V_{DC}$. The Front End Converter is a 4000-Watt MOSFET switching power supply with .985% minimum Power Factor. The $48 V_{DC}$ output is connected to the Mother Board and the DC to DC Converter via the DC Power Harness.

The DC Power Harness provides a path for $48 V_{DC}$ to the Mother Board and the DC to DC Converter. The DC Power Harness consists of standard tinned 14 gauge copper conductors with .032 thick Polyolefin insulation, rated at 600 volts.

The DC to DC Converter is a 75-Watt, 15 Amp, $48 V_{DC}$ to $10 V_{DC}$, single output converter. It supplies $10 V_{DC}$ to the Power Amplifier Segments through the Mother Board on the Sub-Rack.

The Mother Board supplies $10 V_{DC}$ and $48 V_{DC}$ to the Power Amplifier Segments through connections located on eight 14-pin connectors. Control and Diagnostic signals are also routed through the Mother Board to the Microcontroller board within each segment.

The total DC power for each transmitter configuration is specified below in table A-1:

Table A-1

Transmitter Output Power (Watts)				Amps @ 10 Volts	Amps @ 48 Volts
Fixed Digital	Fixed Analog	Agile Digital	Agile Analog		
50	150	40	120	1.4	19.45
100	300	80	240	2.8	39.90
125	375	100	300	3.5	49.90
150	450	120	360	4.2	59.85
175	525	140	420	4.9	69.82
200	600	160	480	5.6	78.80
HPB250-A	HPB250-A			1.4	19.45
HPB500-A	HPB500-A			2.8	39.90
HPB1000-A	HPB1000-A			5.6	78.80

Note:


1. Each amplifier module receives $48 V_{DC}$ at 5 Amps.
2. Each amplifier module receives $10 V_{DC}$ at .35 Amps.

The AC to DC Front End Converter provides an input to the DC to DC Converter of $48 V_{DC}$, as specified below in table A-2:

Table A-2

Transmitter Output Power (Watts)				48 Volts to 10 Volt/Amps
Fixed Digital	Fixed Analog	Agile Digital	Agile Analog	
50	200	40	120	0.35
100	300	80	240	0.70
125	375	100	300	0.87
150	450	120	360	1.05
175	525	140	420	1.22
200	600	160	480	1.40
HPB250-A	HPB250-A			0.35
HPB500-A	HPB500-A			0.70
HPB1000-A	HPB1000-A			1.40

DC Power Interconnection Block Diagram

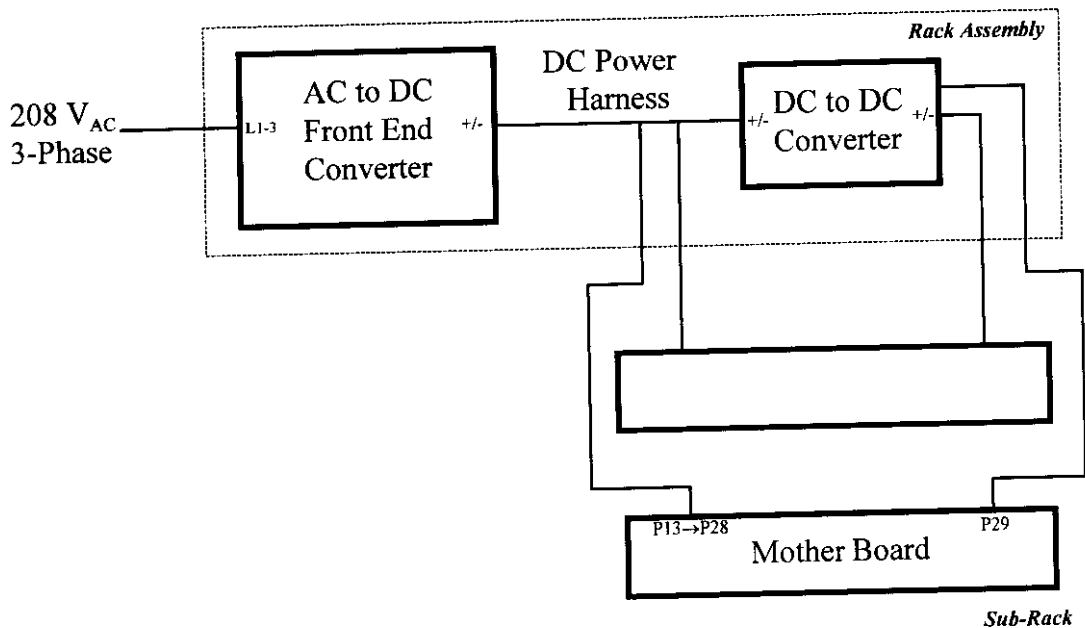

Sub-Rack Theory of Operation

The Sub-Rack is the unit which houses the Power Amplifier Segments and provides an interface between the Segments and the entire System. It is capable of housing up to 16 individual Segments. The Sub-Rack consists of a Mother Board (see Document #: HG3-01B02 for details, one Mother Board is needed for eight Segments and two Mother Boards are needed when more than eight Segments are used), guide rails, protective Lexan overlay, and miscellaneous sheet metal parts. Each Segment slides into the Sub-Rack on nylon slides and connects to the Mother Board(s) via floating connectors. The key-lock switch, located on the Segment's front panel, must be in the OFF position in order to plug the Segment into the subrack. This is to ensure that there is no arcing between connections before the Segment is fully engaged. Once the Segment is slid into place, thumb screws on the Segment's front panel are fastened to the Sub-Rack to secure it and provide a reliable ground connection. The key-lock switch may now be turned to the ON position to apply power to the Segment.

The interface for RF Input and Output is provided by floating OSP connectors which are mounted on the back panel of the Sub-Rack and the back side of the Power Amplifier Segment.


Mother Board to System Interface

Power, ground, and data interface between the Mother Board(s) and the system are as follows. A DC to DC converter supplies the mother board(s) with one 10 V_{DC} connection (6). A separate 48 V_{DC} and ground connection (4) for each Power Amplifier Segment is supplied to the mother board(s) from the main system power supply. A ten position single-row header (3) affords data input from the driver and a six position RJ-11 connector (2) provides communication of control and diagnostics data to the Mother Board(s). A two position DIP switch (1) located on the Mother Board(s) can be set to OPEN for communication, or CLOSED for termination.

Module to Mother Board Interface

Power, ground, and data interface between the Segment and the Mother Board(s) is provided through a float-mounted, blind-mating, receptacle on the Segment and a blind-mating header (5) on the Mother Board(s).

SUB RACK Rear Panel Overview

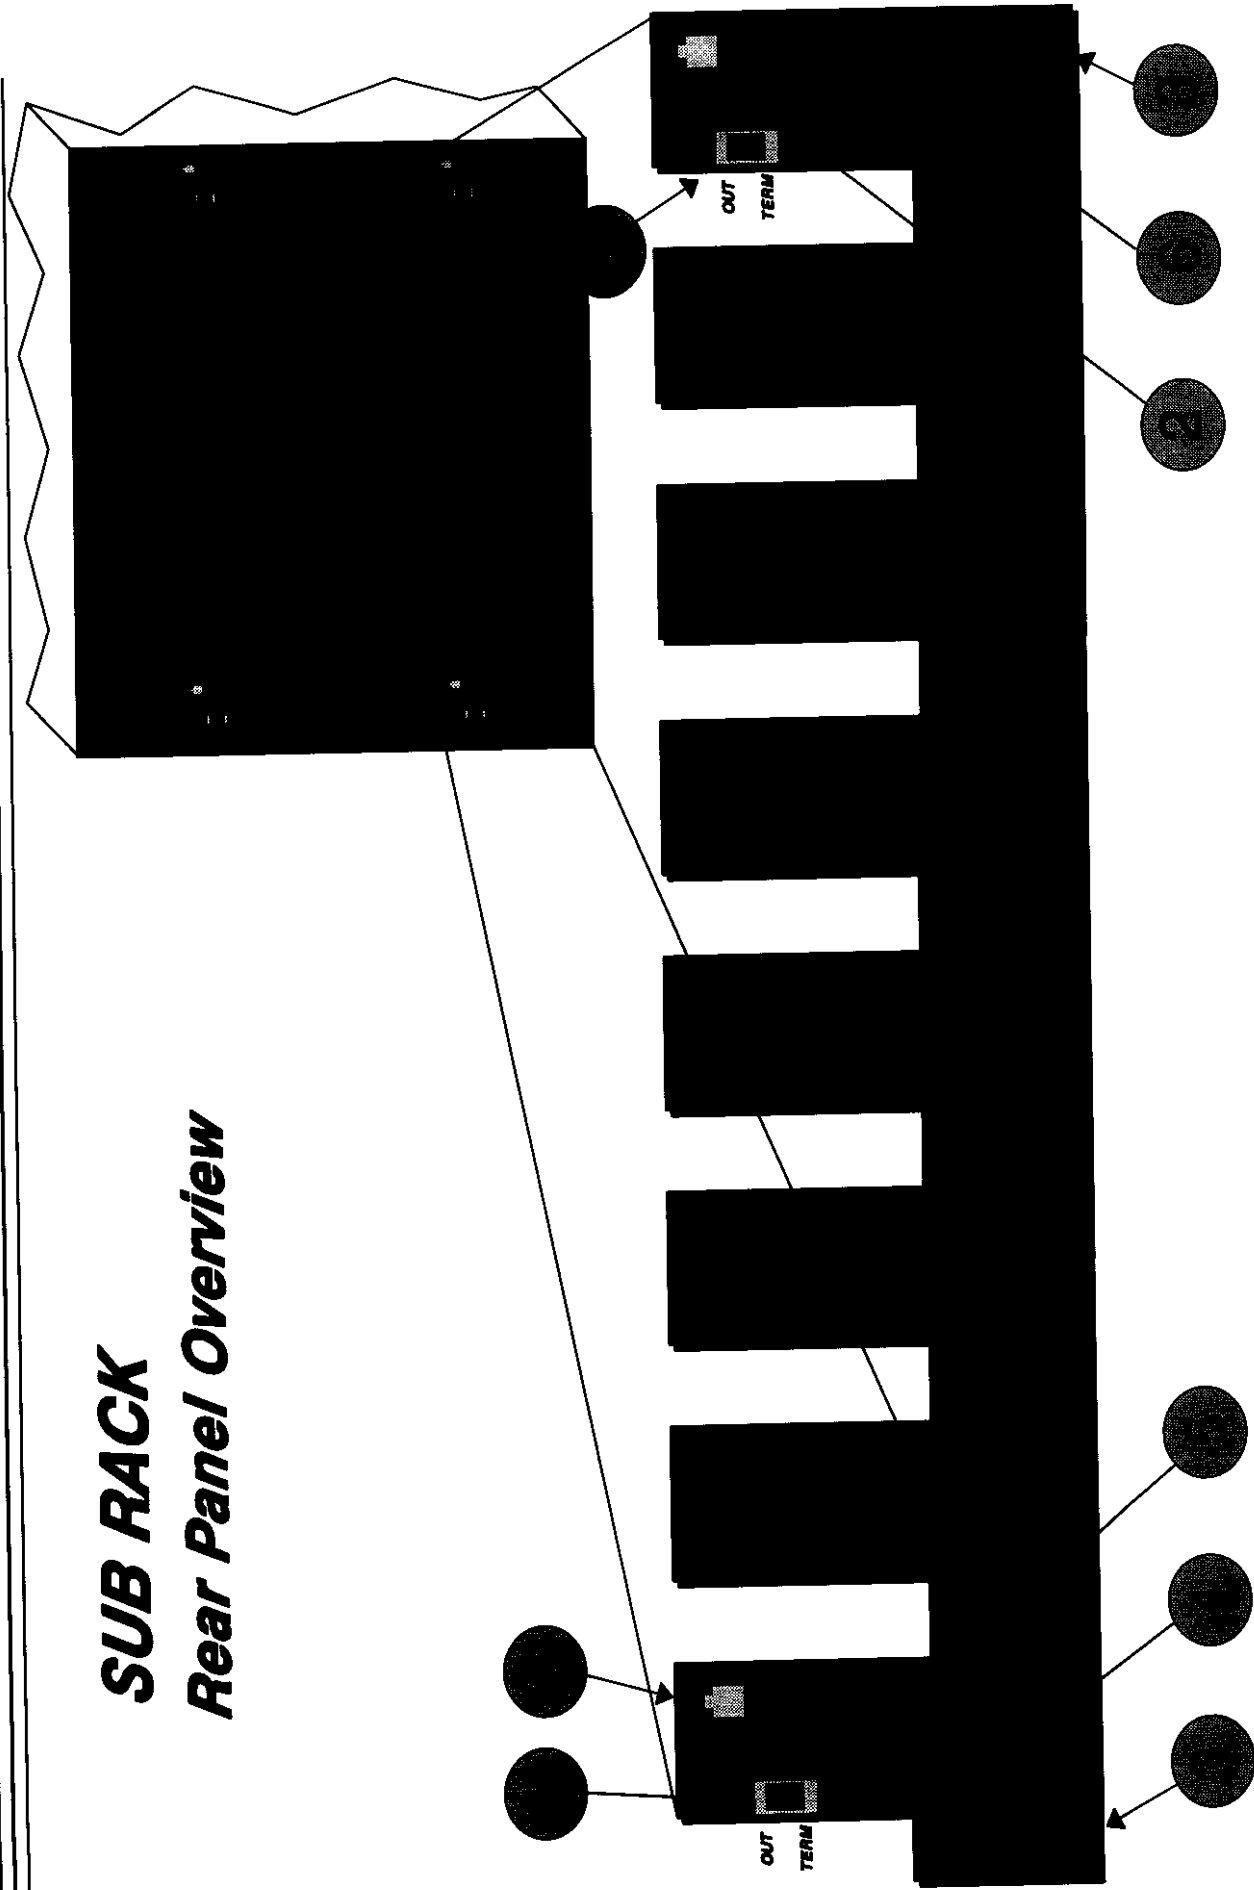

Driver Theory of Operation

The driver receives a microwave multi-carrier signal typically from -55 dBm to -25 dBm/carrier. A stagger AGC keeps the total level of the output signal at 0 dBm ± 1 dB, as well as improving the C/N for a high level input signal.

The AGC chain provides the filtering necessary to reduce the noise out of the band. The constant output signal is now pre-distorted and amplified by two amplifiers. The microwave pre-corrector also performs the ALC to keep the output power of the booster constant.

The diagram illustrates the architecture of the COMVIEW PC & NETWORK system. At the top, a box labeled "COMVIEW PC & NETWORK" is connected via a horizontal line to a series of components. The components are arranged in a row, connected by a central line. From left to right, the components are:

- 13-102-02**: A block with a resistor symbol.
- 04-306-02**: A block with a resistor symbol.
- 13-102-02**: A block with a resistor symbol.
- 6913-2500/Z700**: A block with a square wave symbol.
- 04-306-02**: A block with a resistor symbol.
- 13-103-02**: A block with a resistor symbol and a "UV SENSING" label.
- 04-329-02**: A block labeled "RF PRECORRECTOR".
- 04-307-02**: A block with a resistor symbol.
- 04-308-02**: A block with two triangle symbols.

Below this row, a **MOTHER BOARD 35-074-02** is connected to the central line. To the left of the mother board is a **POWER SUPPLY 1134XA**, connected to it by a double-headed arrow. To the right of the mother board is a **DIAGNOSTICS BOARD 34-006-02**, also connected by a double-headed arrow. Further right is a **uP 111-001-08**, connected to the diagnostics board by a double-headed arrow. At the bottom right is an **RS485 INTERFACE 33-304-02**, connected to the mother board and the diagnostics board by double-headed arrows. A **COMBINER** block is located at the bottom right, connected to the RS485 interface and the main horizontal line. The main horizontal line at the top is connected to the "COMVIEW PC & NETWORK" box.

Bandpass Filter

This filter consists of a four section bandpass filter with variable input and output loading probes. It is used to remove out-of-band mixing products following the mixer. Tuning elements are variable length lines inside each cavity. Coupling between each section consists of fixed apertures which set the bandwidth. A fifth section is coupled into the last section of the filter. This section forms a notch filter which is tuned to the L.O. frequency.

Specifications	
Bandwidth (1 dB)	200 Mhz $\pm$ 10%
Insertion Loss	2.5 dB $\pm$ 0.5 dB
Tuning Range:	
MDS	2.10-2.20 GHz minimum
MMDS/ITFS	2.45-2.75 GHz minimum

Intermediate Power Amplifier


The Intermediate Power Amplifier module receives an input signal at J1 from the Mixer/Driver Amplifier module and provides an amplified output to J2. The amplifier module consists of two FET device.

An EMI feedthru filter supplies $+10\text{ V}_{\text{DC}}$ to the drain of the FET via a printed microstrip decoupling line. Negative 12 V_{DC} gate bias enters the module using an EMI feedthru filter. This voltage is divided and calibrated by two resistors and a potentiometer. The potentiometer sets the operating drain current of the transistor. A printed decoupling line decouples the gate bias circuit. No user adjustments are needed or provided.

Specifications	
Power Supply Requirements	$+10\text{ V}_{\text{DC}}$ @ 1.6 Amps -12 V_{DC} @ 7.5 mA
Drain Current	2.2 Amperes
Module Gain	$10\text{ dB} \pm 1\text{ dB}$
Center Frequency	ITFS/MMDS -2.6 GHz
1 dB Bandwidth	200 MHz
Minimum Output Power	+ 22 dBm
Input/Output Impedance	$50\ \Omega$

Envelope Detector

The envelope detector is a two input module that receives forward and reflected power samples. The forward sample is applied to J1 and the reflected sample is applied to J2. Diodes convert the RF sample into a representative DC voltage, and capacitors filter the RF sample. These voltages are sent to the mother board for processing and feedback control.

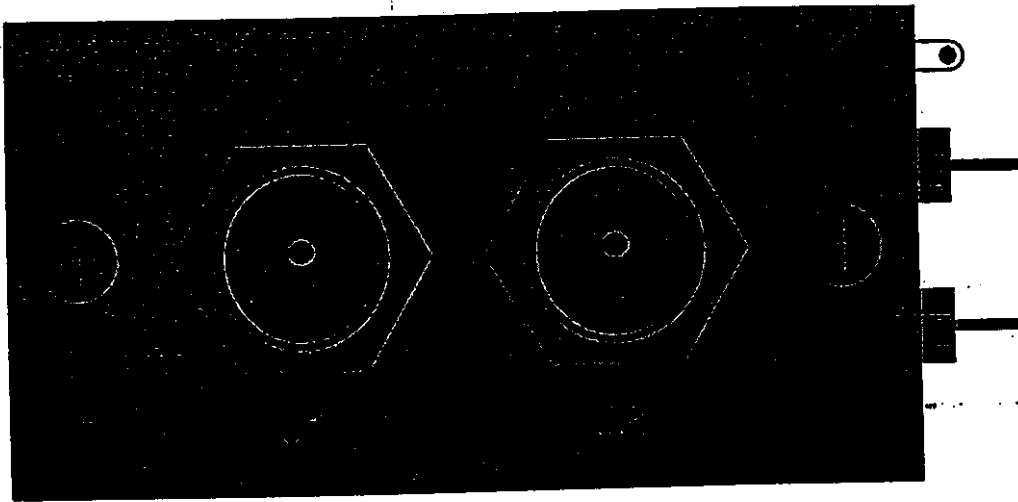

Control Board

Monitoring and control of the Driver is accomplished through a Control Board located over the power supply. The Control Board utilizes an 8-bit Microcontroller (MCU) with on-board memory to perform the monitoring and control functions. The Control Board circuitry includes analog signal conditioning, A/D converters, supply voltage regulation, and two serial data interfaces.

Monitoring operations involve collecting analog signals and logic data from the Driver and the system interconnect cable. All of the inputs are routed to the Microcontroller from the Transition Board. The Transition Board routes the monitored signals from the system interconnect cable. The analog signals; temperature, forward power, reflected power, and -12volt supply are received from the Transition Board on J-1. The analog signals +11 volt sample, Mixer, Intermediate Power Amplifier #1, Drive Amplifier #2, Intermediate Power Amplifier #2, ALC return and LO as well as the control signals reset 1 and MCU standby are routed to J2 if the MCU. J3 provides RS-485 communications access to the MCU, and the control signals; Power Amplifier fault, Reset 2 and System reset.

The analog inputs; 11 volt sample, Mixer, Intermediate Power Amplifier #1, Drive Amplifier #2, Intermediate Power Amplifier, and ALC are received, selected by the MCU and related to the CPLD through an eight channel multiplexer IC. The selected signal is buffered in an operational amplifier. The -12 volt signal follows similar signal selection, however the operational amplifier inverts and scales down the voltage to $\frac{1}{4}$ of its original value. The LO, Temperature, forward and reflected signals are applied directly to operational amplifiers without multiplexed selection. These samples are over voltage limited by 5.1V zener diodes. Negative voltage protection is accomplished by Schottky diodes. The samples are routed to the MCU for A/D conversion.

The MCU also monitors the Driver control signals; Reset 1 and Reset 2. Reset1 becomes low (true) when the rear cabinet access door is opened, or when the Driver is commanded into standby by the agile controller. Reset 2 becomes true when the Driver's front panel switch is placed into standby, or when the MCU commands the Driver into standby. The MCU commands the Driver into standby by bringing the MCU standby signal low, this signal is wire OR'd to Reset 2 on the Transition Board. Power Amplifier fault monitoring is accomplished by means of monitoring the system interconnects. When an amplifier in the Sub-rack fails, a low signal is introduced onto the Power Amplifier fault line. This low signal is monitored and processed by an input port on the MCU.

The serial Input / Output (I/O) capabilities of the Driver originate on the Control Board and the MCU's SCI port. In general, the Driver may be connected on an RS-485 multidrop. Node address switch, SW1 on the Control Board, is a DIP multi-pole switch, which is programmed with a Driver's unique node address in binary form. While present on the network, a Driver may be issued specific commands from and return formatted responses to a master communications device. By default, the RS-485 driver IC is enabled and RS-485 serial I/O is available at the rear of the driver.

A computer operating properly 'watchdog' function is provided on the Control Board to safeguard against loss of MCU program control. Under normal circumstances, MCU IC input lines RESET and XIRQ will be provided with a logic-HIGH by an on-board watchdog IC. If Jumper JK3 is in place, the CPLD device must provide a toggle in the CPLD WDI Output line every 1.6 seconds to indicate to the watchdog IC that the MCU is operating properly. The CPLD will interpret a PG3/WDI input from the MCU, or activity on the UC_RS485_ENA control line, or activity on the RS-485 communications lines, as indications that the MCU is operating properly, and will toggle the CPLD WDI output line. If a toggle in the WDI line does not occur within 1.6 seconds, it is assumed the MCU is no longer executing the desired program properly. The watchdog IC will drive low the XIRQ signal, which will ultimately result in a reset of the MCU and restart of the MCU program.

Two power supply voltage inputs of approximately +9 V_{DC} are provided to the Control Board to supply the digital regulator and analog regulator circuits. The digital regulator circuits are fused by F1 at their +9 V_{DC} input. +5 V_{DC} for the digital circuitry is developed with a linear voltage regulator. The +5 V_{DC} digital circuit has a separate ground plane for the digital devices. A switching regulator IC and associated components develop DC output voltages of approximately ± 14.5 V_{DC} which are then regulated by linear regulators to +12 V_{DC} and -12 V_{DC} for various digital and analog circuitry. The +5 V_{DC} analog regulator is supplied from a +9 V_{DC} input separate from the digital +9 V_{DC} input, and is fused by F2. +5 V_{DC} for the analog circuitry is developed with a linear voltage regulator. The +5V_{DC} analog circuit has a separate ground plane for the analog devices.


Transition Board

The Transition Board provides interfacing between the Microprocessor Control Unit (MCU), the RS 485 board, and the Diagnostics Board. The Transition Board also provides regulated power to the MCU. A PAL (Programmable Array Logic) IC provides the necessary logic for several different system shutdowns. Signals are routed on the Transition Board to the MCU for monitoring.

The MCU monitors transmitter performance by signals routed through the Transition Board. Amplifier currents, LO lock, ALC level, output power levels and temperature monitoring are read through signals routed on this board. The Transition Board allows the MCU to shutdown the Driver remotely. Also, the MCU can determine if the Driver is in standby state, and the Transition Board allows the MCU to read a fault occurring in the Power Amplifier Sub-Rack.

The Transition Board also provides an interface between the Driver and the Comview Status Monitoring System. Amplifier currents, LO lock, ALC level, output power levels and temperature data are routed to the RS-485 Board through the Transition Board.

The Transition Board also provides regulated 9 V_{DC} from the regulated 12 V_{DC} supply to the MCU by means of the Mother Board.

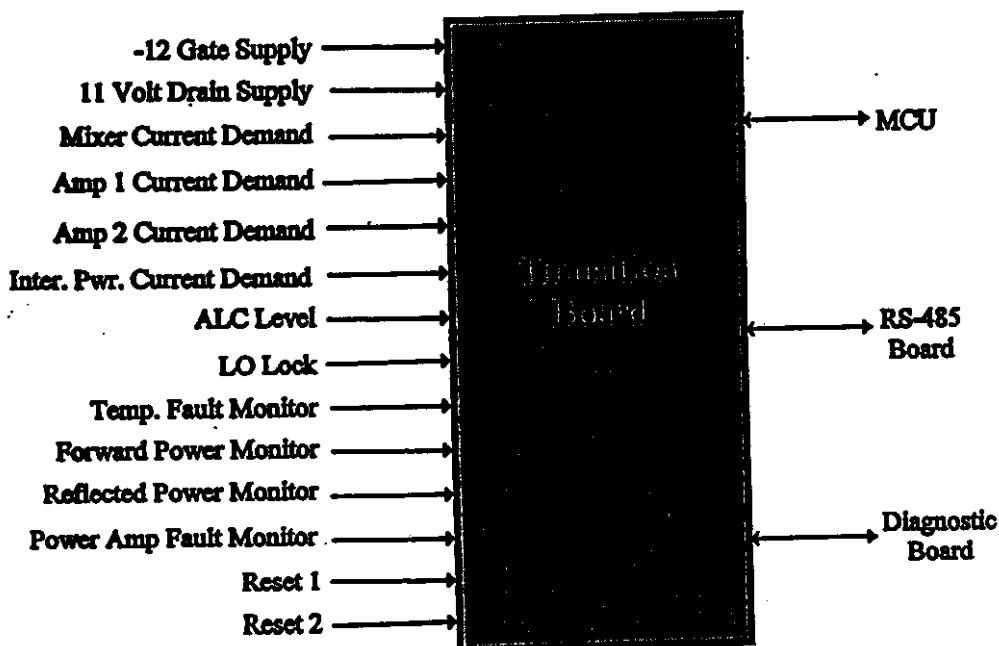


RS-485 Communications Board

An RS-485 communications board is mounted to the inside rear of the chassis. It interfaces each transmitter's Microcontroller Unit (MCU) to a communication buss for status monitoring to a common computer/Master Control Station. The system is capable of monitoring up to 32 individual transmitters.

The board has a 5 pin input connector with connections to two rear panel mounted 6 pin telephone type receptacles (RJ11). It functions as the interface between the transmitter's MCU, the communication buss, and a computer monitoring system. The buss consists of a double twisted shielded pair cable which daisy-chain links (parallels) transmitters to a common computer for complete system status monitoring.

A board mounted mini DPDT DIP switch labeled as NETWORK END TERMINATION is accessible on the Mother Board located on the rear of the Sub-Rack. When a status monitoring computer system is used, all Mother Boards ordinarily have this switch set to the "OUT" position with the exception of the last Mother Board in the daisy chain series. The last Mother Board normally has the switch set to "TERM". This action terminates the communication buss at the last Mother Board of the daisy link chain establishing proper buss impedance. The Driver also has a set of RJ11 receptacles which is used to interface with the daisy chain communication buss in the same manner as the Mother Board.

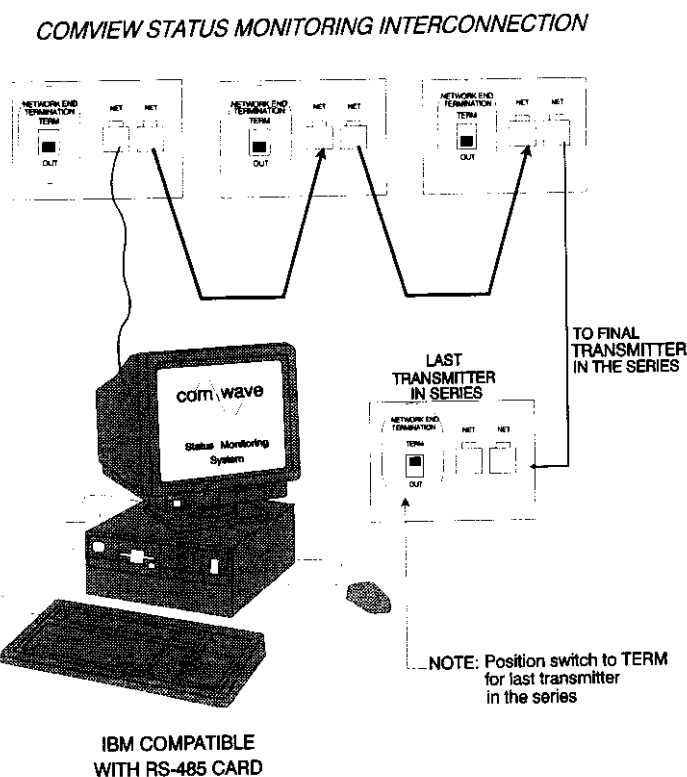

Mother Board

The Mother Board performs a variety of functions. It provides the majority of interconnections between other circuit boards and modules. The Mother Board contains linear power supplies, comparators, current sampling resistors, metering adjustments, board mounted switches, power supply enable circuitry, +11 V_{DC} switching power supply fuse, and two board-mounted status LEDs.

Linear Power Supplies: The -12, +12, and +5 V_{DC} linear power supplies which are located on this board, route power to appropriate connectors. They provide power to operational amplifiers, comparators, gating circuits, and other modules.

Comparators: Comparators set up operating windows with respect to an input signal. Depending upon the reference biasing, the input signal can cause a logic high or low. An input signal within the upper and lower trip points cause the comparator to output the desired logic level. A signal beyond the operating window causes a toggle of the logic state setting associated gating.

The +11 V_{DC} switching power supply voltage is compared to a 12 V_{DC} reference. A deviation of the switching power supply voltage beyond set limits causes a logic low output and sinks the bias current from a transistor. With the transistor in cutoff, collector voltage is available to illuminate the front panel diagnostic display +11 V_{DC} LED.

The local oscillator feedback signal is applied to a comparator. When the signal is present, the comparator outputs a logic low, sinking the +12 V_{DC} pull up voltage. Absence of the LO signal causes a logic high which biases a transistor into conduction. The collector is pulled low reflecting back to AND gates, disabling the transmitter and illuminating the front panel LO diagnostic LED.

OPTIONAL:

An IF detected signal toggles a comparator to a TTL high supplying transmitter and power supply turn-on logic to AND gates. A board-mounted switch (SW1) by-passes the IF detected signal by sourcing +5 V_{DC}.

Current Sampling Resistors: Amplifier module power is distributed through low valued series current sampling resistors. These resistors develop voltage drops proportional to the supplied drain current. Voltage drop samples are routed to the diagnostics board for processing.

Metering Adjustments: Metering adjustments are provided to calibrate the front panel analog meter to 100%.

VR1: Reflected power adjustment.

VR3: +11 V_{DC} switching power supply adjustment.

VR4: Forward power adjustment.

Board Mounted Switches:

SW1: IF detect by-pass. Provides +5 V_{DC} to bias ON the front panel diagnostic IN SIGNAL LED and send a logic high to AND gates. Bypass enables transmitter to continue transmitting although there is no IF detected signal.

SW2: This switch is only used when the unit is configured as a driver. For the Digital Driver, this switch will always be in the ON position.

Power Supply Enable: The +11 V_{DC} switching power supply connects to the Mother Board. Power is routed through a relay to all amplifier modules upon satisfaction of logic to AND gates. The following parameters must be met in order to enable the Switching Power Supply: IF detected signal (or by-pass switch ON), transmitter not in standby, -12 V_{DC} bias interlock available, the LO must be phase locked, and thermostat open. Also in an Agile Transmitter application, a valid channel must be selected for Power Supply Enable.

Fuse: The +11 V_{DC} power supply is protected with a 10 Ampere fuse located on the Mother Board.

Status LEDs: The Mother Board contains two status LEDs, DS1 (Red) and DS2 (Yellow). Illumination of DS1 indicates the presence of -12 V_{DC} interlock bias and DS2 the presence of +12 V_{DC}.

Diagnostic Interface Board

The Diagnostic Interface Board receives various input signals, performs comparisons to set reference levels, forwards compared outputs to the front panel LED display board and rear panel connectors P1 and P2. The interface board determines module status by monitoring the drain current drawn through low valued series sampling resistors from the +11 V_{DC} switching power supply.

Diagnostic monitoring of each module is identical, therefore, the Intermediate Power Amplifier will be used as an example. The Intermediate Power Amplifier FET device receives +10 V_{DC} drain voltage through .1 ohm series sampling resistor. The FET draws 2.2 amperes which develops .220 volts across a sampling resistor. This voltage drop is sent to an operational amplifier having a gain of 10. A 2.20 V_{DC} op amp output voltage is applied to comparators. Comparators reference voltages define an operating window.

A sample voltage within the window causes both comparators to output a logic-high to a transistor. The transistor is biased ON sinking the pull up voltage from the input of an AND gate. The front panel FINAL LED is illuminated if a logic-low is not present at the input of the AND gate. A sample voltage outside the defined window causes the applicable comparator to output a logic-low to a transistor. This action sinks available base current biasing the transistor into cutoff. An AND gate receives a logic-high, and the AND gate is enabled, sending a logic high illuminating the front panel FINAL LED.

Each module has diagnostic circuitry for monitoring the current of each module. Excessive or insufficient current draw causes the respective comparator to output a logic-low and illuminate the applicable front panel diagnostic LED. Samples of the current drawn by each module are received from the Mother Board, processed by the Diagnostic Interface Board and sent to J2, a rear panel connector, for monitoring purposes.


Board-mounted potentiometers adjust the op amps gains to a multiple of approximately ten for each diagnostic input. Test points for each op amp output are provided.

Power Amplifier Segment Theory of Operation

Power Amplifier Segment General Description

The Power Amplifier Segments of the high power single channel transmitter series use the latest technology in power FET's. The transistors provide high output power, as well as, more linearity and higher efficiency. Mechanically, the Power Amplifier Segments have a plug-in architecture which allows hot replacement. In addition to hot replacement, the architecture of the Amplifier enables flexibility to tailor the system to higher output power levels and can be easily upgraded.

The Power Amplifier Segment consists of a Microwave Amplifier, Control Board, DC to DC converter, and a Front Panel. A Microcontroller System, located on the Control Board, supervises and controls the Power Amplifier Segment in each of its functions. The DC to DC converter reduces 48 V_{DC} front-end power supply input to the nominal amplifier voltage of 10.5 V. The front panel displays the status of the Amplifier Segment and interfaces the Control Board to a computer by means of a serial RS-232 port.

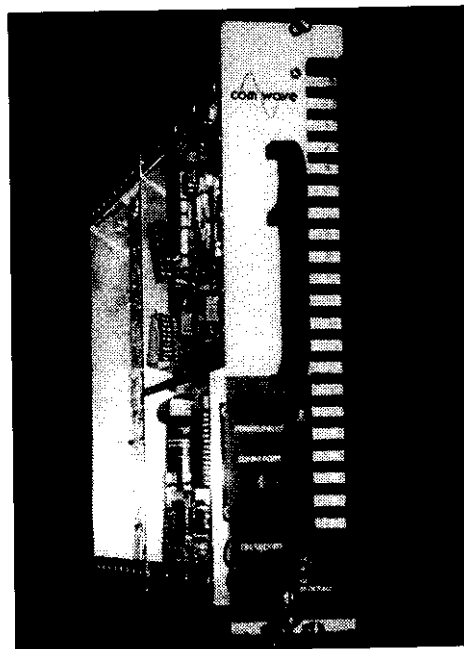


*Power Amplifier Segment
Front View*

Power Amplifier Segment Operation

The Amplifier Segment is equipped with a key lock switch on the front panel to retain it in place. When pushing-in or pulling-out the Segment, turn the key lock switch to the OFF position. After plugging the Amplifier Segment into the sub-rack and tightening the front panel thumb screws, turn the key-lock switch to the ON position. The 10 V_{DC} secondary power supply will start-up the Control Board which applies a negative voltage to the gates of the FETs and turns the DC to DC converter on. It also adjusts the transistor's current and releases the input signal to the Microwave Amplifier. The air flow passes through the heatsink from the front to the rear of the sub-rack. The air flow loss to the other Power Amplifier Segments during hot replacement is negligible.

POWER AMPLIFIER SEGMENT BLOCK DIAGRAM

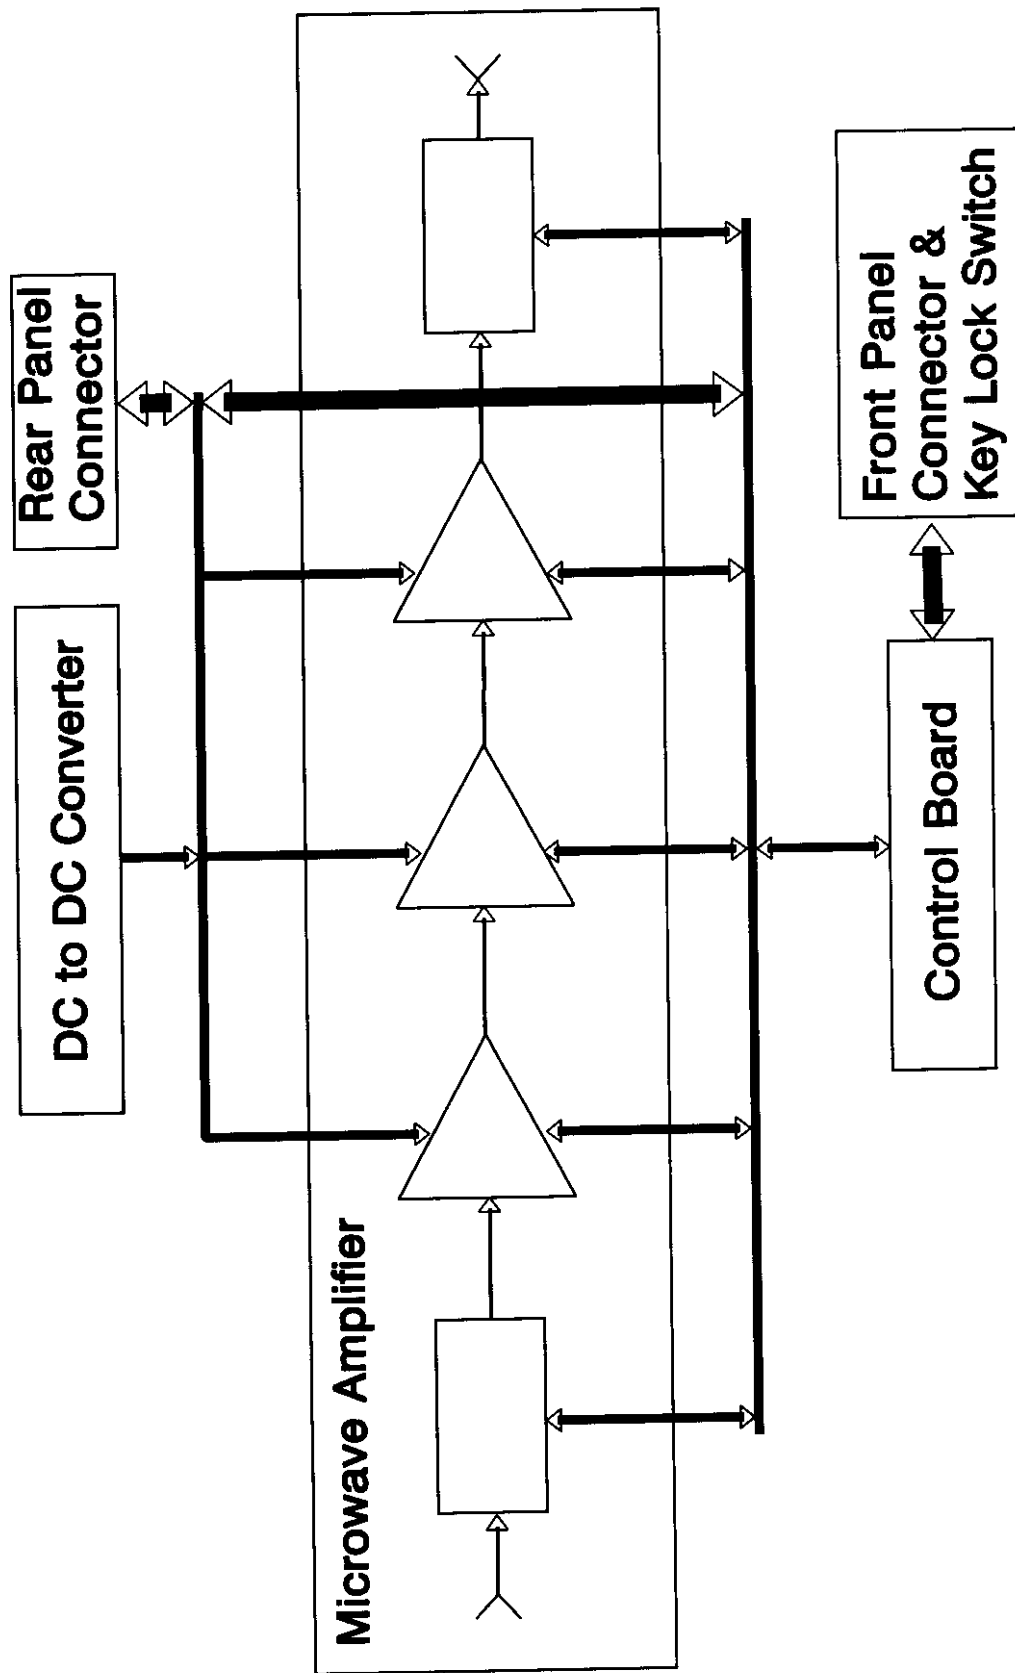

Power Amplifier Segment Specifications

Parameter	Specification
Primary DC Voltage	48 V
Primary DC Current	4.9 A
Secondary DC Voltage	10 $\pm$ 0.5 V
Secondary DC Current	0.4 A
Communication Port	RS-232 and RS-485
Input Power	Digital 12.0 dBm
	Analog 17.5 dBm (@ P1 dB)
Output Power	Digital 41.5 dBm
	Analog 47.0 dBm (P1 dB)
Dimensions	2.1"H x 10.3"W x 17.1"D
	5.3 cm H x 26.1 cm W x 43.4 cm D
Weight	9 lbs (4 Kg)

Power Amplifier Board

Power Amplifier Board General Description

The Power Amplifier Board has a high gain architecture with 47 dBm output power at 1 dB compression point and 29.5 dB gain. The input signal passes through a microwave switch for hot stand-by operation. This feature allows the control board to set up all DC parameters and check for proper amplifier operation without the influence of an RF signal. The signal then passes through a pin diode attenuator which sets the overall gain of the amplifier.


In the first stage, a 3 dB hybrid provides a reliable load to the driver and a flat broadband frequency response to the amplifier. The second and third stages of amplification give the proper output power with minimum distortion and high efficiency. A low output VSWR (Voltage Standing Wave Ratio) is provided by the 3 dB combining system. The directional coupler provides a sample signal proportional to the forward and reflected power. This measurement ensures that the amplifier delivers the correct power. An IC measures the operating temperature of the amplifier which is monitored by the MCU. The Amplifier is placed in a faulted state if the temperature exceeds a limit set by the MCU.

Power Amplifier Board Operation

The Control Board acknowledges the input signal presence from the Driver. It places the microwave switch in the hot stand-by mode and adjusts the current of each FET. The current sensor, located on the power supply, provides the current samples to the Control Board to check for proper operation of the transistors. The Control Board sets the variable Attenuator to the correct amplifier gain, and removes the microwave switch out of "STANDBY" and into the through path.

The microwave circuit amplifies the input signal with high linearity performance and broadband frequency response. This feature allows the amplifier to be used for any channel without retuning. The FET's are protected from catastrophic failure by an IC on the Amplifier Board. The temperature sensor supplies the control board with a voltage proportional to the heatsink temperature. The Microcontroller will sense this voltage and protect the amplifier against high temperature or from failure of the cooling system. The output directional coupler measures the forward and reflected power. These measurements provide the Microcontroller with the information needed to verify the status of the amplifier.

Power Amplifier Segment Block Diagram

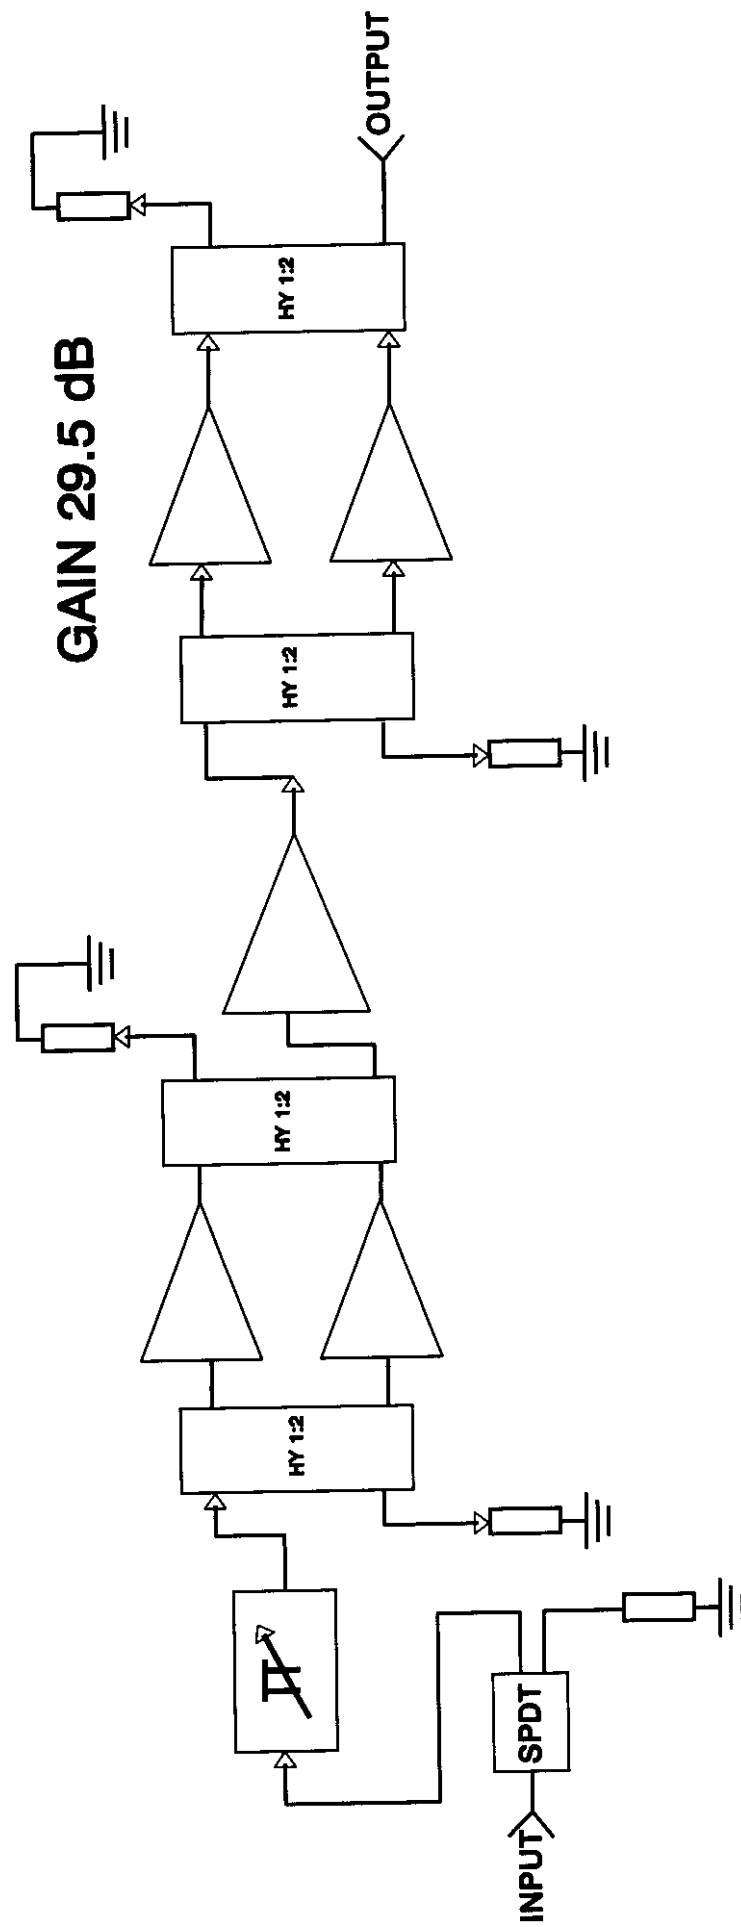

Power Amplifier Board Specifications

Parameter	Specification
Input DC Voltage	10.5 V
Input DC Current	19.8 A
RF Gain	29.5 dB
Output Power	47 dBm
Flatness (BW 200 MHz)	± 5 dB
Input VSWR	1: 1.6
Output VSWR	1: 1.5

Control Board

Monitoring and control of the Power Amplifier Segment is accomplished through a Control Board located within a section of the Segment housing. The Control Board utilizes an 8-bit microcontroller (MCU) with on-board memory to perform the monitoring and control functions. The Control Board circuitry includes analog signal conditioning, A/D and D/A converters, supply voltage regulation, and two serial data interfaces.

Monitoring operations involve collecting analog signals and logic data from the Power Amplifier Segment. Analog inputs Forward Power, Reflected Power, and Temperature are received from the RF Power Amp connector J1. Analog inputs Drain Supply Voltage (V_{DD}) and High Voltage DC are received from the Power Supply connector J2. Forward Power and Reflected Power inputs are amplified by op-amps with a gain of approximately 3; while, Temperature, Drain Supply Voltage (V_{DD}) and High Voltage DC are buffered by unity gain stages. Following the V_{DD} buffer stage, a resistor divider network scales V_{DD} to 1/4 its input voltage, followed by a second unity gain buffering stage. Each of these inputs are voltage-limited to $5.1 V_{DC}$ by means of Zener diodes at the input to the Control Board. They are protected from voltages more negative than $-0.4 V_{DC}$ by Schottky diodes at the output of the Op-Amp gain stages to protect the MCU A/D converter inputs.

Drain currents drawn by FETs in the RF Power Amplifier section of the Power Amplifier Segment are monitored by the Control Board, which is performed by monitoring the voltages dropped across series resistors in the drain supply circuits on the Power Supply Board. These eight voltages are received by the Control Board from the Power Supply connector J2. Each signal is selected by the MCU and related CPLD logic through an 8-channel analog multiplexer (MUX) IC, and in turn compared to V_{DD} by a differential amp/gain op-amp stage. The resulting outputs are 10 times greater than the voltages dropped across the series monitoring resistors. These outputs are protected from voltage excursion greater than $5.1 V_{DC}$ by Zener diodes, and from excursion more negative than $-0.4 V_{DC}$ by Schottky diodes. The resulting signal is connected to input AN0/IDSMON on the MCU A/D converter. This signal varies through time with each of the eight monitored signals as selected by the MCU.

The Control Board generates negative FET gate supply voltages with a Digital to Analog (D/A) converter and analog voltage inverter circuits. The 8-bit D/A IC is provided with a $2.5 V_{DC}$ reference and with data from the MCU to set the output voltage on each of 8 channels to a positive voltage of the same value as the absolute value of the desired gate voltage. These positive voltages (e.g. +Vgs) are then inverted by unity gain inverter op-amp circuits to negative voltages (e.g. -Vgs). The negative gate voltages are output to the RF Amplifier section on RF Power Amplifier connector J1.

The negative FET gate supply voltages supplied to the RF Power Amplifier section are returned to the Control Board through internal segment harnessing. These returned gate voltages provide the Control Board with monitoring of the gate voltages arriving at the RF Amplifier section, allowing incorrect gate voltage or gate interlock break to be detected. The monitored gate

signals, input on RF Power Amplifier connector J1, are multiplexed by a MUX IC in a manner similar to that for the drain MUX described above. The time-varying MUX output, which generally carries negative voltages, is inverted by a unity gain inverter op-amp circuit to provide a positive voltage to the AN1/VGSMON input on the MCU A/D converter.

Various logic inputs and outputs are provided by the Control Board. A drain supply enable logic signal, PS_ENABLE, is output from the Control Board on J2. The state of PS_ENABLE is controlled by the MCU, which tests other signals such as Standby and Gate Voltage Interlocks, to determine if it is safe to enable the power supply. The MCU outputs the Enable Signal to the CPLD, which in turn outputs the PS_ENABLE on J2. If the MCU detects a condition in which it would be improper or unsafe to allow the drain supply to operate, the CPLD will be made to output a logic-LOW on the PS_ENABLE control output.

Output signals which control the RF Power Amplifier section RF switch and attenuator are generated on the Control Board. Signal RF_SWT, output on connector J1, controls the terminated or unterminated state of the RF Power Amplifier section RF switch. RF_SWT is driven to a logic-HIGH when the Power Amplifier Segment is set to the TRANSMIT state. This logic-HIGH will cause the RF switch to route the RF Amp microwave input signal into the Amplifier circuitry. Signals RF_ATTEN_CTRL1 and -2 are analog outputs which reciprocate to control the branches of the RF attenuator network located in the RF Amplifier section. These analog voltages are developed in a D/A converter IC and NPN and PNP transistors.


The Serial Input/Output (I/O) capabilities of the Power Amplifier Segment originate on the Control Board and the MCU's SCI port. In general, the Power Amplifier Segment may be connected on an RS-485 multidrop network as an individually addressed node with other Power Amplifier Segment nodes. Node address switch, SW1, is a DIP multi-pole switch which is programmed with a Power Amplifier Segments unique node address in binary form. While present on the network, a Power Amplifier Segment may be issued specific commands from and return formatted responses to a master communications device. By default, the RS-485 driver IC is enabled and RS-485 serial I/O is available at the Board's J3 backplane connector. An RS-232 serial I/O port is also available but the RS-232 driver IC is disabled by default. This port is interfaced through an RJ-11 connector on the Power Amplifier Segment front panel. When the ENA_RS232 control input line is given a logic-LOW (as when the proper interface cable is plugged into the Power Amplifier Segment RJ-11 connector), the RS-232 port is enabled. At this time, the RS-485 port is disabled, causing a loss of communications with the RS-485 network. The same Power Amplifier Segment command and response capabilities available on the RS-485 port are provided on the RS-232 port.

A computer operating properly 'watchdog' function is provided on the Control Board to safeguard against loss of MCU program control. Under normal circumstances, MCU IC input lines RESET and XIRQ will be provided with a logic-HIGH by an on-board watchdog IC. If Jumper JK3 is in place, the CPLD device must provide a toggle in the CPLD WDI Output line every 1.6 seconds to indicate to the watchdog IC that the MCU is operating properly. The CPLD will interpret a PG3/WDI input from the MCU, or activity on the UC_RS485_ENA control line, or activity on the RS-485 communications lines, as indications that the MCU is operating

properly, and will toggle the CPLD WDI output line. If a toggle in the WDI line does not occur within 1.6 seconds, it is assumed the MCU is no longer executing the desired program properly. The watchdog IC will drive low the XIRQ signal, which will ultimately result in a reset of the MCU and restart of the MCU program.

Two power supply voltage inputs of approximately $+10\text{ V}_{\text{DC}}$ are provided to the Control Board to supply the digital regulator and analog regulator circuits. The digital regulator circuits are fused by F1 at their $+10\text{ V}_{\text{DC}}$ input. $+5\text{ V}_{\text{DC}}$ for the digital circuitry is developed with a linear voltage regulator. The $+5\text{ V}_{\text{DC}}$ digital circuit has a separate ground plane for the digital devices. A switching regulator IC and associated components develop DC output voltages of approximately $\pm 14.5\text{ V}_{\text{DC}}$ which are then regulated by linear regulators to $+12\text{ V}_{\text{DC}}$ and -12 V_{DC} for various digital and analog circuitry. The $+5\text{ V}_{\text{DC}}$ analog regulator is supplied from a $+10\text{ V}_{\text{DC}}$ input separate from the digital $+10\text{ V}_{\text{DC}}$ input, and is fused by F2. $+5\text{ V}_{\text{DC}}$ for the analog circuitry is developed with a linear voltage regulator. The $+5\text{ V}_{\text{DC}}$ analog circuit has a separate ground plane for the analog devices.

CONTROL BOARD BLOCK DIAGRAM

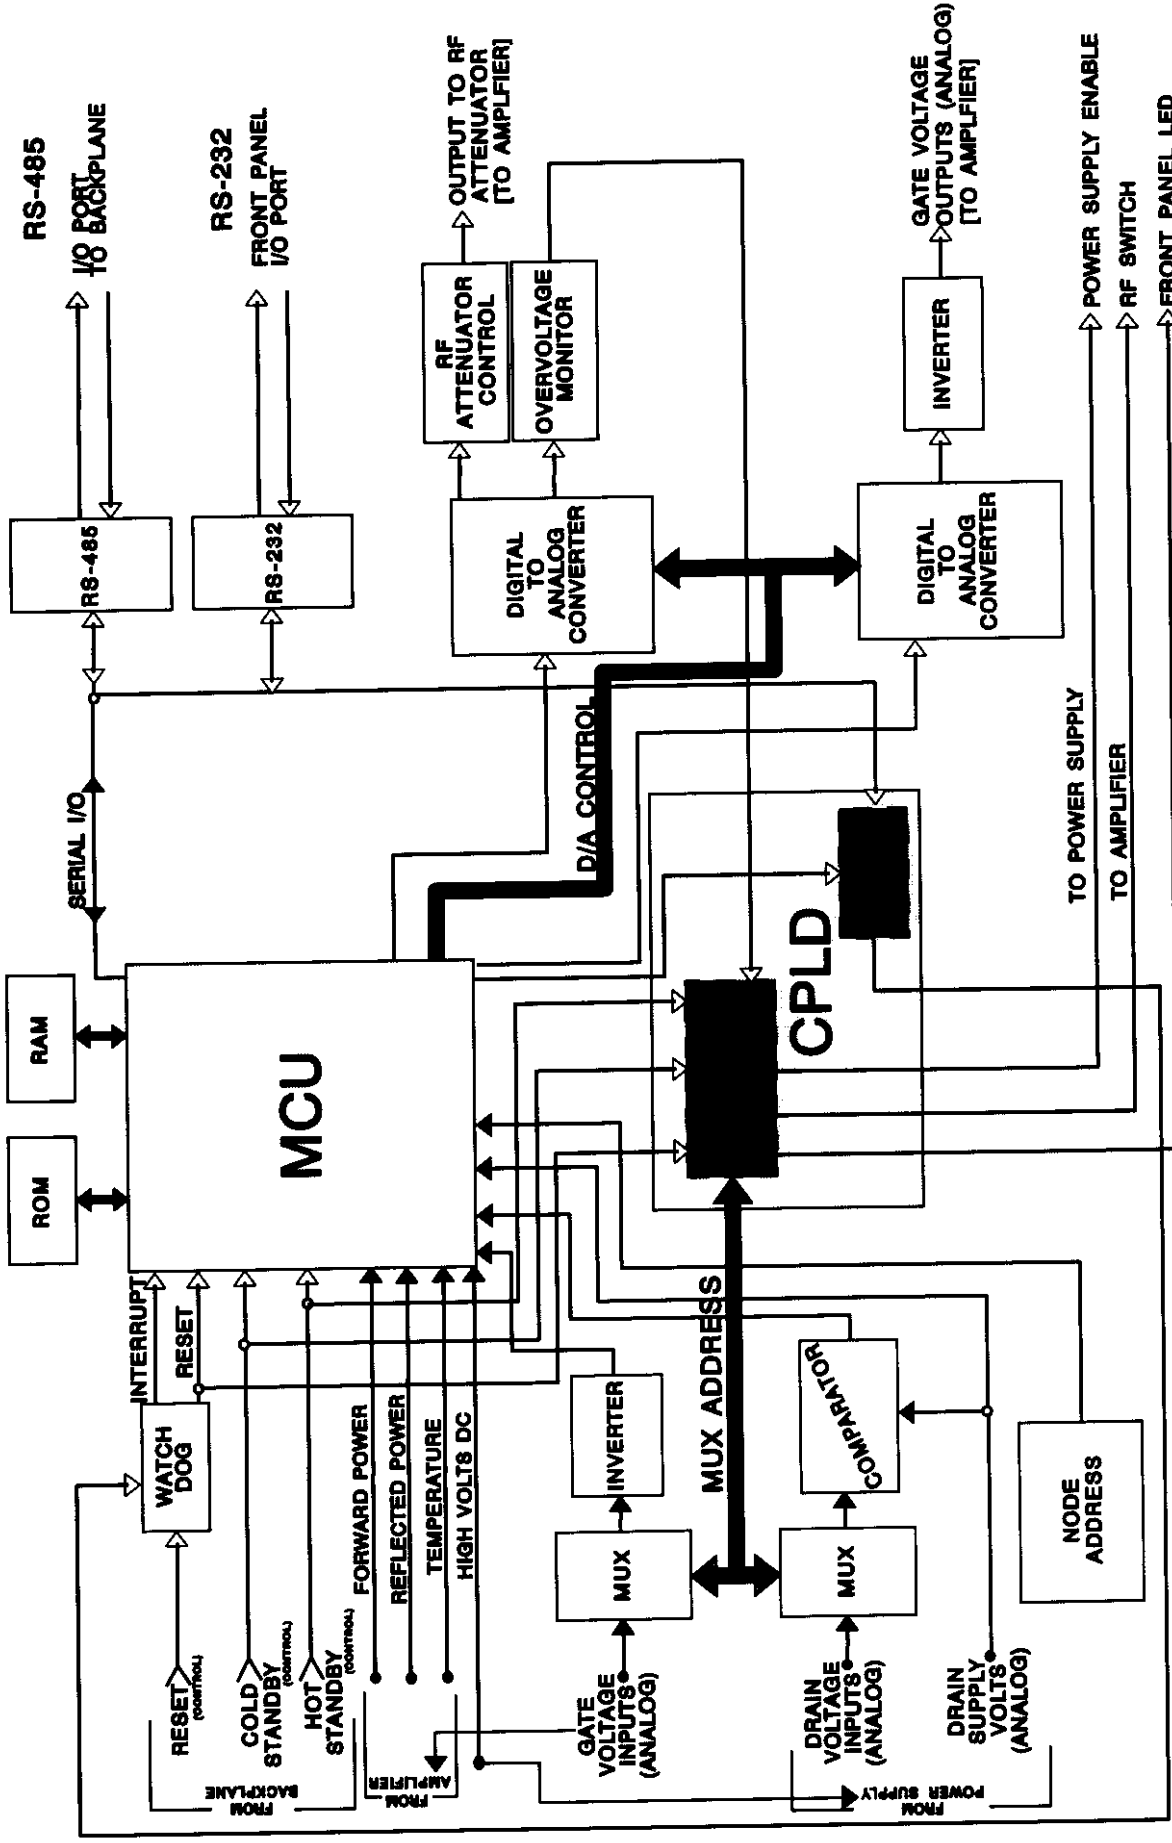

Control Board Specifications

Parameter	Specification
Microcontroller type	8-bit MCU with 64 K address space
DC Input Voltage	10.0V $\pm$ 0.5 V
DC Input Current	400 mA typical @ 10.0 V
Operating Temperature	0° C to +50 ° C
Communication Ports	1: RS-485; 1: RS-232
Program stall time before COP Watchdog Reset	1.6 seconds
Number of Analog Inputs	21
Number of Logic Inputs	7
Number of Analog Outputs	10
Number of Logic Outputs	6
Physical Dimensions	5.125" H x 3.50" W x 0.58" D typ 13.0 cm H x 8.9 cm W x 1.5 cm D typ

300 Watt Power Supply Board

300 Watt Power Supply General Description

The Power Supply Board consists of two DC/DC converters, input and output voltage monitoring, standby switching, over voltage protection, and current sensing. All functions of the Power Supply Board are interfaced with the Control Board.


The Power Supply reduces the high voltage, low current front end power supply input to the nominal output voltage of 10.5 volts. The DC/DC converters are high power density, high efficiency, switching power supplies. The over voltage protection consists of a voltage detector, a crowbar, and the fusing. The standby switching uses a high efficiency FET.

300 Watt Power Supply General Operation

After engaging the Power Amplifier Segment, the Control Board checks the input voltage and turns the FET switch on. The DC/DC converter has a master/slave configuration, which provides the total current for the RF Amplifier. This configuration allows for accurate current sharing between the master and the slave.

The Control Board will then detect the output voltage. If the output voltage rises above the nominal value to a preset value, the crowbar will be activated and cause the fuse to open. When this occurs the Control Board will disable the standby switch and the DC/DC converters. The Power Supply distributes eight lines of power with current sensing. These lines are monitored by the Control Board and used for the current control loop.

POWER SUPPLY BLOCK DIAGRAM

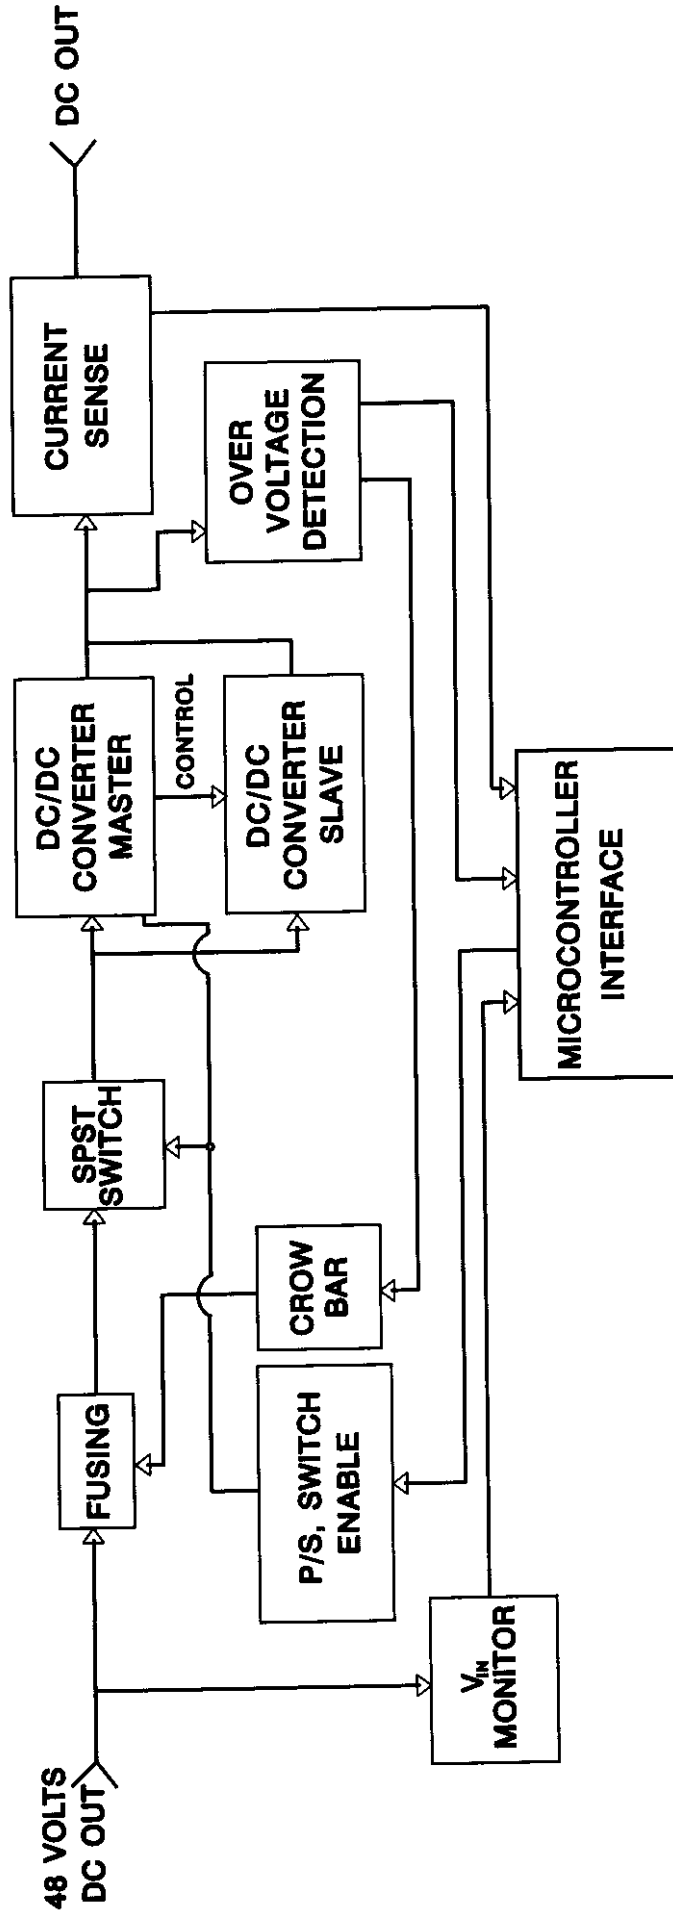

300 Watt Power Supply Board Specifications


Parameter	Specification
Primary Input Voltage	48 Volts DC Nominal
Primary Input Voltage Range	36 to 76 Volts DC
Primary Input Current	7.5 Amps DC @ 48 Volts DC
Primary Input Current Range	10.0 to 4.7 Amps DC
Secondary Input Voltage	9 Volts DC
Secondary Input Current	10 Milliamps DC
Output Power	300 Watts maximum
Output Current Limit	105 to 135% of Max. rated power
Efficiency	83 to 88%

Installation

Unpacking

The Racks should remain in their original packing containers until they are placed in the equipment shelter. Place all Racks outside of the shelter sequentially so they can be installed in their proper position. Packing materials should be removed from the Racks inside the equipment shelter as they are being installed.

The Drivers and Power Amplifier Segments should be removed from their boxes as they are ready to be installed. Any unused equipment should remain in the original packing box until needed. As each piece of equipment is being unpacked, compare the packing list with the contents of the box and check for in-transit damage. Should any damage be noted, notify the freight carrier immediately to file a freight claim. Also, notify Comwave of any damages or of materials missing from the shipment. Refer to the Customer Service Document # 18-01001 for information about contacting Comwave.



Please do not discard original packaging material. It should be returned to Comwave to be recycled. Be sure to retain several boxes for each type of equipment at the transmitting site. This is to be used in the event the equipment is shipped back to the factory for repairs, upgrades, or modifications to ensure adequate protection.

Physical Installation

Installation of the Rear Door

Install the rear door of each transmitter as it is unpacked. Place the hinged portion of the door over the corresponding holes in the fan shroud assembly. Insert the screws provided into the existing rack clips. After adjusting the door position, close and lock the door to ensure proper mechanical operation.

AC Power Connections to the Exhaust Fans


The exhaust fans located on the rear door of the Rack have attached wiring harnesses. The harnesses must be routed into the transmitter chassis through a hole in the fan shroud and connected to the AC terminal strip. The terminal strip must be accessed before the Racks are bolted together. Verify that the circuit breaker is in the OFF position. Connect the fan harness to the terminal strip following the AC Interconnect Diagram located in the schematic section of this manual.

Bolting the Racks Together

A minimum of six bolts should be used to bolt each Rack to the adjacent (three in the front and three in the rear). After all of the Racks have been placed in their final destination, insert the provided hardware in the accessible-side-panel holes of the Racks. The hardware can be located on the bottom side of the Racks. Refer to the following diagram for hole locations.

NOTE: Be sure that all three exposed planes of the Racks are straight and flush before the bolts are tightened.

After the Racks are bolted together, Bolt the side-panels to the ends of the outer Racks.

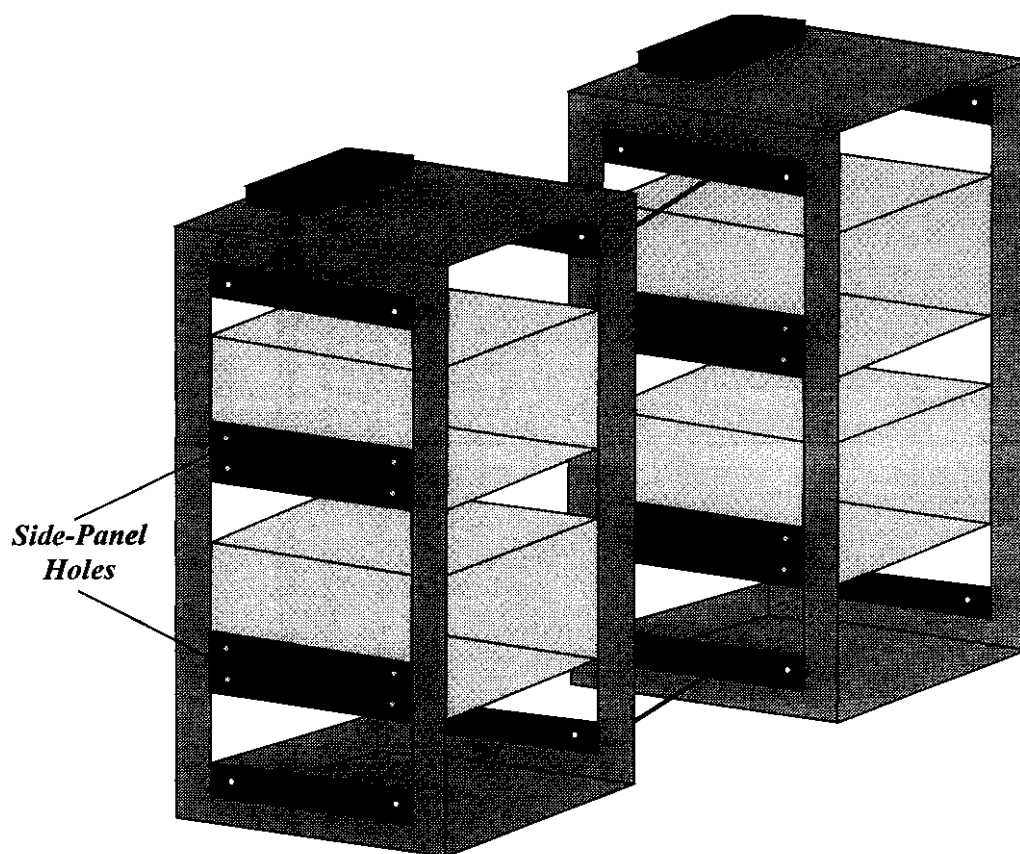

Installation of the Driver Chassis

The Rack is equipped with slide rails for convenient installation of the Driver Chassis. Slide rails also enable easy access to internal adjustable controls and other maintenance/adjustments. To install the Driver Chassis in the Rack, pull the slide rails outward until they lock into place. Carefully align drawer with the slide rails and mate. Unlock the slide rails by depressing the lock button on each rail while pushing the chassis inward. The chassis should slide easily into rack. If binding occurs, rail mounting brackets are in need of adjustment. Loosen brackets and manipulate drawer to seat rails to match transmitter drawer. Tighten brackets once free sliding motion has been achieved.

Once the Driver Chassis has been installed in the Rack and the Rack slides are adjusted, cabling can begin. Pull the Driver out of the Rack until the Rack slides lock, to provide access to the rear panel of the Driver Chassis. Wrap-around labels are located on each cable to denote proper destination. Refer to the following diagram to assist in cabling of the Driver Chassis.

Installation of the Power Amplifier Segments

The Power Amplifier Segments slide into the Sub-Rack on Nylon slides and connects to the Mother Board via a floating connector. The key-lock switch, located on the Segment's Front Panel, must be in the OFF position in order to plug the Segment into the Sub-rack. This is to ensure that there is no arcing between connections before the Segment is fully engaged. Once the Segment is slid into place, thumb screws on the Segments Front Panel are provided to fasten the Segment to the Sub-rack and to provide additional ground connection. The key-lock switch may now be turned to the ON position to apply power to the Segment. Once the key-lock switch is turned on, the Segment will automatically set the gain and currents of the amplifier.

Hot Replacement of the Power Amplifier Segment may be required if a failure occurs. To remove a Segment turn the key-lock switch to the OFF position, loosen the thumb screws on the Segment's Front Panel and slide the failed Segment out of the Sub-rack. Before the replacement Segment can be installed, the Node Address must be set. A set of DIP switches is accessible through the cover of each Segment directly behind the key-lock switch. Set the DIP switches of the replacement Segment to the same positions as the failed Segment's DIP switches. Install the replacement Segment as described above.

Module Position	Node Address	Node Switch Setting
1	2	ON OFF 12345678
2	3	ON OFF 12345678
3	4	ON OFF 12345678
4	5	ON OFF 12345678
5	6	ON OFF 12345678
6	7	ON OFF 12345678
7	8	ON OFF 12345678
8	9	ON OFF 12345678

NOTE: Do not change Node Switch Settings 6, 7, and 8. They should remain as set by the factory.

Environmental and Safety Considerations


Environmental Considerations

The equipment can be safely operated in ambient temperatures of -30 to +50 degrees Celsius (-22 to +122 degrees Fahrenheit). However, moderate temperatures generally extend equipment life. Although the equipment may be operated with relative humidity of up to 95%, the equipment must be protected from conditions which cause condensation within the equipment.

A rear door is used to force proper ventilation through the cabinet (600 cfm fans per transmitter are used). If failure of a fan occurs, replacement should be made as soon as possible. An air or temperature interlock should be incorporated for protection against interruption of ventilation. The area should be kept dry and clean.

There should be sufficient space in front of the transmitter cabinet for the serviceman and test equipment plus the full extension of the racked 27" deep chassis. A minimum of 36" behind the cabinet should be free for rear cabinet access and air movement. Also, ample room must be available at the cabinet rear for cable placement.

Safety Considerations



This equipment utilizes a grounding plug on all power cords. For personal safety, do not defeat this safety feature. As with all similar types of equipment, high voltage can be accessed when the Driver Chassis cover is removed. Special care should be given in areas of fuses, line switches, and power supplies.


Modern high power solid state equipment contain low output voltage power supplies with very high current capability. To prevent severe burns, avoid contact of rings, watch bands, etc., with these circuits. When servicing the transmission line and antenna, care must be taken to avoid exposure to high energy microwave.

Metering Calibration

Calibration of the system is completed by COMWAVE Service Technicians prior to shipping; however, recalibration of the Driver may become necessary when the input or output power levels are changed. Due to the equal gain of the Power Amplifiers, recalibration of the Segments is not necessary.

For proper calibration, adjustments are performed in a specific sequence. Before beginning, place the Driver into "STANDBY" and attach a -30 dB directional coupler and a termination to the internal combiner as shown in the diagram below.

Power Calibration Test Setup

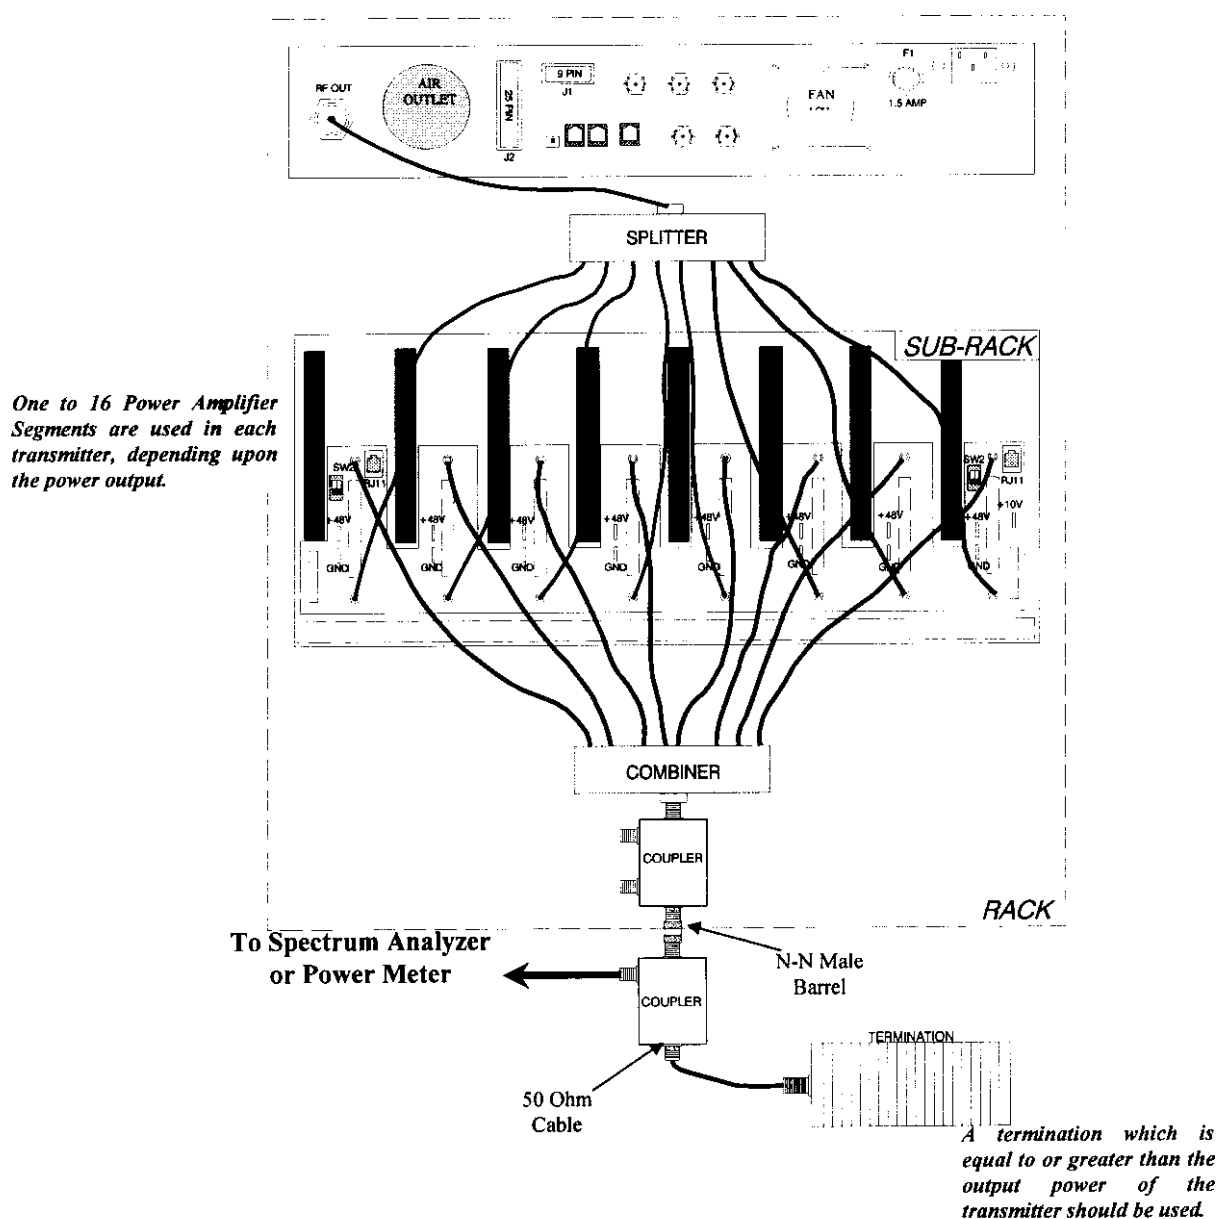

NOTE: This procedure is applicable for making MINOR adjustments to output power and analog metering only. Do NOT adjust power more than ± 5 dB. Adjustments more than ± 5 dB may result in increased intermodulation distortion products. For larger adjustments to output power re-calibration of the IF Precorrector is necessary. Contact Comwave Customer Service for further assistance.

Digital Output Power Calibration

1. Apply a Digital Microwave Input Signal.
2. Turn the Microwave Processor ALC switch, S2, to "MANUAL."
3. Connect an HP435B power meter or equivalent to the -30 dB coupler forward port.
4. Calculate the power meter reading necessary for 100% output power.

Example:

Transmitter Output @ 7.5 Watts	=	+39.00 dBm (31 carriers)*
-30 dB Coupler	=	-30.00 dB
Expected Power Meter Reading	=	+9.00 dBm

5. Rotate the function switch from "STANDBY" to "FWD PWR" to enable transmit.
6. Adjust the Microwave Attenuator located on the Microwave Precorrector so that the power meter reads the desired output power.
7. Adjust the Mother Board forward metering potentiometer, VR4, so that the Driver front panel meter indicates 100% forward power output. Refer to the Driver Top View Diagram for potentiometer locations.
8. Turn the ALC switch, S2, to "AUTO."

Analog Output Power Calibration

NOTE: Analog Power output is dependent upon Modulation Depth. Obtain proper Modulation Depth prior to setting Output Power levels. Use a video generator capable of Black No Burst (O IRE = 2.2 dB correction factor) or Black Burst with setup (2.6 dB correction factor) for proper power level adjustments.


1. Apply an Analog Microwave Input Signal.
2. Turn the Microwave Precorrector ALC switch, S2, to "MANUAL."
3. Connect an HP435B power meter or equivalent to the -30 dB coupler forward port.
4. Calculate the power meter reading necessary for 100% output, accounting for the coupler loss and correction factor.

Example:

Transmitter Output @ 100 Watts	=	+50.00 dBmW
-30 dB Coupler	=	-30.00 dB
Correction Factor	=	- 2.60 dB
Expected Power Meter Reading	=	+17.40 dBmW

5. Rotate the function switch from "STANDBY" to "FWD PWR" to enable transmit.
6. Adjust the Microwave Attenuator located on the Microwave Precorrector so that the power meter reads the desired output power.
7. Adjust the Mother Board forward metering potentiometer, VR4, so that the Driver front panel meter indicates 100% forward power output. Refer to the Driver Top View Diagram for potentiometer locations.
8. Turn the ALC switch, S2, the "AUTO."

Driver Top View

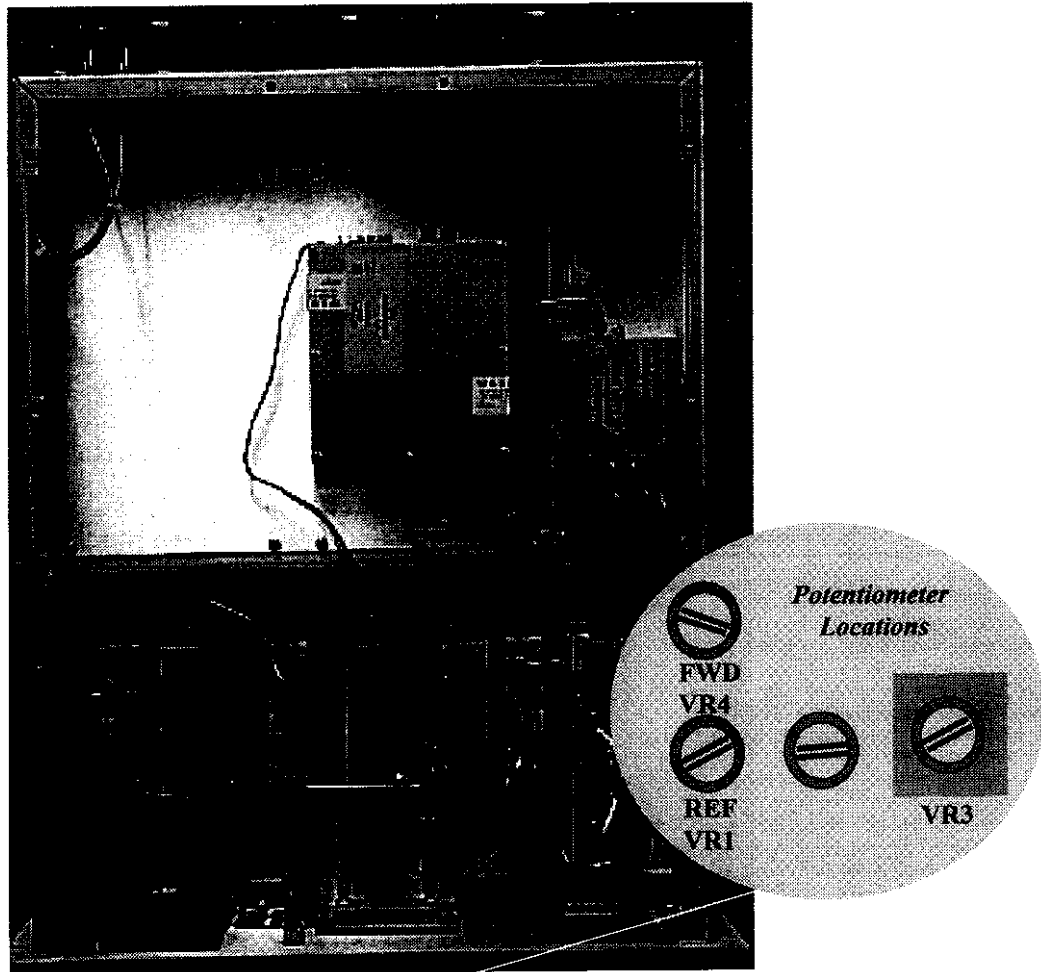

Reflected Output Power Metering

1. Rotate the function switch to "STANDBY" and turn the ALC switch, S2, to "MANUAL."
2. Momentarily interchange the coax cables at the Peak Detector Sample Ports.
3. Rotate the function knob from "STANDBY" to "REF" to enable transmitting.
4. Adjust the Mother Board reflected metering potentiometer, VR1, so that the Driver front panel meter indicates 100% reflected power. Refer to the diagram of the Driver Top View for potentiometer locations.

5. Rotate the function knob to "STANDBY."
6. Return the Peak Detector coax cables to the original configuration.
7. Turn the ALC switch, S2, "AUTO."
8. Rotate the function knob to "REF." The meter should indicate less than 7% residual reflected power reading into a resistive termination.

+11 V_{DC} Switching Power Supply Metering

1. Using a digital voltmeter, measure the switching power supply output.
2. Confirm that the switching power supply voltage output is +10.80 V_{DC}.
3. Rotate the function switch to +11 VPS.
4. Adjust the Mother Board +11 VPS potentiometer, VR3, so that the Driver front panel meter indicates 100% +11 VPS metering. Refer to the diagram of the Driver Top View for potentiometer locations.

System Operation

Prior to any initial equipment turn-on, verify that all appropriate wiring interconnections have been accomplished and the installation procedures have been followed precisely. Ensure proper AC Power Distribution to the exhaust fans and cabling of the Driver Chassis and the Ultra Low Phase Noise Drawer (Agile applications only).

Initial Operation Procedures

Driver Initial Operation

1. Position the front panel rotary function switch to "STANDBY."
2. Place the circuit breaker on the rear of the Rack in the "ON" position.
3. The following GREEN LEDs continuously illuminate verifying successful Initial Operation:
 - IN SIGNAL (*Modulator operation is required if an input signal is applied*)
 - INTERLOCK (*Mother Board Video Presence switch, SW1, in by-pass*)

Power Amplifier Segment Initial Operation

No initial operation procedure is needed for the Power Amplifier Segments. Proceed to the Normal Operation Procedures.

Normal Operation Procedures

Driver Normal Operation

Driver operation is enabled by rotating the function switch from "STANDBY" to any other position. Once the function switch is rotated, the following GREEN LEDs continuously illuminate confirming normal operation:

- IN SIGNAL
- INTERLOCK

Absence of a green LED indicates a missing signal or parameter. Continuous illumination of any red status LED indicates a failure has been detected by the diagnostic circuitry. Refer the Document # 16-01001 for troubleshooting of failures.

To verify other transmitter parameters using the front panel meter, rotate the function switch. +11 V_{DC} PS and FWD PWR should have meter readings of 100%. REFL PWR is a function of combiners, the transmission line and antenna. Reflected power readings less than 10% are typical.

Power Amplifier Segment Normal Operation

Power Amplifier Segment operation is accomplished by turning the key-lock switch to the "ON/LOCKED" position. *Note: The locks are an added safety feature; however, the keys are interchangeable.*

The POWER/FAULT LED should continuously illuminate GREEN. If the LED flashes RED, the Power Amplifier Segment has faulted. After three faults, a failure will occur and the Segment will shut down. It may be Reset by turning the key-lock switch to the "OFF/UNLOCKED" position and then back to the "ON/LOCKED" position. Should failure occur again, hot replacement is necessary. Turn the key-lock switch to the "OFF/UNLOCKED" position and pull the failed Segment out of the Rack by the handle. Slide a new Power Amplifier Segment into the vacant space, set the correct Node Address, and turn the key-lock switch to the "ON/LOCKED" position. Refer to Document # 14-01001 for Power Amplifier Segment Installation if needed.

Troubleshooting of the Driver

The Driver is equipped with comprehensive diagnostic circuitry that monitors the status of Power Amplifier Modules and critical circuits so failures can be readily detected. Complete operational status is known by observing the front panel LED Diagnostic Display, Analog Panel Meter and Diagnostic Interface. The following tables explain various failure mode displays and possible solutions.

NOTE: Due to internal transmitter design, there are no user serviceable modules, parts, or components. Repair of these modules is not recommended or advised. Contact COMWAVE customer support should a failure occur.

GREEN LEDs

The LED's listed below continuously operate GREEN during normal operation. Absence of a green LED indicates a missing signal or parameter which results in a controlled automatic shutdown.

LED Indication	Causes	Possible Solutions
IN SIGNAL (Missing Microwave signal).	- Defective cabling to IF INPUT - No Input signal - LNA failure	- Check Cabling - Verify input signal - Replace LNA - Measure voltages at 25 pin Diagnostic Interface, J2
INTERLOCK (Missing system Interlock signal).	RF module unplugged or shorted	- Check Driver for disconnected module(s) - Measure voltages at 25 pin Diagnostic Interface, J2

RED LEDs

The following LEDs continuously illuminate RED when a failure is detected. Controlled automatic transmitter shut down is a function of the failure and severity. Presence of a RED status LED with normal meter readings and/or normal transmitter operation indicates an out of tolerance condition with that circuit.

LED/Indication	Causes	Possible Solutions
DRIVER (Defective Driver Module).	• Driver Module Current • Power Supply Failure	• Measure voltages at 25 pin Diagnostic Interface, J2
FINAL (Power Amplifier) (Defective Final Module).	• Final Module Current • Power Supply Failure	• Measure voltages at 25 pin Diagnostic Interface, J2
-12 V_{DC} (Low or missing -12 V _{DC}).	• Defective -12 V_{DC} source • Disconnected module • Shorted module	• Check -12 V_{DC} source • Check module connectors • Measure voltages at 25 pin Diagnostic Interface, J2
TEMPERATURE Internal chassis temperature exceeded +140 degrees Fahrenheit (+60 degrees Celsius).	• Fans inoperative • Heavy accumulation of debris on fans or heatsinks • Module(s) overheating • Site air conditioning	• Check fan operation • Check site air conditioning • Allow transmitter to cool: Reset latched failure logic by rotating function switch momentarily to "STANDBY" • Measure voltages at 25 pin Diagnostic Interface, J2
+11 V_{DC} (Switching power supply voltage has deviated beyond a set operating window {high or low}).	• Defective main input line fuse • Switching power supply module • Open switching power supply fuse, F1 • Shorted amplifier module • Open Mother Board fuse, F1	• Check switching power supply output voltage • Check for defective fuses(s) • Measure voltages at 25 pin Diagnostic Interface, J2

A 25 pin computer type Diagnostic Interface Connector, labeled as J2, is located on the rear of the chassis to assist in troubleshooting. Critical Power Supply, module and Mother Board voltage test points can be accessed/monitored at this location. Should a failure occur, the combination of meter readings, Diagnostic LED status lights, and the Diagnostic Interface voltage test points help identify the failure.

TROUBLESHOOTING WORKSHEET

This troubleshooting worksheet identifies each interface pin, the associated internal test point, nominal value, and the expected voltage range. Please fill in all blank spaces completely.

J2: Rear Panel Diagnostic Pin	Function Checked	Low Limit "V _{DC} "	Nominal Voltage "V _{DC} "	High Limit "V _{DC} "	Measured Voltage
1	Ground	0.00	0.00	0.00	
2	+12 V _{DC} PS	+11.88	+12.00	+12.12	
3	-12 V _{DC} PS	-12.12	-12.00	-11.88	
4	+11 V _{DC} PS	+8.84	+11.00	+12.51	
5	+5 V _{DC} PS	+4.50	+5.00	+5.50	
6	Mixer	0.98	1.95	2.86	
7	AMP 1	1.24	2.75	3.78	
8	AMP 2	0.88	1.08	1.46	
9	Final Q2	1.49	2.20	2.98	
10	N/A	N/A	N/A	N/A	
11	N/A	N/A	N/A	N/A	
12	N/A	N/A	N/A	N/A	
13	System Reset	3.40	5.00	5.50	
14	ALC	1.00	1.40	2.00	
15	PA Standby	3.40	5.00	5.50	
16	PA Fault	3.40	5.00	5.50	
17	Driver Standby	3.40	5.00	5.50	
18	Reset 1	3.40	5.00	5.50	
19	Reset 2	3.40	+5.00	5.50	
20	N/A	N/A	N/A	N/A	
21	LO	0.00	.30	1.02	
22	Temp	0.00	0.70	2.50	
23	FWD Power	0.74	1.40	2.32	
24	N/A	N/A	N/A	N/A	
25	REFL Power	0.00	0.10	0.32	

Company Name: _____ Customer's Name: _____

Phone #: _____ Fax #: _____

Model: _____ Channel: _____ Serial # (Rear Panel): _____

Send Results to: **COMWAVE- Attention Technical Support** Toll Free # (USA only): 1-800-266-9283
 PO Box 69, 395 Oakhill Road 1-717-474-6751
 Mountaintop, PA 18707 USA Fax #: 1-717-474-5469

ANALOG METERING

The Analog Meter provides a visual indication of the +11 V_{DC} Switching Power Supply, Peak Relative Forward or Reflected Power. The +11 V_{DC} Switching Power Supply and Forward Power should indicate 100%. Reflected power meter readings less than 10% are typical.

LED Indication	Causes	Possible Solutions
+11 VPS (Meter does not indicate 100%).	• Defective Switching Power Supply • Shorted Module • Open Switching Power Supply Fuse, F1 • Switching Power Supply out of adjustment • Metering out of adjustment	• Check for defective fuse(s) • Check Switching Power Supply output voltage • Troubleshoot per front panel LED Diagnostic Display • Adjust Switching Power Supply output voltage per Document # 14-04001 • Calibrate meter per Document # 14-04001 • Measure voltages at 25 pin Diagnostic Interface, J2
REFL PWR (Reflected power is greater than 10%).	• Loose RF cable connection(s) • RF cable kinked • Wave guide leak/depressurized • Reflected metering out of adjustment	• Check integrity of all RF cable connections • Check cabling for kinks or severe bends • Check wave guide pressure • Calibrate reflected metering per Document # 14-04001 • Measure voltages at 25 pin Diagnostic Interface
FWD PWR (Meter does not indicate 100% forward power).	• Driver Module • Final Module(s) • Switching Power Supply • Forward metering out of adjustment	• Confirm output power • Troubleshoot per front panel LED Diagnostic Display • Check for defective module • Calibrate forward power metering per Document # 14-04001 • Measure voltages at 25 pin Diagnostic Interface, J2

Equipment Fusing and Protection

Driver Fusing


The Driver Chassis is equipped with three replaceable fuses. The locations and values of each fuse are as follows:

<i>Location</i>	<i>Fuse</i>	<i>Value</i>
Mother Board	F1	10.0 Amperes
Rear Panel	Input	1.5 Amperes (slow blow)
Power Supply	F1	5.0 Amperes

The AC line input is supplied with voltage suppressers to protect the equipment from moderate power surges. Thermal protection is accomplished using a thermostat that closes when internal temperature exceeds +140 degrees Fahrenheit (+60 degrees Celsius). When thermal shut down occurs, logic control removes power from the finals until the unit is sufficiently cooled.

Interlocks are designed for transistor bias protection for both the FET gate and drain power supply voltages.

Circuit Breaker



A three phase-15 Ampere circuit breaker is provided with each transmitter for system protection. It is located on the rear of the Rack above the fans. When the current exceeds 20 Amperes the circuit breaker trips and the transmitter, including AC to DC Front End Converter, Driver Drawer, Ultra Low Phase Noise Drawer (*Agile applications only*), Power Amplifier Segments and fans are shut down. A plastic cover is provided to protect the circuit breaker from accidental shut down.

MONTHLY MAINTENANCE RECORD

[illegible]

Customer Service

Comwave's customer service personnel are available 24 hours a day to assist with any questions or complications that may arise.

Communication Microwave Corp	
Crestwood Industrial Park	
395 Oakhill Road	
Mountaintop, PA 18707	
1-800-266-9283	USA only
1-717-474-6751	
1-717-474-5469	FAX

Equipment Returns

In the event the equipment requires return for factory service, please follow the guidelines listed. Comwave cannot be held responsible for damaged equipment received due to improper packing. Contact Comwave with any questions or concerns regarding returning or packaging of equipment.


1. **Contact Comwave:** Call Comwave to report the problem and to obtain a "Return Authorization" number (RA). This enables Comwave to accurately track and identify returned equipment for prompt and efficient service.
2. **Obtain packaging materials:** Use original boxes and packing materials when returning any equipment. This will safe guard against most in-transit damages. If original boxes and packing materials are not available, contact Comwave to obtain replacement materials. Replacement materials are provided at a nominal cost.
3. **Pack equipment:** Using original packing materials, equipment is packed in a box within another box. Double boxing provides maximum protection.

Caution: Do not pack equipment using "PEANUTS." Equipment packed using "PEANUTS" as filler does NOT provide sufficient protection during shipping. Rough handling by the carrier may cause permanent damage to the equipment being return.

Packaging of the Driver for Return

Refer to the diagram below which corresponds to each step.

1. Place the cardboard inserts above and below the equipment.
2. Insert foam against the front panel, between the handle and the corner of the inner box.
3. Insert the foam block securely behind the fans to prevent equipment from shifting upon transit.
4. Place the protective foam pieces on each corner of the inner box.
5. Place the inner box into the outer box.

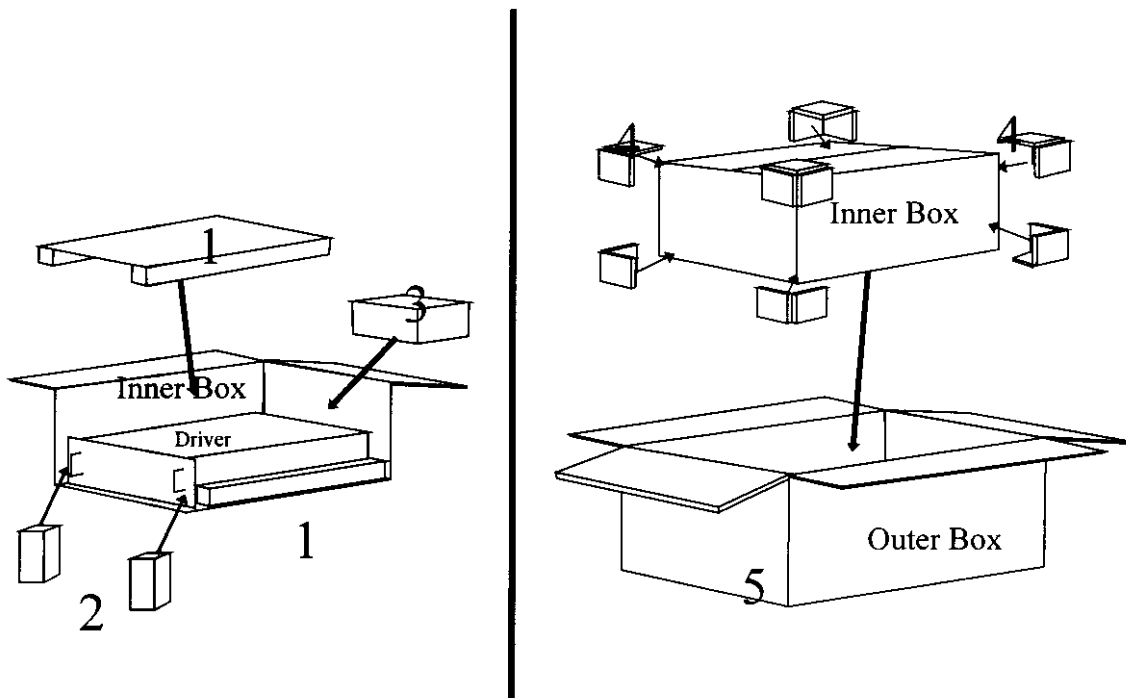

Packaging of the Power Amplifier Segment for Return

1. Align the Power Amplifier Segment as shown and place into the original inner packing box.
2. Place the piece of loose foam between the handle of the Power Amplifier Segment and the side of the inner box.
3. Fold the edges of the inner box inward and close.
4. Place the inner box into the outer box, being sure to include three empty boxes for a secure fit.

