



TDK CORPORATION
QUALITY ASSURANCE DEPARTMENT
2-15-7 HIGASHI-OWADA, ICHIKAWA-SHI
CHIBA 272, JAPAN

TDK EMC CENTER CHIKUMAGAWA OPEN SITE
REPORT OF MEASUREMENTS ON DIGITAL DEVICE

Date : April 27, 1999
Issued in : Saku-city, JAPAN

TDK APPLICATION No.: TDC-99-0405(1)

1. Applicant : TOSHIBA CORPORATION
Digital Media Equipment & Services Company, Administration Group
Yanagicho Operations-Digital Media Equipment
70 Yanagicho, Saiwai-Ku, Kawasaki-Shi, 210-8501, Japan
2. Factory : Toshiba Multi Media Devices Co., Ltd.
19, Aza-Minase, Oaza-Fukihata, Goshogawara-Shi, Aomori-Ken
037-0003, Japan
3. Description of Equipment : CD-ROM
- 3-1. Category : FCC Class B Digital Device
- 3-2. FCC ID No. : CJ6AT99-041
- 3-3. Trade Name : TOSHIBA
- 3-4. Model No. : XM-6602B
- 3-5. Serial No. : 2S2-003
- 3-6. Power Supply : DC power for the EUT was controlled by the personal computer
(Model : Manufacturer : DELL COMPUTER)
- 3-7. Date of Manufacture : April 1999
4. Regulation Applied : FCC Rules and Regulations Part 15 Subpart B
5. Measurement Procedure Used : ANSI C63.4 - 1992
6. Sampling Procedure : Random sampling extracted from 100 units
7. Place of Measurement : TDK EMC CENTER CHIKUMAGAWA OPEN SITE
8. Date of Measurement : April 24, 1999
9. Measurement Results : The test results show that EUT conform to FCC Class B regulations on the described test condition as shown in the attached sheets.
10. Deviation from the Standard : The test is not deviated from the Standard.

- Note : (1) The test results relate only to items tested.
(2) This report shall not be reproduced except in full without the written approval of testing laboratory.
(3) The report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.
(4) The test results are traceable to the national or international standard.

Akira Bandoh
Akira Bandoh

Senior Manager of TDK EMC CENTER

TDK Application No. : TDC-99-0405(1)


Applicant : TOSHIBA CORPORATION

Model No. : XM-6602B

Standard : FCC 15 , B

FCC ID : CJ6AT99-041

EUT's Test Arrangement

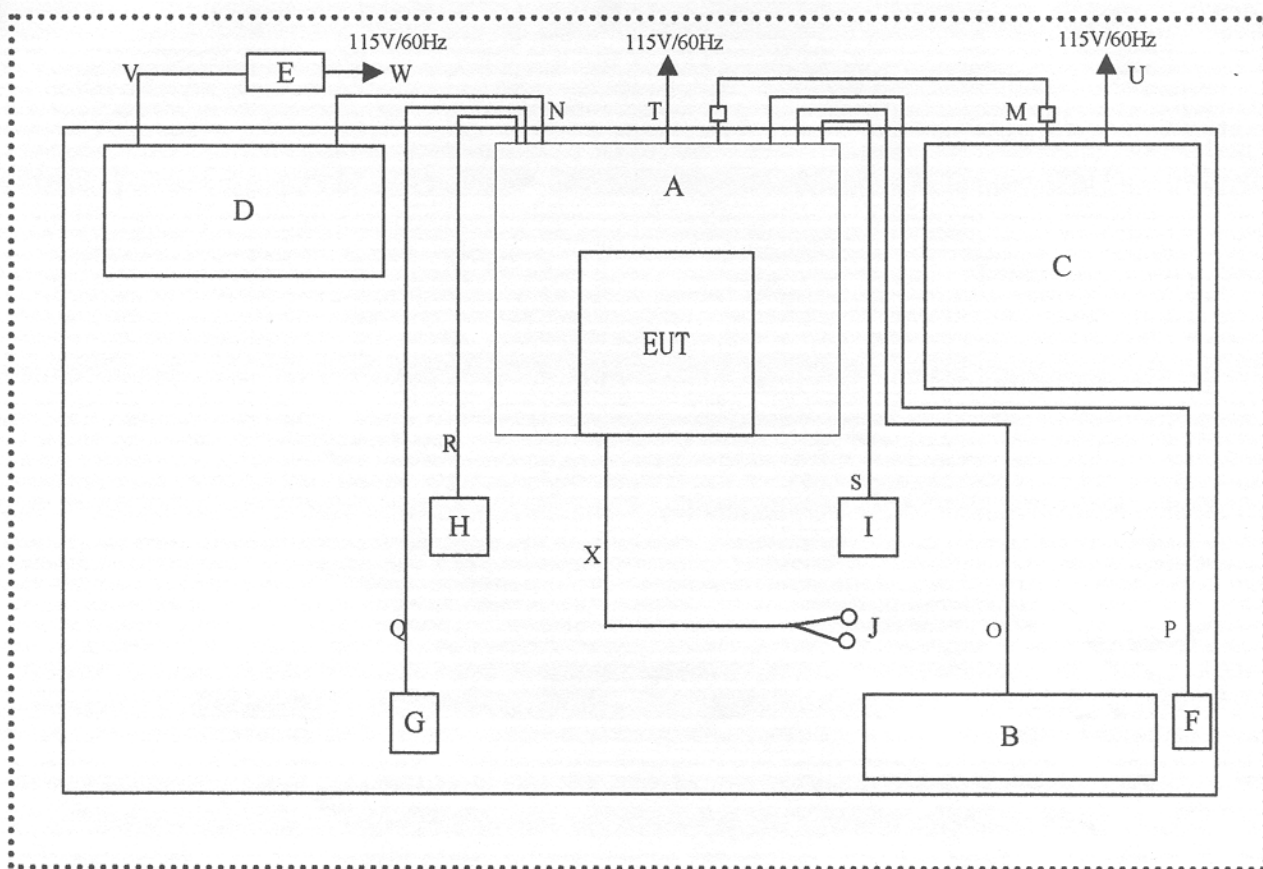

Test Configuration

No.	Device	MODEL No.	FCC ID	S/N	Manufacturer
EUT	CD-ROM Drive	XM-6602B	CJ6AT99-041	2S2-003	TOSHIBA CORPRATION
A	Personal Computer	MMS	-----	TFW3P	DELL COMPUTER
B	Key Board	SK-1000REW	GYUR43SK	12741-93H-7450	DELL COMPUTER
C	CRT Display	M770	A3KM076	1321D-H041P-39	DELL COMPUTER
D	Printer	C4608A	B94C2164X	SG71L1B0VC	HEWLETT PACKARD
E	AC Adapter	C2178A	-----	-----	HEWLETT PACKARD
F	Mouse(1)	intelli Mouse 1.1A PS/2 Compatible	C3KKMP5	63618-OEM- 2586347-00000	MICROSOFT
G	Mouse(2)	M-CQ38	DZLM04	LZB74558261	LOGITECH
H	CCD CAMERA(1)	LKD5	LKD5	VU13B3XD	Connectix
I	CCD CAMERA(2)	LKD5	LKD5	VU13B3T3	Connectix
J	Head Phone	-----	-----	-----	TOSHIBA CORPRATION

Summary of Test Results

The tests were performed in accordance with the procedures described in ANSI C63.4-1992. Test results show that EUT conforms to the requirement of FCC Rules Part 15 Subpart B Section 107 and 109 as shown in the test data on page 5 and page 9.

	Test Result
(1) Radiated Emission Test	Passed
Minimum margin relative to the Limits	3.0 dB at 498.970MHz
Measurement Uncertainty	± 4 dB

Note : The measurement was performed based on the Test Procedure of Radiated Emission described on page 4 in the EUT operation of " Play mode ".

Tested by : *Fumihiko Ooi*
Test Engineer of TDK Chikumagawa Open Site

	Test Result
(1) AC Power Line Conducted Emission Test	Passed
Minimum margin relative to the Limits	14.3 dB at 0.4700MHz
Measurement Uncertainty	± 2 dB

Note : The measurement was performed at the plug end of AC power line cord of the EUT in the operation of " Play mode " based on the Test Procedure of AC Power Line Conducted Emission on page 8.

Tested by : *Fumihiko Ooi*
Test Engineer of TDK Chikumagawa Open Site

TDK Application No. : TDC-99-0405(1)

Applicant : TOSHIBA CORPORATION

Standard : FCC 15 , B

Model No. : XM-6602B

FCC ID : CJ6AT99-041

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
M	CRT Cable	-----	1.8 m	2	DELL COMPUTER
N	Printer Cable	-----	1.9 m	-----	-----
O	Keyboard Cable	-----	1.9 m	1	DELL COMPUTER
P	Mouse (1) Cable	-----	1.8 m	-----	MICROSOFT
Q	Mouse (2) Cable	-----	2.1 m	-----	Logitech
R	CCD CAMERA Cable (1)	-----	1.8 m	-----	Connectix
S	CCD CAMERA Cable (2)	-----	1.8 m	-----	Connectix
T	Power Cable (AC 120V,60Hz)	-----	2.3 m	-----	DELL COMPUTER
U	Power Cable (AC 120V,60Hz)	-----	2.0 m	-----	DELL COMPUTER
V	Power Cable (DC 30V)	-----	1.8 m	-----	HEWLETT PACKARD
W	Power Cable (AC 120V,60Hz)	-----	0.9 m	-----	HEWLETT PACKARD
X	Head Phone Cable	-----	1.5 m	-----	TOSHIBA CORPORATION

I/F Cables' shield and connection

No.	I/F Cable	Shield Type	Shield Grounding	Connection
M	CRT Cable	☒ Braid ☐ Foil	☐ 360°metal backshell ☒ Drain wire	From CRT port of Device A to Device C
N	Parallel	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From parallel port of Device A to Device D
O	Keyboard	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From keyboard port of Device A to Device B
P	PS/2 Mouse	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From mouse port of Device A to Device F
Q	RS232C	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From RS232C port of Device A to Device G
R	USB(1)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device H
S	USB(2)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device I

TDK Application No. : TDC-99-0405(1)

Applicant : TOSHIBA CORPORATION

Standard : FCC 15 , B

Model No. : XM-6602B

FCC ID : CJ6AT99-041

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
M	CRT Cable	-----	1.8 m	2	DELL COMPUTER
N	Printer Cable	-----	1.9 m	-----	-----
O	Keyboard Cable	-----	1.9 m	1	DELL COMPUTER
P	Mouse (1) Cable	-----	1.8 m	-----	MICROSOFT
Q	Mouse (2) Cable	-----	2.1 m	-----	Logitech
R	CCD CAMERA Cable (1)	-----	1.8 m	-----	Connectix
S	CCD CAMERA Cable (2)	-----	1.8 m	-----	Connectix
T	Power Cable (AC 120V,60Hz)	-----	2.3 m	-----	DELL COMPUTER
U	Power Cable (AC 120V,60Hz)	-----	2.0 m	-----	DELL COMPUTER
V	Power Cable (DC 30V)	-----	1.8 m	-----	HEWLETT PACKARD
W	Power Cable (AC 120V,60Hz)	-----	0.9 m	-----	HEWLETT PACKARD
X	Head Phone Cable	-----	1.5 m	-----	TOSHIBA CORPORATION

I/F Cables' shield and connection

No.	I/F Cable	Shield Type	Shield Grounding	Connection
M	CRT Cable	☒ Braid ☐ Foil	☐ 360°metal backshell ☒ Drain wire	From CRT port of Device A to Device C
N	Parallel	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From parallel port of Device A to Device D
O	Keyboard	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From keyboard port of Device A to Device B
P	PS/2 Mouse	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From mouse port of Device A to Device F
Q	RS232C	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From RS232C port of Device A to Device G
R	USB(1)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device H
S	USB(2)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device I

TDK Application No. : TDC-99-0405(1)

Applicant : TOSHIBA CORPORATION

Standard : FCC 15 , B

Model No. : XM-6602B

FCC ID : CJ6AT99-041

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
M	CRT Cable	-----	1.8 m	2	DELL COMPUTER
N	Printer Cable	-----	1.9 m	-----	-----
O	Keyboard Cable	-----	1.9 m	1	DELL COMPUTER
P	Mouse (1) Cable	-----	1.8 m	-----	MICROSOFT
Q	Mouse (2) Cable	-----	2.1 m	-----	Logitech
R	CCD CAMERA Cable (1)	-----	1.8 m	-----	Connectix
S	CCD CAMERA Cable (2)	-----	1.8 m	-----	Connectix
T	Power Cable (AC 120V,60Hz)	-----	2.3 m	-----	DELL COMPUTER
U	Power Cable (AC 120V,60Hz)	-----	2.0 m	-----	DELL COMPUTER
V	Power Cable (DC 30V)	-----	1.8 m	-----	HEWLETT PACKARD
W	Power Cable (AC 120V,60Hz)	-----	0.9 m	-----	HEWLETT PACKARD
X	Head Phone Cable	-----	1.5 m	-----	TOSHIBA CORPORATION

I/F Cables' shield and connection

No.	I/F Cable	Shield Type	Shield Grounding	Connection
M	CRT Cable	☒ Braid ☐ Foil	☐ 360°metal backshell ☒ Drain wire	From CRT port of Device A to Device C
N	Parallel	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From parallel port of Device A to Device D
O	Keyboard	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From keyboard port of Device A to Device B
P	PS/2 Mouse	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From mouse port of Device A to Device F
Q	RS232C	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From RS232C port of Device A to Device G
R	USB(1)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device H
S	USB(2)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device I

TDK Application No. : TDC-99-0405(1)

Applicant : TOSHIBA CORPORATION

Standard : FCC 15 , B

Model No. : XM-6602B

FCC ID : CJ6AT99-041

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
M	CRT Cable	-----	1.8 m	2	DELL COMPUTER
N	Printer Cable	-----	1.9 m	-----	-----
O	Keyboard Cable	-----	1.9 m	1	DELL COMPUTER
P	Mouse (1) Cable	-----	1.8 m	-----	MICROSOFT
Q	Mouse (2) Cable	-----	2.1 m	-----	Logitech
R	CCD CAMERA Cable (1)	-----	1.8 m	-----	Connectix
S	CCD CAMERA Cable (2)	-----	1.8 m	-----	Connectix
T	Power Cable (AC 120V,60Hz)	-----	2.3 m	-----	DELL COMPUTER
U	Power Cable (AC 120V,60Hz)	-----	2.0 m	-----	DELL COMPUTER
V	Power Cable (DC 30V)	-----	1.8 m	-----	HEWLETT PACKARD
W	Power Cable (AC 120V,60Hz)	-----	0.9 m	-----	HEWLETT PACKARD
X	Head Phone Cable	-----	1.5 m	-----	TOSHIBA CORPORATION

I/F Cables' shield and connection

No.	I/F Cable	Shield Type	Shield Grounding	Connection
M	CRT Cable	☒ Braid ☐ Foil	☐ 360°metal backshell ☒ Drain wire	From CRT port of Device A to Device C
N	Parallel	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From parallel port of Device A to Device D
O	Keyboard	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From keyboard port of Device A to Device B
P	PS/2 Mouse	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From mouse port of Device A to Device F
Q	RS232C	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From RS232C port of Device A to Device G
R	USB(1)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device H
S	USB(2)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device I

TDK Application No. : TDC-99-0405(1)

Applicant : TOSHIBA CORPORATION

Standard : FCC 15 , B

Model No. : XM-6602B

FCC ID : CJ6AT99-041

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
M	CRT Cable	-----	1.8 m	2	DELL COMPUTER
N	Printer Cable	-----	1.9 m	-----	-----
O	Keyboard Cable	-----	1.9 m	1	DELL COMPUTER
P	Mouse (1) Cable	-----	1.8 m	-----	MICROSOFT
Q	Mouse (2) Cable	-----	2.1 m	-----	Logitech
R	CCD CAMERA Cable (1)	-----	1.8 m	-----	Connectix
S	CCD CAMERA Cable (2)	-----	1.8 m	-----	Connectix
T	Power Cable (AC 120V,60Hz)	-----	2.3 m	-----	DELL COMPUTER
U	Power Cable (AC 120V,60Hz)	-----	2.0 m	-----	DELL COMPUTER
V	Power Cable (DC 30V)	-----	1.8 m	-----	HEWLETT PACKARD
W	Power Cable (AC 120V,60Hz)	-----	0.9 m	-----	HEWLETT PACKARD
X	Head Phone Cable	-----	1.5 m	-----	TOSHIBA CORPORATION

I/F Cables' shield and connection

No.	I/F Cable	Shield Type	Shield Grounding	Connection
M	CRT Cable	☒ Braid ☐ Foil	☐ 360°metal backshell ☒ Drain wire	From CRT port of Device A to Device C
N	Parallel	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From parallel port of Device A to Device D
O	Keyboard	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From keyboard port of Device A to Device B
P	PS/2 Mouse	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From mouse port of Device A to Device F
Q	RS232C	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From RS232C port of Device A to Device G
R	USB(1)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device H
S	USB(2)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device I

TDK Application No. : TDC-99-0405(1)

Applicant : TOSHIBA CORPORATION

Standard : FCC 15 , B

Model No. : XM-6602B

FCC ID : CJ6AT99-041

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
M	CRT Cable	-----	1.8 m	2	DELL COMPUTER
N	Printer Cable	-----	1.9 m	-----	-----
O	Keyboard Cable	-----	1.9 m	1	DELL COMPUTER
P	Mouse (1) Cable	-----	1.8 m	-----	MICROSOFT
Q	Mouse (2) Cable	-----	2.1 m	-----	Logitech
R	CCD CAMERA Cable (1)	-----	1.8 m	-----	Connectix
S	CCD CAMERA Cable (2)	-----	1.8 m	-----	Connectix
T	Power Cable (AC 120V,60Hz)	-----	2.3 m	-----	DELL COMPUTER
U	Power Cable (AC 120V,60Hz)	-----	2.0 m	-----	DELL COMPUTER
V	Power Cable (DC 30V)	-----	1.8 m	-----	HEWLETT PACKARD
W	Power Cable (AC 120V,60Hz)	-----	0.9 m	-----	HEWLETT PACKARD
X	Head Phone Cable	-----	1.5 m	-----	TOSHIBA CORPORATION

I/F Cables' shield and connection

No.	I/F Cable	Shield Type	Shield Grounding	Connection
M	CRT Cable	☒ Braid ☐ Foil	☐ 360°metal backshell ☒ Drain wire	From CRT port of Device A to Device C
N	Parallel	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From parallel port of Device A to Device D
O	Keyboard	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From keyboard port of Device A to Device B
P	PS/2 Mouse	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From mouse port of Device A to Device F
Q	RS232C	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From RS232C port of Device A to Device G
R	USB(1)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device H
S	USB(2)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device I

TDK Application No. : TDC-99-0405(1)

Applicant : TOSHIBA CORPORATION

Standard : FCC 15 , B

Model No. : XM-6602B

FCC ID : CJ6AT99-041

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
M	CRT Cable	-----	1.8 m	2	DELL COMPUTER
N	Printer Cable	-----	1.9 m	-----	-----
O	Keyboard Cable	-----	1.9 m	1	DELL COMPUTER
P	Mouse (1) Cable	-----	1.8 m	-----	MICROSOFT
Q	Mouse (2) Cable	-----	2.1 m	-----	Logitech
R	CCD CAMERA Cable (1)	-----	1.8 m	-----	Connectix
S	CCD CAMERA Cable (2)	-----	1.8 m	-----	Connectix
T	Power Cable (AC 120V,60Hz)	-----	2.3 m	-----	DELL COMPUTER
U	Power Cable (AC 120V,60Hz)	-----	2.0 m	-----	DELL COMPUTER
V	Power Cable (DC 30V)	-----	1.8 m	-----	HEWLETT PACKARD
W	Power Cable (AC 120V,60Hz)	-----	0.9 m	-----	HEWLETT PACKARD
X	Head Phone Cable	-----	1.5 m	-----	TOSHIBA CORPORATION

I/F Cables' shield and connection

No.	I/F Cable	Shield Type	Shield Grounding	Connection
M	CRT Cable	☒ Braid ☐ Foil	☐ 360°metal backshell ☒ Drain wire	From CRT port of Device A to Device C
N	Parallel	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From parallel port of Device A to Device D
O	Keyboard	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From keyboard port of Device A to Device B
P	PS/2 Mouse	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From mouse port of Device A to Device F
Q	RS232C	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From RS232C port of Device A to Device G
R	USB(1)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device H
S	USB(2)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device I

TDK Application No. : TDC-99-0405(1)

Applicant : TOSHIBA CORPORATION

Standard : FCC 15 , B

Model No. : XM-6602B

FCC ID : CJ6AT99-041

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
M	CRT Cable	-----	1.8 m	2	DELL COMPUTER
N	Printer Cable	-----	1.9 m	-----	-----
O	Keyboard Cable	-----	1.9 m	1	DELL COMPUTER
P	Mouse (1) Cable	-----	1.8 m	-----	MICROSOFT
Q	Mouse (2) Cable	-----	2.1 m	-----	Logitech
R	CCD CAMERA Cable (1)	-----	1.8 m	-----	Connectix
S	CCD CAMERA Cable (2)	-----	1.8 m	-----	Connectix
T	Power Cable (AC 120V,60Hz)	-----	2.3 m	-----	DELL COMPUTER
U	Power Cable (AC 120V,60Hz)	-----	2.0 m	-----	DELL COMPUTER
V	Power Cable (DC 30V)	-----	1.8 m	-----	HEWLETT PACKARD
W	Power Cable (AC 120V,60Hz)	-----	0.9 m	-----	HEWLETT PACKARD
X	Head Phone Cable	-----	1.5 m	-----	TOSHIBA CORPORATION

I/F Cables' shield and connection

No.	I/F Cable	Shield Type	Shield Grounding	Connection
M	CRT Cable	☒ Braid ☐ Foil	☐ 360°metal backshell ☒ Drain wire	From CRT port of Device A to Device C
N	Parallel	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From parallel port of Device A to Device D
O	Keyboard	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From keyboard port of Device A to Device B
P	PS/2 Mouse	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From mouse port of Device A to Device F
Q	RS232C	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From RS232C port of Device A to Device G
R	USB(1)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device H
S	USB(2)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device I

TDK Application No. : TDC-99-0405(1)

Applicant : TOSHIBA CORPORATION

Standard : FCC 15 , B

Model No. : XM-6602B

FCC ID : CJ6AT99-041

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
M	CRT Cable	-----	1.8 m	2	DELL COMPUTER
N	Printer Cable	-----	1.9 m	-----	-----
O	Keyboard Cable	-----	1.9 m	1	DELL COMPUTER
P	Mouse (1) Cable	-----	1.8 m	-----	MICROSOFT
Q	Mouse (2) Cable	-----	2.1 m	-----	Logitech
R	CCD CAMERA Cable (1)	-----	1.8 m	-----	Connectix
S	CCD CAMERA Cable (2)	-----	1.8 m	-----	Connectix
T	Power Cable (AC 120V,60Hz)	-----	2.3 m	-----	DELL COMPUTER
U	Power Cable (AC 120V,60Hz)	-----	2.0 m	-----	DELL COMPUTER
V	Power Cable (DC 30V)	-----	1.8 m	-----	HEWLETT PACKARD
W	Power Cable (AC 120V,60Hz)	-----	0.9 m	-----	HEWLETT PACKARD
X	Head Phone Cable	-----	1.5 m	-----	TOSHIBA CORPORATION

I/F Cables' shield and connection

No.	I/F Cable	Shield Type	Shield Grounding	Connection
M	CRT Cable	☒ Braid ☐ Foil	☐ 360°metal backshell ☒ Drain wire	From CRT port of Device A to Device C
N	Parallel	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From parallel port of Device A to Device D
O	Keyboard	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From keyboard port of Device A to Device B
P	PS/2 Mouse	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From mouse port of Device A to Device F
Q	RS232C	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From RS232C port of Device A to Device G
R	USB(1)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device H
S	USB(2)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device I

TDK Application No. : TDC-99-0405(1)

Applicant : TOSHIBA CORPORATION

Standard : FCC 15 , B

Model No. : XM-6602B

FCC ID : CJ6AT99-041

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
M	CRT Cable	-----	1.8 m	2	DELL COMPUTER
N	Printer Cable	-----	1.9 m	-----	-----
O	Keyboard Cable	-----	1.9 m	1	DELL COMPUTER
P	Mouse (1) Cable	-----	1.8 m	-----	MICROSOFT
Q	Mouse (2) Cable	-----	2.1 m	-----	Logitech
R	CCD CAMERA Cable (1)	-----	1.8 m	-----	Connectix
S	CCD CAMERA Cable (2)	-----	1.8 m	-----	Connectix
T	Power Cable (AC 120V,60Hz)	-----	2.3 m	-----	DELL COMPUTER
U	Power Cable (AC 120V,60Hz)	-----	2.0 m	-----	DELL COMPUTER
V	Power Cable (DC 30V)	-----	1.8 m	-----	HEWLETT PACKARD
W	Power Cable (AC 120V,60Hz)	-----	0.9 m	-----	HEWLETT PACKARD
X	Head Phone Cable	-----	1.5 m	-----	TOSHIBA CORPORATION

I/F Cables' shield and connection

No.	I/F Cable	Shield Type	Shield Grounding	Connection
M	CRT Cable	☒ Braid ☐ Foil	☐ 360°metal backshell ☒ Drain wire	From CRT port of Device A to Device C
N	Parallel	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From parallel port of Device A to Device D
O	Keyboard	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From keyboard port of Device A to Device B
P	PS/2 Mouse	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From mouse port of Device A to Device F
Q	RS232C	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From RS232C port of Device A to Device G
R	USB(1)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device H
S	USB(2)	☒ Braid ☐ Foil	☒ 360°metal backshell ☐ Drain wire	From USB(1) port of Device A to Device I

Test Procedure of Radiated Emission :

Preliminary radiated measurements were performed at the measurement distance specified for compliance to determine the emission characteristics of the EUT based on ANSI C63.4-1992 Sec. 8. 3. 1. 1.

The EUT was set up in its typical configuration and operated in its various modes in order. For tabletop systems, cables or wires were manipulated within the range of likely configurations.

For each mode of operation required to be tested, the frequency spectrum was monitored. Antenna height, EUT azimuth, antenna polarization, and cable or wire placement were varied for exploration to produce the maximized emission relative to the limit. Antenna height was varied from 1m to 4m step by step with 1m step, and the EUT on the turn-table was rotated in 360° at each antenna height to detect maximized radiated emission while monitoring spectrum analyzer. The frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were recorded. At the frequency of suspect signal, interface cables positions were varied in order to determine the maximum emission level.

Furthermore, the EUT was rotated 360° and antenna height was varied to maximize the suspected highest amplitude signal.

In case that the EUT has multiple ports all of the same type, additional connecting cables were added to the EUT to determine the effect these cables have on emission from the EUT. The additional cables were added to the condition where the addition of another cables did not significantly affect the emission level, i. e. , varied less than 2dB provided that the emission level remained compliant.

Based on the preliminary radiated measurements, the one EUT configuration, cable or wire configuration, and mode of operation that produced the highest emission level relative to limit was selected for the final test.

The final test was performed and the frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were measured with CISPR QP mode and recorded.

TDK Application No. : TDC-99-0405(1)
 Applicant : TOSHIBA CORPORATION
 Model No. : XM-6602B

Standard : FCC 15 , B
 FCC ID : CJ6AT99-041

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : April 24, 1999
 Temp. : 15 °C ; Humi. : 62 %

Test Receiver : Rohde & Schwarz ESVP
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz External Attenuator : none

Description of Equipment : CD-ROM
 Model No. : XM-6602B ; Type : Desk Top

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.2,3 and 12.

2) EUT Grounding : None.

3) Operating Condition : Running with the program prepared by the applicant.

(1) CD-ROM Drive (EUT) : Random Data Read. (2) Color Computer Display : Displayed the "H" Characters.

(3) Printer : Printing the "H" Characters.

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB μ V/m)		Limit (dB μ V/m)	Emission Level at 3m (dB μ V/m)		Margin (dB)
		Hori.	Ver.		Hori.	Ver.	
30.000	20.0		29.5	40.0	---	29.5	10.5
52.300	11.9	19.8	26.1	40.0	19.8	26.1	13.9
66.900	8.2		28.1	40.0	---	28.1	11.9
88.400	9.8		27.6	43.5	---	27.6	15.9
109.350	13.7		28.4	43.5	---	28.4	15.1
112.300	14.1	30.8		43.5	30.8	---	12.7
124.200	15.6	32.0	29.3	43.5	32.0	29.3	11.5
133.200	16.3		28.3	43.5	---	28.3	15.2
180.090	18.7	35.4		43.5	35.4	---	8.1
181.740	18.8		25.1	43.5	---	25.1	18.4
192.090	19.3	35.1		43.5	35.1	---	8.4
339.190	20.7	32.6	32.1	46.0	32.6	32.1	13.4
498.970	24.0	42.6	43.0	46.0	42.6	43.0	3.0
610.540	26.6		35.4	46.0	---	35.4	10.6


Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).
 2) Sample of calculation at 30.000 MHz :
 Calculation of Margin : (40.0-29.5)dB = 10.5dB

Remarks : 1) Emission level was measured at the worst case condition.
 2) The test data include the estimated uncertainty of MAX.4dB in case.
 of Radiated Emission measurement.

Tested by : *Fumihiko Ooi*
 Engineer of TDK Chikumagawa Open Site

April 24, 1999


TDK EMC CENTER
EMISSION LEVEL [dBuV/m]

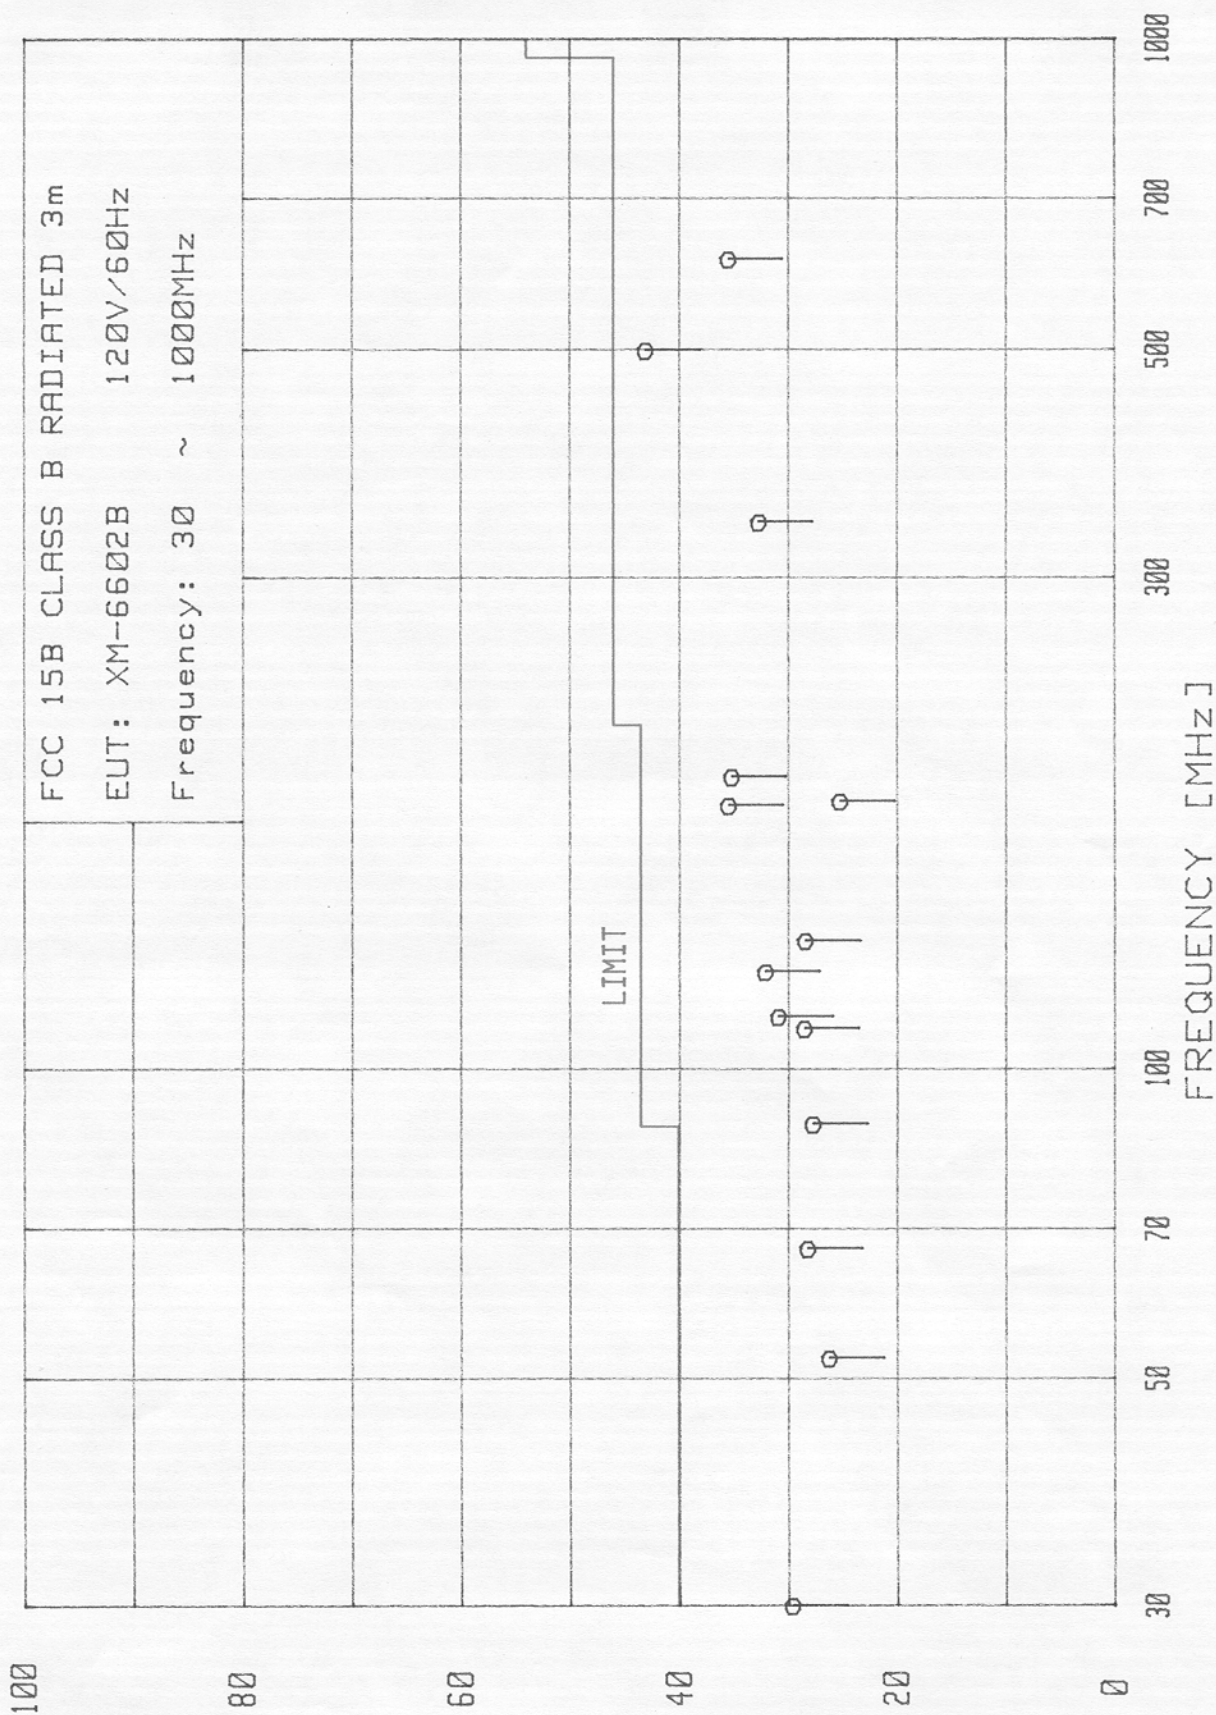

EUT's Test Arrangement of Radiation

Fig 1


Non matallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

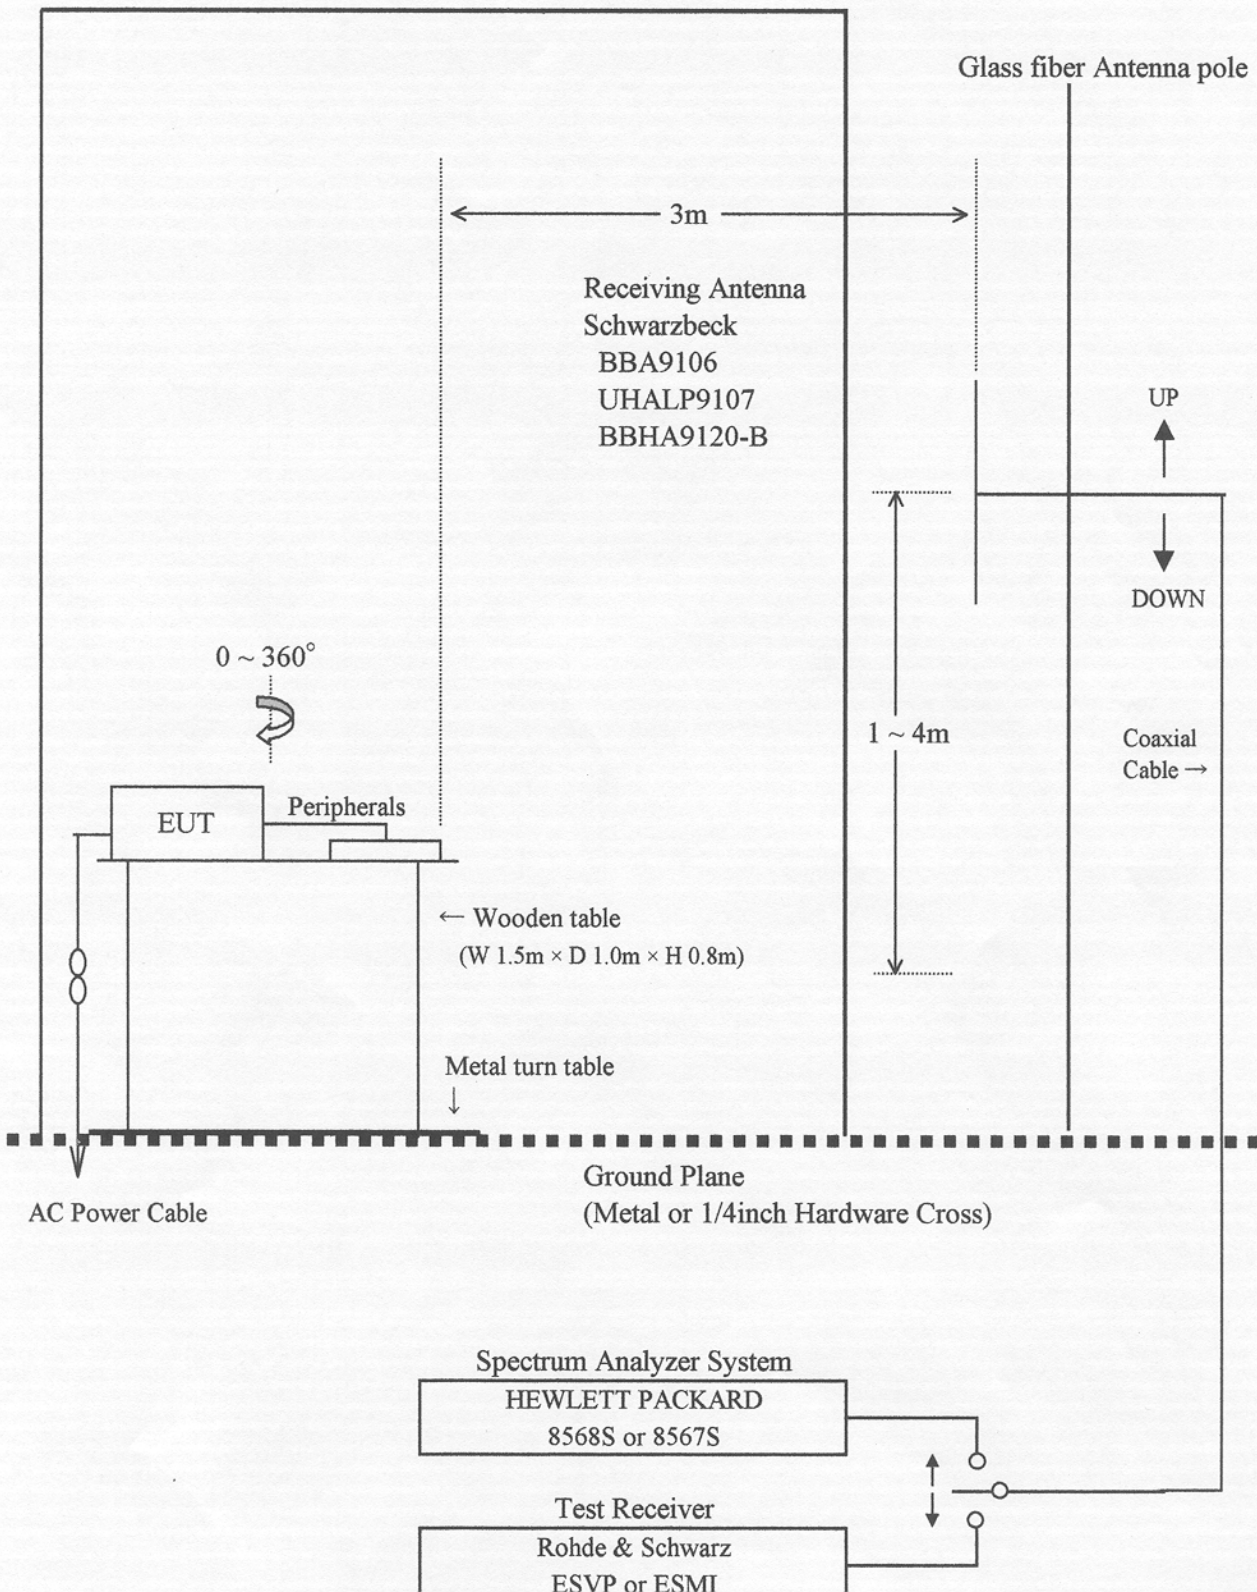

TDK EMC CENTER

EMISSION LEVEL [dBμV]


April 24, 1999

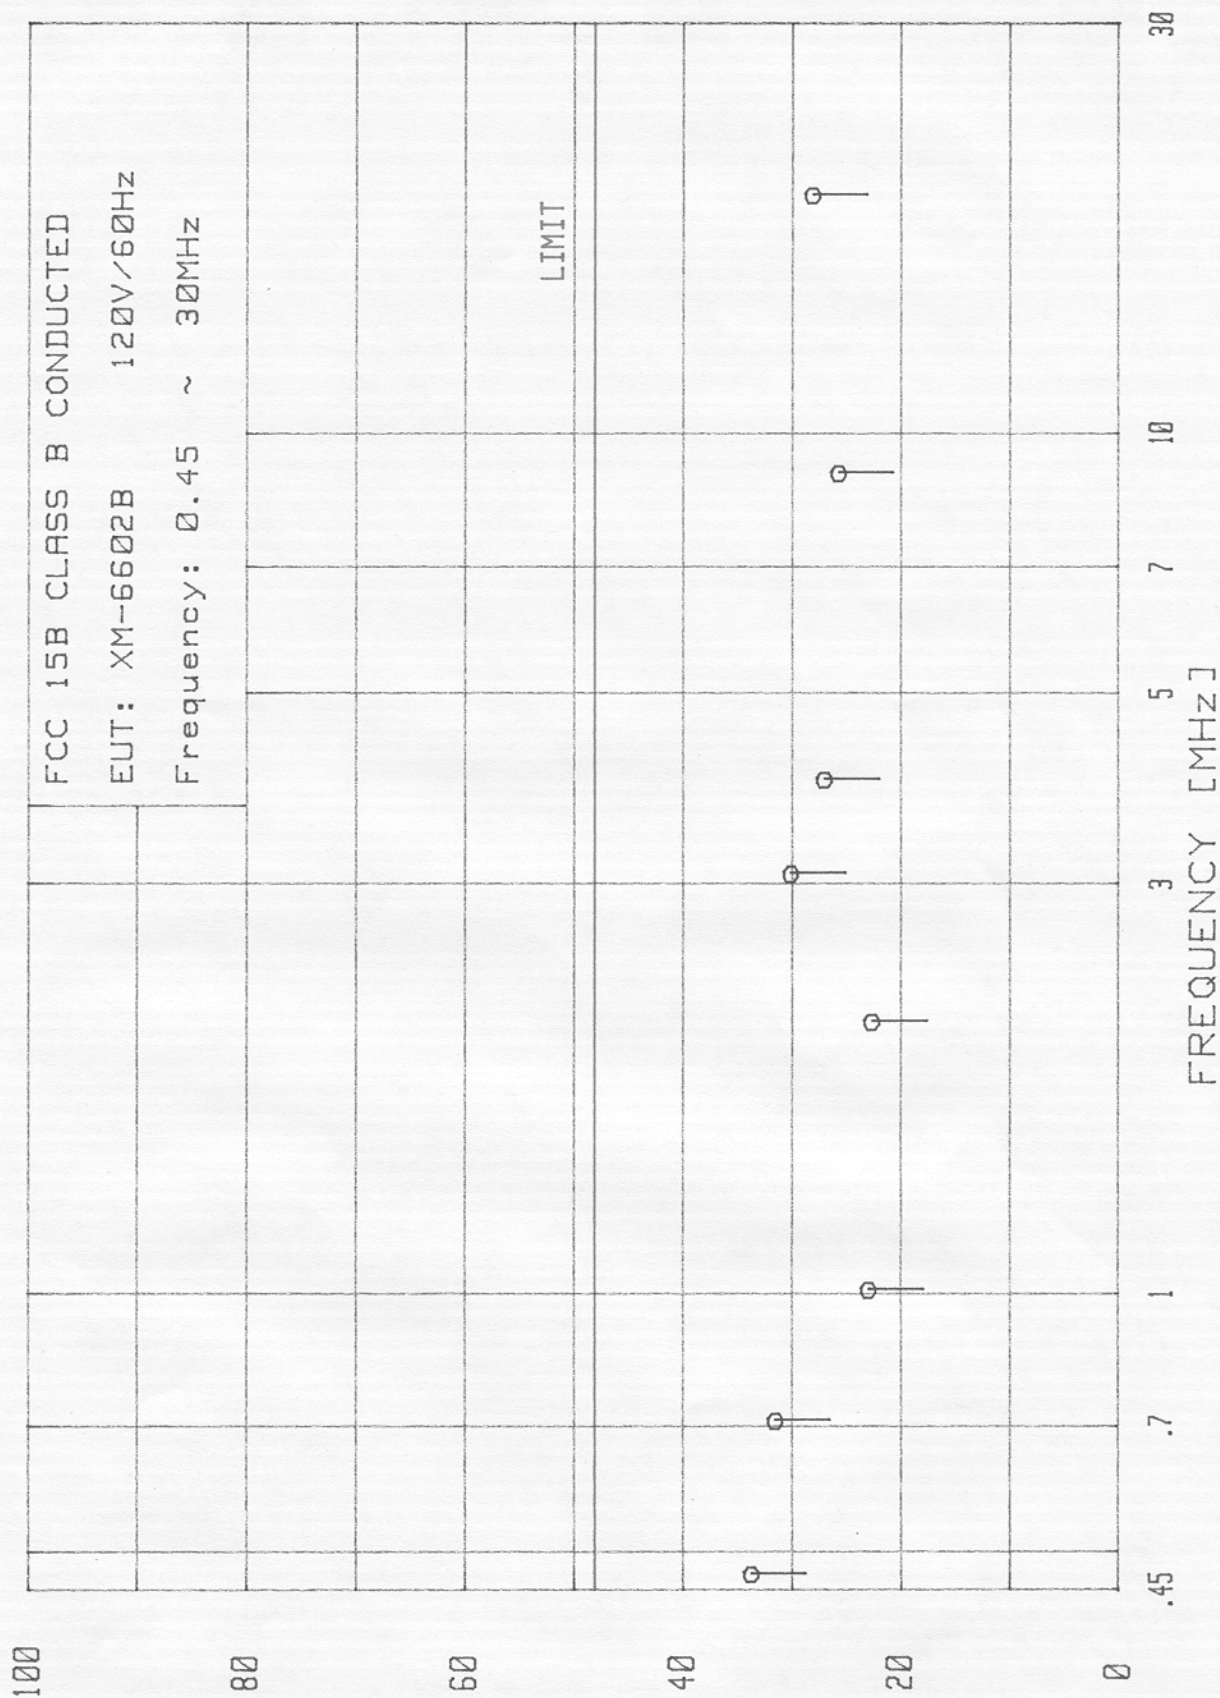

EUT's Test Arrangement of Conduction

Fig 2

Compact Anechoic Chamber (W 3.0m × D 7.0m × H 3.0m)

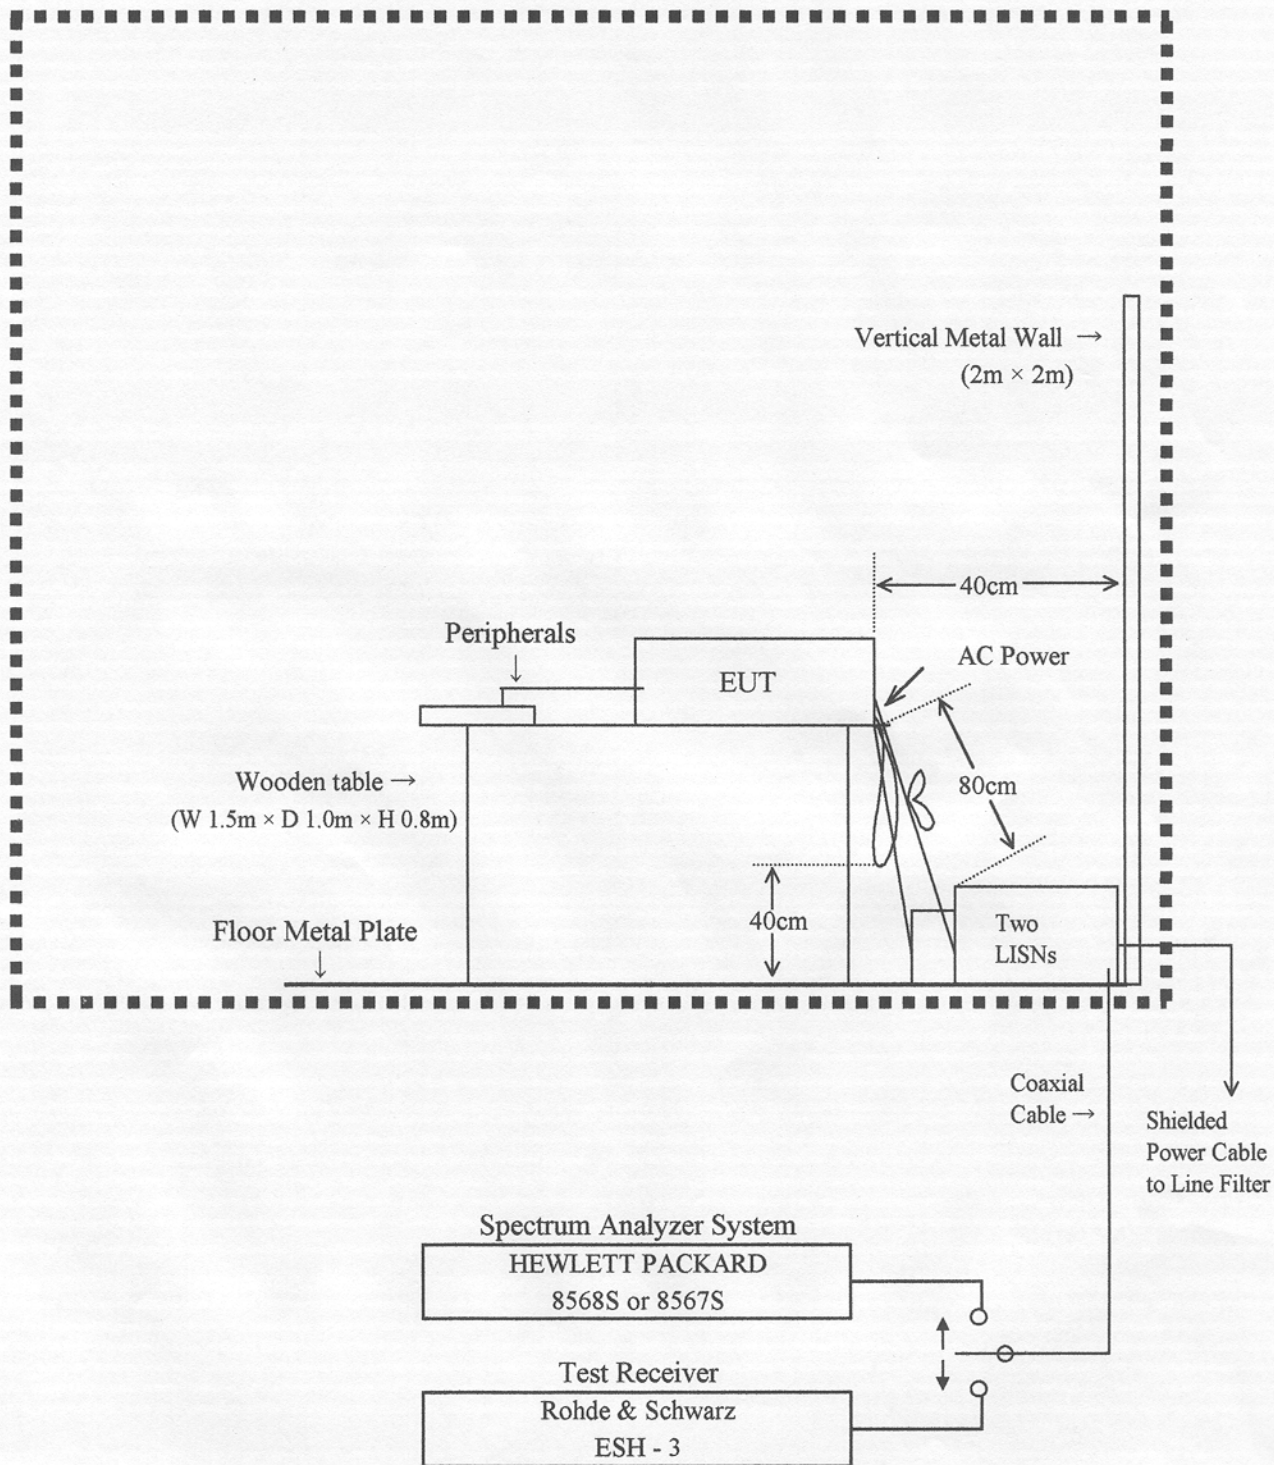

TDK Application No. : TDC-99-0405(1)
 Applicant : TOSHIBA CORPORATION
 Model No. : XM-6602B

Standard : FCC 15 , B
 FCC ID : CJ6AT99-041

MEASURING INSTRUMENT USED

TDK APPLICATION No. : TDC-99-0405(1)

☐	<u>Instrument</u>	<u>Model No.</u>	<u>Manufacturer</u>	<u>ID No.</u>	<u>Last Calibration Date</u>	<u>Period</u>
☐	Spectrum Analyzer	8568B	Hewlett-Packard	2445A00924	Mar. 1999	1 year
☐	RF-Preselector	85685A	Hewlett-Packard	2648A00481	Apr. 1998	1 year
☒	Field Strength Meter	ESVP	Rohde & Schwarz	879529/016	Apr. 1999	1 year
☒	Field Strength Meter	ESH-3	Rohde & Schwarz	872079/020	Apr. 1999	1 year
☐	Field Strength Meter	ESMI	Rohde & Schwarz	61360008		1 year
☐	Pre - Amplifier	8447D	Hewlett-Packard	2443A04539	Mar. 1999	1 year
☒	Biconical Antenna	BBA9106	Schwarzbeck	D-6901 No.2	Jun. 1998	1 year
☒	Log-Periodic Antenna	UHALP9107	Schwarzbeck	424/517	Jun. 1998	1 year
☐	Dipole Antenna	VHA9103	Schwarzbeck	D-6901 No.3	Mar. 1998	1 year
☐	Dipole Antenna	UHA9105	Schwarzbeck	29-14066	Mar. 1998	1 year
☒	LISN (50 μ H/50 Ω)	KNW-407	Kyoritsu Electrical Works	8-680-7	Apr. 1999	1 year
☒	LISN (50 μ H/50 Ω)	KNW-407	Kyoritsu Electrical Works	8-823-10	Apr. 1999	1 year
☐	LISN (50 μ H/50 Ω)	KNW-408	Kyoritsu Electrical Works	8-652-35	Apr. 1999	1 year
☐	LISN (50 μ H/50 Ω)	ESH2-Z5	Rohde & Schwarz	881 362/011	Apr. 1998	1 year
☒	Open Test Site	TCO-10	TDK Corporation	GD-0043-5	Oct. 1998	1 year
☒	Co-axial Cable	AK9513	Schwarzbeck	N-C007	May. 1998	1 year
☐	Co-axial Cable	8D-2V	Shinagawa Densen	N-C012	May. 1998	1 year
☐	Co-axial Cable	8D-2V	Shinagawa Densen	N-C013	May. 1998	1 year
☒	Co-axial Cable	8D-2V	Shinagawa Densen	N-C014	May. 1998	1 year
☒	Co-axial Cable	8D-2V	Shinagawa Densen	N-C016	May. 1998	1 year
☒	Co-axial Cable	5D-2W	Shinagawa Densen	N-C017	May. 1998	1 year
☒	RF Switch (EMI Interface)	MP59B	Anritsu	N-C025	May. 1998	1 year

Test Procedure of Radiated Emission :

Preliminary radiated measurements were performed at the measurement distance specified for compliance to determine the emission characteristics of the EUT based on ANSI C63.4-1992 Sec. 8. 3. 1. 1.

The EUT was set up in its typical configuration and operated in its various modes in order. For tabletop systems, cables or wires were manipulated within the range of likely configurations.

For each mode of operation required to be tested, the frequency spectrum was monitored. Antenna height, EUT azimuth, antenna polarization, and cable or wire placement were varied for exploration to produce the maximized emission relative to the limit. Antenna height was varied from 1m to 4m step by step with 1m step, and the EUT on the turn-table was rotated in 360° at each antenna height to detect maximized radiated emission while monitoring spectrum analyzer. The frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were recorded. At the frequency of suspect signal, interface cables positions were varied in order to determine the maximum emission level.

Furthermore, the EUT was rotated 360° and antenna height was varied to maximize the suspected highest amplitude signal.

In case that the EUT has multiple ports all of the same type, additional connecting cables were added to the EUT to determine the effect these cables have on emission from the EUT. The additional cables were added to the condition where the addition of another cables did not significantly affect the emission level, i. e. , varied less than 2dB provided that the emission level remained compliant.

Based on the preliminary radiated measurements, the one EUT configuration, cable or wire configuration, and mode of operation that produced the highest emission level relative to limit was selected for the final test.

The final test was performed and the frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were measured with CISPR QP mode and recorded.

TDK Application No. : TDC-99-0405(1)
 Applicant : TOSHIBA CORPORATION
 Model No. : XM-6602B

Standard : FCC 15 , B
 FCC ID : CJ6AT99-041

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : April 24, 1999
 Temp. : 15 °C ; Humi. : 62 %

Test Receiver : Rohde & Schwarz ESVP
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz External Attenuator : none

Description of Equipment : CD-ROM
 Model No. : XM-6602B ; Type : Desk Top

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.2,3 and 12.

2) EUT Grounding : None.

3) Operating Condition : Running with the program prepared by the applicant.

(1) CD-ROM Drive (EUT) : Random Data Read. (2) Color Computer Display : Displayed the "H" Characters.

(3) Printer : Printing the "H" Characters.

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB μ V/m)		Limit (dB μ V/m)	Emission Level at 3m (dB μ V/m)		Margin (dB)
		Hori.	Ver.		Hori.	Ver.	
30.000	20.0		29.5	40.0	---	29.5	10.5
52.300	11.9	19.8	26.1	40.0	19.8	26.1	13.9
66.900	8.2		28.1	40.0	---	28.1	11.9
88.400	9.8		27.6	43.5	---	27.6	15.9
109.350	13.7		28.4	43.5	---	28.4	15.1
112.300	14.1	30.8		43.5	30.8	---	12.7
124.200	15.6	32.0	29.3	43.5	32.0	29.3	11.5
133.200	16.3		28.3	43.5	---	28.3	15.2
180.090	18.7	35.4		43.5	35.4	---	8.1
181.740	18.8		25.1	43.5	---	25.1	18.4
192.090	19.3	35.1		43.5	35.1	---	8.4
339.190	20.7	32.6	32.1	46.0	32.6	32.1	13.4
498.970	24.0	42.6	43.0	46.0	42.6	43.0	3.0
610.540	26.6		35.4	46.0	---	35.4	10.6


Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).
 2) Sample of calculation at 30.000 MHz :
 Calculation of Margin : (40.0-29.5)dB = 10.5dB

Remarks : 1) Emission level was measured at the worst case condition.
 2) The test data include the estimated uncertainty of MAX.4dB in case.
 of Radiated Emission measurement.

Tested by : *Fumihiko Ooi*
 Engineer of TDK Chikumagawa Open Site

April 24, 1999


TDK EMC CENTER
EMISSION LEVEL [dBuV/m]

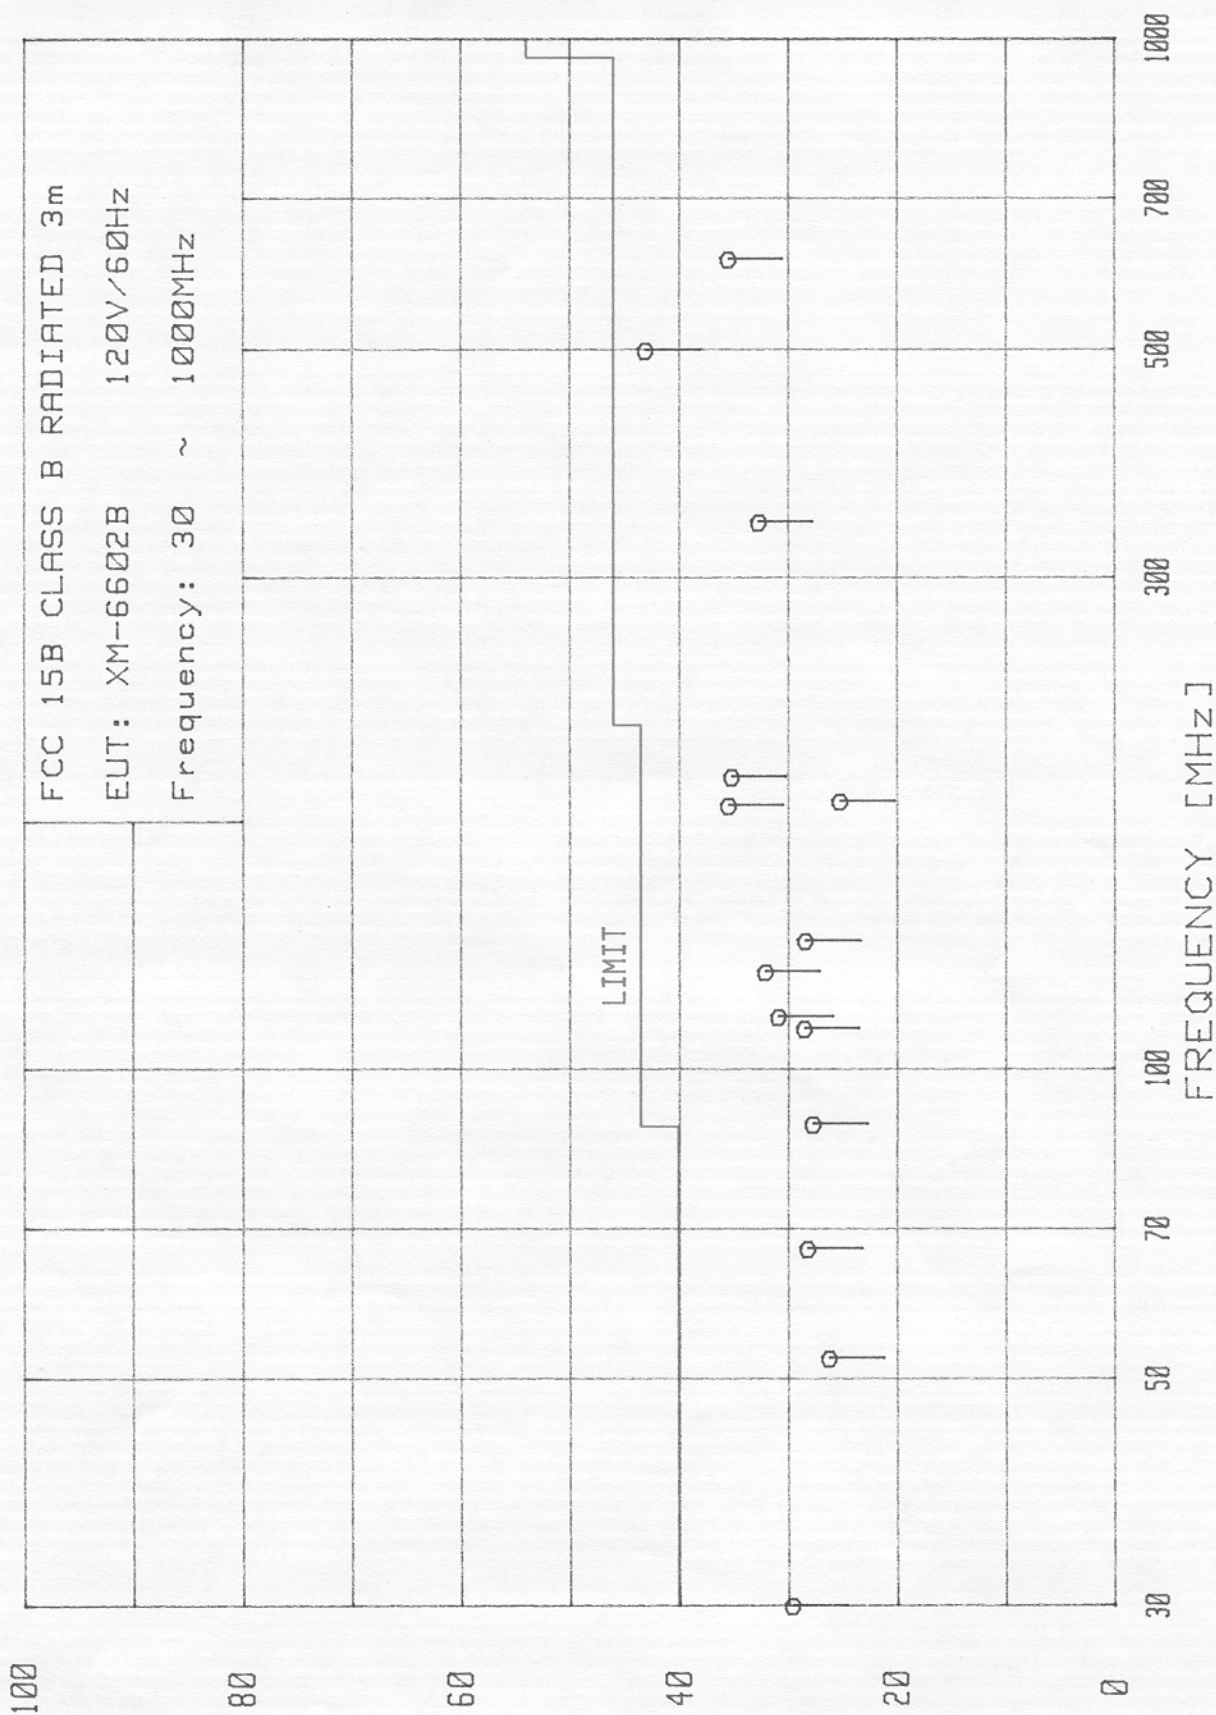

EUT's Test Arrangement of Radiation

Fig 1


Non matallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

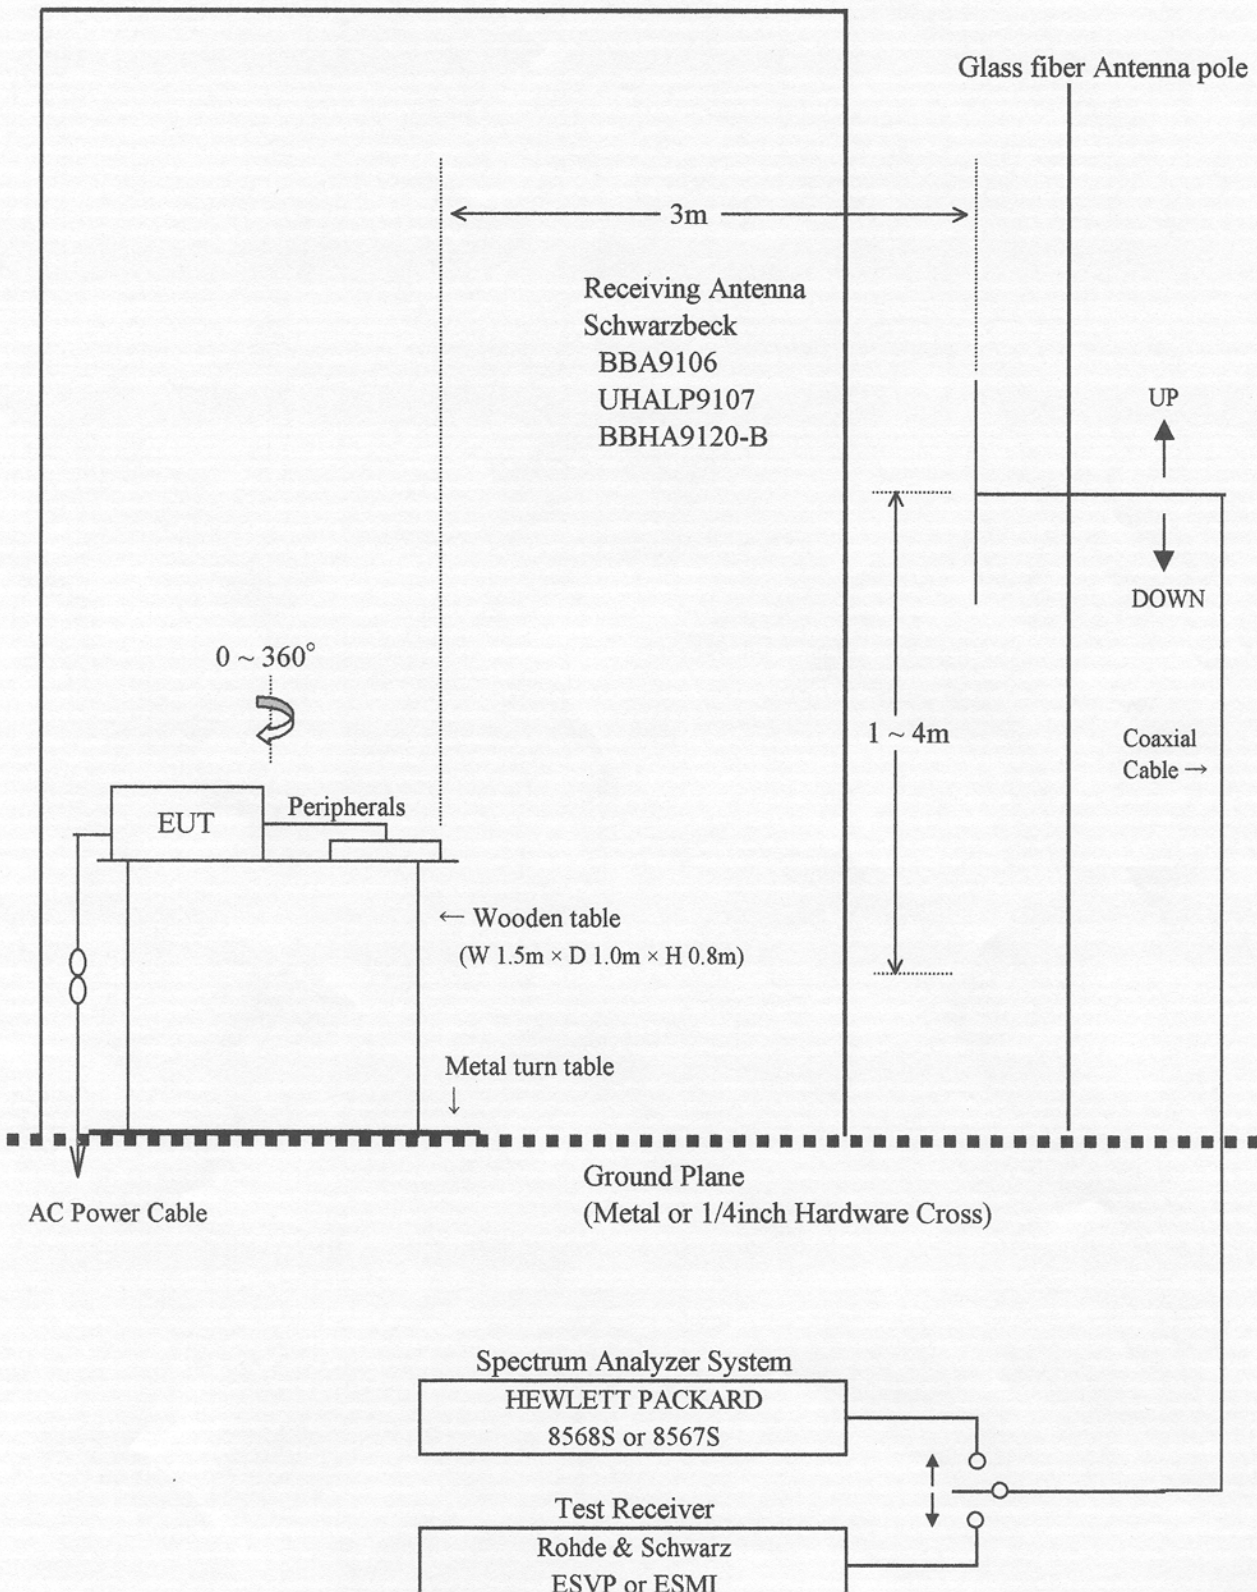

TDK EMC CENTER

EMISSION LEVEL [dBμV]


April 24, 1999

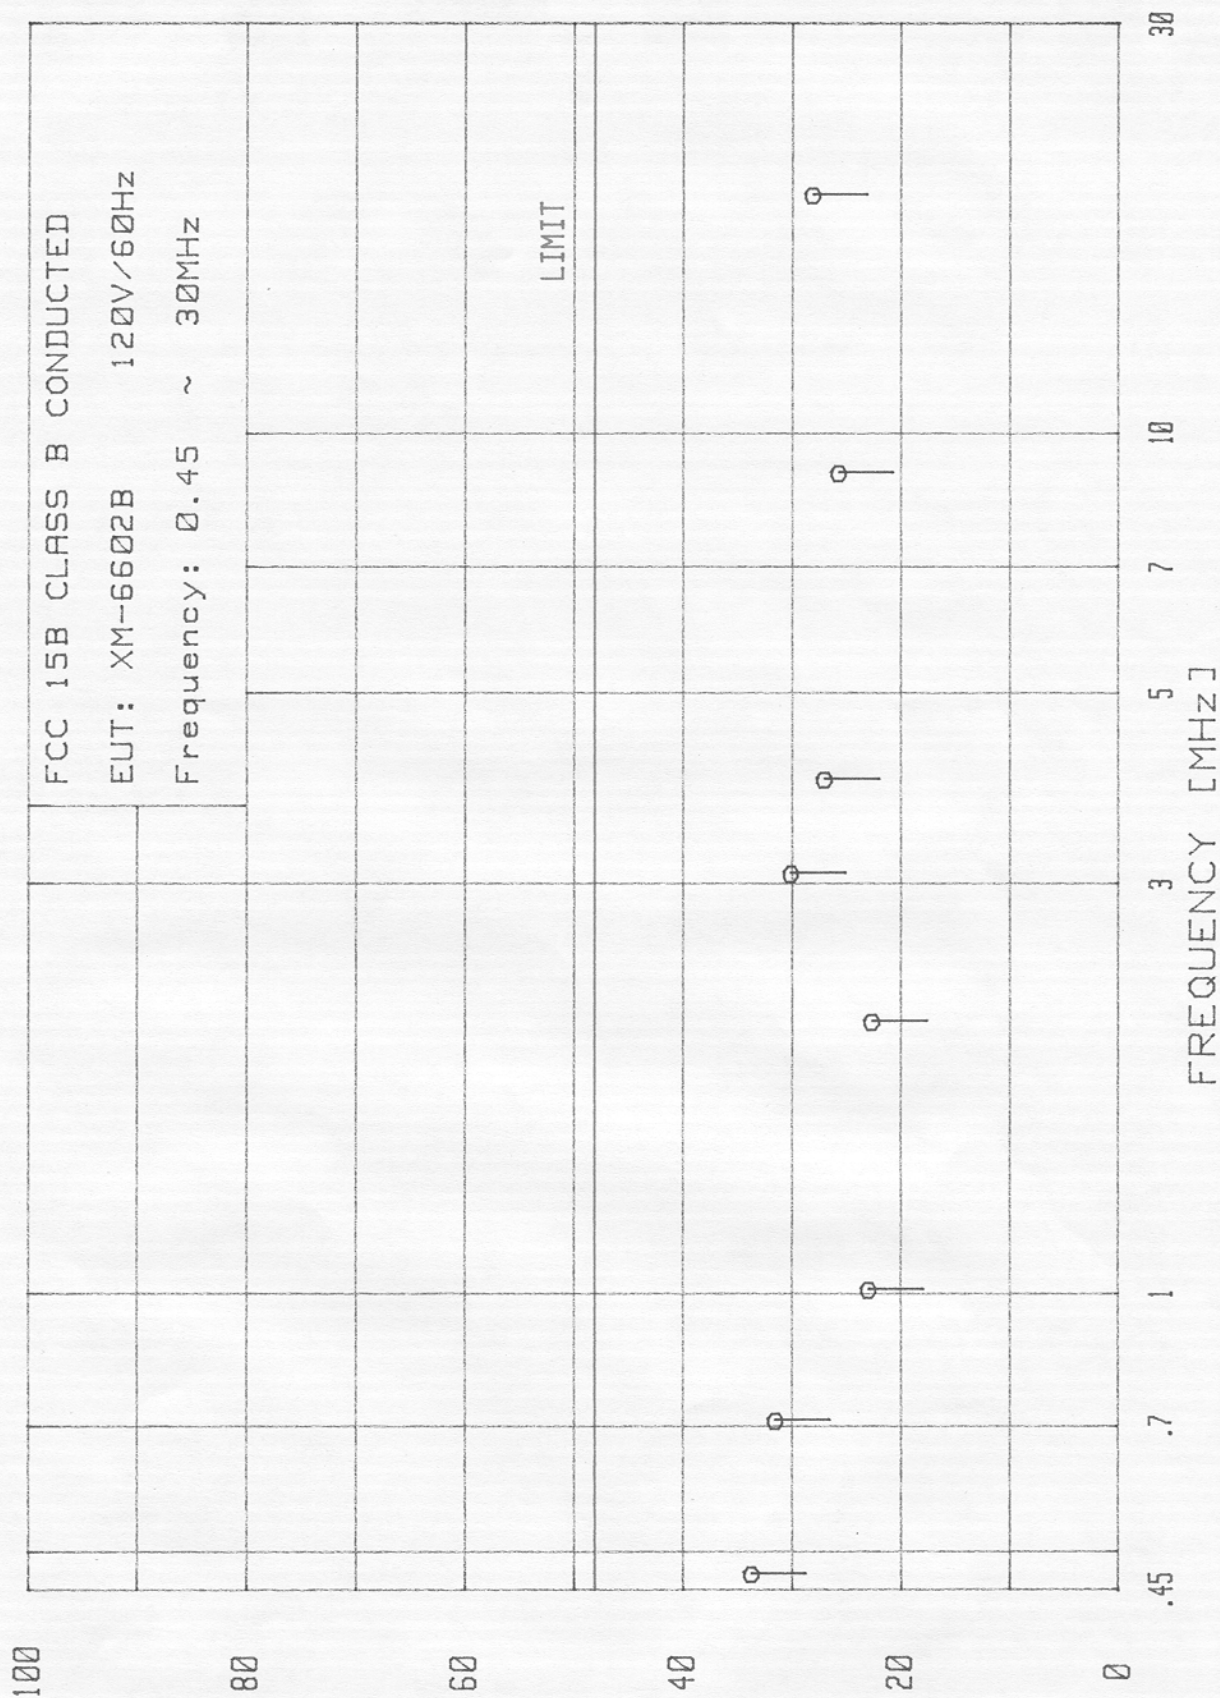

EUT's Test Arrangement of Conduction

Fig 2

Compact Anechoic Chamber (W 3.0m × D 7.0m × H 3.0m)

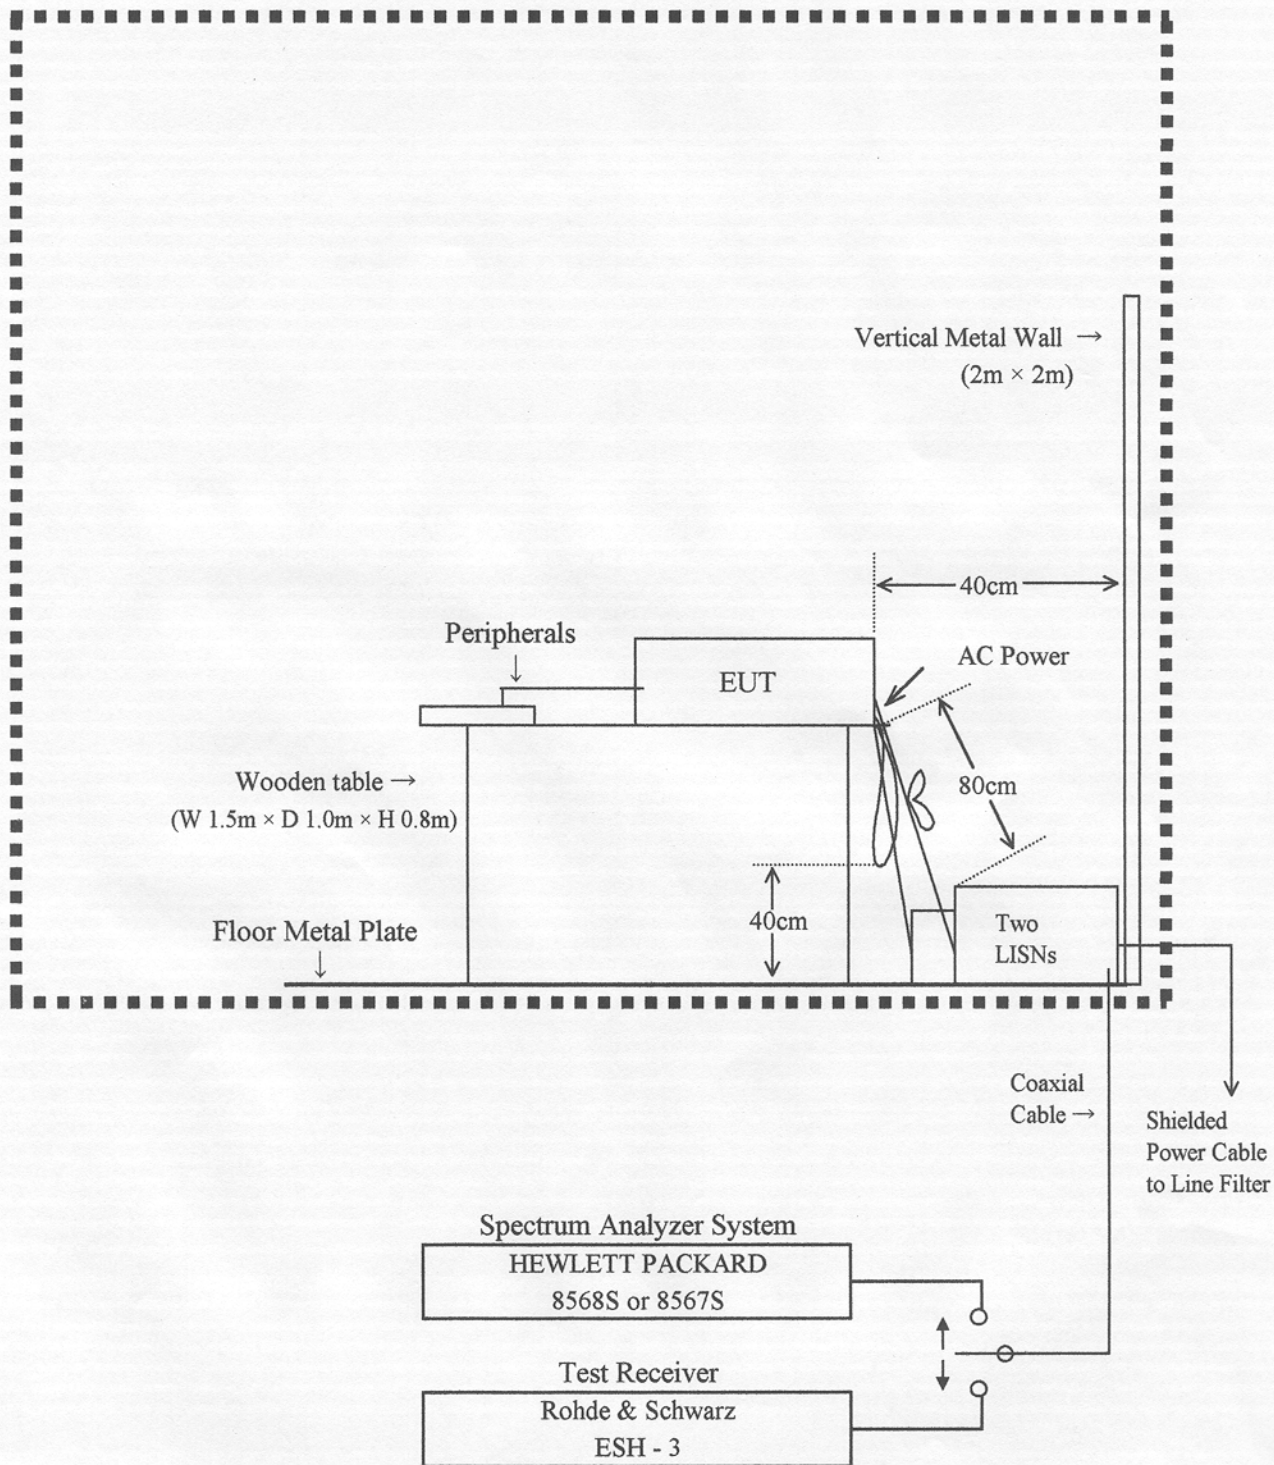

Test Procedure of Radiated Emission :

Preliminary radiated measurements were performed at the measurement distance specified for compliance to determine the emission characteristics of the EUT based on ANSI C63.4-1992 Sec. 8. 3. 1. 1.

The EUT was set up in its typical configuration and operated in its various modes in order. For tabletop systems, cables or wires were manipulated within the range of likely configurations.

For each mode of operation required to be tested, the frequency spectrum was monitored. Antenna height, EUT azimuth, antenna polarization, and cable or wire placement were varied for exploration to produce the maximized emission relative to the limit. Antenna height was varied from 1m to 4m step by step with 1m step, and the EUT on the turn-table was rotated in 360° at each antenna height to detect maximized radiated emission while monitoring spectrum analyzer. The frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were recorded. At the frequency of suspect signal, interface cables positions were varied in order to determine the maximum emission level.

Furthermore, the EUT was rotated 360° and antenna height was varied to maximize the suspected highest amplitude signal.

In case that the EUT has multiple ports all of the same type, additional connecting cables were added to the EUT to determine the effect these cables have on emission from the EUT. The additional cables were added to the condition where the addition of another cables did not significantly affect the emission level, i. e. , varied less than 2dB provided that the emission level remained compliant.

Based on the preliminary radiated measurements, the one EUT configuration, cable or wire configuration, and mode of operation that produced the highest emission level relative to limit was selected for the final test.

The final test was performed and the frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were measured with CISPR QP mode and recorded.

TDK Application No. : TDC-99-0405(1)
 Applicant : TOSHIBA CORPORATION
 Model No. : XM-6602B

Standard : FCC 15 , B
 FCC ID : CJ6AT99-041

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : April 24, 1999
 Temp. : 15 °C ; Humi. : 62 %

Test Receiver : Rohde & Schwarz ESVP
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz External Attenuator : none

Description of Equipment : CD-ROM
 Model No. : XM-6602B ; Type : Desk Top

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.2,3 and 12.

2) EUT Grounding : None.

3) Operating Condition : Running with the program prepared by the applicant.

(1) CD-ROM Drive (EUT) : Random Data Read. (2) Color Computer Display : Displayed the "H" Characters.

(3) Printer : Printing the "H" Characters.

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB μ V/m)		Limit (dB μ V/m)	Emission Level at 3m (dB μ V/m)		Margin (dB)
		Hori.	Ver.		Hori.	Ver.	
30.000	20.0		29.5	40.0	---	29.5	10.5
52.300	11.9	19.8	26.1	40.0	19.8	26.1	13.9
66.900	8.2		28.1	40.0	---	28.1	11.9
88.400	9.8		27.6	43.5	---	27.6	15.9
109.350	13.7		28.4	43.5	---	28.4	15.1
112.300	14.1	30.8		43.5	30.8	---	12.7
124.200	15.6	32.0	29.3	43.5	32.0	29.3	11.5
133.200	16.3		28.3	43.5	---	28.3	15.2
180.090	18.7	35.4		43.5	35.4	---	8.1
181.740	18.8		25.1	43.5	---	25.1	18.4
192.090	19.3	35.1		43.5	35.1	---	8.4
339.190	20.7	32.6	32.1	46.0	32.6	32.1	13.4
498.970	24.0	42.6	43.0	46.0	42.6	43.0	3.0
610.540	26.6		35.4	46.0	---	35.4	10.6


Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).
 2) Sample of calculation at 30.000 MHz :
 Calculation of Margin : (40.0-29.5)dB = 10.5dB

Remarks : 1) Emission level was measured at the worst case condition.
 2) The test data include the estimated uncertainty of MAX.4dB in case.
 of Radiated Emission measurement.

Tested by : *Fumihiko Ooi*
 Engineer of TDK Chikumagawa Open Site

April 24, 1999


TDK EMC CENTER
EMISSION LEVEL [dBuV/m]

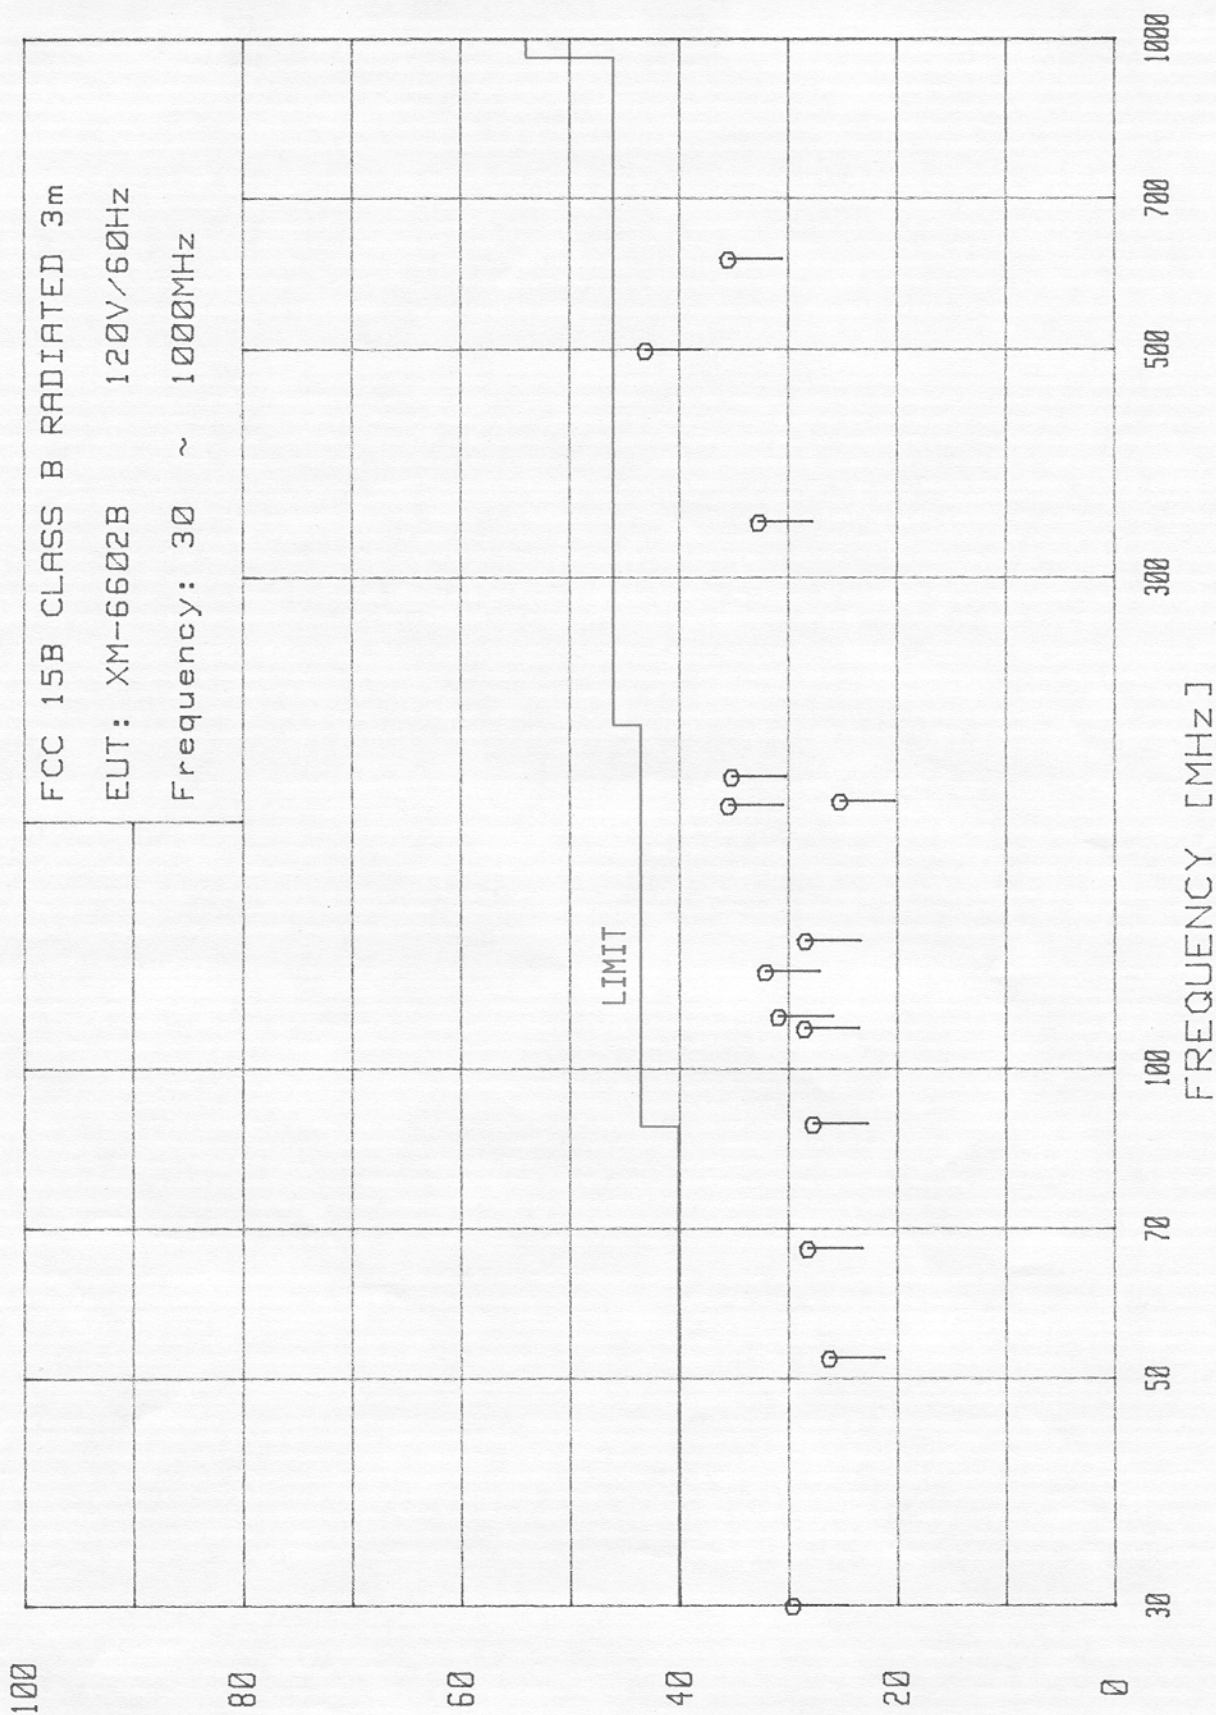

EUT's Test Arrangement of Radiation

Fig 1


Non matallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

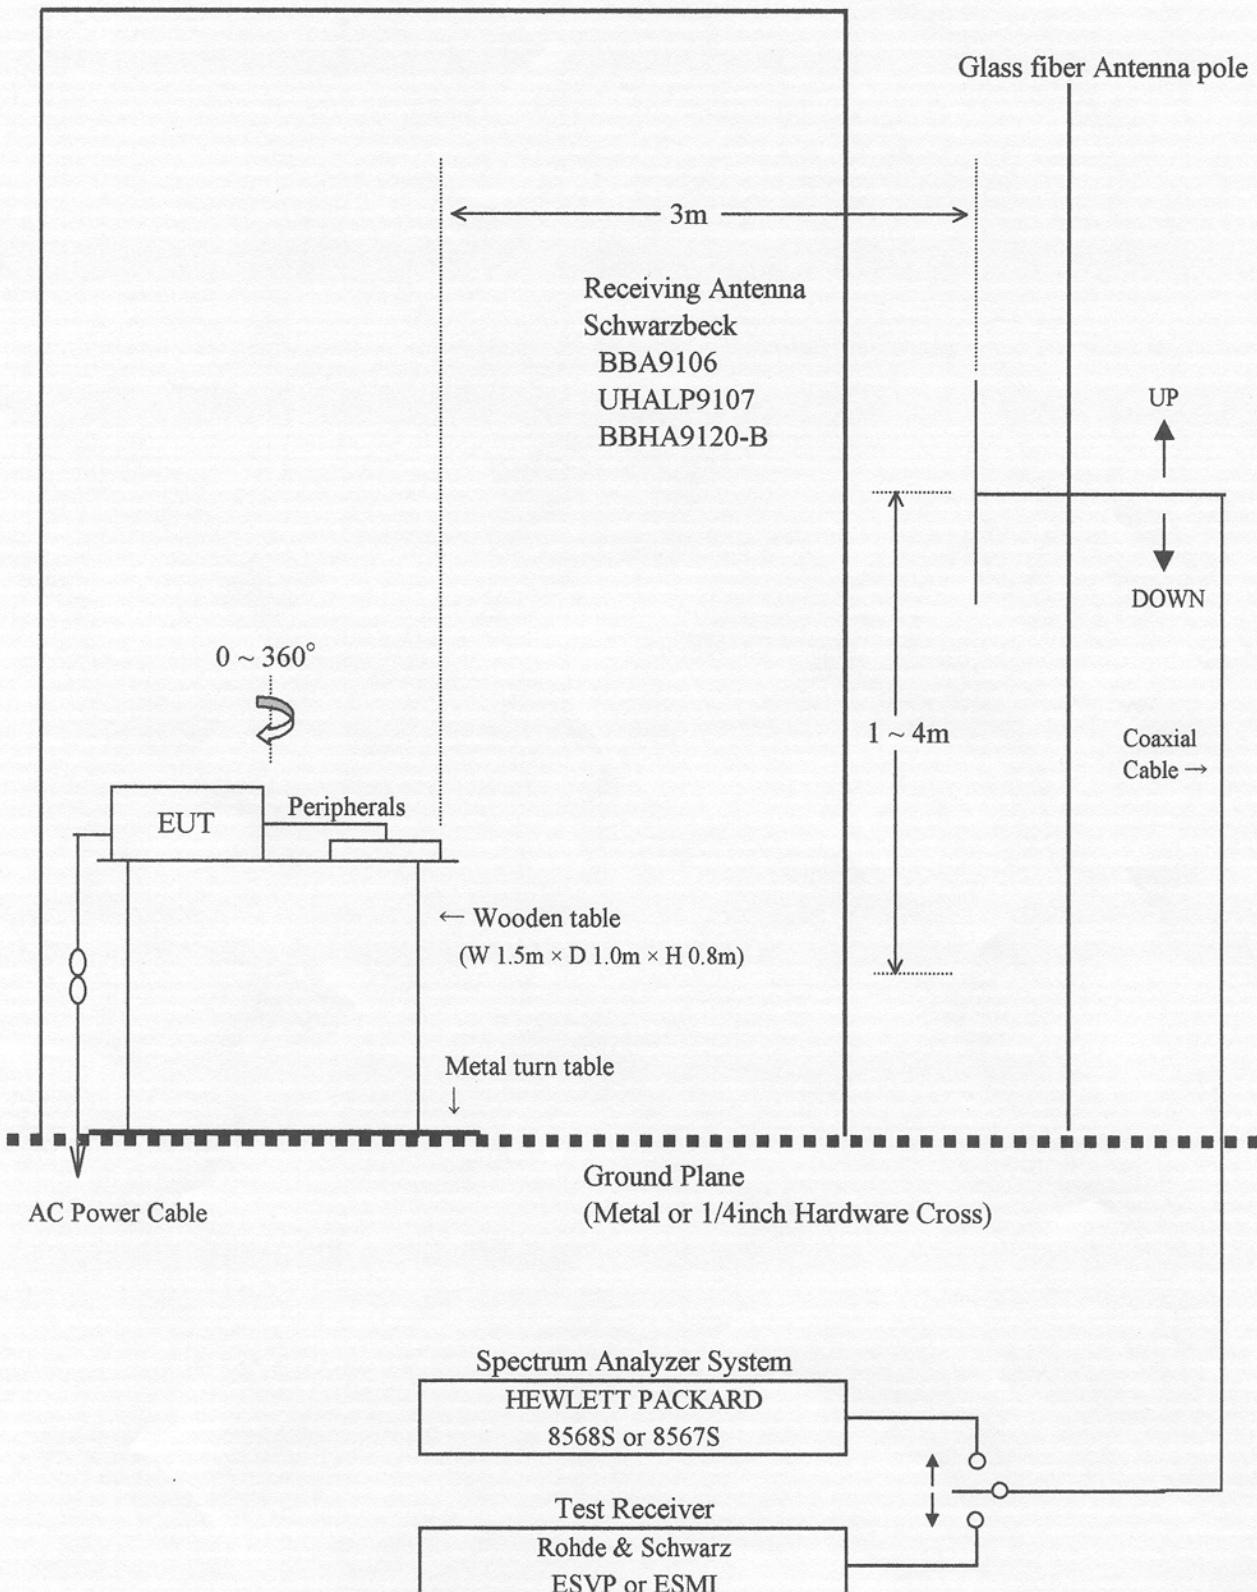

TDK EMC CENTER

EMISSION LEVEL [dBμV]

April 24, 1999

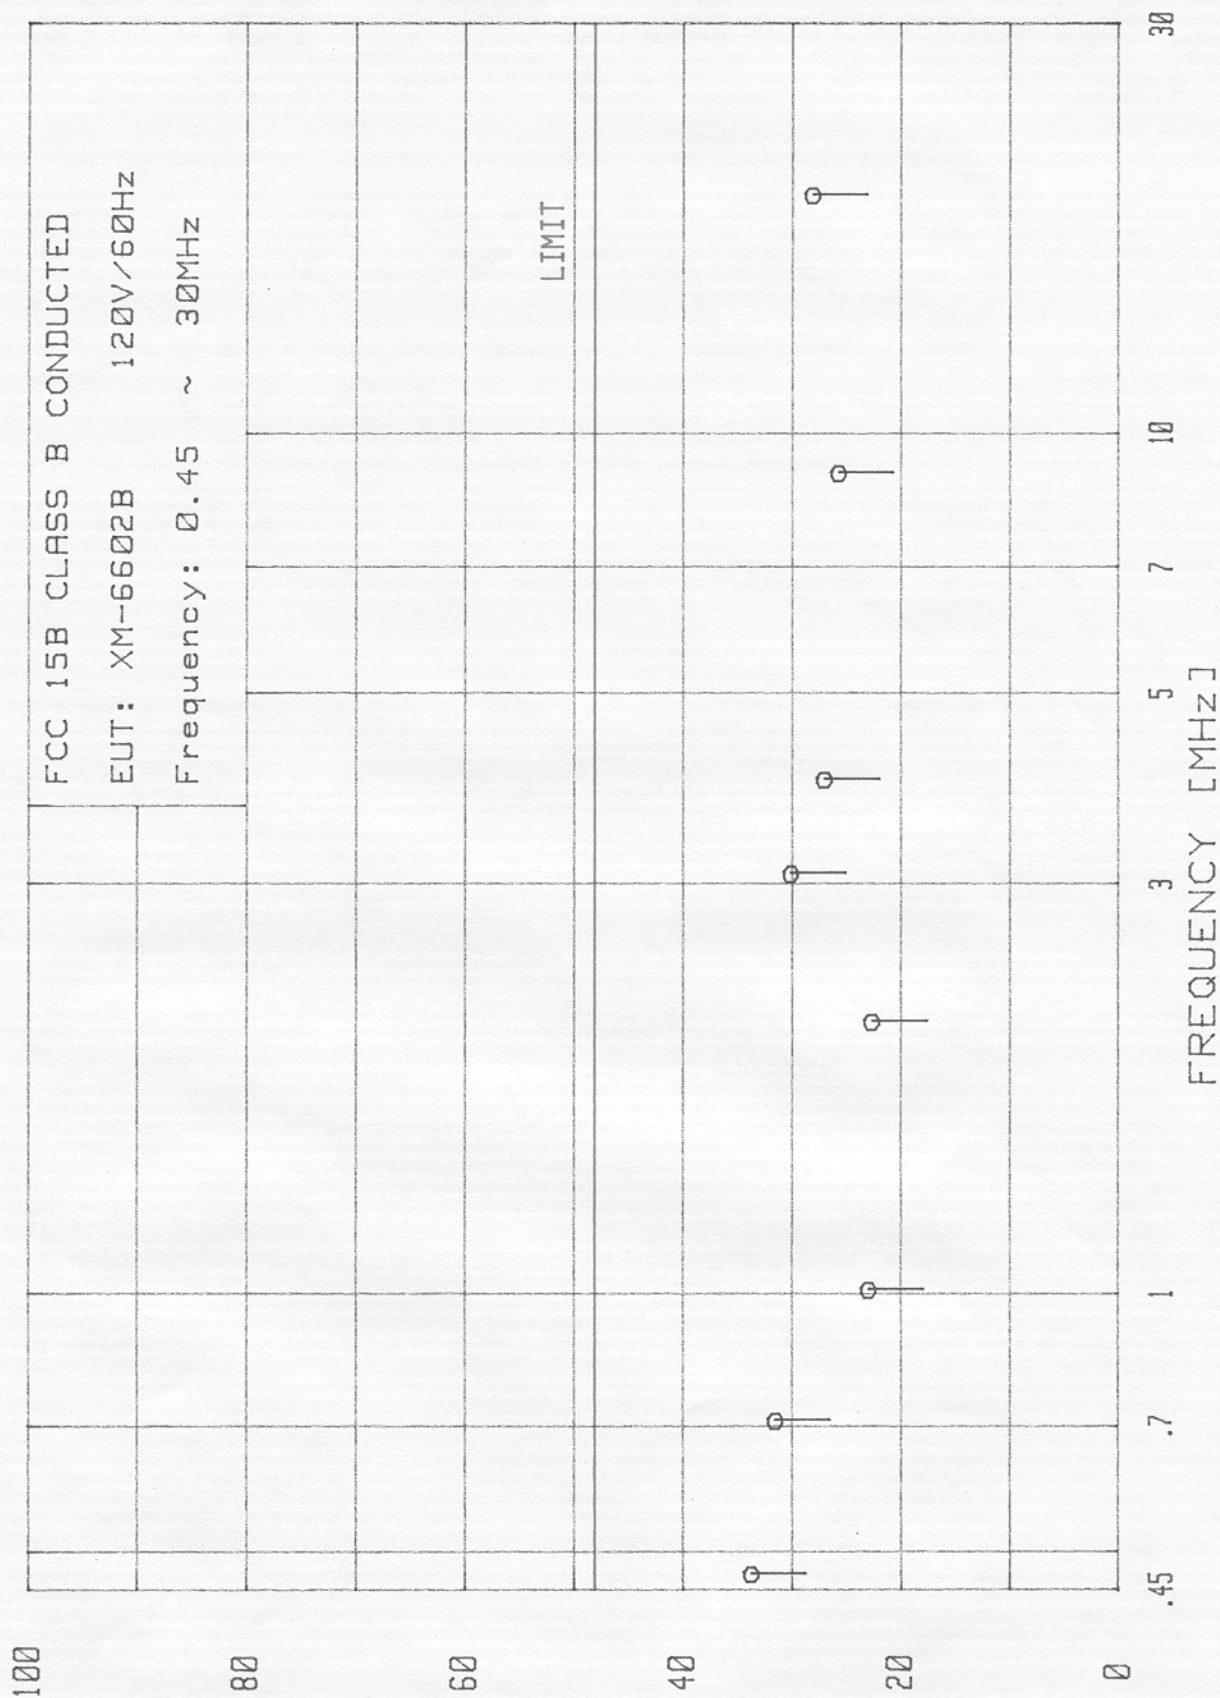

Test Procedure of Radiated Emission :

Preliminary radiated measurements were performed at the measurement distance specified for compliance to determine the emission characteristics of the EUT based on ANSI C63.4-1992 Sec. 8. 3. 1. 1.

The EUT was set up in its typical configuration and operated in its various modes in order. For tabletop systems, cables or wires were manipulated within the range of likely configurations.

For each mode of operation required to be tested, the frequency spectrum was monitored. Antenna height, EUT azimuth, antenna polarization, and cable or wire placement were varied for exploration to produce the maximized emission relative to the limit. Antenna height was varied from 1m to 4m step by step with 1m step, and the EUT on the turn-table was rotated in 360° at each antenna height to detect maximized radiated emission while monitoring spectrum analyzer. The frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were recorded. At the frequency of suspect signal, interface cables positions were varied in order to determine the maximum emission level.

Furthermore, the EUT was rotated 360° and antenna height was varied to maximize the suspected highest amplitude signal.

In case that the EUT has multiple ports all of the same type, additional connecting cables were added to the EUT to determine the effect these cables have on emission from the EUT. The additional cables were added to the condition where the addition of another cables did not significantly affect the emission level, i. e. , varied less than 2dB provided that the emission level remained compliant.

Based on the preliminary radiated measurements, the one EUT configuration, cable or wire configuration, and mode of operation that produced the highest emission level relative to limit was selected for the final test.

The final test was performed and the frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were measured with CISPR QP mode and recorded.

TDK Application No. : TDC-99-0405(1)
 Applicant : TOSHIBA CORPORATION
 Model No. : XM-6602B

Standard : FCC 15 , B
 FCC ID : CJ6AT99-041

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : April 24, 1999
 Temp. : 15 °C ; Humi. : 62 %

Test Receiver : Rohde & Schwarz ESVP
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz External Attenuator : none

Description of Equipment : CD-ROM
 Model No. : XM-6602B ; Type : Desk Top

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.2,3 and 12.

2) EUT Grounding : None.

3) Operating Condition : Running with the program prepared by the applicant.

(1) CD-ROM Drive (EUT) : Random Data Read. (2) Color Computer Display : Displayed the "H" Characters.

(3) Printer : Printing the "H" Characters.

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB μ V/m)		Limit (dB μ V/m)	Emission Level at 3m (dB μ V/m)		Margin (dB)
		Hori.	Ver.		Hori.	Ver.	
30.000	20.0		29.5	40.0	---	29.5	10.5
52.300	11.9	19.8	26.1	40.0	19.8	26.1	13.9
66.900	8.2		28.1	40.0	---	28.1	11.9
88.400	9.8		27.6	43.5	---	27.6	15.9
109.350	13.7		28.4	43.5	---	28.4	15.1
112.300	14.1	30.8		43.5	30.8	---	12.7
124.200	15.6	32.0	29.3	43.5	32.0	29.3	11.5
133.200	16.3		28.3	43.5	---	28.3	15.2
180.090	18.7	35.4		43.5	35.4	---	8.1
181.740	18.8		25.1	43.5	---	25.1	18.4
192.090	19.3	35.1		43.5	35.1	---	8.4
339.190	20.7	32.6	32.1	46.0	32.6	32.1	13.4
498.970	24.0	42.6	43.0	46.0	42.6	43.0	3.0
610.540	26.6		35.4	46.0	---	35.4	10.6


Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).
 2) Sample of calculation at 30.000 MHz :
 Calculation of Margin : (40.0-29.5)dB = 10.5dB

Remarks : 1) Emission level was measured at the worst case condition.
 2) The test data include the estimated uncertainty of MAX.4dB in case.
 of Radiated Emission measurement.

Tested by : *Fumihiko Ooi*
 Engineer of TDK Chikumagawa Open Site

April 24, 1999


TDK EMC CENTER
EMISSION LEVEL [dBuV/m]

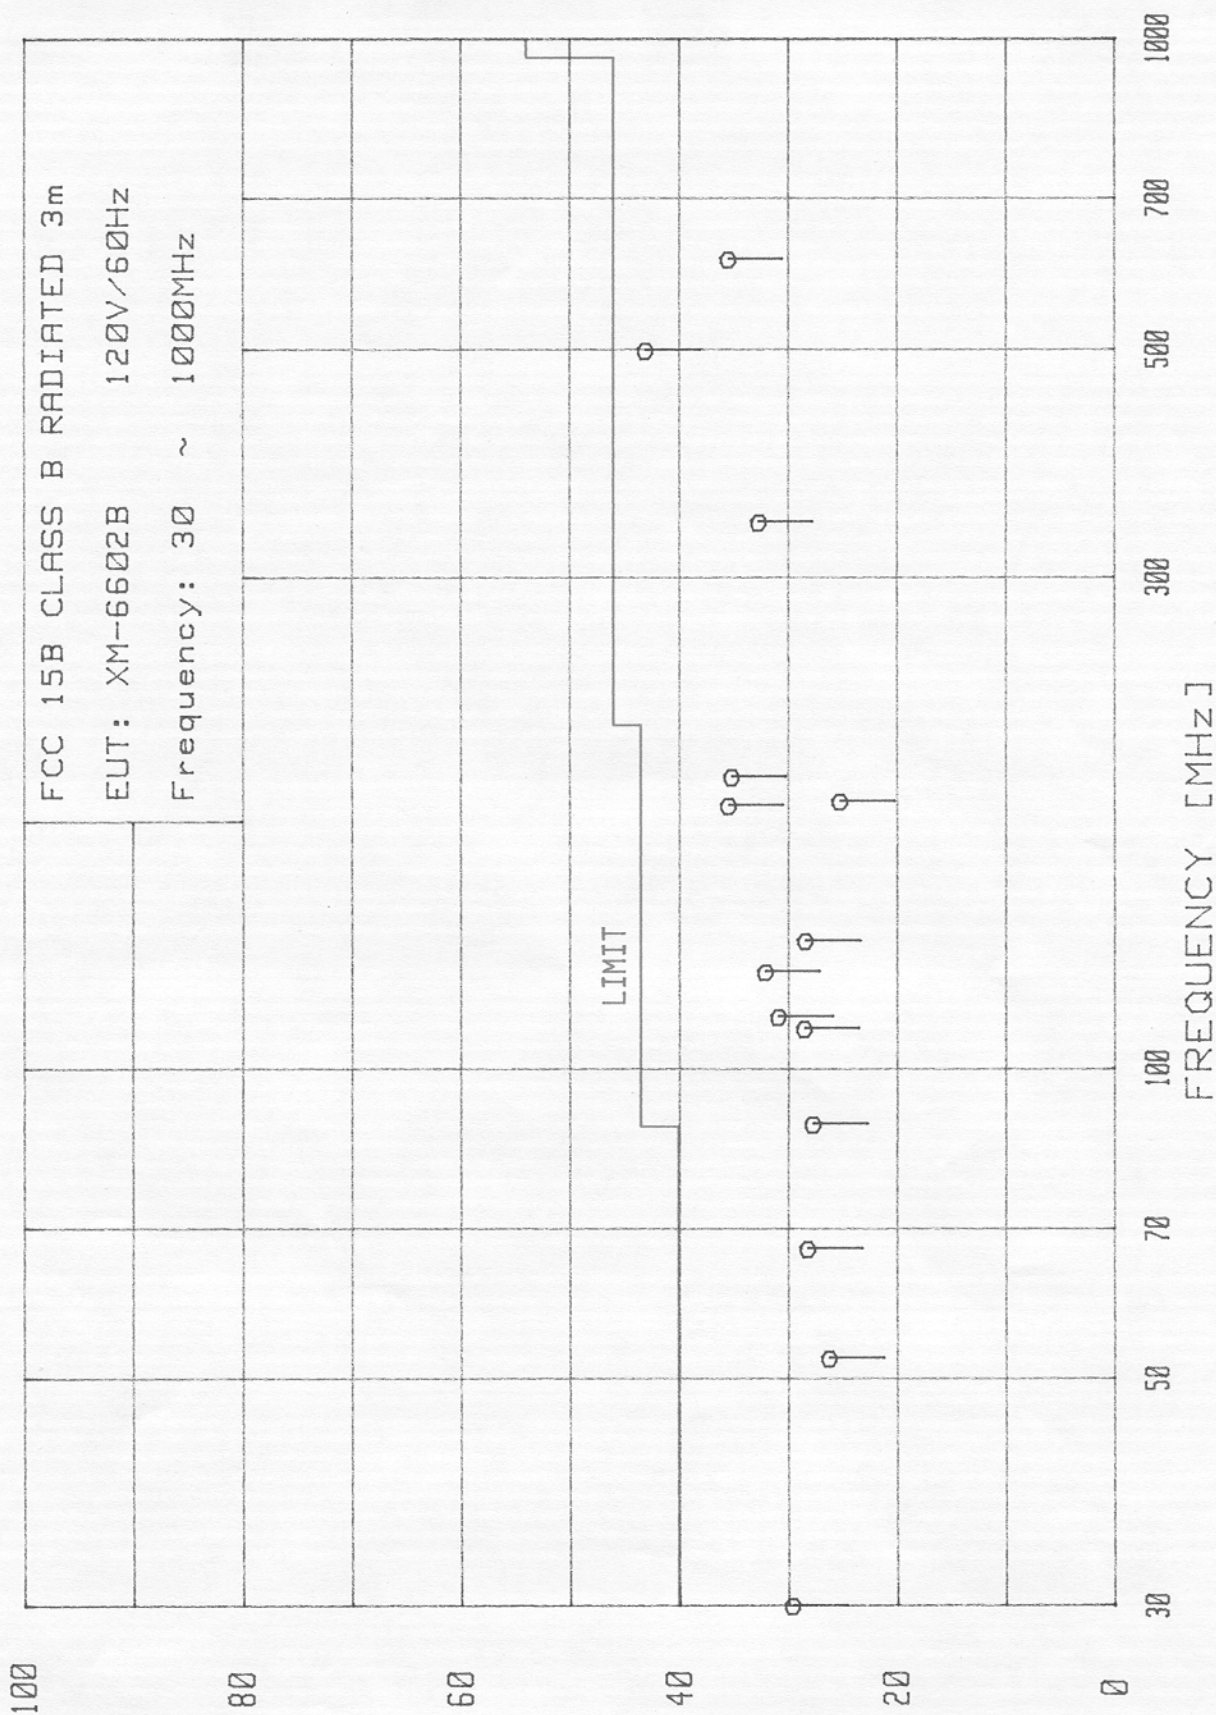

EUT's Test Arrangement of Radiation

Fig 1

Non matallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

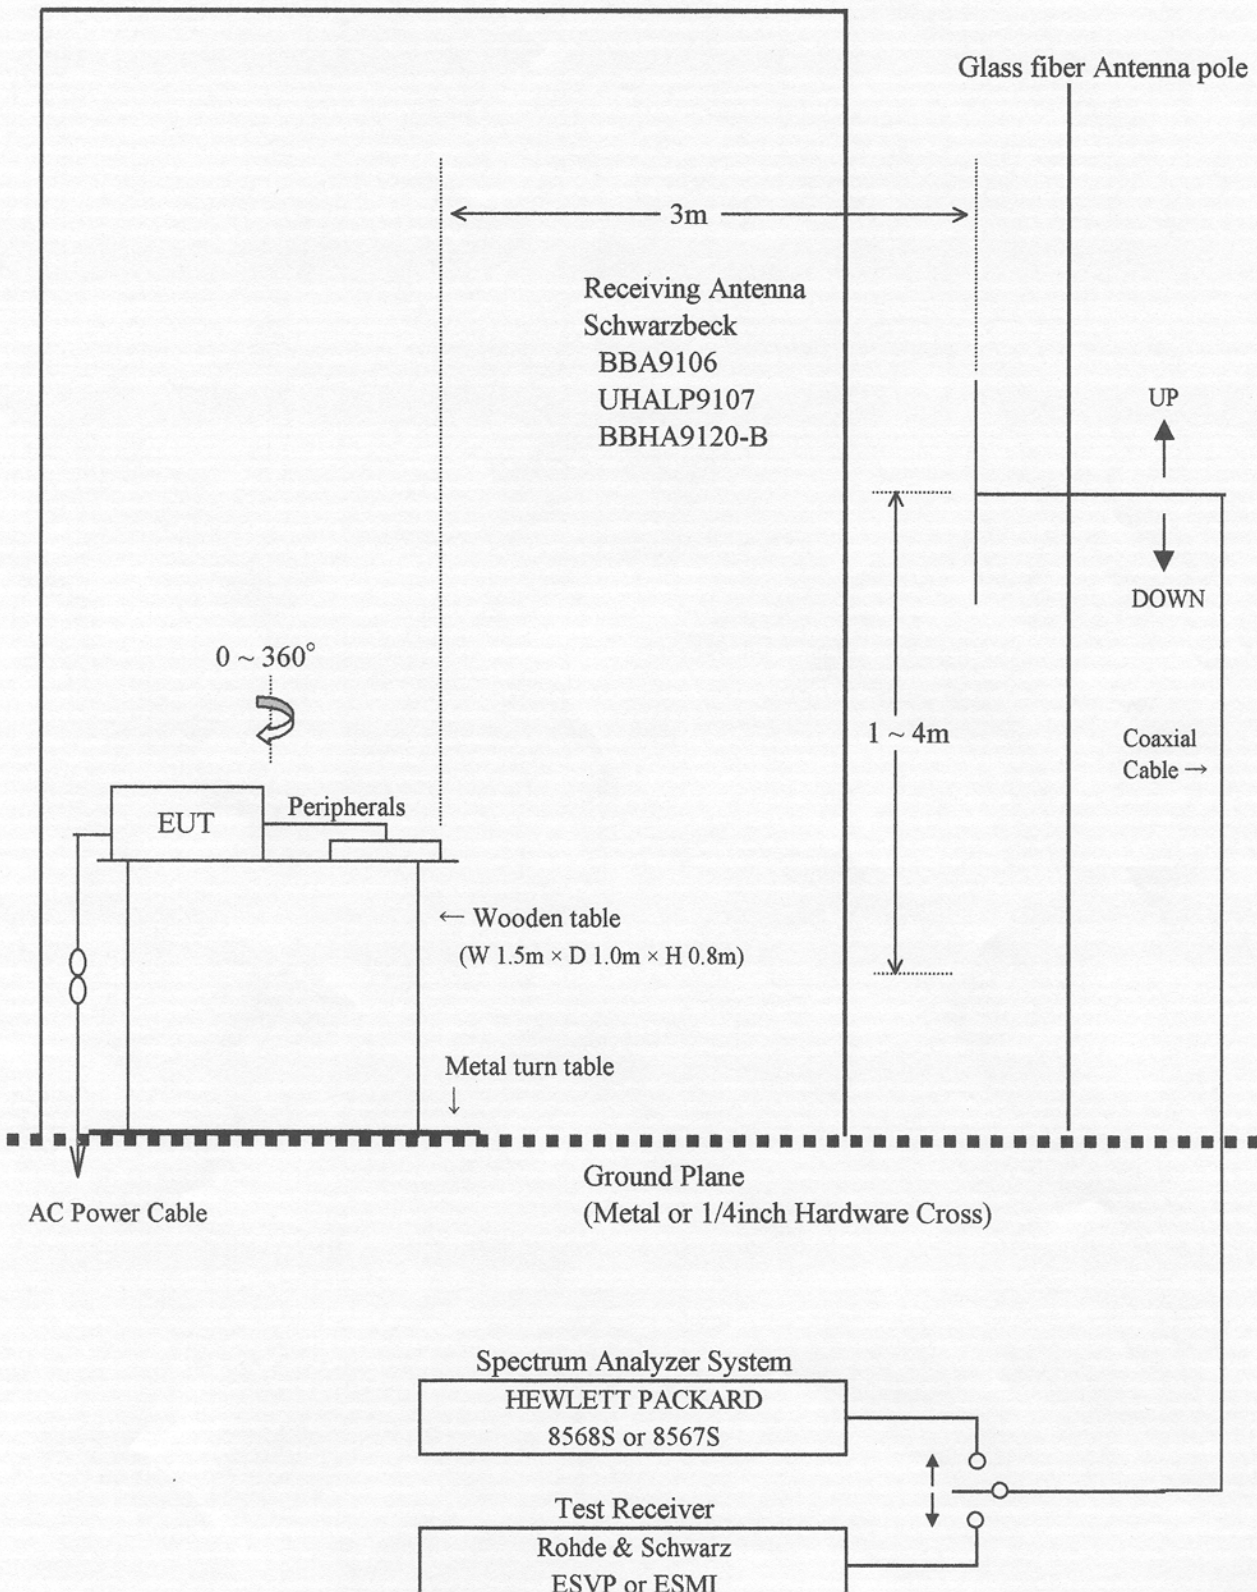

Test Procedure of Radiated Emission :

Preliminary radiated measurements were performed at the measurement distance specified for compliance to determine the emission characteristics of the EUT based on ANSI C63.4-1992 Sec. 8. 3. 1. 1.

The EUT was set up in its typical configuration and operated in its various modes in order. For tabletop systems, cables or wires were manipulated within the range of likely configurations.

For each mode of operation required to be tested, the frequency spectrum was monitored. Antenna height, EUT azimuth, antenna polarization, and cable or wire placement were varied for exploration to produce the maximized emission relative to the limit. Antenna height was varied from 1m to 4m step by step with 1m step, and the EUT on the turn-table was rotated in 360° at each antenna height to detect maximized radiated emission while monitoring spectrum analyzer. The frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were recorded. At the frequency of suspect signal, interface cables positions were varied in order to determine the maximum emission level.

Furthermore, the EUT was rotated 360° and antenna height was varied to maximize the suspected highest amplitude signal.

In case that the EUT has multiple ports all of the same type, additional connecting cables were added to the EUT to determine the effect these cables have on emission from the EUT. The additional cables were added to the condition where the addition of another cables did not significantly affect the emission level, i. e. , varied less than 2dB provided that the emission level remained compliant.

Based on the preliminary radiated measurements, the one EUT configuration, cable or wire configuration, and mode of operation that produced the highest emission level relative to limit was selected for the final test.

The final test was performed and the frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were measured with CISPR QP mode and recorded.

TDK Application No. : TDC-99-0405(1)
 Applicant : TOSHIBA CORPORATION
 Model No. : XM-6602B

Standard : FCC 15 , B
 FCC ID : CJ6AT99-041

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : April 24, 1999
 Temp. : 15 °C ; Humi. : 62 %

Test Receiver : Rohde & Schwarz ESVP
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz External Attenuator : none

Description of Equipment : CD-ROM
 Model No. : XM-6602B ; Type : Desk Top

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.2,3 and 12.

2) EUT Grounding : None.

3) Operating Condition : Running with the program prepared by the applicant.

(1) CD-ROM Drive (EUT) : Random Data Read. (2) Color Computer Display : Displayed the "H" Characters.

(3) Printer : Printing the "H" Characters.

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB μ V/m)		Limit (dB μ V/m)	Emission Level at 3m (dB μ V/m)		Margin (dB)
		Hori.	Ver.		Hori.	Ver.	
30.000	20.0		29.5	40.0	---	29.5	10.5
52.300	11.9	19.8	26.1	40.0	19.8	26.1	13.9
66.900	8.2		28.1	40.0	---	28.1	11.9
88.400	9.8		27.6	43.5	---	27.6	15.9
109.350	13.7		28.4	43.5	---	28.4	15.1
112.300	14.1	30.8		43.5	30.8	---	12.7
124.200	15.6	32.0	29.3	43.5	32.0	29.3	11.5
133.200	16.3		28.3	43.5	---	28.3	15.2
180.090	18.7	35.4		43.5	35.4	---	8.1
181.740	18.8		25.1	43.5	---	25.1	18.4
192.090	19.3	35.1		43.5	35.1	---	8.4
339.190	20.7	32.6	32.1	46.0	32.6	32.1	13.4
498.970	24.0	42.6	43.0	46.0	42.6	43.0	3.0
610.540	26.6		35.4	46.0	---	35.4	10.6


Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).
 2) Sample of calculation at 30.000 MHz :
 Calculation of Margin : (40.0-29.5)dB = 10.5dB

Remarks : 1) Emission level was measured at the worst case condition.
 2) The test data include the estimated uncertainty of MAX.4dB in case.
 of Radiated Emission measurement.

Tested by : *Fumihiko Ooi*
 Engineer of TDK Chikumagawa Open Site

April 24, 1999


TDK EMC CENTER
EMISSION LEVEL [dBuV/m]

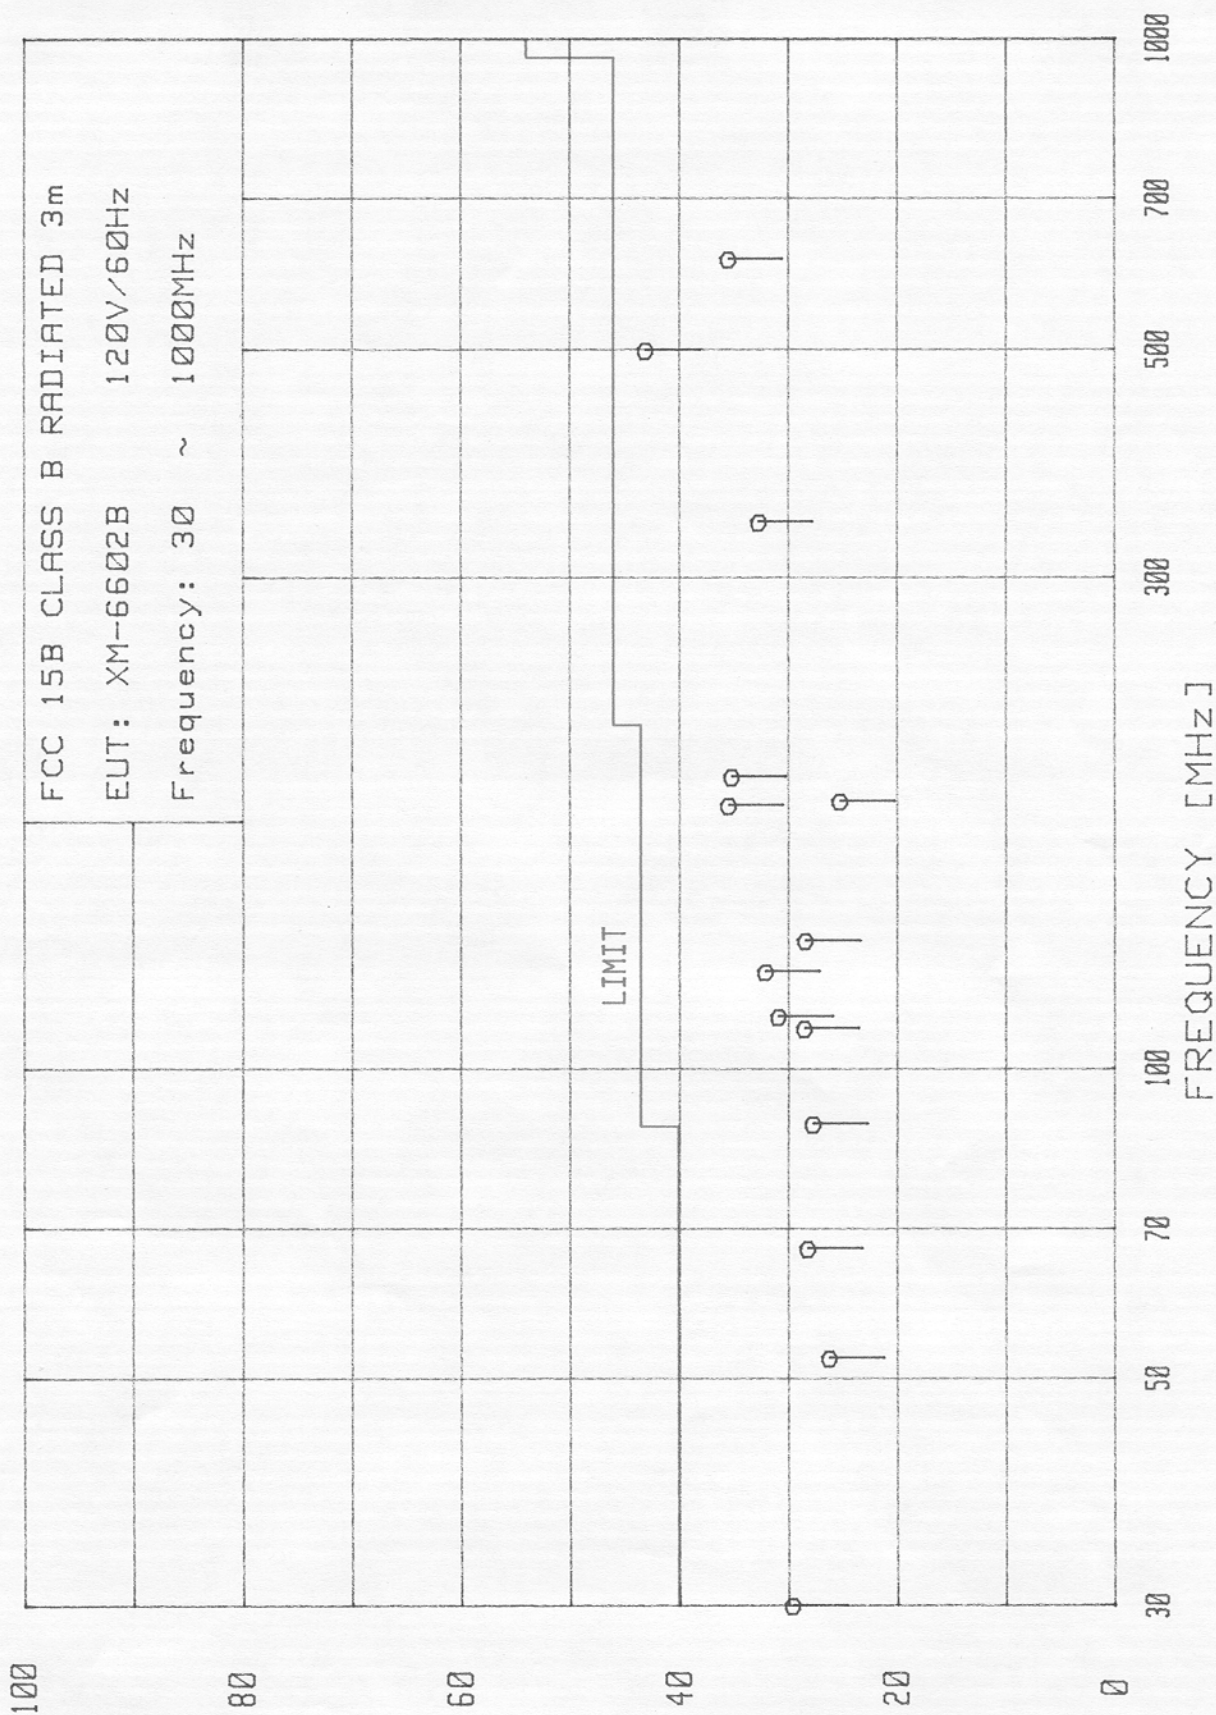

EUT's Test Arrangement of Radiation

Fig 1

Non matallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

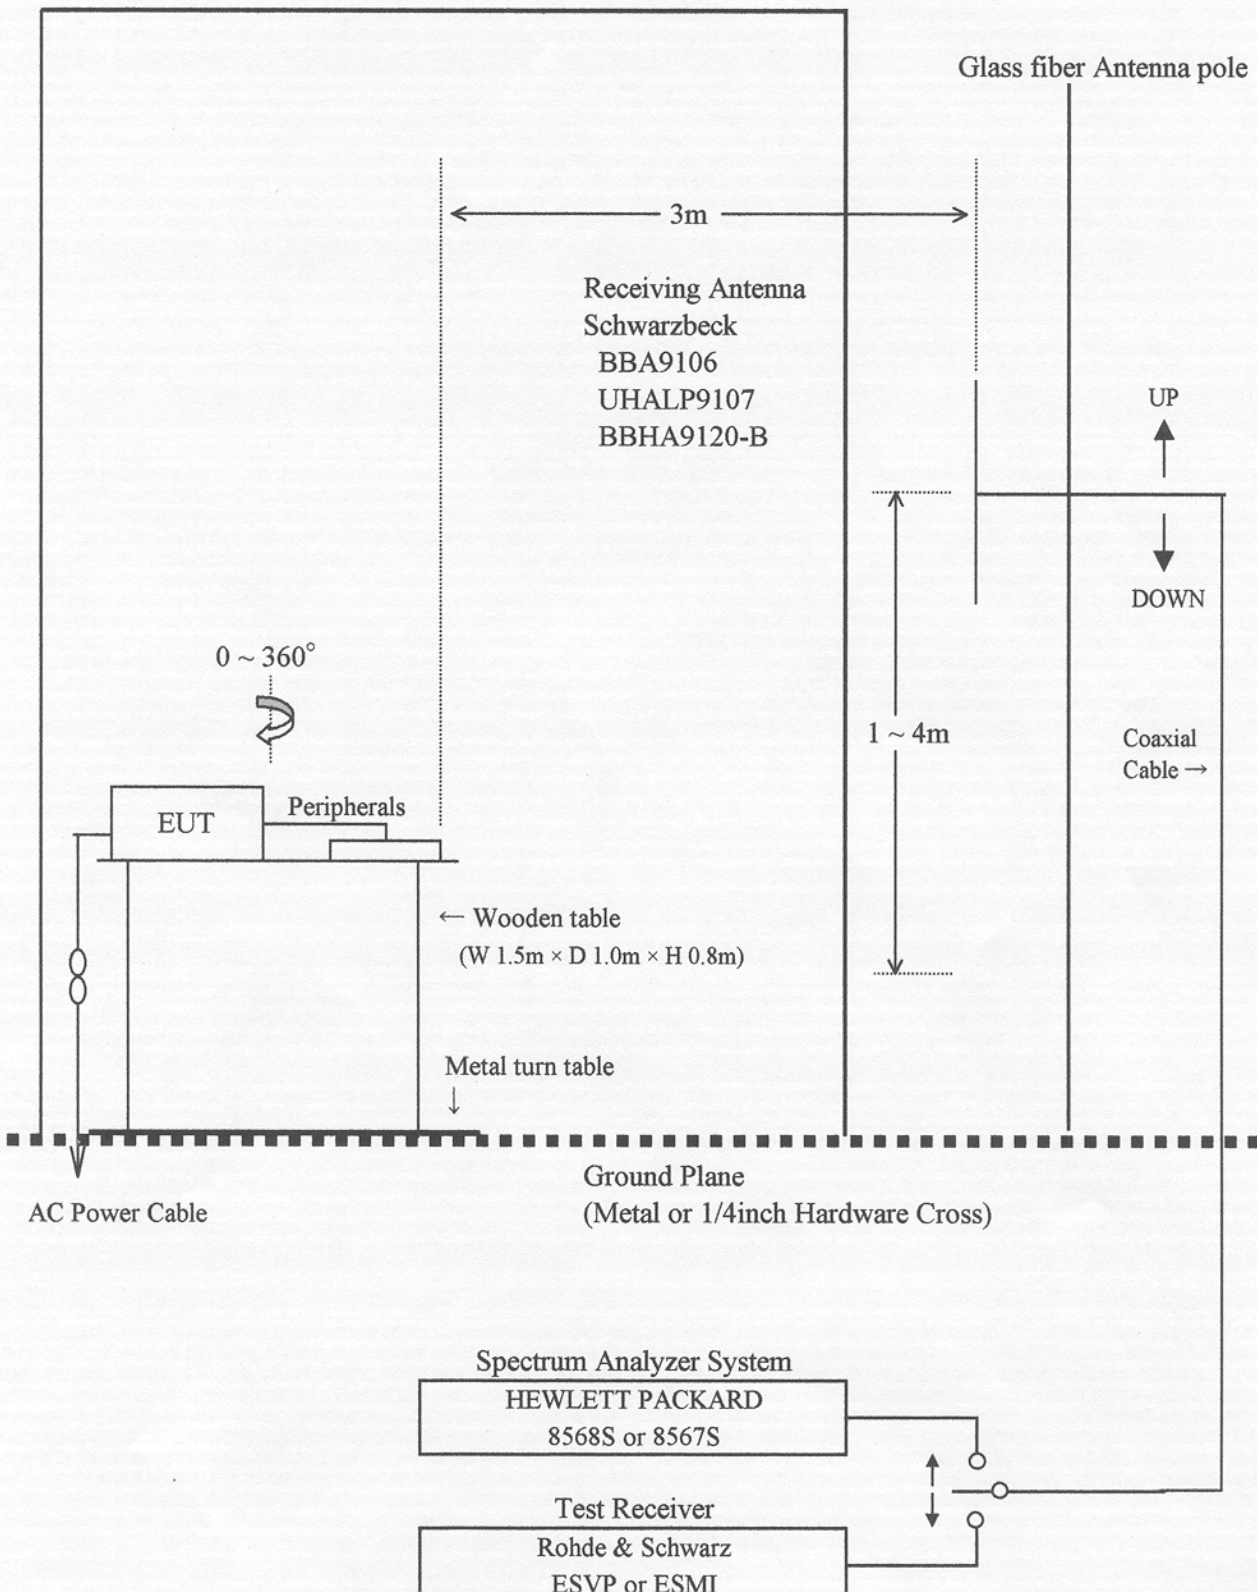

Test Procedure of Radiated Emission :

Preliminary radiated measurements were performed at the measurement distance specified for compliance to determine the emission characteristics of the EUT based on ANSI C63.4-1992 Sec. 8. 3. 1. 1.

The EUT was set up in its typical configuration and operated in its various modes in order. For tabletop systems, cables or wires were manipulated within the range of likely configurations.

For each mode of operation required to be tested, the frequency spectrum was monitored. Antenna height, EUT azimuth, antenna polarization, and cable or wire placement were varied for exploration to produce the maximized emission relative to the limit. Antenna height was varied from 1m to 4m step by step with 1m step, and the EUT on the turn-table was rotated in 360° at each antenna height to detect maximized radiated emission while monitoring spectrum analyzer. The frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were recorded. At the frequency of suspect signal, interface cables positions were varied in order to determine the maximum emission level.

Furthermore, the EUT was rotated 360° and antenna height was varied to maximize the suspected highest amplitude signal.

In case that the EUT has multiple ports all of the same type, additional connecting cables were added to the EUT to determine the effect these cables have on emission from the EUT. The additional cables were added to the condition where the addition of another cables did not significantly affect the emission level, i. e. , varied less than 2dB provided that the emission level remained compliant.

Based on the preliminary radiated measurements, the one EUT configuration, cable or wire configuration, and mode of operation that produced the highest emission level relative to limit was selected for the final test.

The final test was performed and the frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were measured with CISPR QP mode and recorded.

TDK Application No. : TDC-99-0405(1)
 Applicant : TOSHIBA CORPORATION
 Model No. : XM-6602B

Standard : FCC 15 , B
 FCC ID : CJ6AT99-041

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : April 24, 1999
 Temp. : 15 °C ; Humi. : 62 %

Test Receiver : Rohde & Schwarz ESVP
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz External Attenuator : none

Description of Equipment : CD-ROM
 Model No. : XM-6602B ; Type : Desk Top

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.2,3 and 12.

2) EUT Grounding : None.

3) Operating Condition : Running with the program prepared by the applicant.

(1) CD-ROM Drive (EUT) : Random Data Read. (2) Color Computer Display : Displayed the "H" Characters.

(3) Printer : Printing the "H" Characters.

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB μ V/m)		Limit (dB μ V/m)	Emission Level at 3m (dB μ V/m)		Margin (dB)
		Hori.	Ver.		Hori.	Ver.	
30.000	20.0		29.5	40.0	---	29.5	10.5
52.300	11.9	19.8	26.1	40.0	19.8	26.1	13.9
66.900	8.2		28.1	40.0	---	28.1	11.9
88.400	9.8		27.6	43.5	---	27.6	15.9
109.350	13.7		28.4	43.5	---	28.4	15.1
112.300	14.1	30.8		43.5	30.8	---	12.7
124.200	15.6	32.0	29.3	43.5	32.0	29.3	11.5
133.200	16.3		28.3	43.5	---	28.3	15.2
180.090	18.7	35.4		43.5	35.4	---	8.1
181.740	18.8		25.1	43.5	---	25.1	18.4
192.090	19.3	35.1		43.5	35.1	---	8.4
339.190	20.7	32.6	32.1	46.0	32.6	32.1	13.4
498.970	24.0	42.6	43.0	46.0	42.6	43.0	3.0
610.540	26.6		35.4	46.0	---	35.4	10.6


Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).
 2) Sample of calculation at 30.000 MHz :
 Calculation of Margin : (40.0-29.5)dB = 10.5dB

Remarks : 1) Emission level was measured at the worst case condition.
 2) The test data include the estimated uncertainty of MAX.4dB in case.
 of Radiated Emission measurement.

Tested by : *Fumihiko Ooi*
 Engineer of TDK Chikumagawa Open Site

April 24, 1999


TDK EMC CENTER
EMISSION LEVEL [dBuV/m]

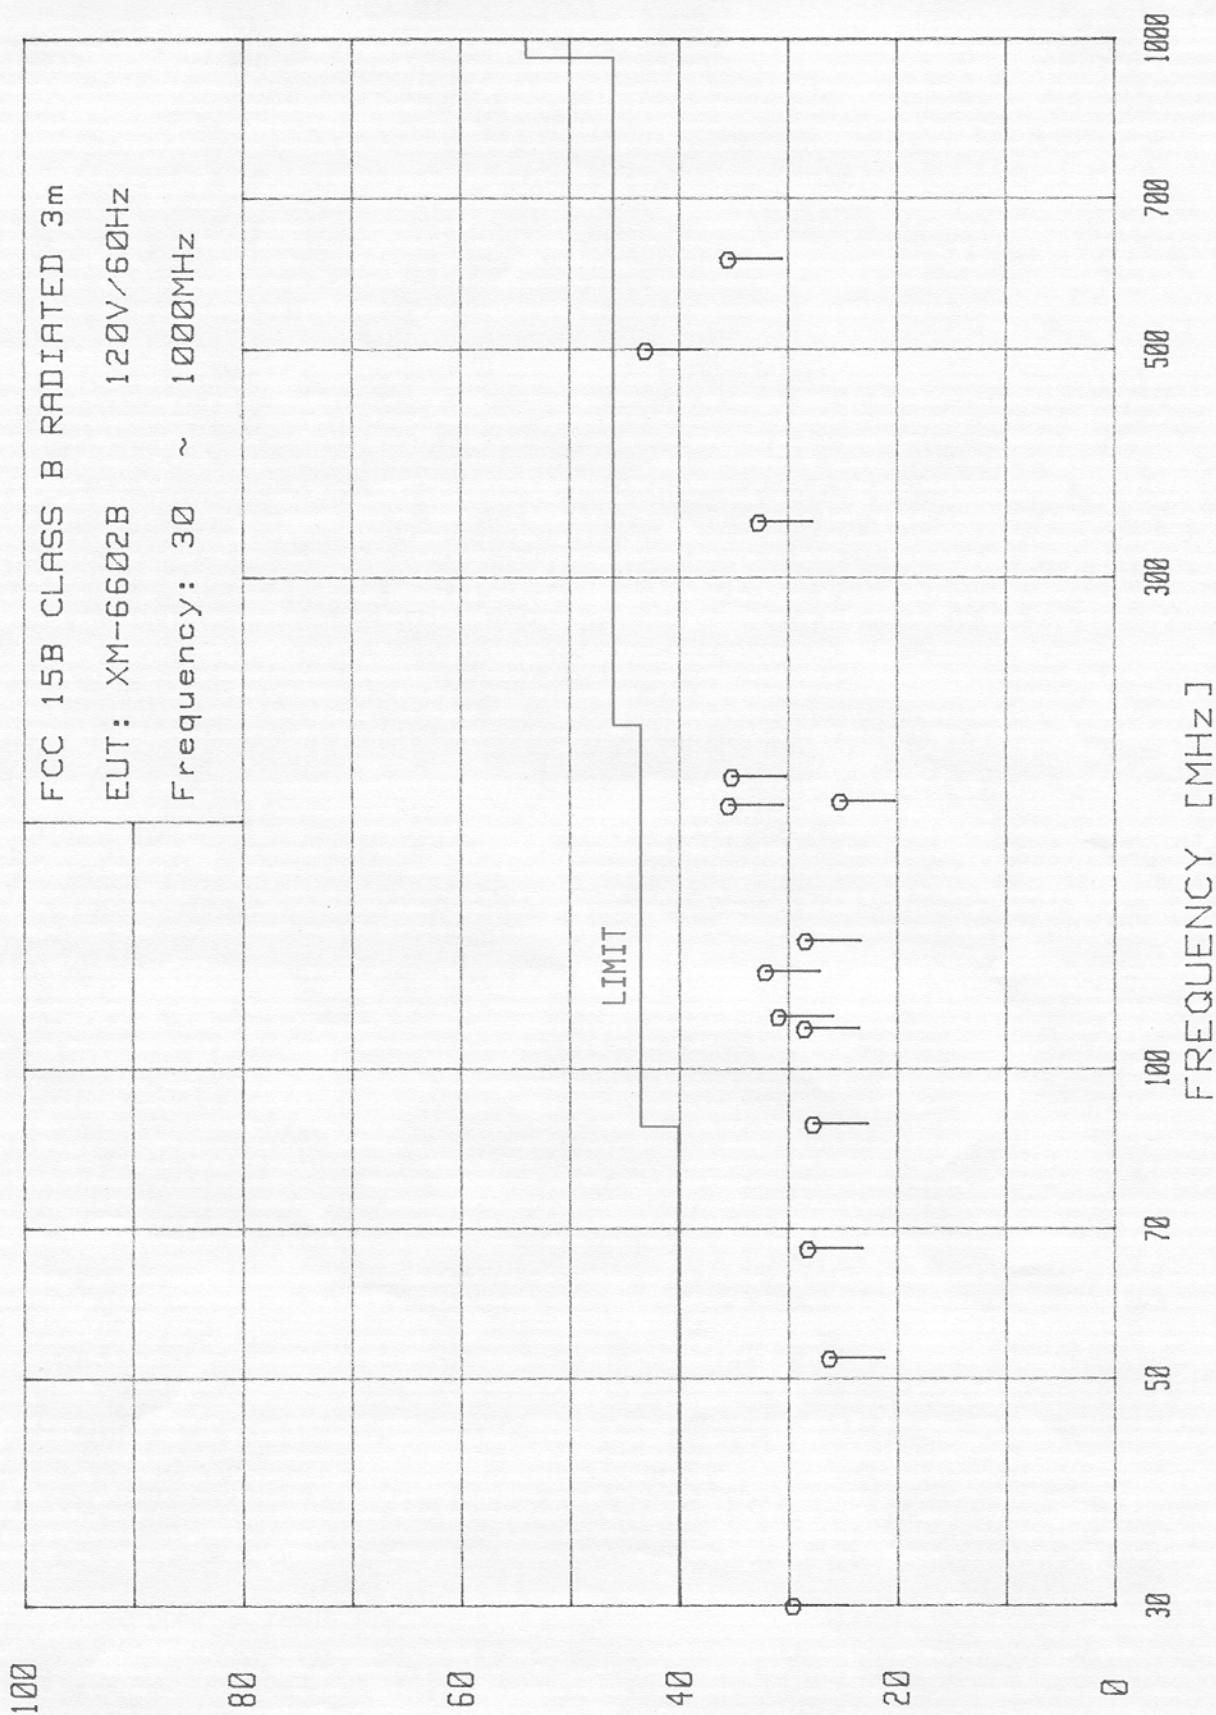

EUT's Test Arrangement of Radiation

Fig 1

Non matallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

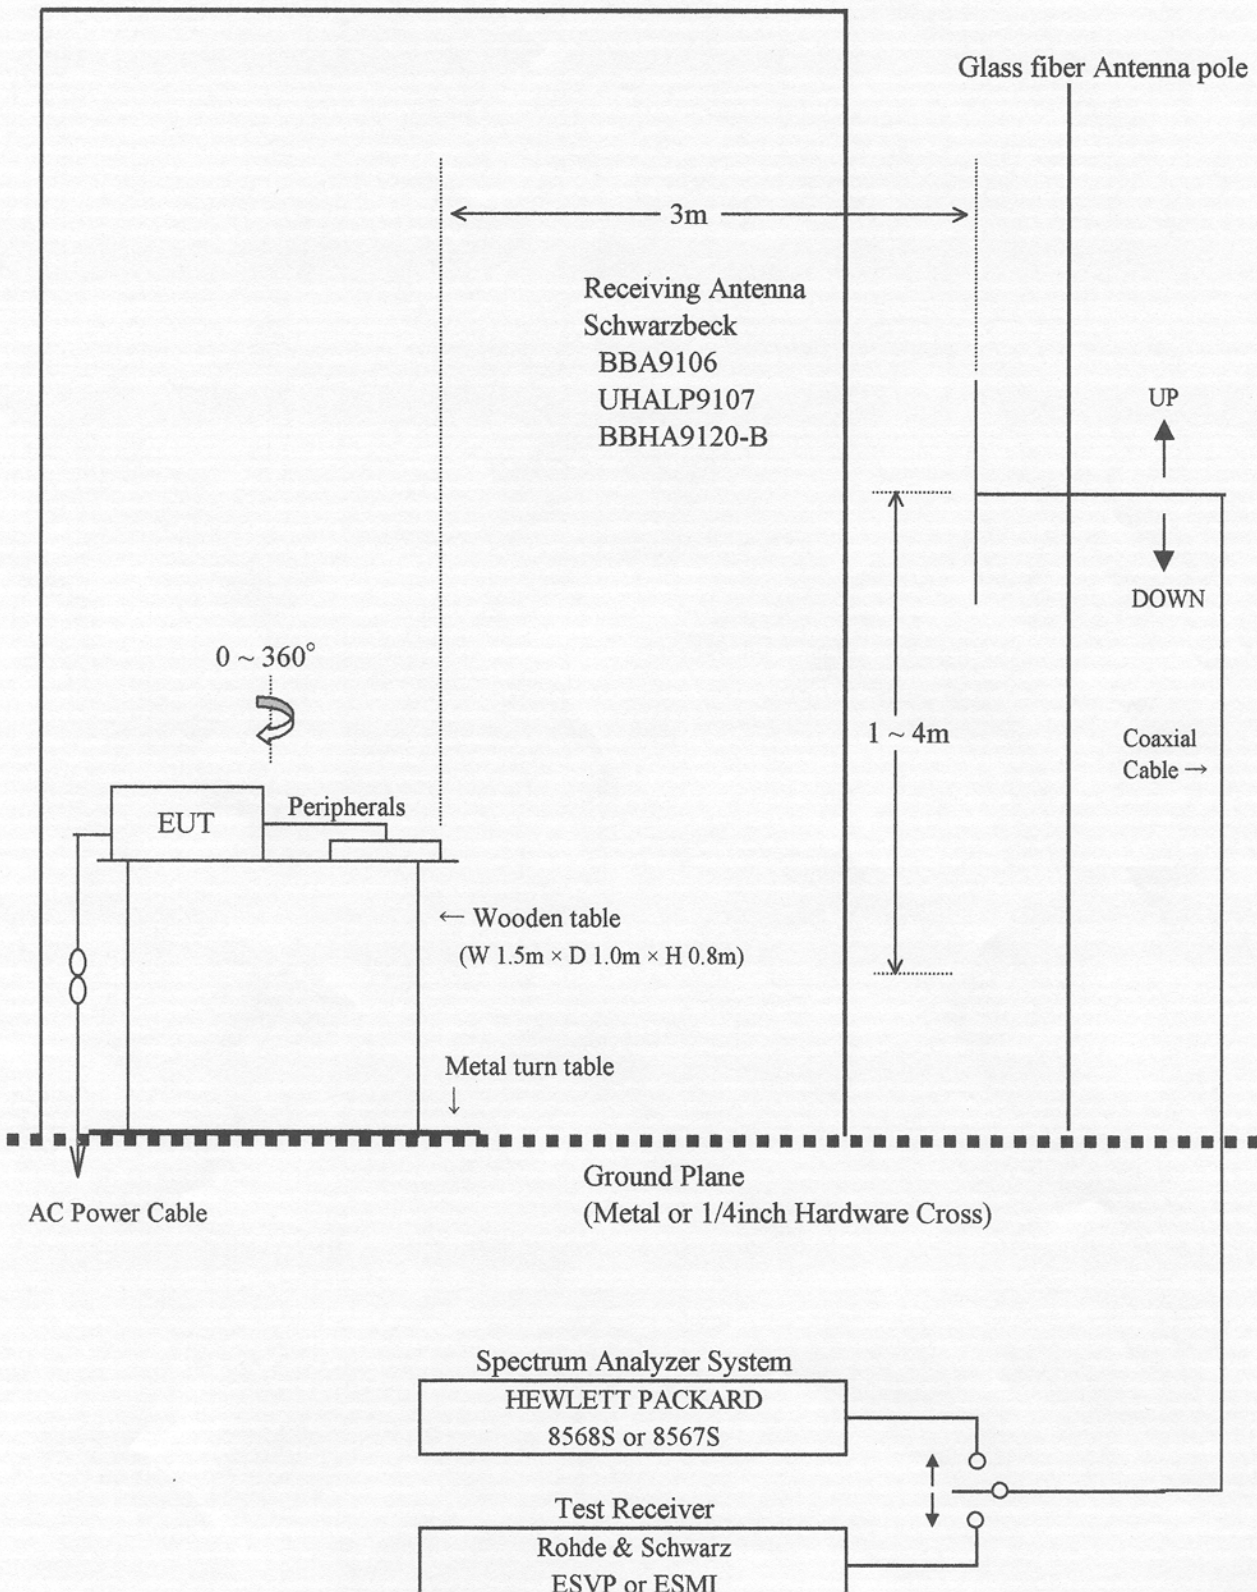

Test Procedure of Radiated Emission :

Preliminary radiated measurements were performed at the measurement distance specified for compliance to determine the emission characteristics of the EUT based on ANSI C63.4-1992 Sec. 8. 3. 1. 1.

The EUT was set up in its typical configuration and operated in its various modes in order. For tabletop systems, cables or wires were manipulated within the range of likely configurations.

For each mode of operation required to be tested, the frequency spectrum was monitored. Antenna height, EUT azimuth, antenna polarization, and cable or wire placement were varied for exploration to produce the maximized emission relative to the limit. Antenna height was varied from 1m to 4m step by step with 1m step, and the EUT on the turn-table was rotated in 360° at each antenna height to detect maximized radiated emission while monitoring spectrum analyzer. The frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were recorded. At the frequency of suspect signal, interface cables positions were varied in order to determine the maximum emission level.

Furthermore, the EUT was rotated 360° and antenna height was varied to maximize the suspected highest amplitude signal.

In case that the EUT has multiple ports all of the same type, additional connecting cables were added to the EUT to determine the effect these cables have on emission from the EUT. The additional cables were added to the condition where the addition of another cables did not significantly affect the emission level, i. e. , varied less than 2dB provided that the emission level remained compliant.

Based on the preliminary radiated measurements, the one EUT configuration, cable or wire configuration, and mode of operation that produced the highest emission level relative to limit was selected for the final test.

The final test was performed and the frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were measured with CISPR QP mode and recorded.

TDK Application No. : TDC-99-0405(1)
 Applicant : TOSHIBA CORPORATION
 Model No. : XM-6602B

Standard : FCC 15 , B
 FCC ID : CJ6AT99-041

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : April 24, 1999
 Temp. : 15 °C ; Humi. : 62 %

Test Receiver : Rohde & Schwarz ESVP
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz External Attenuator : none

Description of Equipment : CD-ROM
 Model No. : XM-6602B ; Type : Desk Top

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.2,3 and 12.

2) EUT Grounding : None.

3) Operating Condition : Running with the program prepared by the applicant.

(1) CD-ROM Drive (EUT) : Random Data Read. (2) Color Computer Display : Displayed the "H" Characters.

(3) Printer : Printing the "H" Characters.

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB μ V/m)		Limit (dB μ V/m)	Emission Level at 3m (dB μ V/m)		Margin (dB)
		Hori.	Ver.		Hori.	Ver.	
30.000	20.0		29.5	40.0	---	29.5	10.5
52.300	11.9	19.8	26.1	40.0	19.8	26.1	13.9
66.900	8.2		28.1	40.0	---	28.1	11.9
88.400	9.8		27.6	43.5	---	27.6	15.9
109.350	13.7		28.4	43.5	---	28.4	15.1
112.300	14.1	30.8		43.5	30.8	---	12.7
124.200	15.6	32.0	29.3	43.5	32.0	29.3	11.5
133.200	16.3		28.3	43.5	---	28.3	15.2
180.090	18.7	35.4		43.5	35.4	---	8.1
181.740	18.8		25.1	43.5	---	25.1	18.4
192.090	19.3	35.1		43.5	35.1	---	8.4
339.190	20.7	32.6	32.1	46.0	32.6	32.1	13.4
498.970	24.0	42.6	43.0	46.0	42.6	43.0	3.0
610.540	26.6		35.4	46.0	---	35.4	10.6


Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).
 2) Sample of calculation at 30.000 MHz :
 Calculation of Margin : (40.0-29.5)dB = 10.5dB

Remarks : 1) Emission level was measured at the worst case condition.
 2) The test data include the estimated uncertainty of MAX.4dB in case.
 of Radiated Emission measurement.

Tested by : *Fumihiko Ooi*
 Engineer of TDK Chikumagawa Open Site

April 24, 1999

TDK EMC CENTER
EMISSION LEVEL [dBuV/m]

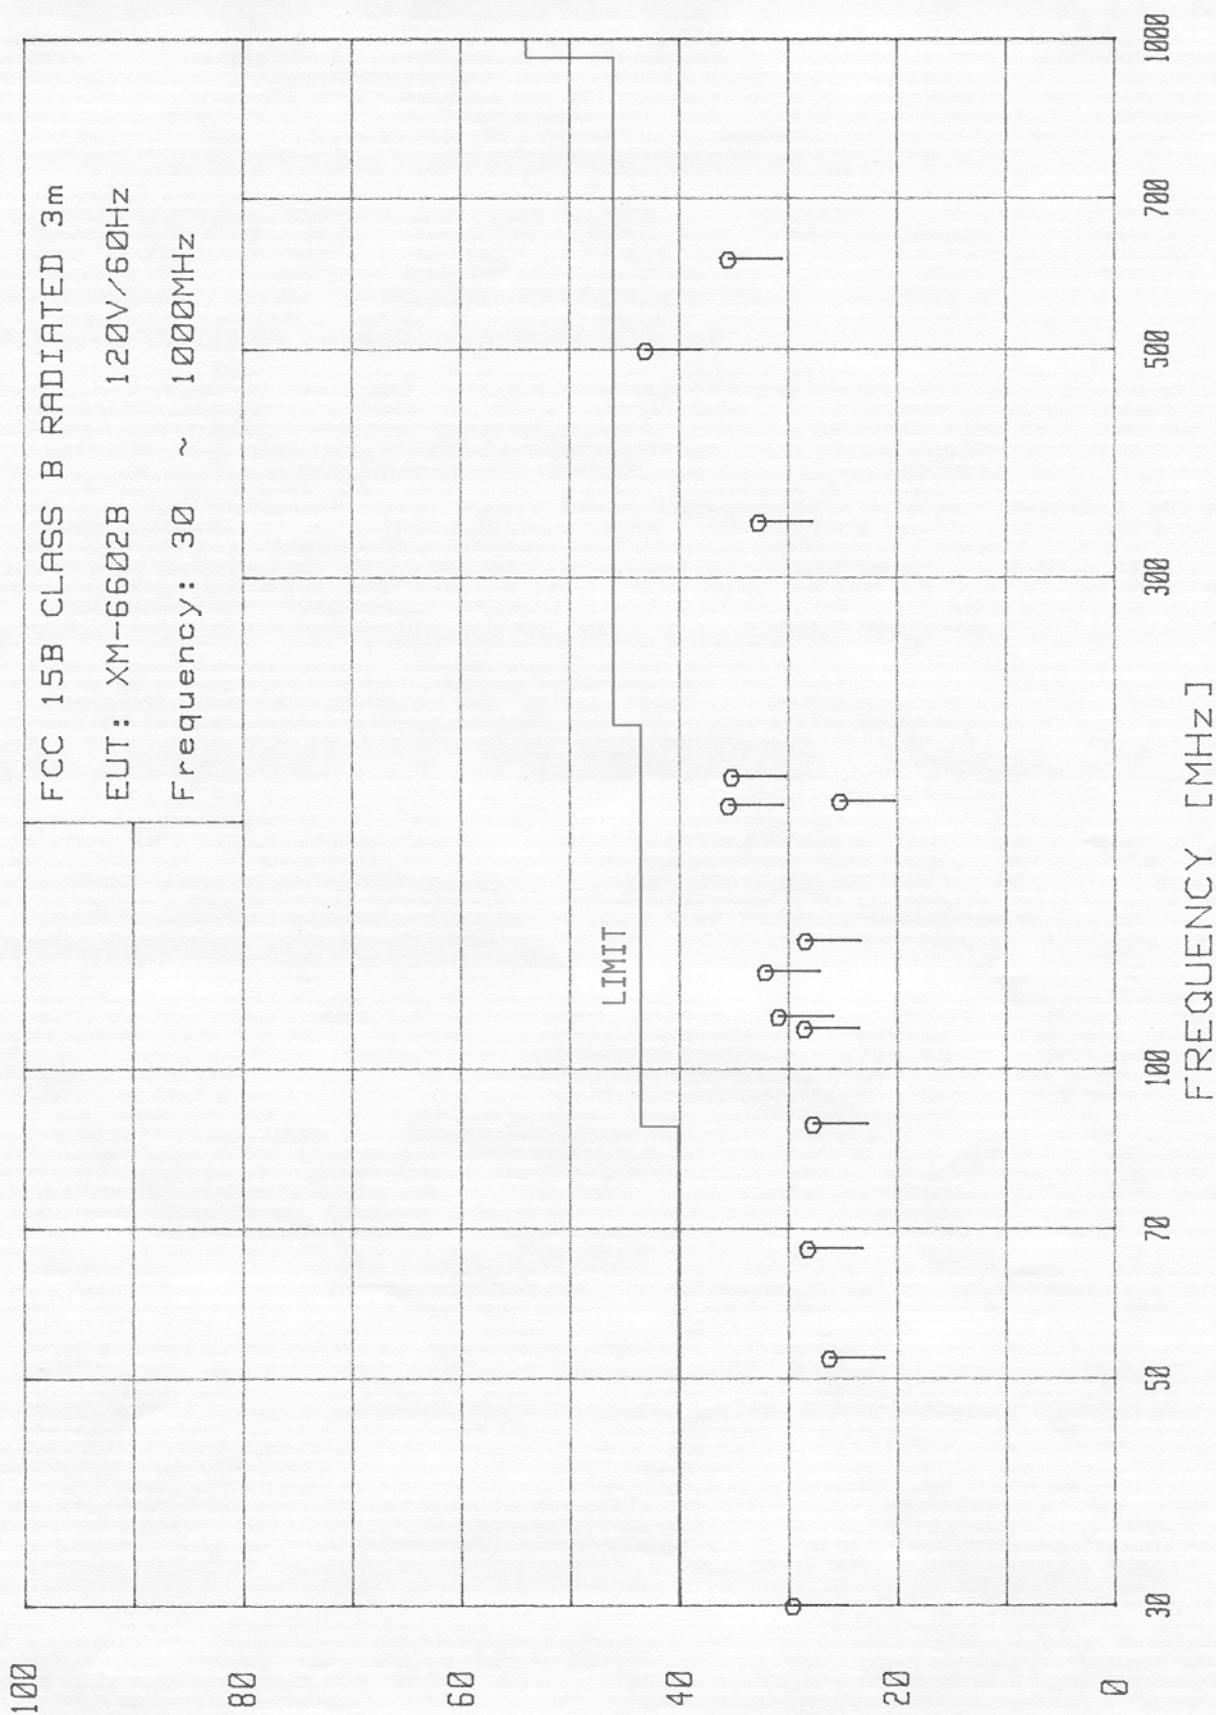

Test Procedure of Radiated Emission :

Preliminary radiated measurements were performed at the measurement distance specified for compliance to determine the emission characteristics of the EUT based on ANSI C63.4-1992 Sec. 8. 3. 1. 1.

The EUT was set up in its typical configuration and operated in its various modes in order. For tabletop systems, cables or wires were manipulated within the range of likely configurations.

For each mode of operation required to be tested, the frequency spectrum was monitored. Antenna height, EUT azimuth, antenna polarization, and cable or wire placement were varied for exploration to produce the maximized emission relative to the limit. Antenna height was varied from 1m to 4m step by step with 1m step, and the EUT on the turn-table was rotated in 360° at each antenna height to detect maximized radiated emission while monitoring spectrum analyzer. The frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were recorded. At the frequency of suspect signal, interface cables positions were varied in order to determine the maximum emission level.

Furthermore, the EUT was rotated 360° and antenna height was varied to maximize the suspected highest amplitude signal.

In case that the EUT has multiple ports all of the same type, additional connecting cables were added to the EUT to determine the effect these cables have on emission from the EUT. The additional cables were added to the condition where the addition of another cables did not significantly affect the emission level, i. e. , varied less than 2dB provided that the emission level remained compliant.

Based on the preliminary radiated measurements, the one EUT configuration, cable or wire configuration, and mode of operation that produced the highest emission level relative to limit was selected for the final test.

The final test was performed and the frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were measured with CISPR QP mode and recorded.

TDK Application No. : TDC-99-0405(1)
 Applicant : TOSHIBA CORPORATION
 Model No. : XM-6602B

Standard : FCC 15 , B
 FCC ID : CJ6AT99-041

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : April 24, 1999
 Temp. : 15 °C ; Humi. : 62 %

Test Receiver : Rohde & Schwarz ESVP
 Operation Mode : Detector function : CISPR Quasi-Peak
 6dB Band width : 120kHz External Attenuator : none

Description of Equipment : CD-ROM
 Model No. : XM-6602B ; Type : Desk Top

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.2,3 and 12.

2) EUT Grounding : None.

3) Operating Condition : Running with the program prepared by the applicant.

(1) CD-ROM Drive (EUT) : Random Data Read. (2) Color Computer Display : Displayed the "H" Characters.

(3) Printer : Printing the "H" Characters.

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB μ V/m)		Limit (dB μ V/m)	Emission Level at 3m (dB μ V/m)		Margin (dB)
		Hori.	Ver.		Hori.	Ver.	
30.000	20.0		29.5	40.0	---	29.5	10.5
52.300	11.9	19.8	26.1	40.0	19.8	26.1	13.9
66.900	8.2		28.1	40.0	---	28.1	11.9
88.400	9.8		27.6	43.5	---	27.6	15.9
109.350	13.7		28.4	43.5	---	28.4	15.1
112.300	14.1	30.8		43.5	30.8	---	12.7
124.200	15.6	32.0	29.3	43.5	32.0	29.3	11.5
133.200	16.3		28.3	43.5	---	28.3	15.2
180.090	18.7	35.4		43.5	35.4	---	8.1
181.740	18.8		25.1	43.5	---	25.1	18.4
192.090	19.3	35.1		43.5	35.1	---	8.4
339.190	20.7	32.6	32.1	46.0	32.6	32.1	13.4
498.970	24.0	42.6	43.0	46.0	42.6	43.0	3.0
610.540	26.6		35.4	46.0	---	35.4	10.6

Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).
 2) Sample of calculation at 30.000 MHz :
 Calculation of Margin : (40.0-29.5)dB = 10.5dB

Remarks : 1) Emission level was measured at the worst case condition.
 2) The test data include the estimated uncertainty of MAX.4dB in case.
 of Radiated Emission measurement.

Tested by : *Fumihiko Ooi*
 Engineer of TDK Chikumagawa Open Site

Test Procedure of Radiated Emission :

Preliminary radiated measurements were performed at the measurement distance specified for compliance to determine the emission characteristics of the EUT based on ANSI C63.4-1992 Sec. 8. 3. 1. 1.

The EUT was set up in its typical configuration and operated in its various modes in order. For tabletop systems, cables or wires were manipulated within the range of likely configurations.

For each mode of operation required to be tested, the frequency spectrum was monitored. Antenna height, EUT azimuth, antenna polarization, and cable or wire placement were varied for exploration to produce the maximized emission relative to the limit. Antenna height was varied from 1m to 4m step by step with 1m step, and the EUT on the turn-table was rotated in 360° at each antenna height to detect maximized radiated emission while monitoring spectrum analyzer. The frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were recorded. At the frequency of suspect signal, interface cables positions were varied in order to determine the maximum emission level.

Furthermore, the EUT was rotated 360° and antenna height was varied to maximize the suspected highest amplitude signal.

In case that the EUT has multiple ports all of the same type, additional connecting cables were added to the EUT to determine the effect these cables have on emission from the EUT. The additional cables were added to the condition where the addition of another cables did not significantly affect the emission level, i. e. , varied less than 2dB provided that the emission level remained compliant.

Based on the preliminary radiated measurements, the one EUT configuration, cable or wire configuration, and mode of operation that produced the highest emission level relative to limit was selected for the final test.

The final test was performed and the frequency and amplitude of the suspect signals (or the highest 10 to 20 amplitudes and frequencies) were measured with CISPR QP mode and recorded.