


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz
Test BY :Jing Chang

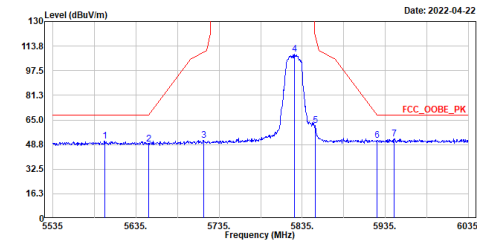


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5597.500	50.81	68.20	-17.39	31.18	19.63	Peak
2	5650.000	48.82	68.21	-19.39	29.51	19.31	Peak
3	5716.500	51.71	109.82	-58.11	31.97	19.74	Peak
4	5826.000	108.43	-----	-----	88.40	20.03	Peak
5	5850.500	61.08	121.06	-59.98	41.02	20.06	Peak
6	5925.000	51.28	68.21	-16.93	30.81	20.47	Peak
7	5946.000	52.64	68.20	-15.56	32.11	20.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz
Test BY :Jing Chang

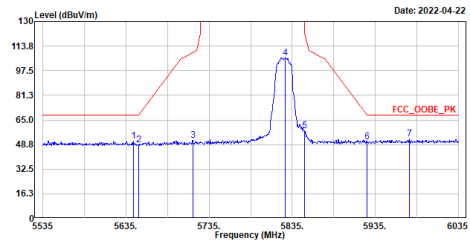


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5644.000	50.93	68.20	-17.27	31.57	19.36	Peak
2	5650.000	48.56	68.21	-19.65	29.25	19.31	Peak
3	5715.500	51.62	109.54	-57.92	31.89	19.73	Peak
4	5827.000	106.15	-----	-----	86.12	20.03	Peak
5	5850.000	57.73	122.20	-64.47	37.67	20.06	Peak
6	5925.000	50.53	68.21	-17.68	30.06	20.47	Peak
7	5976.500	52.62	68.20	-15.58	32.04	20.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5190MHz
Test BY :Jing Chang

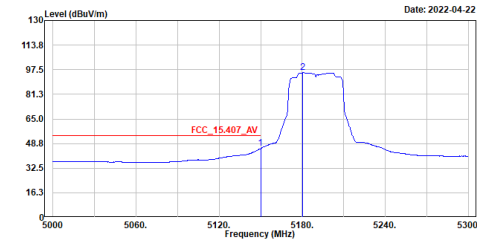


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	45.50	54.00	-8.50	27.10	18.40	Average
2	5180.600	95.45	-----	-----	76.94	18.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line




Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5190MHz
Test BY :Jing Chang

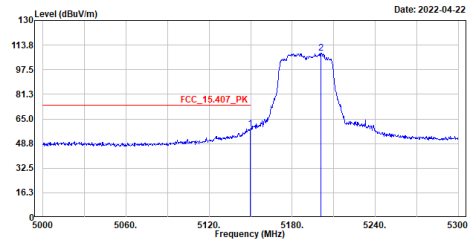


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.700	58.37	74.00	-15.63	39.97	18.40	Peak
2	5201.000	108.60	-----	-----	90.00	18.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

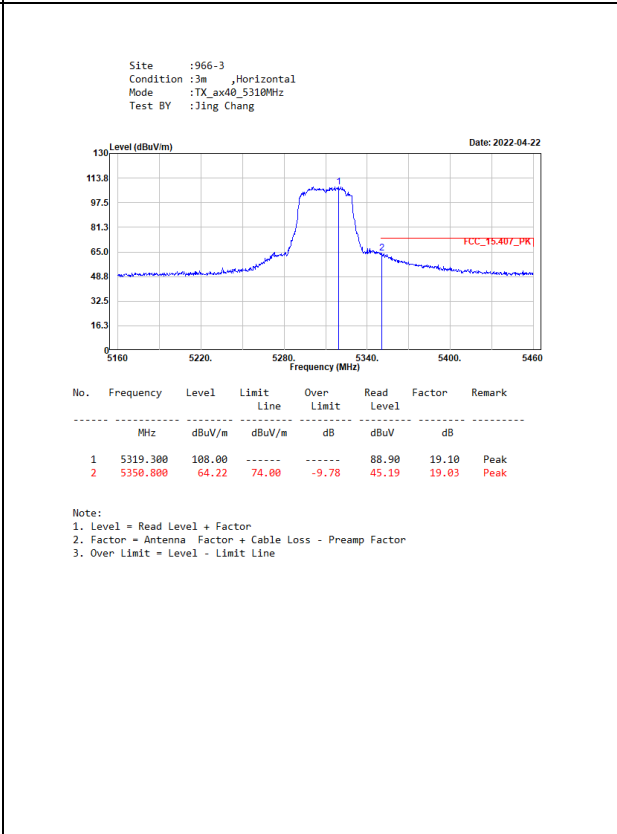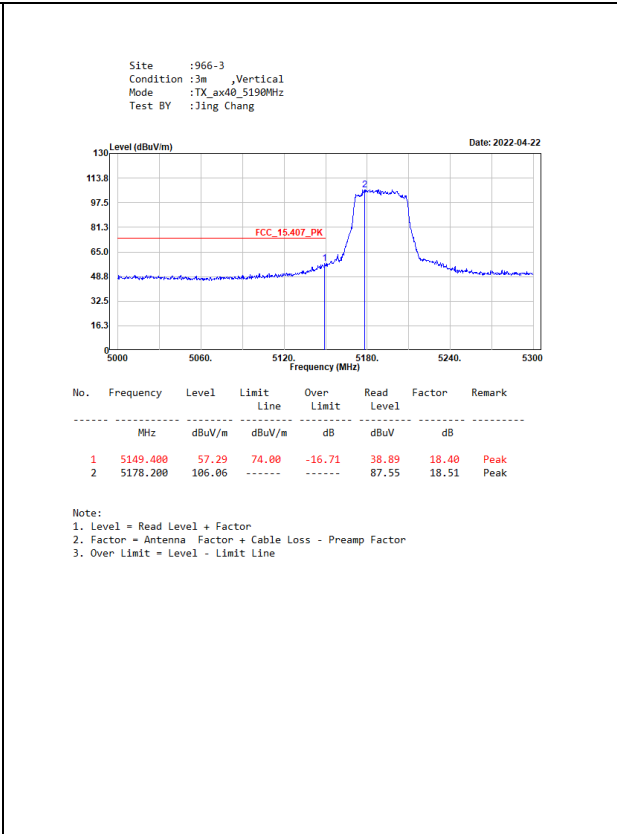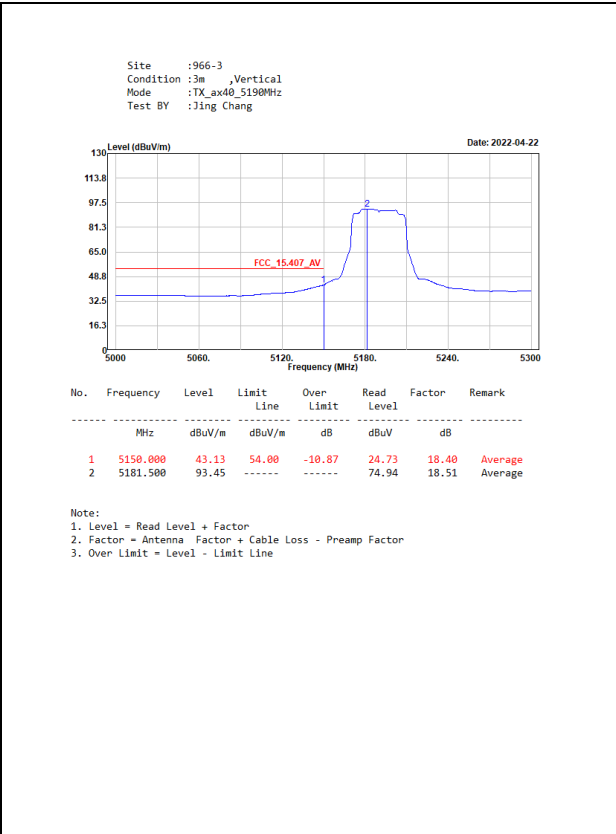

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5310MHz
Test BY :Jing Chang

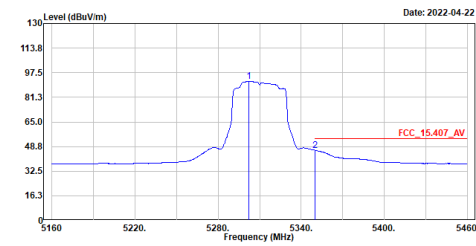


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5302.200	91.64	-----	-----	72.49	19.15	Average
2	5350.200	46.28	54.00	-7.72	27.25	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5310MHz
Test BY :Jing Chang

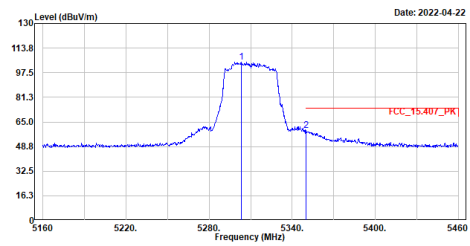


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5303.400	104.63	-----	-----	85.48	19.15	Peak
2	5350.200	59.58	74.00	-14.42	40.55	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5510MHz
Test BY :Jing Chang

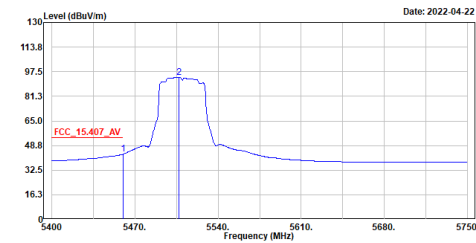


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	42.98	54.00	-11.02	23.74	19.24	Average
2	5507.100	93.63	-----	-----	74.24	19.39	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5510MHz
Test BY :Jing Chang

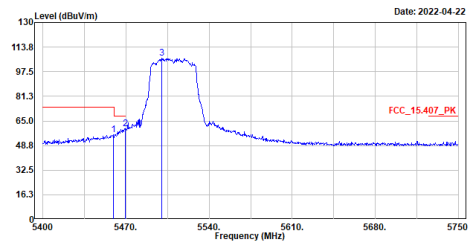


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.150	56.02	74.00	-17.98	36.78	19.24	Peak
2	5469.300	59.88	68.22	-8.34	40.61	19.27	Peak
3	5500.100	106.68	-----	-----	87.29	19.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5510MHz
Test BY :Jing Chang

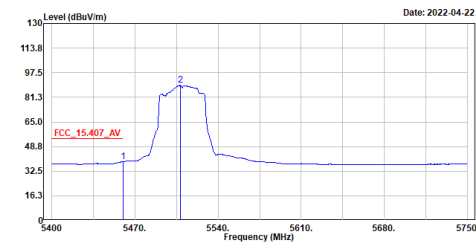

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	38.72	54.00	-15.28	19.48	19.24	Average
2	5508.150	89.08	-----	-----	69.69	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5510MHz
Test BY :Jing Chang

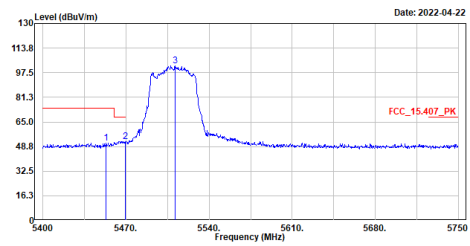

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5453.200	51.26	74.00	-22.74	32.04	19.22	Peak
2	5469.300	52.15	68.22	-16.07	32.88	19.27	Peak
3	5511.300	102.25	-----	-----	82.84	19.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5670MHz
Test BY :Jing Chang

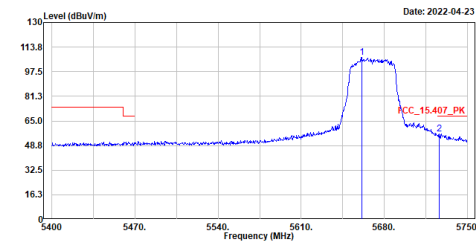

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5661.100	107.03	-----	-----	87.62	19.41	Peak
2	5726.200	56.24	68.22	-11.98	36.45	19.79	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5670MHz
Test BY :Jing Chang

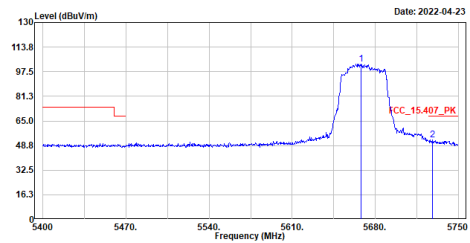


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5668.100	102.67	-----	-----	83.22	19.45	Peak
2	5728.300	52.51	68.22	-15.71	32.71	19.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

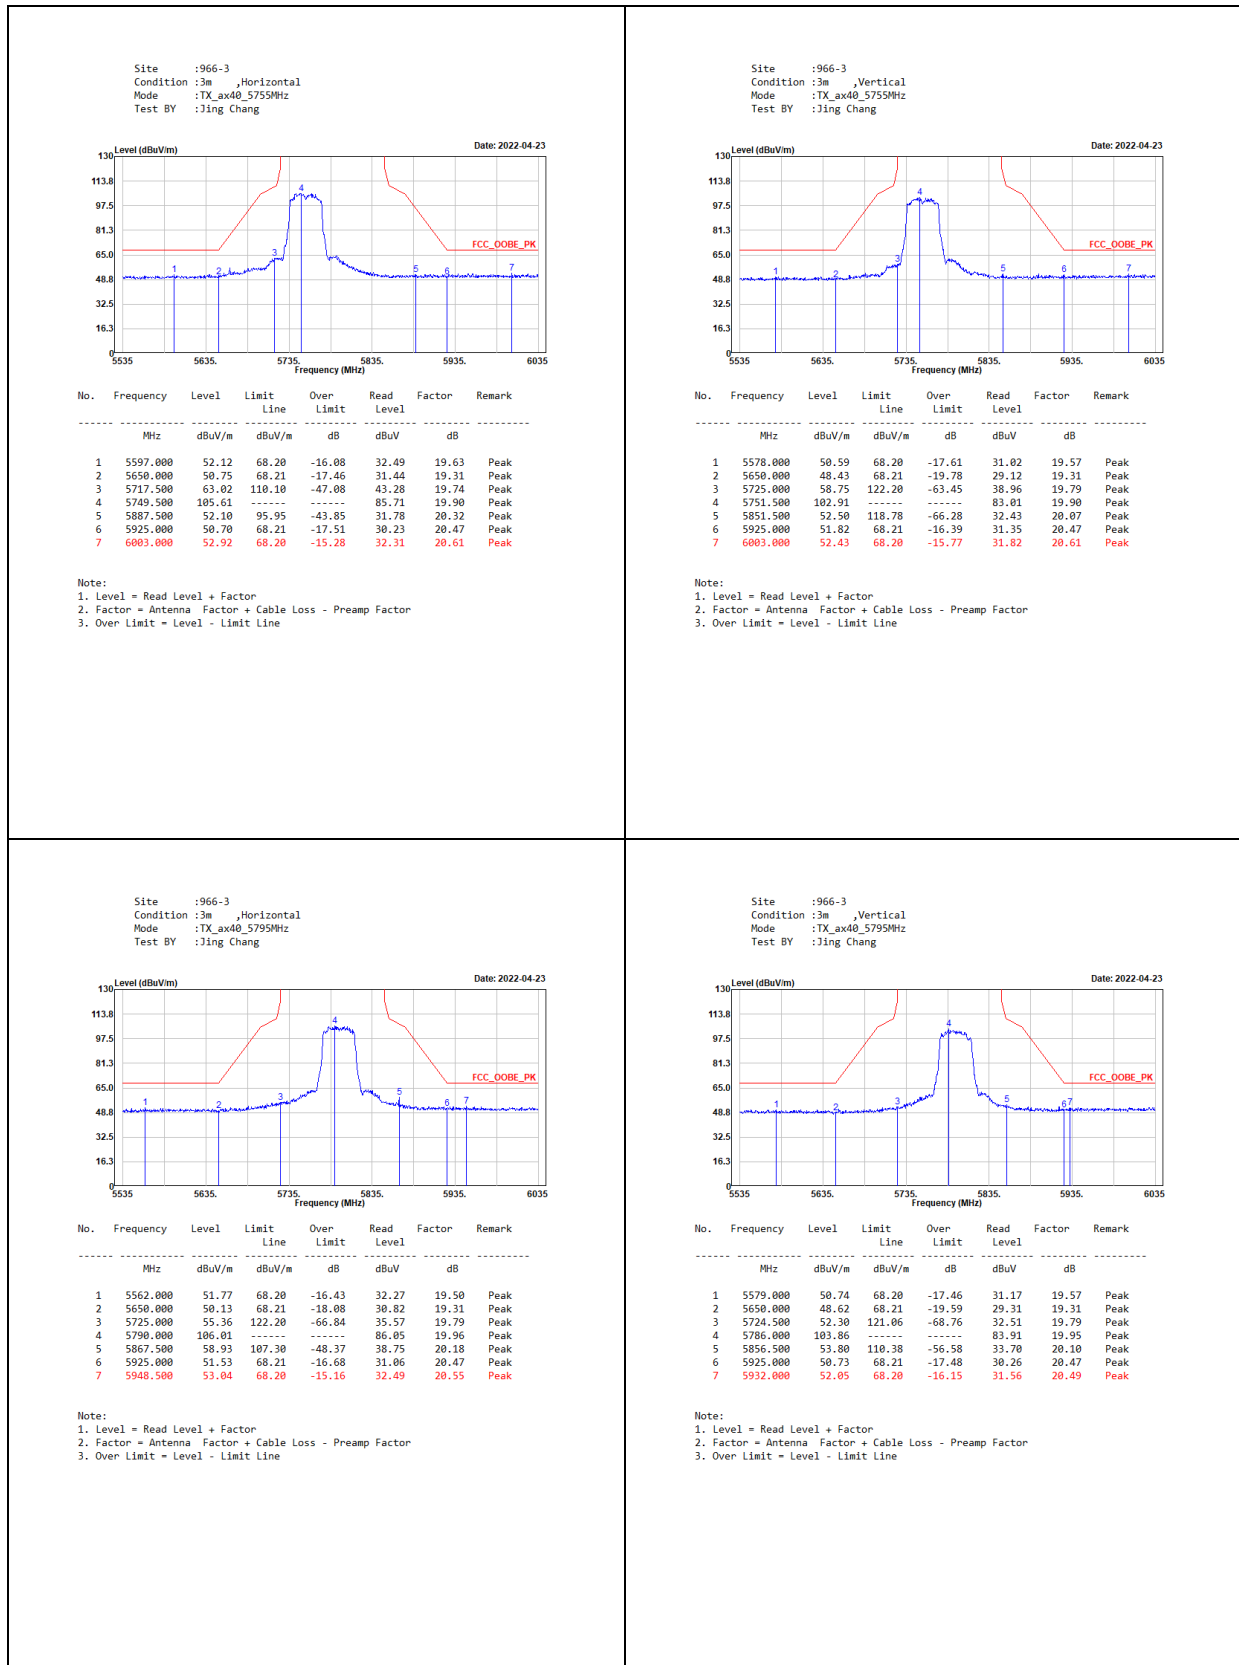

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
Test BY :Jing Chang

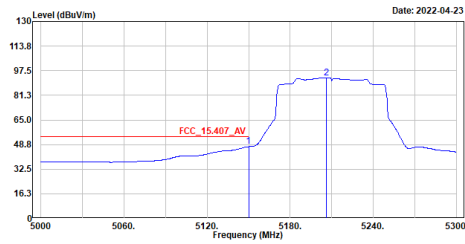


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	47.38	54.00	-6.62	28.98	18.40	Average
2	5206.100	92.90	-----	-----	74.27	18.63	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
Test BY :Jing Chang

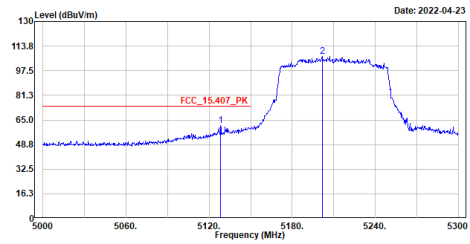


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5128.400	61.42	74.00	-12.58	43.07	18.35	Peak
2	5201.600	106.83	-----	-----	88.22	18.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz
Test BY :Jing Chang

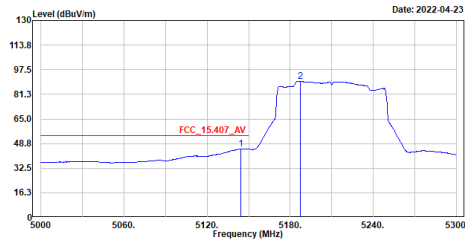


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5144.300	45.16	54.00	-8.84	26.77	18.39	Average
2	5187.500	89.76	-----	-----	71.21	18.55	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz
Test BY :Jing Chang

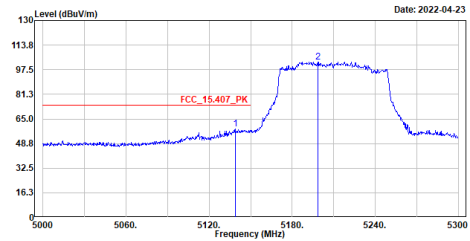


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5138.900	58.40	74.00	-15.60	40.02	18.38	Peak
2	5198.600	102.74	-----	-----	84.15	18.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

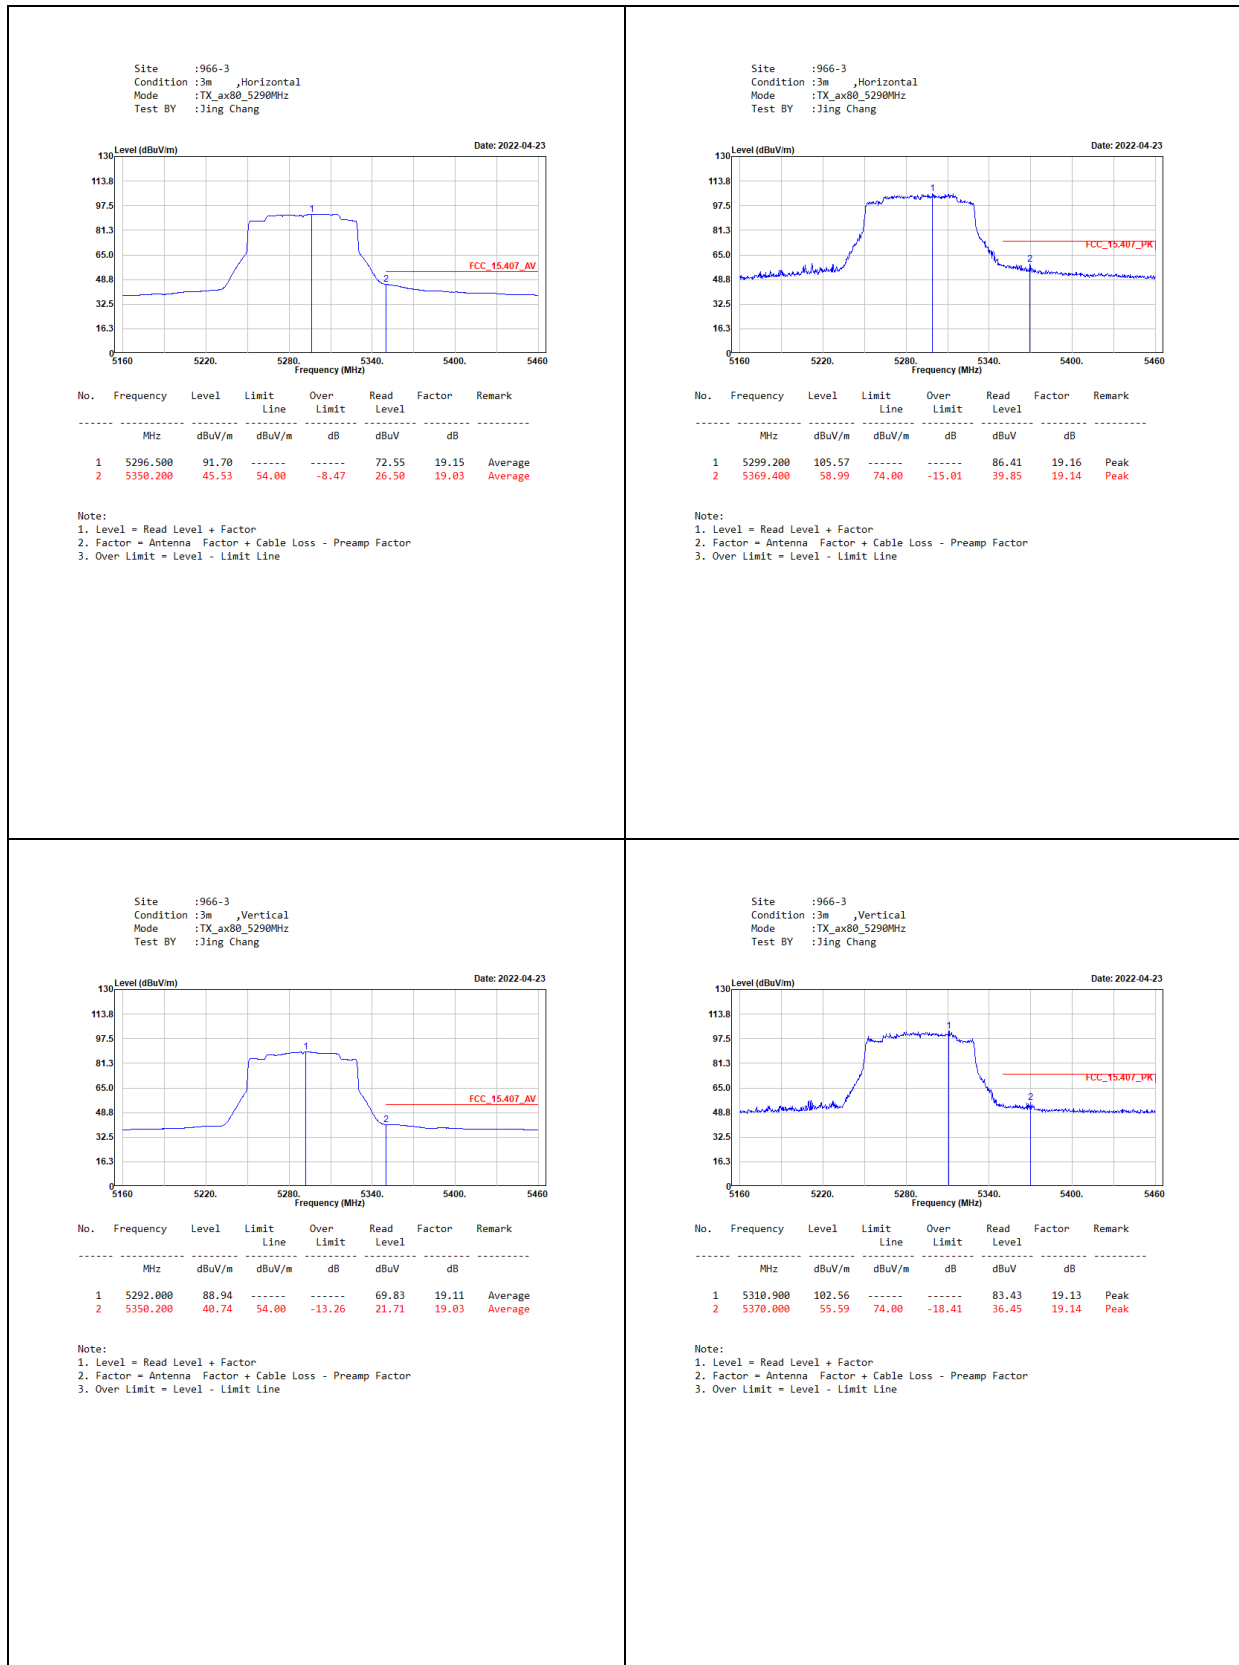


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5530MHz
Test BY :Jing Chang

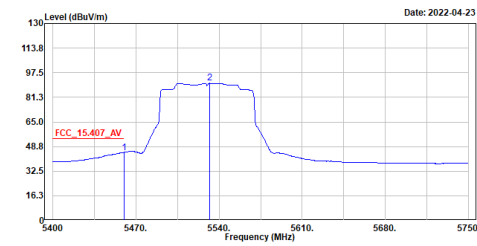

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	44.85	54.00	-9.15	25.61	19.24	Average
2	5532.300	90.51	-----	-----	71.07	19.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5530MHz
Test BY :Jing Chang

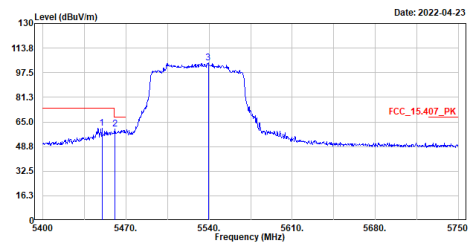

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5449.700	60.75	74.00	-13.25	41.55	19.20	Peak
2	5468.900	60.53	68.22	-7.69	41.29	19.24	Peak
3	5539.300	103.98	-----	-----	84.53	19.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5530MHz
Test BY :Jing Chang

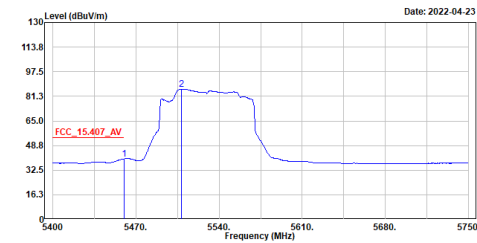

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	39.89	54.00	-14.11	20.65	19.24	Average
2	5508.500	86.02	-----	-----	66.63	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5530MHz
Test BY :Jing Chang

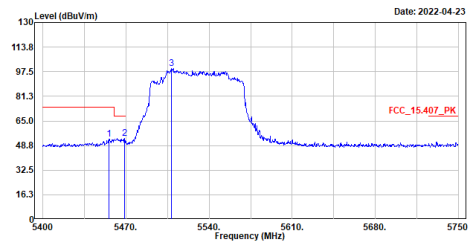

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5455.650	53.02	74.00	-20.98	33.79	19.23	Peak
2	5468.950	53.53	68.22	-14.69	34.26	19.27	Peak
3	5508.150	99.47	-----	-----	80.08	19.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5775MHz
Test BY :Jing Chang

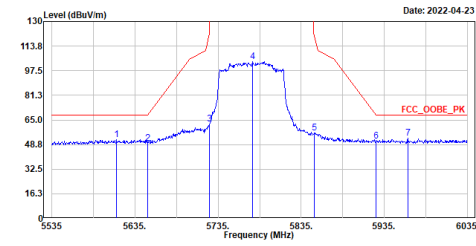


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5613.000	51.95	68.20	-16.25	32.40	19.55	Peak
2	5650.000	49.57	68.21	-18.64	30.26	19.31	Peak
3	5725.000	62.44	122.20	-59.76	42.65	19.79	Peak
4	5776.500	103.74	-----	-----	83.81	19.93	Peak
5	5851.000	56.62	119.92	-63.30	36.55	20.07	Peak
6	5925.000	50.90	68.21	-17.31	30.43	20.47	Peak
7	5963.500	52.91	68.20	-15.29	32.35	20.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5775MHz
Test BY :Jing Chang

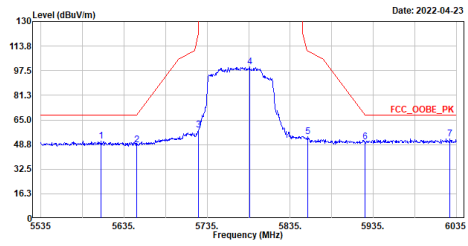


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5607.500	51.07	68.20	-17.13	31.48	19.59	Peak
2	5650.000	48.73	68.21	-19.48	29.42	19.31	Peak
3	5725.000	58.20	122.20	-64.00	38.41	19.79	Peak
4	5786.000	99.83	-----	-----	79.88	19.95	Peak
5	5856.500	54.07	110.38	-56.31	33.97	20.10	Peak
6	5925.000	50.47	68.21	-17.74	30.00	20.47	Peak
7	6027.500	52.31	68.20	-15.89	31.59	20.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax160_5250MHz_B1
Test BY :Jing Chang

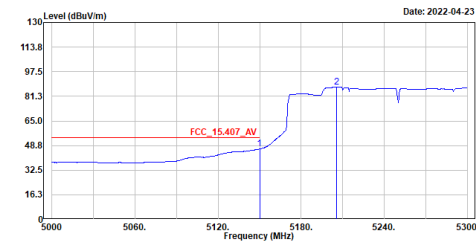


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	46.48	54.00	-7.52	28.88	18.40	Average
2	5205.000	87.40	-----	-----	68.77	18.63	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax160_5250MHz_B1
Test BY :Jing Chang

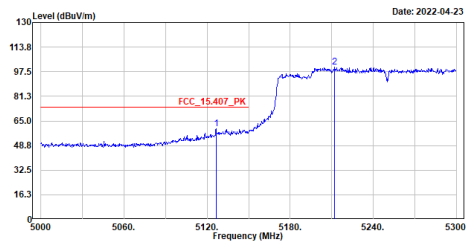


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5126.600	59.67	74.00	-14.33	41.34	18.33	Peak
2	5212.100	100.59	-----	-----	81.92	18.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B1
Test BY :Jing Chang

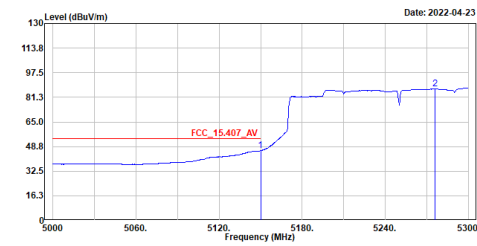


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	45.95	54.00	-8.05	27.55	18.40	Average
2	5276.000	86.73	-----	-----	67.70	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B1
Test BY :Jing Chang

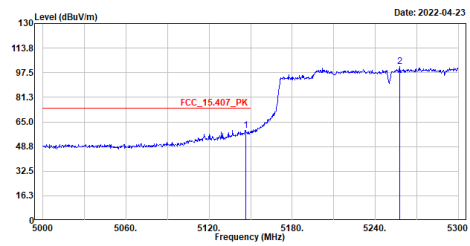


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5146.400	59.48	74.00	-14.52	41.09	18.39	Peak
2	5257.700	101.43	-----	-----	82.49	18.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5250MHz_B2
Test BY :Jing Chang

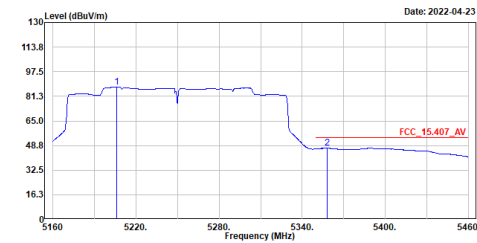


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5205.900	87.41	-----	-----	68.78	18.63	Average
2	5358.300	47.06	54.00	-6.94	28.00	19.06	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5250MHz_B2
Test BY :Jing Chang

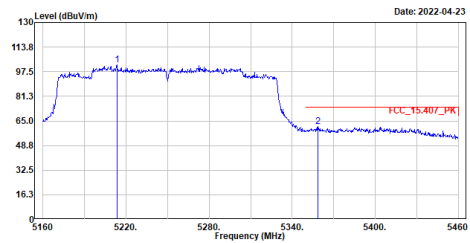


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5213.400	102.05	-----	-----	83.38	18.67	Peak
2	5358.600	61.10	74.00	-12.90	42.04	19.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B2
Test BY :Jing Chang

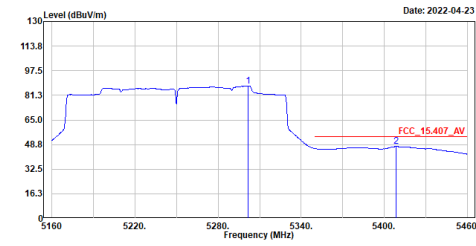


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5381.900	87.47	-----	-----	68.32	19.15	Average
2	5408.400	47.45	54.00	-6.55	28.14	19.31	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B2
Test BY :Jing Chang

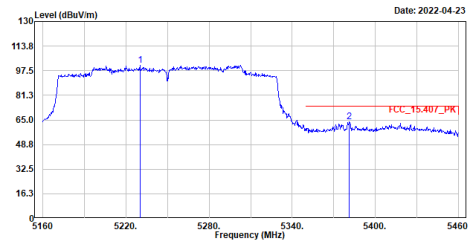


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5230.200	101.19	-----	-----	82.41	18.78	Peak
2	5381.400	63.53	74.00	-10.47	44.32	19.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5570MHz
Test BY :Jing Chang

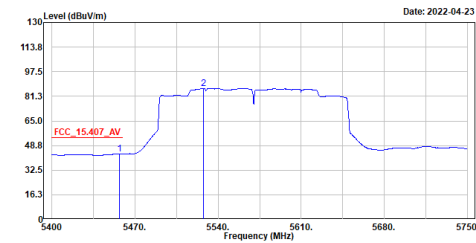


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5457.050	43.38	54.00	-10.62	24.15	19.23	Average
2	5527.750	86.48	-----	-----	67.06	19.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5570MHz
Test BY :Jing Chang

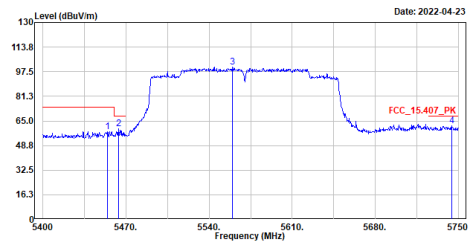


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5454.250	57.95	74.00	-16.05	38.73	19.22	Peak
2	5464.050	59.92	68.22	-8.30	40.66	19.26	Peak
3	5559.600	100.73	-----	-----	81.23	19.50	Peak
4	5744.400	61.90	68.22	-6.32	42.02	19.88	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

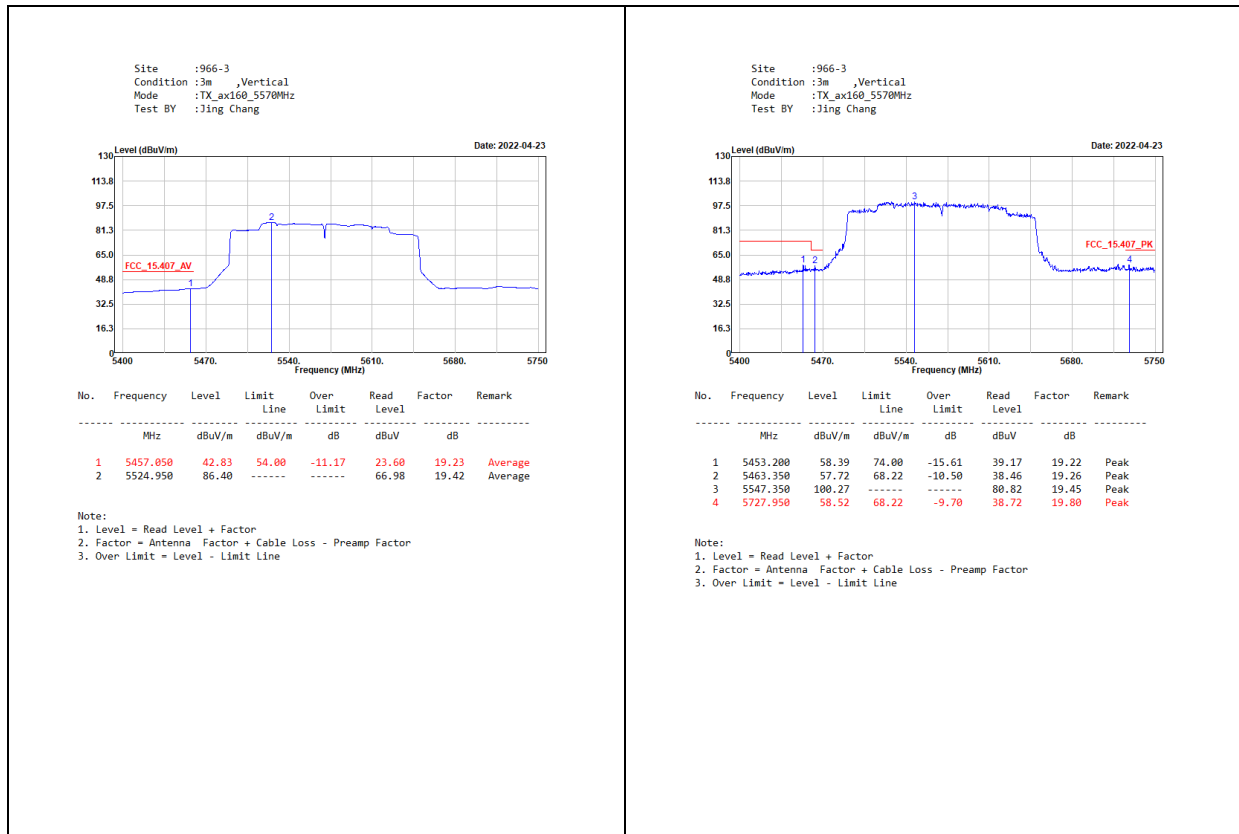

SISO B

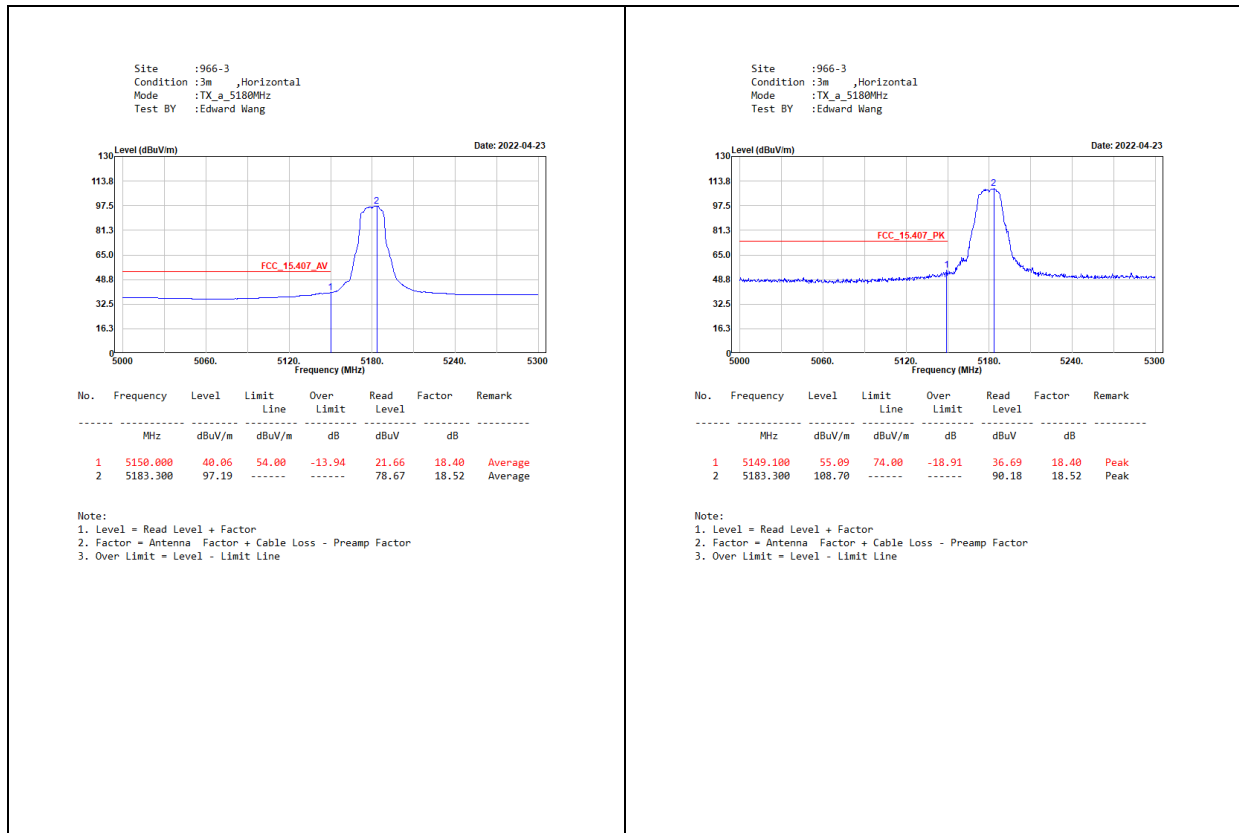

Site :966-3
Condition :3m ,Vertical
Mode :TX_a_5180MHz
Test BY :Edward Wang

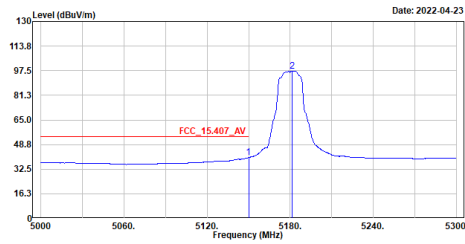


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	40.11	54.00	-13.89	21.71	18.40	Average
2	5181.500	97.28	-----	-----	78.77	18.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_a_5180MHz
Test BY :Edward Wang

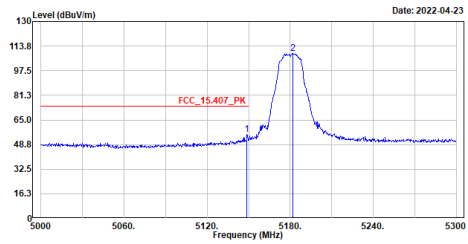


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5148.800	55.42	74.00	-18.58	37.02	18.40	Peak
2	5181.800	108.70	-----	-----	90.19	18.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_a_5320MHz
Test BY :Edward Wang

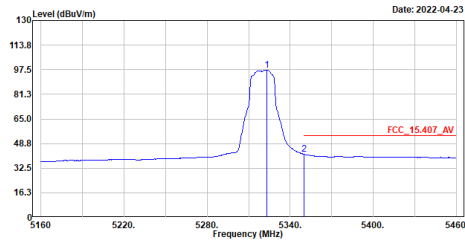


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5323.200	97.37	-----	-----	78.28	19.09	Average
2	5350.200	41.64	54.00	-12.36	22.61	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_a_5320MHz
Test BY :Edward Wang

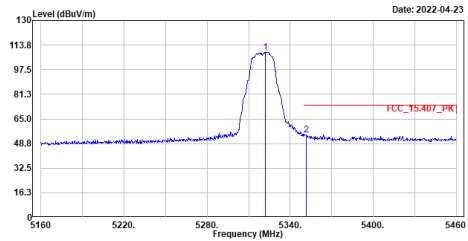


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5322.000	108.99	-----	-----	89.90	19.09	Peak
2	5351.400	54.67	74.00	-19.33	35.63	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_a_5320MHz
Test BY :Edward Wang

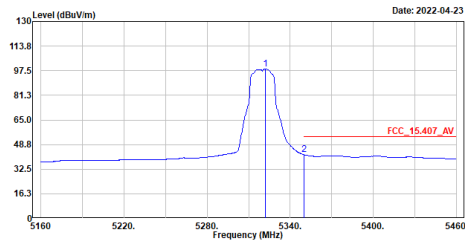

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5322.300	98.42	-----	-----	79.33	19.09	Average
2	5350.200	41.98	54.00	-12.02	22.95	19.03	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_a_5320MHz
Test BY :Edward Wang

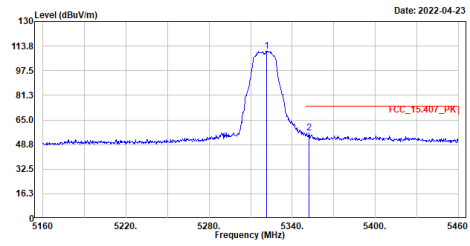

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5321.400	110.32	-----	-----	91.23	19.09	Peak
2	5352.300	56.50	74.00	-17.50	37.46	19.04	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_a_5500MHz
Test BY :Edward Wang

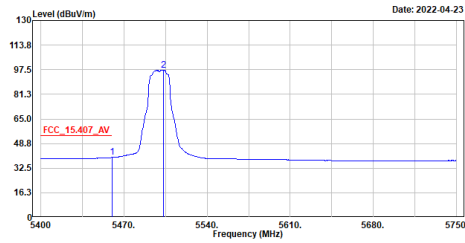

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	39.55	54.00	-14.45	20.31	19.24	Average
2	5503.250	97.31	-----	-----	77.92	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_a_5500MHz
Test BY :Edward Wang

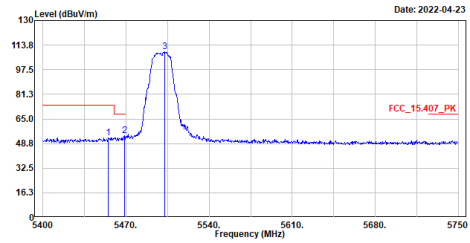

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5455.300	52.60	74.00	-21.40	33.38	19.22	Peak
2	5468.600	53.80	68.22	-14.42	34.53	19.27	Peak
3	5502.550	109.28	-----	-----	89.89	19.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_a_5500MHz
Test BY :Edward Wang

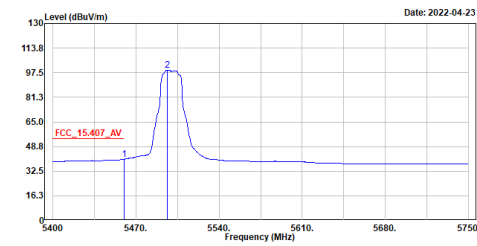

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	40.34	54.00	-13.66	21.10	19.24	Average
2	5496.600	99.17	-----	-----	79.80	19.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_a_5500MHz
Test BY :Edward Wang

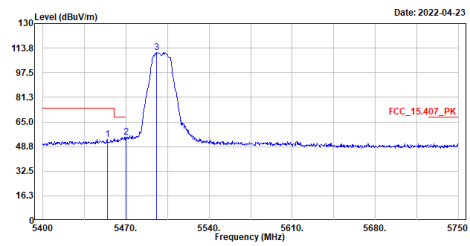

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5454.250	53.36	74.00	-20.64	34.14	19.22	Peak
2	5470.000	54.77	68.22	-13.45	35.49	19.28	Peak
3	5495.550	110.87	-----	-----	91.50	19.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_a_5700MHz
Test BY :Edward Wang

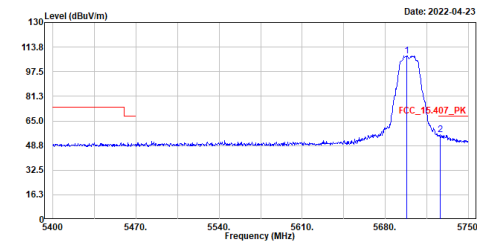

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5698.200	107.98	-----	-----	88.32	19.66	Peak
2	5726.550	55.82	68.22	-12.40	36.02	19.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_a_5700MHz
Test BY :Edward Wang

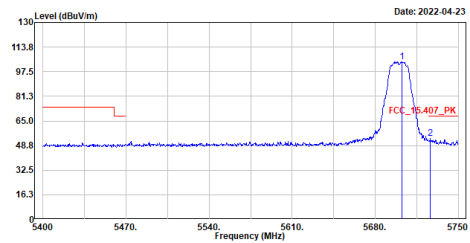

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5702.750	104.14	-----	-----	84.46	19.68	Peak
2	5726.550	53.65	68.22	-14.57	33.85	19.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_a_5745MHz
Test BY :Edward Wang

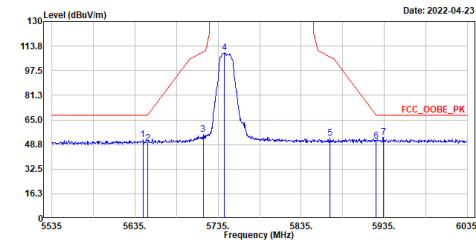

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5644.500	51.87	68.20	-16.33	32.52	19.35	Peak
2	5650.000	49.46	68.21	-18.75	30.15	19.31	Peak
3	5717.000	55.67	109.96	-54.29	35.93	19.74	Peak
4	5742.500	109.18	-----	-----	89.31	19.87	Peak
5	5870.000	53.12	106.60	-53.48	32.92	20.20	Peak
6	5925.000	51.24	68.21	-16.97	30.77	20.47	Peak
7	5934.000	53.50	68.20	-14.70	33.00	20.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_a_5745MHz
Test BY :Edward Wang

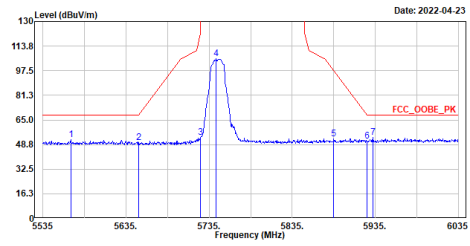

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5568.500	51.81	68.20	-16.39	32.28	19.53	Peak
2	5650.000	50.07	68.21	-18.14	30.76	19.31	Peak
3	5725.000	53.47	122.20	-68.73	33.68	19.79	Peak
4	5743.500	105.23	-----	-----	85.36	19.87	Peak
5	5885.000	52.53	97.80	-45.27	32.24	20.29	Peak
6	5925.000	51.14	68.21	-17.07	30.67	20.47	Peak
7	5932.000	53.34	68.20	-14.86	32.85	20.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_a_5825MHz
Test BY :Edward Wang

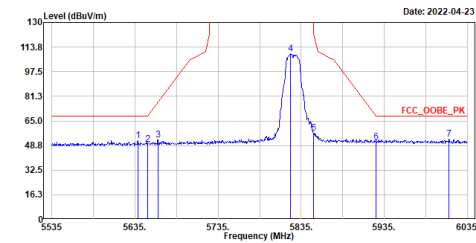

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5638.500	51.85	68.20	-16.35	32.46	19.39	Peak
2	5650.000	49.40	68.21	-18.81	30.09	19.31	Peak
3	5662.500	52.40	77.46	-25.06	32.98	19.42	Peak
4	5822.500	109.22	-----	-----	89.21	20.01	Peak
5	5850.000	57.04	122.20	-65.16	36.98	20.06	Peak
6	5925.000	51.22	68.21	-16.99	30.75	20.47	Peak
7	6013.000	52.75	68.20	-15.45	32.09	20.66	Peak





Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_a_5825MHz
Test BY :Edward Wang

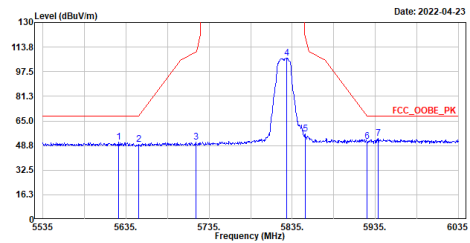


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5626.000	50.87	68.20	-17.33	31.40	19.47	Peak
2	5650.000	49.35	68.21	-18.86	30.04	19.31	Peak
3	5719.000	50.88	110.52	-59.64	31.11	19.77	Peak
4	5828.500	106.46	-----	-----	86.43	20.03	Peak
5	5850.500	56.49	121.06	-64.57	36.43	20.06	Peak
6	5925.000	51.72	68.21	-16.49	31.25	20.47	Peak
7	5938.500	53.24	68.20	-14.96	32.72	20.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

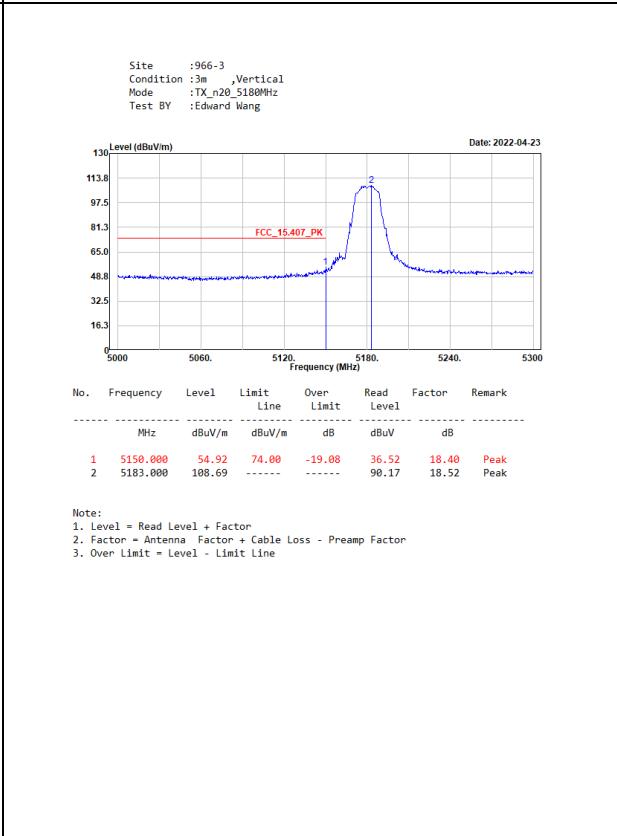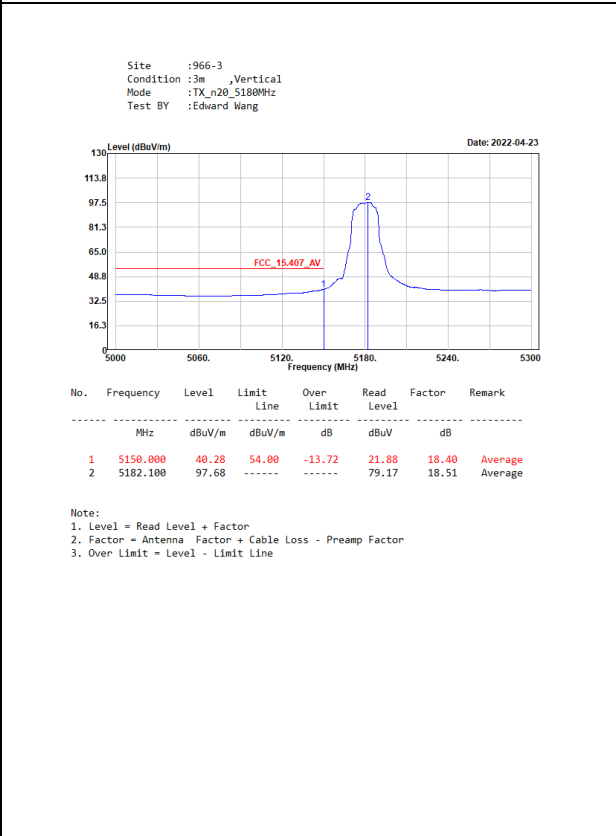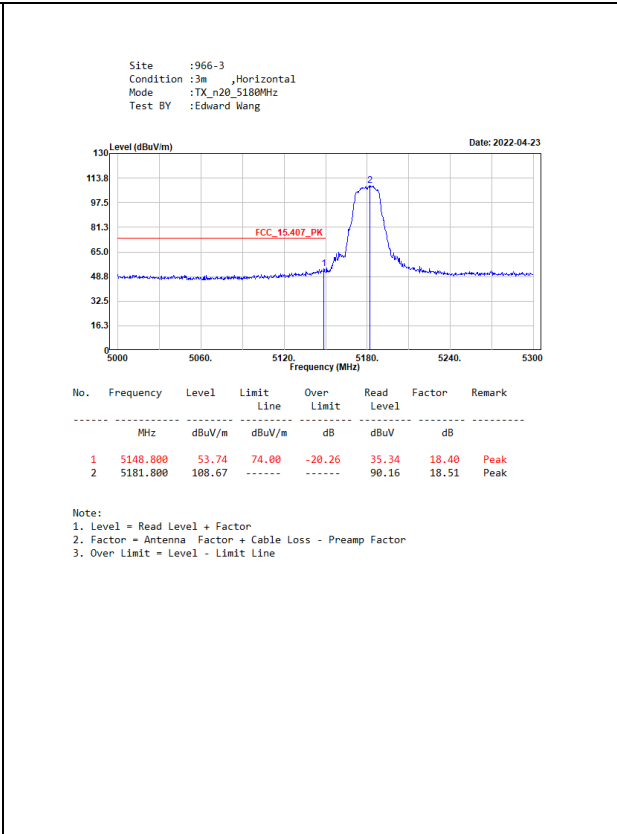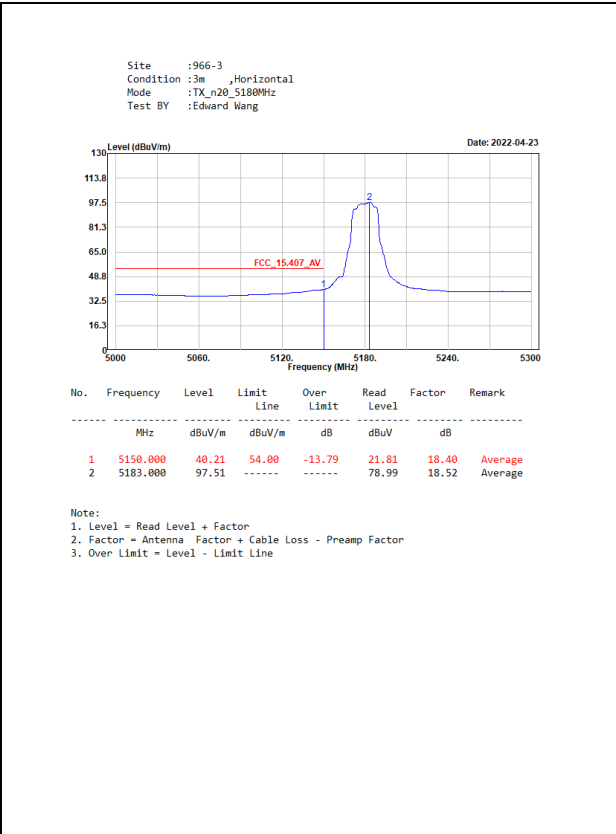

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5320MHz
Test BY :Edward Wang

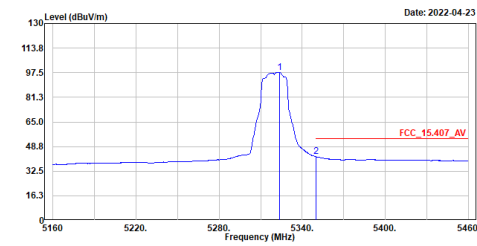


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5323.500	97.66	-----	-----	78.57	19.09	Average
2	5350.200	41.97	54.00	-12.03	22.94	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5320MHz
Test BY :Edward Wang

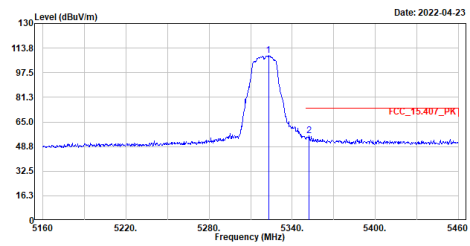


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5322.900	108.76	-----	-----	89.67	19.09	Peak
2	5352.300	56.00	74.00	-18.00	36.96	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5320MHz
Test BY :Edward Wang

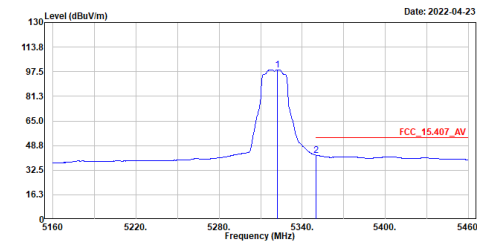


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5322.300	98.67	-----	-----	79.58	19.09	Average
2	5350.200	42.34	54.00	-11.66	23.31	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5320MHz
Test BY :Edward Wang

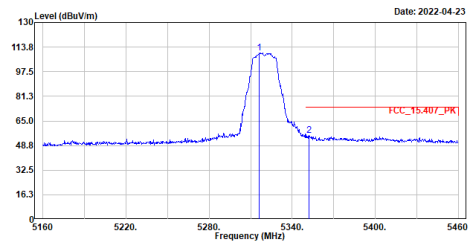


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5316.300	109.88	-----	-----	90.78	19.10	Peak
2	5352.000	55.28	74.00	-18.72	36.24	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5500MHz
Test BY :Edward Wang

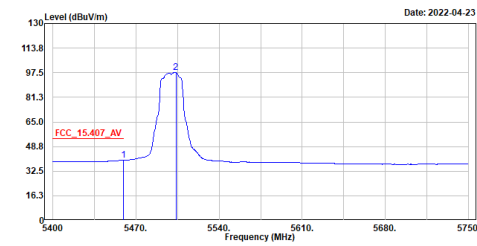

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.150	39.68	54.00	-14.32	29.44	19.24	Average
2	5503.600	97.55	-----	-----	78.16	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5500MHz
Test BY :Edward Wang

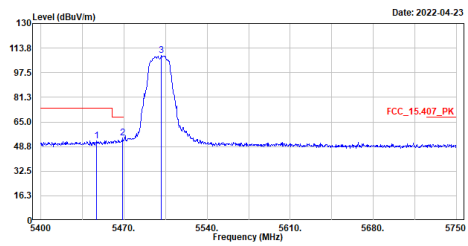

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5446.900	52.72	74.00	-21.28	33.51	19.21	Peak
2	5468.950	54.38	68.22	-13.84	35.11	19.27	Peak
3	5501.500	108.71	-----	-----	89.32	19.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5500MHz
Test BY :Edward Wang

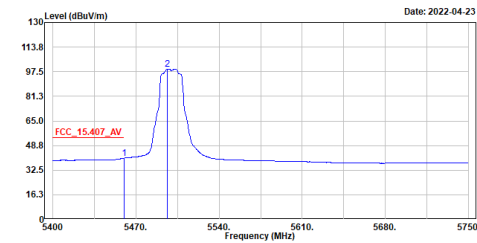

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	40.40	54.00	-13.60	21.16	19.24	Average
2	5496.250	99.07	-----	-----	79.70	19.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5500MHz
Test BY :Edward Wang

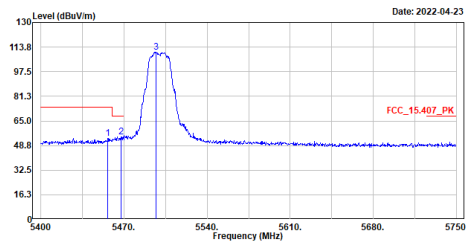

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5456.350	53.59	74.00	-20.41	34.36	19.23	Peak
2	5467.550	54.59	68.22	-13.63	35.32	19.27	Peak
3	5497.300	110.42	-----	-----	91.05	19.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5700MHz
Test BY :Edward Wang

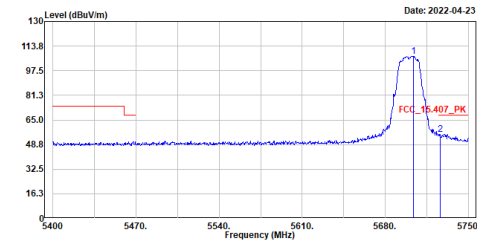


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5703.800	107.14	-----	-----	87.45	19.69	Peak
2	5726.200	55.55	68.22	-12.67	35.76	19.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5700MHz
Test BY :Edward Wang

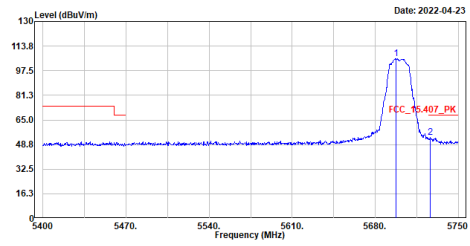


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5697.500	105.59	-----	-----	85.95	19.64	Peak
2	5726.550	53.43	68.22	-14.79	33.63	19.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5745MHz
Test BY :Edward Wang

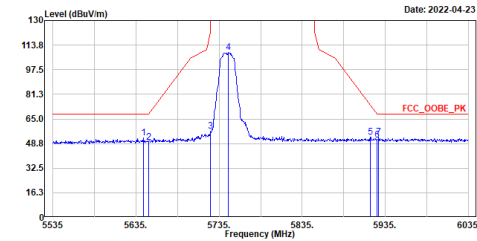


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5644.000	52.47	68.20	-15.73	33.11	19.36	Peak
2	5650.000	49.42	68.21	-18.79	30.11	19.31	Peak
3	5725.000	57.12	122.20	-65.08	37.33	19.79	Peak
4	5746.500	108.68	-----	-----	88.79	19.89	Peak
5	5917.000	52.97	74.13	-21.16	32.52	20.45	Peak
6	5925.000	50.85	68.21	-17.36	30.38	20.47	Peak
7	5927.000	52.86	68.20	-15.34	32.39	20.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5745MHz
Test BY :Edward Wang

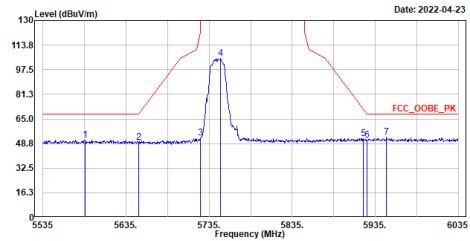


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5585.500	51.14	68.20	-17.06	31.55	19.59	Peak
2	5650.000	49.75	68.21	-18.46	30.44	19.31	Peak
3	5725.000	52.61	122.20	-69.59	32.82	19.79	Peak
4	5748.500	104.90	-----	-----	85.01	19.89	Peak
5	5920.500	52.12	71.54	-19.42	31.66	20.46	Peak
6	5925.000	50.94	68.21	-17.27	30.47	20.47	Peak
7	5948.500	53.02	68.20	-15.18	32.47	20.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5825MHz
Test BY :Edward Wang

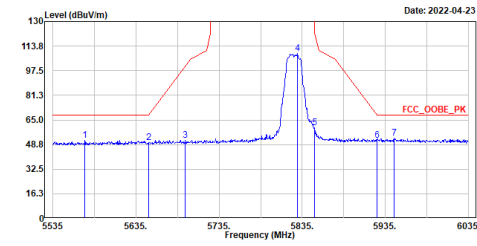


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5573.500	51.69	68.20	-16.51	32.14	19.55	Peak
2	5650.000	49.96	68.21	-18.25	30.65	19.31	Peak
3	5694.500	51.66	101.13	-49.47	32.03	19.63	Peak
4	5829.000	108.72	-----	-----	88.69	20.03	Peak
5	5850.000	59.84	122.20	-62.36	39.78	20.06	Peak
6	5925.000	51.30	68.21	-16.91	30.83	20.47	Peak
7	5945.500	52.89	68.20	-15.31	32.36	20.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5825MHz
Test BY :Edward Wang

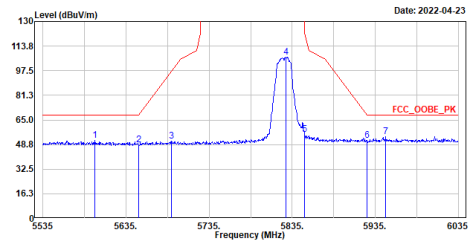


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5597.500	51.40	68.20	-16.80	31.77	19.63	Peak
2	5650.000	48.59	68.21	-19.62	29.28	19.31	Peak
3	5689.500	50.97	97.43	-46.46	31.37	19.60	Peak
4	5827.500	106.34	-----	-----	86.31	20.03	Peak
5	5850.000	55.40	122.20	-66.80	35.34	20.06	Peak
6	5925.000	51.69	68.21	-16.52	31.22	20.47	Peak
7	5947.500	54.19	68.20	-14.01	33.66	20.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
Test BY :Edward Wang

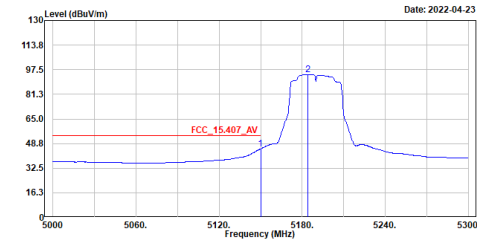


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	45.23	54.00	-8.77	26.83	18.40	Average
2	5184.200	94.26	-----	-----	75.73	18.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
Test BY :Edward Wang

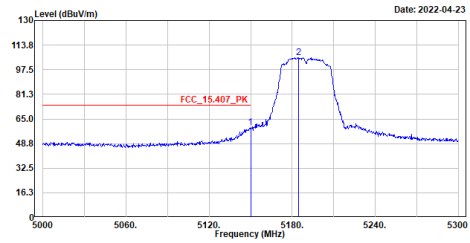


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	59.56	74.00	-14.44	41.16	18.40	Peak
2	5184.800	105.41	-----	-----	86.87	18.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ,40.5190MHz
Test BY :Edward Wang

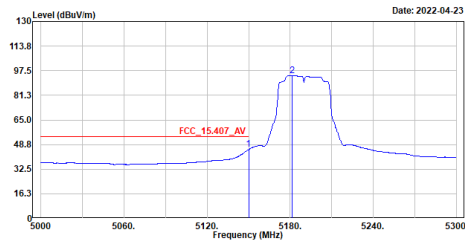


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	45.45	54.00	-8.55	27.05	18.40	Average
2	5181.500	94.39	-----	-----	75.88	18.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ,40.5190MHz
Test BY :Edward Wang

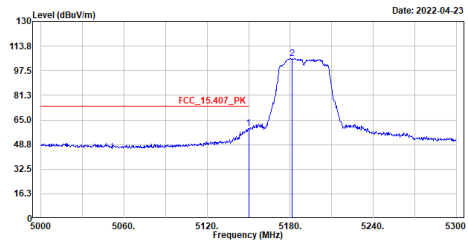


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	59.25	74.00	-14.75	40.85	18.40	Peak
2	5181.200	105.47	-----	-----	86.96	18.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ,40.5310MHz
Test BY :Edward Wang

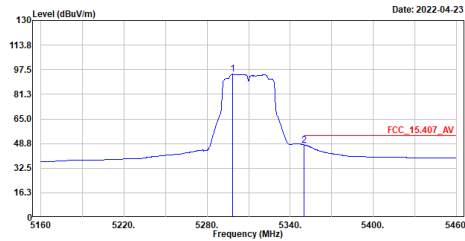


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5298.600	94.46	-----	-----	75.31	19.15	Average
2	5350.200	47.76	54.00	-6.24	28.73	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ,40.5310MHz
Test BY :Edward Wang

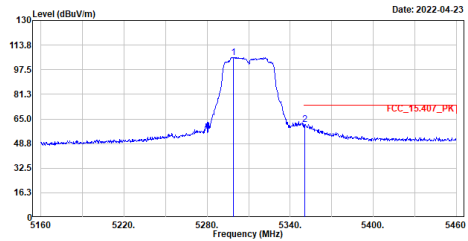


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5298.900	105.69	-----	-----	86.53	19.16	Peak
2	5350.500	61.26	74.00	-12.74	42.23	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ,n40_5310MHz
Test BY :Edward Wang

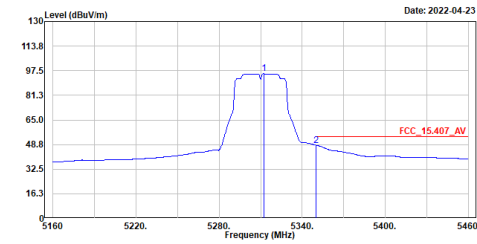


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5312.400	95.46	-----	-----	76.34	19.12	Average
2	5350.200	48.23	54.00	-5.77	29.20	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ,n40_5310MHz
Test BY :Edward Wang

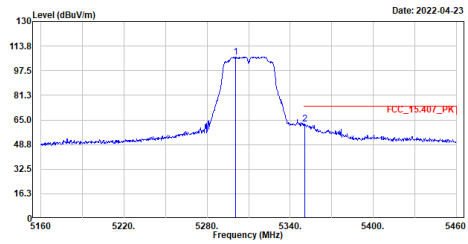


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5300.700	106.62	-----	-----	87.46	19.16	Peak
2	5350.800	62.26	74.00	-11.74	43.23	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ,n40_5510MHz
Test BY :Edward Wang

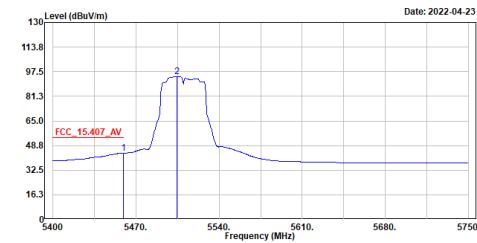


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.500	43.76	54.00	-10.24	24.52	19.24	Average
2	5504.650	94.35	-----	-----	74.96	19.39	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ,n40_5510MHz
Test BY :Edward Wang

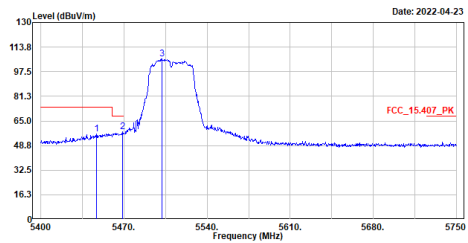


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5446.900	56.26	74.00	-17.74	37.05	19.21	Peak
2	5468.950	58.09	68.22	-10.13	38.82	19.27	Peak
3	5501.850	106.08	-----	-----	86.69	19.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_n40_5510MHz
Test BY :Edward Wang

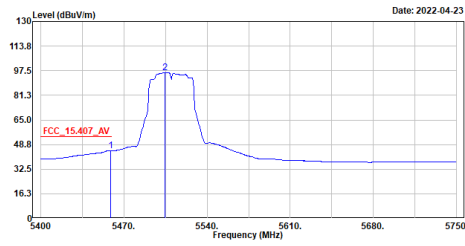

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.800	44.74	54.00	-9.26	25.50	19.24	Average
2	5504.650	96.22	-----	-----	76.83	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_n40_5510MHz
Test BY :Edward Wang

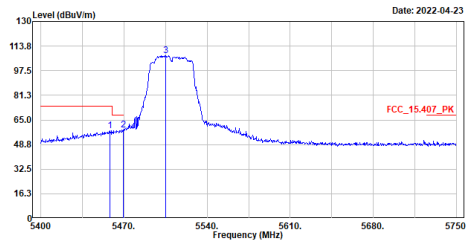

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.450	58.02	74.00	-15.98	38.78	19.24	Peak
2	5469.300	58.49	68.22	-9.73	39.22	19.27	Peak
3	5505.000	107.66	-----	-----	88.27	19.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_n40_5670MHz
Test BY :Edward Wang

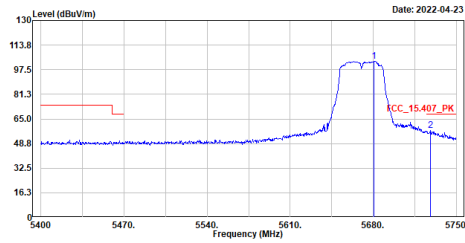

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5680.700	103.26	-----	-----	83.72	19.54	Peak
2	5728.300	57.44	68.22	-10.78	37.64	19.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_n40_5670MHz
Test BY :Edward Wang

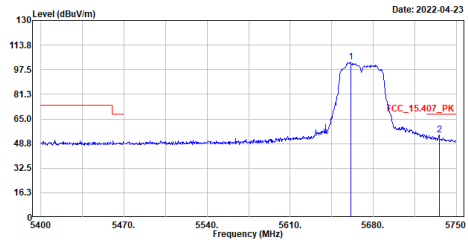

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5661.100	102.35	-----	-----	82.94	19.41	Peak
2	5735.650	54.25	68.22	-13.97	34.42	19.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX ,n40.5755MHz
Test BY :Edward Wang

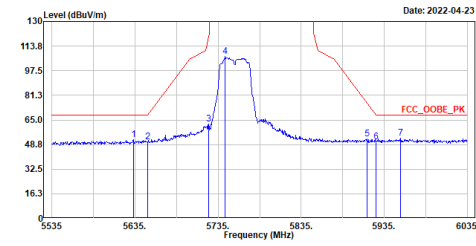

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5633.000	51.87	68.20	-16.33	32.44	19.43	Peak
2	5650.000	50.30	68.21	-17.91	30.99	19.31	Peak
3	5724.000	62.22	119.92	-57.70	42.43	19.79	Peak
4	5743.500	106.74	-----	-----	86.87	19.87	Peak
5	5914.000	52.69	76.35	-23.66	32.25	20.44	Peak
6	5925.000	50.57	68.21	-17.64	30.10	20.47	Peak
7	5954.500	53.06	68.20	-15.14	32.51	20.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX ,n40.5755MHz
Test BY :Edward Wang

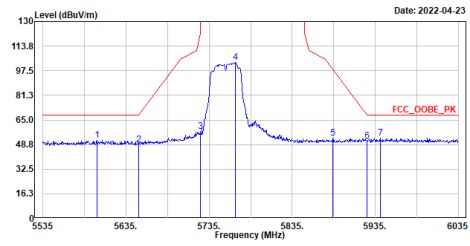

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5600.000	51.58	68.20	-16.62	31.94	19.64	Peak
2	5650.000	48.58	68.21	-19.63	29.27	19.31	Peak
3	5725.000	57.45	122.20	-64.75	37.66	19.79	Peak
4	5766.500	102.88	-----	-----	82.96	19.92	Peak
5	5883.500	52.96	98.91	-45.95	32.68	20.28	Peak
6	5925.000	50.91	68.21	-17.30	30.44	20.47	Peak
7	5941.000	52.84	68.20	-15.36	32.32	20.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX ,n40.5755MHz
Test BY :Edward Wang

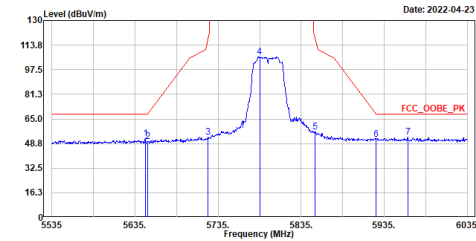

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5647.500	51.80	68.20	-16.40	32.47	19.33	Peak
2	5650.000	49.91	68.21	-18.30	30.60	19.31	Peak
3	5722.500	53.12	116.50	-63.38	33.34	19.78	Peak
4	5785.000	105.99	-----	-----	86.04	19.95	Peak
5	5852.000	56.29	117.64	-61.35	36.22	20.07	Peak
6	5925.000	51.65	68.21	-16.56	31.18	20.47	Peak
7	5963.500	52.04	68.20	-15.36	32.28	20.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX ,n40.5755MHz
Test BY :Edward Wang

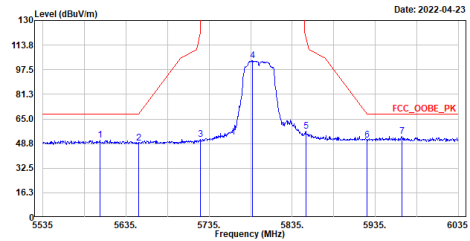

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5603.500	51.07	68.20	-17.13	31.46	19.61	Peak
2	5650.000	49.10	68.21	-19.11	29.79	19.31	Peak
3	5724.500	51.55	121.06	-69.51	31.76	19.79	Peak
4	5787.500	103.41	-----	-----	83.45	19.96	Peak
5	5851.500	56.91	118.78	-61.87	36.84	20.07	Peak
6	5925.000	50.79	68.21	-17.42	30.32	20.47	Peak
7	5967.000	53.57	68.20	-14.63	33.01	20.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Edward Wang

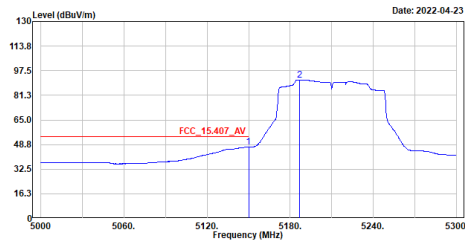


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	46.98	54.00	-7.02	28.58	18.40	Average
2	5186.600	91.43	-----	-----	72.89	18.54	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Edward Wang

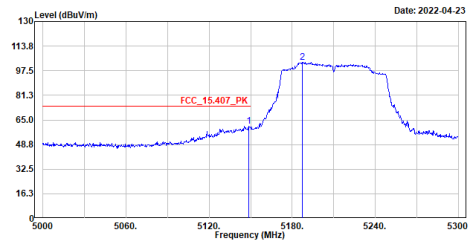


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5148.800	60.85	74.00	-13.15	42.45	18.40	Peak
2	5187.200	103.26	-----	-----	84.72	18.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Edward Wang

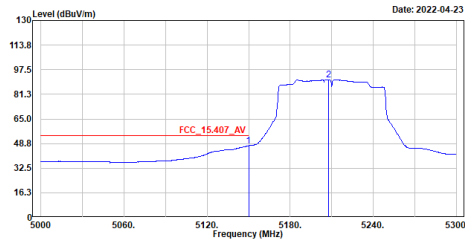


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	47.24	54.00	-6.76	28.84	18.40	Average
2	5207.600	90.94	-----	-----	72.29	18.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Edward Wang

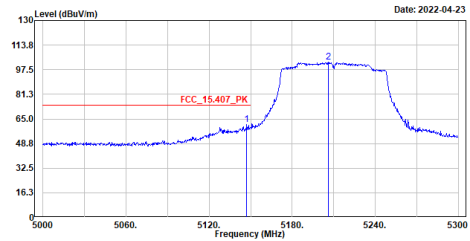


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5147.300	61.11	74.00	-12.89	42.72	18.39	Peak
2	5206.100	102.71	-----	-----	84.08	18.63	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
Test BY :Edward Wang

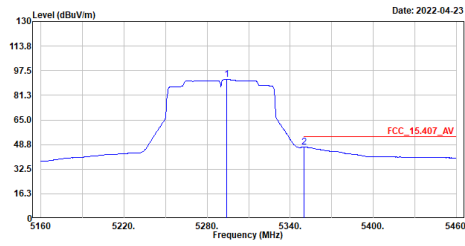


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5294.100	91.72	-----	-----	72.59	19.13	Average
2	5350.200	46.91	54.00	-7.09	27.88	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
Test BY :Edward Wang

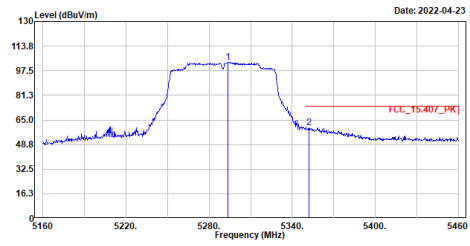


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5293.800	103.08	-----	-----	83.95	19.13	Peak
2	5352.300	59.91	74.00	-14.09	40.87	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
Test BY :Edward Wang

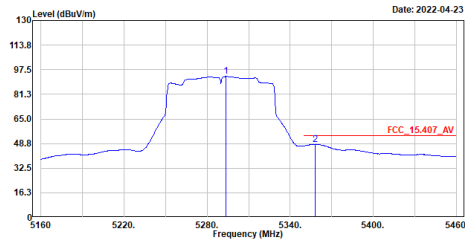


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5293.500	93.04	-----	-----	73.92	19.12	Average
2	5358.300	48.32	54.00	-5.68	29.26	19.06	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
Test BY :Edward Wang

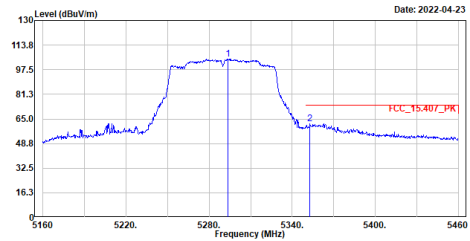


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5293.800	104.63	-----	-----	85.50	19.13	Peak
2	5352.900	61.93	74.00	-12.07	42.89	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
Test BY :Edward Wang

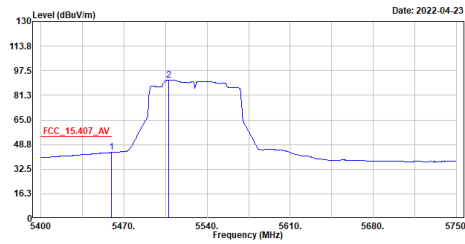

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.150	43.49	54.00	-10.51	24.25	19.24	Average
2	5507.800	91.39	-----	-----	72.00	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
Test BY :Edward Wang

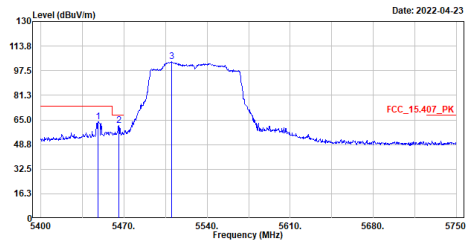

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5448.300	63.85	74.00	-10.15	44.64	19.21	Peak
2	5465.450	61.28	68.22	-6.94	42.02	19.26	Peak
3	5509.900	103.39	-----	-----	83.99	19.40	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
Test BY :Edward Wang

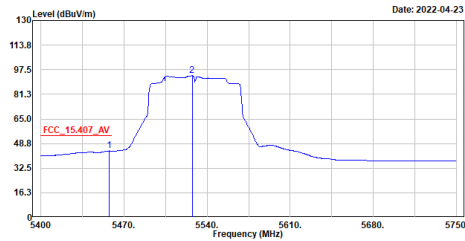

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5457.400	43.91	54.00	-10.09	24.68	19.23	Average
2	5527.400	93.49	-----	-----	74.07	19.42	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
Test BY :Edward Wang

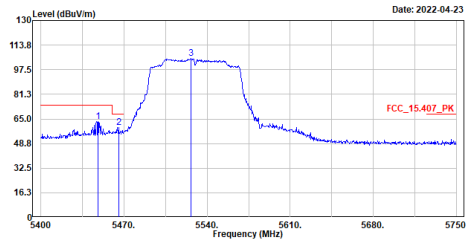

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5448.300	63.15	74.00	-10.85	43.94	19.21	Peak
2	5465.450	59.59	68.22	-8.63	40.33	19.26	Peak
3	5526.700	104.97	-----	-----	85.55	19.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Edward Wang

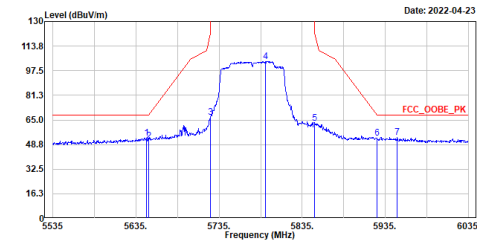


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5648.000	53.03	68.20	-15.17	33.70	19.33	Peak
2	5650.000	51.04	68.21	-17.17	31.73	19.31	Peak
3	5725.000	66.70	122.20	-55.50	46.91	19.79	Peak
4	5791.000	103.64	-----	-----	83.68	19.96	Peak
5	5850.000	62.73	122.20	-59.47	42.67	20.06	Peak
6	5925.000	53.09	68.21	-15.12	32.62	20.47	Peak
7	5949.500	53.71	68.20	-14.49	33.16	20.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Edward Wang

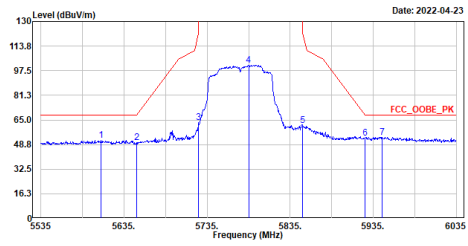


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5607.500	51.43	68.20	-16.77	31.84	19.59	Peak
2	5650.000	49.90	68.21	-18.31	30.59	19.31	Peak
3	5725.000	63.23	122.20	-58.97	43.44	19.79	Peak
4	5785.000	101.09	-----	-----	81.14	19.95	Peak
5	5850.000	61.30	122.20	-60.90	41.24	20.06	Peak
6	5925.000	52.88	68.21	-15.33	32.41	20.47	Peak
7	5945.500	53.65	68.20	-14.55	33.12	20.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac160_5250MHz_B1
Test BY :Edward Wang

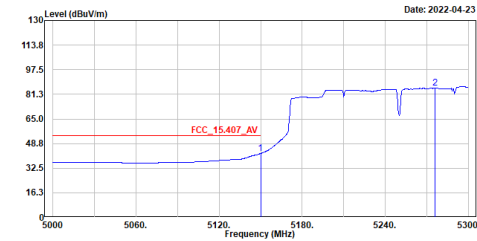


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	42.18	54.00	-11.82	23.78	18.40	Average
2	5276.000	85.27	-----	-----	66.24	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac160_5250MHz_B1
Test BY :Edward Wang

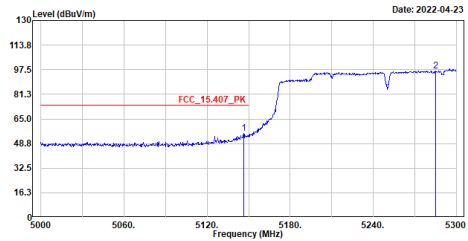


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5146.700	55.47	74.00	-18.53	37.08	18.39	Peak
2	5285.300	96.74	-----	-----	77.66	19.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac160_5250MHz_B1
Test BY :Edward Wang

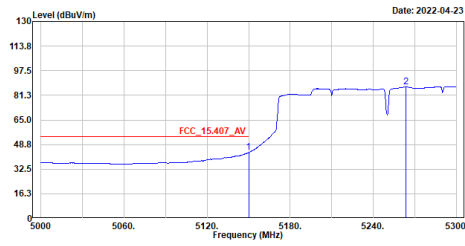


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	43.48	54.00	-10.52	25.08	18.40	Average
2	5263.400	86.90	-----	-----	67.93	18.97	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac160_5250MHz_B1
Test BY :Edward Wang

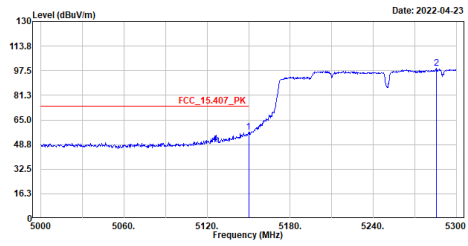


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	56.75	74.00	-17.25	38.35	18.40	Peak
2	5263.400	99.26	-----	-----	80.18	19.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac160_5250MHz_B2
Test BY :Edward Wang

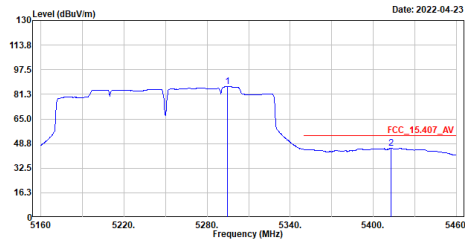


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5294.700	86.41	-----	-----	67.27	19.14	Average
2	5412.600	45.45	54.00	-8.55	26.16	19.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac160_5250MHz_B2
Test BY :Edward Wang

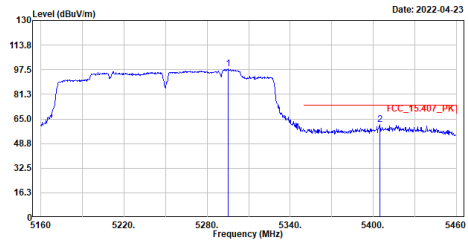


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5295.000	98.01	-----	-----	78.87	19.14	Peak
2	5404.800	61.20	74.00	-12.80	41.90	19.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac160_5250MHz_B2
Test BY :Edward Wang

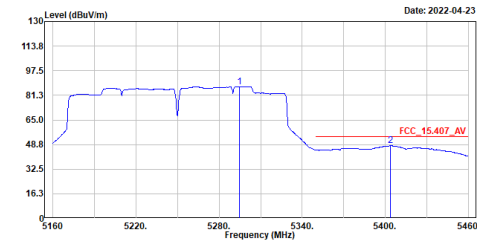


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5294.700	87.05	-----	-----	67.91	19.14	Average
2	5403.900	47.90	54.00	-6.10	28.60	19.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac160_5250MHz_B2
Test BY :Edward Wang

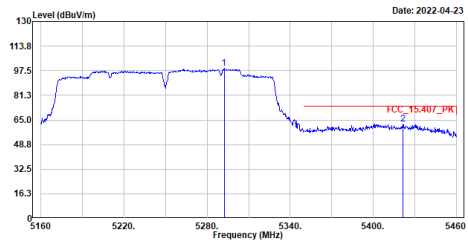


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5292.300	98.89	-----	-----	79.78	19.11	Peak
2	5421.600	62.28	74.00	-11.72	43.01	19.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac160_5570MHz
Test BY :Edward Wang

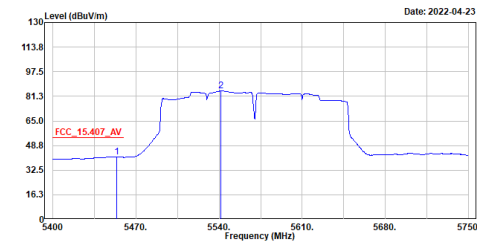


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5453.550	41.17	54.00	-12.83	21.95	19.22	Average
2	5541.400	84.76	-----	-----	65.31	19.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac160_5570MHz
Test BY :Edward Wang

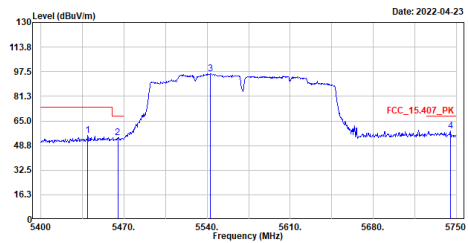


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5439.550	55.41	74.00	-18.59	36.18	19.23	Peak
2	5464.750	54.20	68.22	-14.02	34.94	19.26	Peak
3	5542.800	96.17	-----	-----	76.72	19.45	Peak
4	5745.100	58.41	68.22	-9.81	38.53	19.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax160_5570MHz
Test BY :Edward Wang

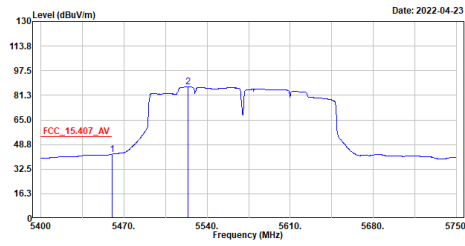

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	42.37	54.00	-11.63	23.13	19.24	Average
2	5523.900	86.90	-----	-----	67.48	19.42	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax160_5570MHz
Test BY :Edward Wang

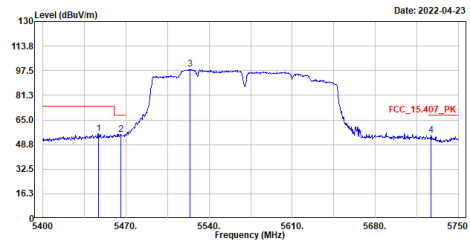

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5446.900	55.86	74.00	-18.14	36.65	19.21	Peak
2	5465.800	55.62	68.22	-12.60	36.36	19.26	Peak
3	5524.250	98.41	-----	-----	78.99	19.42	Peak
4	5726.900	54.75	68.22	-13.47	34.95	19.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz
Test BY :Edward Wang

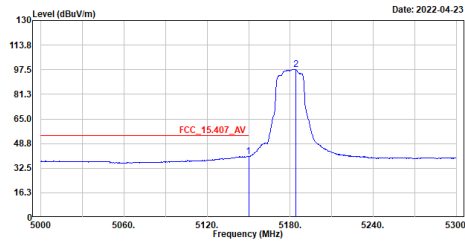

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	40.31	54.00	-13.69	21.91	18.40	Average
2	5183.900	97.85	-----	-----	79.32	18.53	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz
Test BY :Edward Wang

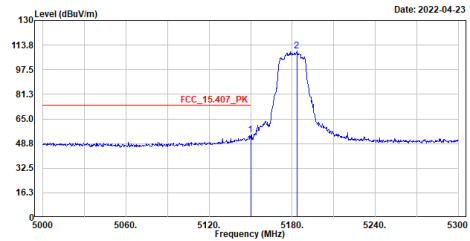

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	54.22	74.00	-19.78	35.82	18.40	Peak
2	5183.300	109.91	-----	-----	91.39	18.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5180MHz
Test BY :Edward Wang

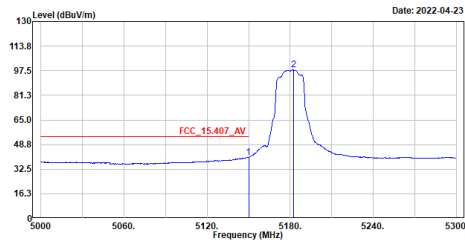


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	40.38	54.00	-13.62	21.98	18.40	Average
2	5182.400	97.95	-----	-----	79.44	18.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5180MHz
Test BY :Edward Wang

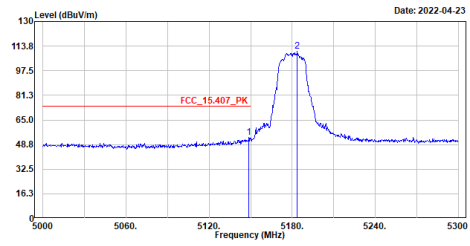


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5148.800	53.41	74.00	-20.59	35.01	18.40	Peak
2	5183.600	110.20	-----	-----	91.67	18.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5320MHz
Test BY :Edward Wang

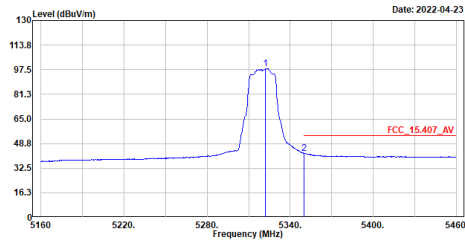


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5322.300	98.07	-----	-----	78.98	19.09	Average
2	5350.200	42.20	54.00	-11.80	23.17	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5320MHz
Test BY :Edward Wang

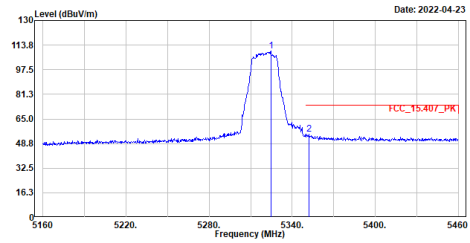


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5324.700	109.74	-----	-----	90.66	19.08	Peak
2	5352.300	55.08	74.00	-18.92	36.04	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5320MHz
Test BY :Edward Wang

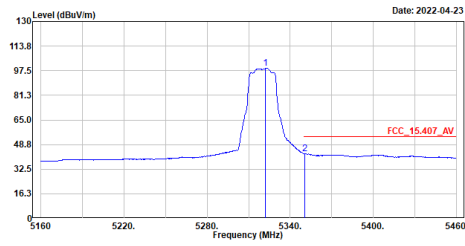


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5322.300	98.97	-----	-----	79.88	19.09	Average
2	5350.500	42.78	54.00	-11.22	23.75	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5320MHz
Test BY :Edward Wang

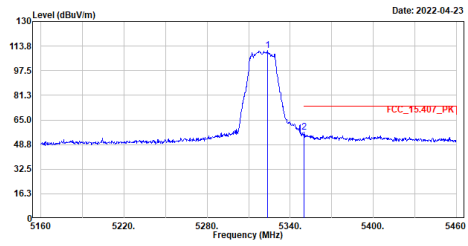


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5323.500	110.66	-----	-----	91.57	19.09	Peak
2	5350.200	56.80	74.00	-17.20	37.77	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5500MHz
Test BY :Edward Wang

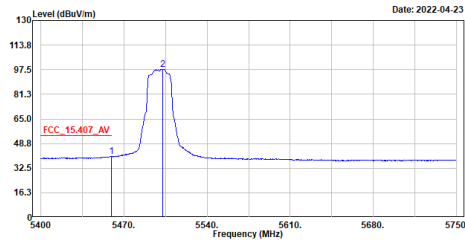


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.150	40.23	54.00	-13.77	20.99	19.24	Average
2	5502.900	97.77	-----	-----	78.38	19.39	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5500MHz
Test BY :Edward Wang

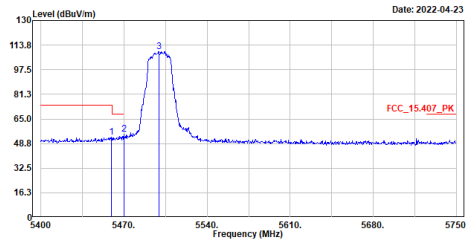


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.150	53.08	74.00	-20.92	33.84	19.24	Peak
2	5470.000	54.74	68.22	-13.48	35.46	19.28	Peak
3	5499.400	109.45	-----	-----	90.06	19.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5500MHz
Test BY :Edward Wang

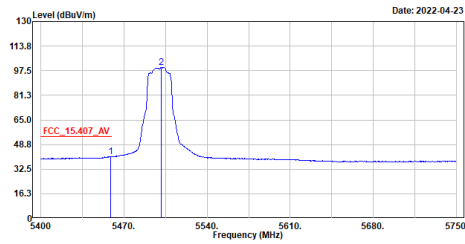

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.800	40.73	54.00	-13.27	21.49	19.24	Average
2	5501.500	99.51	-----	-----	80.12	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5500MHz
Test BY :Edward Wang

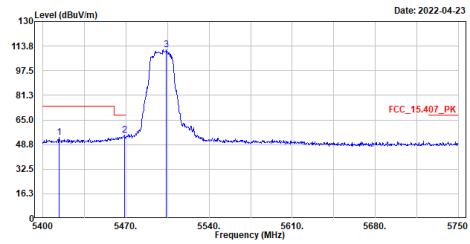

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5413.650	53.48	74.00	-20.52	34.19	19.29	Peak
2	5468.600	55.10	68.22	-13.12	35.83	19.27	Peak
3	5503.950	111.14	-----	-----	91.75	19.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5700MHz
Test BY :Edward Wang

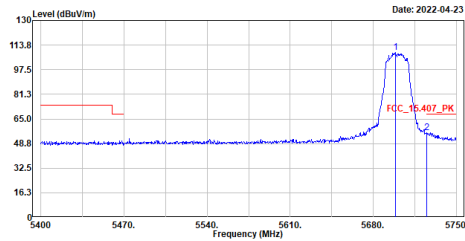

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5698.550	108.74	-----	-----	89.08	19.66	Peak
2	5725.150	56.04	68.22	-12.18	36.25	19.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5700MHz
Test BY :Edward Wang

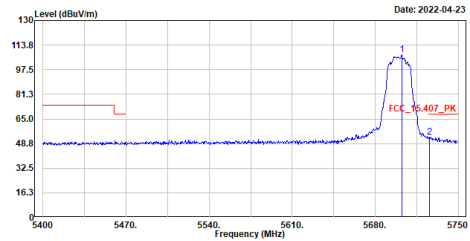

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5702.400	107.20	-----	-----	87.52	19.68	Peak
2	5725.500	53.15	68.22	-15.07	33.36	19.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ax20, 5745MHz
Test BY :Edward Wang

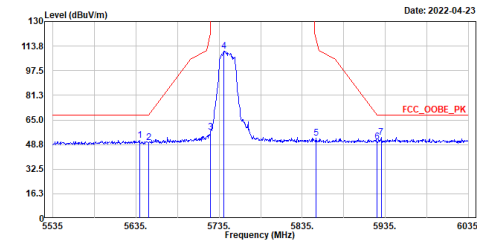


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5639.500	51.56	68.20	-16.64	32.18	19.38	Peak
2	5650.000	49.85	68.21	-18.36	30.54	19.31	Peak
3	5725.000	56.91	122.20	-65.29	37.12	19.79	Peak
4	5741.000	110.37	-----	-----	90.51	19.86	Peak
5	5852.000	52.86	117.64	-64.78	32.79	20.07	Peak
6	5925.000	50.63	68.21	-17.58	30.16	20.47	Peak
7	5930.000	53.36	68.20	-14.84	32.87	20.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ax20, 5745MHz
Test BY :Edward Wang

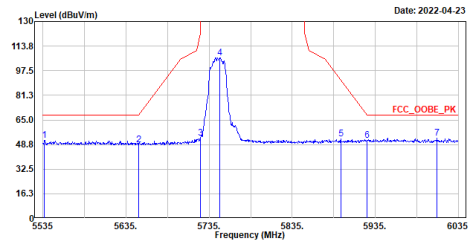


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5537.000	51.62	68.20	-16.58	32.18	19.44	Peak
2	5650.000	48.76	68.21	-19.45	29.45	19.31	Peak
3	5725.000	53.19	122.20	-69.01	33.40	19.79	Peak
4	5747.500	106.04	-----	-----	86.15	19.89	Peak
5	5893.500	52.48	91.51	-39.03	32.12	20.36	Peak
6	5925.000	51.44	68.21	-16.77	30.97	20.47	Peak
7	6009.500	53.17	68.20	-15.03	32.52	20.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ax20, 5825MHz
Test BY :Jing Chang

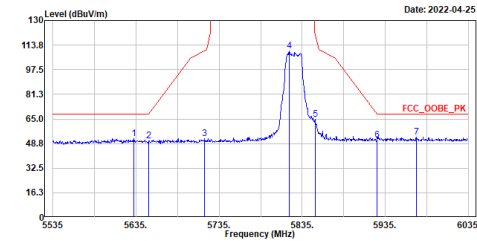


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5632.000	52.11	68.20	-16.09	32.69	19.42	Peak
2	5650.000	50.51	68.21	-17.70	31.20	19.31	Peak
3	5717.500	52.03	110.10	-58.07	32.29	19.74	Peak
4	5819.500	109.65	-----	-----	89.64	20.01	Peak
5	5850.500	64.71	121.06	-56.35	44.65	20.06	Peak
6	5925.000	51.08	68.21	-17.13	30.61	20.47	Peak
7	5972.500	52.78	68.20	-15.42	32.20	20.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ax20, 5825MHz
Test BY :Jing Chang

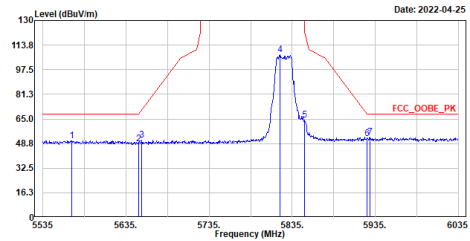


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5569.500	50.77	68.20	-17.43	31.24	19.53	Peak
2	5650.000	48.62	68.21	-19.59	29.31	19.31	Peak
3	5654.000	51.09	71.17	-20.08	31.75	19.34	Peak
4	5820.000	107.19	-----	-----	87.18	20.01	Peak
5	5850.000	64.19	122.20	-58.01	44.13	20.06	Peak
6	5925.000	51.79	68.21	-16.42	31.32	20.47	Peak
7	5928.500	52.81	68.20	-15.39	32.32	20.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5190MHz
Test BY :Edward Wang

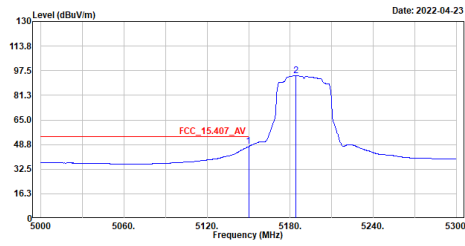


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	47.44	54.00	-6.56	29.04	18.40	Average
2	5183.900	94.04	-----	-----	75.51	18.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5190MHz
Test BY :Edward Wang

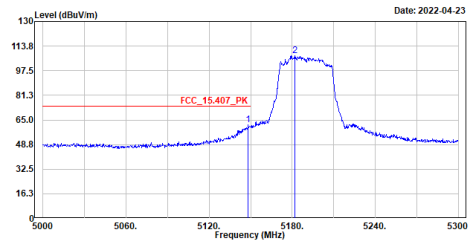


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5148.200	61.72	74.00	-12.28	43.32	18.40	Peak
2	5182.100	107.54	-----	-----	89.03	18.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5190MHz
Test BY :Edward Wang

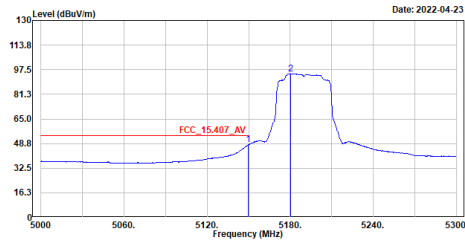


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.700	47.88	54.00	-6.12	29.48	18.40	Average
2	5180.600	94.86	-----	-----	76.35	18.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5190MHz
Test BY :Edward Wang

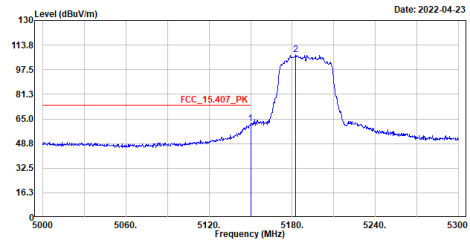


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	61.77	74.00	-12.23	43.37	18.40	Peak
2	5182.400	107.51	-----	-----	89.00	18.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5310MHz
Test BY :Edward Wang

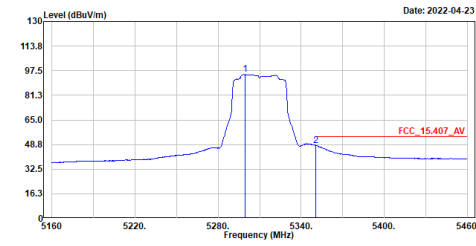


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5299.500	95.04	-----	-----	75.88	19.16	Average
2	5350.500	48.15	54.00	-5.85	29.12	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5310MHz
Test BY :Edward Wang

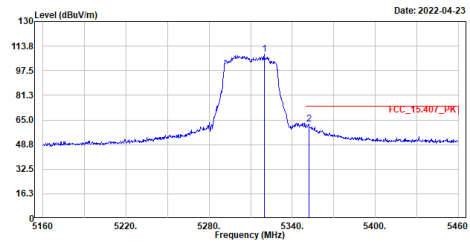


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5319.900	108.26	-----	-----	89.16	19.10	Peak
2	5352.000	62.32	74.00	-11.68	43.28	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5310MHz
Test BY :Edward Wang

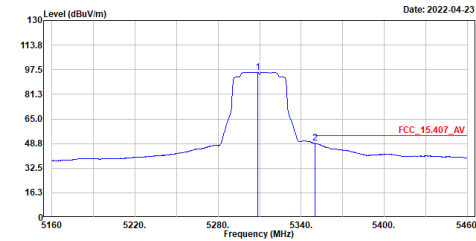


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5308.800	95.88	-----	-----	76.75	19.13	Average
2	5350.200	48.87	54.00	-5.13	29.84	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5310MHz
Test BY :Edward Wang

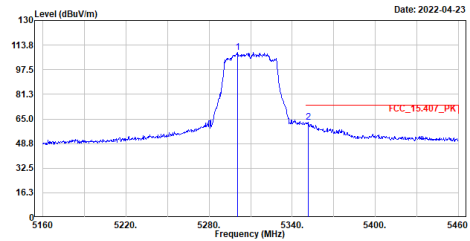


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5300.400	108.96	-----	-----	89.80	19.16	Peak
2	5351.400	62.85	74.00	-11.15	43.81	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5510MHz
Test BY :Edward Wang

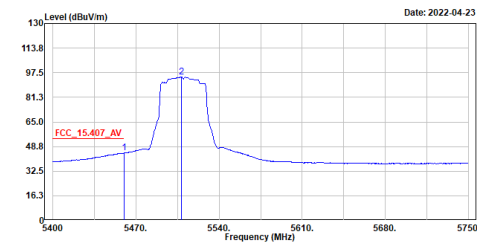

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	44.44	54.00	-9.56	25.20	19.24	Average
2	5508.500	94.64	-----	-----	75.25	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5510MHz
Test BY :Edward Wang

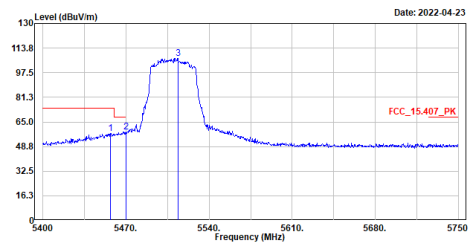

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5457.050	57.41	74.00	-16.59	38.18	19.23	Peak
2	5470.000	58.40	68.22	-9.82	39.12	19.28	Peak
3	5513.750	107.09	-----	-----	87.68	19.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5510MHz
Test BY :Edward Wang

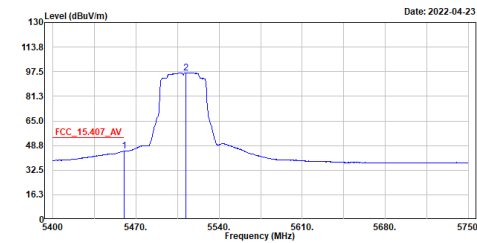

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	45.00	54.00	-9.00	25.76	19.24	Average
2	5512.000	96.78	-----	-----	77.37	19.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5510MHz
Test BY :Edward Wang

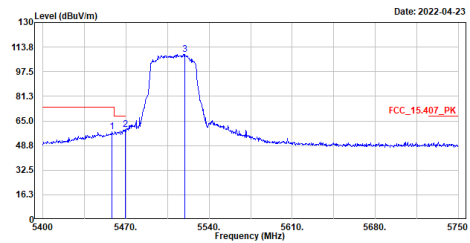

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.450	57.97	74.00	-16.03	38.73	19.24	Peak
2	5469.650	59.23	68.22	-8.99	39.95	19.28	Peak
3	5519.350	109.13	-----	-----	89.71	19.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5670MHz
Test BY :Edward Wang

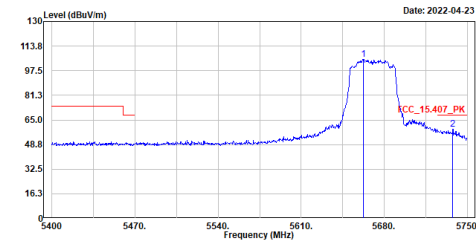

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5662.150	105.19	-----	-----	85.78	19.41	Peak
2	5737.750	58.91	68.22	-9.31	39.07	19.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5670MHz
Test BY :Edward Wang

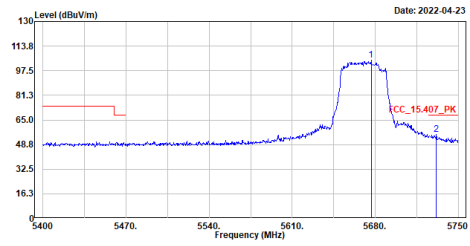

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5676.500	104.32	-----	-----	84.81	19.51	Peak
2	5731.450	55.20	68.22	-13.02	35.38	19.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5755MHz
Test BY :Edward Wang

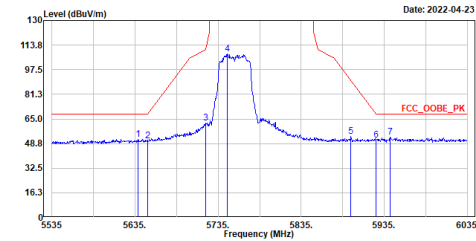

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5638.500	51.71	68.20	-16.49	32.32	19.39	Peak
2	5650.000	50.72	68.21	-17.49	31.41	19.31	Peak
3	5720.500	62.46	111.94	-49.48	42.69	19.77	Peak
4	5746.500	107.74	-----	-----	87.85	19.89	Peak
5	5895.000	53.27	90.40	-37.13	32.90	20.37	Peak
6	5925.000	51.16	68.21	-17.05	30.69	20.47	Peak
7	5942.500	52.82	68.20	-15.38	32.29	20.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5755MHz
Test BY :Edward Wang

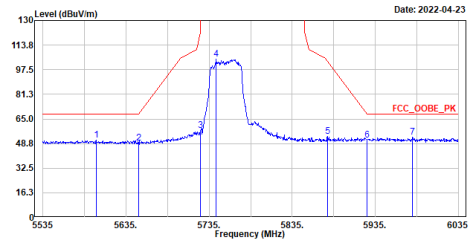

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5599.000	50.82	68.20	-17.38	31.18	19.64	Peak
2	5650.000	49.21	68.21	-19.00	29.90	19.31	Peak
3	5724.500	57.32	121.06	-63.74	37.53	19.79	Peak
4	5743.500	104.47	-----	-----	84.60	19.87	Peak
5	5877.500	53.36	103.35	-49.99	33.11	20.25	Peak
6	5925.000	51.06	68.21	-17.15	30.59	20.47	Peak
7	5980.000	52.76	68.20	-15.44	32.18	20.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5795MHz
Test BY :Edward Wang

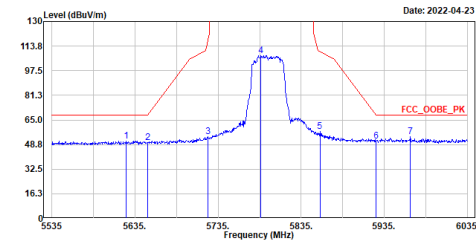

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5795MHz
Test BY :Edward Wang

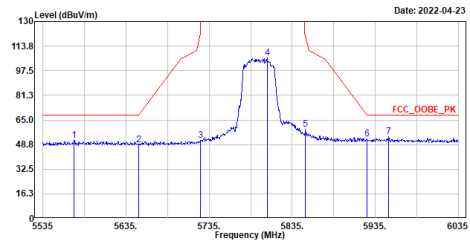

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
Test BY :Edward Wang

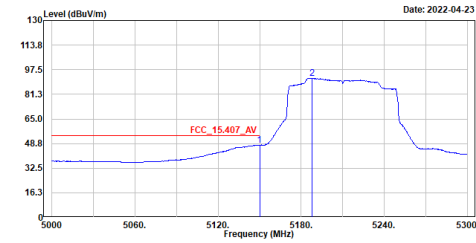

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
Test BY :Edward Wang

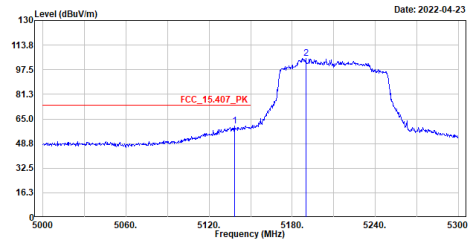

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz
Test BY :Edward Wang

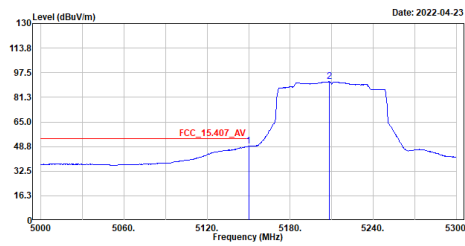


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5150.000	48.86	54.00	-5.14	30.46	18.40	Average
2	5208.200	91.56	-----	-----	72.91	18.65	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz
Test BY :Edward Wang

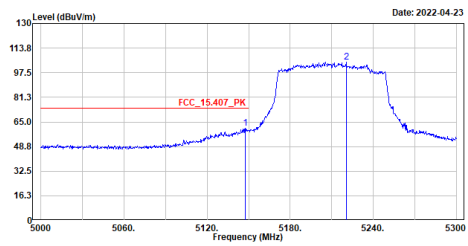


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5147.600	60.61	74.00	-13.39	42.21	18.40	Peak
2	5220.500	104.69	-----	-----	85.97	18.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5290MHz
Test BY :Edward Wang

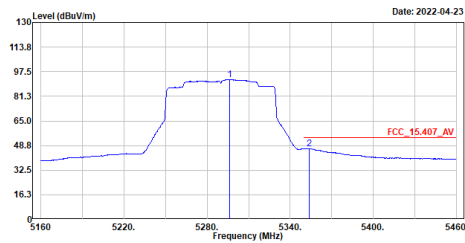


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5296.200	92.35	-----	-----	73.21	19.14	Average
2	5353.800	46.85	54.00	-7.15	27.80	19.05	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5290MHz
Test BY :Edward Wang

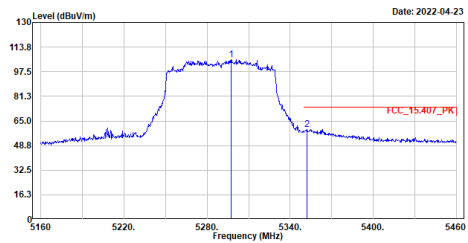


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5297.400	105.50	-----	-----	86.35	19.15	Peak
2	5352.000	59.50	74.00	-14.50	40.46	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5290MHz
Test BY :Edward Wang

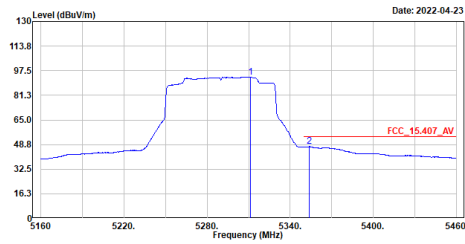


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5311.500	93.20	-----	-----	74.08	19.12	Average
2	5353.800	47.35	54.00	-6.65	28.30	19.05	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5290MHz
Test BY :Edward Wang

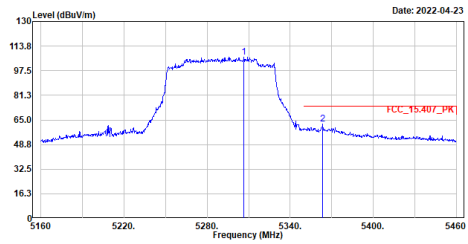


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5306.700	106.66	-----	-----	87.52	19.14	Peak
2	5363.700	62.37	74.00	-11.63	43.27	19.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5530MHz
Test BY :Edward Wang

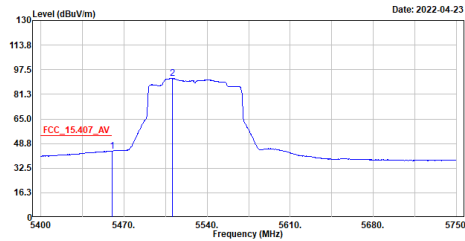


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	43.84	54.00	-10.16	24.60	19.24	Average
2	5510.950	91.65	-----	-----	72.24	19.41	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5530MHz
Test BY :Edward Wang

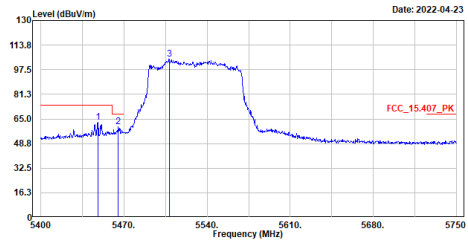


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5448.300	62.77	74.00	-11.23	43.56	19.21	Peak
2	5465.100	59.75	68.22	-8.47	40.49	19.26	Peak
3	5508.150	104.52	-----	-----	85.13	19.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5530MHz
Test BY :Edward Wang

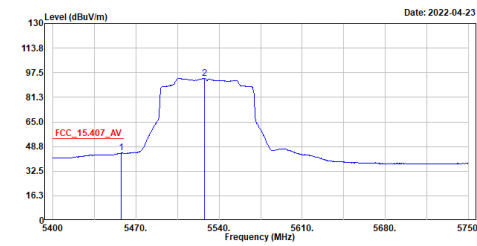

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5457.750	44.43	54.00	-9.57	25.19	19.24	Average
2	5527.750	93.72	-----	-----	74.30	19.42	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5530MHz
Test BY :Edward Wang

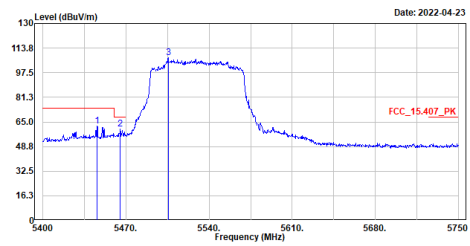

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5445.850	62.25	74.00	-11.75	43.03	19.22	Peak
2	5465.100	60.18	68.22	-8.04	48.92	19.26	Peak
3	5505.700	107.58	-----	-----	88.19	19.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5775MHz
Test BY :Edward Wang

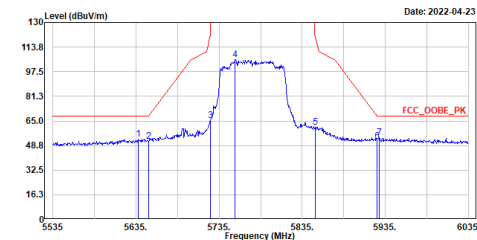

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5637.500	52.85	68.20	-15.35	33.45	19.40	Peak
2	5650.000	51.61	68.21	-16.60	32.30	19.31	Peak
3	5724.500	65.45	121.06	-55.61	45.66	19.79	Peak
4	5754.500	105.60	-----	-----	85.70	19.90	Peak
5	5851.000	61.02	119.92	-58.90	48.95	20.07	Peak
6	5925.000	51.64	68.21	-16.57	31.17	20.47	Peak
7	5928.000	53.74	68.20	-14.46	33.25	20.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5775MHz
Test BY :Edward Wang

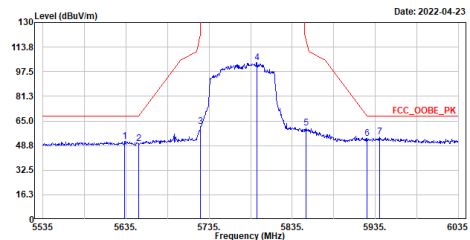

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5633.500	51.29	68.20	-16.91	31.87	19.42	Peak
2	5650.000	50.12	68.21	-18.09	30.81	19.31	Peak
3	5725.000	61.12	122.20	-61.08	41.33	19.79	Peak
4	5793.000	103.59	-----	-----	83.63	19.96	Peak
5	5852.000	60.24	117.64	-57.40	48.17	20.07	Peak
6	5925.000	53.56	68.21	-14.65	33.09	20.47	Peak
7	5940.000	54.44	68.20	-13.76	33.92	20.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5250MHz_B1
Test BY :Edward Wang

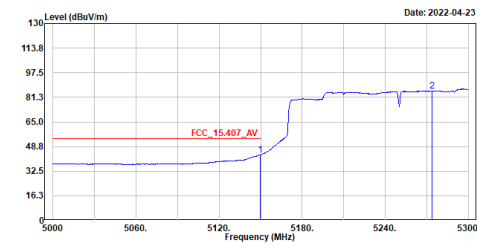


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.700	43.27	54.00	-10.73	24.87	18.40	Average
2	5273.900	85.52	-----	-----	66.49	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5250MHz_B1
Test BY :Edward Wang

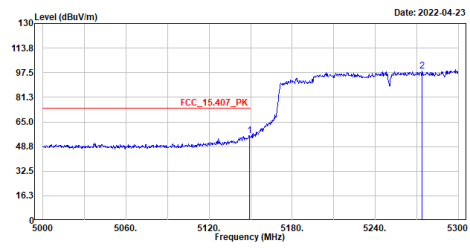


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.100	55.77	74.00	-18.23	37.37	18.40	Peak
2	5273.900	98.57	-----	-----	79.54	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B1
Test BY :Edward Wang

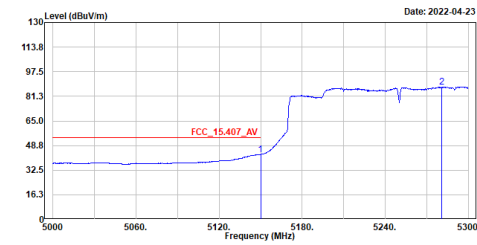


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	42.91	54.00	-11.09	24.51	18.40	Average
2	5280.000	87.31	-----	-----	68.26	19.05	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B1
Test BY :Edward Wang

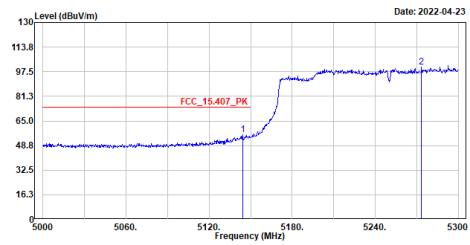


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5144.300	55.72	74.00	-18.28	37.33	18.39	Peak
2	5273.300	100.60	-----	-----	81.58	19.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5250MHz_B2
Test BY :Edward Wang

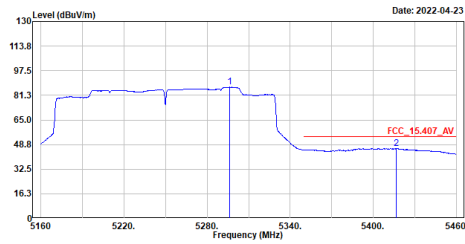


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5296.200	86.74	-----	-----	67.60	19.14	Average
2	5416.800	46.26	54.00	-7.74	26.97	19.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5250MHz_B2
Test BY :Edward Wang

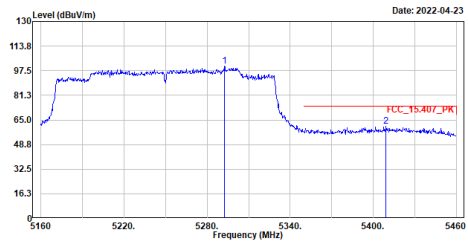


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5292.600	100.41	-----	-----	81.29	19.12	Peak
2	5409.300	60.73	74.00	-13.27	41.43	19.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B2
Test BY :Edward Wang

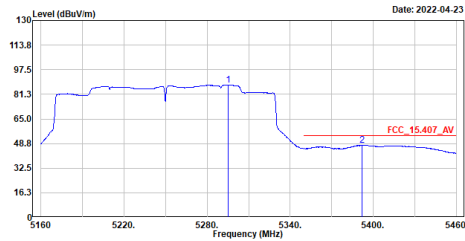


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5295.300	87.44	-----	-----	68.30	19.14	Average
2	5391.900	47.77	54.00	-6.23	28.50	19.27	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B2
Test BY :Edward Wang

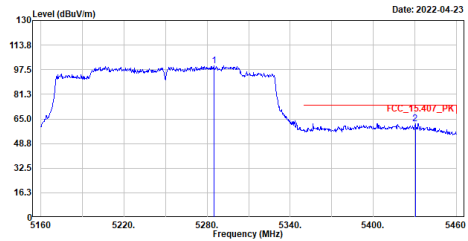


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5284.800	100.30	-----	-----	81.22	19.08	Peak
2	5430.300	61.81	74.00	-12.19	42.55	19.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5570MHz
Test BY :Edward Wang

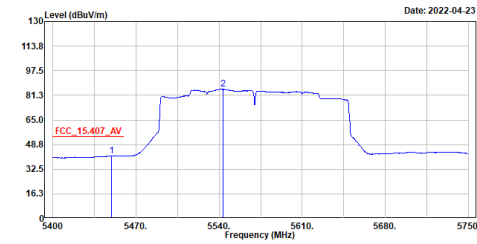

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5449.350	41.34	54.00	-12.66	22.14	19.20	Average
2	5543.500	85.27	-----	-----	65.82	19.45	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5570MHz
Test BY :Edward Wang

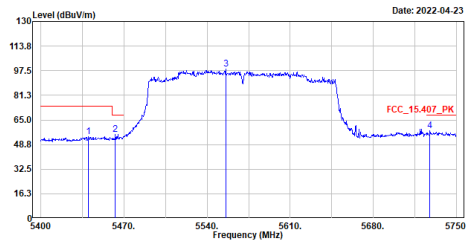

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5439.900	54.11	74.00	-19.89	34.88	19.23	Peak
2	5462.650	55.33	68.22	-12.89	36.07	19.26	Peak
3	5555.750	98.36	-----	-----	78.88	19.48	Peak
4	5727.600	57.79	68.22	-10.43	37.99	19.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5570MHz
Test BY :Edward Wang

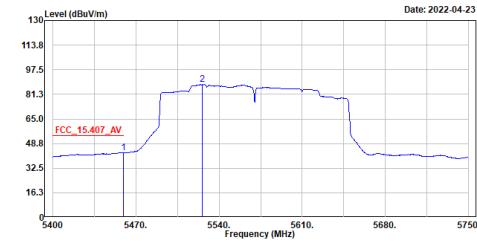

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.500	42.71	54.00	-11.29	23.47	19.24	Average
2	5525.650	87.69	-----	-----	68.27	19.42	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5570MHz
Test BY :Edward Wang

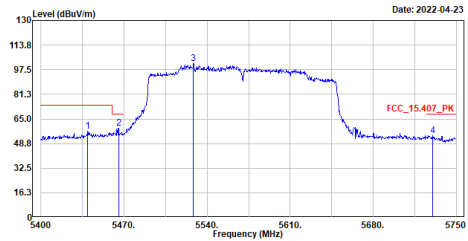


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5439.550	56.72	74.00	-17.28	37.49	19.23	Peak
2	5465.450	58.91	68.22	-9.31	39.65	19.26	Peak
3	5528.450	101.37	-----	-----	81.95	19.42	Peak
4	5730.050	54.13	68.22	-14.09	34.32	19.81	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

MIMO


Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5180MHz
Test BY :Edward Wang

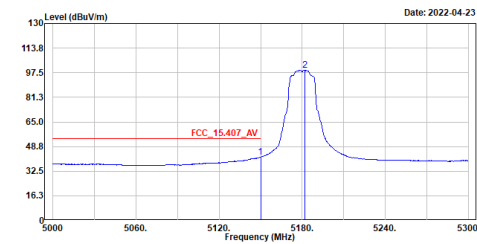

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	41.80	54.00	-12.20	23.40	18.40	Average
2	5181.800	99.07	-----	-----	80.56	18.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5180MHz
Test BY :Edward Wang

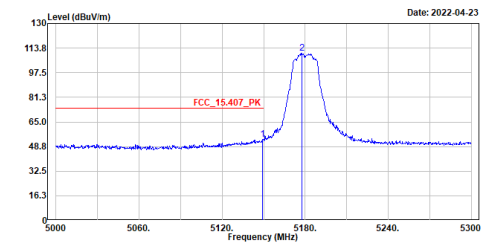

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.100	53.62	74.00	-20.38	35.22	18.40	Peak
2	5177.600	110.28	-----	-----	91.77	18.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5180MHz
Test BY :Edward Wang

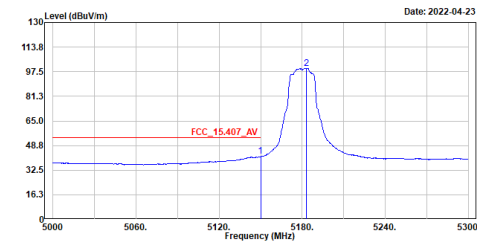

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	41.49	54.00	-12.51	23.09	18.40	Average
2	5183.000	99.74	-----	-----	81.22	18.52	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5180MHz
Test BY :Edward Wang

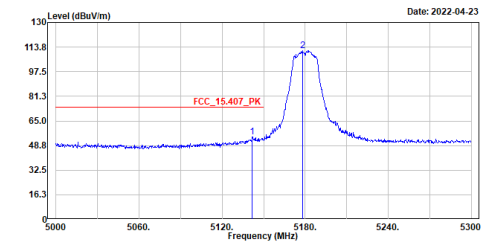

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5141.900	54.49	74.00	-19.51	36.11	18.38	Peak
2	5178.200	111.29	-----	-----	92.78	18.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5320MHz
Test BY :Edward Wang

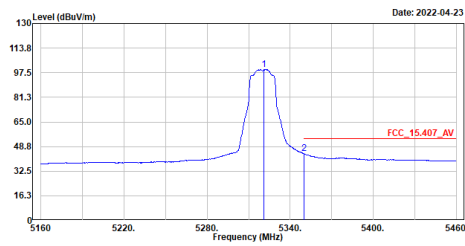


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5321.100	99.54	-----	-----	88.44	19.10	Average
2	5350.200	43.97	54.00	-10.03	24.94	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5320MHz
Test BY :Edward Wang

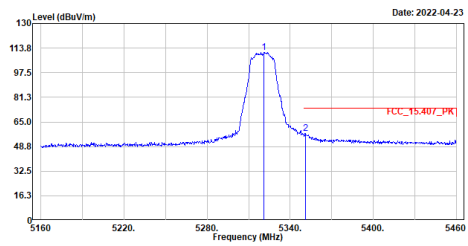


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5321.100	110.99	-----	-----	91.89	19.10	Peak
2	5351.100	57.28	74.00	-16.72	38.25	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5320MHz
Test BY :Edward Wang

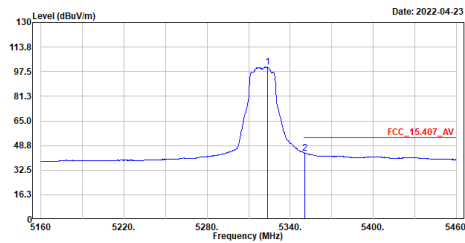


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5323.500	100.46	-----	-----	81.37	19.09	Average
2	5350.500	43.84	54.00	-10.16	24.81	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5320MHz
Test BY :Edward Wang

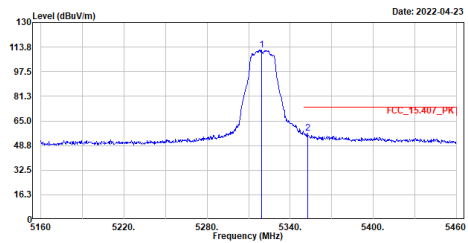


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5319.300	111.68	-----	-----	92.58	19.10	Peak
2	5352.600	56.98	74.00	-17.02	37.94	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5500MHz
Test BY :Edward Wang

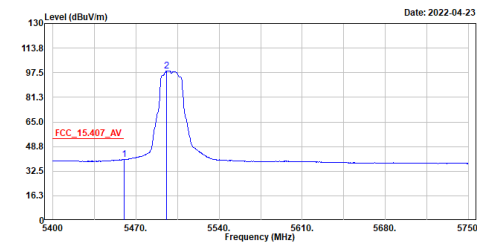

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	40.09	54.00	-13.91	20.85	19.24	Average
2	5495.900	98.68	-----	-----	79.31	19.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5500MHz
Test BY :Edward Wang

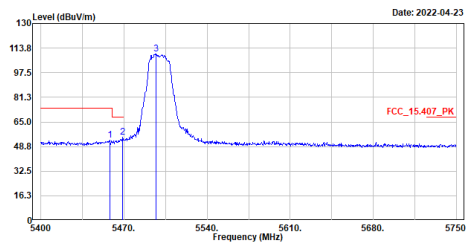

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.100	52.94	74.00	-21.06	33.78	19.24	Peak
2	5468.600	54.79	68.22	-13.43	35.52	19.27	Peak
3	5497.300	109.90	-----	-----	90.53	19.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5500MHz
Test BY :Edward Wang

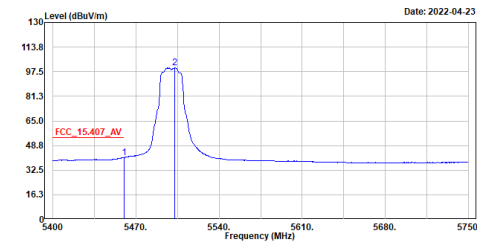

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	40.87	54.00	-13.13	21.63	19.24	Average
2	5502.900	99.95	-----	-----	80.56	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5500MHz
Test BY :Edward Wang

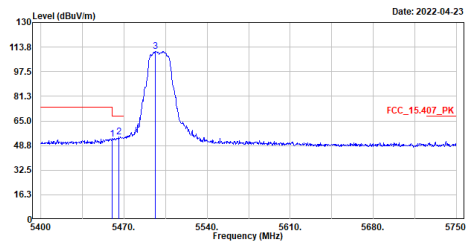

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	53.12	74.00	-20.88	33.88	19.24	Peak
2	5465.800	54.43	68.22	-13.79	35.17	19.26	Peak
3	5496.250	110.93	-----	-----	91.56	19.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5700MHz
Test BY :Edward Wang

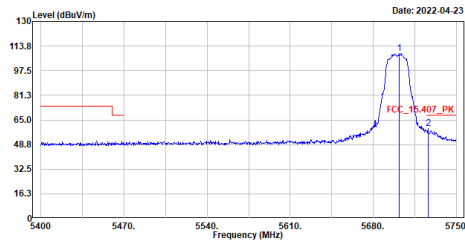


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5701.700	108.93	-----	-----	89.25	19.68	Peak
2	5726.200	59.21	68.22	-9.01	39.42	19.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5700MHz
Test BY :Edward Wang

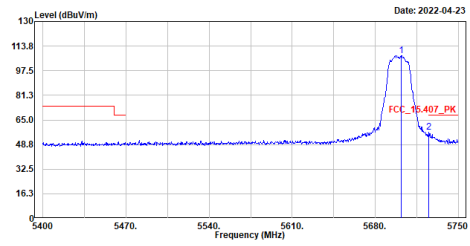


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5702.050	107.39	-----	-----	87.71	19.68	Peak
2	5725.150	57.08	68.22	-11.14	37.29	19.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5745MHz
Test BY :Edward Wang

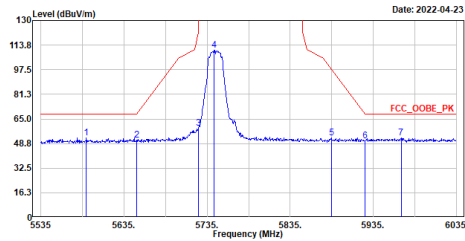


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5589.500	52.69	68.20	-15.51	33.09	19.60	Peak
2	5650.000	50.86	68.21	-17.35	31.55	19.31	Peak
3	5725.000	58.97	122.20	-63.23	39.18	19.79	Peak
4	5743.500	110.49	-----	-----	90.62	19.87	Peak
5	5884.500	52.57	98.17	-45.60	32.28	20.29	Peak
6	5925.000	50.29	68.21	-17.92	29.82	20.47	Peak
7	5968.500	52.31	68.20	-15.89	31.75	20.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5745MHz
Test BY :Edward Wang

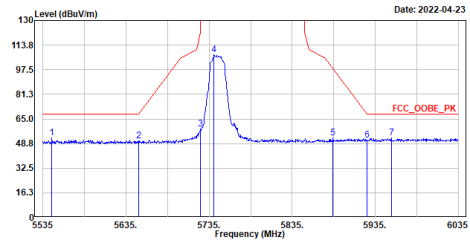


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5546.000	52.30	68.20	-15.90	32.85	19.45	Peak
2	5650.000	50.63	68.21	-17.58	31.32	19.31	Peak
3	5725.000	58.49	122.20	-63.71	38.70	19.79	Peak
4	5741.000	107.36	-----	-----	87.50	19.86	Peak
5	5884.000	52.26	98.54	-46.28	31.98	20.28	Peak
6	5925.000	51.10	68.21	-17.11	30.63	20.47	Peak
7	5954.500	52.42	68.20	-15.78	31.87	20.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n20_5825MHz
Test BY :Edward Wang

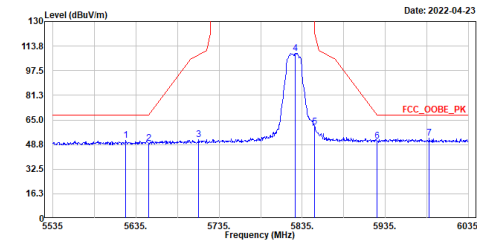


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5623.000	51.34	68.20	-16.86	31.85	19.49	Peak
2	5650.000	49.59	68.21	-18.62	30.28	19.31	Peak
3	5710.500	52.09	108.14	-56.05	32.38	19.71	Peak
4	5826.500	109.00	-----	-----	88.97	20.03	Peak
5	5850.000	60.36	122.20	-61.84	40.30	20.06	Peak
6	5925.000	51.00	68.21	-17.21	30.53	20.47	Peak
7	5988.000	52.95	68.20	-15.25	32.37	20.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_n20_5825MHz
Test BY :Edward Wang

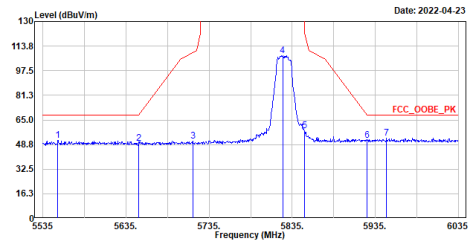


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5553.000	51.72	68.20	-16.48	32.24	19.48	Peak
2	5650.000	49.40	68.21	-18.81	30.09	19.31	Peak
3	5715.500	51.13	109.54	-58.41	31.40	19.73	Peak
4	5823.500	107.47	-----	-----	87.45	20.02	Peak
5	5850.000	57.76	122.20	-64.44	37.70	20.06	Peak
6	5925.000	51.74	68.21	-16.47	31.27	20.47	Peak
7	5948.500	52.94	68.20	-15.26	32.39	20.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
Test BY :Edward Wang

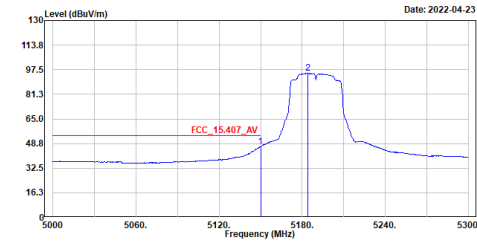


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5150.000	46.66	54.00	-7.34	28.26	18.40	Average
2	5184.200	94.99	-----	-----	76.46	18.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
Test BY :Edward Wang

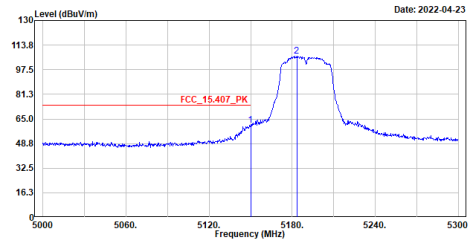


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5150.000	60.62	74.00	-13.38	42.22	18.40	Peak
2	5183.300	106.33	-----	-----	87.81	18.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ,n40_5190MHz
Test BY :Edward Wang

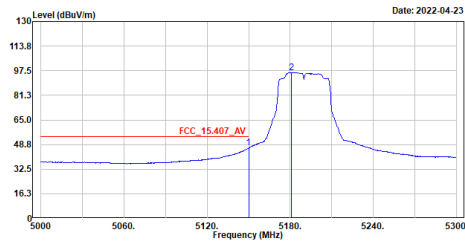


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	46.46	54.00	-7.54	28.06	18.40	Average
2	5180.900	96.37	-----	-----	77.86	18.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ,n40_5190MHz
Test BY :Edward Wang

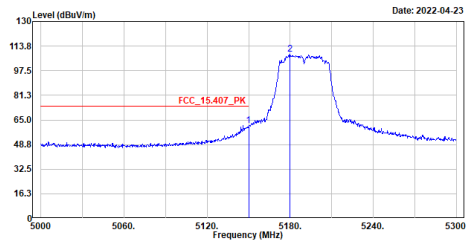


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	61.23	74.00	-12.77	42.83	18.40	Peak
2	5179.700	108.46	-----	-----	89.95	18.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ,n40_5310MHz
Test BY :Edward Wang

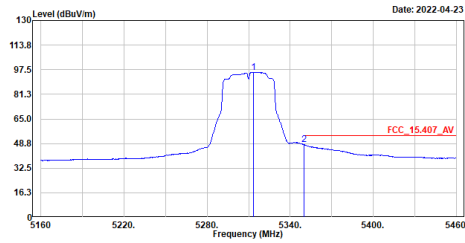


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5313.300	95.80	-----	-----	76.68	19.12	Average
2	5350.200	48.13	54.00	-5.87	29.10	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ,n40_5310MHz
Test BY :Edward Wang

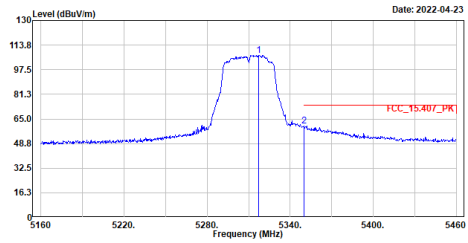


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5317.200	106.94	-----	-----	87.83	19.11	Peak
2	5350.200	60.43	74.00	-13.57	41.40	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ,40.5310MHz
Test BY :Edward Wang

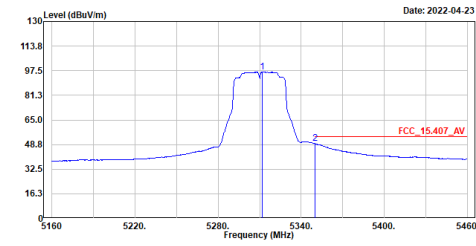


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5312.100	96.67	-----	-----	77.55	19.12	Average
2	5350.200	49.33	54.00	-4.67	30.30	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ,40.5310MHz
Test BY :Edward Wang

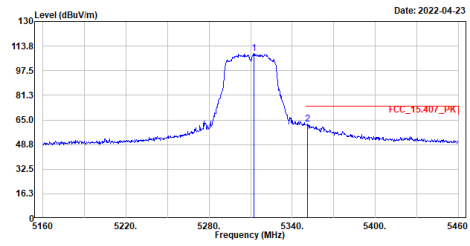


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5312.400	108.72	-----	-----	89.60	19.12	Peak
2	5351.100	62.23	74.00	-11.77	43.20	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ,40.5510MHz
Test BY :Edward Wang

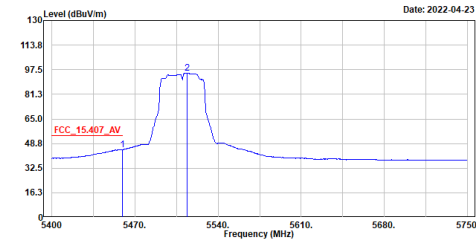


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5459.150	44.78	54.00	-9.22	25.54	19.24	Average
2	5513.750	95.09	-----	-----	75.68	19.41	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ,40.5510MHz
Test BY :Edward Wang

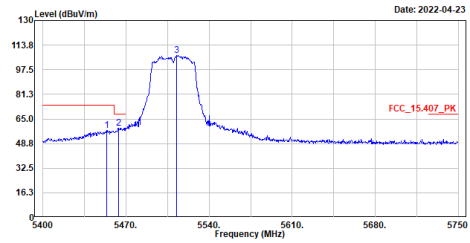


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5453.900	57.36	74.00	-16.64	38.14	19.22	Peak
2	5463.700	59.07	68.22	-9.15	39.81	19.26	Peak
3	5512.700	106.95	-----	-----	87.54	19.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_m40_5510MHz
Test BY :Edward Wang

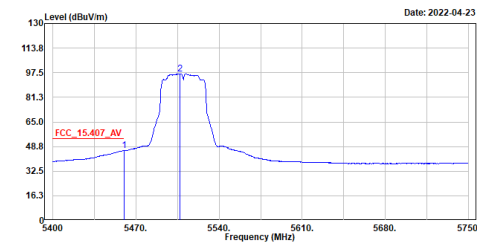

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	46.04	54.00	-7.96	26.80	19.24	Average
2	5506.750	96.77	-----	-----	77.38	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_m40_5510MHz
Test BY :Edward Wang

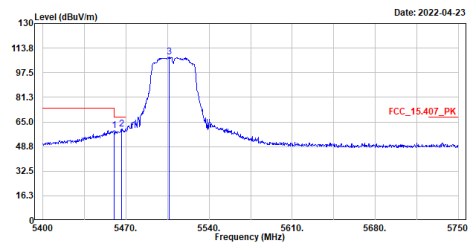

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	59.33	74.00	-14.67	40.09	19.24	Peak
2	5466.150	60.29	68.22	-7.93	41.03	19.26	Peak
3	5506.400	107.79	-----	-----	88.40	19.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_m40_5670MHz
Test BY :Edward Wang

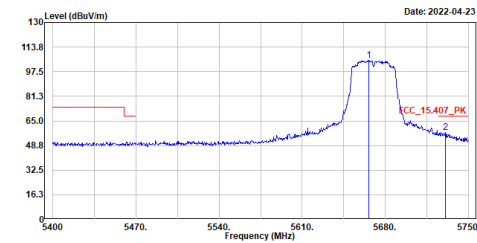

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5666.350	104.83	-----	-----	85.39	19.44	Peak
2	5730.750	57.53	68.22	-10.69	37.72	19.81	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_m40_5670MHz
Test BY :Edward Wang

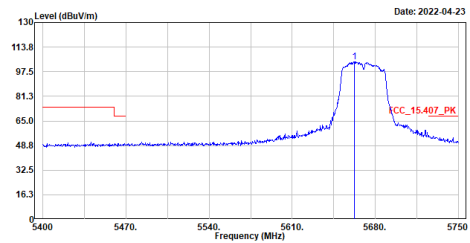

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5662.150	104.23	-----	-----	84.82	19.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ,n40.5755MHz
Test BY :Edward Wang

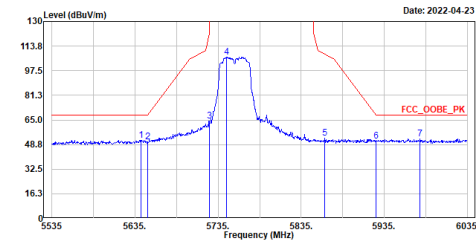


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5642.000	51.72	68.20	-16.48	32.35	19.37	Peak
2	5650.000	50.56	68.21	-17.65	31.25	19.31	Peak
3	5724.000	64.51	121.06	-56.55	44.72	19.79	Peak
4	5745.000	106.66	-----	-----	86.78	19.88	Peak
5	5863.500	52.92	108.42	-55.50	32.77	20.15	Peak
6	5925.000	51.13	68.21	-17.08	30.66	20.47	Peak
7	5978.000	52.48	68.20	-15.72	31.98	20.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ,n40.5755MHz
Test BY :Edward Wang

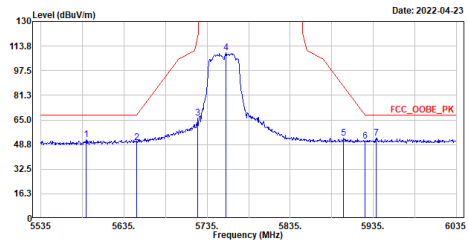


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5589.500	51.77	68.20	-16.43	32.17	19.60	Peak
2	5650.000	49.96	68.21	-18.25	30.65	19.31	Peak
3	5724.000	66.21	119.92	-53.71	46.42	19.79	Peak
4	5758.000	109.53	-----	-----	89.63	19.90	Peak
5	5899.000	52.91	87.44	-34.53	32.52	20.39	Peak
6	5925.000	50.84	68.21	-17.37	30.37	20.47	Peak
7	5938.500	53.19	68.20	-15.01	32.67	20.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX ,n40.5755MHz
Test BY :Edward Wang

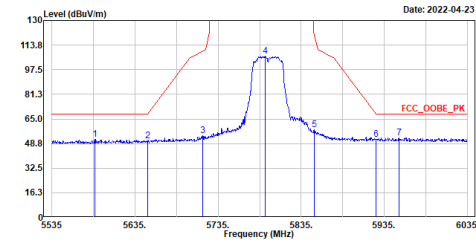


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5586.500	51.33	68.20	-16.87	31.74	19.59	Peak
2	5650.000	50.61	68.21	-17.60	31.30	19.31	Peak
3	5716.500	53.81	109.82	-56.01	34.07	19.74	Peak
4	5791.500	106.22	-----	-----	86.26	19.96	Peak
5	5850.500	57.84	121.06	-63.22	37.78	20.06	Peak
6	5925.000	51.31	68.21	-16.90	30.84	20.47	Peak
7	5953.000	52.72	68.20	-15.48	32.17	20.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX ,n40.5755MHz
Test BY :Edward Wang

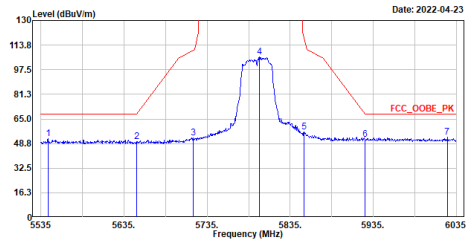


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5543.500	52.12	68.20	-16.08	32.67	19.45	Peak
2	5650.000	50.12	68.21	-18.09	30.81	19.31	Peak
3	5718.000	52.72	110.24	-57.52	32.97	19.75	Peak
4	5798.000	106.14	-----	-----	86.17	19.97	Peak
5	5851.500	56.17	118.78	-62.61	36.10	20.07	Peak
6	5925.000	51.38	68.21	-16.83	30.91	20.47	Peak
7	6024.000	52.82	68.20	-15.38	32.11	20.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Edward Wang

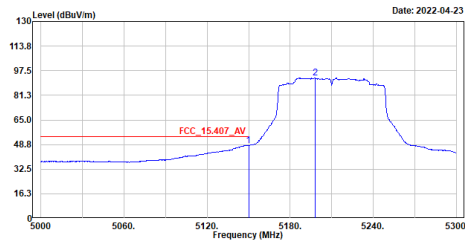


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5150.000	48.23	54.00	-5.77	29.83	18.40	Average
2	5198.000	92.79	-----	-----	74.20	18.59	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Edward Wang

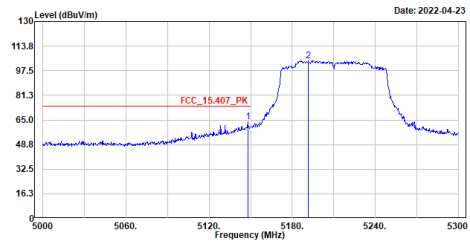


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5147.900	63.61	74.00	-10.39	45.21	18.40	Peak
2	5191.700	104.08	-----	-----	85.53	18.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Edward Wang

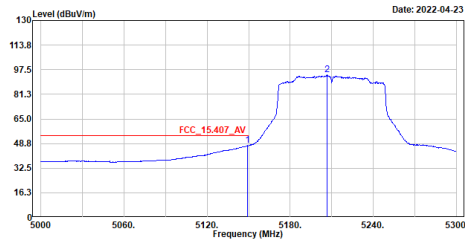


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5149.400	47.42	54.00	-6.58	29.82	18.40	Average
2	5206.700	94.02	-----	-----	75.38	18.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Edward Wang

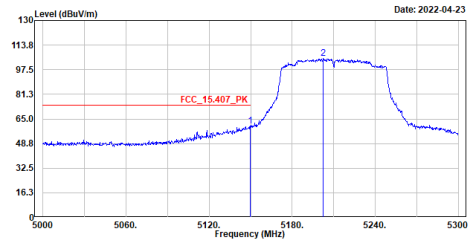


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5149.700	60.58	74.00	-13.42	42.18	18.40	Peak
2	5202.500	105.05	-----	-----	86.44	18.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
Test BY :Edward Wang

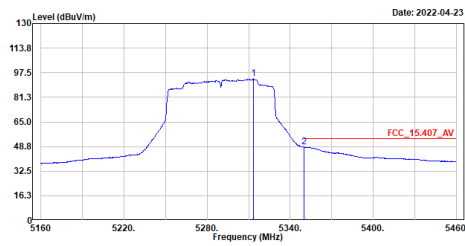


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5313.300	93.53	-----	-----	74.41	19.12	Average
2	5350.200	48.36	54.00	-5.64	29.33	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
Test BY :Edward Wang

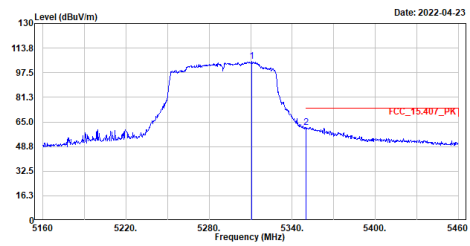


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5310.600	105.07	-----	-----	85.94	19.13	Peak
2	5350.200	61.42	74.00	-12.58	42.39	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
Test BY :Edward Wang

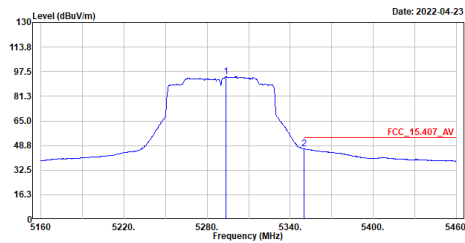


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5293.500	94.31	-----	-----	75.19	19.12	Average
2	5350.200	46.58	54.00	-7.42	27.55	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
Test BY :Edward Wang

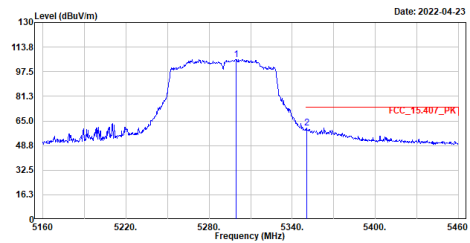


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5299.500	105.65	-----	-----	86.49	19.16	Peak
2	5350.500	60.38	74.00	-13.62	41.35	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
Test BY :Edward Wang

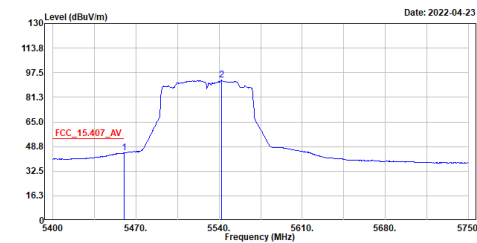

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	44.45	54.00	-9.55	25.21	19.24	Average
2	5542.100	92.60	-----	-----	73.15	19.45	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
Test BY :Edward Wang

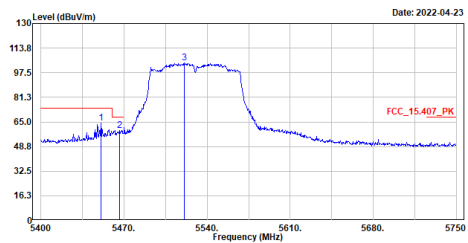

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5450.750	64.42	74.00	-9.58	45.21	19.21	Peak
2	5466.150	59.35	68.22	-8.87	40.09	19.26	Peak
3	5521.100	103.85	-----	-----	84.43	19.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
Test BY :Edward Wang

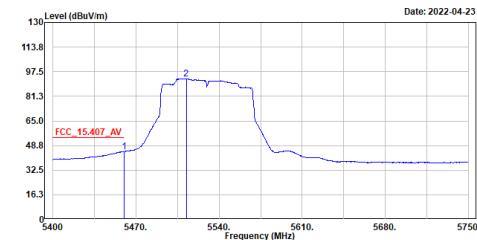

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	44.73	54.00	-9.27	25.49	19.24	Average
2	5512.350	92.84	-----	-----	73.43	19.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
Test BY :Edward Wang

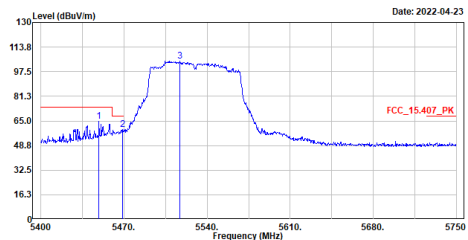

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5449.000	64.80	74.00	-9.20	45.60	19.20	Peak
2	5468.600	59.24	68.22	-8.98	39.97	19.27	Peak
3	5517.250	104.44	-----	-----	85.03	19.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Edward Wang

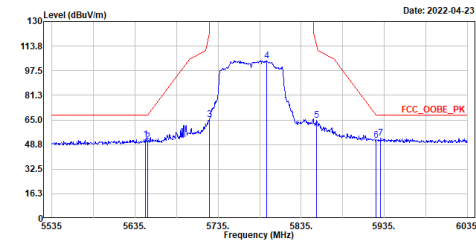


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5647.500	51.97	68.20	-16.23	32.64	19.33	Peak
2	5650.000	50.49	68.21	-17.72	31.18	19.31	Peak
3	5725.000	65.15	122.20	-57.05	45.36	19.79	Peak
4	5793.500	104.24	-----	-----	84.28	19.96	Peak
5	5853.500	64.92	114.22	-49.30	44.84	20.08	Peak
6	5925.000	51.48	68.21	-16.73	31.01	20.47	Peak
7	5930.500	53.22	68.20	-14.98	32.73	20.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Edward Wang

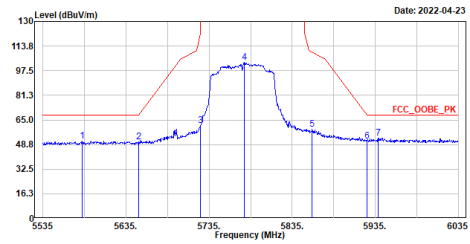


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5582.000	51.23	68.20	-16.97	31.66	19.57	Peak
2	5650.000	50.53	68.21	-17.68	31.22	19.31	Peak
3	5725.000	61.08	122.20	-61.12	41.29	19.79	Peak
4	5777.000	102.88	-----	-----	82.95	19.93	Peak
5	5859.000	58.81	109.68	-50.87	38.70	20.11	Peak
6	5925.000	50.85	68.21	-17.36	30.38	20.47	Peak
7	5930.500	52.90	68.20	-15.30	32.30	20.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac100_5250MHz_B1
Test BY :Jing Chang

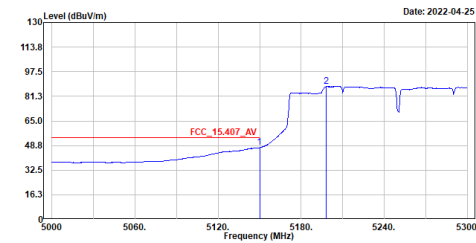


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5150.000	47.38	54.00	-6.62	28.98	18.40	Average
2	5198.000	87.84	-----	-----	69.25	18.59	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac100_5250MHz_B1
Test BY :Jing Chang

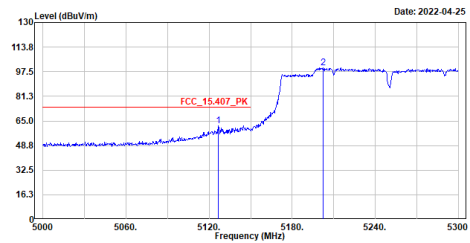


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5126.600	61.98	74.00	-12.02	43.65	18.33	Peak
2	5202.200	100.03	-----	-----	81.42	18.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac160_5250MHz_B1
Test BY :Jing Chang

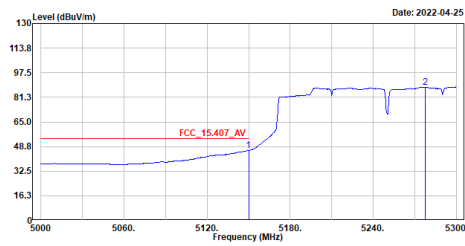


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	46.09	54.00	-7.91	27.69	18.40	Average
2	5277.800	88.01	-----	-----	68.97	19.04	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac160_5250MHz_B1
Test BY :Jing Chang

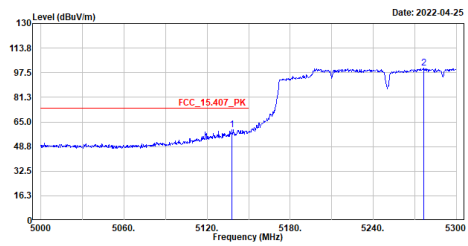


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5138.000	59.89	74.00	-14.11	41.52	18.37	Peak
2	5276.300	100.32	-----	-----	81.28	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac160_5250MHz_B2
Test BY :Jing Chang

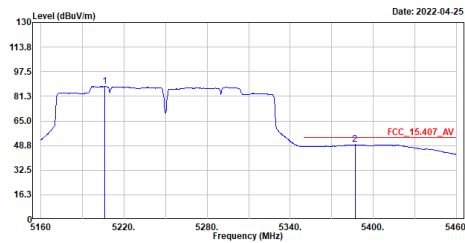


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5206.200	87.96	-----	-----	69.33	18.63	Average
2	5386.800	49.30	54.00	-4.70	30.06	19.24	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac160_5250MHz_B2
Test BY :Jing Chang

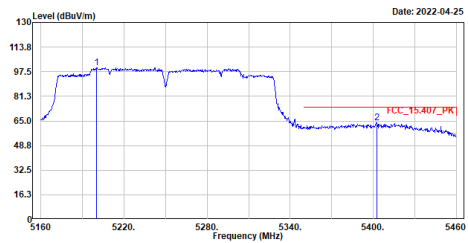


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5200.200	100.27	-----	-----	81.67	18.60	Peak
2	5402.400	63.84	74.00	-10.16	44.53	19.31	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac160_5250MHz_B2
Test BY :Jing Chang

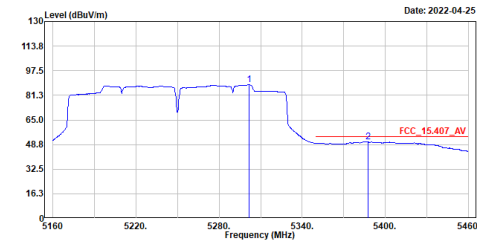


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5301.900	88.33	-----	-----	69.18	19.15	Average
2	5387.400	50.40	54.00	-3.60	31.15	19.25	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ac160_5250MHz_B2
Test BY :Jing Chang

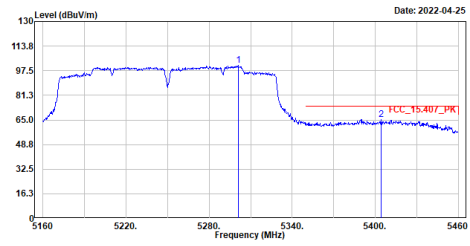


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5301.000	101.00	-----	-----	81.84	19.16	Peak
2	5404.500	65.30	74.00	-8.70	46.00	19.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac160_5570MHz
Test BY :Jing Chang

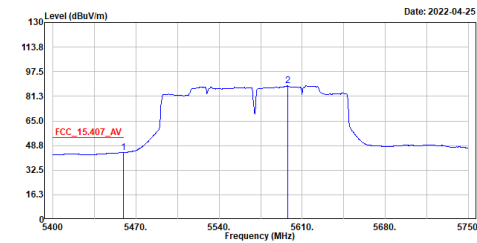


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.150	44.05	54.00	-9.95	24.81	19.24	Average
2	5597.750	88.31	-----	-----	68.67	19.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ac160_5570MHz
Test BY :Jing Chang

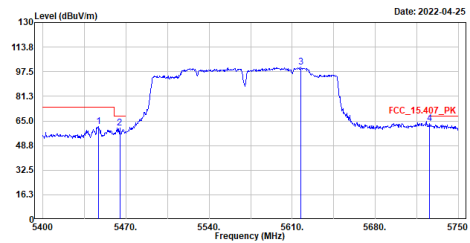


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5446.900	61.39	74.00	-12.61	42.18	19.21	Peak
2	5464.750	60.44	68.22	-7.78	41.18	19.26	Peak
3	5617.350	100.34	-----	-----	80.81	19.53	Peak
4	5725.500	63.21	68.22	-5.01	43.42	19.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_acl60_5570MHz
Test BY :Jing Chang

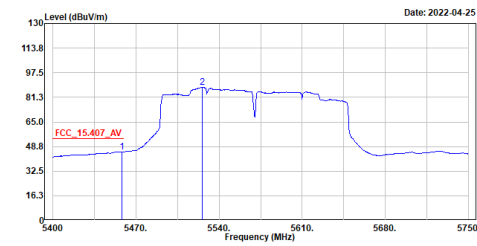


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.100	45.27	54.00	-8.73	26.03	19.24	Average
2	5526.000	87.84	-----	-----	68.42	19.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_acl60_5570MHz
Test BY :Jing Chang

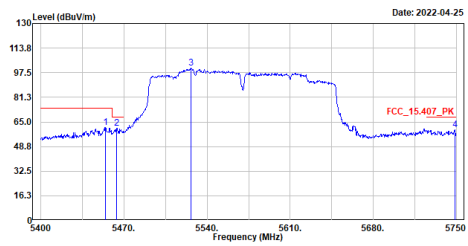


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5454.250	61.48	74.00	-12.52	42.26	19.22	Peak
2	5464.050	61.01	68.22	-7.21	41.75	19.26	Peak
3	5526.700	100.41	-----	-----	80.99	19.42	Peak
4	5748.600	59.83	68.22	-8.39	39.94	19.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz
Test BY :Jing Chang

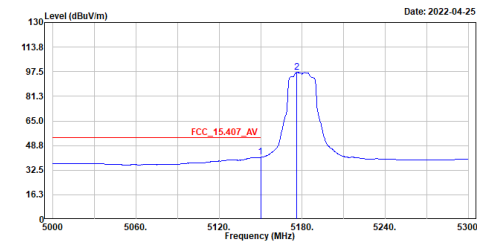


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	40.97	54.00	-13.03	22.57	18.40	Average
2	5175.000	96.92	-----	-----	78.43	18.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line





Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz
Test BY :Jing Chang

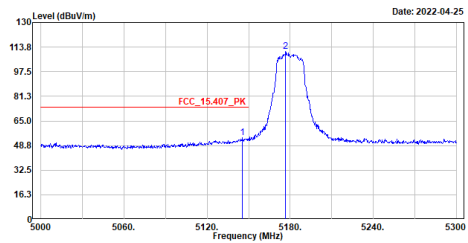


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5145.500	53.98	74.00	-20.02	35.59	18.39	Peak
2	5176.700	110.81	-----	-----	92.31	18.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

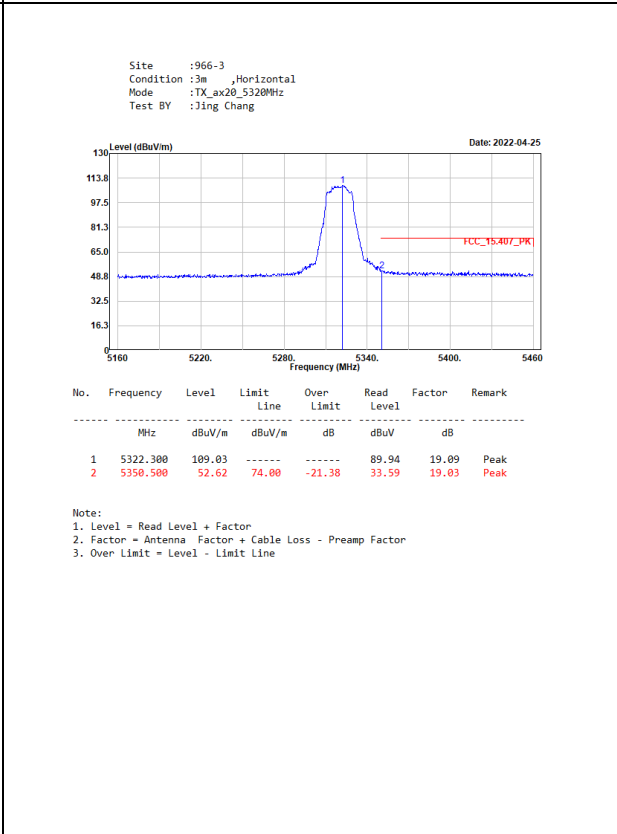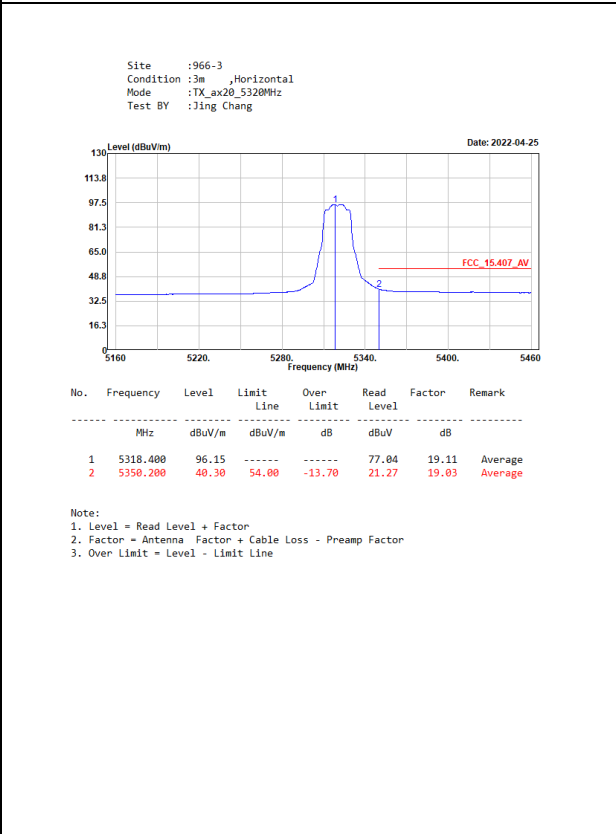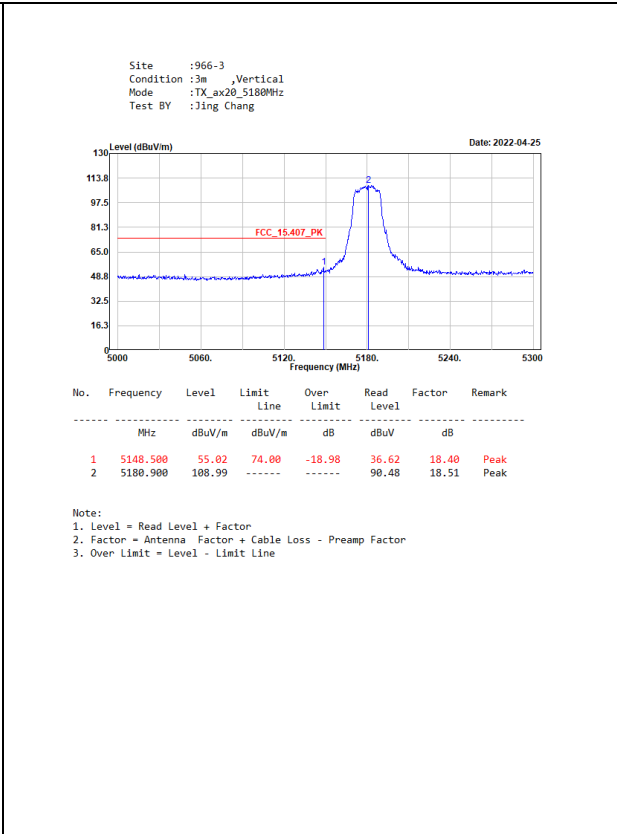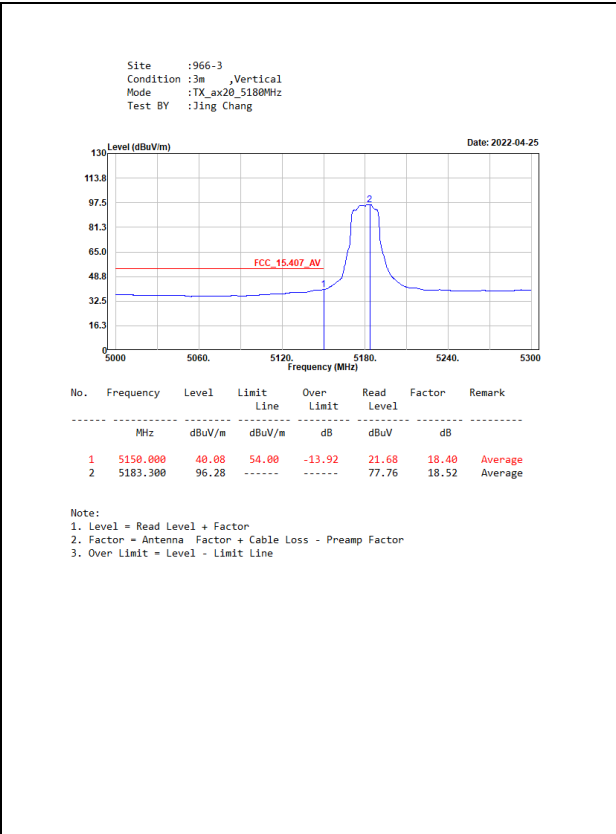

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5320MHz
Test BY :Jing Chang

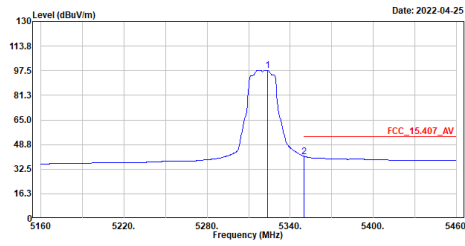


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5323.500	97.79	-----	-----	78.70	19.09	Average
2	5350.200	40.89	54.00	-13.11	21.86	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5320MHz
Test BY :Jing Chang

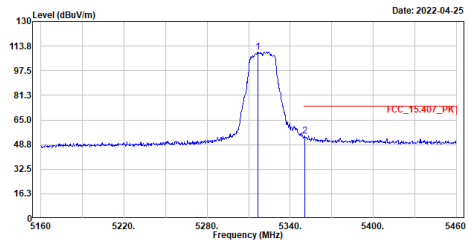


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5316.600	110.11	-----	-----	91.01	19.10	Peak
2	5350.500	54.35	74.00	-19.65	35.32	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5500MHz
Test BY :Jing Chang

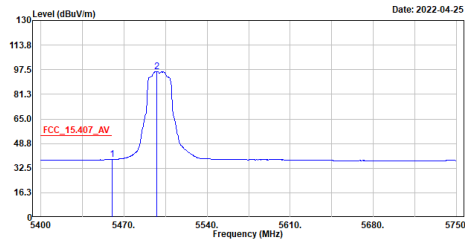


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	38.20	54.00	-15.80	18.96	19.24	Average
2	5497.650	96.28	-----	-----	76.90	19.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5500MHz
Test BY :Jing Chang

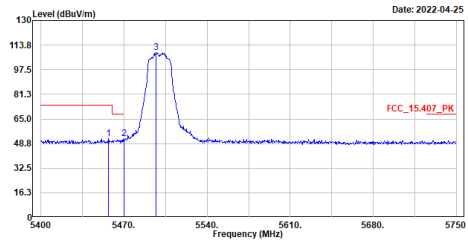


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5456.700	52.22	74.00	-21.78	32.99	19.23	Peak
2	5470.000	52.22	68.22	-16.00	32.94	19.28	Peak
3	5497.300	108.66	-----	-----	89.29	19.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5500MHz
Test BY :Jing Chang

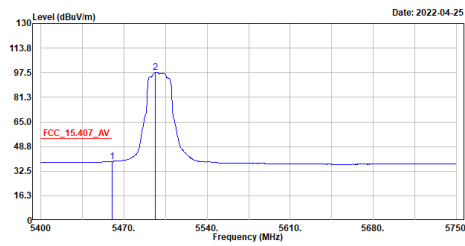

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5459.850	38.93	54.00	-15.07	19.69	19.24	Average
2	5496.250	97.86	-----	-----	78.49	19.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5500MHz
Test BY :Jing Chang

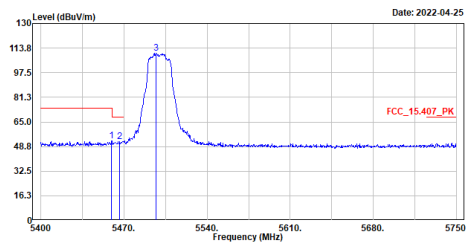

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5459.500	52.48	74.00	-21.52	33.24	19.24	Peak
2	5466.150	52.21	68.22	-16.01	32.95	19.26	Peak
3	5497.300	110.54	-----	-----	91.17	19.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5700MHz
Test BY :Jing Chang

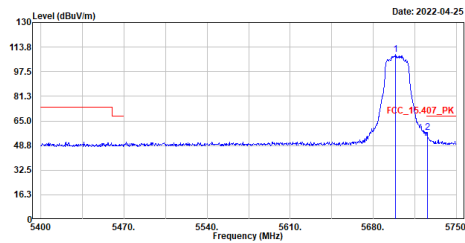

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5698.550	109.04	-----	-----	89.38	19.66	Peak
2	5725.500	57.43	68.22	-10.79	37.64	19.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5700MHz
Test BY :Jing Chang

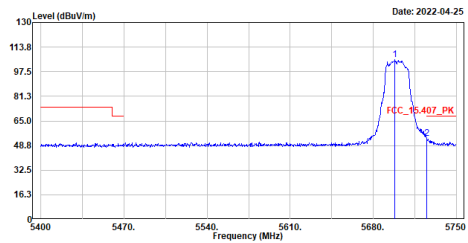

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5698.200	105.29	-----	-----	85.63	19.66	Peak
2	5725.150	53.39	68.22	-14.83	33.60	19.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz
Test BY :Jing Chang

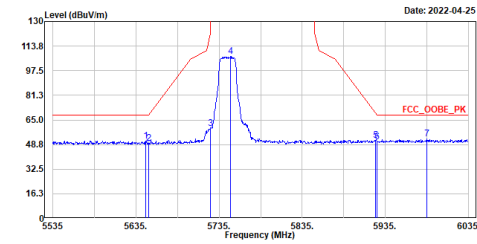

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5647.000	51.17	68.20	-17.03	31.84	19.33	Peak
2	5650.000	49.55	68.21	-18.66	30.24	19.31	Peak
3	5725.000	59.22	122.20	-62.98	39.43	19.79	Peak
4	5749.000	106.88	-----	-----	86.98	19.90	Peak
5	5923.000	51.70	69.69	-17.99	31.23	20.47	Peak
6	5925.000	50.54	68.21	-17.67	30.87	20.47	Peak
7	5985.000	52.40	68.20	-15.80	31.82	20.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz
Test BY :Jing Chang

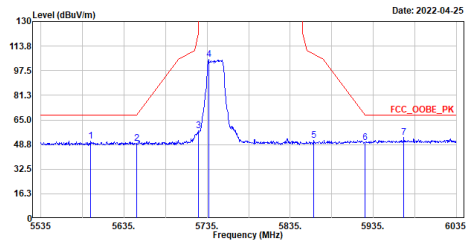

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5595.000	51.16	68.20	-17.04	31.53	19.63	Peak
2	5650.000	49.40	68.21	-18.81	30.09	19.31	Peak
3	5725.000	57.74	122.20	-64.46	37.95	19.79	Peak
4	5737.000	105.10	-----	-----	85.26	19.84	Peak
5	5863.000	51.47	108.56	-57.09	31.32	20.15	Peak
6	5925.000	50.18	68.21	-18.03	29.71	20.47	Peak
7	5972.000	53.25	68.20	-14.95	32.68	20.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz
Test BY :Jing Chang

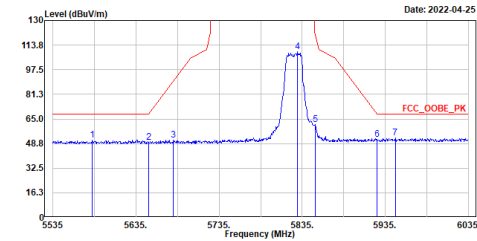

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5582.500	51.25	68.20	-16.95	31.67	19.58	Peak
2	5650.000	49.35	68.21	-18.86	30.04	19.31	Peak
3	5680.000	51.10	90.40	-39.30	31.56	19.54	Peak
4	5829.500	109.16	-----	-----	89.13	20.03	Peak
5	5851.000	61.47	119.92	-58.45	41.40	20.07	Peak
6	5925.000	51.31	68.21	-16.90	30.84	20.47	Peak
7	5947.000	52.30	68.20	-15.90	31.77	20.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz
Test BY :Jing Chang

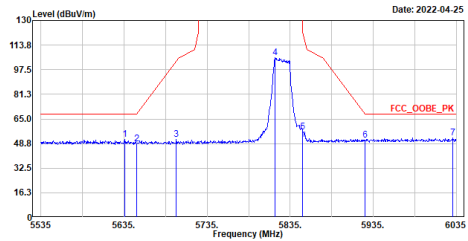

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5636.000	51.41	68.20	-16.79	32.00	19.41	Peak
2	5650.000	48.53	68.21	-19.68	29.22	19.31	Peak
3	5698.000	51.44	103.72	-52.28	31.78	19.66	Peak
4	5816.500	105.55	-----	-----	85.55	20.00	Peak
5	5850.000	56.36	122.20	-65.84	36.30	20.06	Peak
6	5925.000	51.17	68.21	-17.04	30.70	20.47	Peak
7	6030.500	52.62	68.20	-15.58	31.89	20.73	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5190MHz
Test BY :Jing Chang

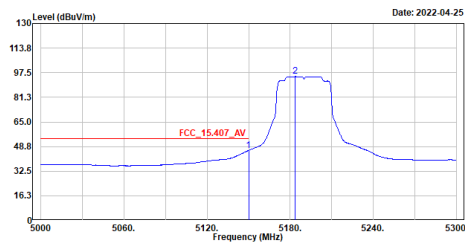

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	46.11	54.00	-7.89	27.71	18.40	Average
2	5183.600	94.95	-----	-----	76.42	18.53	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5190MHz
Test BY :Jing Chang

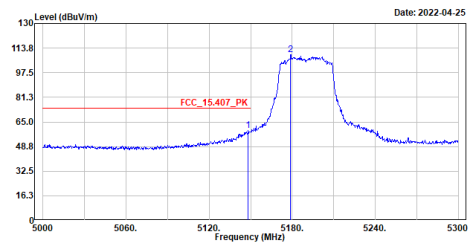

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5148.200	59.53	74.00	-14.47	41.13	18.40	Peak
2	5178.800	109.37	-----	-----	90.86	18.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5190MHz
Test BY :Jing Chang

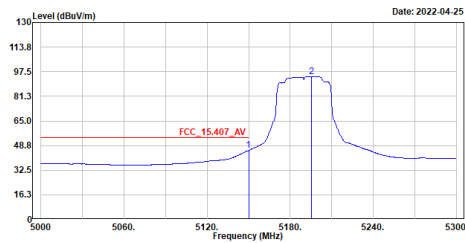

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	45.51	54.00	-8.49	27.11	18.40	Average
2	5195.600	94.35	-----	-----	75.77	18.58	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5190MHz
Test BY :Jing Chang

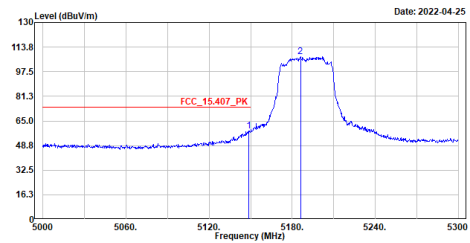

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5148.500	58.50	74.00	-15.50	40.10	18.40	Peak
2	5186.000	107.25	-----	-----	88.71	18.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5310MHz
Test BY :Jing Chang

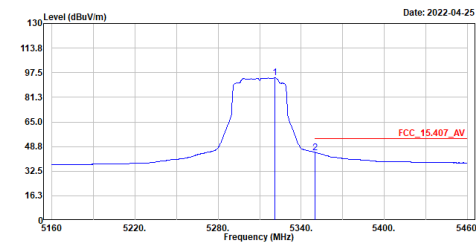


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5320.800	94.05	-----	-----	74.95	19.10	Average
2	5350.200	44.80	54.00	-9.20	25.77	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5310MHz
Test BY :Jing Chang

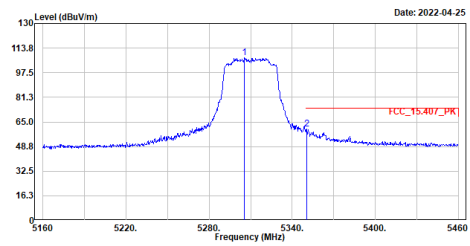


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5305.500	107.64	-----	-----	88.50	19.14	Peak
2	5350.800	60.57	74.00	-13.43	41.54	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5310MHz
Test BY :Jing Chang

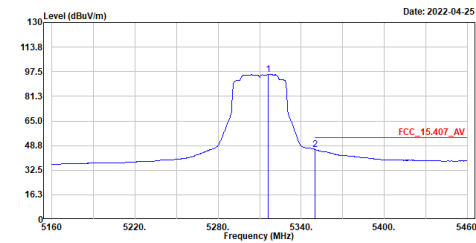


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5316.000	95.60	-----	-----	76.49	19.11	Average
2	5350.200	46.01	54.00	-7.99	26.98	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5310MHz
Test BY :Jing Chang

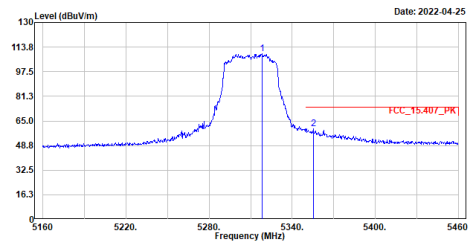


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5318.100	109.17	-----	-----	90.06	19.11	Peak
2	5355.300	60.00	74.00	-14.00	40.95	19.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5510MHz
Test BY :Jing Chang

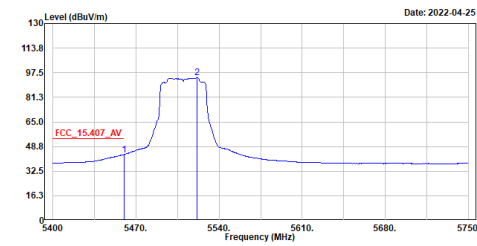

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	43.41	54.00	-10.59	24.17	19.24	Average
2	5521.450	94.13	-----	-----	74.71	19.42	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5510MHz
Test BY :Jing Chang

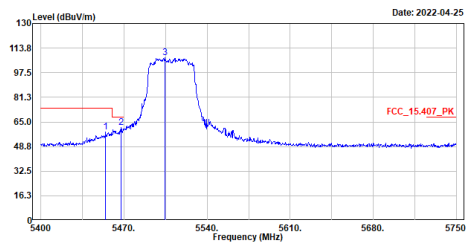

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5454.600	58.45	74.00	-15.55	39.23	19.22	Peak
2	5467.550	61.43	68.22	-6.79	42.16	19.27	Peak
3	5504.300	107.28	-----	-----	87.89	19.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5510MHz
Test BY :Jing Chang

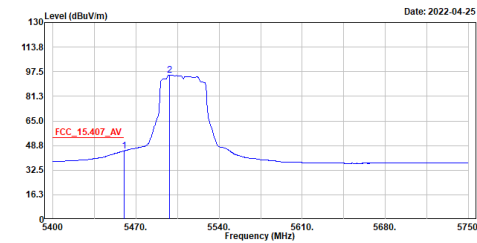

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	45.07	54.00	-8.93	25.83	19.24	Average
2	5498.350	95.38	-----	-----	75.99	19.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5510MHz
Test BY :Jing Chang

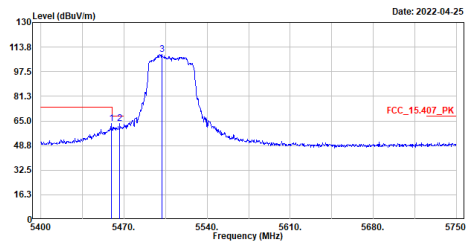

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.150	63.49	74.00	-10.51	44.25	19.24	Peak
2	5466.500	63.28	68.22	-4.94	44.02	19.26	Peak
3	5501.850	108.83	-----	-----	89.44	19.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5670MHz
Test BY :Jing Chang

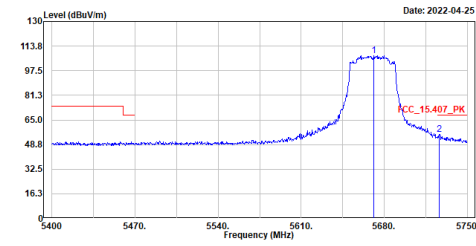

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5670.900	107.41	68.22	-12.96	87.93	19.48	Peak
2	5726.550	55.26	68.22	-12.96	35.46	19.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5670MHz
Test BY :Jing Chang

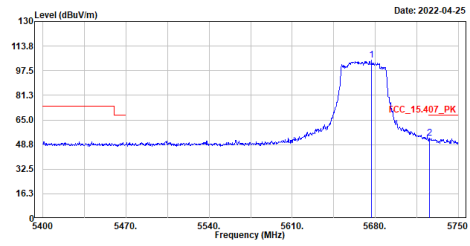

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5676.850	104.69	68.22	-15.05	85.18	19.51	Peak
2	5725.500	53.17	68.22	-15.05	33.38	19.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40_5755MHz
Test BY :Jing Chang

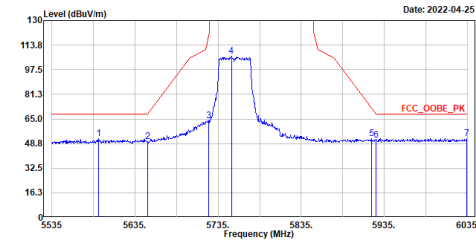

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5591.000	51.80	68.20	-16.40	32.20	19.60	Peak
2	5650.000	50.02	68.21	-18.19	30.71	19.31	Peak
3	5723.500	63.88	118.78	-54.90	44.10	19.78	Peak
4	5751.000	106.40	-----	-----	86.50	19.90	Peak
5	5920.000	52.20	71.91	-19.71	31.74	20.46	Peak
6	5925.000	51.20	68.21	-17.01	30.73	20.47	Peak
7	6034.000	52.09	68.20	-16.11	31.34	20.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40_5755MHz
Test BY :Jing Chang

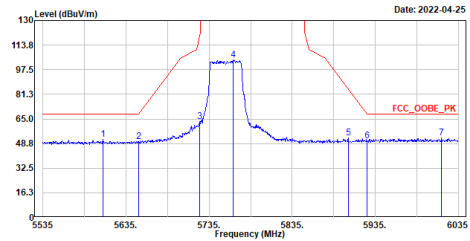

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5607.000	51.27	68.20	-16.93	31.68	19.59	Peak
2	5650.000	49.99	68.21	-18.22	30.68	19.31	Peak
3	5724.000	63.38	119.92	-56.54	43.59	19.79	Peak
4	5764.000	103.81	-----	-----	83.89	19.92	Peak
5	5902.500	52.56	84.85	-32.29	32.16	20.40	Peak
6	5925.000	50.49	68.21	-17.72	30.02	20.47	Peak
7	6015.000	52.70	68.20	-15.50	32.03	20.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax40,5795MHz
Test BY :Jing Chang

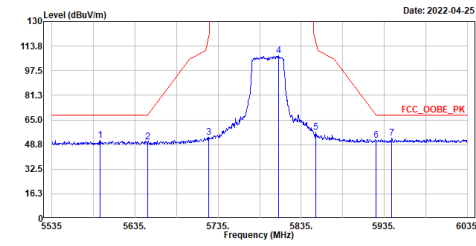


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5593.000	51.51	68.20	-16.69	31.90	19.61	Peak
2	5650.000	50.29	68.21	-17.92	30.98	19.31	Peak
3	5724.000	53.67	119.92	-66.25	33.88	19.79	Peak
4	5807.500	107.35	-----	-----	87.36	19.99	Peak
5	5852.500	56.68	116.50	-59.82	36.61	20.07	Peak
6	5925.000	51.56	68.21	-16.65	31.09	20.47	Peak
7	5944.000	52.96	68.20	-15.24	32.43	20.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax40,5795MHz
Test BY :Jing Chang

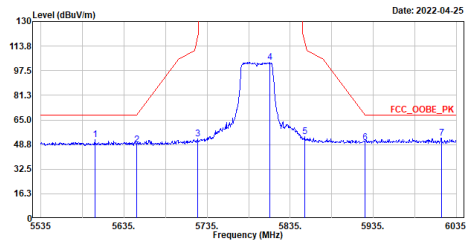


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5600.000	51.92	68.20	-16.28	32.28	19.64	Peak
2	5650.000	48.80	68.21	-19.41	29.49	19.31	Peak
3	5724.000	52.51	119.92	-67.41	32.72	19.79	Peak
4	5810.500	103.06	-----	-----	83.06	20.00	Peak
5	5852.500	54.09	116.50	-62.41	34.02	20.07	Peak
6	5925.000	50.26	68.21	-17.95	29.79	20.47	Peak
7	6017.000	52.85	68.20	-15.35	32.17	20.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80,5210MHz
Test BY :Jing Chang

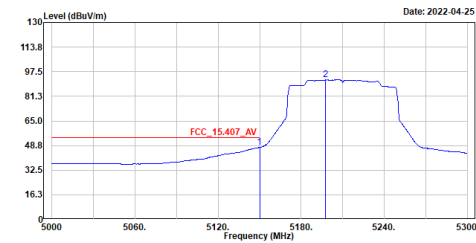


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5150.000	47.51	54.00	-6.49	29.11	18.40	Average
2	5197.400	92.09	-----	-----	73.51	18.58	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80,5210MHz
Test BY :Jing Chang

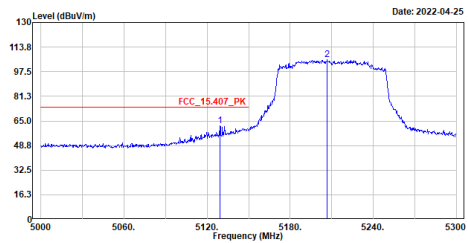


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	5129.300	61.90	74.00	-12.10	43.55	18.35	Peak
2	5206.700	105.30	-----	-----	86.66	18.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz
Test BY :Jing Chang

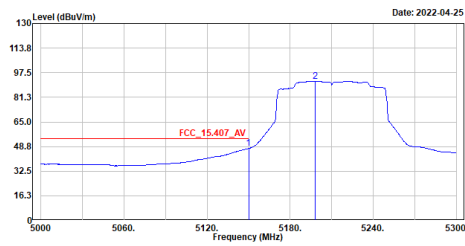


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5158.000	47.45	54.00	-6.55	29.05	18.40	Average
2	5198.300	91.82	-----	-----	73.23	18.59	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz
Test BY :Jing Chang

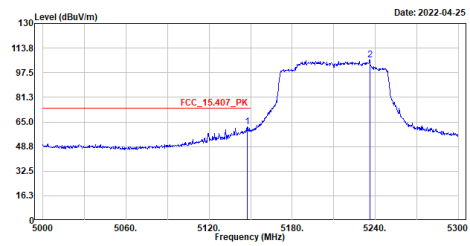


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5147.600	61.59	74.00	-12.41	43.19	18.40	Peak
2	5236.100	105.78	-----	-----	86.97	18.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5290MHz
Test BY :Jing Chang

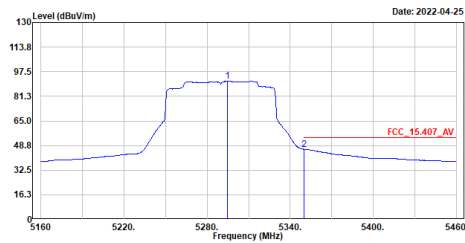


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5294.700	91.13	-----	-----	71.99	19.14	Average
2	5350.200	46.26	54.00	-7.74	27.23	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5290MHz
Test BY :Jing Chang

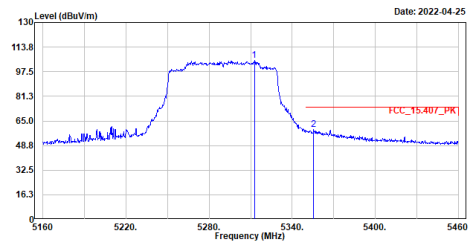


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5312.700	105.11	-----	-----	85.99	19.12	Peak
2	5355.600	59.47	74.00	-14.53	40.42	19.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5290MHz
Test BY :Jing Chang

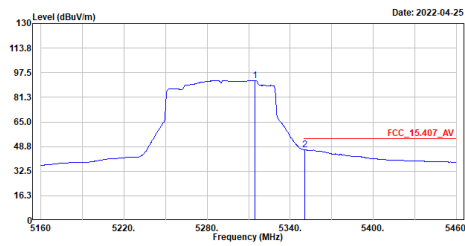


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5314.800	92.40	-----	-----	73.29	19.11	Average
2	5350.500	46.57	54.00	-7.43	27.54	19.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5290MHz
Test BY :Jing Chang

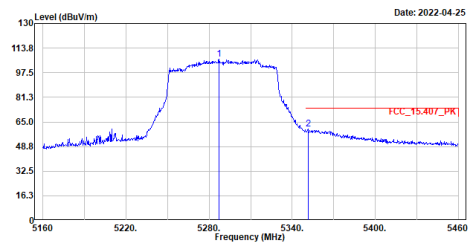


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5287.200	106.30	-----	-----	87.21	19.09	Peak
2	5351.400	60.18	74.00	-13.82	41.14	19.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5530MHz
Test BY :Jing Chang

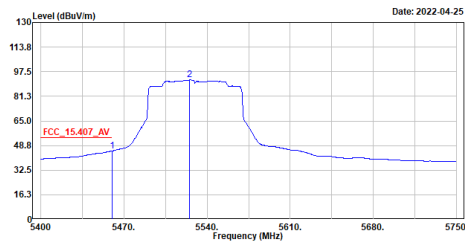


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	45.09	54.00	-8.91	25.85	19.24	Average
2	5525.300	92.04	-----	-----	72.62	19.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5530MHz
Test BY :Jing Chang

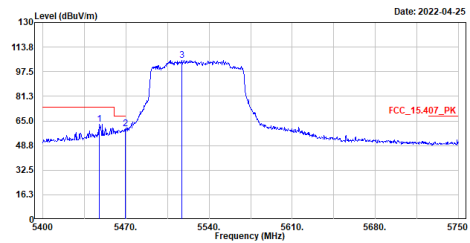


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5447.250	62.90	74.00	-11.10	43.69	19.21	Peak
2	5469.300	59.72	68.22	-8.50	40.45	19.27	Peak
3	5517.250	105.18	-----	-----	85.77	19.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5530MHz
Test BY :Jing Chang

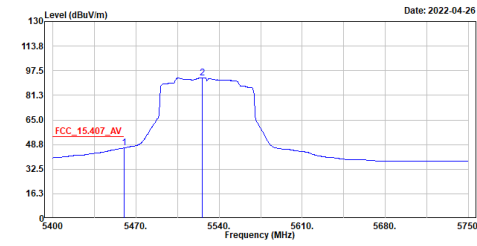

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5459.850	46.43	54.00	-7.57	27.19	19.24	Average
2	5525.650	92.96	-----	-----	73.54	19.42	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5530MHz
Test BY :Jing Chang

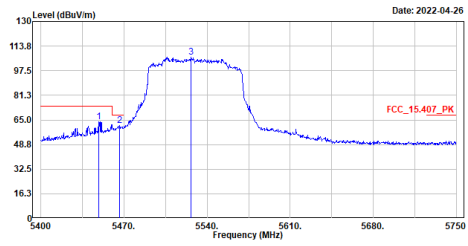

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5448.650	63.88	74.00	-10.12	44.67	19.21	Peak
2	5466.500	61.08	68.22	-7.14	41.82	19.26	Peak
3	5526.350	106.40	-----	-----	86.98	19.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Horizontal
Mode :TX_ax80_5775MHz
Test BY :Jing Chang

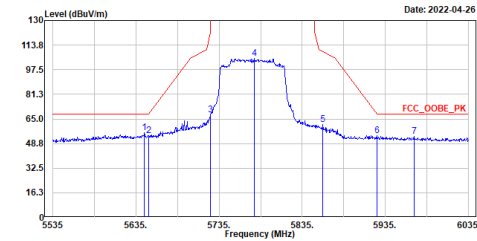

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5645.000	55.81	68.20	-12.39	36.46	19.35	Peak
2	5650.000	54.11	68.21	-14.10	34.80	19.31	Peak
3	5725.000	67.68	122.20	-54.52	47.89	19.79	Peak
4	5777.000	104.76	-----	-----	84.83	19.93	Peak
5	5868.000	61.27	109.40	-48.13	41.14	20.13	Peak
6	5925.000	53.74	68.21	-14.47	33.27	20.47	Peak
7	5969.500	53.33	68.20	-14.87	32.76	20.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,Vertical
Mode :TX_ax80_5775MHz
Test BY :Jing Chang

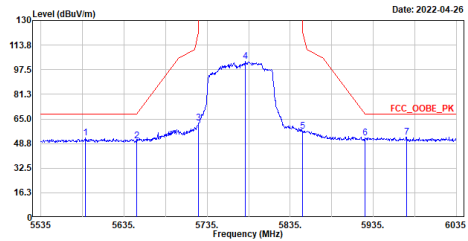

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5588.500	52.27	68.20	-15.93	32.67	19.60	Peak
2	5650.000	50.32	68.21	-17.89	31.01	19.31	Peak
3	5725.000	62.21	122.20	-59.99	42.42	19.79	Peak
4	5781.000	102.86	-----	-----	82.92	19.94	Peak
5	5850.000	57.14	122.20	-65.06	37.08	20.06	Peak
6	5925.000	52.45	68.21	-15.76	31.98	20.47	Peak
7	5975.500	52.96	68.20	-15.24	32.38	20.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5250MHz_B1
Test BY :Jing Chang

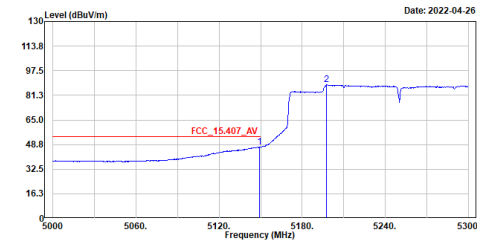


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.400	47.12	54.00	-6.88	28.72	18.40	Average
2	5197.700	88.28	-----	-----	69.69	18.59	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5250MHz_B1
Test BY :Jing Chang

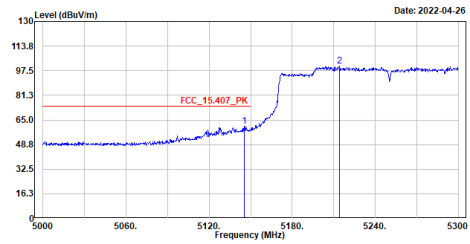


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5145.500	60.79	74.00	-13.21	42.40	18.39	Peak
2	5214.200	100.46	-----	-----	81.78	18.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B1
Test BY :Jing Chang

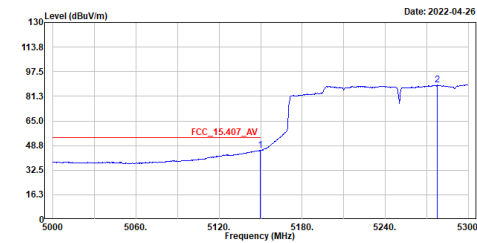


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.700	45.47	54.00	-8.53	27.07	18.40	Average
2	5277.500	88.55	-----	-----	69.51	19.04	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B1
Test BY :Jing Chang

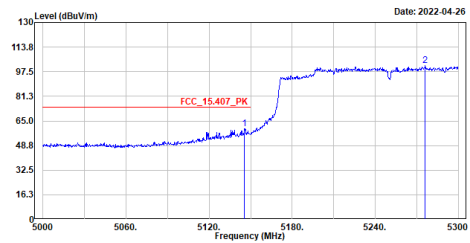


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5145.500	59.92	74.00	-14.08	41.53	18.39	Peak
2	5276.000	101.41	-----	-----	82.38	19.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5250MHz_B2
Test BY :Jing Chang

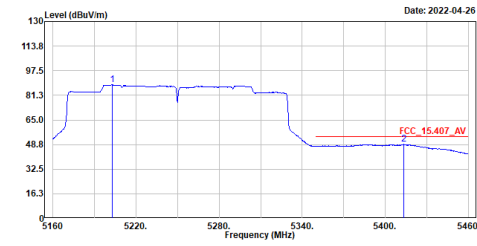


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5202.900	88.09	-----	-----	69.48	18.61	Average
2	5413.500	48.87	54.00	-5.13	29.58	19.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5250MHz_B2
Test BY :Jing Chang

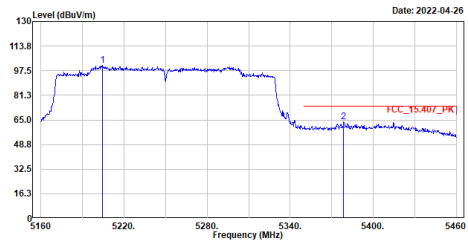


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5204.400	101.10	-----	-----	82.48	18.62	Peak
2	5378.700	63.71	74.00	-10.29	44.52	19.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B2
Test BY :Jing Chang

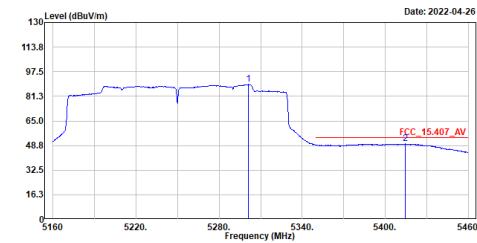


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5301.000	89.13	-----	-----	69.97	19.16	Average
2	5414.700	49.81	54.00	-4.19	30.53	19.28	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5250MHz_B2
Test BY :Jing Chang

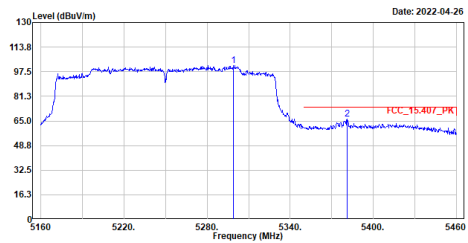


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5298.900	101.56	-----	-----	82.48	19.16	Peak
2	5381.400	66.07	74.00	-7.93	46.86	19.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5570MHz
Test BY :Jing Chang

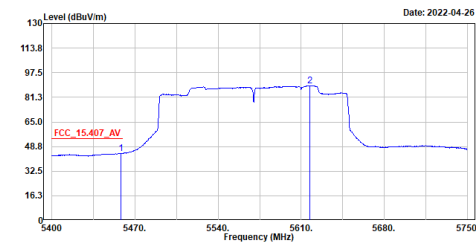


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5458.100	44.32	54.00	-9.68	25.08	19.24	Average
2	5617.350	88.98	-----	-----	69.45	19.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Horizontal
Mode :TX_axi60_5570MHz
Test BY :Jing Chang

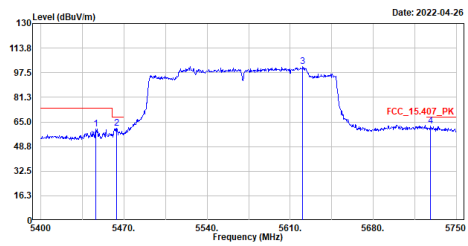


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5446.550	60.31	74.00	-13.69	41.18	19.21	Peak
2	5464.050	60.98	68.22	-7.24	41.72	19.26	Peak
3	5620.500	101.65	-----	-----	82.14	19.51	Peak
4	5727.950	62.31	68.22	-5.91	42.51	19.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5570MHz
Test BY :Jing Chang

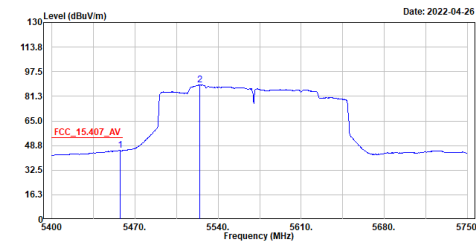


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5457.400	45.64	54.00	-8.36	26.41	19.23	Average
2	5524.600	88.61	-----	-----	69.19	19.42	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,Vertical
Mode :TX_axi60_5570MHz
Test BY :Jing Chang

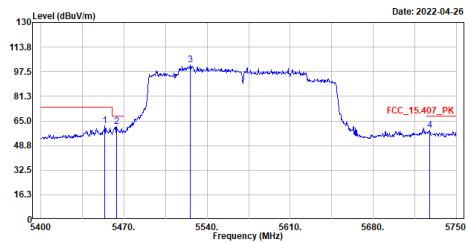


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5453.900	61.71	74.00	-12.29	42.49	19.22	Peak
2	5463.700	61.44	68.22	-6.78	42.18	19.26	Peak
3	5526.000	102.03	-----	-----	82.61	19.42	Peak
4	5727.600	58.70	68.22	-9.52	38.90	19.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

5. Duty Cycle

5.1. Test Setup



5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to test procedure of KDB789033 for compliance to FCC 47CFR 15.407 requirements.

5.3. Test Result of Duty Cycle

Product : Intel® Wi-Fi 6 AX200
 Test Item : Duty Cycle
 Test Mode : Transmit

Duty Cycle Formula:


Duty Cycle = $T_{on} / (T_{on} + T_{off})$

Duty Factor = 10 Log (1/Duty Cycle)

Results: SISO A


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11 a	2.0900	2.1350	97.89	0.09
802.11 n20	3.9800	4.0250	98.88	0.05
802.11 n40	8.0480	8.1290	99.00	0.04
802.11 ac80	3.9660	4.0110	98.88	0.05
802.11 ac160	5.4540	5.5230	98.75	0.05
802.11 ax20	2.5820	2.6240	98.40	0.07
802.11 ax40	18.6620	18.8640	98.93	0.05
802.11 ax80	8.8220	8.9240	98.86	0.05
802.11 ax160	4.4760	4.5260	98.90	0.05

802.11a – SISO A

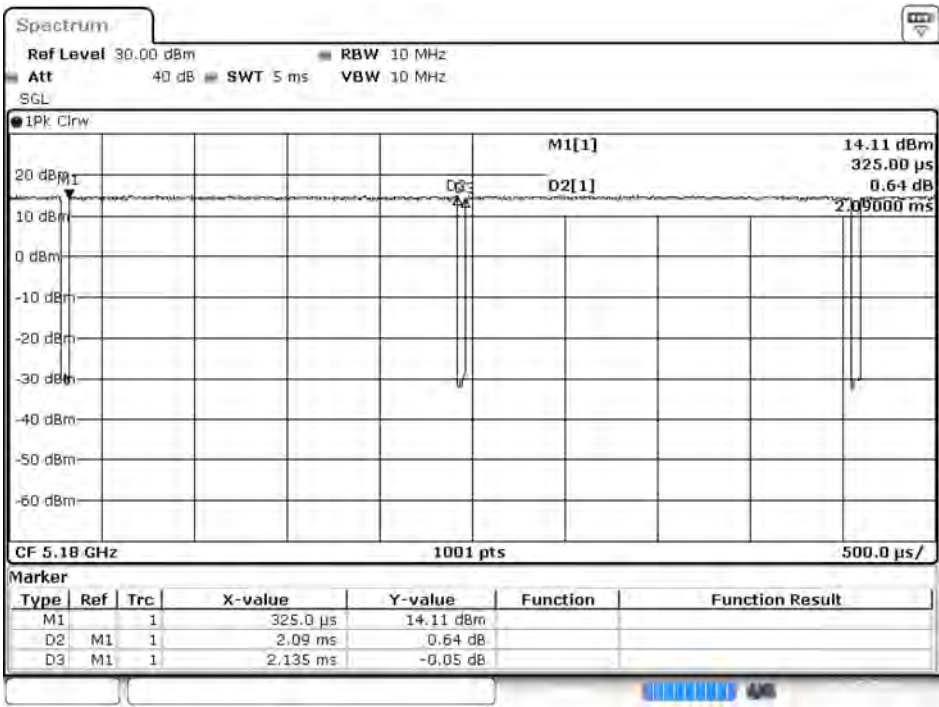


Date: 15 FEB 2022 09:44:36

802.11n20 – SISO A

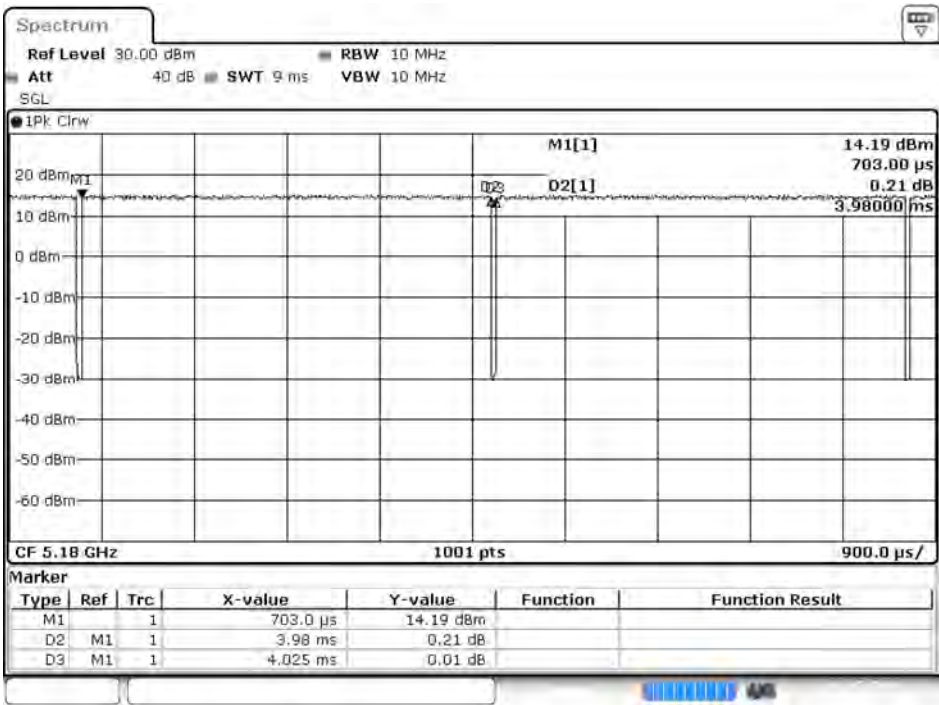


Date: 15 FEB 2022 09:46:29

802.11n40 – SISO A

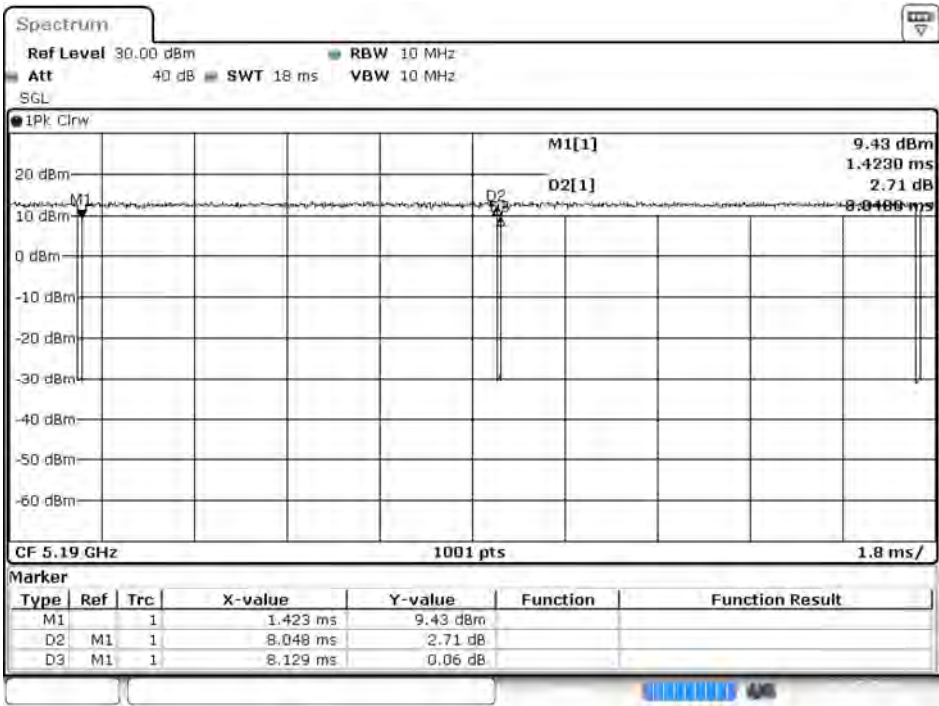


Date: 15 FEB 2022 09:48:27

802.11ac80 – SISO A

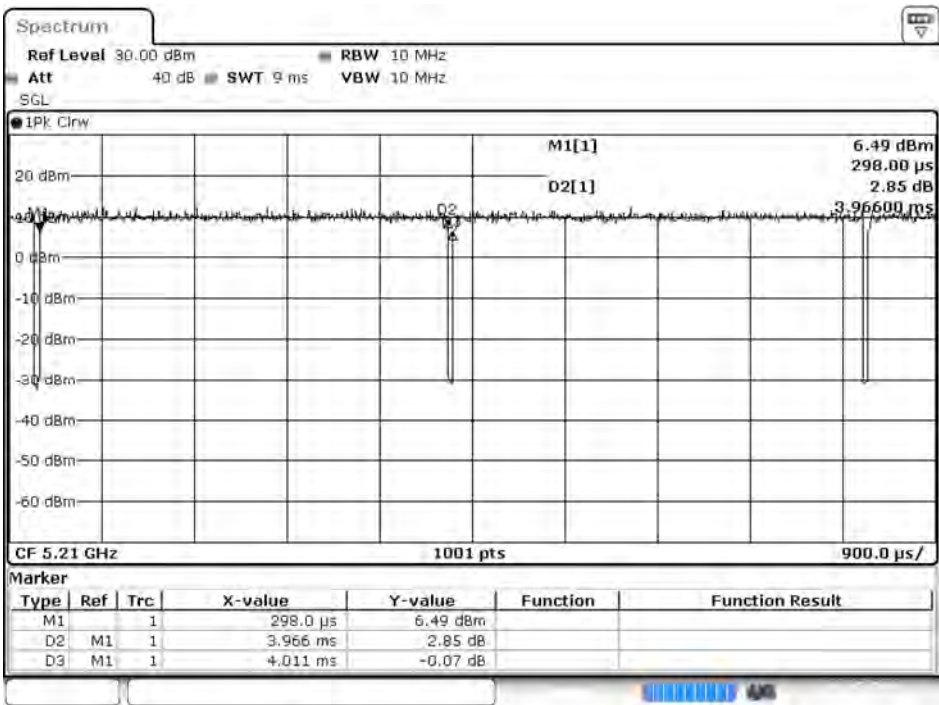


Date: 15 FEB 2022 09:50:14


802.11ac160 – SISO A

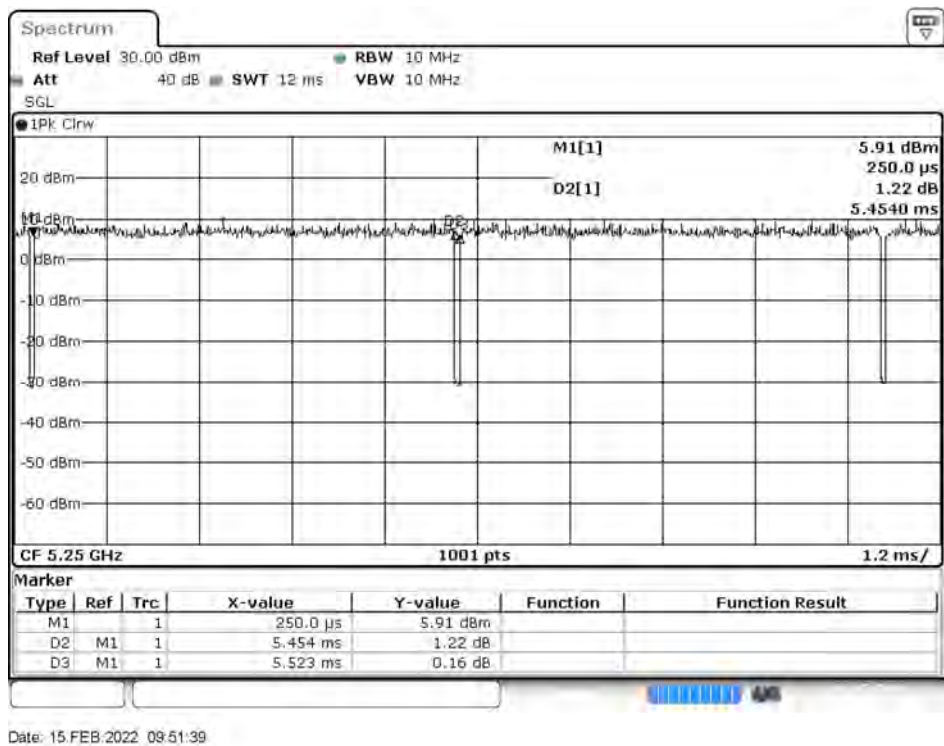


802.11ax20 – SISO A

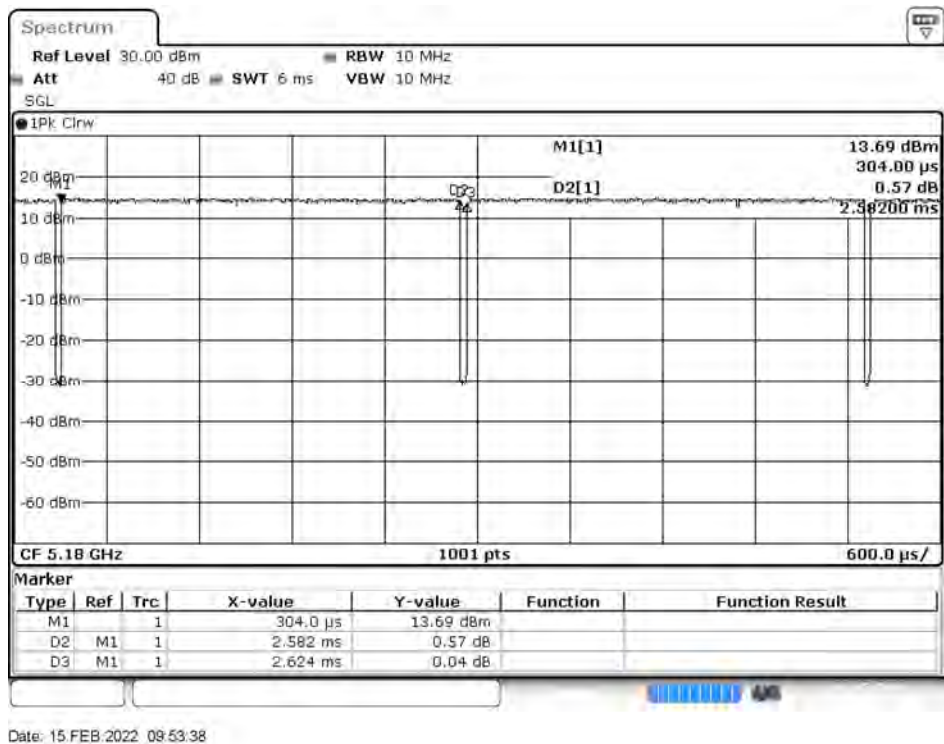


802.11ax40 – SISO A

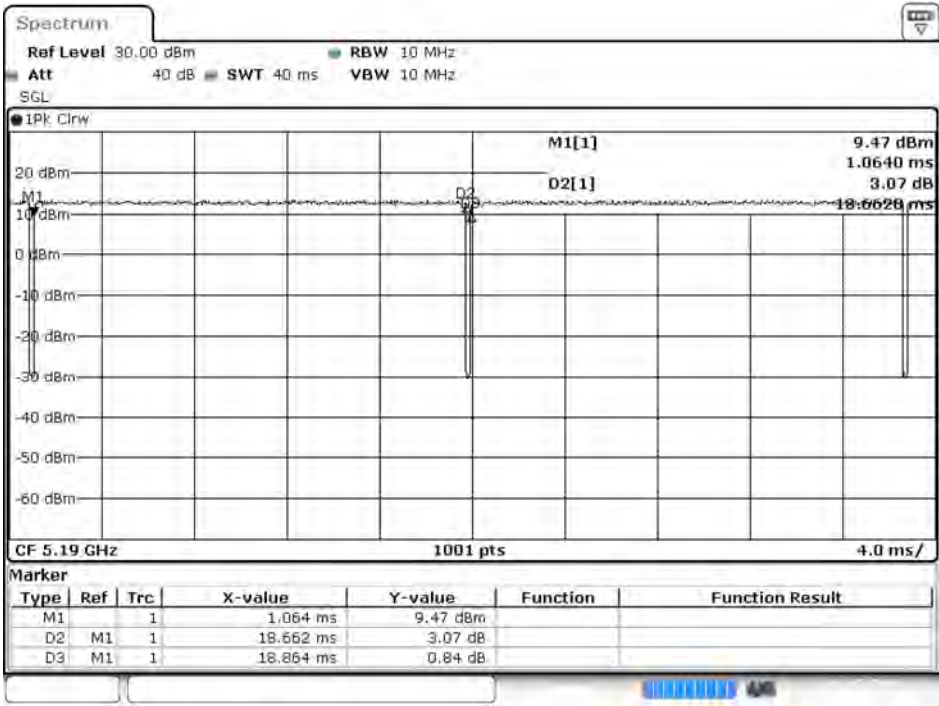

802.11ax80 – SISO A

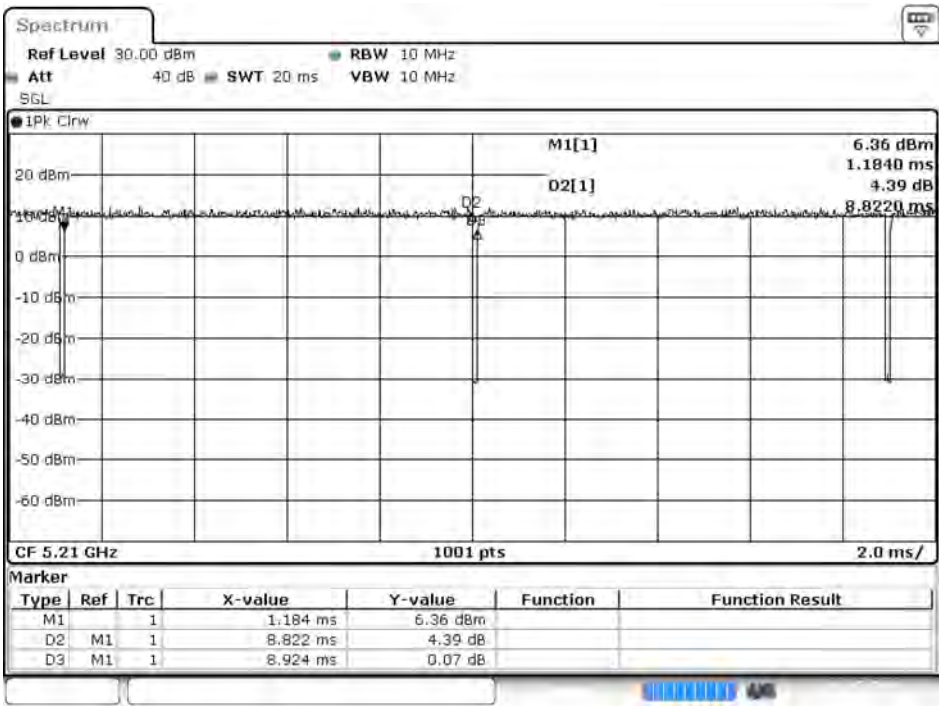

802.11ax160 – SISO A

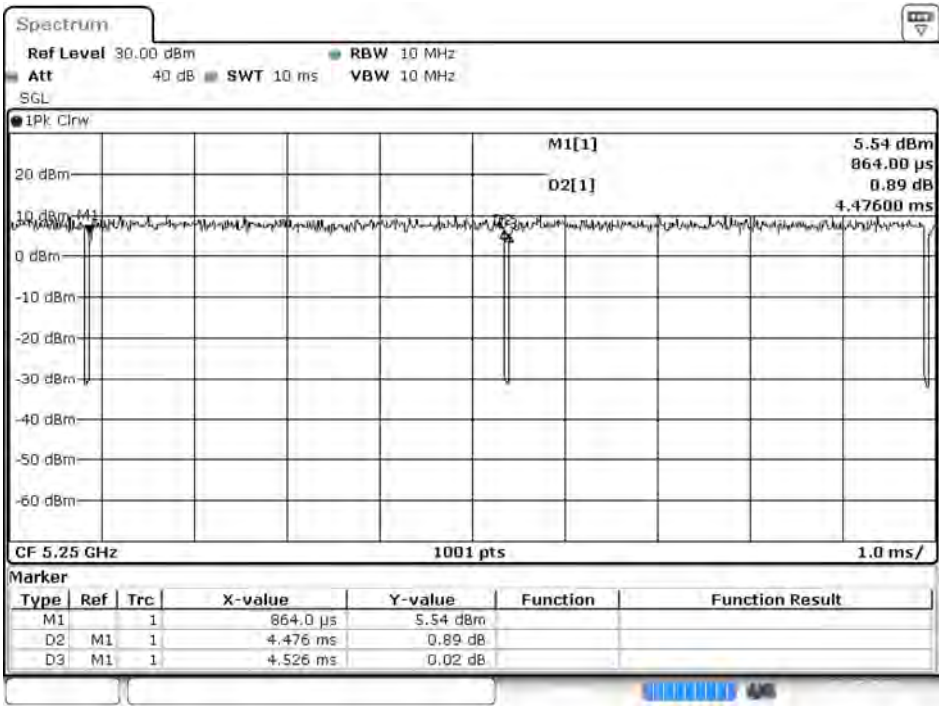

Date: 15 FEB 2022 09:58:27

Product : Intel® Wi-Fi 6 AX200
Test Item : Duty Cycle
Test Mode : Transmit

Duty Cycle Formula:



Duty Cycle = $T_{on} / (T_{on} + T_{off})$

Duty Factor = $10 \log (1/\text{Duty Cycle})$


Results: SISO B

5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11 a	2.0860	2.1310	97.89	0.09
802.11 n20	5.9470	6.0050	99.03	0.04
802.11 n40	17.7870	17.9650	99.01	0.04
802.11 ac80	10.9120	11.0150	99.06	0.04
802.11 ac160	3.9600	4.0140	98.65	0.06
802.11 ax20	2.5740	2.6160	98.39	0.07
802.11 ax40	18.6540	18.8560	98.93	0.05
802.11 ax80	8.9200	9.0200	98.89	0.05
802.11 ax160	4.4700	4.5300	98.68	0.06


302.11n20 – SIS0 B




802.11n40 – SISO B

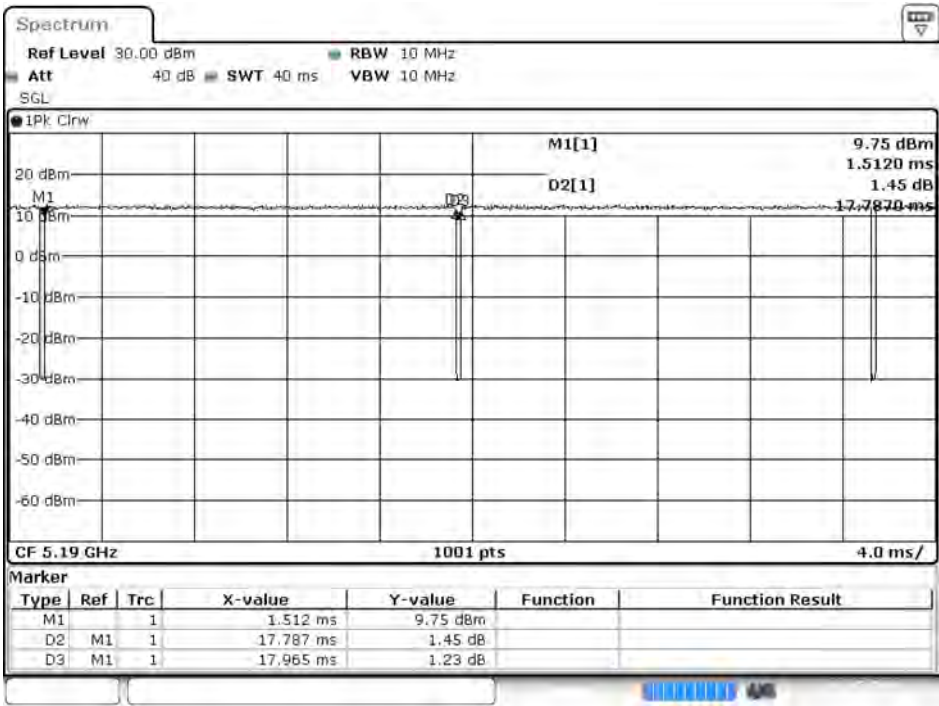


802.11ac80 – SISO B

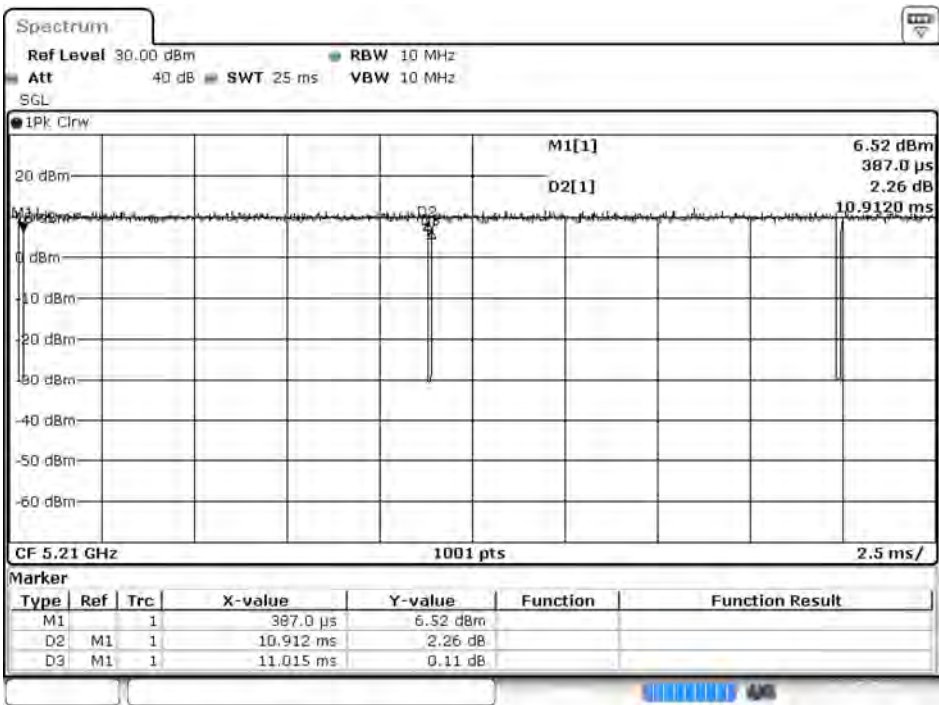


802.11ac160 – SISO B

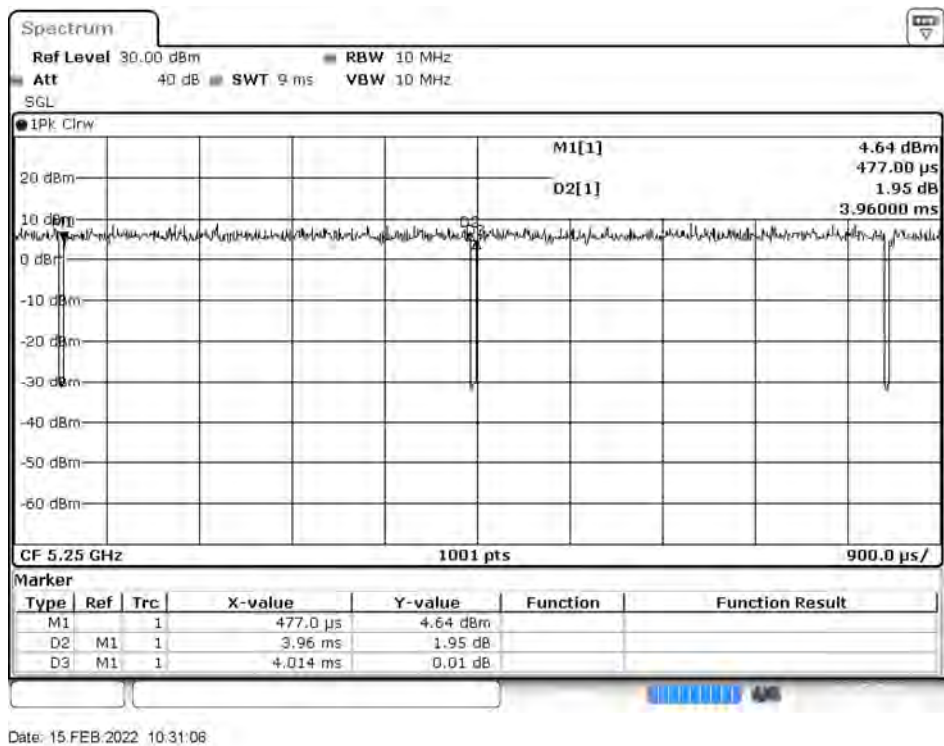


802.11ax20 – SISO B

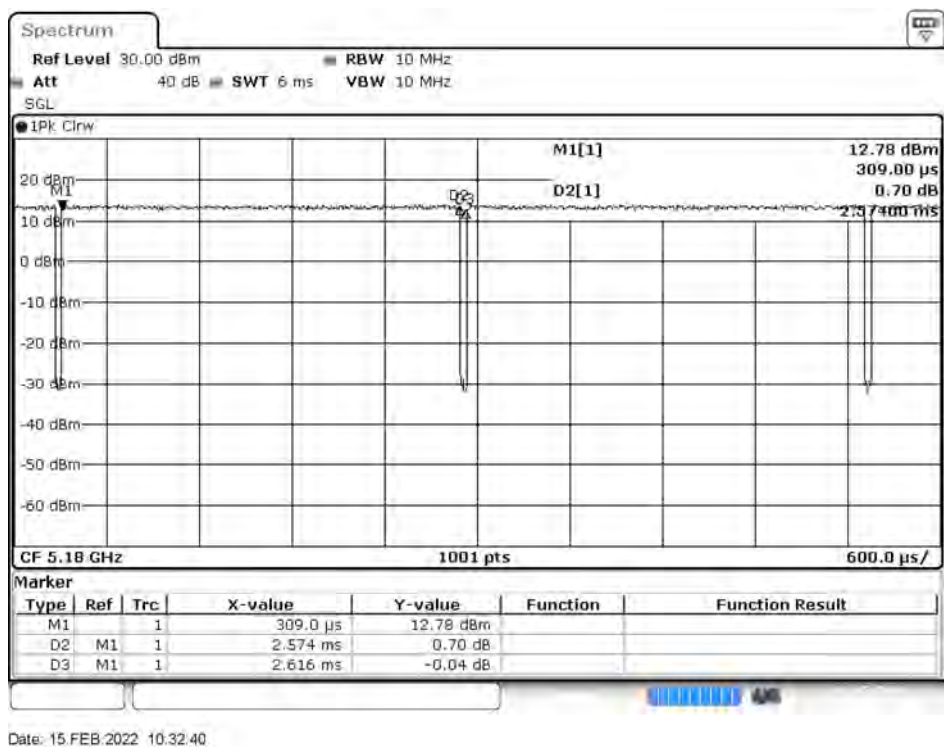


802.11ax40 – SISO B

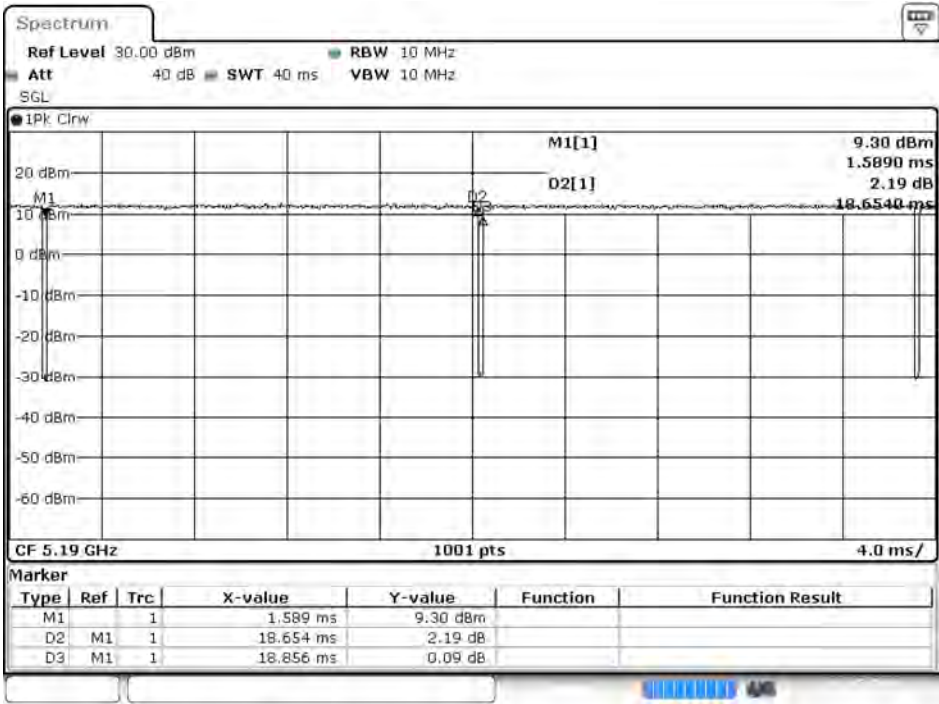

802.11ax80 – SISO B

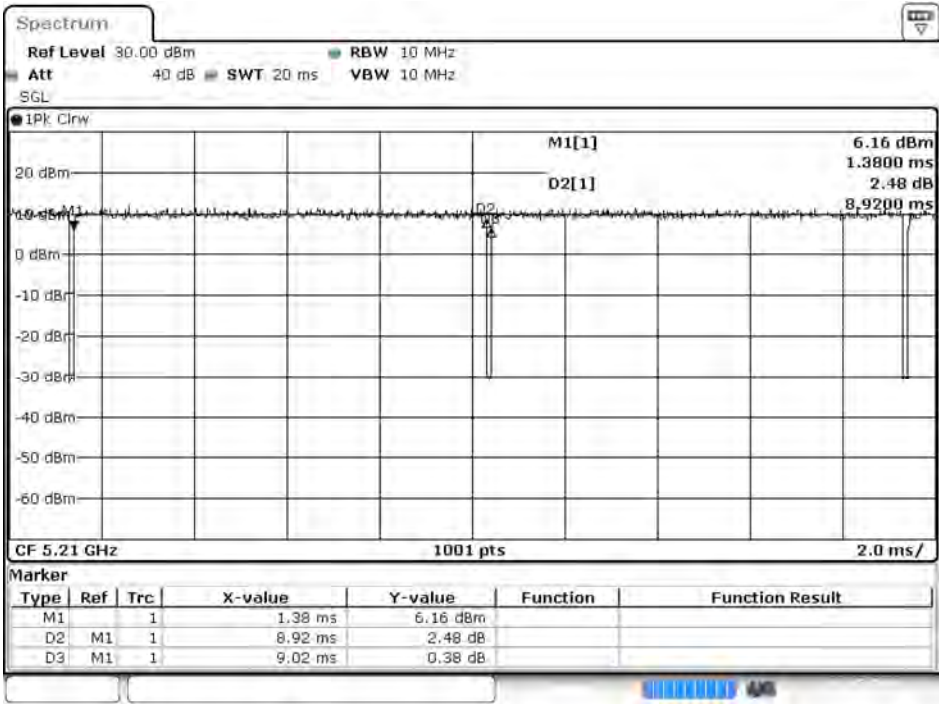

802.11ax160 – SISO B

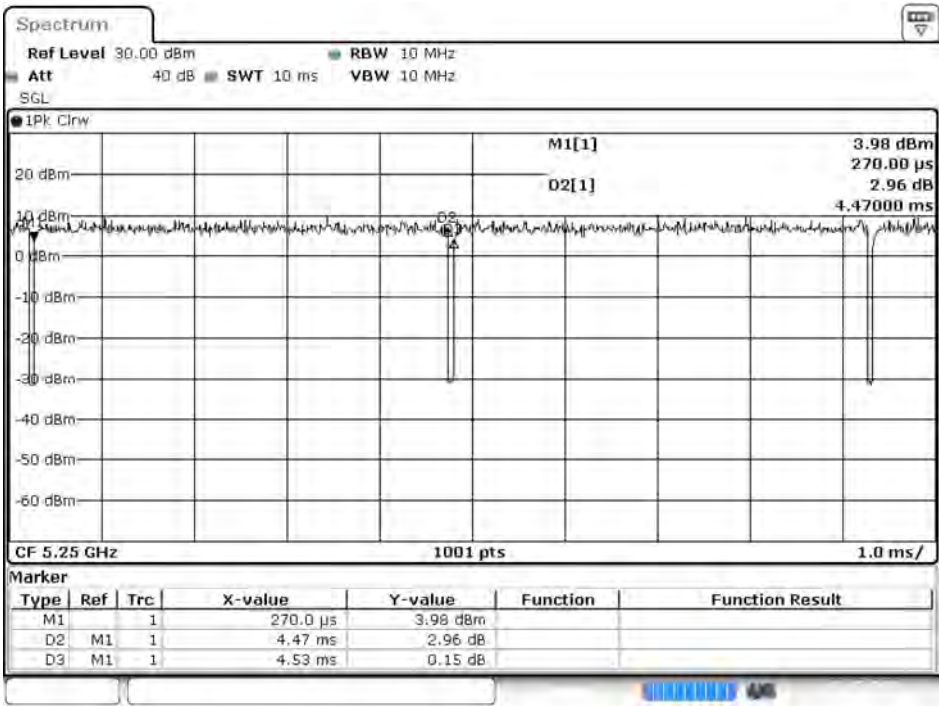

Date: 15 FEB 2022 10:37:20

Product : Intel® Wi-Fi 6 AX200
Test Item : Duty Cycle
Test Mode : Transmit

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results: MIMO


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11 n20	5.9580	6.0210	98.95	0.05
802.11 n40	8.9380	9.0210	99.08	0.04
802.11 ac80	5.4580	5.5170	98.93	0.05
802.11 ac160	2.7790	2.8270	98.30	0.07
802.11 ax20	18.6190	18.8270	98.90	0.05
802.11 ax40	9.2990	9.3870	99.06	0.04
802.11 ax80	4.4770	4.5270	98.90	0.05
802.11 ax160	2.2770	2.3270	97.85	0.09

802.11n20 - MIMO

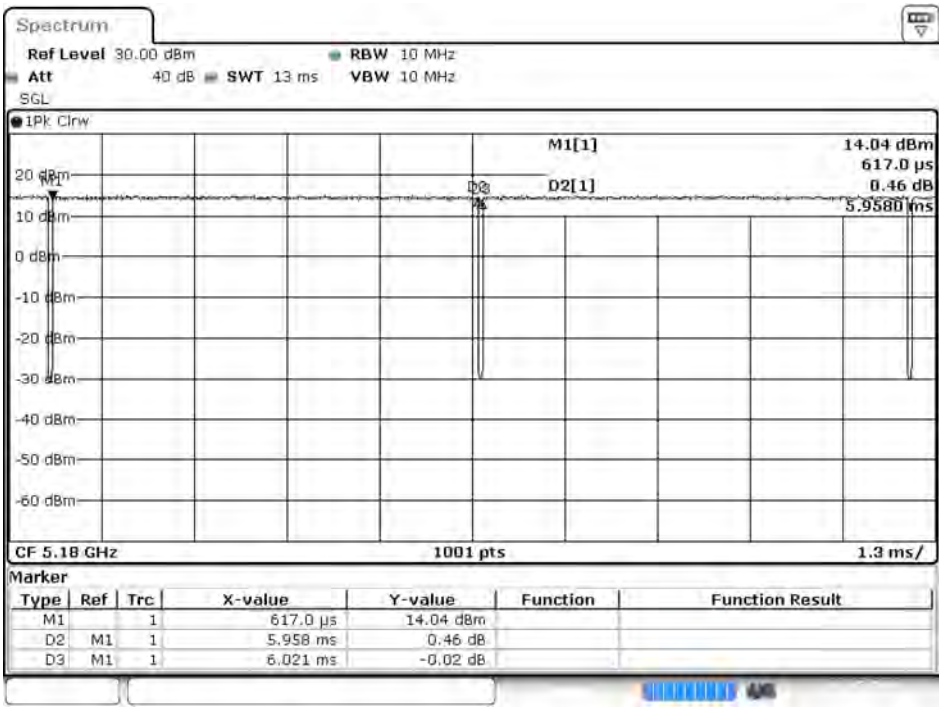


Date: 15.FEB.2022 10:00:46

802.11n40 - MIMO

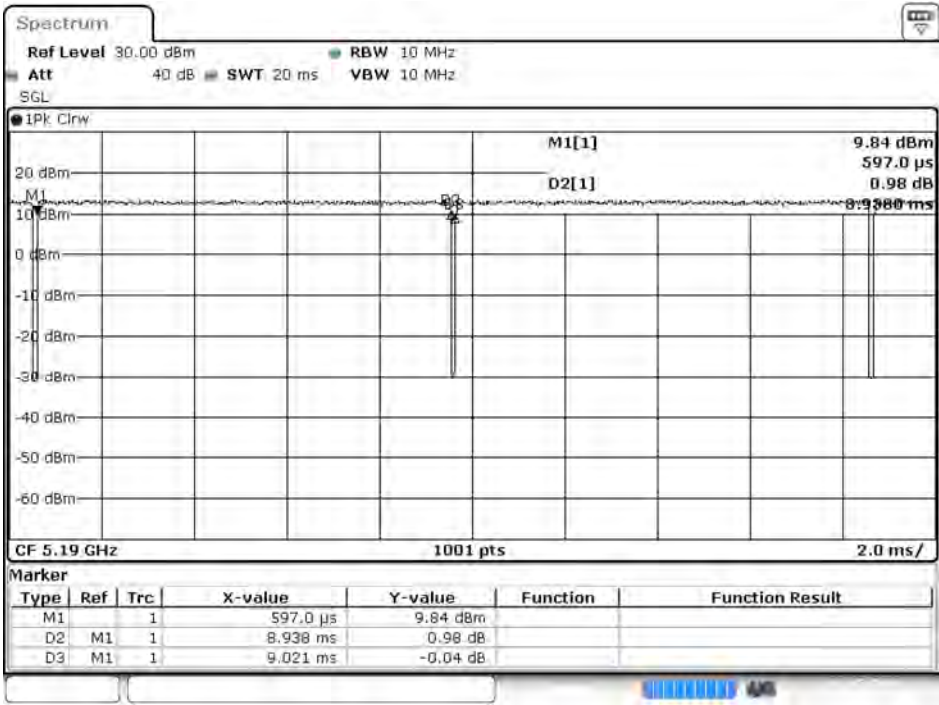


Date: 15.FEB.2022 10:02:08

802.11ac80 - MIMO

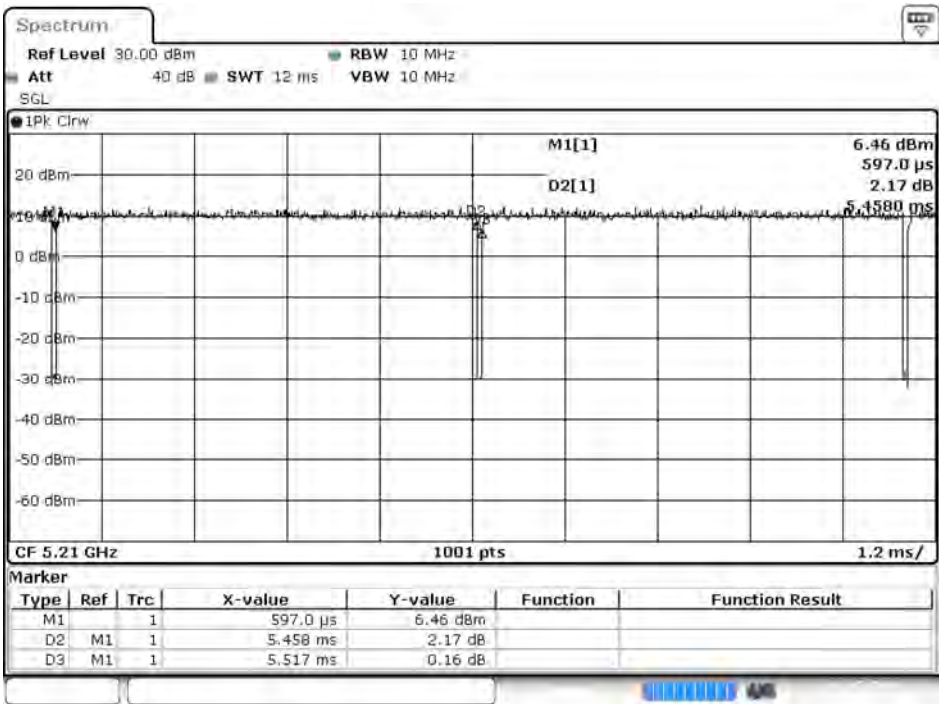


Date: 15 FEB.2022 10:03:40

802.11ac160 - MIMO

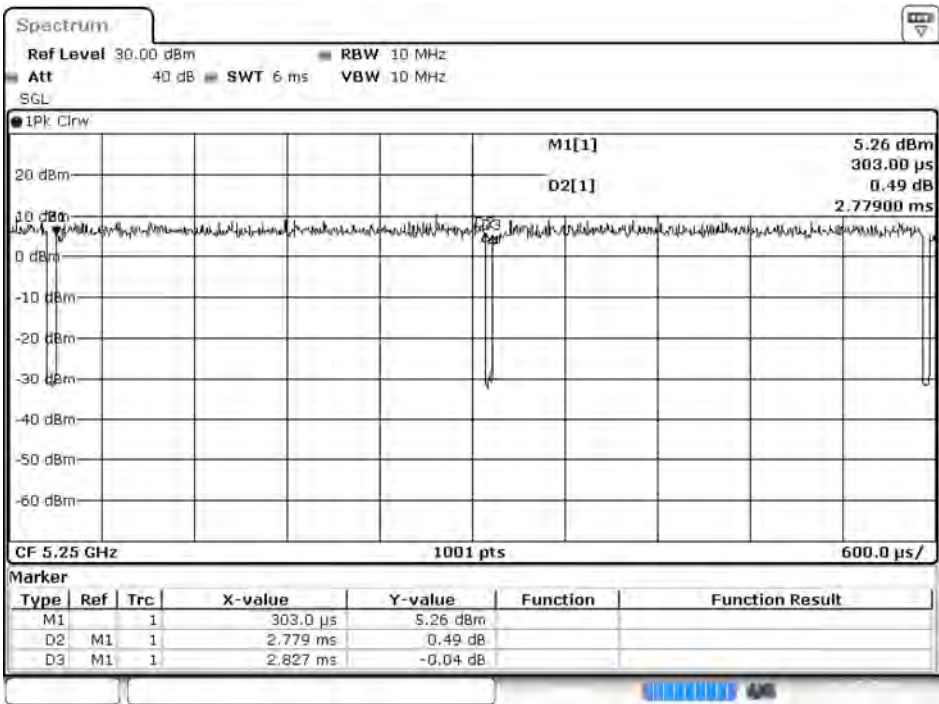


Date: 15 FEB.2022 10:05:04

802.11ax20 - MIMO

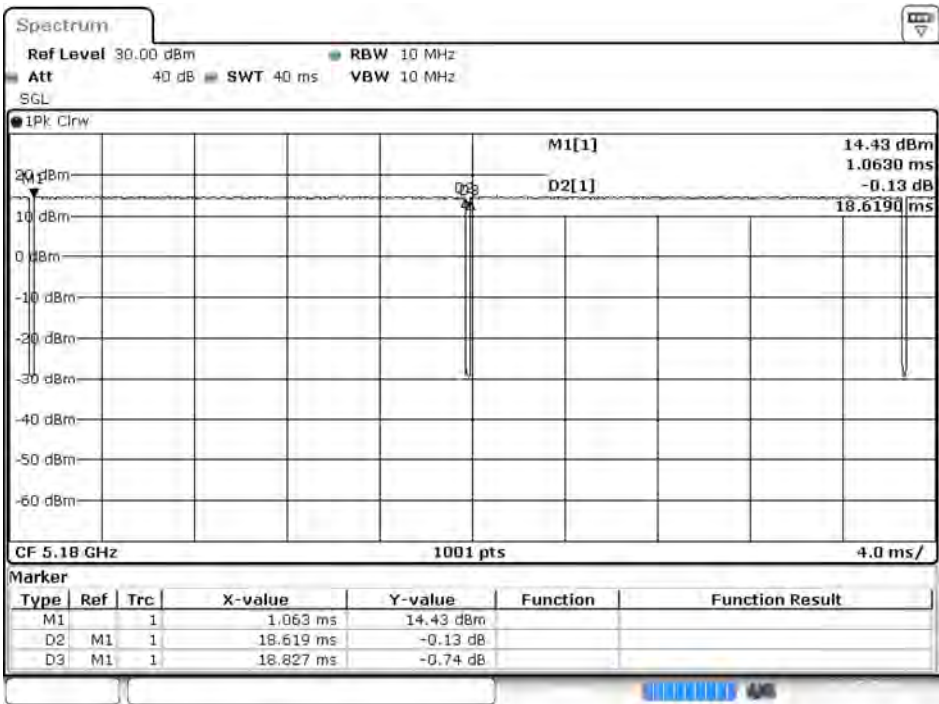


Date: 15 FEB.2022 10:06:51

802.11ax40 - MIMO

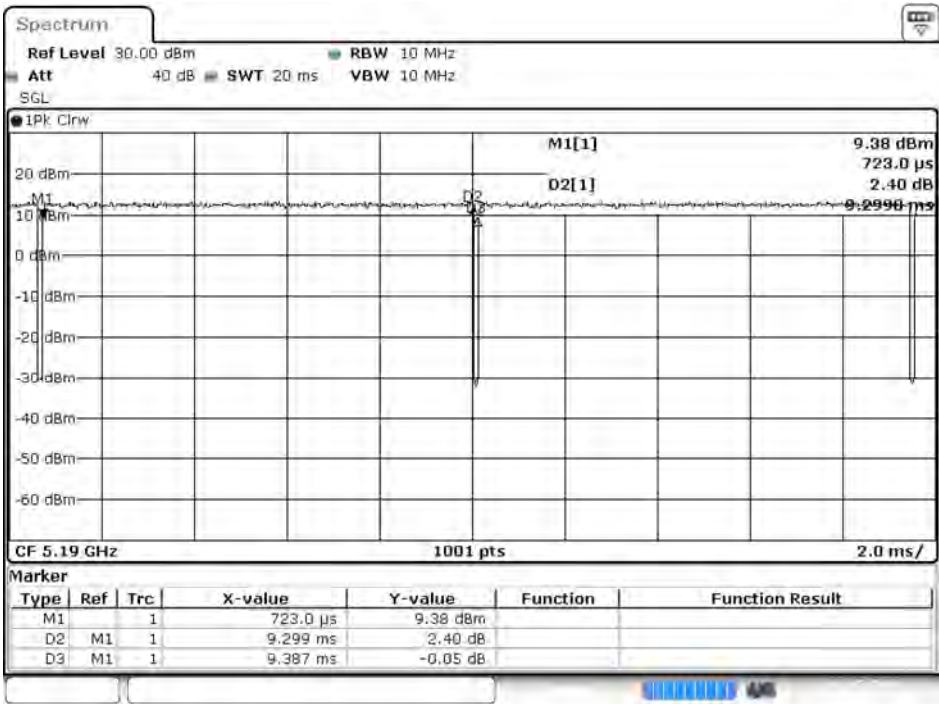


Date: 15 FEB.2022 10:08:14

802.11ax80 - MIMO

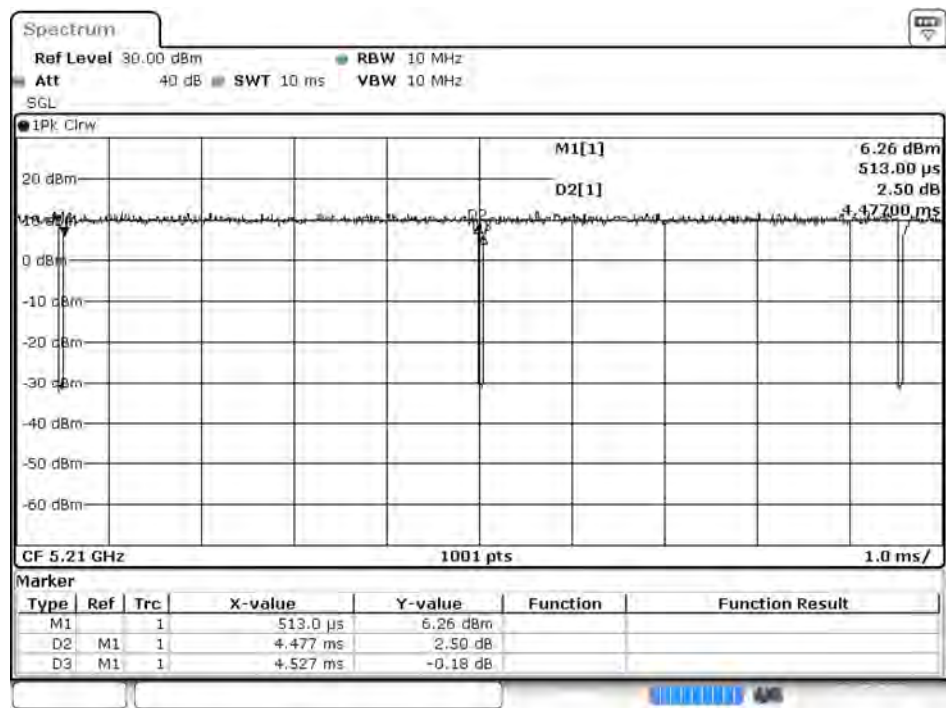

Date: 15.FEB.2022 10:09:52

802.11ax160 - MIMO

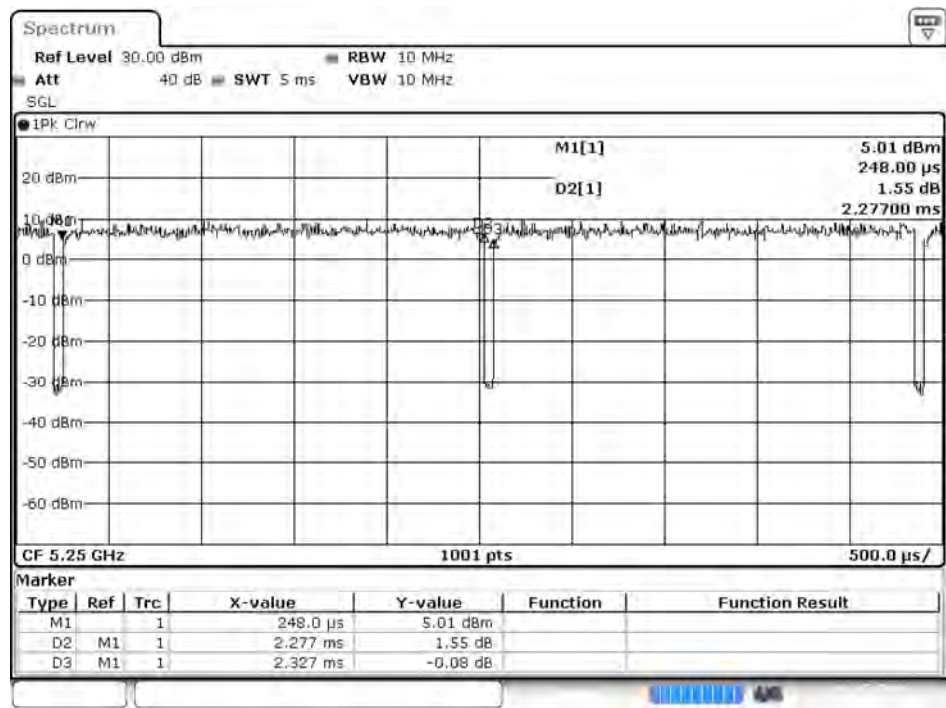

Date: 15.FEB.2022 10:11:08

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.