

APPLICANT:

TOSHIBA CORPORATION

TRANSCIEVER TYPE:

CJ6DCE34608A

OCCUPIED BANDWIDTH (Sample)

<u>Description</u>	<u>Page</u>
Modulation: No Modulation	2
Modulation: Audio (Compandor ON)	3
Modulation: SAT	4
Modulation: Audio (Compandor ON)+SAT	5
Modulation: DTMF+SAT	6
Modulation: WBD	7
Modulation: ST	8
Modulation: SAT+ST	9
Modulation: Digital Mode	10

Transmitter Type: CJ6DCE34608A

Date: Jan. 25, 1999

Signature

Kuniyoshi Marui
Kuniyoshi Marui

APPLICANT:

TOSHIBA CORPORATION

TRANSCIEVER TYPE:


CJ6DCE34608A

MODULATION: NO MODULATION


Horizontal Scale: 20kHz/Div

Vertical Scale: 10dB/Div (Attenuation)

Bandwidth: 300Hz

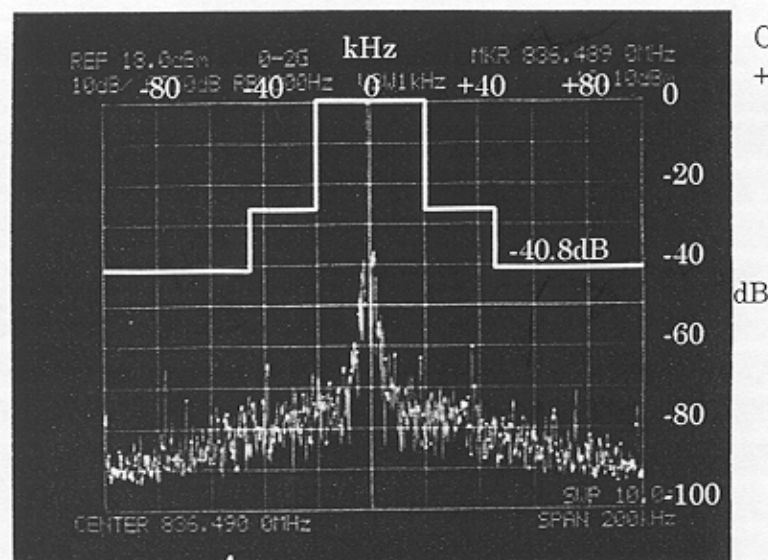



Carrier Reference Level
+27.0dBm (0.5watts)

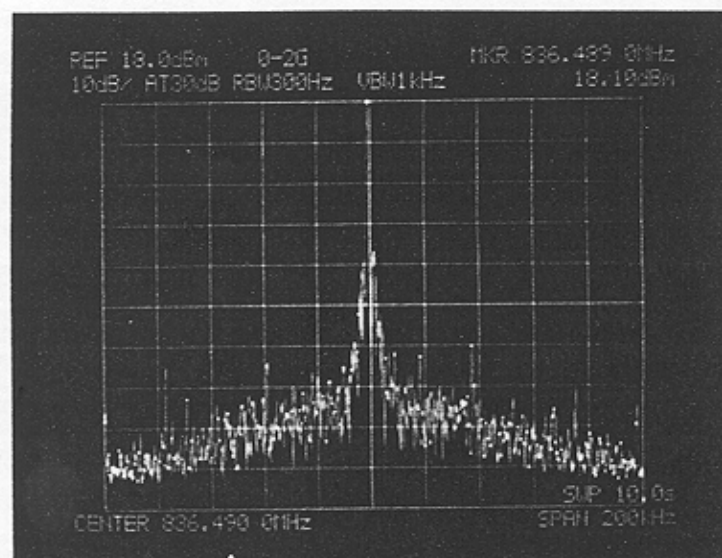

TRANSCIVER TYPE

CJ6DCE34608A

Horizontal Scale: 20kHz/Div
Vertical Scale: 10dB/Div (Attenuation)
Bandwidth: 300Hz
Audio Level: 16dB greater than the level to produce +/-6kHz deviation
Audio Frequency: 2500Hz



APPLICANT:

TOSHIBA CORPORATION

TRANSCEIVER TYPE

CJ6DCE34608A

MODULATION: SAT


Horizontal Scale: 20kHz/Div

Vertical Scale: 10dB/Div (Attenuation)


Bandwidth: 300Hz

Deviation: +/-2kHz

Signal Frequency: 6kHz (SAT)

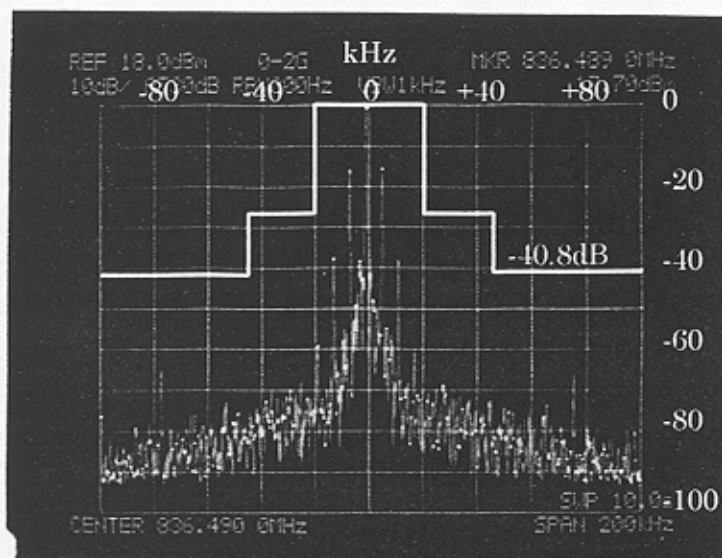

Carrier Reference Level
+27.0dBm (0.5watts)

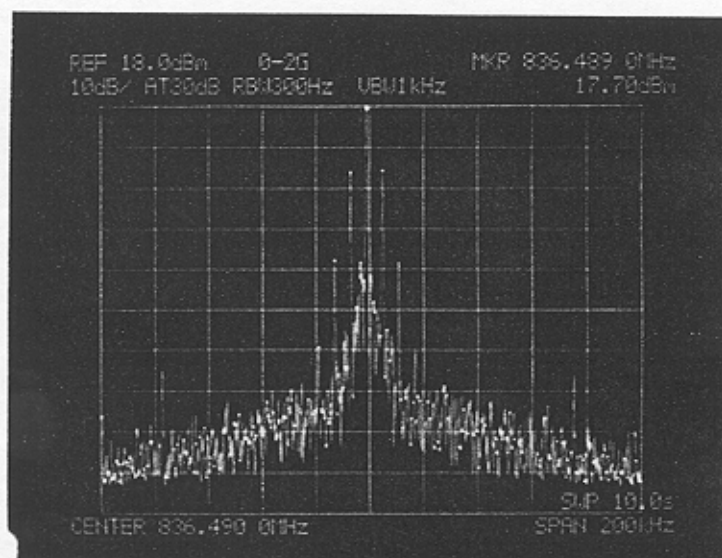

APPLICANT:

TOSHIBA CORPORATION

TRANSCIEVER TYPE:

CJ6DCE34608A

MODULATION: AUDIO (Compandor ON) + SAT


Horizontal Scale: 20kHz/Div

Vertical Scale: 10dB/Div (Attenuation)


Bandwidth: 300Hz

AUDIO Level: AUDIO = 16dB greater than the level to produce +/-6kHz deviation, SAT = Equal to the level to produce +/-2kHz deviation

AUDIO Frequency: AUDIO = 2500Hz, SAT = 6kHz

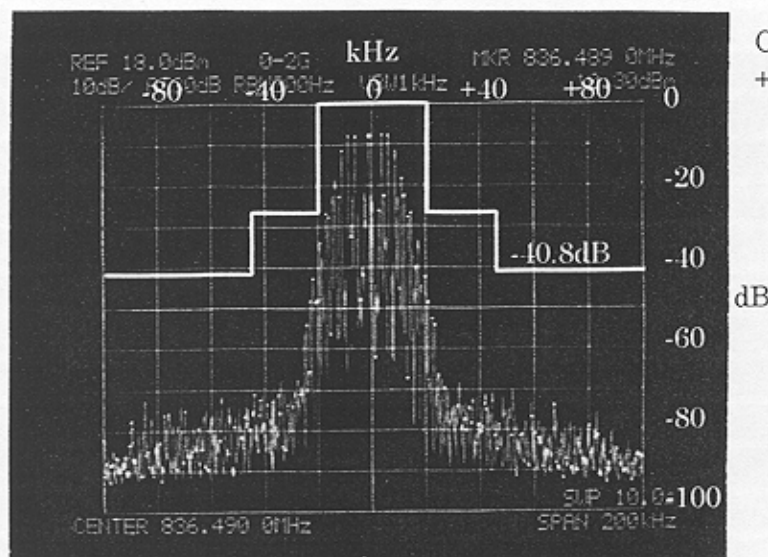

Carrier Reference Level
+27.0dBm (0.5watts)

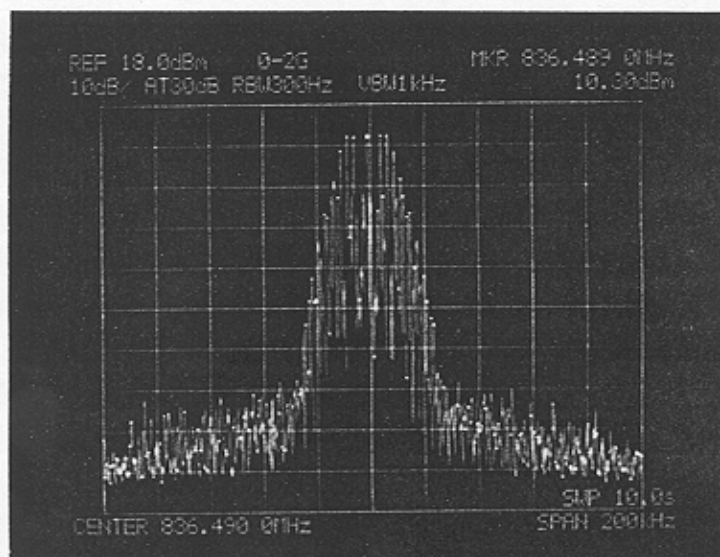

MODULATION: DTMF + SAT



Horizontal Scale: 20kHz/Div

Vertical Scale: 10dB/Div (Attenuation)

Bandwidth: 300Hz

Deviation: DTMF = ± 4.5 rad/freq., SAT = ± 2 kHz

Signal Frequency: DTMF = #(1477Hz & 941Hz), SAT = 6kHz

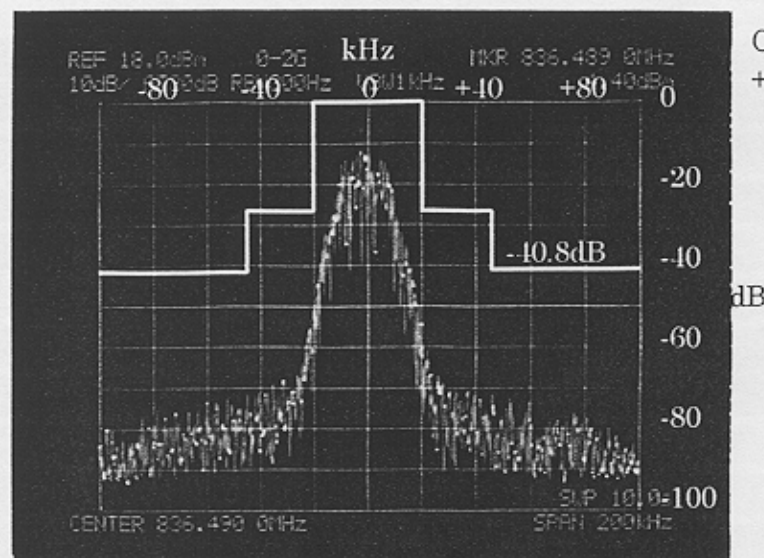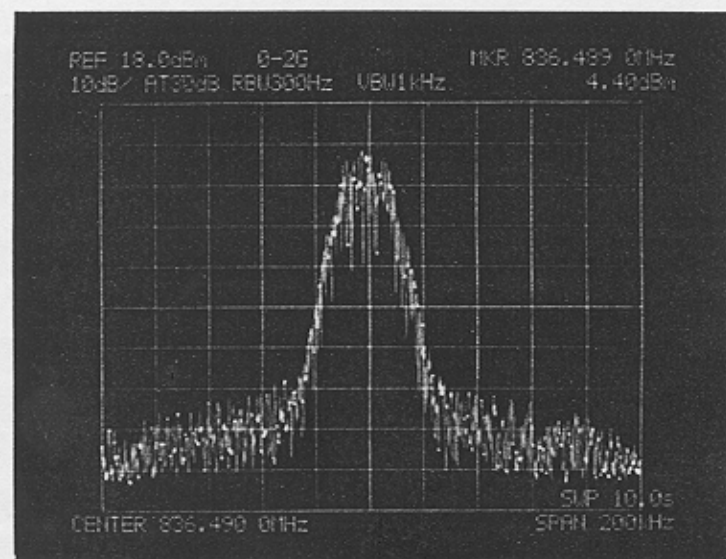Carrier Reference Level
+27.0dBm (0.5watts)

MODULATION: WIDEBAND DATA (WBD)



Horizontal Scale: 20kHz/Div

Vertical Scale: 10dB/Div (Attenuation)

Bandwidth: 300Hz

Deviation: +/-8kHz

Signal: WBD (One of RECC DATA Streams)

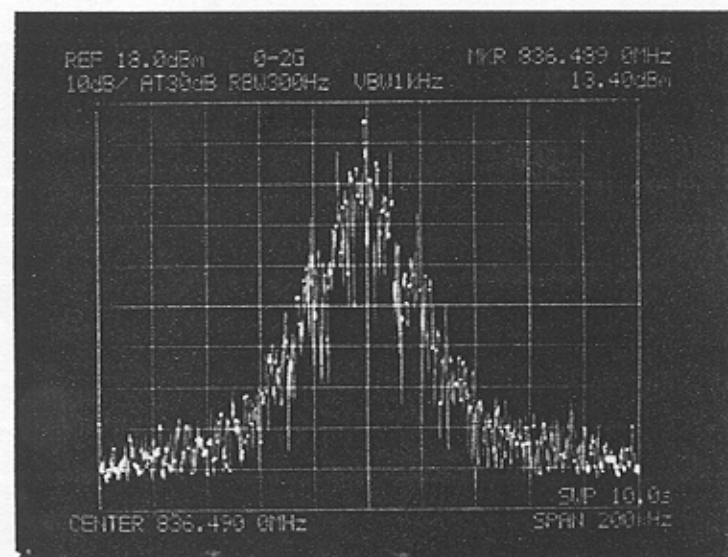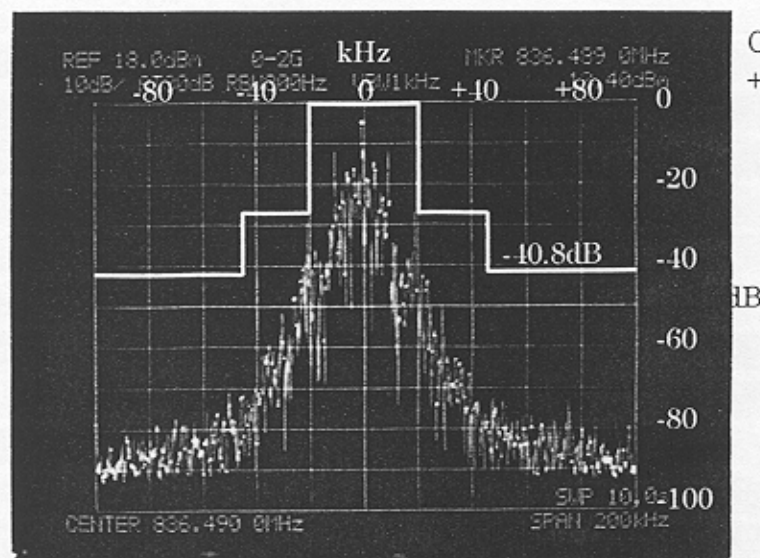

MODULATION: SIGNALING TONE (ST)



Horizontal Scale: 20kHz/Div

Vertical Scale: 10dB/Div (Attenuation)

Bandwidth: 300Hz

Deviation: +/-8kHz

Signal: ST (10kHz)

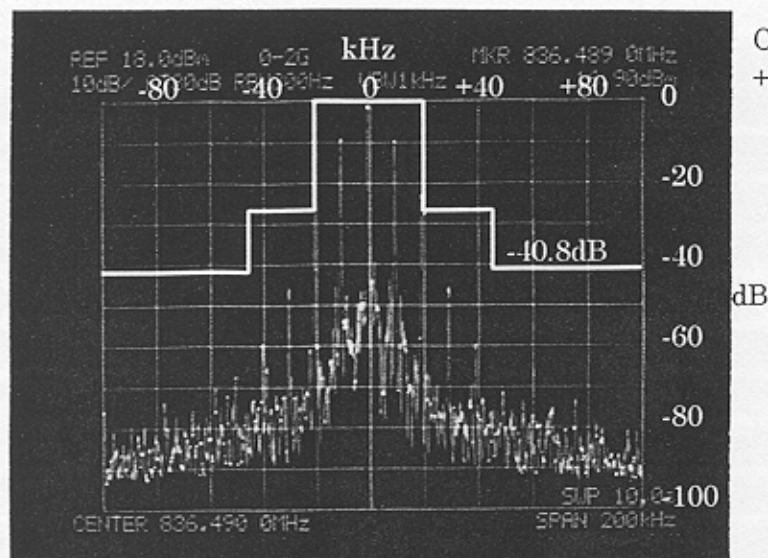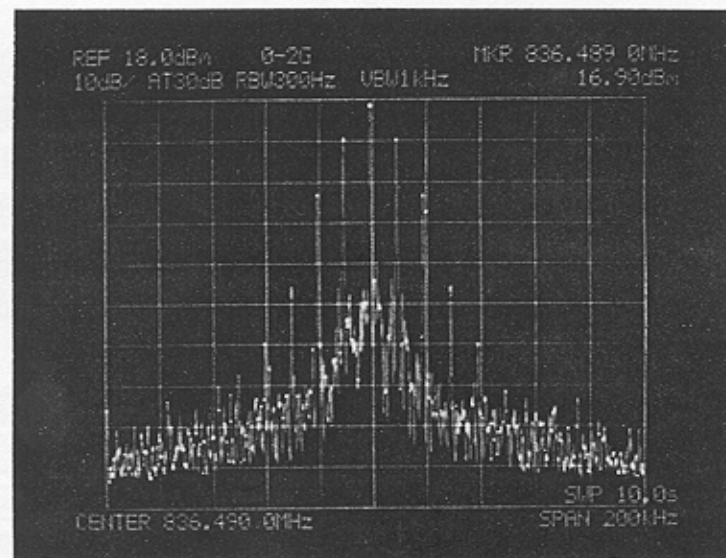Carrier Reference Level
+27.0dBm (0.5watts)

MODULATION: SAT + ST



Horizontal Scale: 20kHz/Div

Vertical Scale: 10dB/Div (Attenuation)

Bandwidth: 300Hz

Deviation: +/-8kHz

Signal: SAT (6kHz), ST (10kHz)

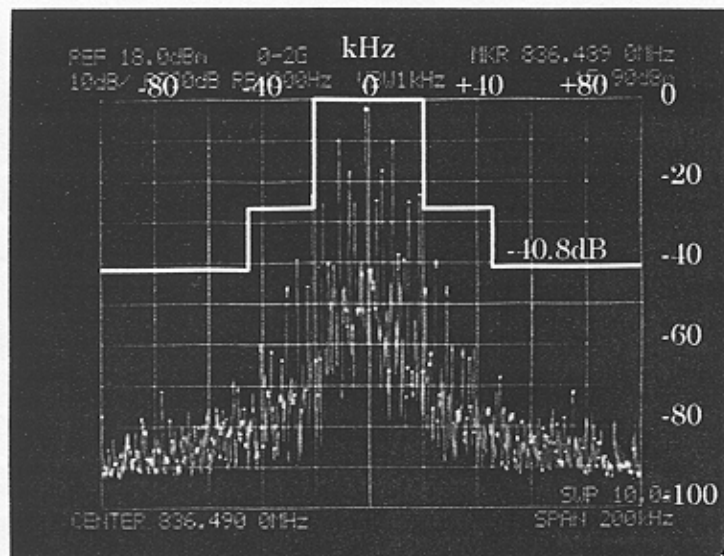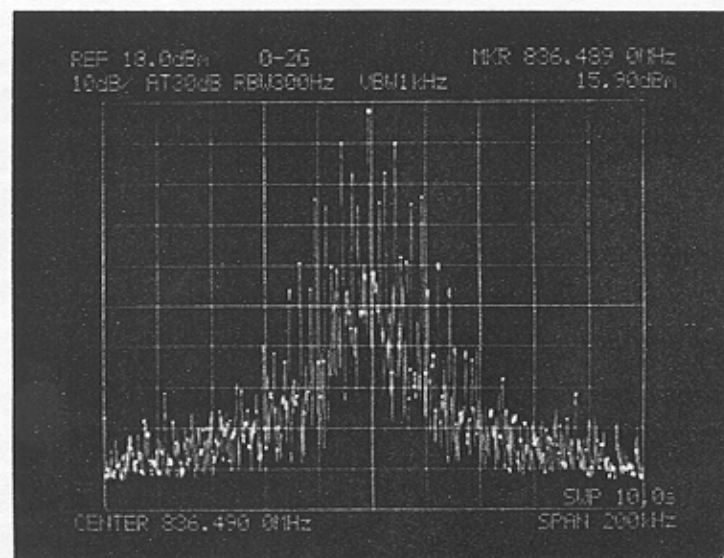Carrier Reference Level
+27.0dBm (0.5watts)


MODULATION: DIGITAL

Horizontal Scale: 1MHz/Div

Vertical Scale: 10dB/Div (Attenuation)

Bandwidth: 1kHz

Signal: Pseudo random data

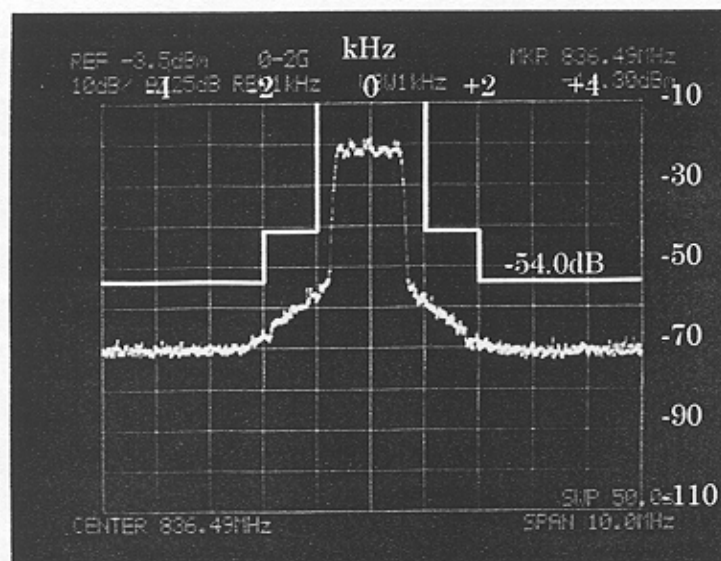

Carrier Reference Level
+24.8dBm(0.3watts)

