
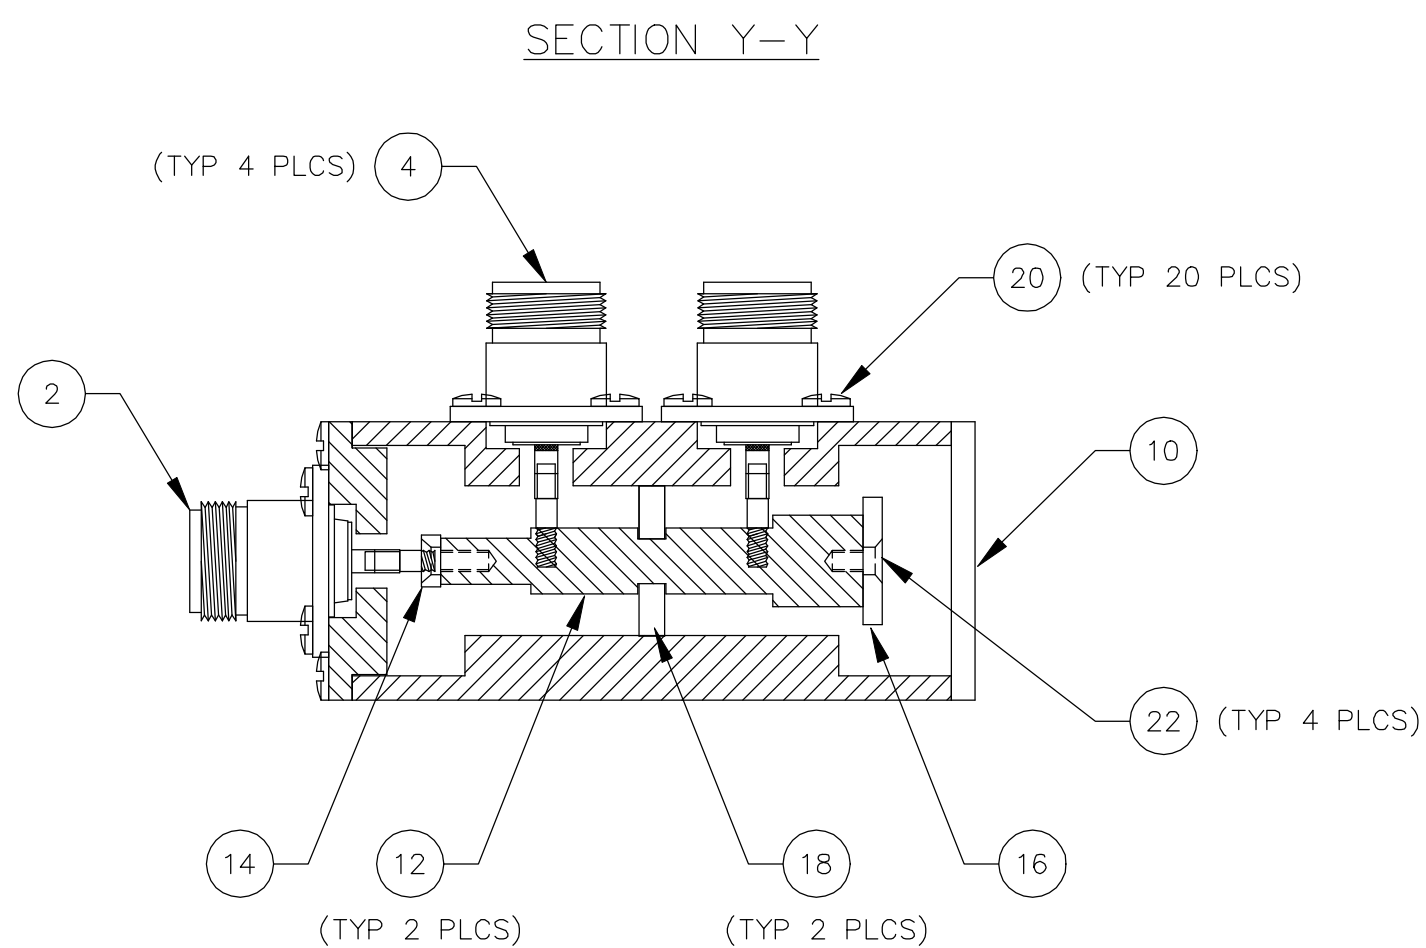
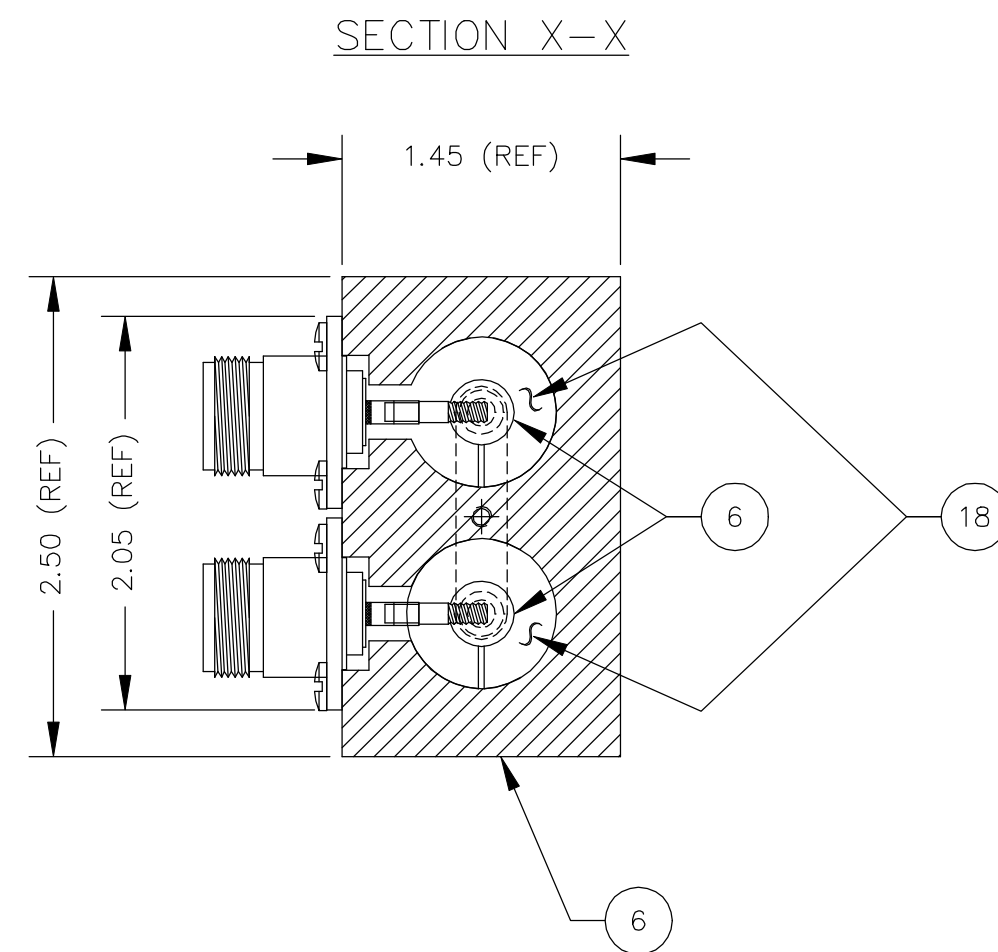


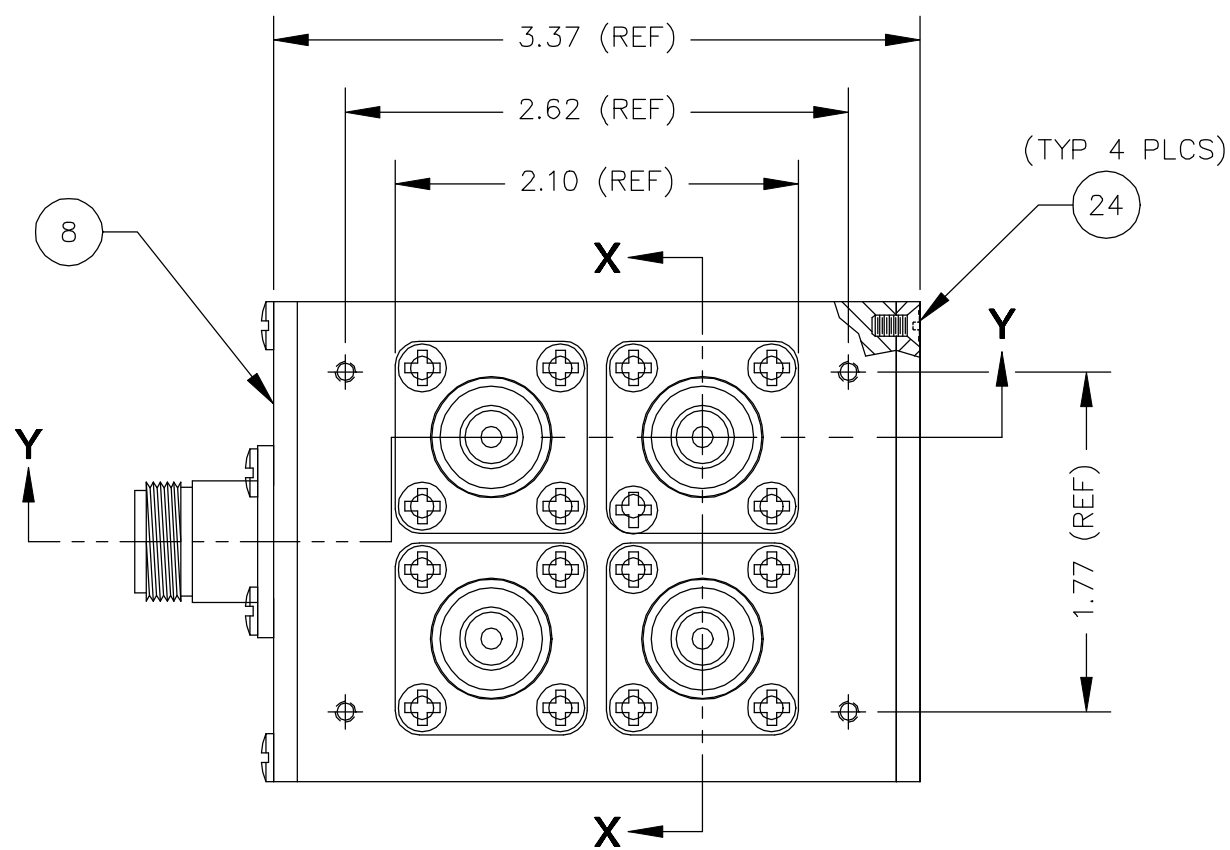

NOTE:
1. SEPARATE PIN FROM 82-97 CONNECTOR BEFORE ASSEMBLY. ATTACH PINS TO CENTER CONDUCTOR USING PLIERS. PINS MUST BE FULLY SEATED AND TIGHT. REPLACE 82-97 CONNECTORS OVER PINS. PUSH WITH A CLOCKWISE MOTION. A GAP OF .150" TO .170" MUST BE MAINTAINED FROM END OF PIN TO END OF CONNECTOR.

REMOVED CUTOUT VIEW AT TOP VIEW. ADDED ITEM 24 BALLOON (F.H. SCREWS). ADDED H-REF DIMS 2.62 & 2.10. ADDED V-REF DIMS 1.77 & 2.05. (SAK)

A0 20002342 3/31/99 PWK

2.50 DIM WAS 2.45. 3.37 DIM WAS 3.36. DELETED NOTE 2. (RFB)

				ADCTelecommunications				1		9399		4/18/98		SEB							
								REV		ECO		DATE		APV							
ALL DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.				APV		THIS PRINT IS THE PROPERTY OF ADC, IT SHALL NOT BE COPIED WITHOUT PERMISSION.				TITLE A/D, 2 WAY COMBINER/SPLITTER 2.5-2.7 GHz											
TOLERANCES UNLESS OTHERWISE NOTED.				DATE		MATERIAL															
.XX ±.02 FRAC ±1/64				ECO		-----				DWN		SAK		1/27/98		DWG. NO.		REV			
.XX ±.005 ANG ±0° 30'				REV		FINISH				CHK		SEB		2/16/98		2111-5008		A0			
BREAK ALL SHARP EDGES DO NOT SCALE DRAWING						-----				REL		SEB		2/16/98		C		SCALE 1=1		SHEET 1 OF 1	