

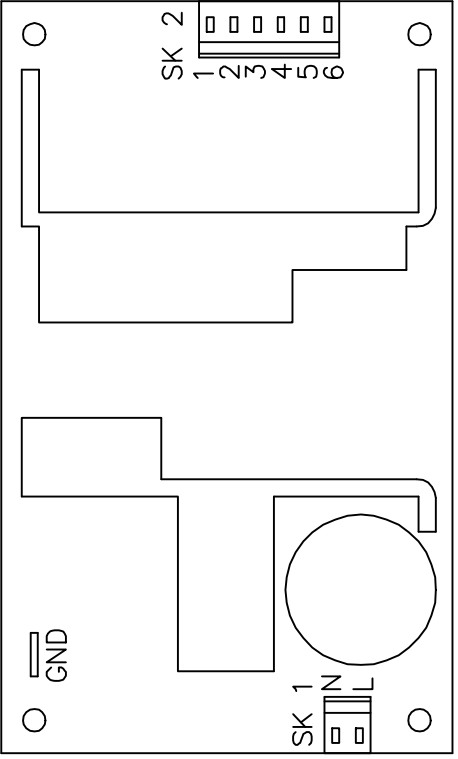


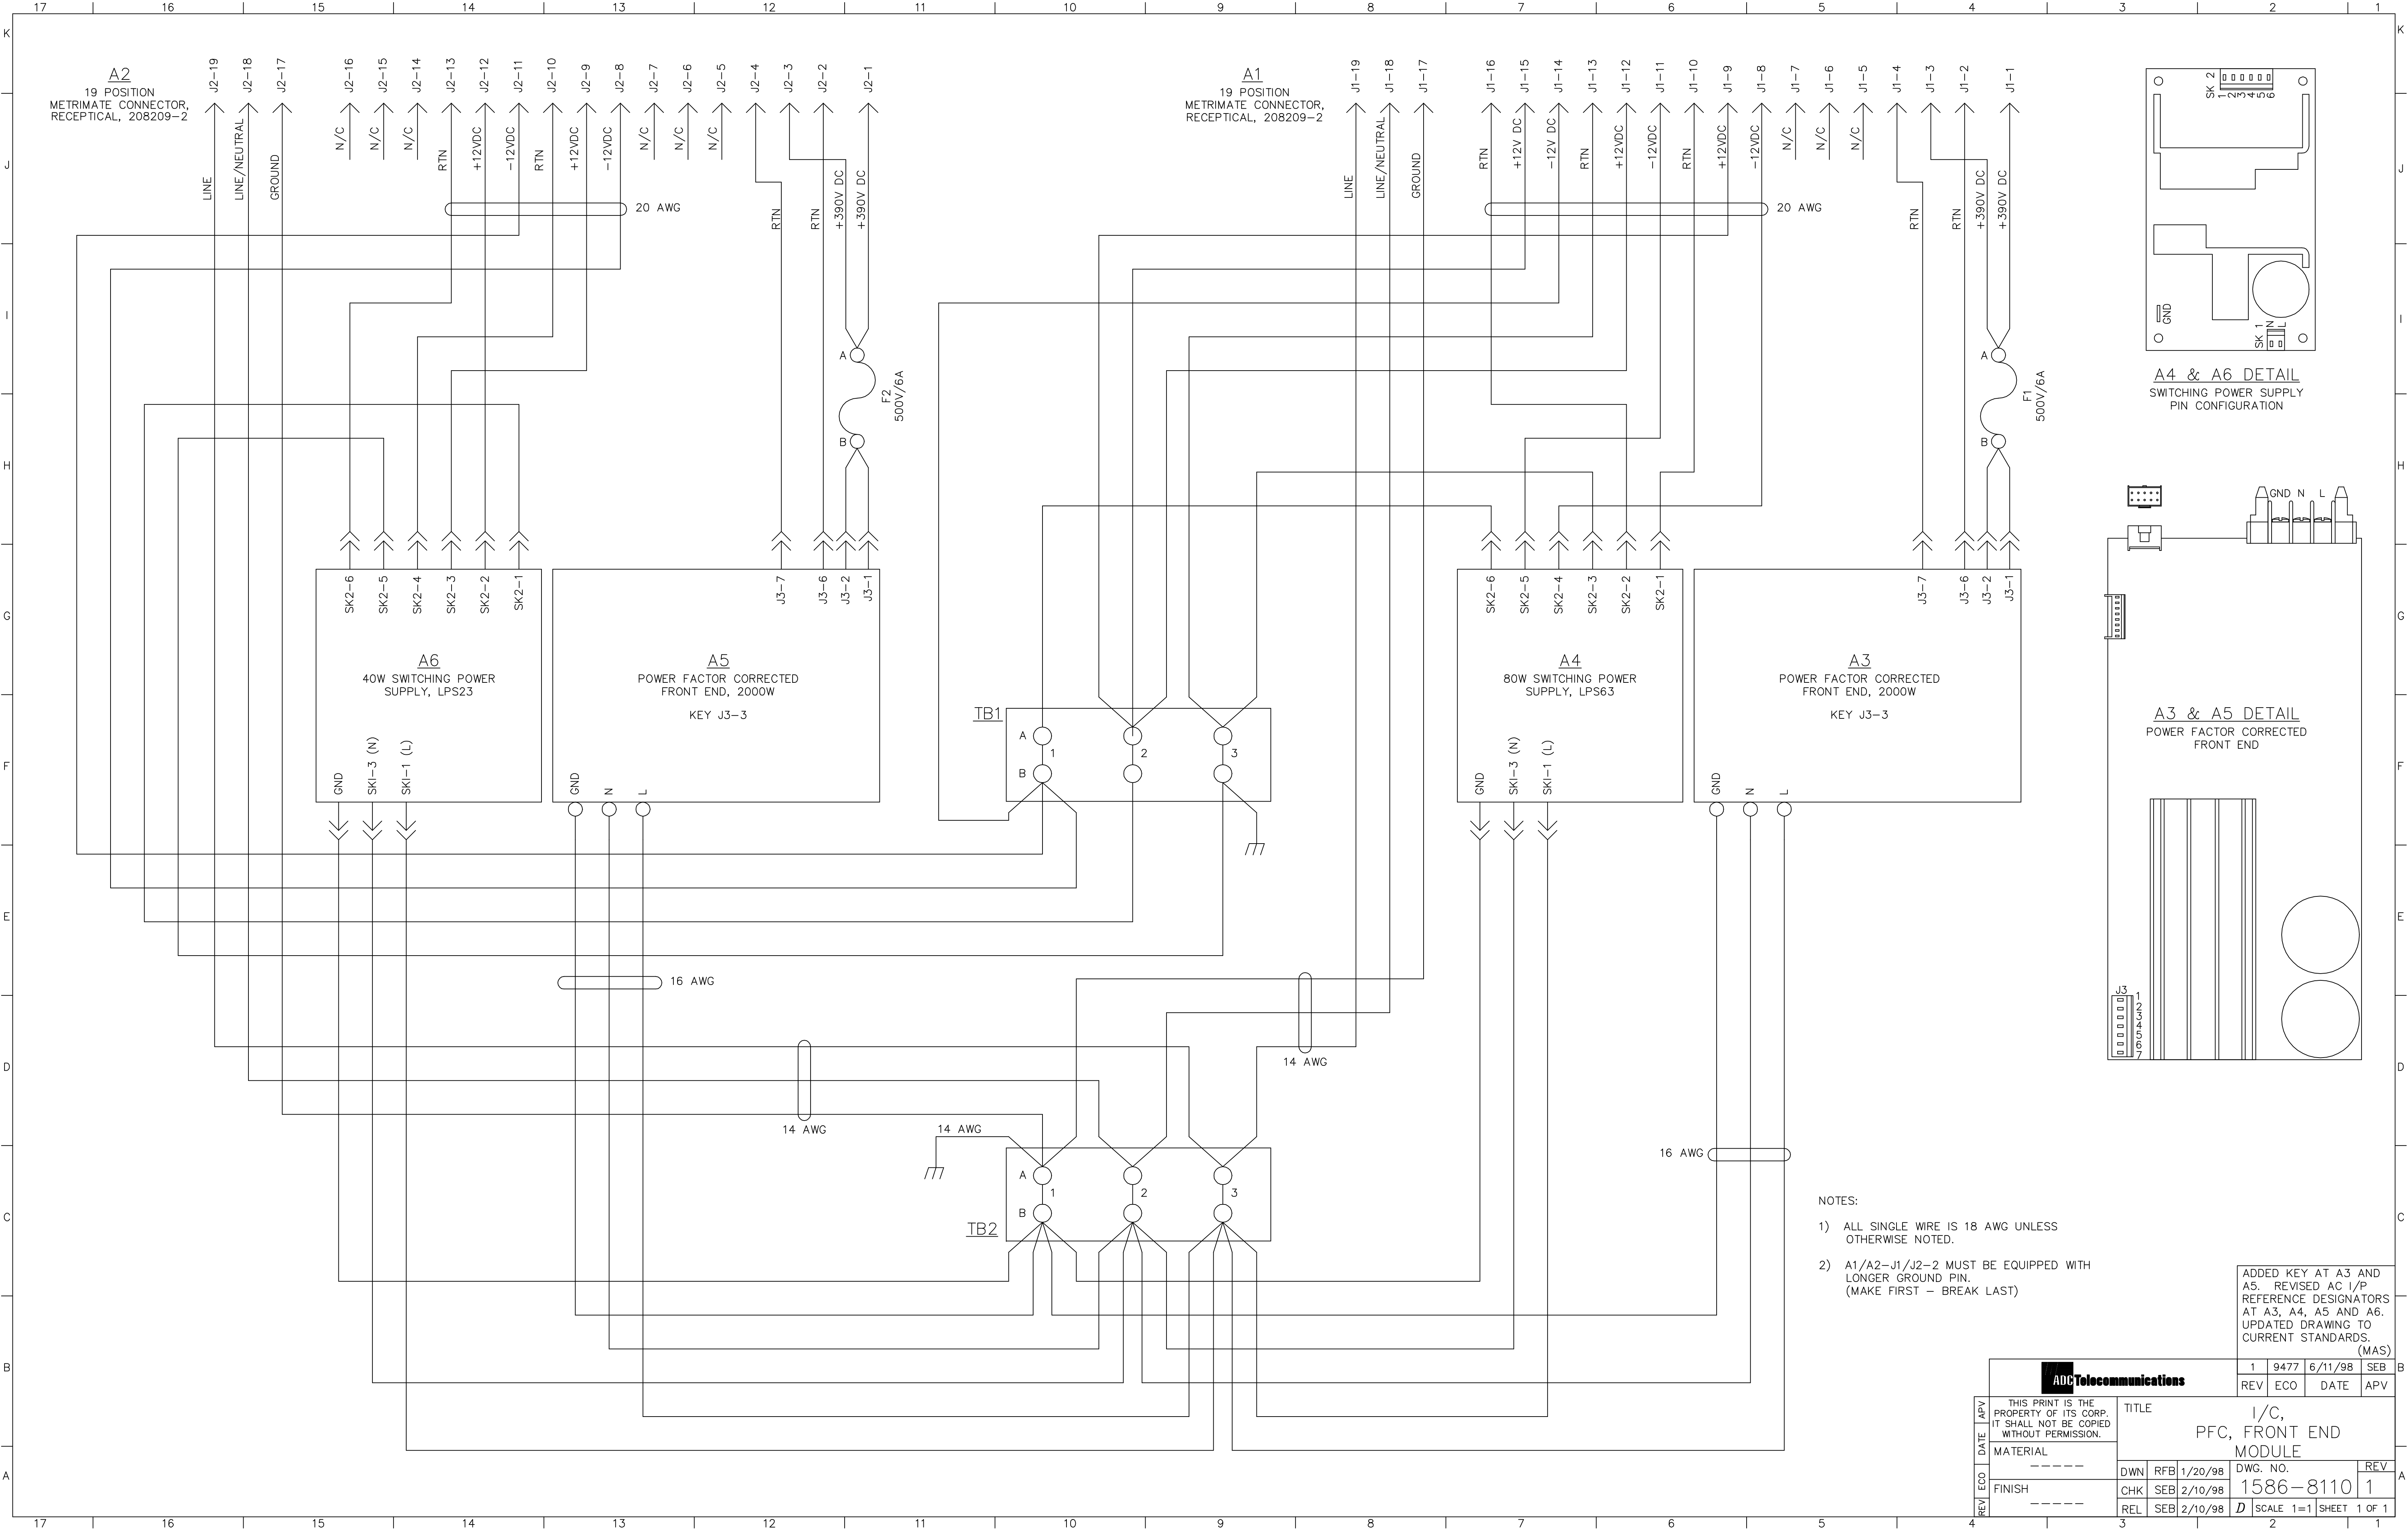

A4 & A6 DETAIL
SWITCHING POWER SUPPLY
PIN CONFIGURATION

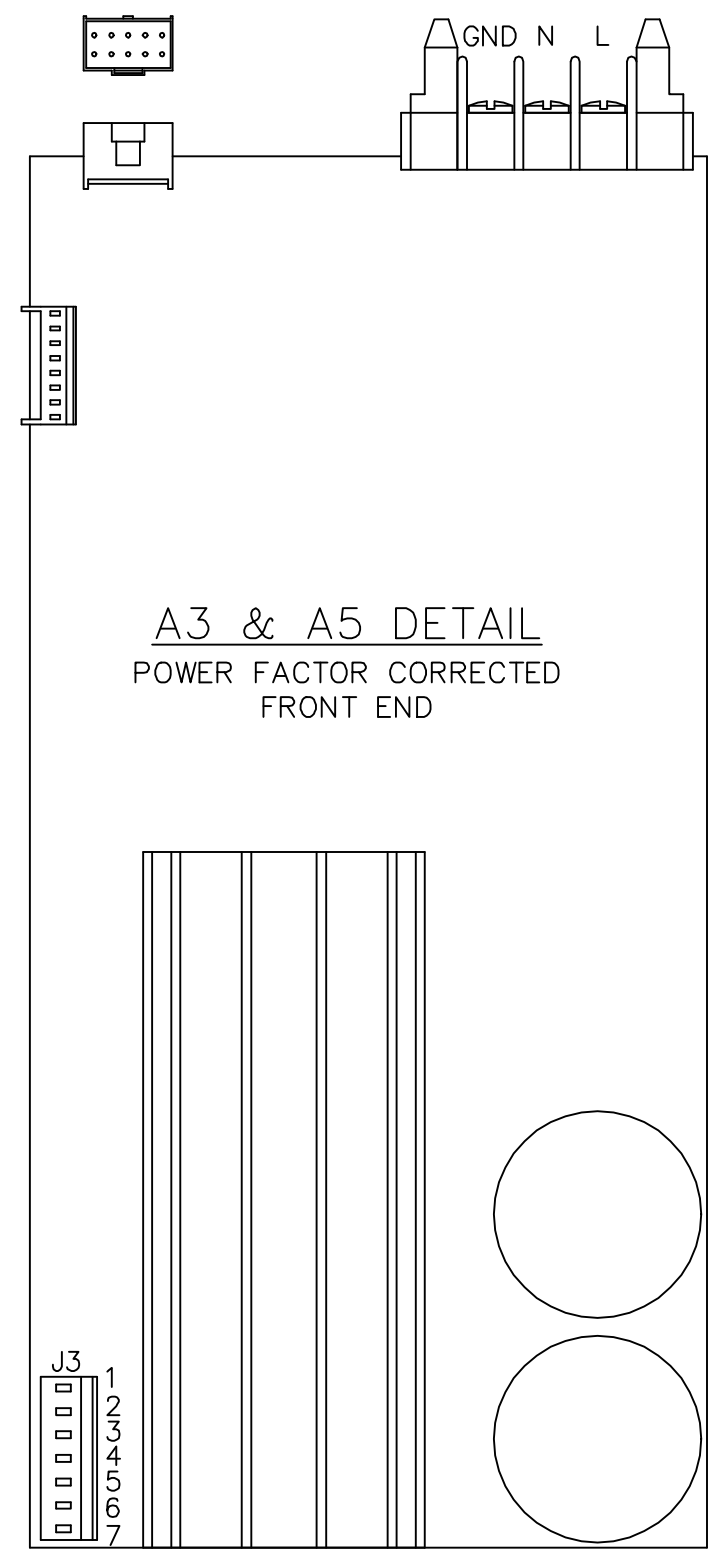

A3 & A5 DETAIL
POWER FACTOR CORRECTED
FRONT END

- NOTES:
- 1) ALL SINGLE WIRE IS 18 AWG UNLESS OTHERWISE NOTED.
 - 2) A1/A2-J1/J2-2 MUST BE EQUIPPED WITH LONGER GROUND PIN.
(MAKE FIRST - BREAK LAST)

YOU ARE EQUIPPED WITH (LAST)			ADDED KEY AT A3 AND A5. REVISED AC I/P REFERENCE DESIGNATORS AT A3, A4, A5 AND A6. UPDATED DRAWING TO CURRENT STANDARDS. (MAS)			
			1	9477	6/11/98	SEB
ADCTelecommunications			REV	ECO	DATE	APV
APV	THIS PRINT IS THE PROPERTY OF ITS CORP. IT SHALL NOT BE COPIED WITHOUT PERMISSION.		TITLE I/C, PFC, FRONT END MODULE			
DATE						
MATERIAL	-----		DWN RFB 1/20/98 DWG. NO.			
FINISH	-----		CHK SEB 2/10/98 1586-8110 1			
REV	ECO	-----	REL SEB 2/10/98 D SCALE 1=1 SHEET 1 OF 1			