

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

All

Operating Modes Investigated:

Typical frequency hopping mode.

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Software\Firmware Applied During Test

Exercise software	Standard Production Software	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing.			

Equipment Modifications

No EMI suppression devices were added or modified. The EUT was tested as delivered.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
Host System	SpaceLabs Medical	90310-1A	PAR327-1
EUT	Proxim	6330	A30549980020A6386465
Ethernet Board	SpaceLabs Medical	670-0829-00	N3112-95B-040
Power Supply	SpaceLabs Medical	90486	486-101522

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	1.8	No	Power Supply	AC Mains
DC Power	Yes	.96	Yes	Power Supply	Host System

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment


Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	03/08/2001	12 mo

Test Description

Requirement: Per 47 CFR 15.247(a)(1), the hopping channel carrier frequencies must be separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel. The measurement is made with the spectrum analyzer's resolution bandwidth set to greater than or equal to 1% of the span, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The carrier frequency separation was measured between each of 5 hopping channels in the middle of the authorized band. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The hopping function of the EUT was enabled.

Completed by:



EMISSIONS DATA SHEET

Rev BETA
01/30/01

EUT:	6330	Work Order:	SPAC0264
Serial Number:	A30549980020A6386465	Date:	07/11/01
Customer:	SpaceLabs	Temperature:	23 degrees C
Attendees:	N/A	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	N/A
		Job Site:	EV06
		Humidity:	38% RH

TEST SPECIFICATIONS

Specification:	47 CFR 15.247(a)(1)	Year:	Most Current	Method:	DA 00-705, ANSI C63.4	Year:	1992
----------------	---------------------	-------	--------------	---------	-----------------------	-------	------

SAMPLE CALCULATIONS

EXAMPLE CALCULATIONS

COMMENTS

COMMENTS	

EUT OPERATING MODES

Modulated by PRBS at maximum data rate. Hopping carrier.

DEVIATIONS FROM TEST STANDARD

DEVIATIONS FROM TEST STANDARD
None

REQUIREMENTS

The hopping channel carrier frequencies shall be separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

RESULTS

RESULTS	CHANNEL SPACING
Pass	1000kHz


SIGNATURE

SIGNATURE

Tested By:

DESCRIPTION OF TEST

Channel Spacing

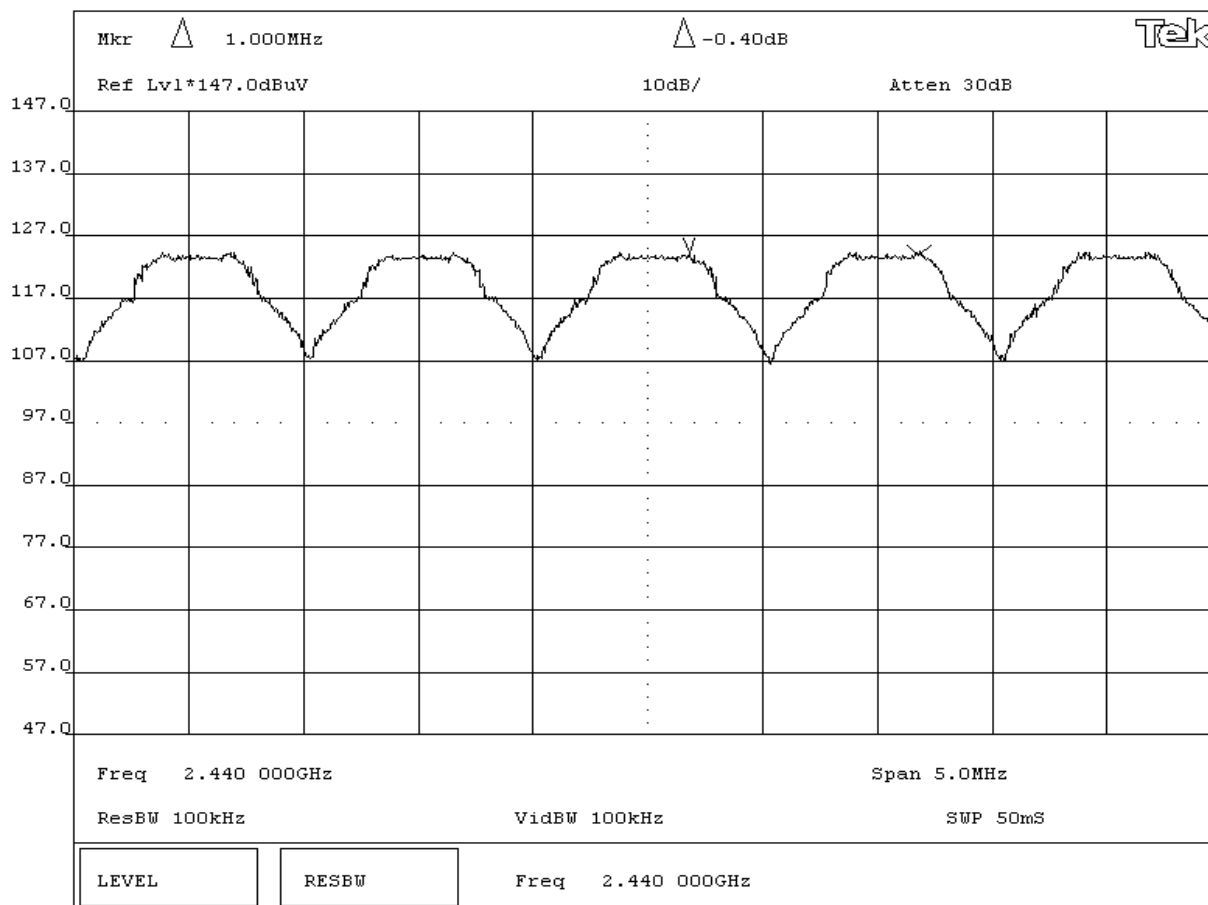

KNOB 2

KNOB 1

KEYPAD

Tektronix

2784