
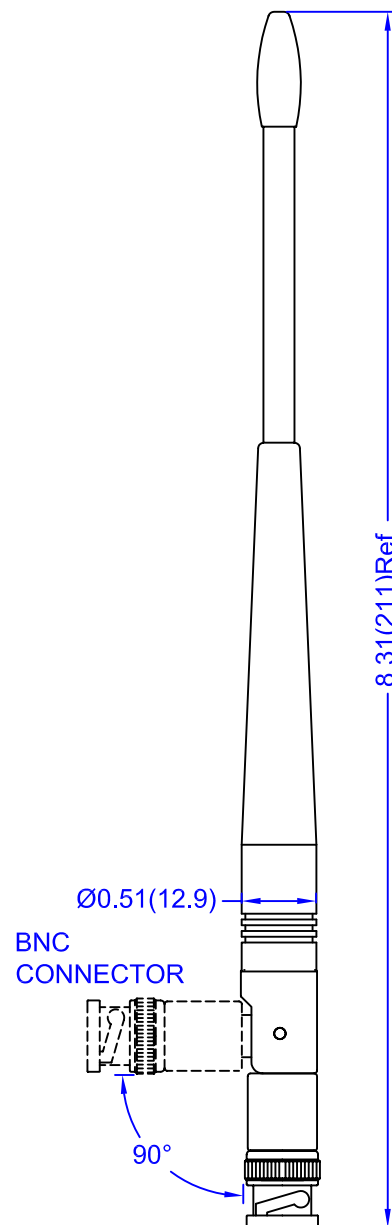
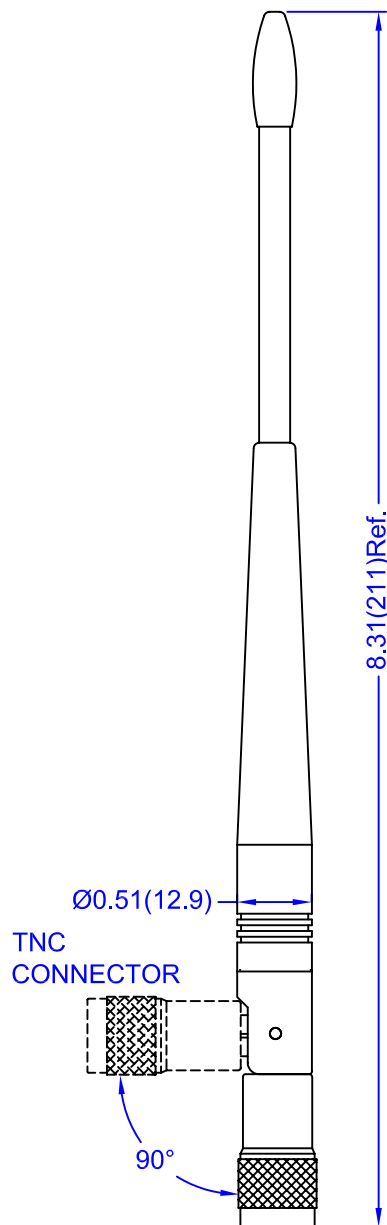


S467TR-915S

Specification:

Package	Bulk
Product Status	Active
RF Family/Standard	-
Frequency Group	UHF (300MHz ~ 1GHz)
Frequency (Center/Band)	900MHz
Frequency Range	902MHz ~ 928MHz
Antenna Type	Whip, Tilt
Number of Bands	1
VSWR	2
Return Loss	-
Gain	2dBi
Features	-
Termination	SMA
Ingress Protection	-
Mounting Type	Connector Mount
Height (Max)	8.248" (209.50mm)
Applications	General Purpose
Base Product Number	S467AM

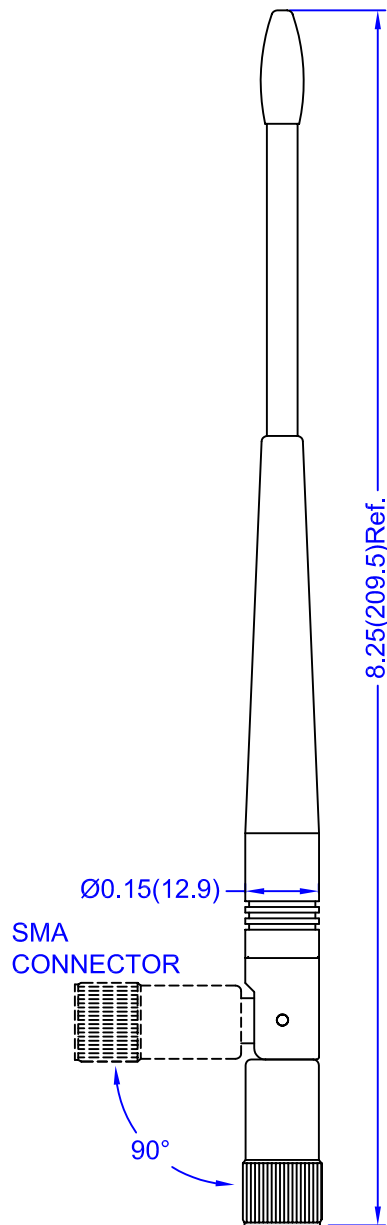

Electrical Properties:

Frequency Range:	902~928 MHz
Impedance:	50Ω nominal
VSWR:	<2.0:1
Gain:	*2.0 dBi
Radiation:	Omni
Polarization:	Vertical
Wave:	Half Wave Dipole

Mechanical Properties:

Material:	Polyurethane(Black)
Whip:	Brass with black chrome plating
Connector:	
Operation Temp.:	-20°C to +65°C
Storage Temp.:	-30°C to +75°C

TITLE	900 MHz ISM Band Swivel Antenna - 467 model		DATE	SHEET
			011305	1 of 2
UNIT	DWG. NO.	S467XX - 915S		
in.(mm)				
SCALE				
none				



SMA Plug
(AM)



TNC Plug
(TC)



BNC Plug
(BC)



SMA Plug Reverse Polarity
(AH)



TNC Plug Reverse Polarity
(TR)



BNC Plug Reverse Polarity
(BR)

Connector Type

Connector Code -XX-	Description	P / N
AM	SMA Plug	S467AM-915S
AH	SMA Plug Reverse Polarity	S467AH-915S
TC	TNC Plug	S467TC-915S
TR	TNC Plug Reverse Polarity	S467TR-915S
BC	BNC Plug	S467BC-915S
BR	BNC Plug Reverse Polarity	S467BR-915S

TITLE	900 MHz ISM Band Swivel Antenna - 467 model		DATE	SHEET
			011305	2 of 2
UNIT	DWG. NO.	S467XX - 915S		
in.(mm)				
SCALE				
none				