

ENGINEERING STATEMENT

In Connection With

CATTRON-THEIMEG, INC.

Model No. PS CONTROLLER

FCC ID: CN2PS

Hyak Laboratories, Inc. has been retained to perform radiated and conducted spurious measurements on the PS Controller transmitter in accordance with Section 15.231 of the FCC rules.

I am an Electronics Engineer, a principal in the firm of Hyak Laboratories, Inc., Springfield, Virginia. My education and experience are a matter of record with the Federal Communications Commission, having submitted numerous applications for equipment authorization.

All tests were made by me or under my supervision in accordance with the rules and regulations of the Federal Communications Commission.

Rowland S. Johnson

Dated: March 7, 2001

A. INTRODUCTION

Hyak Laboratories Inc. has been authorized by Cattron-Theimeg Inc., to perform measurements on the PS Controller transmitter to determine compliance with FCC Rules, Subpart C, Para. 15.231(a).

The PS Controller is a low powered, battery operated transmitter designed for industrial remote control systems. It operates on a single-channel in the 447 - 473 MHz band. The transmitter, constructed on an etched circuit card, is powered from an internal battery. An internal antenna is used.

Data are presented for units with internal antenna at operating frequencies of 447.000, 457.000 and 472.9875 MHz.

The device meets the provisions of Para. 15.231(a)(4) since it is only activated when a control button is activated. Transmission stops immediately when the control is released.

B. DESCRIPTION OF MEASUREMENT FACILITIES

A description of the Hyak Laboratories Inc. radiation test facility is a matter of record with the FCC. The facility was accepted for radiation measurements on October 1, 1976, and is currently listed as an acceptable site.

C. DESCRIPTION OF MEASUREMENT PROCEDURE: RADIATED MEASUREMENTS

Measurements of transmitter radiation field strength were made using ANSI 63.4 (1992) as the test procedure. Measurements were made with 3 meter spacing between the transmitter under test and the test equipment antenna.

The transmitter under test was placed on a rotatable table approximately one meter in height.

The power supply was a fresh set of batteries.

Measurement of field strength was made through use of a HP 8596E or Tek 494P spectrum analyzer in conjunction with a HP 8447D and Avantek wide band, low noise preamplifiers.

Singer DM-105A series calibrated dipoles were used as the test antennas in the 30-1000 MHz range. An Emco 3115 calibrated horn antenna was used between 1 and 5 GHz.

An analysis of time domain measurements (see plot in Figure 1,) was made to determine average field intensity of the emissions. Sample calculations are included in Figure 2.

C. DESCRIPTION OF MEASUREMENT PROCEDURE: RADIATED MEASUREMENTS
(Continued)

Based on time domain observations, and using the procedures of Figure 2, a correction factor for a nominal 100 mS averaging interval was computed, and is included in the data.

Data for radiated emissions in Tables 1a through 1c includes this correction factor. For emissions that fell in forbidden bands below 1 GHz the CISPR quasi-peak detector was used.

Below 1 GHz, a 100 kHz RBW with 100 kHz VBW was used; above 1 GHz a 1 MHz RBW was used which was reduced to 100 kHz when a CW signal was confirmed. Above 3 GHz, measurements were made at 1 meter spacing extrapolated to 3 meters.

For each spurious emission identified between 30 to the tenth harmonic the test assembly was rotated for maximum pickup, the test antenna varied in elevation and the test antenna polarization shifted between horizontal to vertical in order to maximize observed signals.


The measurement procedure included recording the worst-case field strength for receiving antenna polarization, test antenna height variation from 3 feet to 10 feet and test sample rotation.

The spectrum was checked from 30 MHz to the tenth harmonic. All emissions not reported were more than 20 dB below the permitted level or below FCC limits but in the ambient/system noise floor. Tabulation of the measurements are shown in Tables 1a, 1b and 1c.

Specific forbidden band scans were made per Paragraph 15.205.

D. REPORT OF RADIATED MEASUREMENTS

Tables 1a through 1c list the frequency and amplitude of all signals observed from 30 MHz to the tenth harmonic that were within 20 dB of the limits of FCC Rules. The averaging factor is included as noted.

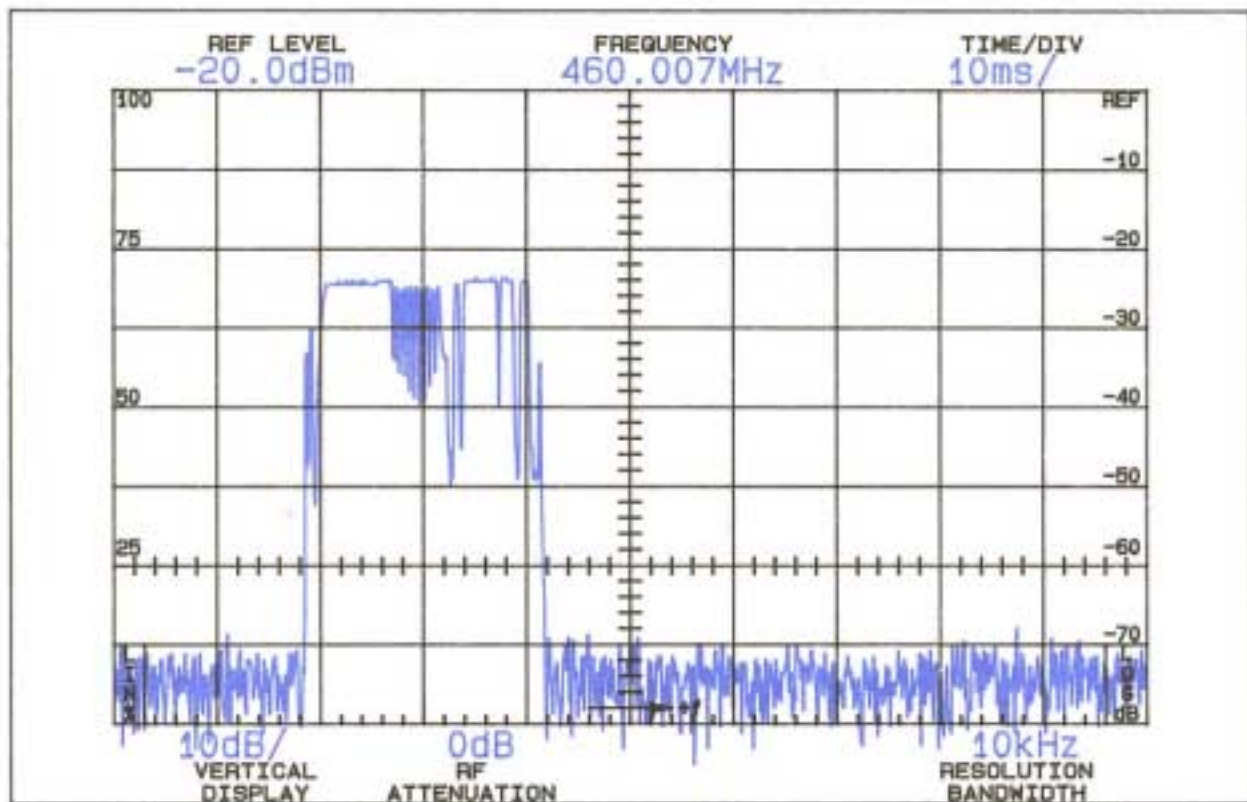

SINGLE WORD TRANSMISSION

Horizontal: 10 milliseconds/Div.
 Vertical: 10 dB/Div.
 Resolution: 10 kHz

(Time domain)

PULSE CHARACTERISTICS
 FCC ID: CN2PS

FIGURE 1

SAMPLE COMPUTATIONS

Using the time domain plots of Figure 1 maximum "on" time over any 100 mS interval is:

"On" 24 mS

Duty Cycle: $(24/100) = 0.24$

$20 \text{ Log}_{10} 0.24 = -12 \text{ dB}$

SAMPLE COMPUTATIONS
FCC ID: CN2PS

FIGURE 2

TABLE 1a

RADIATED FIELD INTENSITY
Measured at 3 meters
15.231(b)

<u>Frequency</u> <u>_MHz)</u>	<u>Meter¹</u> <u>Reading</u> <u>(dBm)</u>	<u>Antenna</u> <u>Factor</u> <u>(dB)</u>	<u>Field²</u> <u>Intensity</u> <u>uV/m @ 3m</u>	<u>Calc. Field³</u> <u>Intensity</u> <u>uV/m @ 3m</u>	<u>FCC Limit</u> <u>uV/m @ 3m</u>	<u>dB to</u> <u>Limit</u>
447.000	-41.2	25.2	35481.3	8912.5	11541.7	- 2.2
894.000	-107.6	32.0	37.2	9.3	1154.2	-41.8
1341.000	-106.0	25.3	20.7	5.2	500.0*	-39.7
1788.000	-106.4	27.2	24.5	6.2	1154.2*	-45.5
2235.000	-100.4	28.9	59.6	15.0	500.0*	-30.5
2682.000	-97.2	30.0	97.7	24.5	500.0*	-26.2
3129.000	-100.0	31.2	81.3	20.4	1154.2	-35.0
3576.000	-101.6	32.5	78.5	19.7	1154.2	-35.3
4023.000	-102.4	33.7	82.2	20.6	500.0*	-27.7
4470.000	-103.2	32.9	68.4	17.2	1154.2	-36.5

Note 1: Peak detector reading without averaging.

Note 2: $\text{uV/m} = \text{Log}^{-\frac{1\text{dBu/m}}{20}}$

$\text{dBu} = \text{dBm} + \text{antenna factor} + 107$

Note 3: Field Intensity calculated from peak value and -12 dB peak/average factor.

*Forbidden Band

All other emissions to the tenth harmonic were below FCC limits.

(Unit was measured on 3 major planes)

RBW 100 kHz < 1 GHz; 1 MHz > 1 GHz; VBW 100 kHz.

RADIATED FIELD INTENSITY
FCC ID: CN2PS

TABLE 1a (447.000 MHz)

TABLE 1b
RADIATED FIELD INTENSITY
Measured at 3 meters
15.231b

Frequency (MHz)	Meter ¹ Reading (dBm)	Antenna Factor (dB)	Field ² Intensity uV/m @ 3m	Calc. Field ³ Intensity uV/m @ 3m	FCC Limit uV/m @ 3m	dB to Limit
460.000	-39.6	25.4	43651.6	10964.5	12083.3	- 0.8
920.000	-105.6	32.3	48.4	12.2	1208.3	-39.9
1380.000	-107.2	25.4	18.2	4.6	500.0*	-40.8
1840.000	-103.2	27.5	36.7	9.2	1208.3	-42.4
2300.000	-101.2	29.1	55.6	14.0	500.0*	-31.1
2760.000	-101.2	30.2	63.1	15.9	500.0*	-30.0
3220.000	-101.2	31.5	73.3	18.4	1208.3	-36.3
3680.000	-100.8	32.8	89.1	22.4	500.0*	-27.0
4140.000	-101.6	33.4	87.1	21.9	500.0*	-27.2
4600.000	-100.8	33.2	93.3	23.4	500.0*	-26.6

Note 1: Peak detector reading without averaging.

Note 2: $\text{uV/m} = \text{Log}^{-1} \frac{\text{dBu/m}}{20}$

dBu = dBm + antenna factor + 107

Note 3: Field Intensity calculated from peak value and -12 dB peak/average factor.

*Forbidden Band

All other emissions to the tenth harmonic were below FCC limits.

(Unit was measured on 3 major planes)

RBW 100 kHz < 1 GHz; 1 MHz > 1 GHz; VBW 100 kHz.

RADIATED FIELD INTENSITY
FCC ID: CN2PS

TABLE 1b (460.000 MHz)

TABLE 1c
RADIATED FIELD INTENSITY
Measured at 3 meters
15.231(b)

Frequency (MHz)	Meter ¹ Reading (dBm)	Antenna Factor (dB)	Field ² Intensity uV/m @ 3m	Calc. Field ³ Intensity uV/m @ 3m	FCC Limit uV/m @ 3m	dB to Limit
472.988	-46.4	25.7	20653.8	5188.0	12500	- 7.6
945.975	-106.0	32.6	47.9	12.0	1250	-40.3
1418.963	-106.8	25.5	19.3	4.8	500*	-40.3
1891.950	-100.8	27.7	49.5	12.4	1250	-40.0
2364.938	- 99.2	29.2	70.8	17.8	500*	-29.0
2837.925	-100.4	30.4	70.8	17.8	500*	-29.0
3310.913	-100.8	31.7	78.5	19.7	1250	-36.0
3783.900	-101.2	33.1	88.1	22.1	500*	-27.1
4256.888	-102.4	33.2	77.6	19.5	500*	-28.2
4729.875	-100.4	33.7	103.5	26.0	500*	-25.7

Note 1: Peak detector reading without averaging.

Note 2: $\text{uV/m} = \text{Log}^{-\frac{1\text{dBu/m}}{20}}$

dBu = dBm + antenna factor + 107

Note 3: Field Intensity calculated from peak value and -12 dB peak/average factor.

*Forbidden Band

All other emissions to the tenth harmonic were below FCC limits.

(Unit was measured on 3 major planes)

RBW 100 kHz < 1 GHz; 1 MHz > 1 GHz; VBW 100 kHz.

RADIATED FIELD INTENSITY
FCC ID: CN2PS

TABLE 1c (472.9875 MHz)

D. FORBIDDEN BAND MEASUREMENTS

Any spurious signals from the transmitter that fell in a forbidden band are identified in Table 1. All forbidden bands, per Paragraph 15.205, from 30 MHz to the tenth harmonic were searched and any applicable emissions above noise or interference levels are shown in Tables 1a through 1c.


E. OCCUPIED BANDWIDTH

Plots of occupied bandwidth are shown in Figures 3a, 3b and 3c. The device meets bandwidth restriction of Paragraph 15.231(c); 20 dB points are less than 10 kHz with worst-case modulation. (Worst-case Limit is 0.25% of 460 MHz or 1.15 MHz).

F. POWER LINE CONDUCTED MEASUREMENTS

AC line conducted spurious measurements were not made since the device does not use the public power supply system.

FIGURE 3a

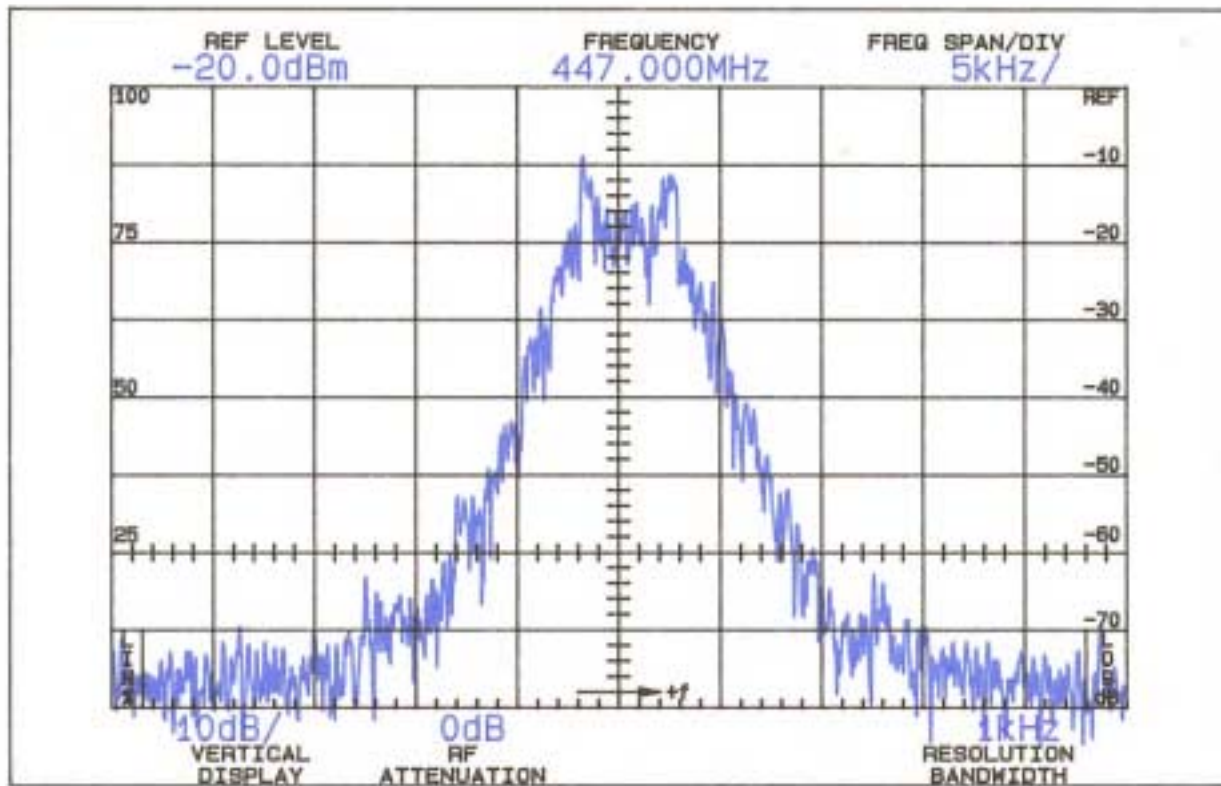

Center Frequency 460 MHz


Horizontal: 5 kHz
Vertical: 10 dB/Div.
Resolution: 1 kHz

No video filtering.

OCCUPIED BANDWIDTH
FCC ID: CN2PS

FIGURE 3a (447.000 MHz)

FIGURE 3b

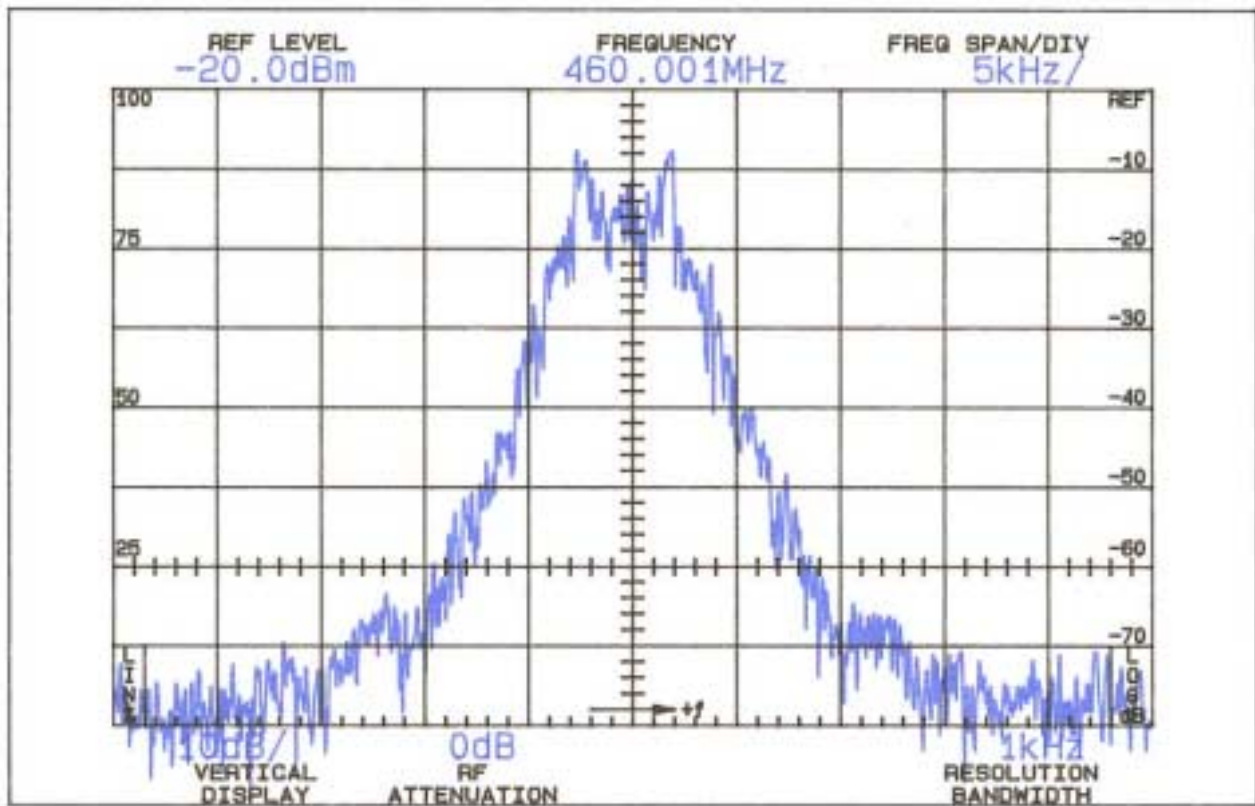

Center Frequency 457 MHz


Horizontal: 5 kHz
Vertical: 10 dB/Div.
Resolution: 1 kHz

No video filtering.

OCCUPIED BANDWIDTH
FCC ID: CN2PS

FIGURE 3b (460.000 MHz)

FIGURE 3c

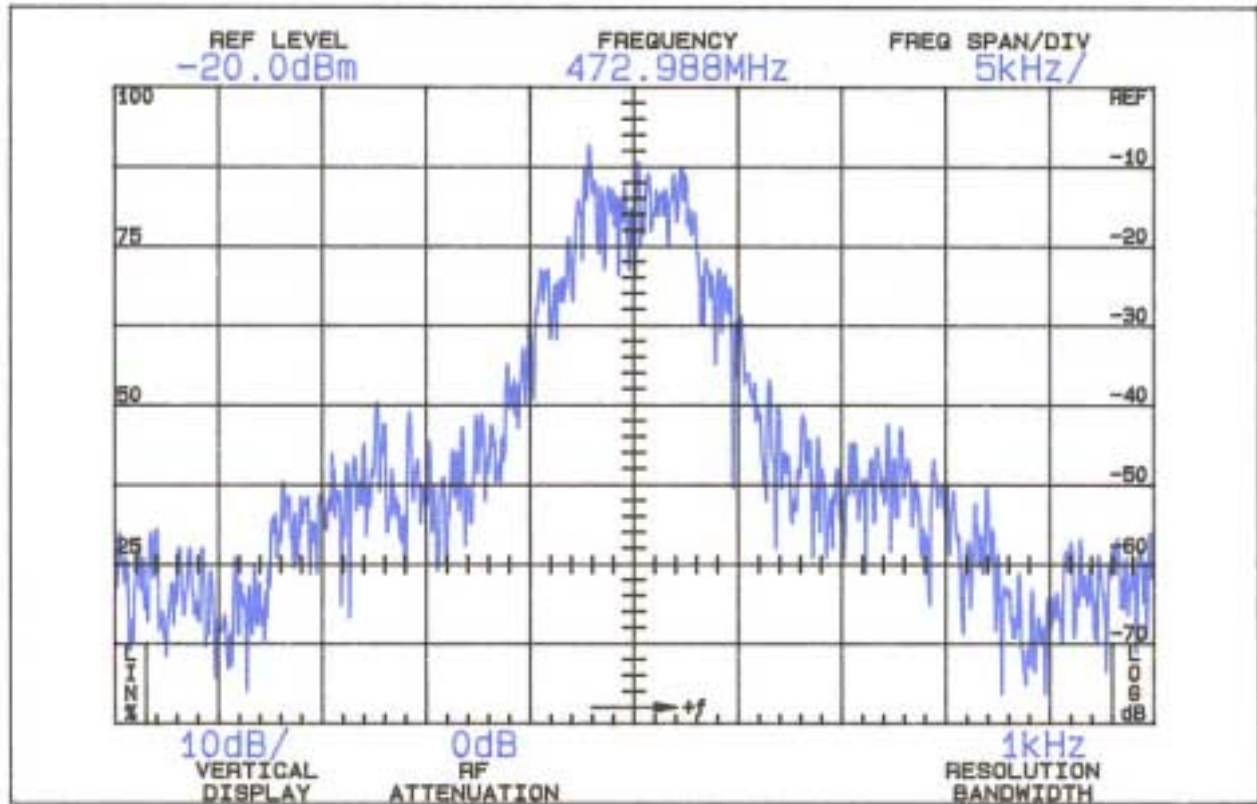

Center Frequency 472.9875 MHz

Horizontal: 5 kHz
Vertical: 10 dB/Div.
Resolution: 1 kHz

No video filtering.

OCCUPIED BANDWIDTH
FCC ID: CN2PS

FIGURE 3c (472.9875 MHz)

