



FCC PART 15.407  
ISED RSS-247, ISSUE 1, MAY 2015  
TEST AND MEASUREMENT REPORT

For

**GoPro, Inc.**

3000 Clearview Way,  
San Mateo, CA 94402, USA

**FCC ID: CNFASST1**  
**IC: 10193A-ASST1**

|                                                                                                                                            |                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                     | <b>Product Type:</b><br>Video Camera |
| <b>Prepared By:</b> Todd Moy<br>Test Engineer          |                                      |
| <b>Report Number:</b> R1605201-407                                                                                                         |                                      |
| <b>Report Date:</b> 2016-08-05                                                                                                             |                                      |
| <b>Reviewed By:</b> Bo Li<br>RF Supervisor            |                                      |
| Bay Area Compliance Laboratories Corp.<br>1274 Anvilwood Avenue,<br>Sunnyvale, CA 94089, USA<br>Tel: (408) 732-9162<br>Fax: (408) 732-9164 |                                      |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\*, NIST, or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*” (Rev. 0)

## TABLE OF CONTENTS

|          |                                                                                            |           |
|----------|--------------------------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>GENERAL DESCRIPTION.....</b>                                                            | <b>6</b>  |
| 1.1      | GENERAL STATEMENTS.....                                                                    | 6         |
| 1.2      | AGENT FOR THE RESPONSIBLE PARTY .....                                                      | 6         |
| 1.3      | RESPONSIBLE PARTY .....                                                                    | 6         |
| 1.4      | PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....                                    | 6         |
| 1.5      | MECHANICAL DESCRIPTION OF EUT .....                                                        | 6         |
| 1.6      | OBJECTIVE.....                                                                             | 7         |
| 1.7      | RELATED SUBMITTAL(S)/GRANT(S) .....                                                        | 7         |
| 1.8      | TEST METHODOLOGY .....                                                                     | 7         |
| 1.9      | MEASUREMENT UNCERTAINTY .....                                                              | 7         |
| 1.10     | TEST FACILITY REGISTRATIONS .....                                                          | 8         |
| 1.11     | TEST FACILITY ACCREDITATIONS.....                                                          | 8         |
| <b>2</b> | <b>EUT TEST CONFIGURATION.....</b>                                                         | <b>11</b> |
| 2.1      | JUSTIFICATION .....                                                                        | 11        |
| 2.2      | EUT EXERCISE SOFTWARE.....                                                                 | 11        |
| 2.3      | DUTY CYCLE CORRECTION FACTOR.....                                                          | 13        |
| 2.4      | EQUIPMENT MODIFICATIONS .....                                                              | 15        |
| 2.5      | LOCAL SUPPORT EQUIPMENT .....                                                              | 15        |
| 2.6      | EUT INTERNAL CONFIGURATION DETAILS.....                                                    | 15        |
| 2.7      | SUPPORT EQUIPMENT .....                                                                    | 15        |
| 2.8      | INTERFACE PORTS AND CABLING .....                                                          | 15        |
| <b>3</b> | <b>SUMMARY OF TEST RESULTS .....</b>                                                       | <b>16</b> |
| <b>4</b> | <b>FCC §2.1093, §15.407(F) &amp; ISED RSS-102 - RF EXPOSURE.....</b>                       | <b>17</b> |
| 4.1      | APPLICABLE STANDARD .....                                                                  | 17        |
| 4.2      | TEST RESULTS .....                                                                         | 17        |
| <b>5</b> | <b>FCC §15.203 &amp; ISED RSS-GEN §8.3 - ANTENNA REQUIREMENTS.....</b>                     | <b>18</b> |
| 5.1      | APPLICABLE STANDARDS .....                                                                 | 18        |
| 5.2      | ANTENNA LIST .....                                                                         | 18        |
| <b>6</b> | <b>FCC §15.207 &amp; IC RSS-GEN §8.8 - AC POWER LINE CONDUCTED EMISSIONS.....</b>          | <b>19</b> |
| 6.1      | APPLICABLE STANDARDS .....                                                                 | 19        |
| 6.2      | TEST SETUP .....                                                                           | 19        |
| 6.3      | TEST PROCEDURE .....                                                                       | 19        |
| 6.4      | TEST SETUP BLOCK DIAGRAM.....                                                              | 20        |
| 6.5      | CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                             | 20        |
| 6.6      | TEST EQUIPMENT LIST AND DETAILS .....                                                      | 21        |
| 6.7      | TEST ENVIRONMENTAL CONDITIONS.....                                                         | 21        |
| 6.8      | SUMMARY OF TEST RESULTS.....                                                               | 21        |
| 6.9      | CONDUCTED EMISSIONS TEST PLOTS AND DATA .....                                              | 22        |
| <b>7</b> | <b>FCC §15.209, §15.407(B) &amp; ISED RSS-247 §6.2 - SPURIOUS RADIATED EMISSIONS .....</b> | <b>24</b> |
| 7.1      | APPLICABLE STANDARD .....                                                                  | 24        |
| 7.2      | TEST SETUP .....                                                                           | 26        |
| 7.3      | TEST PROCEDURE .....                                                                       | 26        |
| 7.4      | CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                             | 26        |
| 7.5      | TEST EQUIPMENT LIST AND DETAILS .....                                                      | 27        |
| 7.6      | TEST ENVIRONMENTAL CONDITIONS.....                                                         | 27        |
| 7.7      | SUMMARY OF TEST RESULTS.....                                                               | 28        |
| 7.8      | RADIATED EMISSIONS TEST RESULT DATA .....                                                  | 28        |

|           |                                                                              |            |
|-----------|------------------------------------------------------------------------------|------------|
| <b>8</b>  | <b>FCC §15.407(E) &amp; ISED RSS-247 §6.2 - EMISSION BANDWIDTH .....</b>     | <b>43</b>  |
| 8.1       | APPLICABLE STANDARDS .....                                                   | 43         |
| 8.2       | MEASUREMENT PROCEDURE .....                                                  | 43         |
| 8.3       | TEST EQUIPMENT LIST AND DETAILS .....                                        | 43         |
| 8.4       | TEST ENVIRONMENTAL CONDITIONS.....                                           | 43         |
| 8.5       | TEST RESULTS .....                                                           | 43         |
| <b>9</b>  | <b>FCC §407(A) &amp; ISED RSS-247 §6.2 - OUTPUT POWER .....</b>              | <b>69</b>  |
| 9.1       | APPLICABLE STANDARDS .....                                                   | 69         |
| 9.2       | MEASUREMENT PROCEDURE .....                                                  | 70         |
| 9.3       | TEST EQUIPMENT LIST AND DETAILS .....                                        | 70         |
| 9.4       | TEST ENVIRONMENTAL CONDITIONS.....                                           | 70         |
| 9.5       | TEST RESULTS .....                                                           | 71         |
| <b>10</b> | <b>FCC §15.407(A) &amp; ISED RSS-247 §6.2 - POWER SPECTRAL DENSITY .....</b> | <b>76</b>  |
| 10.1      | APPLICABLE STANDARDS .....                                                   | 76         |
| 10.2      | MEASUREMENT PROCEDURE .....                                                  | 77         |
| 10.3      | TEST EQUIPMENT LIST AND DETAILS .....                                        | 77         |
| 10.4      | TEST ENVIRONMENTAL CONDITIONS.....                                           | 78         |
| 10.5      | TEST RESULTS .....                                                           | 78         |
| <b>11</b> | <b>§15.407(B) &amp; ISED RSS-247 §6.2 - OUT OF BAND EMISSIONS.....</b>       | <b>104</b> |
| 11.1      | APPLICABLE STANDARDS .....                                                   | 104        |
| 11.2      | MEASUREMENT PROCEDURE .....                                                  | 105        |
| 11.3      | TEST EQUIPMENT LIST AND DETAILS .....                                        | 106        |
| 11.4      | TEST ENVIRONMENTAL CONDITIONS.....                                           | 106        |
| 11.5      | TEST RESULTS .....                                                           | 106        |
| <b>12</b> | <b>EXHIBIT A - FCC &amp; ISED EQUIPMENT LABELING REQUIREMENTS .....</b>      | <b>209</b> |
| 12.1      | FCC ID LABEL REQUIREMENTS .....                                              | 209        |
| 12.2      | ISED LABEL REQUIREMENTS .....                                                | 209        |
| 12.3      | FCC ID & ISED LABEL CONTENTS AND LOCATION.....                               | 210        |
| <b>13</b> | <b>EXHIBIT B - TEST SETUP PHOTOGRAPHS .....</b>                              | <b>211</b> |
| 13.1      | RADIATED EMISSION BELOW 1 GHZ FRONT VIEW.....                                | 211        |
| 13.2      | RADIATED EMISSION BELOW 1 GHZ REAR VIEW .....                                | 211        |
| 13.3      | RADIATED EMISSION ABOVE 1 GHZ FRONT VIEW .....                               | 212        |
| 13.4      | RADIATED EMISSION ABOVE 1 GHZ REAR VIEW .....                                | 212        |
| 13.5      | AC CONDUCTED EMISSIONS FRONT VIEW .....                                      | 213        |
| 13.6      | AC CONDUCTED EMISSIONS SIDE VIEW .....                                       | 213        |
| 13.7      | CONDUCTED SETUP PHOTO .....                                                  | 214        |
| <b>14</b> | <b>EXHIBIT C - EUT PHOTOGRAPHS.....</b>                                      | <b>215</b> |
| 14.1      | EUT – FRONT VIEW .....                                                       | 215        |
| 14.2      | EUT – BACK VIEW .....                                                        | 215        |
| 14.3      | EUT – TOP VIEW.....                                                          | 216        |
| 14.4      | EUT – BOTTOM VIEW .....                                                      | 216        |
| 14.5      | EUT – LEFT VIEW .....                                                        | 217        |
| 14.6      | EUT – RIGHT VIEW .....                                                       | 217        |
| 14.7      | EUT – OPEN CASE OVERVIEW .....                                               | 218        |
| 14.8      | EUT – OPEN CASE VIEW MAIN BOARD TOP VIEW .....                               | 218        |
| 14.9      | EUT – OPEN CASE VIEW 1 MAIN BOARD TOP VIEW WITHOUT SHIELDING .....           | 219        |
| 14.10     | EUT – OPEN CASE VIEW MAIN BOARD BOTTOM VIEW .....                            | 219        |
| 14.11     | EUT – OPEN CASE VIEW MAIN BOARD BOTTOM VIEW WITHOUT SHIELDING .....          | 220        |
| 14.12     | EUT – Wi-Fi MODULE DETAIL VIEW .....                                         | 220        |
| 14.13     | EUT – OPEN CASE VIEW USB MODULE TOP VIEW.....                                | 221        |
| 14.14     | EUT – OPEN CASE VIEW USB MODULE BOTTOM VIEW .....                            | 221        |
| 14.15     | EUT – OPEN CASE VIEW CAMERA MODULE .....                                     | 222        |

14.16 EUT – ANTENNA..... 222

14.17 BATTERY TOP VIEW..... 223

14.18 BATTERY SIDE VIEW..... 223

**DOCUMENT REVISION HISTORY**

| Revision Number | Report Number | Description of Revision | Date of Revision |
|-----------------|---------------|-------------------------|------------------|
| 0               | R1605201-407  | Original Report         | 2016-08-05       |

## 1 General Description

---

### 1.1 General Statements

Bay area Compliance Laboratory Corp. [BACL] hereby makes the following Statements:

- The Unit(s) described in this Test Report were received at BACL's facilities on 6 June 2016 and was in working condition upon arrival. Testing was performed on the Unit(s) described in this Test Report during the period 28 June through 3 August 2016.
- The Test Results reported herein apply only to the Unit(s) actually tested, and to substantially identical Units.
- This Test Report must not be used to claim product endorsement by A2LA, or any agency of the U.S. Government, or by any other foreign government.
- This Test Report is the property of BACL, and shall not be reproduced, except in full, without prior written approval of BACL.

### 1.2 Agent for the Responsible Party

Company Name: Go Global Compliance  
Contact: Mr. Peter S. Merguerian  
Telephone: +1-408-416-3772  
E-mail: [peter@goglobalcompliance.com](mailto:peter@goglobalcompliance.com)

### 1.3 Responsible Party

Company Name: GoPro, Inc.  
Contact: Mr. Steven Kim  
Street Address: 3000 Clearview Way,  
City/State/Zip: San Mateo, CA 94402  
Country: USA  
Telephone: +1-650 436-5020  
E-mail: [skim@gopro.com](mailto:skim@gopro.com)  
Web: [www.gopro.com](http://www.gopro.com)

### 1.4 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *GoPro, Inc.*, and their product model: *ASST1*, FCC ID: CNFASST1; IC: 10193A-ASST1 or the "EUT" as referred to in this report. It is a video camera with Wi-Fi, Bluetooth, and BLE functions. It operates in the 2.4 GHz and 5 GHz bands.

### 1.5 Mechanical Description of EUT

**Dimensions:** approximately 6cm (L) x 2.4cm (W) x 4.3cm (H)

**Weight:** 118 grams.

**Serial Number:** C31613 DVT13166 and C31613 DVT13161 assigned by GoPro, Inc.

**EUT Photos:** See Exhibit C of this Test Report.

## 1.6 Objective

This report is prepared on behalf of *GoPro, Inc* in accordance with FCC CFR47 §15.407 and IC RSS-247 Issue 1, May 2015.

The objective is to determine compliance with FCC Part 15.407 and IC RSS-247 rules for Output Power, Antenna Requirements, AC Line Conducted Emissions, Emission Bandwidth, Power spectral density, Conducted and Radiated Spurious Emissions.

## 1.7 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment DSS with FCC ID: CNFASST1, IC: 10193A-ASST1

FCC Part 15, Subpart C, Equipment DTS with FCC ID: CNFASST1, IC: 10193A-ASST1

## 1.8 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz, and FCC KDB 789033 D02 General UNII Test Procedure New Rules v01r02.

## 1.9 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

| Parameter                         | Measurement uncertainty |
|-----------------------------------|-------------------------|
| Occupied Channel Bandwidth        | ±5 %                    |
| RF output power, conducted        | ±0.57 dB                |
| Power Spectral Density, conducted | ±1.48 dB                |
| Unwanted Emissions, conducted     | ±1.57 dB                |
| All emissions, radiated           | ±4.0 dB                 |
| AC power line Conducted Emission  | ±2.0 dB                 |
| Temperature                       | ±2 °C                   |
| Humidity                          | ±5 %                    |
| DC and low frequency voltages     | ±1 %                    |
| Time                              | ±2 %                    |
| Duty Cycle                        | ±3 %                    |

## 1.10 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

## 1.11 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

**A- An independent, 3<sup>rd</sup>-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02),** in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (\*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

**B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03)** to certify

- For the USA (Federal Communications Commission):
  - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
  - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
  - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
  - 1- All Scope 1-Licence-Exempt Radio Frequency Devices;
  - 2- All Scope 2-Licensed Personal Mobile Radio Services;
  - 3- All Scope 3-Licensed General Mobile & Fixed Radio Services;
  - 4- All Scope 4-Licensed Maritime & Aviation Radio Services;
  - 5- All Scope 5-Licensed Fixed Microwave Radio Services
  - 6- All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
  - 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
  - 2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
  - All Scope A1 - Terminal Equipment for the Purpose of Calls;
  - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
  - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
  - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
  - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

**C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:**

- 1 Electronics and Office Equipment:
  - for Telephony (ver. 3.0)
  - for Audio/Video (ver. 3.0)
  - for Battery Charging Systems (ver. 1.1)
  - for Set-top Boxes & Cable Boxes (ver. 4.1)
  - for Televisions (ver. 6.1)
  - for Computers (ver. 6.0)
  - for Displays (ver. 6.0)
  - for Imaging Equipment (ver. 2.0)
  - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
  - for Commercial Dishwashers (ver. 2.0)
  - for Commercial Ice Machines (ver. 2.0)
  - for Commercial Ovens (ver. 2.1)
  - for Commercial Refrigerators and Freezers
- 3 Lighting Products
  - For Decorative Light Strings (ver. 1.5)
  - For Luminaires (including sub-components) and Lamps (ver. 1.2)
  - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
  - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
  - for Residential Ceiling Fans (ver. 3.0)
  - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
  - For Water Coolers (ver. 3.0)

**D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:**

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Industry Canada - IC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
  - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;

- NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
  - Radio & Teleterminal Equipment (R&TTE) Directive 1995/5/EC
  - US -EU EMC & Telecom MRA CAB
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA)  
APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
  - ENERGY STAR Recognized Test Laboratory – US EPA
  - Telecommunications Certification Body (TCB) – US FCC;
- Vietnam: APEC Tel MRA -Phase I;

## 2 EUT Test Configuration

### 2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

### 2.2 EUT Exercise Software

The test utility QCA Radio Control Toolkit, provided by *GoPro, Inc.*, was used to control the EUT while the software putty.exe was used to communicate with it.

Please refer to the following power setting table.

| Radio Mode | Channel | Frequency (MHz) | Power Setting |
|------------|---------|-----------------|---------------|
| 802.11a    | 36      | 5180            | 13            |
|            | 40      | 5200            | 13            |
|            | 48      | 5240            | 13            |
|            | 52      | 5260            | 13            |
|            | 56      | 5280            | 13            |
|            | 64      | 5320            | 13            |
|            | 100     | 5500            | 13            |
|            | 116     | 5580            | 13            |
|            | 140     | 5700            | 13            |
|            | 144     | 5720            | 13            |
|            | 149     | 5745            | 13            |
|            | 157     | 5785            | 13            |
|            | 165     | 5825            | 13            |

| Radio Mode | Channel | Frequency (MHz) | Power Setting |
|------------|---------|-----------------|---------------|
| 802.11n20  | 36      | 5180            | 13            |
|            | 40      | 5200            | 13            |
|            | 48      | 5240            | 13            |
|            | 52      | 5260            | 13            |
|            | 56      | 5280            | 13            |
|            | 64      | 5320            | 13            |
|            | 100     | 5500            | 13            |
|            | 116     | 5580            | 13            |
|            | 140     | 5700            | 13            |
|            | 144     | 5720            | 13            |
|            | 149     | 5745            | 13            |
|            | 157     | 5785            | 13            |
|            | 165     | 5825            | 13            |
|            |         |                 |               |
| 802.11n40  | 38      | 5190            | 13            |
|            | 46      | 5230            | 13            |
|            | 54      | 5270            | 13            |
|            | 62      | 5310            | 13            |
|            | 102     | 5510            | 13            |
|            | 110     | 5550            | 13            |
|            | 134     | 5670            | 13            |
|            | 142     | 5710            | 13            |
|            | 151     | 5755            | 13            |
|            | 159     | 5795            | 13            |
| 802.11ac20 | 36      | 5180            | 13            |
|            | 40      | 5200            | 13            |
|            | 48      | 5240            | 13            |
|            | 52      | 5260            | 13            |
|            | 56      | 5280            | 13            |
|            | 64      | 5320            | 13            |
|            | 100     | 5500            | 13            |
|            | 116     | 5580            | 13            |
|            | 140     | 5700            | 13            |
|            | 144     | 5720            | 13            |
|            | 149     | 5745            | 13            |
|            | 157     | 5785            | 13            |
|            | 165     | 5825            | 13            |
|            |         |                 |               |

| Radio Mode | Channel | Frequency (MHz) | Power Setting |
|------------|---------|-----------------|---------------|
| 802.11ac40 | 38      | 5190            | 13            |
|            | 46      | 5230            | 13            |
|            | 54      | 5270            | 13            |
|            | 62      | 5310            | 13            |
|            | 102     | 5510            | 13            |
|            | 110     | 5550            | 13            |
|            | 134     | 5670            | 13            |
|            | 142     | 5710            | 13            |
|            | 151     | 5755            | 13            |
|            | 159     | 5795            | 13            |
| 802.11ac80 | 42      | 5210            | 13            |
|            | 58      | 5290            | 13            |
|            | 106     | 5530            | 13            |
|            | 122*    | 5610            | 13            |
|            | 138     | 5690            | 13            |
|            | 155     | 5775            | 13            |

\* Note: This channel is for FCC application only.

## 2.3 Duty Cycle Correction Factor


According to KDB 789033 D02 General UNII Test Procedures New Rules v01r02 section B:

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.


| Radio Mode | On Time (ms) | Period (ms) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) |
|------------|--------------|-------------|----------------|-----------------------------------|
| 802.11a    | 2.04         | 2.16        | 94.44          | 0.2482                            |
| 802.11n20  | 1.93         | 2.02        | 95.54          | 0.1979                            |
| 802.11n40  | 0.96         | 1.04        | 92.31          | 0.3476                            |
| 802.11ac20 | 1.92         | 2.02        | 95.05          | 0.2205                            |
| 802.11ac40 | 0.96         | 1.04        | 92.31          | 0.3476                            |
| 802.11ac80 | 0.47         | 0.56        | 83.93          | 0.7609                            |

Note: Duty Cycle Correction Factor =  $10 \cdot \log(1/\text{duty cycle})$


Please refer to the following plots.

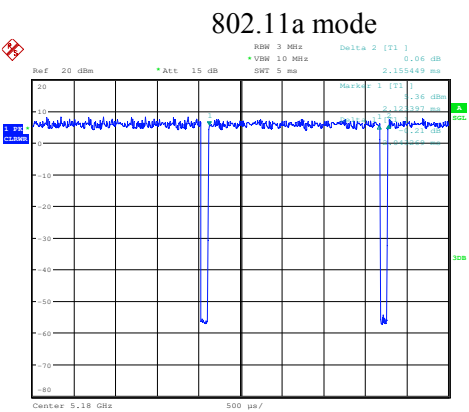


Date: 19.JUL.2016 21:37:15

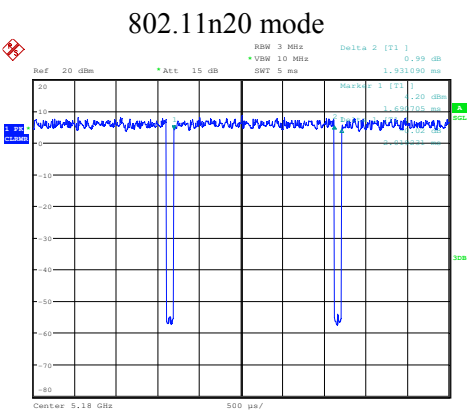


Date: 19.JUL.2016 21:38:53

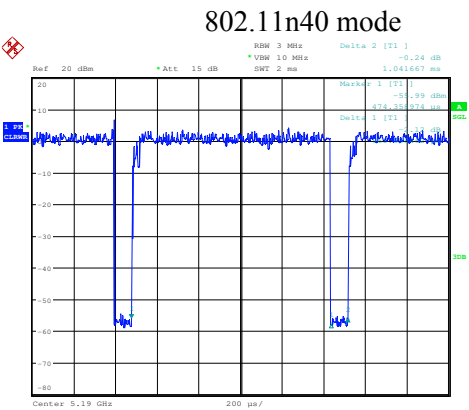


Date: 19.JUL.2016 21:42:26

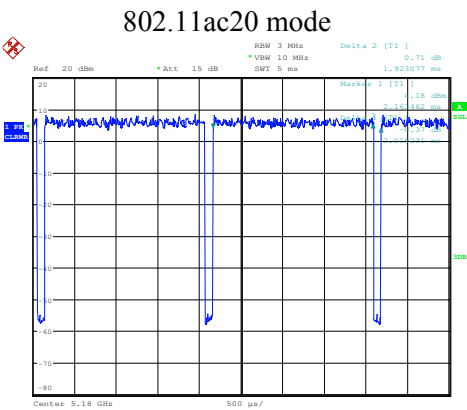

Date: 19.JUL.2016 21:40:15

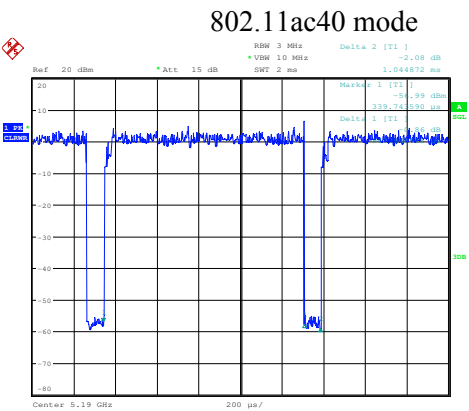

Date: 19.JUL.2016 21:44:29

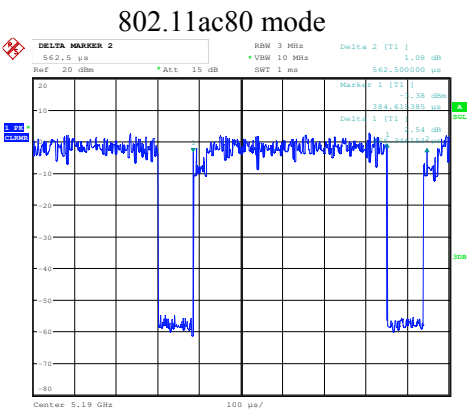

Date: 19.JUL.2016 21:47:01

## 2.4 Equipment Modifications

A hole was cut in the side of the EUT to access the antenna ports and a cable was attached that allowed the EUT to be connected to a debugging board.

## 2.5 Local Support Equipment

| Manufacturer | Description | Model         |
|--------------|-------------|---------------|
| Dell         | Laptop      | Latitude D630 |

## 2.6 EUT Internal Configuration Details

| Manufacturer | Description              | Serial Number |
|--------------|--------------------------|---------------|
| GoPro        | FPC, Microphone + Button | 656-10756-000 |
| GoPro        | PCB, Main                | 656-10705-000 |
| GoPro        | RFPC, I/O                | 656-10826-000 |
| GoPro        | RFPC, Sensor             | 656-10703-000 |
| GoPro        | PCB                      | 656-12190-000 |
| GoPro        | FPC, Speaker + LED       | 656-12297-000 |

## 2.7 Support Equipment

| Manufacturer | Description | Model |
|--------------|-------------|-------|
| GoPro        | Debug Board | 898A  |

## 2.8 Interface Ports and Cabling

| Cable Description | Length (m) | To     | From |
|-------------------|------------|--------|------|
| USB Cable         | < 1 m      | Laptop | EUT  |
| SMA pigtail       | < 1 m      | EUT    | PSA  |

### 3 Summary of Test Results

| FCC & ISSED Rules                                                | Description of Test                     | Result                 |
|------------------------------------------------------------------|-----------------------------------------|------------------------|
| FCC §2.1093, §15.407(f),<br>ISED RSS-102                         | RF Exposure                             | Compliant <sup>1</sup> |
| FCC §15.203<br>ISED RSS-Gen §8.3                                 | Antenna Requirement                     | Compliant              |
| FCC §15.207<br>ISED RSS-Gen §8.8                                 | AC Power Line Conducted Emissions       | Compliant              |
| FCC §2.1053, §15.205,<br>§15.209, 15.407(b)<br>ISED RSS-247 §6.2 | Spurious Radiated Emissions             | Compliant              |
| FCC §15.407(e)<br>ISED RSS-Gen §6.2                              | Emission Bandwidth                      | Compliant              |
| FCC §407(a)<br>ISED RSS-247 §6.2                                 | Output Power                            | Compliant              |
| FCC §2.1051, §15.407(b)<br>ISED RSS-247 §6.2                     | Band Edges                              | Compliant              |
| FCC §15.407(a)<br>ISED RSS-247 §6.2                              | Power Spectral Density                  | Compliant              |
| FCC §2.1051, §15.407(b)<br>ISED RSS-247 §6.2                     | Spurious Emissions at Antenna Terminals | Compliant              |
| FCC §15.407(h)<br>ISED RSS-247 §6.3                              | Dynamic Frequency Selection (DFS)       | Compliant <sup>2</sup> |

<sup>1</sup> RF exposure analysis is covered in a separate report. Please refer to R1605201-SAR.

<sup>2</sup> DFS measurement is recorded in a separate report. Please refer to R1605201-DFS.

## **4 FCC §2.1093, §15.407(f) & ISED RSS-102 - RF Exposure**

---

### **4.1 Applicable Standard**

FCC §2.1093, §15.407(f) & IC RSS-102

### **4.2 Test Results**

Please refer to the SAR Report: R1605201- SAR.

## 5 FCC §15.203 & ISED RSS-Gen §8.3 - Antenna Requirements

### 5.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to IC RSS-Gen §8.3: Transmitter Antenna

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. 9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

### 5.2 Antenna List

The antennas used by the EUT are permanent attached antennas.

| Radio           | Frequency Range (MHz) | Maximum Antenna Gain (dBi) |
|-----------------|-----------------------|----------------------------|
| Wi-Fi/Bluetooth | 2400-2483.5           | -0.9                       |
| Wi-Fi           | 5150-5850             | 3.0                        |

## 6 FCC §15.207 & IC RSS-Gen §8.8 - AC Power Line Conducted Emissions

### 6.1 Applicable Standards

As per FCC §15.207 & IC RSS GEN §8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

| Frequency of Emission<br>(MHz) | Conducted Limit (dBuV) |                 |
|--------------------------------|------------------------|-----------------|
|                                | Quasi-peak             | Average         |
| 0.15-0.5                       | 66 to 56 Note 1        | 56 to 46 Note 1 |
| 0.5-5                          | 56                     | 46              |
| 5-30                           | 60                     | 50              |

*Note 1 Decreases with the logarithm of the frequency.*

### 6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used was FCC §15.207 limits & IC RSS-Gen §8.8.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.


### 6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

## 6.4 Test Setup Block Diagram

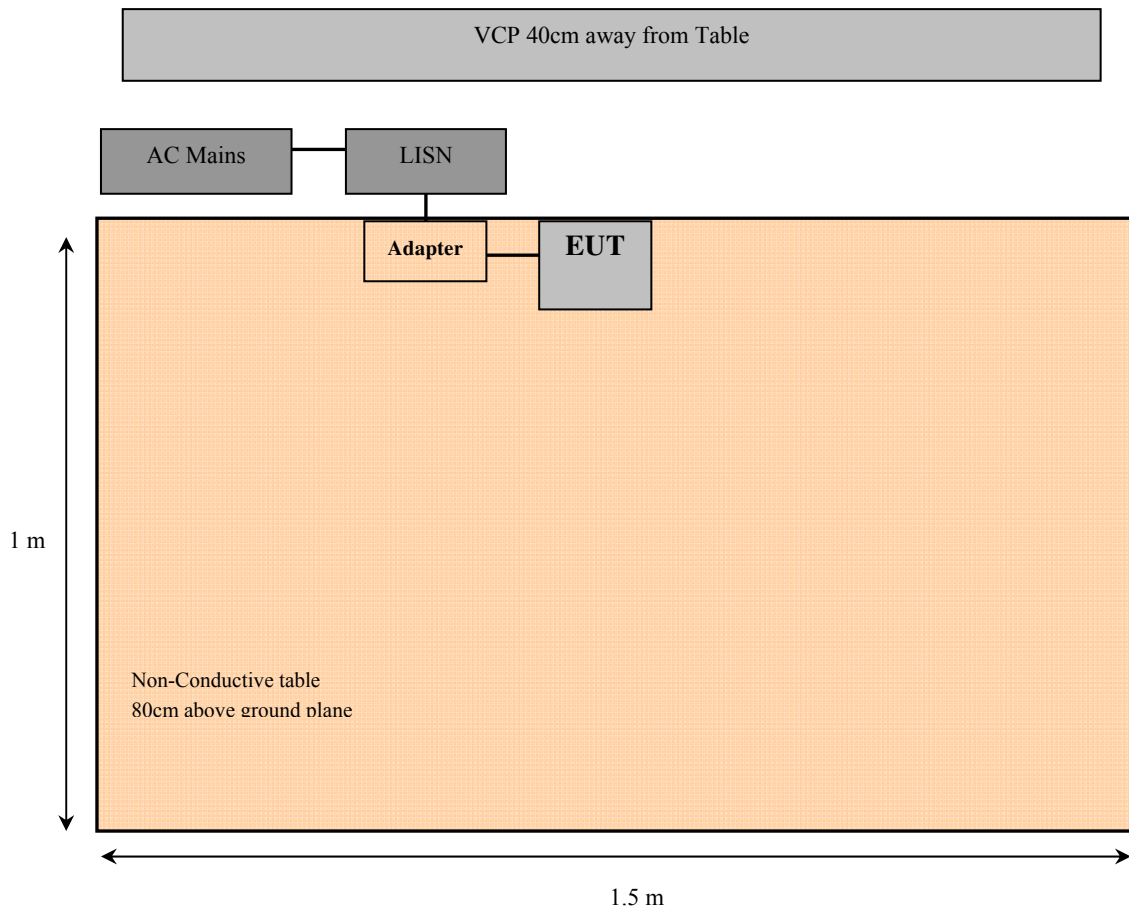

## 6.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = A_i + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 6.6 Test Equipment List and Details

| Manufacturer              | Description                     | Model No.         | Serial No. | Calibration Date | Calibration Interval |
|---------------------------|---------------------------------|-------------------|------------|------------------|----------------------|
| Rohde & Schwarz           | Receiver, EMI Test              | ESCI 1166.5950K03 | 100338     | 2016-02-04       | 2 year               |
| Rohde & Schwarz           | Impulse Limiter                 | ESH3-Z2           | 101964     | 2015-07-23       | 1 year               |
| Keysight Technologies     | RF Limiter                      | 11867A            | MY42242932 | 2015-12-15       | 1 year               |
| Solar Electronics Company | High Pass Filter                | Type 7930-100     | 7930150204 | 2016-03-09       | 1 Year               |
| Suirong                   | 30 ft conductive emission cable | LMR 400           | -          | 2016-03-05       | 1 year               |
| Vasona                    | Test software                   | V6.0 build 11     | 10400213   | N/R              | N/R                  |

**Statement of Traceability:** *BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.*

## 6.7 Test Environmental Conditions

|                             |                        |
|-----------------------------|------------------------|
| <b>Test Date:</b>           | 2016-06-28             |
| <b>Test Site:</b>           | Ground Plane Test Site |
| <b>Temperature:</b>         | 22-24° C               |
| <b>Relative Humidity:</b>   | 40-41 %                |
| <b>Barometric Pressure:</b> | 103.1-104.1 kPa        |
| <b>Test Personnel:</b>      | Jose Martinez          |


## 6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Part 15 and RSS-Gen standards conducted emissions limits, with the margin reading of:

| Connection: AC/DC adapter connected to 120 V/60 Hz, AC |                 |                               |             |
|--------------------------------------------------------|-----------------|-------------------------------|-------------|
| Margin (dB)                                            | Frequency (MHz) | Conductor Mode (Line/Neutral) | Range (MHz) |
| -14.36                                                 | 0.174621        | Neutral                       | 0.15-30     |

## 6.9 Conducted Emissions Test Plots and Data


### 120 V, 60 Hz – Line

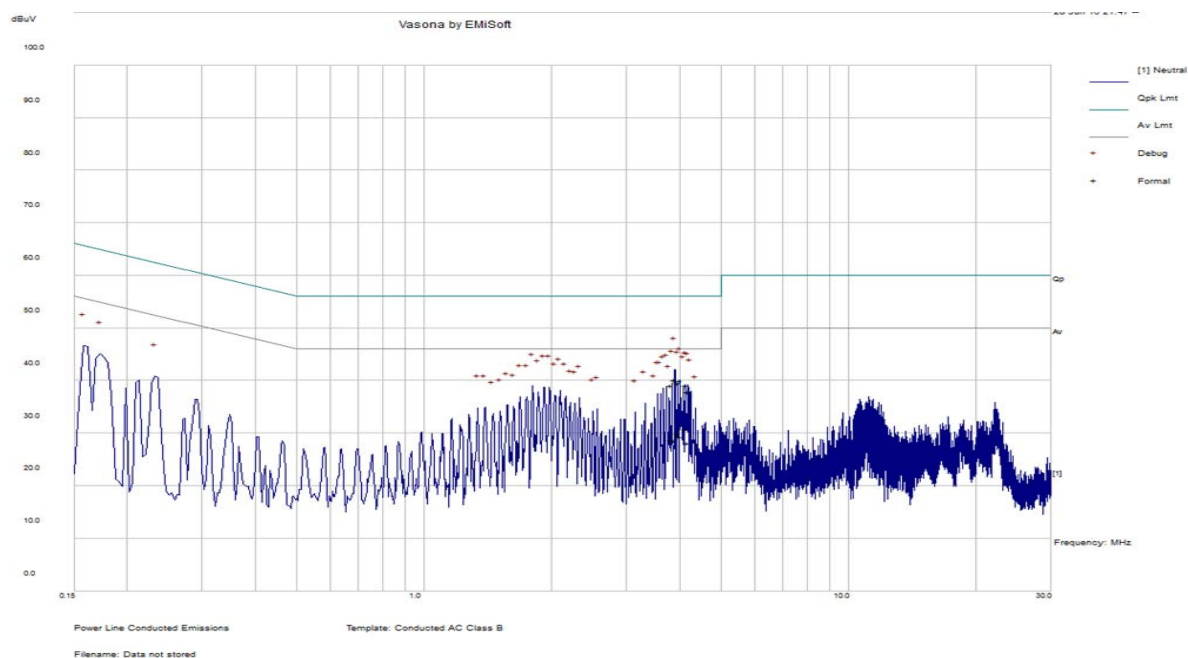

| Frequency (MHz) | Corrected Amplitude (dBμV) | Conductor (Line/Neutral) | Limit (dBμV) | Margin (dB) | Detector (QP/Ave.) |
|-----------------|----------------------------|--------------------------|--------------|-------------|--------------------|
| 3.893366        | 40.15                      | Line                     | 56           | -15.85      | QP                 |
| 4.010153        | 40.01                      | Line                     | 56           | -15.99      | QP                 |
| 3.952206        | 39.58                      | Line                     | 56           | -16.42      | QP                 |
| 3.833068        | 39.08                      | Line                     | 56           | -16.92      | QP                 |
| 4.126465        | 39.01                      | Line                     | 56           | -16.99      | QP                 |
| 4.181579        | 37.85                      | Line                     | 56           | -18.15      | QP                 |

| Frequency (MHz) | Corrected Amplitude (dBμV) | Conductor (Line/Neutral) | Limit (dBμV) | Margin (dB) | Detector (QP/Ave.) |
|-----------------|----------------------------|--------------------------|--------------|-------------|--------------------|
| 4.126465        | 30.69                      | Line                     | 46           | -15.31      | Ave.               |
| 3.952206        | 29.97                      | Line                     | 46           | -16.03      | Ave.               |
| 4.010153        | 29.29                      | Line                     | 46           | -16.71      | Ave.               |
| 3.833068        | 28.81                      | Line                     | 46           | -17.19      | Ave.               |
| 3.893366        | 28.67                      | Line                     | 46           | -17.33      | Ave.               |
| 4.181579        | 28.19                      | Line                     | 46           | -17.81      | Ave.               |

## 120 V, 60 Hz – Neutral

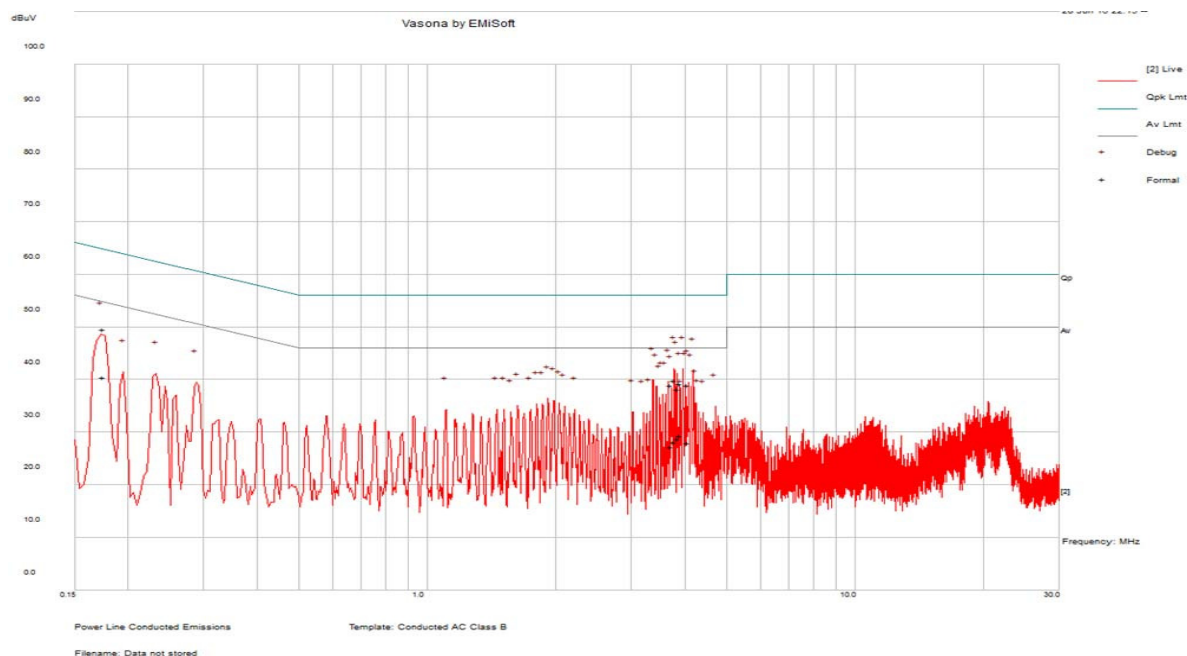

| Frequency (MHz) | Corrected Amplitude (dBμV) | Conductor (Line/Neutral) | Limit (dBμV) | Margin (dB) | Detector (QP/Ave.) |
|-----------------|----------------------------|--------------------------|--------------|-------------|--------------------|
| 0.174621        | 49.63                      | Neutral                  | 64.74        | -15.11      | QP                 |
| 3.776736        | 39.81                      | Neutral                  | 56           | -16.19      | QP                 |
| 3.894848        | 39.27                      | Neutral                  | 56           | -16.73      | QP                 |
| 4.069119        | 38.91                      | Neutral                  | 56           | -17.09      | QP                 |
| 3.718076        | 38.86                      | Neutral                  | 56           | -17.14      | QP                 |
| 3.836411        | 38.18                      | Neutral                  | 56           | -17.82      | QP                 |

| Frequency (MHz) | Corrected Amplitude (dBμV) | Conductor (Line/Neutral) | Limit (dBμV) | Margin (dB) | Detector (QP/Ave.) |
|-----------------|----------------------------|--------------------------|--------------|-------------|--------------------|
| 0.174621        | 40.38                      | Neutral                  | 54.74        | -14.36      | Ave.               |
| 3.894848        | 29.36                      | Neutral                  | 46           | -16.64      | Ave.               |
| 3.836411        | 28.72                      | Neutral                  | 46           | -17.28      | Ave.               |
| 3.776736        | 28.18                      | Neutral                  | 46           | -17.82      | Ave.               |
| 4.069119        | 28.02                      | Neutral                  | 46           | -17.98      | Ave.               |
| 3.718076        | 27.18                      | Neutral                  | 46           | -18.82      | Ave.               |

## 7 FCC §15.209, §15.407(b) & ISSED RSS-247 §6.2 - Spurious Radiated Emissions

### 7.1 Applicable Standard

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz           |
|---------------------|-----------------------|-----------------|---------------|
| 0.090 – 0.110       | 16.42 – 16.423        | 960 – 1240      | 4.5 – 5.15    |
| 0.495 – 0.505       | 16.69475 – 16.69525   | 1300 – 1427     | 5.35 – 5.46   |
| 2.1735 – 2.1905     | 25.5 – 25.67          | 1435 – 1626.5   | 7.25 – 7.75   |
| 4.125 – 4.128       | 37.5 – 38.25          | 1645.5 – 1646.5 | 8.025 – 8.5   |
| 4.17725 – 4.17775   | 73 – 74.6             | 1660 – 1710     | 9.0 – 9.2     |
| 4.20725 – 4.20775   | 74.8 – 75.2           | 1718.8 – 1722.2 | 9.3 – 9.5     |
| 6.215 – 6.218       | 108 – 121.94          | 2200 – 2300     | 10.6 – 12.7   |
| 6.26775 – 6.26825   | 123 – 138             | 2310 – 2390     | 13.25 – 13.4  |
| 6.31175 – 6.31225   | 149.9 – 150.05        | 2483.5 – 2500   | 14.47 – 14.5  |
| 8.291 – 8.294       | 156.52475 – 156.52525 | 2690 – 2900     | 15.35 – 16.2  |
| 8.362 – 8.366       | 156.7 – 156.9         | 3260 – 3267     | 17.7 – 21.4   |
| 8.37625 – 8.38675   | 162.0125 – 167.17     | 3.332 – 3.339   | 22.01 – 23.12 |
| 8.41425 – 8.41475   | 167.72 – 173.2        | 3.3458 – 3.358  | 23.6 – 24.0   |
| 12.29 – 12.293      | 240 – 285             | 3.600 – 4.400   | 31.2 – 31.8   |
| 12.51975 – 12.52025 | 322 – 335.4           |                 | 36.43 – 36.5  |
| 12.57675 – 12.57725 | 399.9 – 410           |                 | Above 38.6    |
| 13.36 – 13.41       | 608 – 614             |                 |               |

As per FCC §15.209: The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

| Frequency (MHz) | Field Strength (micro volts/meter) | Measurement Distance (meters) |
|-----------------|------------------------------------|-------------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                        | 300                           |
| 0.490 - 1.705   | 24000/F(kHz)                       | 30                            |
| 1.705 - 30.0    | 30                                 | 30                            |
| 30 - 88         | 100 Note 1                         | 3                             |
| 88 - 216        | 150 Note 1                         | 3                             |
| 216 - 960       | 200 Note 1                         | 3                             |
| Above 960       | 500                                | 3                             |

Note 1: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC Part 15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

As per IC RSS-247 §6.2

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250- 5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz, the device shall comply with the following:

1. All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. if the equipment is intended for outdoor use; or
2. All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and any emissions within the band 5150-5250 MHz shall meet the power spectral density limits of Section 6.2.1. The device shall be labelled "for indoor use only."

For devices with operating frequencies in the band 5250-5350 MHz but having a channel bandwidth that overlaps the band 5150-5250 MHz, the devices' unwanted emission shall not exceed -27 dBm/MHz e.i.r.p. outside the band 5150-5350 MHz and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device shall be labelled "for indoor use only."

For transmitters operating in the band 5470-5725 MHz, emissions outside the band shall not exceed -27 dBm/MHz e.i.r.p.

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p. For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.

## 7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15.407 and IC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

## 7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter or 1.5 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 3MHz / Sweep = 100ms
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

## 7.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit for Class A. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 7.5 Test Equipment List and Details

| Manufacturer       | Description                            | Model No.            | Serial No.               | Calibration Date       | Calibration Interval |
|--------------------|----------------------------------------|----------------------|--------------------------|------------------------|----------------------|
| Rohde & Schwarz    | Receiver, EMI Test                     | ESCI<br>1166.5950K03 | 100338                   | 2016-02-04             | 2 year               |
| Agilent            | Analyzer, Spectrum                     | E4446A               | US44300386               | 2015-10-22             | 1 year               |
| Sunol Science Corp | System Controller                      | SC99V                | 011003-1                 | N/R                    | N/R                  |
| Sunol Sciences     | Antenna, Biconi-Log                    | JB3                  | A020106-2                | 2015-07-11             | 2 Years              |
| EMCO               | Antenna, Horn                          | 3115                 | 9511-4627                | 2016-01-28             | 2 years              |
| Agilent            | Amplifier, Pre                         | 8447D                | 2944A10187               | 2016-03-23             | 1 year               |
| IW                 | AOBOR Hi frequency<br>Co AX CabelCable | DC 1531              | KPS-<br>1501A3960K<br>PS | 2015-08-10             | 1 Year               |
| -                  | SMA cable                              | -                    | C0002                    | Each time <sup>1</sup> | N/A                  |
| -                  | N-Type Cable                           | -                    | C00013                   | 2016-04-28             | 1 year               |
| -                  | N-Type Cable                           | -                    | C00014                   | 2016-05-28             | 1 year               |
| Agilent            | Pre-Amplifier                          | 8449B                | 3008A01978               | 2015-09-02             | 1year                |
| Wisewave           | Antenna, Horn                          | ARH-4223-02          | 10555-02                 | 2013-09-20             | 3 year               |
| Wisewave           | Antenna, Horn                          | ARH-2823-02          | 10555-02                 | 2013-09-20             | 3 year               |
| Wisewave           | Amplifier, Low Noise                   | ALN-33144030-01      | 11424-01                 | 2016-04-28             | 1 year               |
| Wisewave           | Amplifier, Low Noise                   | ALN-22093530-01      | 12263-01                 | 2016-05-16             | 1 year               |
| Vasona             | Test software                          | V6.0 build 11        | 10400213                 | N/R                    | N/R                  |

**Statement of Traceability:** *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

Note<sup>1</sup>: cables and attenuators included in the test set-up will be checked each time before testing.

## 7.6 Test Environmental Conditions

|                             |                 |
|-----------------------------|-----------------|
| <b>Test Date:</b>           | 2016-08-02      |
| <b>Test Site:</b>           | 5M Chamber 3    |
| <b>Temperature:</b>         | 22-24° C        |
| <b>Relative Humidity:</b>   | 40-41 %         |
| <b>Barometric Pressure:</b> | 103.1-104.1 kPa |
| <b>Test Personnel:</b>      | Xiao Lin        |


## 7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15.407 and RSS-247 standards' radiated emissions limits, and had the worst margin of:

| Mode: Transmitting |                 |                                    |                           |
|--------------------|-----------------|------------------------------------|---------------------------|
| Margin (dB)        | Frequency (MHz) | Polarization (Horizontal/Vertical) | Mode, Channel             |
| -0.13              | 17100           | Vertical                           | 802.11a mode, channel 140 |

## 7.8 Radiated Emissions Test Result Data

### 1) 30 MHz – 1 GHz

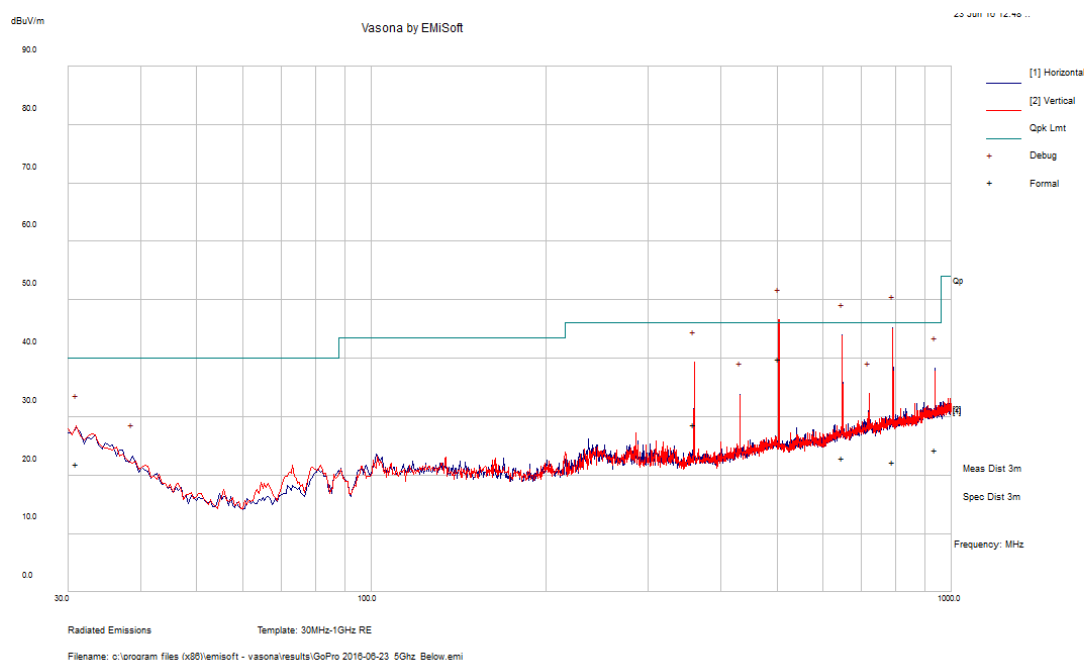

| Frequency (MHz) | Corrected Amplitude (dBμV/m) | Antenna Height (cm) | Antenna Polarity (H/V) | Turntable Azimuth (degrees) | Limit (dBμV/m) | Margin (dB) | Comments (PK/QP/Ave.) |
|-----------------|------------------------------|---------------------|------------------------|-----------------------------|----------------|-------------|-----------------------|
| 503.9915        | 39.89                        | 183                 | V                      | 58                          | 46             | -6.11       | QP                    |
| 792.185         | 22.29                        | 264                 | H                      | 82                          | 46             | -23.71      | QP                    |
| 648.1283        | 23.02                        | 141                 | H                      | 130                         | 46             | -22.98      | QP                    |
| 360.0318        | 28.74                        | 100                 | V                      | 41                          | 46             | -17.26      | QP                    |
| 936.668         | 24.39                        | 129                 | H                      | 114                         | 46             | -21.61      | QP                    |
| 31.03775        | 21.97                        | 161                 | V                      | 238                         | 40             | -18.03      | QP                    |

**2) 1-40 GHz**

Note: the testing was preformed at worst case based on the output power measurement for each bandwidth configuration. Therefore, only a mode, n40 mode and ac80 mode test data shows below.

**5150 - 5250 MHz**

802.11a mode

| Frequency<br>(MHz)      | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|-------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                         |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| Low Channel 5180 MHz    |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5180                    | 60.77                     | 356                               | 162            | H                 | 33.55            | 8.11                  | 0                    | 102.43                       | -                 | -              | PK                    |
| 5180                    | 51.41                     | 356                               | 162            | H                 | 33.55            | 8.11                  | 0                    | 93.07                        | -                 | -              | Ave                   |
| 5180                    | 63.46                     | 360                               | 217            | V                 | 33.55            | 8.11                  | 0                    | 105.12                       | -                 | -              | PK                    |
| 5180                    | 54.74                     | 360                               | 217            | V                 | 33.55            | 8.11                  | 0                    | 96.40                        | -                 | -              | Ave                   |
| 5150                    | 60.93                     | 136                               | 100            | H                 | 33.46            | 8.78                  | 38.51                | 64.66                        | 74                | -9.34          | PK                    |
| 5150                    | 41.54                     | 150                               | 223            | H                 | 33.46            | 8.78                  | 38.51                | 45.27                        | 54                | -8.73          | Ave                   |
| 5150                    | 62.79                     | 0                                 | 252            | V                 | 33.46            | 8.78                  | 38.51                | 66.52                        | 74                | -7.48          | PK                    |
| 5150                    | 41.70                     | 32                                | 228            | V                 | 33.46            | 8.78                  | 38.51                | 45.43                        | 54                | -8.57          | Ave                   |
| 10360                   | 46.24                     | 0                                 | 100            | V                 | 38.20            | 12.7                  | 38.26                | 58.88                        | 68.26             | -9.38          | PK                    |
| 10360                   | 46.56                     | 0                                 | 100            | H                 | 38.20            | 12.7                  | 38.26                | 59.20                        | 68.26             | -9.06          | PK                    |
| 15540                   | 47                        | 0                                 | 100            | V                 | 39.30            | 15.63                 | 36.98                | 64.95                        | 74                | -9.05          | PK                    |
| 15540                   | 46.23                     | 0                                 | 100            | H                 | 39.30            | 15.63                 | 36.98                | 64.18                        | 74                | -9.82          | PK                    |
| 15540                   | 35.00                     | 0                                 | 100            | V                 | 39.30            | 15.63                 | 36.98                | 52.95                        | 54                | -1.05          | Ave                   |
| 15540                   | 34.93                     | 0                                 | 100            | H                 | 39.30            | 15.63                 | 36.98                | 52.88                        | 54                | -1.12          | Ave                   |
| Middle Channel 5200 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5200                    | 61.17                     | 360                               | 117            | H                 | 33.61            | 8.11                  | 0                    | 102.89                       | -                 | -              | PK                    |
| 5200                    | 52.24                     | 360                               | 117            | H                 | 33.61            | 8.11                  | 0                    | 93.96                        | -                 | -              | Ave                   |
| 5200                    | 63.87                     | 348                               | 205            | V                 | 33.61            | 8.11                  | 0                    | 105.59                       | -                 | -              | PK                    |
| 5200                    | 54.46                     | 348                               | 205            | V                 | 33.61            | 8.11                  | 0                    | 96.18                        | -                 | -              | Ave                   |
| 10400                   | 47.35                     | 0                                 | 100            | V                 | 38.25            | 12.82                 | 38.25                | 60.17                        | 68.26             | -8.09          | PK                    |
| 10400                   | 47.02                     | 0                                 | 100            | H                 | 38.25            | 12.82                 | 38.25                | 59.84                        | 68.26             | -8.42          | PK                    |
| 15600                   | 45.9                      | 0                                 | 100            | V                 | 39.18            | 15.63                 | 36.99                | 63.72                        | 74                | -10.3          | PK                    |
| 15600                   | 46.14                     | 0                                 | 100            | H                 | 39.18            | 15.63                 | 36.99                | 63.96                        | 74                | -10.3          | PK                    |
| 15600                   | 34.70                     | 0                                 | 100            | V                 | 39.18            | 15.63                 | 36.99                | 52.52                        | 54                | -1.48          | Ave                   |
| 15600                   | 34.71                     | 0                                 | 100            | H                 | 39.18            | 15.63                 | 36.99                | 52.53                        | 54                | -1.47          | Ave                   |
| High Channel 5240 MHz   |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5240                    | 60.32                     | 360                               | 139            | H                 | 33.52            | 8.11                  | 0                    | 101.95                       | -                 | -              | PK                    |
| 5240                    | 51.43                     | 360                               | 139            | H                 | 33.52            | 8.11                  | 0                    | 93.06                        | -                 | -              | Ave                   |
| 5240                    | 64.29                     | 360                               | 194            | V                 | 33.52            | 8.11                  | 0                    | 105.92                       | -                 | -              | PK                    |
| 5240                    | 55.41                     | 360                               | 194            | V                 | 33.52            | 8.11                  | 0                    | 97.04                        | -                 | -              | Ave                   |
| 10480                   | 47.21                     | 0                                 | 100            | V                 | 38.30            | 12.81                 | 38.24                | 60.08                        | 68.26             | -8.18          | PK                    |
| 10480                   | 47.82                     | 0                                 | 100            | H                 | 38.30            | 12.81                 | 38.24                | 60.69                        | 68.26             | -7.57          | PK                    |
| 15720                   | 46.56                     | 0                                 | 100            | V                 | 38.88            | 15.69                 | 37.04                | 64.09                        | 74                | -9.91          | PK                    |
| 15720                   | 46.92                     | 0                                 | 100            | H                 | 38.88            | 15.69                 | 37.04                | 64.45                        | 74                | -9.55          | PK                    |
| 15720                   | 35.39                     | 0                                 | 100            | V                 | 38.88            | 15.69                 | 37.04                | 52.92                        | 54                | -1.08          | Ave                   |
| 15720                   | 35.42                     | 0                                 | 100            | H                 | 38.88            | 15.69                 | 37.04                | 52.95                        | 54                | -1.05          | Ave                   |

## 802.11 n40 mode

| Frequency<br>(MHz)    | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|-----------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                       |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| Low Channel 5190 MHz  |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5190                  | 57.77                     | 354                               | 138            | H                 | 33.58            | 8.11                  | 0.00                 | 99.46                        | -                 | -              | PK                    |
| 5190                  | 49.01                     | 354                               | 138            | H                 | 33.58            | 8.11                  | 0.00                 | 90.70                        | -                 | -              | Ave                   |
| 5190                  | 60.14                     | 0                                 | 236            | V                 | 33.58            | 8.11                  | 0.00                 | 101.83                       | -                 | -              | PK                    |
| 5190                  | 51.38                     | 0                                 | 236            | V                 | 33.58            | 8.11                  | 0.00                 | 93.07                        | -                 | -              | Ave                   |
| 5150                  | 64.34                     | 0                                 | 213            | H                 | 33.46            | 8.78                  | 38.51                | 68.07                        | 74                | -5.93          | PK                    |
| 5150                  | 44.50                     | 6                                 | 127            | H                 | 33.46            | 8.78                  | 38.51                | 48.23                        | 54                | -5.77          | Ave                   |
| 5150                  | 68.01                     | 46                                | 175            | V                 | 33.46            | 8.78                  | 38.51                | 71.74                        | 74                | -2.26          | PK                    |
| 5150                  | 46.68                     | 34                                | 243            | V                 | 33.46            | 8.78                  | 38.51                | 50.41                        | 54                | -3.59          | Ave                   |
| 10380                 | 47.24                     | 0                                 | 100            | V                 | 38.25            | 12.82                 | 38.25                | 60.06                        | 68.26             | -8.20          | PK                    |
| 10380                 | 47.03                     | 0                                 | 100            | H                 | 38.25            | 12.82                 | 38.25                | 59.85                        | 68.26             | -8.41          | PK                    |
| 15570                 | 45.92                     | 0                                 | 100            | V                 | 39.18            | 15.63                 | 36.99                | 63.74                        | 74                | -10.3          | PK                    |
| 15570                 | 45.71                     | 0                                 | 100            | H                 | 39.18            | 15.63                 | 36.99                | 63.53                        | 74                | -10.5          | PK                    |
| 15570                 | 34.55                     | 0                                 | 100            | V                 | 39.18            | 15.63                 | 36.99                | 52.37                        | 54                | -1.63          | Ave                   |
| 15570                 | 34.58                     | 0                                 | 100            | H                 | 39.18            | 15.63                 | 36.99                | 52.40                        | 54                | -1.60          | Ave                   |
| High Channel 5230 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5230                  | 63.44                     | 37                                | 100            | H                 | 33.50            | 8.11                  | 0.00                 | 105.05                       | -                 | -              | PK                    |
| 5230                  | 53.09                     | 37                                | 100            | H                 | 33.50            | 8.11                  | 0.00                 | 94.70                        | -                 | -              | Ave                   |
| 5230                  | 61.99                     | 0                                 | 193            | V                 | 33.50            | 8.11                  | 0.00                 | 103.60                       | -                 | -              | PK                    |
| 5230                  | 51.80                     | 0                                 | 193            | V                 | 33.50            | 8.11                  | 0.00                 | 93.41                        | -                 | -              | Ave                   |
| 10480                 | 46.91                     | 0                                 | 100            | V                 | 38.30            | 12.81                 | 38.24                | 59.78                        | 68.26             | -8.48          | PK                    |
| 10480                 | 46.62                     | 0                                 | 100            | H                 | 38.30            | 12.81                 | 38.24                | 59.49                        | 68.26             | -8.77          | PK                    |
| 15720                 | 46.88                     | 0                                 | 100            | V                 | 38.88            | 15.69                 | 37.04                | 64.41                        | 74                | -9.59          | PK                    |
| 15720                 | 47.2                      | 0                                 | 100            | H                 | 38.88            | 15.69                 | 37.04                | 64.73                        | 74                | -9.27          | PK                    |
| 15720                 | 35.33                     | 0                                 | 100            | V                 | 38.88            | 15.69                 | 37.04                | 52.86                        | 54                | -1.14          | Ave                   |
| 15720                 | 35.31                     | 0                                 | 100            | H                 | 38.88            | 15.69                 | 37.04                | 52.84                        | 54                | -1.16          | Ave                   |

## 802.11ac80 mode

| Frequency<br>(MHz) | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|--------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                    |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| 5210 MHz           |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5210               | 59.24                     | 36                                | 114            | H                 | 33.59            | 8.11                  | 0.00                 | 100.94                       | -                 | -              | PK                    |
| 5210               | 48.80                     | 36                                | 114            | H                 | 33.59            | 8.11                  | 0.00                 | 90.50                        | -                 | -              | Ave                   |
| 5210               | 61.49                     | 33                                | 248            | V                 | 33.59            | 8.11                  | 0.00                 | 103.19                       | -                 | -              | PK                    |
| 5210               | 49.60                     | 33                                | 248            | V                 | 33.59            | 8.11                  | 0.00                 | 91.30                        | -                 | -              | Ave                   |
| 5150               | 61.74                     | 0                                 | 271            | V                 | 33.46            | 8.78                  | 38.51                | 65.47                        | 74                | -8.53          | PK                    |
| 5150               | 49.29                     | 32                                | 253            | V                 | 33.46            | 8.78                  | 38.51                | 53.02                        | 54                | -0.98          | Ave                   |
| 10420              | 47.16                     | 0                                 | 100            | V                 | 38.25            | 12.82                 | 38.25                | 59.98                        | 68.26             | -8.28          | PK                    |
| 10420              | 47.41                     | 0                                 | 100            | H                 | 38.25            | 12.82                 | 38.25                | 60.23                        | 68.26             | -8.03          | PK                    |
| 15630              | 46.73                     | 0                                 | 100            | V                 | 39.1             | 15.63                 | 36.99                | 64.47                        | 74                | -9.53          | PK                    |
| 15630              | 47.14                     | 0                                 | 100            | H                 | 39.1             | 15.63                 | 36.99                | 64.88                        | 74                | -9.12          | PK                    |
| 15630              | 35.57                     | 0                                 | 100            | V                 | 39.1             | 15.63                 | 36.99                | 53.31                        | 54                | -0.69          | Ave                   |
| 15630              | 35.48                     | 0                                 | 100            | H                 | 39.1             | 15.63                 | 36.99                | 53.22                        | 54                | -0.78          | Ave                   |

**5250 - 5350 MHz**

802.11a mode

| Frequency<br>(MHz)      | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|-------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                         |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| Low Channel 5260 MHz    |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5260                    | 63.72                     | 19                                | 100            | H                 | 33.52            | 8.20                  | 0.00                 | 105.44                       | -                 | -              | PK                    |
| 5260                    | 55.69                     | 19                                | 100            | H                 | 33.52            | 8.20                  | 0.00                 | 97.41                        | -                 | -              | Ave                   |
| 5260                    | 64.33                     | 25                                | 158            | V                 | 33.52            | 8.20                  | 0.00                 | 106.05                       | -                 | -              | PK                    |
| 5260                    | 56.50                     | 25                                | 158            | V                 | 33.52            | 8.20                  | 0.00                 | 98.22                        | -                 | -              | Ave                   |
| 10520                   | 48.28                     | 0                                 | 100            | V                 | 38.31            | 12.74                 | 38.16                | 61.17                        | 68.26             | -7.09          | PK                    |
| 10520                   | 47.47                     | 0                                 | 100            | H                 | 38.31            | 12.74                 | 38.16                | 60.36                        | 68.26             | -7.90          | PK                    |
| 15780                   | 46.74                     | 0                                 | 100            | V                 | 38.73            | 15.76                 | 37.07                | 64.16                        | 74                | -9.84          | PK                    |
| 15780                   | 47.12                     | 0                                 | 100            | H                 | 38.73            | 15.76                 | 37.07                | 64.54                        | 74                | -9.46          | PK                    |
| 15780                   | 35.51                     | 0                                 | 100            | V                 | 38.73            | 15.76                 | 37.07                | 52.93                        | 54                | -1.07          | Ave                   |
| 15780                   | 35.52                     | 0                                 | 100            | H                 | 38.73            | 15.76                 | 37.07                | 52.94                        | 54                | -1.06          | Ave                   |
| Middle Channel 5280 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5280                    | 65.57                     | 36                                | 100            | H                 | 33.50            | 8.20                  | 0.00                 | 107.27                       | -                 | -              | PK                    |
| 5280                    | 57.08                     | 36                                | 100            | H                 | 33.50            | 8.20                  | 0.00                 | 98.78                        | -                 | -              | Ave                   |
| 5280                    | 64.87                     | 360                               | 191            | V                 | 33.50            | 8.20                  | 0.00                 | 106.57                       | -                 | -              | PK                    |
| 5280                    | 56.14                     | 360                               | 191            | V                 | 33.50            | 8.20                  | 0.00                 | 97.84                        | -                 | -              | Ave                   |
| 10560                   | 48.51                     | 0                                 | 100            | V                 | 38.30            | 12.68                 | 38.15                | 61.34                        | 74                | -12.66         | PK                    |
| 10560                   | 48.04                     | 0                                 | 100            | H                 | 38.30            | 12.68                 | 38.15                | 60.87                        | 74                | -13.13         | PK                    |
| 10560                   | 35.94                     | 0                                 | 100            | V                 | 38.30            | 12.68                 | 38.15                | 48.77                        | 54                | -5.23          | Ave                   |
| 10560                   | 35.93                     | 0                                 | 100            | H                 | 38.30            | 12.68                 | 38.15                | 48.76                        | 54                | -5.24          | Ave                   |
| 15840                   | 47.83                     | 0                                 | 100            | V                 | 38.60            | 15.86                 | 37.11                | 65.18                        | 74                | -8.82          | PK                    |
| 15840                   | 47.41                     | 0                                 | 100            | H                 | 38.60            | 15.86                 | 37.11                | 64.76                        | 74                | -9.24          | PK                    |
| 15840                   | 35.40                     | 0                                 | 100            | V                 | 38.60            | 15.86                 | 37.11                | 52.75                        | 54                | -1.25          | Ave                   |
| 15840                   | 35.38                     | 0                                 | 100            | H                 | 38.60            | 15.86                 | 37.11                | 52.73                        | 54                | -1.27          | Ave                   |
| High Channel 5320 MHz   |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5320                    | 64.02                     | 41                                | 215            | H                 | 33.58            | 8.20                  | 0.00                 | 105.80                       | -                 | -              | PK                    |
| 5320                    | 55.78                     | 41                                | 215            | H                 | 33.58            | 8.20                  | 0.00                 | 97.56                        | -                 | -              | Ave                   |
| 5320                    | 64.31                     | 360                               | 212            | V                 | 33.58            | 8.20                  | 0.00                 | 106.09                       | -                 | -              | PK                    |
| 5320                    | 55.92                     | 360                               | 212            | V                 | 33.58            | 8.20                  | 0.00                 | 97.70                        | -                 | -              | Ave                   |
| 5350                    | 64.14                     | 0                                 | 210            | V                 | 33.52            | 8.23                  | 38.42                | 67.47                        | 74                | -6.53          | PK                    |
| 5350                    | 41.86                     | 0                                 | 211            | V                 | 33.52            | 8.23                  | 38.42                | 45.19                        | 54                | -8.81          | Ave                   |
| 10640                   | 47.73                     | 0                                 | 100            | V                 | 38.22            | 12.49                 | 38.14                | 60.30                        | 74                | -13.70         | PK                    |
| 10640                   | 47.39                     | 0                                 | 100            | H                 | 38.22            | 12.49                 | 38.14                | 59.96                        | 74                | -14.04         | PK                    |
| 10640                   | 36.13                     | 0                                 | 100            | V                 | 38.22            | 12.49                 | 38.14                | 48.70                        | 54                | -5.30          | Ave                   |
| 10640                   | 36.14                     | 0                                 | 100            | H                 | 38.22            | 12.49                 | 38.14                | 48.71                        | 54                | -5.29          | Ave                   |
| 15960                   | 47.8                      | 0                                 | 100            | V                 | 38.47            | 16.04                 | 37.2                 | 65.11                        | 74                | -8.89          | PK                    |
| 15960                   | 47.26                     | 0                                 | 100            | H                 | 38.47            | 16.04                 | 37.2                 | 64.57                        | 74                | -9.43          | PK                    |
| 15960                   | 36.10                     | 0                                 | 100            | V                 | 38.47            | 16.04                 | 37.2                 | 53.41                        | 54                | -0.59          | Ave                   |
| 15960                   | 36.08                     | 0                                 | 100            | H                 | 38.47            | 16.04                 | 37.2                 | 53.39                        | 54                | -0.61          | Ave                   |

## 802.11n40 mode

| Frequency<br>(MHz)    | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|-----------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                       |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| Low Channel 5270 MHz  |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5510                  | 59.46                     | 44                                | 100            | H                 | 33.85            | 8.46                  | 0.00                 | 101.77                       | -                 | -              | PK                    |
| 5510                  | 49.34                     | 44                                | 100            | H                 | 33.85            | 8.46                  | 0.00                 | 91.65                        | -                 | -              | Ave                   |
| 5510                  | 59.85                     | 0                                 | 211            | V                 | 33.85            | 8.46                  | 0.00                 | 102.16                       | -                 | -              | PK                    |
| 5510                  | 50.69                     | 0                                 | 211            | V                 | 33.85            | 8.46                  | 0.00                 | 93.00                        | -                 | -              | Ave                   |
| 5470                  | 68.25                     | 0                                 | 199            | V                 | 33.85            | 8.29                  | 37.98                | 72.40                        | 74                | -1.60          | PK                    |
| 5470                  | 46.68                     | 0                                 | 194            | V                 | 33.85            | 8.29                  | 37.98                | 50.82                        | 54                | -3.18          | Ave                   |
| 11020                 | 47.33                     | 0                                 | 100            | V                 | 38.29            | 12.92                 | 38.08                | 60.46                        | 74                | -13.54         | PK                    |
| 11020                 | 47.1                      | 0                                 | 100            | H                 | 38.29            | 12.92                 | 38.08                | 60.23                        | 74                | -13.77         | PK                    |
| 11020                 | 36.26                     | 0                                 | 100            | V                 | 38.29            | 12.92                 | 38.08                | 49.39                        | 54                | -4.61          | Ave                   |
| 11020                 | 36.23                     | 0                                 | 100            | H                 | 38.29            | 12.92                 | 38.08                | 49.36                        | 54                | -4.64          | Ave                   |
| 16530                 | 47.61                     | 0                                 | 100            | V                 | 38.52            | 16.17                 | 37.32                | 64.98                        | 68.26             | -3.28          | PK                    |
| 16530                 | 47.82                     | 0                                 | 100            | H                 | 38.52            | 16.17                 | 37.32                | 65.19                        | 68.26             | -3.07          | PK                    |
| High Channel 5310 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5310                  | 61.06                     | 42                                | 198            | H                 | 33.58            | 8.20                  | 0.00                 | 102.84                       | -                 | -              | PK                    |
| 5310                  | 50.82                     | 42                                | 198            | H                 | 33.58            | 8.20                  | 0.00                 | 92.60                        | -                 | -              | Ave                   |
| 5310                  | 61.14                     | 344                               | 197            | V                 | 33.58            | 8.20                  | 0.00                 | 102.92                       | -                 | -              | PK                    |
| 5310                  | 52.01                     | 344                               | 197            | V                 | 33.58            | 8.20                  | 0.00                 | 93.79                        | -                 | -              | Ave                   |
| 5350                  | 68.26                     | 0                                 | 212            | V                 | 33.52            | 8.23                  | 38.42                | 71.59                        | 74                | -2.41          | PK                    |
| 5350                  | 47.51                     | 0                                 | 222            | V                 | 33.52            | 8.23                  | 38.42                | 50.84                        | 54                | -3.16          | Ave                   |
| 10620                 | 46.95                     | 0                                 | 100            | V                 | 38.25            | 12.56                 | 38.2                 | 59.56                        | 74                | -14.44         | PK                    |
| 10620                 | 47.15                     | 0                                 | 100            | H                 | 38.25            | 12.56                 | 38.2                 | 59.76                        | 74                | -14.24         | PK                    |
| 10620                 | 35.83                     | 0                                 | 100            | V                 | 38.25            | 12.56                 | 38.2                 | 48.44                        | 54                | -5.56          | Ave                   |
| 10620                 | 35.86                     | 0                                 | 100            | H                 | 38.25            | 12.56                 | 38.2                 | 48.47                        | 54                | -5.53          | Ave                   |
| 15930                 | 47.57                     | 0                                 | 100            | V                 | 38.48            | 15.98                 | 37.21                | 64.82                        | 74                | -9.18          | PK                    |
| 15930                 | 47.42                     | 0                                 | 100            | H                 | 38.48            | 15.98                 | 37.21                | 64.67                        | 74                | -9.33          | PK                    |
| 15930                 | 36.06                     | 0                                 | 100            | V                 | 38.48            | 15.98                 | 37.21                | 53.31                        | 54                | -0.69          | Ave                   |
| 15930                 | 36.05                     | 0                                 | 100            | H                 | 38.48            | 15.98                 | 37.21                | 53.30                        | 54                | -0.70          | Ave                   |

## 802.11ac80 mode

| Frequency<br>(MHz) | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|--------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                    |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| 5290 MHz           |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5290               | 59.58                     | 39                                | 232            | H                 | 33.5             | 8.20                  | 0.00                 | 101.28                       | -                 | -              | PK                    |
| 5290               | 49.12                     | 39                                | 232            | H                 | 33.5             | 8.20                  | 0.00                 | 90.82                        | -                 | -              | Ave                   |
| 5290               | 60.48                     | 21                                | 263            | V                 | 33.5             | 8.20                  | 0.00                 | 102.18                       | -                 | -              | PK                    |
| 5290               | 48.01                     | 21                                | 263            | V                 | 33.5             | 8.20                  | 0.00                 | 89.71                        | -                 | -              | Ave                   |
| 5350               | 62.81                     | 0                                 | 212            | V                 | 33.52            | 8.23                  | 38.42                | 66.14                        | 74                | -7.86          | PK                    |
| 5350               | 48.82                     | 0                                 | 203            | V                 | 33.52            | 8.23                  | 38.42                | 52.15                        | 54                | -1.85          | Ave                   |
| 10580              | 47.03                     | 0                                 | 100            | V                 | 38.28            | 13.29                 | 38.21                | 60.39                        | 68.26             | -7.87          | PK                    |
| 10580              | 46.88                     | 0                                 | 100            | H                 | 38.28            | 13.29                 | 38.21                | 60.24                        | 68.26             | -8.02          | PK                    |
| 15870              | 47.88                     | 0                                 | 100            | V                 | 38.56            | 15.9                  | 37.15                | 65.19                        | 74                | -8.81          | PK                    |
| 15870              | 48.06                     | 0                                 | 100            | H                 | 38.56            | 15.9                  | 37.15                | 65.37                        | 74                | -8.63          | PK                    |
| 15870              | 36.01                     | 0                                 | 100            | V                 | 38.56            | 15.9                  | 37.15                | 53.32                        | 54                | -0.68          | Ave                   |
| 15870              | 36.02                     | 0                                 | 100            | H                 | 38.56            | 15.9                  | 37.15                | 53.33                        | 54                | -0.67          | Ave                   |

**5470 - 5725 MHz**

802.11a mode

| Frequency<br>(MHz)      | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|-------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                         |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| Low Channel 5500 MHz    |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5500                    | 62.09                     | 39                                | 100            | H                 | 33.85            | 8.46                  | 0.00                 | 104.40                       | -                 | -              | PK                    |
| 5500                    | 54.68                     | 39                                | 100            | H                 | 33.85            | 8.46                  | 0.00                 | 96.99                        | -                 | -              | Ave                   |
| 5500                    | 63.58                     | 360                               | 220            | V                 | 33.85            | 8.46                  | 0.00                 | 105.89                       | -                 | -              | PK                    |
| 5500                    | 55.02                     | 360                               | 220            | V                 | 33.85            | 8.46                  | 0.00                 | 97.33                        | -                 | -              | Ave                   |
| 5470                    | 58.80                     | 0                                 | 270            | V                 | 33.85            | 8.29                  | 37.98                | 62.95                        | 74                | -11.1          | PK                    |
| 5470                    | 40.20                     | 0                                 | 194            | V                 | 33.85            | 8.29                  | 37.98                | 44.35                        | 54                | -9.65          | Ave                   |
| 11000                   | 46.49                     | 0                                 | 100            | V                 | 38.28            | 13.02                 | 38.06                | 59.73                        | 74                | -14.3          | PK                    |
| 11000                   | 46.86                     | 0                                 | 100            | H                 | 38.28            | 13.02                 | 38.06                | 60.10                        | 74                | -13.9          | PK                    |
| 11000                   | 35.32                     | 0                                 | 100            | V                 | 38.28            | 13.02                 | 38.06                | 48.56                        | 54                | -5.44          | Ave                   |
| 11000                   | 35.33                     | 0                                 | 100            | H                 | 38.28            | 13.02                 | 38.06                | 48.57                        | 54                | -5.43          | Ave                   |
| 16500                   | 47.99                     | 0                                 | 100            | V                 | 38.51            | 16.15                 | 37.32                | 65.33                        | 68.26             | -2.93          | PK                    |
| 16500                   | 48.11                     | 0                                 | 100            | H                 | 38.51            | 16.15                 | 37.32                | 65.45                        | 68.26             | -2.81          | PK                    |
| Middle Channel 5580 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5580                    | 62.97                     | 37                                | 100            | H                 | 33.88            | 8.41                  | 0.00                 | 105.26                       | -                 | -              | PK                    |
| 5580                    | 54.35                     | 37                                | 100            | H                 | 33.88            | 8.41                  | 0.00                 | 96.64                        | -                 | -              | Ave                   |
| 5580                    | 64.07                     | 0                                 | 236            | V                 | 33.88            | 8.41                  | 0.00                 | 106.36                       | -                 | -              | PK                    |
| 5580                    | 56.08                     | 0                                 | 236            | V                 | 33.88            | 8.41                  | 0.00                 | 98.37                        | -                 | -              | Ave                   |
| 11160                   | 47.46                     | 0                                 | 100            | V                 | 38.45            | 13.46                 | 38.04                | 61.33                        | 74                | -12.7          | PK                    |
| 11160                   | 47.29                     | 0                                 | 100            | H                 | 38.45            | 13.46                 | 38.04                | 61.16                        | 74                | -12.8          | PK                    |
| 11160                   | 35.85                     | 0                                 | 100            | V                 | 38.45            | 13.46                 | 38.04                | 49.72                        | 54                | -4.28          | Ave                   |
| 11160                   | 35.87                     | 0                                 | 100            | H                 | 38.45            | 13.46                 | 38.04                | 49.74                        | 54                | -4.26          | Ave                   |
| 16740                   | 47.05                     | 0                                 | 100            | V                 | 38.81            | 16.38                 | 37.28                | 64.96                        | 68.26             | -3.30          | PK                    |
| 16740                   | 47.27                     | 0                                 | 100            | H                 | 38.81            | 16.38                 | 37.28                | 65.18                        | 68.26             | -3.08          | PK                    |
| 5700 MHz                |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5700                    | 62.01                     | 40                                | 100            | H                 | 33.87            | 8.62                  | 0.00                 | 104.50                       | -                 | -              | PK                    |
| 5700                    | 53.76                     | 40                                | 100            | H                 | 33.87            | 8.62                  | 0.00                 | 96.25                        | -                 | -              | Ave                   |
| 5700                    | 64.45                     | 0                                 | 218            | V                 | 33.87            | 8.62                  | 0.00                 | 106.94                       | -                 | -              | PK                    |
| 5700                    | 55.69                     | 0                                 | 218            | V                 | 33.87            | 8.62                  | 0.00                 | 98.18                        | -                 | -              | Ave                   |
| 5725                    | 65.80                     | 0                                 | 219            | V                 | 33.87            | 8.62                  | 37.90                | 70.39                        | 74                | -3.61          | PK                    |
| 5725                    | 41.67                     | 0                                 | 203            | V                 | 33.87            | 8.62                  | 37.90                | 46.27                        | 54                | -7.73          | Ave                   |
| 11400                   | 47.29                     | 0                                 | 100            | V                 | 38.50            | 13.44                 | 37.91                | 61.32                        | 74                | -12.7          | PK                    |
| 11400                   | 47.18                     | 0                                 | 100            | H                 | 38.50            | 13.44                 | 37.91                | 61.21                        | 74                | -12.8          | PK                    |
| 11400                   | 35.79                     | 0                                 | 100            | V                 | 38.50            | 13.44                 | 37.91                | 49.82                        | 54                | -4.18          | Ave                   |
| 11400                   | 35.77                     | 0                                 | 100            | H                 | 38.50            | 13.44                 | 37.91                | 49.80                        | 54                | -4.20          | Ave                   |
| 17100                   | 47.79                     | 0                                 | 100            | V                 | 41.03            | 16.43                 | 37.12                | 68.13                        | 68.26             | -0.13          | PK                    |
| 17100                   | 47.66                     | 0                                 | 100            | H                 | 41.03            | 16.43                 | 37.12                | 68.00                        | 68.26             | -0.26          | PK                    |

| Frequency<br>(MHz)    | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|-----------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                       |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| High Channel 5720 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5720                  | 61.36                     | 38                                | 100            | H                 | 33.87            | 8.62                  | 0.00                 | 103.85                       | -                 | -              | PK                    |
| 5720                  | 53.39                     | 38                                | 100            | H                 | 33.87            | 8.62                  | 0.00                 | 95.88                        | -                 | -              | Ave                   |
| 5720                  | 63.47                     | 0                                 | 224            | V                 | 33.87            | 8.62                  | 0.00                 | 105.96                       | -                 | -              | PK                    |
| 5720                  | 55.72                     | 0                                 | 224            | V                 | 33.87            | 8.62                  | 0.00                 | 98.21                        | -                 | -              | Ave                   |
| 11440                 | 46.52                     | 0                                 | 100            | V                 | 38.46            | 13.33                 | 37.9                 | 60.41                        | 74                | -13.6          | PK                    |
| 11440                 | 46.29                     | 0                                 | 100            | H                 | 38.46            | 13.33                 | 37.9                 | 60.18                        | 74                | -13.8          | PK                    |
| 11440                 | 35.02                     | 0                                 | 100            | V                 | 38.46            | 13.33                 | 37.9                 | 48.91                        | 54                | -5.09          | Ave                   |
| 11440                 | 35.06                     | 0                                 | 100            | H                 | 38.46            | 13.33                 | 37.9                 | 48.95                        | 54                | -5.05          | Ave                   |

## 802.11n40 mode

| Frequency<br>(MHz)      | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|-------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                         |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| Low Channel 5510 MHz    |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5510                    | 59.46                     | 44                                | 100            | H                 | 33.85            | 8.46                  | 0.00                 | 101.77                       | -                 | -              | PK                    |
| 5510                    | 49.34                     | 44                                | 100            | H                 | 33.85            | 8.46                  | 0.00                 | 91.65                        | -                 | -              | Ave                   |
| 5510                    | 59.85                     | 0                                 | 211            | V                 | 33.85            | 8.46                  | 0.00                 | 102.16                       | -                 | -              | PK                    |
| 5510                    | 50.69                     | 0                                 | 211            | V                 | 33.85            | 8.46                  | 0.00                 | 93.00                        | -                 | -              | Ave                   |
| 5470                    | 68.25                     | 0                                 | 199            | V                 | 33.85            | 8.29                  | 37.98                | 72.40                        | 74                | -1.60          | PK                    |
| 5470                    | 46.68                     | 0                                 | 194            | V                 | 33.85            | 8.29                  | 37.98                | 50.82                        | 54                | -3.18          | Ave                   |
| 11020                   | 47.33                     | 0                                 | 100            | V                 | 38.29            | 12.92                 | 38.08                | 60.46                        | 74                | -13.5          | PK                    |
| 11020                   | 47.1                      | 0                                 | 100            | H                 | 38.29            | 12.92                 | 38.08                | 60.23                        | 74                | -13.8          | PK                    |
| 11020                   | 36.26                     | 0                                 | 100            | V                 | 38.29            | 12.92                 | 38.08                | 49.39                        | 54                | -4.61          | Ave                   |
| 11020                   | 36.23                     | 0                                 | 100            | H                 | 38.29            | 12.92                 | 38.08                | 49.36                        | 54                | -4.64          | Ave                   |
| 16530                   | 47.61                     | 0                                 | 100            | V                 | 38.52            | 16.17                 | 37.32                | 64.98                        | 68.26             | -3.28          | PK                    |
| 16530                   | 47.82                     | 0                                 | 100            | H                 | 38.52            | 16.17                 | 37.32                | 65.19                        | 68.26             | -3.07          | PK                    |
| Middle Channel 5550 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5550                    | 59.56                     | 43                                | 100            | H                 | 33.88            | 8.48                  | 0.00                 | 101.92                       | -                 | -              | PK                    |
| 5550                    | 50.94                     | 43                                | 100            | H                 | 33.88            | 8.48                  | 0.00                 | 93.30                        | -                 | -              | Ave                   |
| 5550                    | 62.80                     | 360                               | 243            | V                 | 33.88            | 8.48                  | 0.00                 | 105.16                       | -                 | -              | PK                    |
| 5550                    | 52.92                     | 360                               | 243            | V                 | 33.88            | 8.48                  | 0.00                 | 95.28                        | -                 | -              | Ave                   |
| 11100                   | 46.78                     | 0                                 | 100            | V                 | 38.37            | 13.29                 | 38.07                | 60.37                        | 74                | -13.6          | PK                    |
| 11100                   | 47.03                     | 0                                 | 100            | H                 | 38.37            | 13.29                 | 38.07                | 60.62                        | 74                | -13.4          | PK                    |
| 11100                   | 35.98                     | 0                                 | 100            | V                 | 38.37            | 13.29                 | 38.07                | 49.57                        | 54                | -4.43          | Ave                   |
| 11100                   | 35.96                     | 0                                 | 100            | H                 | 38.37            | 13.29                 | 38.07                | 49.55                        | 54                | -4.45          | Ave                   |
| 16650                   | 47.11                     | 0                                 | 100            | V                 | 38.61            | 16.29                 | 37.30                | 64.71                        | 68.26             | -3.55          | PK                    |
| 16650                   | 47.52                     | 0                                 | 100            | H                 | 38.61            | 16.29                 | 37.30                | 65.12                        | 68.26             | -3.14          | PK                    |
| 5670 MHz                |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5670                    | 59.03                     | 39                                | 146            | H                 | 33.87            | 8.46                  | 0.00                 | 101.36                       | -                 | -              | PK                    |
| 5670                    | 48.78                     | 39                                | 146            | H                 | 33.87            | 8.46                  | 0.00                 | 91.11                        | -                 | -              | Ave                   |
| 5670                    | 60.57                     | 0                                 | 201            | V                 | 33.87            | 8.46                  | 0.00                 | 102.90                       | -                 | -              | PK                    |
| 5670                    | 51.12                     | 0                                 | 201            | V                 | 33.87            | 8.46                  | 0.00                 | 93.45                        | -                 | -              | Ave                   |
| 5725                    | 60.05                     | 0                                 | 214            | V                 | 33.87            | 8.62                  | 37.90                | 64.64                        | 74                | -9.36          | PK                    |
| 5725                    | 39.07                     | 0                                 | 199            | V                 | 33.87            | 8.62                  | 37.90                | 43.66                        | 54                | -10.3          | Ave                   |
| 11340                   | 45.41                     | 0                                 | 100            | V                 | 38.55            | 13.53                 | 37.93                | 59.56                        | 74                | -14.4          | PK                    |
| 11340                   | 45.63                     | 0                                 | 100            | H                 | 38.55            | 13.53                 | 37.93                | 59.78                        | 74                | -14.2          | PK                    |
| 11340                   | 35.69                     | 0                                 | 100            | V                 | 38.55            | 13.53                 | 37.93                | 49.84                        | 54                | -4.16          | Ave                   |
| 11340                   | 35.74                     | 0                                 | 100            | H                 | 38.55            | 13.53                 | 37.93                | 49.89                        | 54                | -4.11          | Ave                   |

| Frequency<br>(MHz)    | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|-----------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                       |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| High Channel 5710 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5710                  | 58.74                     | 37                                | 100            | H                 | 33.87            | 8.46                  | 0.00                 | 101.07                       | -                 | -              | PK                    |
| 5710                  | 49.81                     | 37                                | 100            | H                 | 33.87            | 8.46                  | 0.00                 | 92.14                        | -                 | -              | Ave                   |
| 5710                  | 60.56                     | 0                                 | 255            | V                 | 33.87            | 8.46                  | 0.00                 | 102.89                       | -                 | -              | PK                    |
| 5710                  | 51.53                     | 0                                 | 255            | V                 | 33.87            | 8.46                  | 0.00                 | 93.86                        | -                 | -              | Ave                   |
| 11420                 | 46.75                     | 0                                 | 100            | V                 | 38.48            | 13.37                 | 37.91                | 60.69                        | 74                | -13.3          | PK                    |
| 11420                 | 46.89                     | 0                                 | 100            | H                 | 38.48            | 13.37                 | 37.91                | 60.83                        | 74                | -13.2          | PK                    |
| 11420                 | 35.56                     | 0                                 | 100            | V                 | 38.48            | 13.37                 | 37.91                | 49.50                        | 54                | -4.50          | Ave                   |
| 11420                 | 35.57                     | 0                                 | 100            | H                 | 38.48            | 13.37                 | 37.91                | 49.51                        | 54                | -4.49          | Ave                   |

## 802.11ac80 mode

| Frequency<br>(MHz)       | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|--------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                          |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| Low Channel: 5530 MHz    |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5530                     | 58.61                     | 49                                | 112            | H                 | 33.85            | 8.46                  | 0.00                 | 100.92                       | -                 | -              | PK                    |
| 5530                     | 47.20                     | 49                                | 112            | H                 | 33.85            | 8.46                  | 0.00                 | 89.51                        | -                 | -              | Ave                   |
| 5530                     | 60.83                     | 0                                 | 155            | V                 | 33.85            | 8.46                  | 0.00                 | 103.14                       | -                 | -              | PK                    |
| 5530                     | 47.41                     | 0                                 | 155            | V                 | 33.85            | 8.46                  | 0.00                 | 89.72                        | -                 | -              | Ave                   |
| 5470                     | 63.58                     | 0                                 | 208            | V                 | 33.85            | 8.29                  | 37.98                | 67.73                        | 74                | -6.27          | PK                    |
| 5470                     | 47.72                     | 0                                 | 194            | V                 | 33.85            | 8.29                  | 37.98                | 51.87                        | 54                | -2.13          | Ave                   |
| 11060                    | 47.52                     | 0                                 | 100            | V                 | 38.33            | 13.12                 | 38.08                | 60.89                        | 74                | -13.1          | PK                    |
| 11060                    | 47.75                     | 0                                 | 100            | H                 | 38.33            | 13.12                 | 38.08                | 61.12                        | 74                | -12.9          | PK                    |
| 11060                    | 36.35                     | 0                                 | 100            | V                 | 38.33            | 13.12                 | 38.08                | 49.72                        | 54                | -4.28          | Ave                   |
| 11060                    | 36.39                     | 0                                 | 100            | H                 | 38.33            | 13.12                 | 38.08                | 49.76                        | 54                | -4.24          | Ave                   |
| 16590                    | 47.51                     | 0                                 | 100            | V                 | 38.55            | 16.23                 | 37.32                | 64.97                        | 68.26             | -3.29          | PK                    |
| 16590                    | 47.66                     | 0                                 | 100            | H                 | 38.55            | 16.23                 | 37.32                | 65.12                        | 68.26             | -3.14          | PK                    |
| Middle Channel: 5610 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5610                     | 57.53                     | 40                                | 100            | H                 | 33.92            | 8.46                  | 0.00                 | 99.91                        | -                 | -              | PK                    |
| 5610                     | 47.70                     | 40                                | 100            | H                 | 33.92            | 8.46                  | 0.00                 | 90.08                        | -                 | -              | Ave                   |
| 5610                     | 58.85                     | 2                                 | 230            | V                 | 33.92            | 8.46                  | 0.00                 | 101.23                       | -                 | -              | PK                    |
| 5610                     | 48.49                     | 2                                 | 230            | V                 | 33.92            | 8.46                  | 0.00                 | 90.87                        | -                 | -              | Ave                   |
| 5725                     | 53.95                     | 0                                 | 100            | V                 | 33.87            | 8.62                  | 37.90                | 58.54                        | 74                | -15.5          | PK                    |
| 5725                     | 40.15                     | 0                                 | 143            | V                 | 33.87            | 8.62                  | 37.90                | 44.74                        | 54                | -9.26          | Ave                   |
| 11220                    | 48.23                     | 0                                 | 100            | V                 | 38.53            | 13.61                 | 38.01                | 62.36                        | 74                | -11.6          | PK                    |
| 11220                    | 48.02                     | 0                                 | 100            | H                 | 38.53            | 13.61                 | 38.01                | 62.15                        | 74                | -11.9          | PK                    |
| 11220                    | 36.09                     | 0                                 | 100            | V                 | 38.53            | 13.61                 | 38.01                | 50.22                        | 54                | -3.78          | Ave                   |
| 11220                    | 36.12                     | 0                                 | 100            | H                 | 38.53            | 13.61                 | 38.01                | 50.25                        | 54                | -3.75          | Ave                   |
| 16830                    | 46.85                     | 0                                 | 100            | V                 | 39.08            | 16.46                 | 37.23                | 65.16                        | 68.26             | -3.10          | PK                    |
| 16830                    | 47.57                     | 0                                 | 100            | H                 | 39.08            | 16.46                 | 37.23                | 65.88                        | 68.26             | -2.38          | PK                    |
| High Channel: 5690 MHz   |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5690                     | 58.87                     | 36                                | 100            | H                 | 33.92            | 8.46                  | 0.00                 | 101.25                       | -                 | -              | PK                    |
| 5690                     | 47.56                     | 36                                | 100            | H                 | 33.92            | 8.46                  | 0.00                 | 89.94                        | -                 | -              | Ave                   |
| 5690                     | 60.62                     | 0                                 | 244            | V                 | 33.92            | 8.46                  | 0.00                 | 103.00                       | -                 | -              | PK                    |
| 5690                     | 48.85                     | 0                                 | 244            | V                 | 33.92            | 8.46                  | 0.00                 | 91.23                        | -                 | -              | Ave                   |
| 11380                    | 46.84                     | 0                                 | 100            | V                 | 38.51            | 13.49                 | 37.96                | 60.88                        | 74                | -13.1          | PK                    |
| 11380                    | 47.02                     | 0                                 | 100            | H                 | 38.51            | 13.49                 | 37.96                | 61.06                        | 74                | -12.9          | PK                    |
| 11380                    | 35.61                     | 0                                 | 100            | V                 | 38.51            | 13.49                 | 37.96                | 49.65                        | 54                | -4.35          | Ave                   |
| 11380                    | 35.64                     | 0                                 | 100            | H                 | 38.51            | 13.49                 | 37.96                | 49.68                        | 54                | -4.32          | Ave                   |
| 17070                    | 46.99                     | 0                                 | 100            | V                 | 40.7             | 16.43                 | 37.12                | 67.00                        | 68.26             | -1.26          | PK                    |
| 17070                    | 47.19                     | 0                                 | 100            | H                 | 40.7             | 16.43                 | 37.12                | 67.20                        | 68.26             | -1.06          | PK                    |

**5725 - 5850 MHz**

802.11a mode

| Frequency<br>(MHz)      | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|-------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                         |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| Low Channel 5745 MHz    |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5745                    | 61.13                     | 52                                | 100            | H                 | 33.55            | 8.11                  | 0.00                 | 102.79                       | -                 | -              | PK                    |
| 5745                    | 52.41                     | 52                                | 100            | H                 | 33.55            | 8.11                  | 0.00                 | 94.07                        | -                 | -              | Ave                   |
| 5745                    | 63.31                     | 0                                 | 204            | V                 | 33.55            | 8.11                  | 0.00                 | 104.97                       | -                 | -              | PK                    |
| 5745                    | 55.08                     | 0                                 | 204            | V                 | 33.55            | 8.11                  | 0.00                 | 96.74                        | -                 | -              | Ave                   |
| 5725                    | 67.57                     | 0                                 | 231            | V                 | 33.89            | 9.25                  | 38.29                | 72.42                        | 78.26             | -5.84          | PK                    |
| 5715                    | 63.33                     | 0                                 | 231            | V                 | 33.89            | 9.25                  | 38.29                | 68.18                        | 74                | -5.82          | PK                    |
| 5715                    | 42.97                     | 0                                 | 231            | V                 | 33.89            | 9.25                  | 38.29                | 47.82                        | 54                | -6.18          | Ave                   |
| 11490                   | 47.24                     | 0                                 | 100            | V                 | 38.42            | 13.19                 | 37.77                | 61.08                        | 74                | -12.9          | PK                    |
| 11490                   | 46.77                     | 0                                 | 100            | H                 | 38.42            | 13.19                 | 37.77                | 60.61                        | 74                | -13.4          | PK                    |
| 11490                   | 35.39                     | 0                                 | 100            | V                 | 38.42            | 13.19                 | 37.77                | 49.23                        | 54                | -4.77          | Ave                   |
| 11490                   | 35.37                     | 0                                 | 100            | H                 | 38.42            | 13.19                 | 37.77                | 49.21                        | 54                | -4.79          | Ave                   |
| Middle Channel 5785 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5785                    | 60.96                     | 46                                | 100            | H                 | 33.55            | 8.11                  | 0.00                 | 102.62                       | -                 | -              | PK                    |
| 5785                    | 52.39                     | 46                                | 100            | H                 | 33.55            | 8.11                  | 0.00                 | 94.05                        | -                 | -              | Ave                   |
| 5785                    | 63.43                     | 5                                 | 213            | V                 | 33.55            | 8.11                  | 0.00                 | 105.09                       | -                 | -              | PK                    |
| 5785                    | 54.55                     | 5                                 | 213            | V                 | 33.55            | 8.11                  | 0.00                 | 96.21                        | -                 | -              | Ave                   |
| 11570                   | 46.95                     | 0                                 | 100            | V                 | 38.31            | 13                    | 37.8                 | 60.46                        | 74                | -13.5          | PK                    |
| 11570                   | 47.15                     | 0                                 | 100            | H                 | 38.31            | 13                    | 37.8                 | 60.66                        | 74                | -13.3          | PK                    |
| 11570                   | 35.50                     | 0                                 | 100            | V                 | 38.31            | 13                    | 37.8                 | 49.01                        | 54                | -4.99          | Ave                   |
| 11570                   | 35.54                     | 0                                 | 100            | H                 | 38.31            | 13                    | 37.8                 | 49.05                        | 54                | -4.95          | Ave                   |
| High Channel 5825 MHz   |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5825                    | 60.94                     | 51                                | 100            | H                 | 33.55            | 8.11                  | 0.00                 | 102.60                       | -                 | -              | PK                    |
| 5825                    | 52.43                     | 51                                | 100            | H                 | 33.55            | 8.11                  | 0.00                 | 94.09                        | -                 | -              | Ave                   |
| 5825                    | 62.99                     | 0                                 | 225            | V                 | 33.55            | 8.11                  | 0.00                 | 104.65                       | -                 | -              | PK                    |
| 5825                    | 54.98                     | 0                                 | 225            | V                 | 33.55            | 8.11                  | 0.00                 | 96.64                        | -                 | -              | Ave                   |
| 5850                    | 64.37                     | 0                                 | 252            | V                 | 34.08            | 9.28                  | 38.28                | 69.45                        | 78.26             | -8.81          | PK                    |
| 5860                    | 59.69                     | 0                                 | 252            | V                 | 34.08            | 9.28                  | 38.28                | 64.77                        | 74                | -9.23          | PK                    |
| 5860                    | 41.58                     | 0                                 | 252            | V                 | 34.08            | 9.28                  | 38.28                | 46.66                        | 54                | -7.34          | Ave                   |
| 11650                   | 46.21                     | 0                                 | 100            | V                 | 38.31            | 12.94                 | 37.71                | 59.75                        | 74                | -14.3          | PK                    |
| 11650                   | 46.68                     | 0                                 | 100            | H                 | 38.31            | 12.94                 | 37.71                | 60.22                        | 74                | -13.8          | PK                    |
| 11650                   | 35.31                     | 0                                 | 100            | V                 | 38.31            | 12.94                 | 37.71                | 48.85                        | 54                | -5.15          | Ave                   |

## 802.11n40 mode

| Frequency<br>(MHz)    | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|-----------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                       |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| Low Channel 5755 MHz  |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5755                  | 57.66                     | 46                                | 100            | H                 | 33.55            | 8.11                  | 0.00                 | 99.32                        | -                 | -              | PK                    |
| 5755                  | 48.49                     | 46                                | 100            | H                 | 33.55            | 8.11                  | 0.00                 | 90.15                        | -                 | -              | Ave                   |
| 5755                  | 60.40                     | 0                                 | 239            | V                 | 33.55            | 8.11                  | 0.00                 | 102.06                       | -                 | -              | PK                    |
| 5755                  | 50.55                     | 0                                 | 239            | V                 | 33.55            | 8.11                  | 0.00                 | 92.21                        | -                 | -              | Ave                   |
| 5725                  | 69.83                     | 0                                 | 100            | V                 | 33.89            | 9.25                  | 38.29                | 74.68                        | 78.26             | -3.58          | PK                    |
| 5715                  | 68.29                     | 0                                 | 100            | V                 | 33.89            | 9.25                  | 38.29                | 73.14                        | 74                | -0.86          | PK                    |
| 5715                  | 44.33                     | 0                                 | 100            | V                 | 33.89            | 9.25                  | 38.29                | 49.18                        | 54                | -4.82          | Ave                   |
| 11510                 | 46.6                      | 0                                 | 100            | V                 | 38.4             | 13.21                 | 37.83                | 60.38                        | 74                | -13.6          | PK                    |
| 11510                 | 46.77                     | 0                                 | 100            | H                 | 38.4             | 13.21                 | 37.83                | 60.55                        | 74                | -13.5          | PK                    |
| 11510                 | 35.79                     | 0                                 | 100            | V                 | 38.4             | 13.21                 | 37.83                | 49.57                        | 54                | -4.43          | Ave                   |
| 11510                 | 35.84                     | 0                                 | 100            | H                 | 38.4             | 13.21                 | 37.83                | 49.62                        | 54                | -4.38          | Ave                   |
| High Channel 5795 MHz |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5795                  | 58.54                     | 36                                | 100            | H                 | 33.55            | 8.11                  | 0.00                 | 100.20                       | -                 | -              | PK                    |
| 5795                  | 48.87                     | 36                                | 100            | H                 | 33.55            | 8.11                  | 0.00                 | 90.53                        | -                 | -              | Ave                   |
| 5795                  | 60.53                     | 0                                 | 197            | V                 | 33.55            | 8.11                  | 0.00                 | 102.19                       | -                 | -              | PK                    |
| 5795                  | 51.31                     | 0                                 | 197            | V                 | 33.55            | 8.11                  | 0.00                 | 92.97                        | -                 | -              | Ave                   |
| 5850                  | 58.98                     | 0                                 | 100            | V                 | 34.08            | 9.28                  | 38.28                | 64.06                        | 78.26             | -14.2          | PK                    |
| 5860                  | 59.28                     | 0                                 | 100            | V                 | 34.08            | 9.28                  | 38.28                | 64.36                        | 74                | -9.64          | PK                    |
| 5860                  | 40.36                     | 0                                 | 100            | V                 | 34.08            | 9.28                  | 38.28                | 45.44                        | 54                | -8.56          | Ave                   |
| 11590                 | 46.48                     | 0                                 | 100            | V                 | 38.3             | 12.95                 | 37.8                 | 59.93                        | 74                | -14.1          | PK                    |
| 11590                 | 47.04                     | 0                                 | 100            | H                 | 38.3             | 12.95                 | 37.8                 | 60.49                        | 74                | -13.5          | PK                    |
| 11590                 | 35.51                     | 0                                 | 100            | V                 | 38.3             | 12.95                 | 37.8                 | 48.96                        | 54                | -5.04          | Ave                   |
| 11590                 | 35.45                     | 0                                 | 100            | H                 | 38.3             | 12.95                 | 37.8                 | 48.90                        | 54                | -5.10          | Ave                   |

## 802.11ac80 mode

| Frequency<br>(MHz) | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC/IC            |                | Comments<br>(PK/Ave.) |
|--------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|-----------------------|
|                    |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |                       |
| 5775 MHz           |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |                       |
| 5775               | 57.23                     | 43                                | 106            | H                 | 33.55            | 8.11                  | 0.00                 | 98.89                        | -                 | -              | PK                    |
| 5775               | 45.22                     | 43                                | 106            | H                 | 33.55            | 8.11                  | 0.00                 | 86.88                        | -                 | -              | Ave                   |
| 5775               | 58.70                     | 0                                 | 201            | V                 | 33.55            | 8.11                  | 0.00                 | 100.36                       | -                 | -              | PK                    |
| 5775               | 47.22                     | 0                                 | 201            | V                 | 33.55            | 8.11                  | 0.00                 | 88.88                        | -                 | -              | Ave                   |
| 5725               | 64.91                     | 0                                 | 100            | V                 | 33.89            | 9.25                  | 38.29                | 69.76                        | 78.26             | -8.50          | PK                    |
| 5715               | 63.07                     | 0                                 | 100            | V                 | 33.89            | 9.25                  | 38.29                | 67.92                        | 74                | -6.08          | PK                    |
| 5715               | 44.45                     | 0                                 | 100            | V                 | 33.89            | 9.25                  | 38.29                | 49.30                        | 54                | -4.70          | Ave                   |
| 5850               | 60.26                     | 0                                 | 100            | V                 | 34.08            | 9.28                  | 38.28                | 65.34                        | 78.26             | -12.9          | PK                    |
| 5860               | 56.48                     | 0                                 | 100            | V                 | 34.08            | 9.28                  | 38.28                | 61.56                        | 74                | -12.4          | PK                    |
| 5860               | 45.84                     | 0                                 | 100            | V                 | 34.08            | 9.28                  | 38.28                | 50.92                        | 54                | -3.08          | Ave                   |
| 11550              | 47.66                     | 0                                 | 100            | V                 | 38.35            | 13.04                 | 37.82                | 61.23                        | 74                | -12.8          | PK                    |
| 11550              | 47.23                     | 0                                 | 100            | H                 | 38.35            | 13.04                 | 37.82                | 60.80                        | 74                | -13.2          | PK                    |
| 11550              | 35.95                     | 0                                 | 100            | V                 | 38.35            | 13.04                 | 37.82                | 49.52                        | 54                | -4.48          | Ave                   |

Note 1: Any emissions above 12 GHz are the noise floor.

Note 2: Duty Cycle Correction Factor has been added to the measurements.

Note 3: IC limits were applied for emissions outside of the restricted bands since it's lower than the FCC limits.

## 8 FCC §15.407(e) & ISED RSS-247 §6.2 - Emission Bandwidth

### 8.1 Applicable Standards

As per FCC §15.407(e) and IC RSS-247 6.2.4(1): for equipment operating in the band 5725 – 5850 MHz, the minimum 6 dB bandwidth of U-NII devices shall be 500 kHz.

### 8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 or 26 dB from the reference level. Record the frequency difference as the minimum emission or emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### 8.3 Test Equipment List and Details

| Manufacturer | Description        | Model No. | Serial No. | Calibration Date       | Calibration Interval |
|--------------|--------------------|-----------|------------|------------------------|----------------------|
| Agilent      | Analyzer, Spectrum | E4446A    | US44300386 | 2015-10-22             | 1 year               |
| -            | 10dB attenuator    | -         | -          | Each time <sup>1</sup> | N/A                  |

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 8.4 Test Environmental Conditions

|                             |                 |
|-----------------------------|-----------------|
| <b>Test Date:</b>           | 2016-07-31      |
| <b>Test Site:</b>           | RF Test Site    |
| <b>Temperature:</b>         | 22-24° C        |
| <b>Relative Humidity:</b>   | 40-41 %         |
| <b>Barometric Pressure:</b> | 103.1-104.1 kPa |
| <b>Test Personnel:</b>      | Frank Wang      |

### 8.5 Test Results

Please refer to the following tables and plots.

**5150 - 5250 MHz**

| <b>Channel</b>         | <b>Frequency<br/>(MHz)</b> | <b>99% OBW<br/>(kHz)</b> | <b>26 dB OBW<br/>(kHz)</b> |
|------------------------|----------------------------|--------------------------|----------------------------|
| <b>802.11 a mode</b>   |                            |                          |                            |
| 36                     | 5180                       | 16220.22                 | 18716                      |
| 40                     | 5200                       | 16271.6                  | 18790                      |
| 48                     | 5240                       | 16282.7                  | 19022                      |
| <b>802.11n20 mode</b>  |                            |                          |                            |
| 36                     | 5180                       | 17409.7                  | 19139                      |
| 40                     | 5200                       | 17376.5                  | 19963                      |
| 48                     | 5240                       | 17362.2                  | 19371                      |
| <b>802.11n40 mode</b>  |                            |                          |                            |
| 38                     | 5190                       | 35734.5                  | 39475                      |
| 46                     | 5230                       | 35778.4                  | 38854                      |
| <b>802.11ac20 mode</b> |                            |                          |                            |
| 36                     | 5180                       | 17448.2                  | 19351                      |
| 40                     | 5200                       | 17399.6                  | 19641                      |
| 48                     | 5240                       | 17413.4                  | 19632                      |
| <b>802.11ac40 mode</b> |                            |                          |                            |
| 38                     | 5190                       | 35785.5                  | 39298                      |
| 46                     | 5230                       | 35703.7                  | 39234                      |
| <b>802.11ac80 mode</b> |                            |                          |                            |
| 42                     | 5210                       | 74773                    | 81341                      |

**5250 - 5350 MHz**

| <b>Channel</b>  | <b>Frequency<br/>(MHz)</b> | <b>99% OBW<br/>(kHz)</b> | <b>26 dB OBW<br/>(kHz)</b> |
|-----------------|----------------------------|--------------------------|----------------------------|
| 802.11 a mode   |                            |                          |                            |
| 52              | 5260                       | 16270.6                  | 19107                      |
| 56              | 5280                       | 16266.5                  | 18638                      |
| 64              | 5320                       | 16251.4                  | 18936                      |
| 802.11n20 mode  |                            |                          |                            |
| 52              | 5260                       | 17394.2                  | 19442                      |
| 56              | 5280                       | 17420.3                  | 19356                      |
| 64              | 5320                       | 17427.6                  | 19885                      |
| 802.11n40 mode  |                            |                          |                            |
| 54              | 5270                       | 35724.3                  | 40371                      |
| 62              | 5310                       | 35726.2                  | 39860                      |
| 802.11ac20 mode |                            |                          |                            |
| 52              | 5260                       | 17389.2                  | 19743                      |
| 56              | 5280                       | 17415.2                  | 19199                      |
| 64              | 5320                       | 17374.1                  | 19120                      |
| 802.11ac40 mode |                            |                          |                            |
| 54              | 5270                       | 35783.2                  | 39728                      |
| 62              | 5310                       | 35770.6                  | 39393                      |
| 802.11ac80 mode |                            |                          |                            |
| 58              | 5290                       | 74809                    | 81721                      |

**5470 - 5725 MHz**

| <b>Channel</b>  | <b>Frequency<br/>(MHz)</b> | <b>99% OBW<br/>(kHz)</b> | <b>26 dB OBW<br/>(kHz)</b> |
|-----------------|----------------------------|--------------------------|----------------------------|
| 802.11 a mode   |                            |                          |                            |
| 100             | 5500                       | 17430.9                  | 19322                      |
| 116             | 5580                       | 17454.9                  | 19128                      |
| 140             | 5700                       | 17394.1                  | 19444                      |
| 144             | 5720                       | 17459.7                  | 19711                      |
| 802.11n20 mode  |                            |                          |                            |
| 100             | 5500                       | 17388.8                  | 19085                      |
| 116             | 5580                       | 17436.1                  | 19780                      |
| 140             | 5700                       | 17413.9                  | 19355                      |
| 144             | 5720                       | 17402.1                  | 19389                      |
| 802.11n40 mode  |                            |                          |                            |
| 102             | 5510                       | 35724.3                  | 39014                      |
| 110             | 5550                       | 35866.6                  | 40269                      |
| 134             | 5670                       | 35737                    | 38735                      |
| 142             | 5710                       | 35756.8                  | 39607                      |
| 802.11ac20 mode |                            |                          |                            |
| 100             | 5500                       | 17430.9                  | 19322                      |
| 116             | 5580                       | 17454.9                  | 19128                      |
| 140             | 5700                       | 17394.1                  | 19444                      |
| 144             | 5720                       | 17459.7                  | 19771                      |
| 802.11ac40 mode |                            |                          |                            |
| 102             | 5510                       | 35704.6                  | 39733                      |
| 110             | 5550                       | 35716.1                  | 39307                      |
| 134             | 5670                       | 35758.6                  | 40319                      |
| 142             | 5710                       | 35753.2                  | 40414                      |
| 802.11ac80 mode |                            |                          |                            |
| 106             | 5530                       | 74707.4                  | 80390                      |
| 122             | 5610                       | 74675.2                  | 82128                      |
| 138             | 5690                       | 74886.8                  | 81373                      |


**5725 - 5850 MHz**

| <b>Channel</b>  | <b>Frequency<br/>(MHz)</b> | <b>99% OBW<br/>(kHz)</b> | <b>6 dB OBW<br/>(kHz)</b> |
|-----------------|----------------------------|--------------------------|---------------------------|
| 802.11 a mode   |                            |                          |                           |
| 149             | 5745                       | 16273                    | 16364                     |
| 157             | 5785                       | 16257.5                  | 14418                     |
| 165             | 5825                       | 16264.5                  | 16319                     |
| 802.11n20 mode  |                            |                          |                           |
| 149             | 5745                       | 17448.3                  | 14796                     |
| 157             | 5785                       | 17373.8                  | 15570                     |
| 165             | 5825                       | 17433.4                  | 15316                     |
| 802.11n40 mode  |                            |                          |                           |
| 151             | 5755                       | 35684.2                  | 30909                     |
| 159             | 5795                       | 35739.4                  | 30327                     |
| 802.11ac20 mode |                            |                          |                           |
| 149             | 5745                       | 17455.7                  | 13763                     |
| 157             | 5785                       | 17390.5                  | 15166                     |
| 165             | 5825                       | 17446.9                  | 17580                     |
| 802.11ac40 mode |                            |                          |                           |
| 151             | 5755                       | 35724.5                  | 29296                     |
| 159             | 5795                       | 35699.2                  | 29733                     |
| 802.11ac80 mode |                            |                          |                           |
| 155             | 5775                       | 74925.8                  | 66683                     |


5150 – 5250 MHz

802.11a mode


5180 MHz

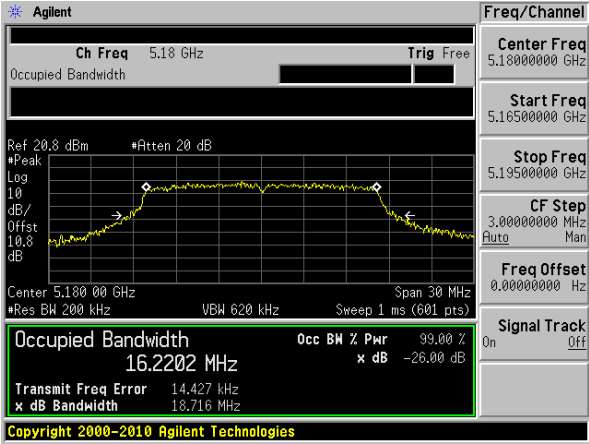

5200 MHz

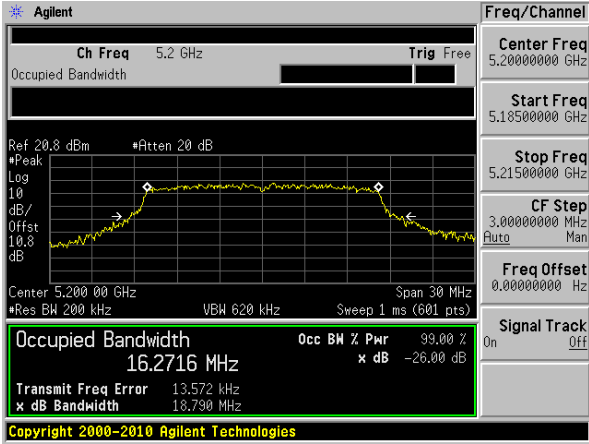


5240 MHz

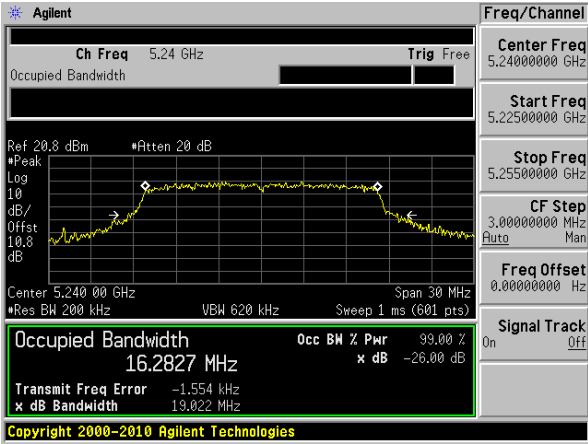


802.11n20


5180 MHz

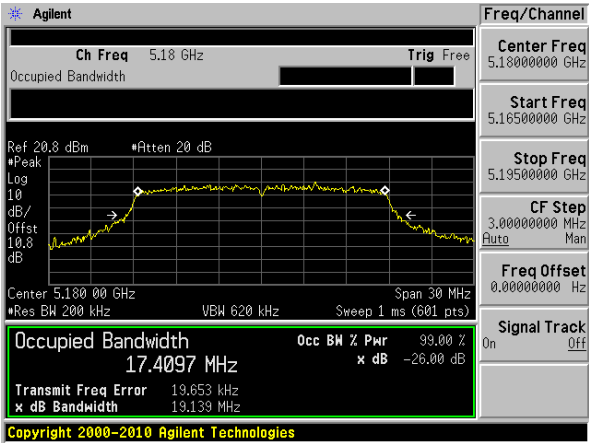

5200 MHz

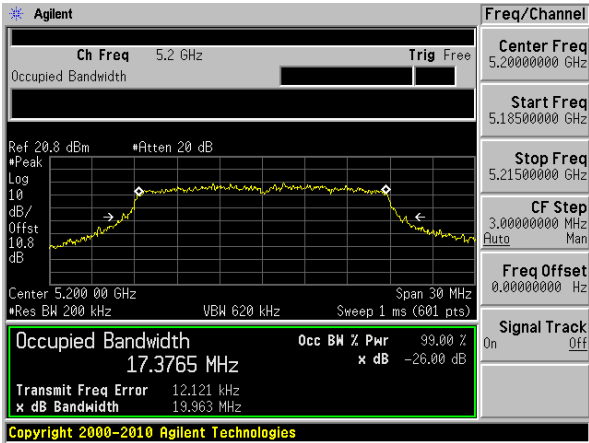

5240 MHz

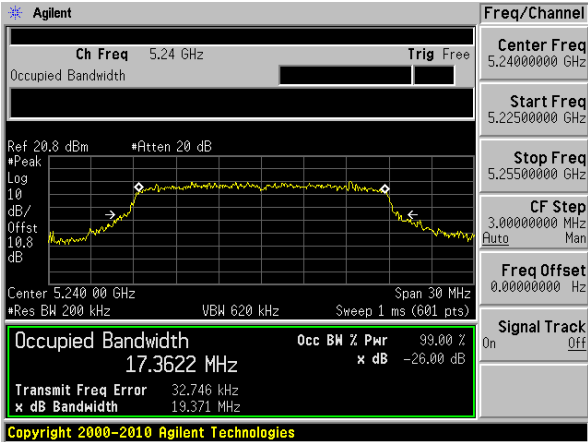


802.11n40 mode




802.11ac20 mode


5180 MHz

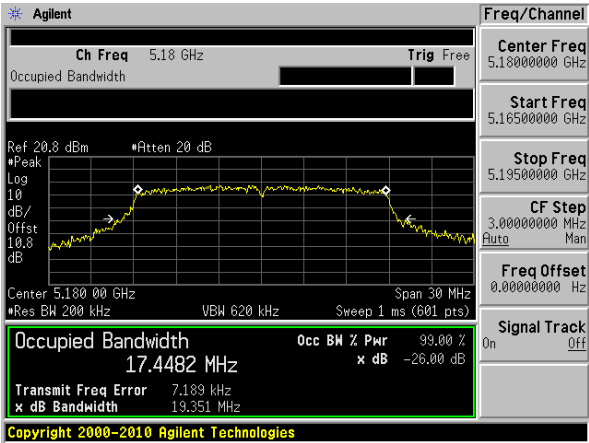

5200 MHz

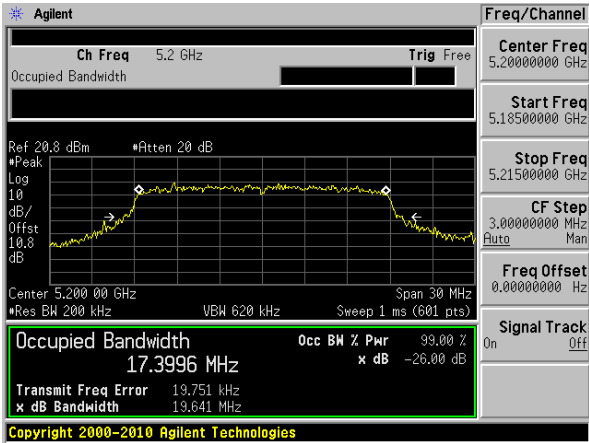


5240 MHz

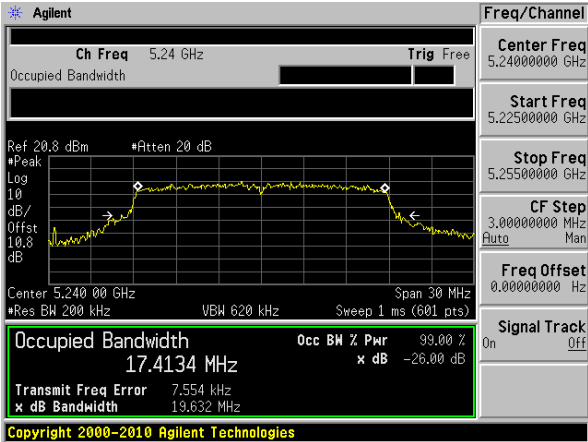


802.11ac40 mode


5190 MHz

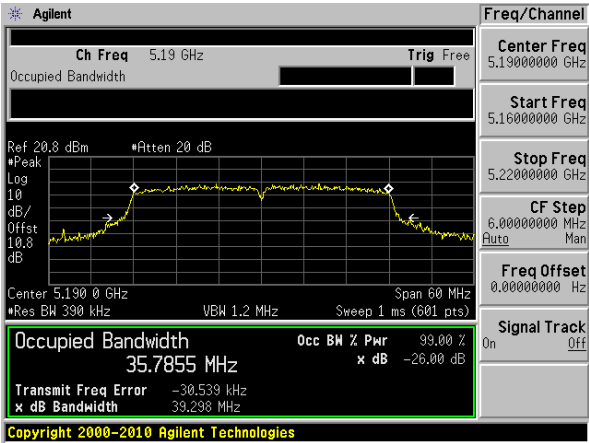

5230 MHz

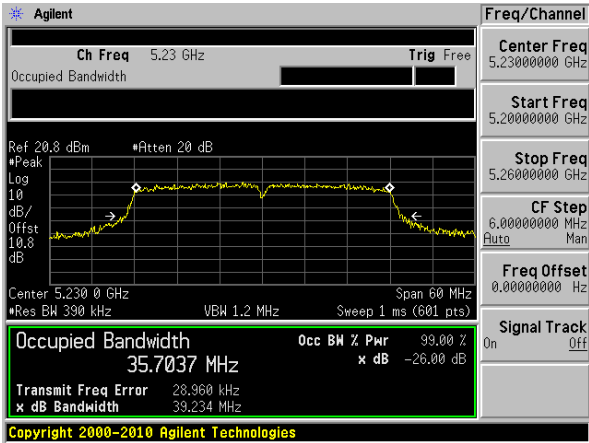


802.11ac80 mode, 5210 MHz

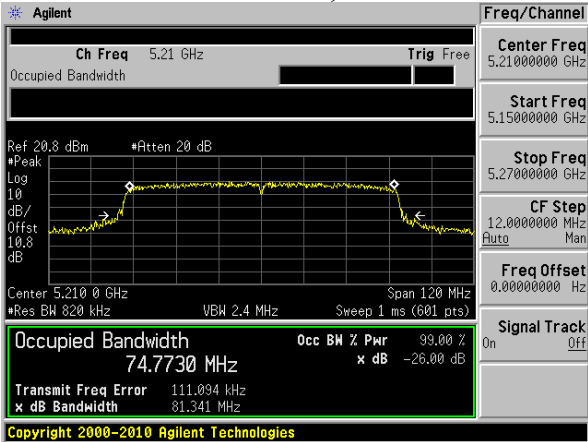


5250 – 5350 MHz

802.11a mode


5260 MHz

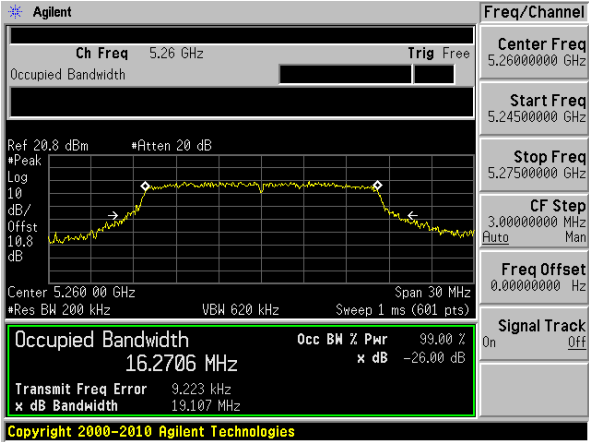

5280 MHz

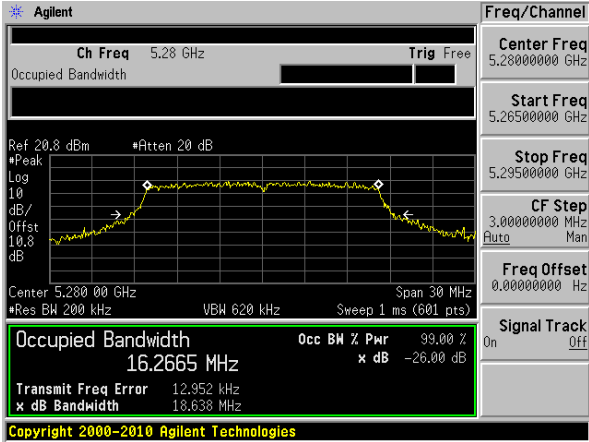


5320 MHz

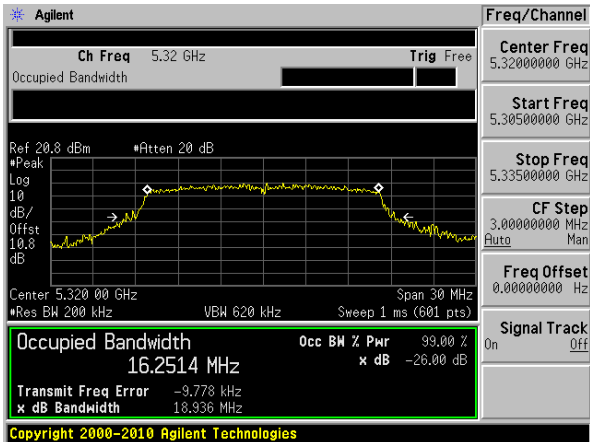


802.11n20 mode


5260 MHz

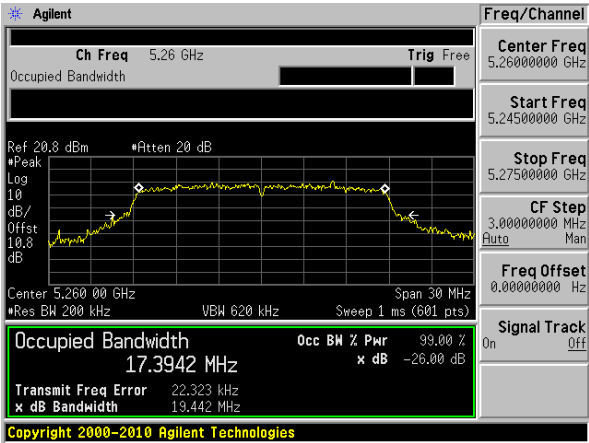



5280 MHz

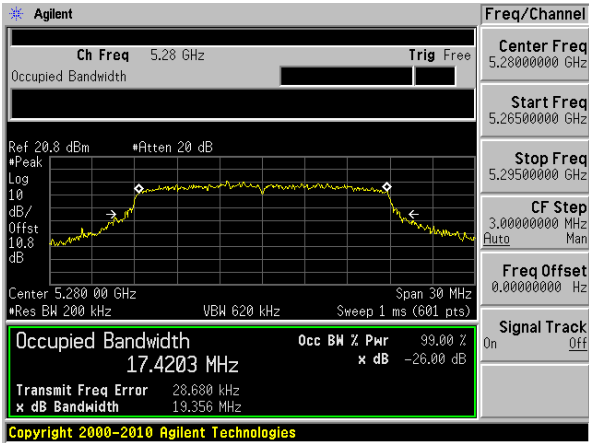

5320 MHz

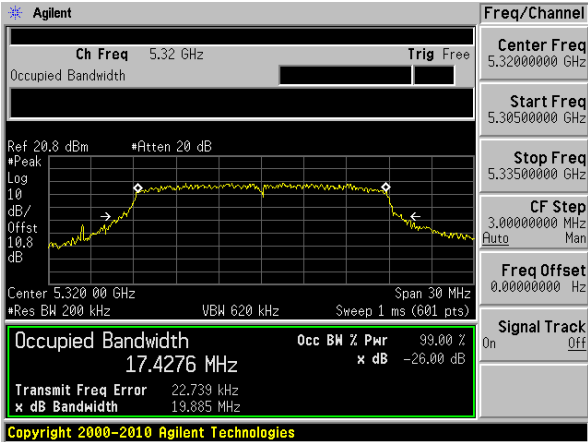


802.11n40 mode

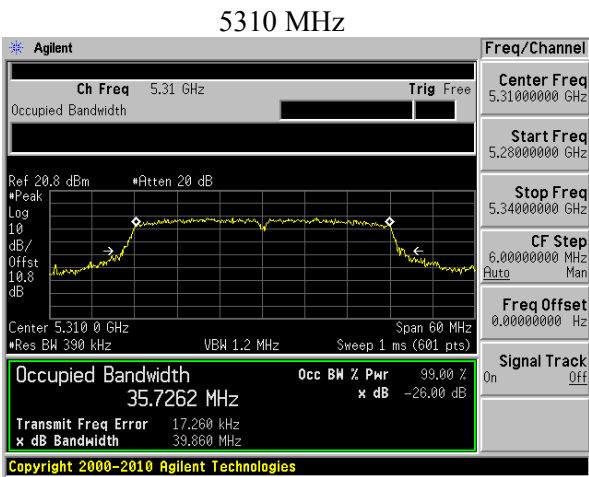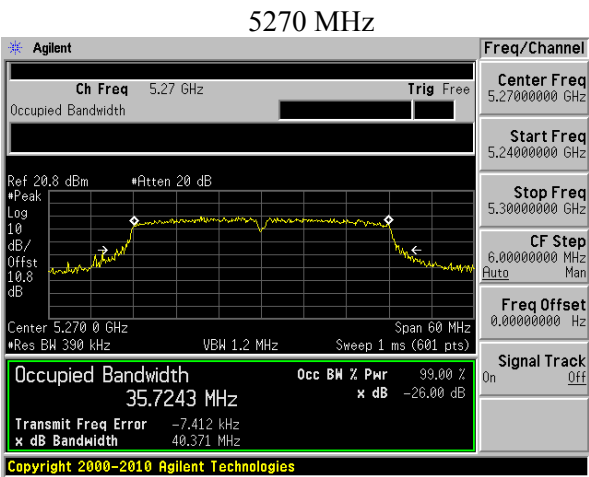


802.11ac20 mode


5260 MHz

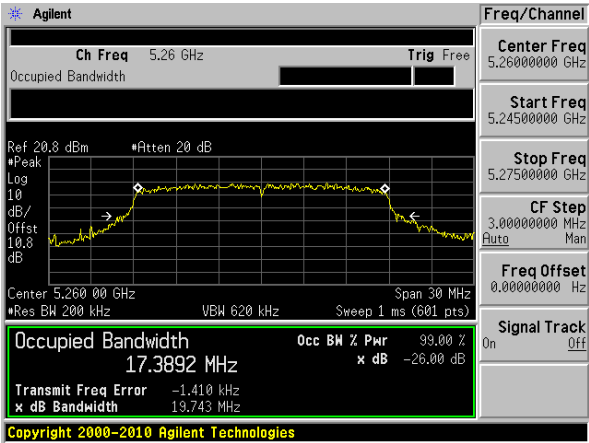

5280 MHz

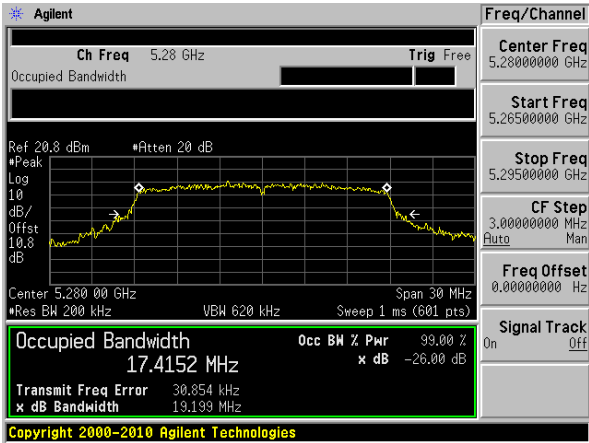


5320 MHz

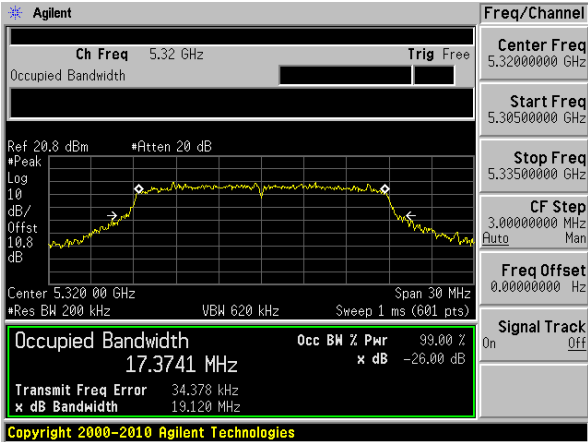


802.11ac40 mode


5270 MHz

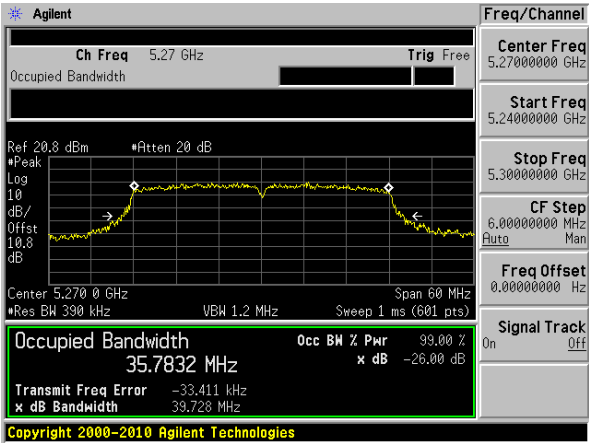

5310 MHz

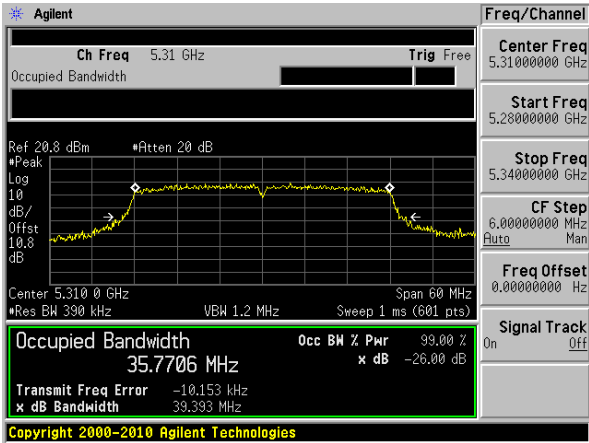


802.11ac80 mode, 5290 MHz

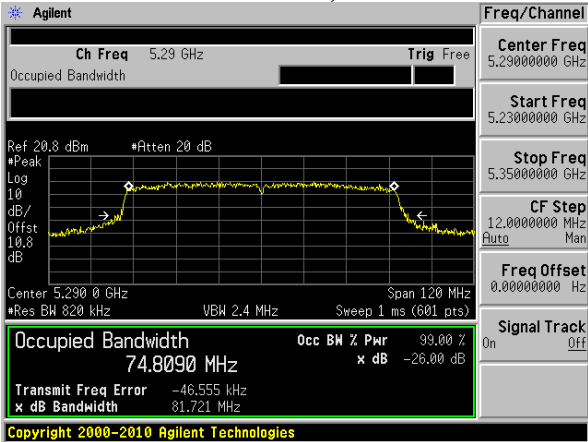


5470 – 5725 MHz

802.11a mode


5500 MHz

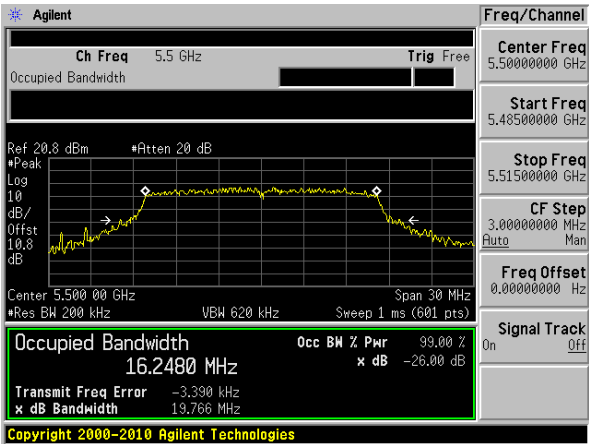


5580 MHz

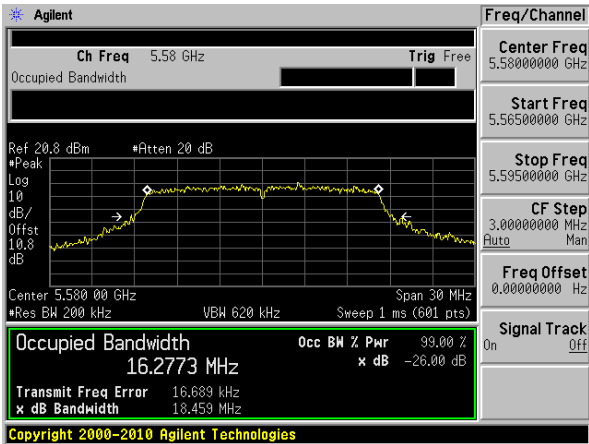

5700 MHz

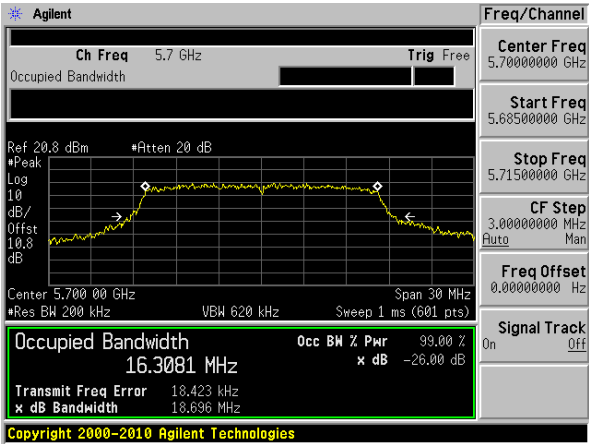


5720 MHz

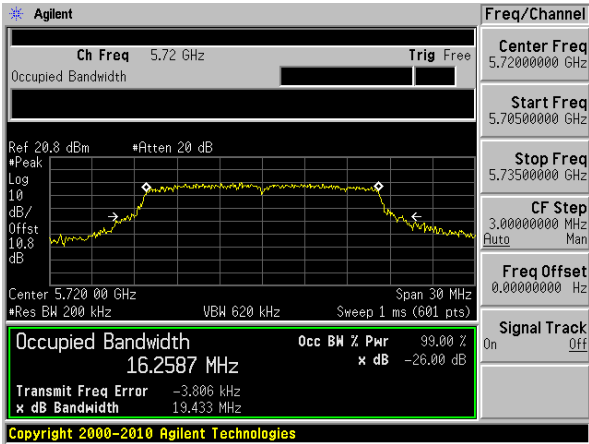


802.11n20 mode


5500 MHz

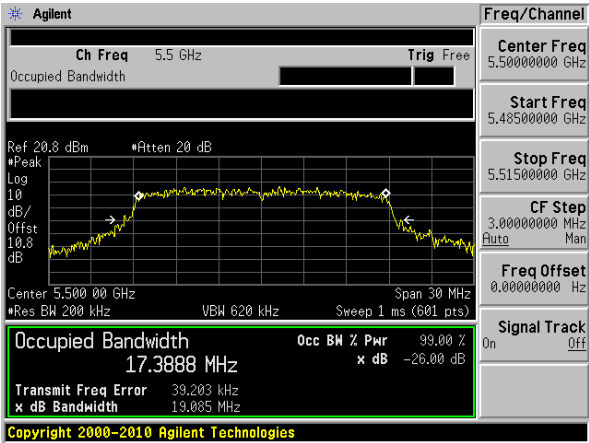


5580 MHz

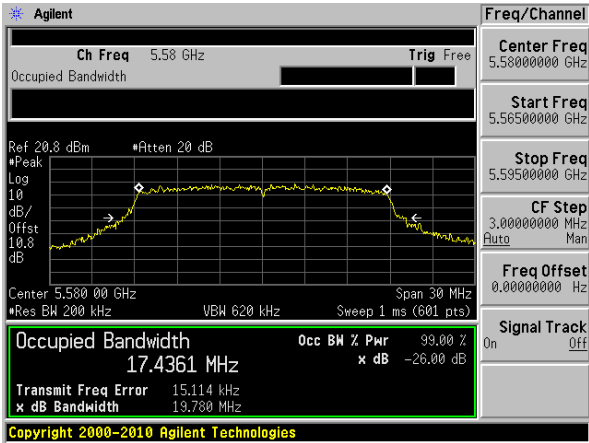

5700 MHz

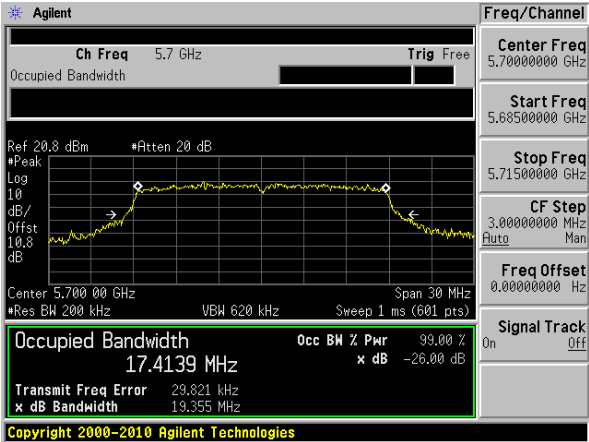


5720 MHz

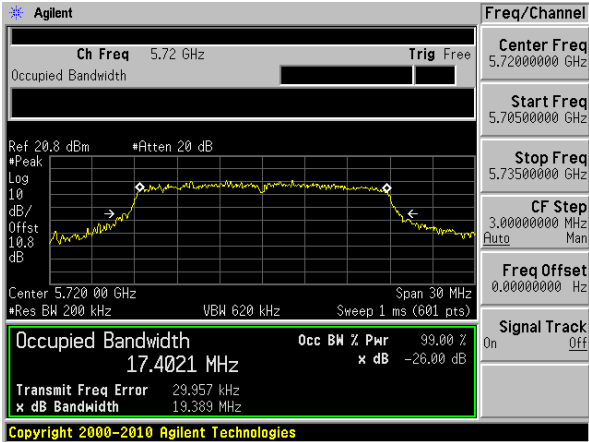


802.11n40 mode


5510 MHz

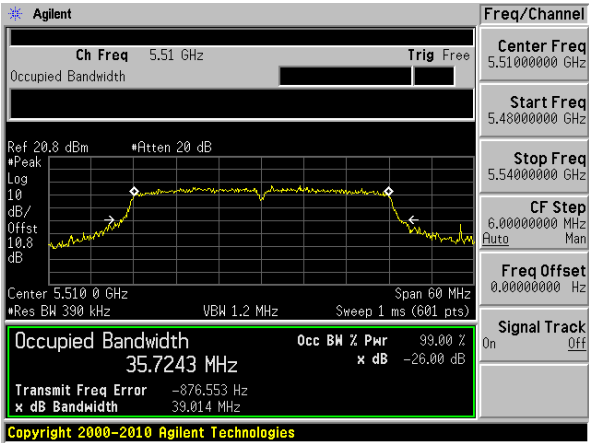


5550 MHz

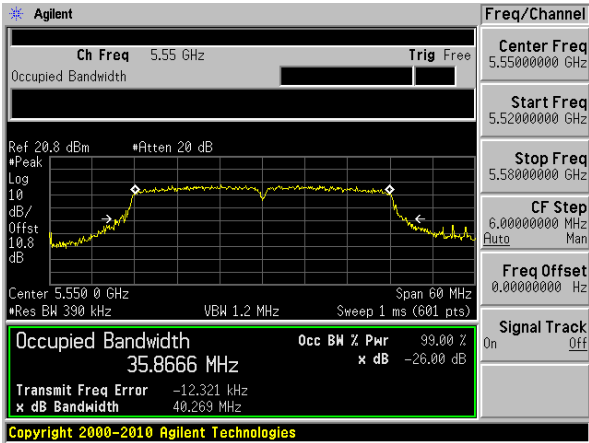

5670 MHz

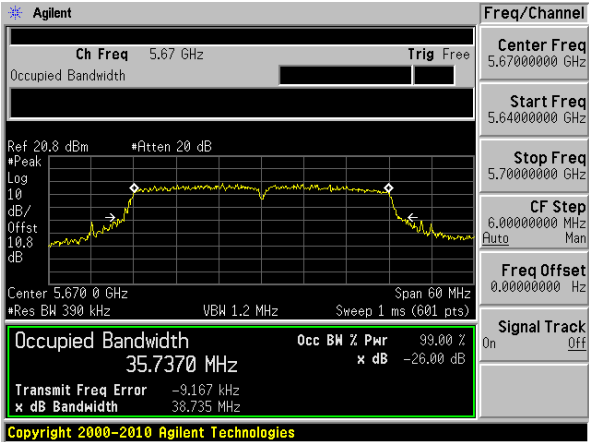


5710 MHz

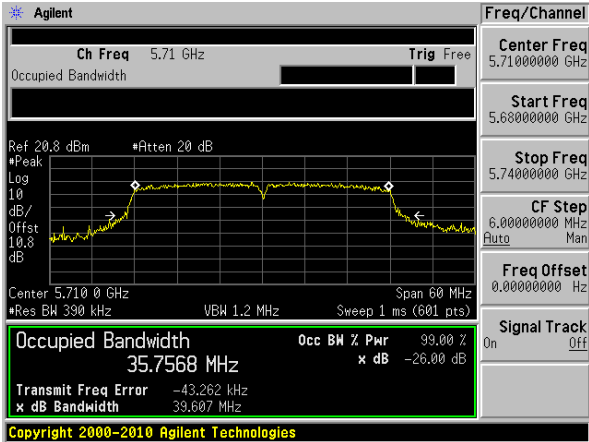


802.11ac20 mode


5500 MHz

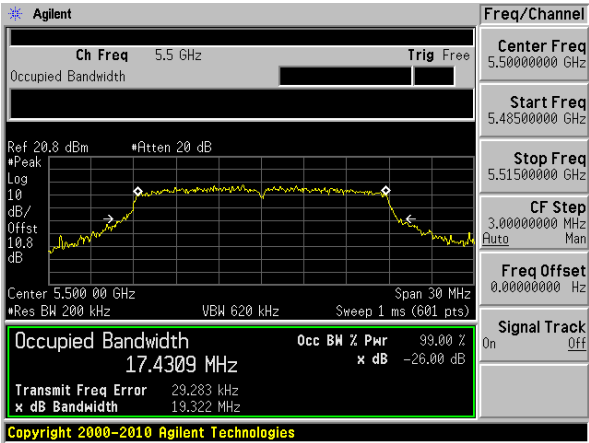


5580 MHz

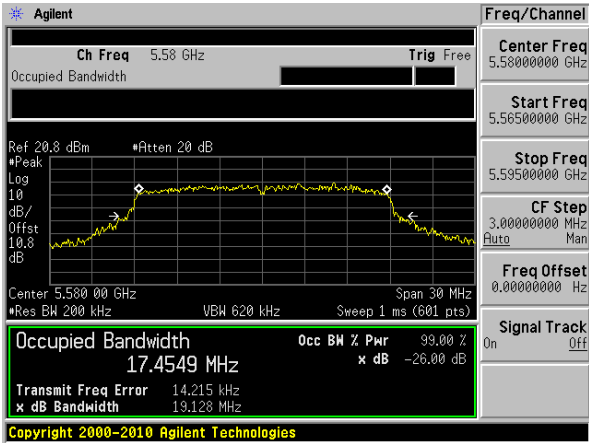

5700 MHz

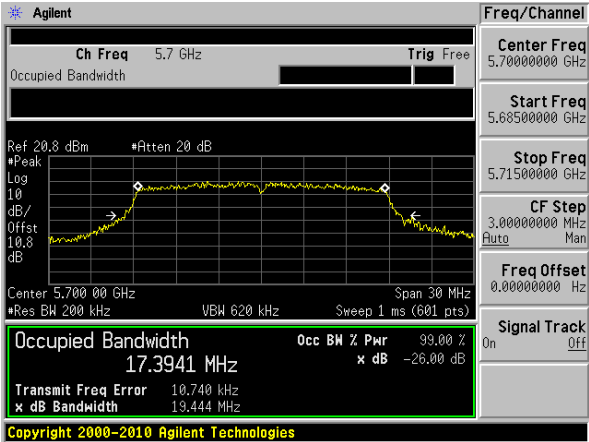


5720 MHz

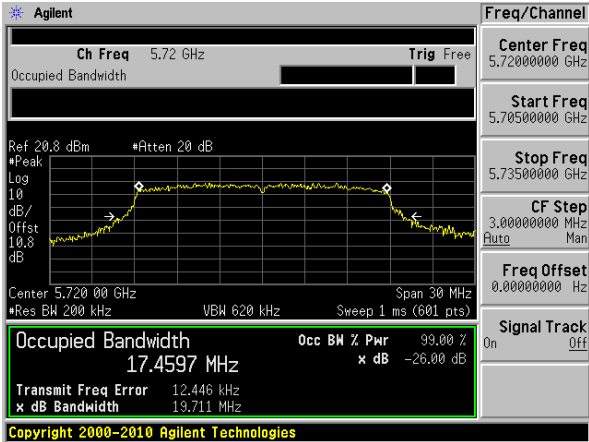


802.11ac40 mode


5510 MHz

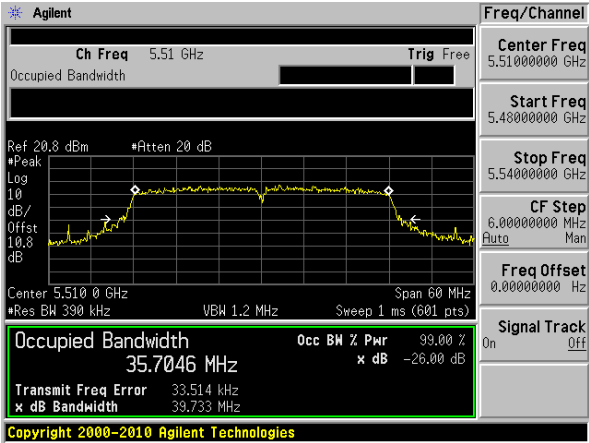


5550 MHz

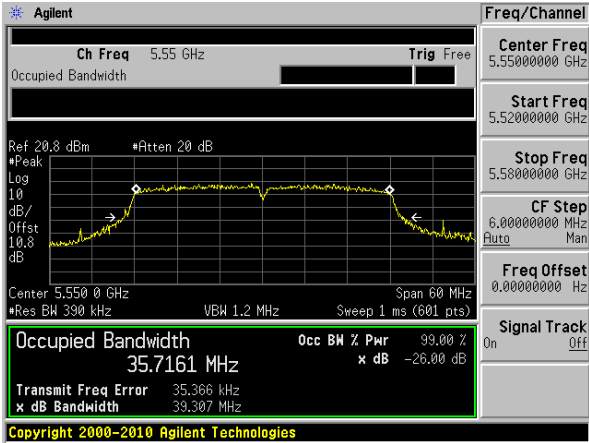

5670 MHz

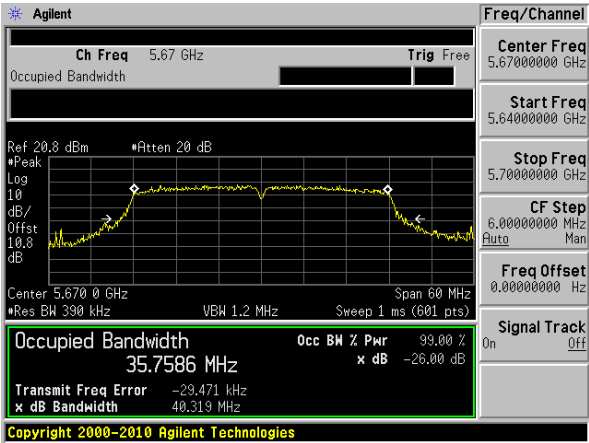


5710 MHz

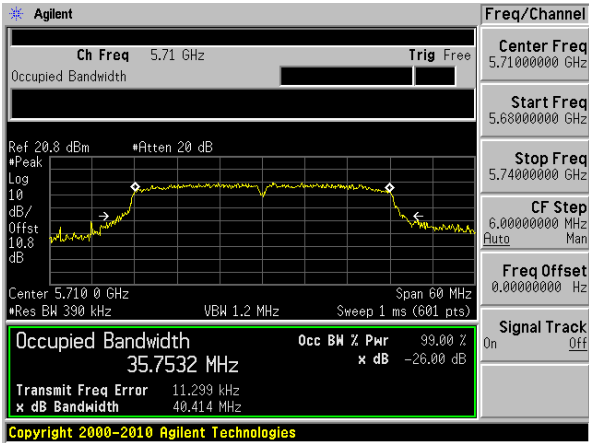


802.11ac80 mode


5530 MHz

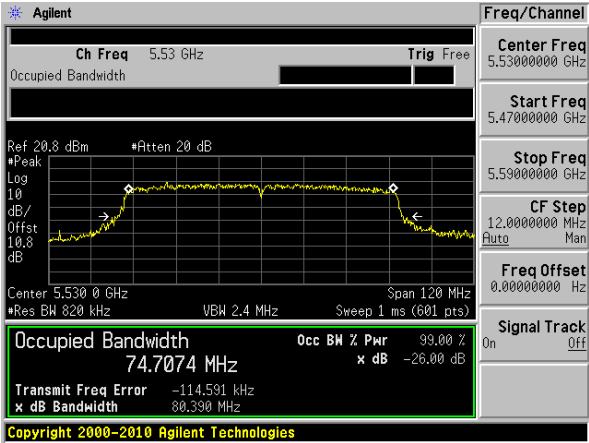

5610 MHz

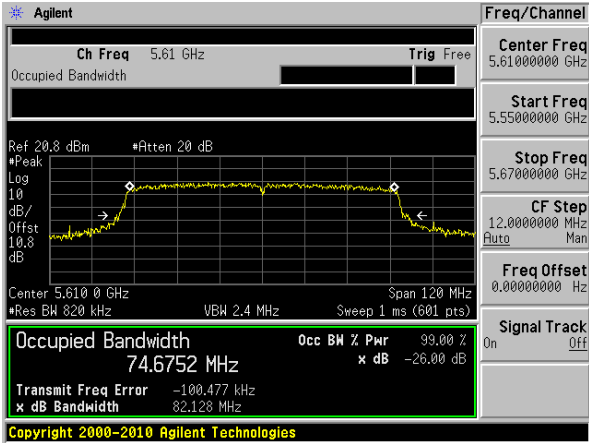


5690 MHz

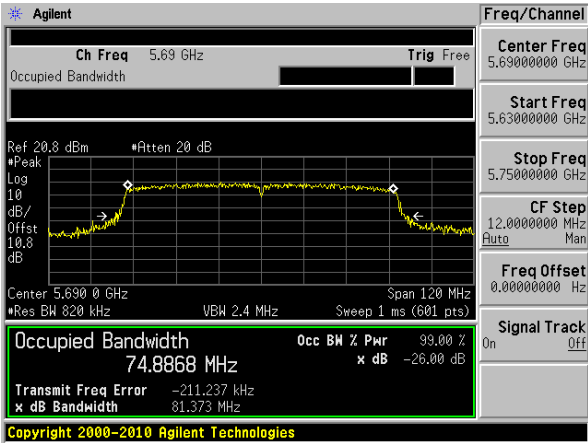


5725 – 5850 MHz

802.11a mode


5745 MHz

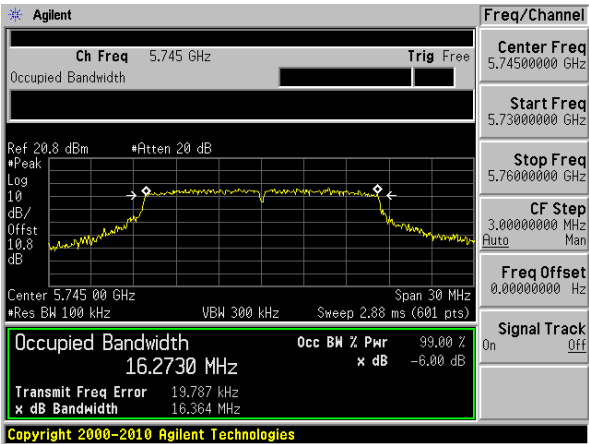

5785 MHz

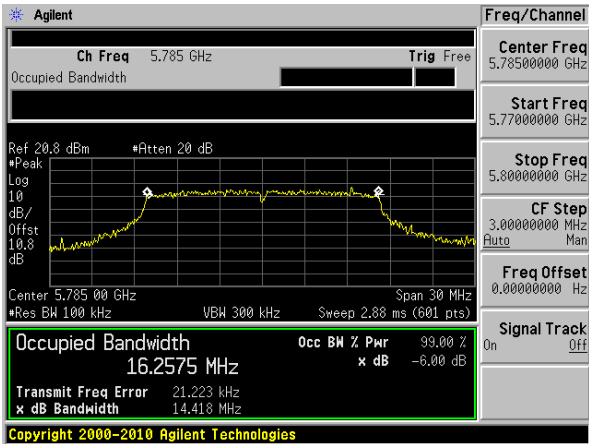


5825 MHz

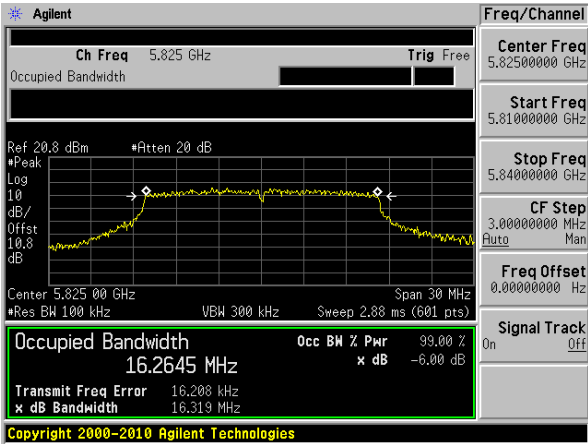


802.11n20 mode


5745 MHz

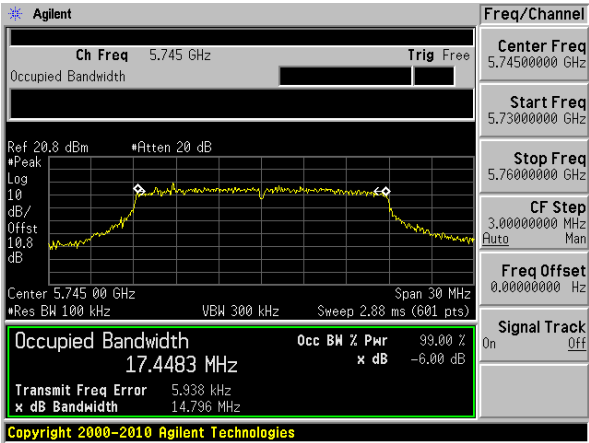

5785 MHz

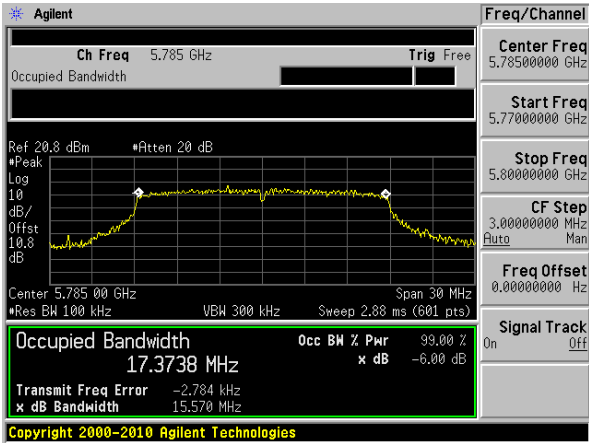


5825 MHz

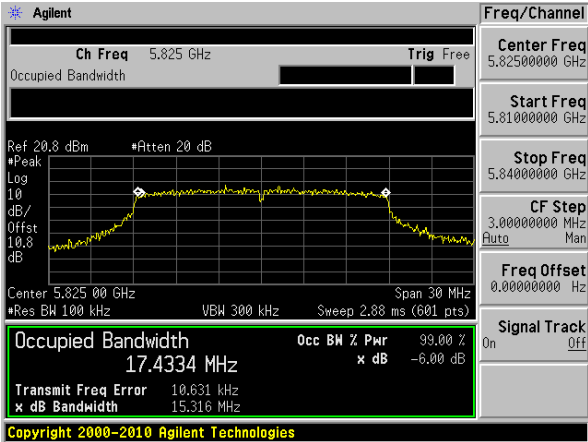


802.11n40 mode

5755 MHz

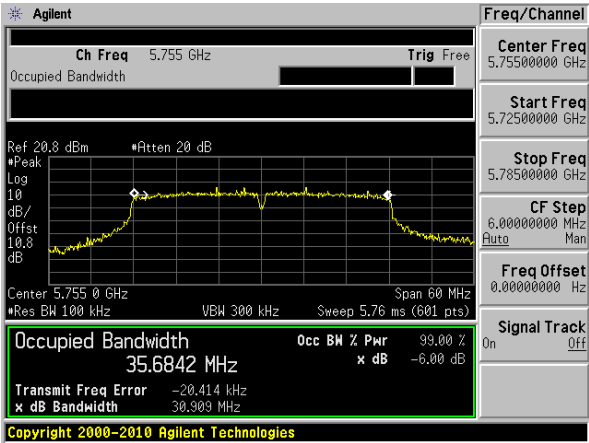


5795 MHz

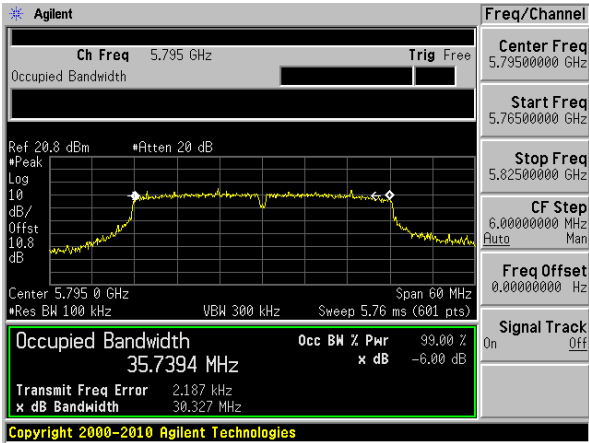


802.11ac20 mode


5745 MHz

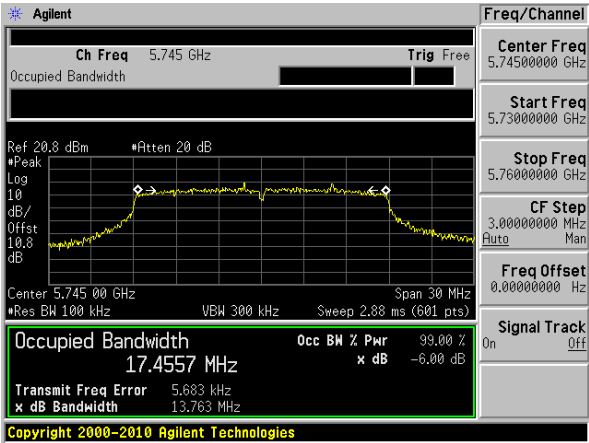

5785 MHz

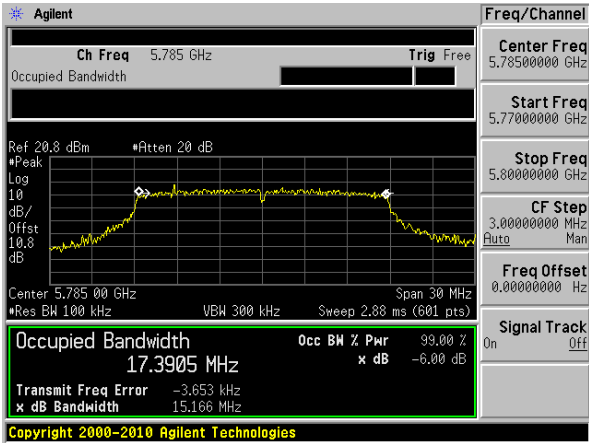


5825 MHz

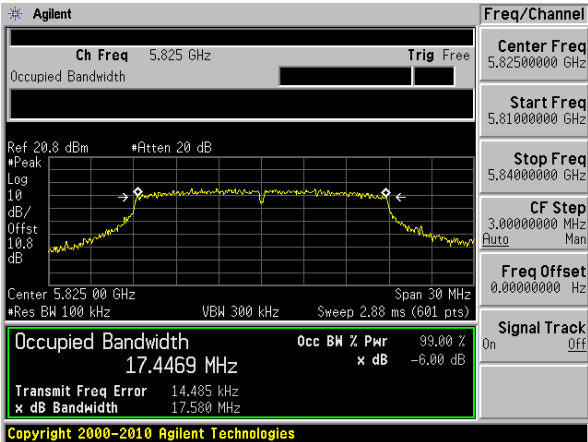


802.11ac40 mode


5755 MHz

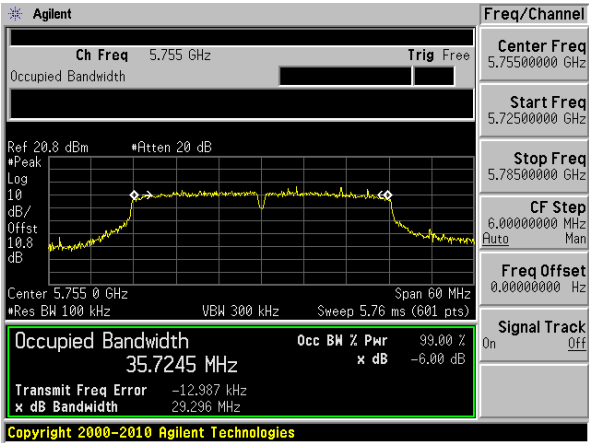

5795 MHz

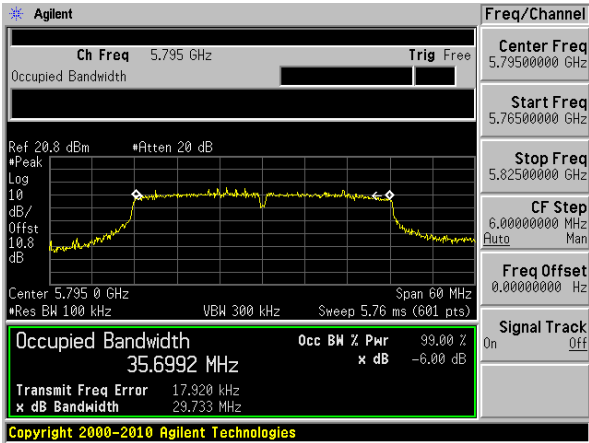

802.11ac80 mode, 5775 MHz

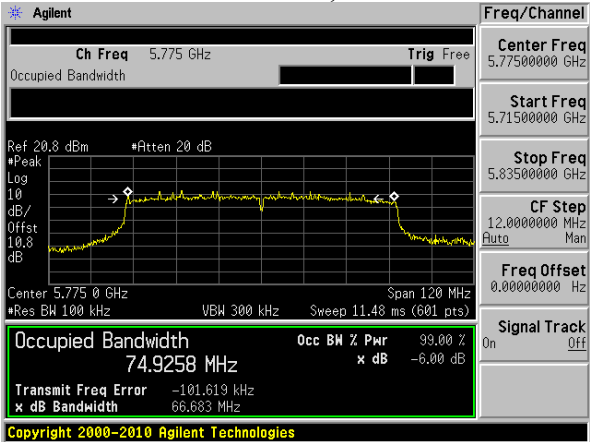

## 9 FCC §407(a) & ISSED RSS-247 §6.2 - Output Power

### 9.1 Applicable Standards

According to FCC §15.407(a):

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to IC RSS-247 §6.2.1 for frequency band 5150-5250 MHz:

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

According to IC RSS-247 §6.2.2 for frequency band 5250-5350 MHz:

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

According to IC RSS-247 §6.2.3 for frequency band 5470-5600 MHz and 5650-5725 MHz:

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

According to IC RSS-247 §6.2.4 for frequency band 5725-5850 MHz:

The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

## 9.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a power meter.

## 9.3 Test Equipment List and Details

| Manufacturer  | Description     | Model No. | Serial No. | Calibration Date       | Calibration Interval |
|---------------|-----------------|-----------|------------|------------------------|----------------------|
| ETS- Lingerin | Power Sensor    | 7002-006  | 160097     | 2014-10-21             | 2 years              |
| -             | 10dB attenuator | -         | -          | Each time <sup>1</sup> | N/A                  |

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.*

## 9.4 Test Environmental Conditions

|                             |              |
|-----------------------------|--------------|
| <b>Test Date:</b>           | 2016-07-31   |
| <b>Test Site:</b>           | RF Test Site |
| <b>Temperature:</b>         | 22° C        |
| <b>Relative Humidity:</b>   | 42 %         |
| <b>Barometric Pressure:</b> | 102.7 kPa    |
| <b>Test Personnel:</b>      | Todd Moy     |

## 9.5 Test Results

### 5150 - 5250 MHz

#### FCC Results

| Frequency (MHz) | Conducted Average Power (dBm) | FCC Limit (dBm) |
|-----------------|-------------------------------|-----------------|
| 802.11a mode    |                               |                 |
| 5180            | 11.31                         | 24              |
| 5200            | 11.36                         | 24              |
| 5240            | 12.18                         | 24              |
| 802.11n20 mode  |                               |                 |
| 5180            | 11.18                         | 24              |
| 5200            | 11.09                         | 24              |
| 5240            | 11.99                         | 24              |
| 802.11n40 mode  |                               |                 |
| 5190            | 10.98                         | 24              |
| 5230            | 11.82                         | 24              |
| 802.11ac20 mode |                               |                 |
| 5180            | 11                            | 24              |
| 5200            | 10.92                         | 24              |
| 5240            | 11.94                         | 24              |
| 802.11ac40 mode |                               |                 |
| 5190            | 10.92                         | 24              |
| 5230            | 11.94                         | 24              |
| 802.11ac80 mode |                               |                 |
| 5210            | 11.85                         | 24              |

**IC Results**

| <b>Radio Mode</b> | <b>Frequency<br/>(MHz)</b> | <b>Conducted<br/>Output Power<br/>(dBm)</b> | <b>Antenna<br/>Gain<br/>(dBi)</b> | <b>EIRP<br/>(dBm)</b> | <b>IC Limit<br/>(dBm)</b> |
|-------------------|----------------------------|---------------------------------------------|-----------------------------------|-----------------------|---------------------------|
| a                 | 5180                       | 11.31                                       | 3                                 | 14.31                 | 23                        |
|                   | 5200                       | 11.36                                       | 3                                 | 14.36                 | 23                        |
|                   | 5240                       | 12.18                                       | 3                                 | 15.18                 | 23                        |
| n20               | 5180                       | 11.18                                       | 3                                 | 14.18                 | 23                        |
|                   | 5200                       | 11.09                                       | 3                                 | 14.09                 | 23                        |
|                   | 5240                       | 11.99                                       | 3                                 | 14.99                 | 23                        |
| n40               | 5190                       | 10.98                                       | 3                                 | 13.98                 | 23                        |
|                   | 5230                       | 11.82                                       | 3                                 | 14.82                 | 23                        |
| ac20              | 5180                       | 11.00                                       | 3                                 | 14.00                 | 23                        |
|                   | 5200                       | 10.92                                       | 3                                 | 13.92                 | 23                        |
|                   | 5240                       | 11.94                                       | 3                                 | 14.94                 | 23                        |
| ac40              | 5190                       | 10.92                                       | 3                                 | 13.92                 | 23                        |
|                   | 5230                       | 11.94                                       | 3                                 | 14.94                 | 23                        |
| ac80              | 5210                       | 11.85                                       | 3                                 | 14.85                 | 23                        |

**5250 - 5350 MHz**

| <b>Frequency<br/>(MHz)</b> | <b>Conducted Average Power<br/>(dBm)</b> | <b>FCC Limit<br/>(dBm)</b> | <b>IC Limit<br/>(dBm)</b> |
|----------------------------|------------------------------------------|----------------------------|---------------------------|
| 802.11a mode               |                                          |                            |                           |
| 5260                       | 12.21                                    | 24                         | 23                        |
| 5280                       | 12.41                                    | 24                         | 23                        |
| 5320                       | 11.94                                    | 24                         | 23                        |
| 802.11n20 mode             |                                          |                            |                           |
| 5260                       | 11.94                                    | 24                         | 23                        |
| 5280                       | 12.20                                    | 24                         | 23                        |
| 5320                       | 11.77                                    | 24                         | 23                        |
| 802.11n40 mode             |                                          |                            |                           |
| 5270                       | 11.83                                    | 24                         | 23                        |
| 5310                       | 11.57                                    | 24                         | 23                        |
| 802.11ac20 mode            |                                          |                            |                           |
| 5260                       | 11.91                                    | 24                         | 23                        |
| 5280                       | 12.09                                    | 24                         | 23                        |
| 5320                       | 11.51                                    | 24                         | 23                        |
| 802.11ac40 mode            |                                          |                            |                           |
| 5270                       | 11.70                                    | 24                         | 23                        |
| 5310                       | 11.50                                    | 24                         | 23                        |
| 802.11ac80 mode            |                                          |                            |                           |
| 5290                       | 11.65                                    | 24                         | 23                        |

**5470 - 5725 MHz**

| <b>Frequency<br/>(MHz)</b> | <b>Conducted Average Power<br/>(dBm)</b> | <b>FCC Limit<br/>(dBm)</b> | <b>IC Limit<br/>(dBm)</b> |
|----------------------------|------------------------------------------|----------------------------|---------------------------|
| 802.11a mode               |                                          |                            |                           |
| 5500                       | 11.27                                    | 24                         | 24                        |
| 5580                       | 11.99                                    | 24                         | 24                        |
| 5700                       | 12.76                                    | 24                         | 24                        |
| 5720                       | 12.46                                    | 24                         | 24                        |
| 802.11n20 mode             |                                          |                            |                           |
| 5500                       | 11.00                                    | 24                         | 24                        |
| 5580                       | 11.69                                    | 24                         | 24                        |
| 5700                       | 12.63                                    | 24                         | 24                        |
| 5720                       | 12.23                                    | 24                         | 24                        |
| 802.11n40 mode             |                                          |                            |                           |
| 5510                       | 10.91                                    | 24                         | 24                        |
| 5550                       | 11.38                                    | 24                         | 24                        |
| 5670                       | 11.72                                    | 24                         | 24                        |
| 5710                       | 12.69                                    | 24                         | 24                        |
| 802.11ac20 mode            |                                          |                            |                           |
| 5500                       | 10.82                                    | 24                         | 24                        |
| 5580                       | 11.62                                    | 24                         | 24                        |
| 5700                       | 12.72                                    | 24                         | 24                        |
| 5720                       | 12.33                                    | 24                         | 24                        |
| 802.11ac40 mode            |                                          |                            |                           |
| 5510                       | 10.68                                    | 24                         | 24                        |
| 5550                       | 11.39                                    | 24                         | 24                        |
| 5670                       | 11.71                                    | 24                         | 24                        |
| 5710                       | 12.67                                    | 24                         | 24                        |
| 802.11ac80 mode            |                                          |                            |                           |
| 5530                       | 10.93                                    | 24                         | 24                        |
| 5610                       | 12.05                                    | 24                         | 24                        |
| 5690                       | 12.59                                    | 24                         | 24                        |

**5725 - 5850 MHz**

| <b>Frequency<br/>(MHz)</b> | <b>Conducted Average Power<br/>(dBm)</b> | <b>FCC Limit<br/>(dBm)</b> | <b>IC Limit<br/>(dBm)</b> |
|----------------------------|------------------------------------------|----------------------------|---------------------------|
| 802.11a mode               |                                          |                            |                           |
| 5745                       | 12.49                                    | 30                         | 30                        |
| 5785                       | 11.98                                    | 30                         | 30                        |
| 5825                       | 12.02                                    | 30                         | 30                        |
| 802.11n20 mode             |                                          |                            |                           |
| 5745                       | 12.33                                    | 30                         | 30                        |
| 5785                       | 11.70                                    | 30                         | 30                        |
| 5825                       | 11.69                                    | 30                         | 30                        |
| 802.11n40 mode             |                                          |                            |                           |
| 5755                       | 12.02                                    | 30                         | 30                        |
| 5795                       | 11.89                                    | 30                         | 30                        |
| 802.11ac20 mode            |                                          |                            |                           |
| 5745                       | 12.26                                    | 30                         | 30                        |
| 5785                       | 11.71                                    | 30                         | 30                        |
| 5825                       | 11.69                                    | 30                         | 30                        |
| 802.11ac40 mode            |                                          |                            |                           |
| 5755                       | 12.04                                    | 30                         | 30                        |
| 5795                       | 11.86                                    | 30                         | 30                        |
| 802.11ac80 mode            |                                          |                            |                           |
| 5775                       | 11.60                                    | 30                         | 30                        |

Note: Duty cycle correction factor has already been added to the measurements.

## 10 FCC §15.407(a) & ISED RSS-247 §6.2 - Power Spectral Density

### 10.1 Applicable Standards

According to FCC §15.407(a):

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to IC RSS-247 §6.2.1 for frequency band 5150-5250 MHz:

The maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

According to IC RSS-247 §6.2.2 for frequency band 5250-5350 MHz:

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

According to IC RSS-247 §6.2.3 for frequency band 5470-5600 MHz and 5650-5725 MHz:

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

According to IC RSS-247 §6.2.4 for frequency band 5725-5850 MHz:

The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

## 10.2 Measurement Procedure

- (i) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW  $\geq$  3 MHz.
- (iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle  $<$  98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the 26 dB EBW of the signal using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges. If the spectrum analyzer does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW of the spectrum.

## 10.3 Test Equipment List and Details

| Manufacturer    | Description        | Model No. | Serial No. | Calibration Date       | Calibration Interval |
|-----------------|--------------------|-----------|------------|------------------------|----------------------|
| Agilent         | Analyzer, Spectrum | E4446A    | US44300386 | 2015-10-22             | 1 year               |
| Rohde & Schwarz | Signal Analyzer    | FSQ26     | 200749     | 2016-03-24             | 1 year               |
| -               | 10dB attenuator    | -         | -          | Each time <sup>1</sup> | N/A                  |

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.*

## 10.4 Test Environmental Conditions

|                             |                 |
|-----------------------------|-----------------|
| <b>Test Date:</b>           | 2016-07-31      |
| <b>Test Site:</b>           | RF Test Site    |
| <b>Temperature:</b>         | 22-24° C        |
| <b>Relative Humidity:</b>   | 40-41 %         |
| <b>Barometric Pressure:</b> | 103.1-104.1 kPa |
| <b>Test Personnel:</b>      | Frank Wang      |

## 10.5 Test Results

### 5150 – 5250 MHz

#### FCC Results:

| Frequency (MHz) | Measured PSD (dBm/MHz) | Corrected PSD (dBm/MHz) | FCC Limit (dBm/MHz) |
|-----------------|------------------------|-------------------------|---------------------|
| 802.11a mode    |                        |                         |                     |
| 5180            | -0.655                 | -0.407                  | 11                  |
| 5200            | -0.679                 | -0.431                  | 11                  |
| 5240            | -2.182                 | -1.934                  | 11                  |
| 802.11n20 mode  |                        |                         |                     |
| 5180            | -1.025                 | -0.827                  | 11                  |
| 5200            | -1.077                 | -0.879                  | 11                  |
| 5240            | -0.172                 | 0.026                   | 11                  |
| 802.11n40 mode  |                        |                         |                     |
| 5190            | -6.381                 | -6.033                  | 11                  |
| 5230            | -3.188                 | -2.840                  | 11                  |
| 802.11ac20 mode |                        |                         |                     |
| 5180            | -3.050                 | -2.829                  | 11                  |
| 5200            | -3.091                 | -2.871                  | 11                  |
| 5240            | -2.274                 | -2.054                  | 11                  |
| 802.11ac40 mode |                        |                         |                     |
| 5190            | -6.193                 | -5.845                  | 11                  |
| 5230            | -2.939                 | -2.591                  | 11                  |
| 802.11ac80 mode |                        |                         |                     |
| 5210            | -7.074                 | -6.313                  | 11                  |

**IC Results:**

| Frequency (MHz) | PSD (dBm/MHz) | Corrected PSD (dBm/MHz) | EIRP PSD (dBm/MHz) | IC Limit (dBm/MHz) |
|-----------------|---------------|-------------------------|--------------------|--------------------|
| 802.11a mode    |               |                         |                    |                    |
| 5180            | -0.655        | -0.407                  | 2.593              | 10                 |
| 5200            | -0.679        | -0.431                  | 2.569              | 10                 |
| 5240            | -2.182        | -1.934                  | 1.066              | 10                 |
| 802.11n20 mode  |               |                         |                    |                    |
| 5180            | -1.025        | -0.827                  | 2.173              | 10                 |
| 5200            | -1.077        | -0.879                  | 2.121              | 10                 |
| 5240            | -0.172        | 0.026                   | 3.026              | 10                 |
| 802.11n40 mode  |               |                         |                    |                    |
| 5190            | -6.381        | -6.033                  | -3.033             | 10                 |
| 5230            | -3.188        | -2.840                  | 0.16               | 10                 |
| 802.11ac20 mode |               |                         |                    |                    |
| 5180            | -3.050        | -2.829                  | 0.171              | 10                 |
| 5200            | -3.091        | -2.871                  | 0.129              | 10                 |
| 5240            | -2.274        | -2.054                  | 3.36               | 10                 |
| 802.11ac40 mode |               |                         |                    |                    |
| 5190            | -6.193        | -6.193                  | -3.193             | 10                 |
| 5230            | -2.939        | -2.939                  | 0.061              | 10                 |
| 802.11ac80 mode |               |                         |                    |                    |
| 5210            | -7.074        | -6.313                  | -3.313             | 10                 |

**5250 – 5350 MHz**

| <b>Frequency<br/>(MHz)</b> | <b>Measured PSD<br/>(dBm/MHz)</b> | <b>Corrected PSD<br/>(dBm/MHz)</b> | <b>FCC/IC Limit<br/>(dBm/MHz)</b> |
|----------------------------|-----------------------------------|------------------------------------|-----------------------------------|
| 802.11a mode               |                                   |                                    |                                   |
| 5260                       | -2.2                              | -1.952                             | 11                                |
| 5280                       | 0.354                             | 0.602                              | 11                                |
| 5320                       | -2.14                             | -1.892                             | 11                                |
| 802.11n20 mode             |                                   |                                    |                                   |
| 5260                       | -2.350                            | -2.152                             | 11                                |
| 5280                       | -2.236                            | -2.038                             | 11                                |
| 5320                       | -0.204                            | -0.006                             | 11                                |
| 802.11n40 mode             |                                   |                                    |                                   |
| 5270                       | -5.719                            | -5.371                             | 11                                |
| 5310                       | -5.939                            | -5.591                             | 11                                |
| 802.11ac20 mode            |                                   |                                    |                                   |
| 5260                       | -0.060                            | 0.161                              | 11                                |
| 5280                       | 0.208                             | 0.429                              | 11                                |
| 5320                       | -2.655                            | -2.435                             | 11                                |
| 802.11ac40 mode            |                                   |                                    |                                   |
| 5270                       | -5.966                            | -5.618                             | 11                                |
| 5310                       | -3.849                            | -3.501                             | 11                                |
| 802.11ac80 mode            |                                   |                                    |                                   |
| 5290                       | -9.428                            | -8.667                             | 11                                |

**5470 – 5725 MHz**

| <b>Frequency<br/>(MHz)</b> | <b>Measured PSD<br/>(dBm/MHz)</b> | <b>Corrected PSD<br/>(dBm/MHz)</b> | <b>FCC/IC Limit<br/>(dBm/MHz)</b> |
|----------------------------|-----------------------------------|------------------------------------|-----------------------------------|
| 802.11a mode               |                                   |                                    |                                   |
| 5500                       | -0.741                            | -0.493                             | 11                                |
| 5580                       | -0.179                            | 0.069                              | 11                                |
| 5700                       | 0.428                             | 0.676                              | 11                                |
| 5720                       | 0.776                             | 1.024                              | 11                                |
| 802.11n20 mode             |                                   |                                    |                                   |
| 5500                       | -2.658                            | -2.460                             | 11                                |
| 5580                       | -0.873                            | -0.675                             | 11                                |
| 5700                       | -0.100                            | 0.098                              | 11                                |
| 5720                       | 0.28                              | 0.478                              | 11                                |
| 802.11n40 mode             |                                   |                                    |                                   |
| 5510                       | -6.171                            | -5.823                             | 11                                |
| 5550                       | -4.073                            | -3.725                             | 11                                |
| 5670                       | -4.866                            | -4.518                             | 11                                |
| 5710                       | -3.078                            | -2.730                             | 11                                |
| 802.11ac20 mode            |                                   |                                    |                                   |
| 5500                       | -1.293                            | -1.073                             | 11                                |
| 5580                       | -0.487                            | -0.267                             | 11                                |
| 5700                       | 0.475                             | 0.696                              | 11                                |
| 5720                       | 0.396                             | 0.617                              | 11                                |
| 802.11ac40 mode            |                                   |                                    |                                   |
| 5510                       | -6.059                            | -5.711                             | 11                                |
| 5550                       | -5.284                            | -4.936                             | 11                                |
| 5670                       | -4.370                            | -4.022                             | 11                                |
| 5710                       | -3.677                            | -3.329                             | 11                                |
| 802.11ac80 mode            |                                   |                                    |                                   |
| 5530                       | -7.728                            | -6.967                             | 11                                |
| 5610*                      | -7.088                            | -6.327                             | 11                                |
| 5690                       | -7.469                            | -6.708                             | 11                                |

**5725 - 5850 MHz**

| <b>Frequency<br/>(MHz)</b> | <b>Measured PSD<br/>(dBm/500 kHz)</b> | <b>Correct PSD<br/>(dBm/500 kHz)</b> | <b>FCC/IC Limit<br/>(dBm/500 kHz)</b> |
|----------------------------|---------------------------------------|--------------------------------------|---------------------------------------|
| <b>802.11a mode</b>        |                                       |                                      |                                       |
| 5745                       | -8.777                                | -1.539                               | 30                                    |
| 5785                       | -10.001                               | -2.763                               | 30                                    |
| 5825                       | -10.243                               | -3.005                               | 30                                    |
| <b>802.11n20 mode</b>      |                                       |                                      |                                       |
| 5745                       | -9.240                                | -2.052                               | 30                                    |
| 5785                       | -10.373                               | -3.185                               | 30                                    |
| 5825                       | -10.426                               | -3.238                               | 30                                    |
| <b>802.11n40 mode</b>      |                                       |                                      |                                       |
| 5755                       | -13.026                               | -5.689                               | 30                                    |
| 5795                       | -13.519                               | -6.182                               | 30                                    |
| <b>802.11ac20 mode</b>     |                                       |                                      |                                       |
| 5745                       | -9.365                                | -2.155                               | 30                                    |
| 5785                       | -10.290                               | -3.080                               | 30                                    |
| 5825                       | -10.675                               | -3.465                               | 30                                    |
| <b>802.11ac40 mode</b>     |                                       |                                      |                                       |
| 5755                       | -13.018                               | -5.681                               | 30                                    |
| 5795                       | -13.570                               | -6.233                               | 30                                    |
| <b>802.11ac80 mode</b>     |                                       |                                      |                                       |
| 5775                       | -16.568                               | -8.817                               | 30                                    |

Corrected PSD (dBm/MHz) = PSD (dBm/MHz) + Duty Cycle Correction (dB)

Note: For the 5725-5850 MHz band, the Corrected PSD (dBm/500 kHz) is equal to:


Correct PSD (dBm/500 kHz) = PSD (dBm/100 kHz) + Duty Cycle Correction (dB) +  $10 \cdot \log(500 \text{ kHz}/100 \text{ kHz})$

Please refer to the following plots.


5150 – 5250 MHz

802.11a mode


5180 MHz

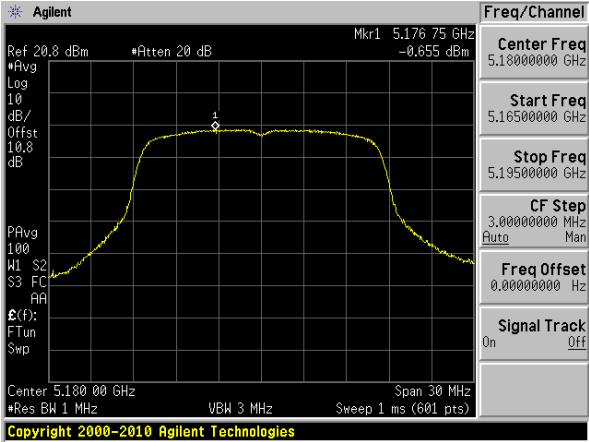

5200 MHz

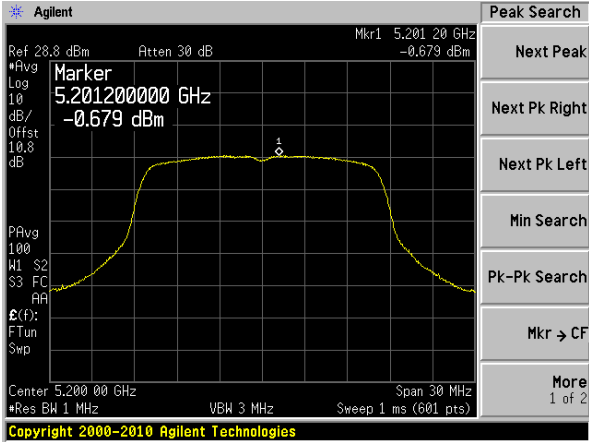


5240 MHz

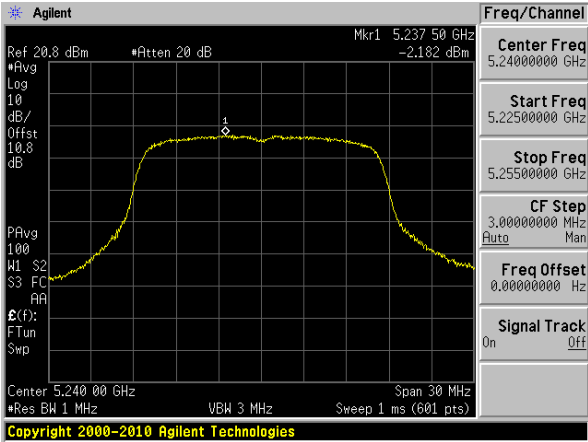


802.11n20 mode


5180 MHz

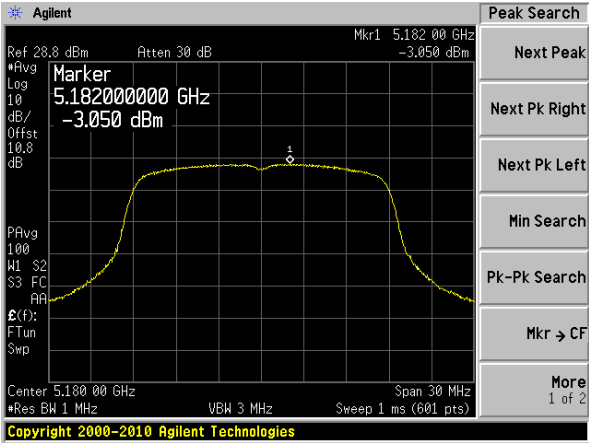


5200 MHz

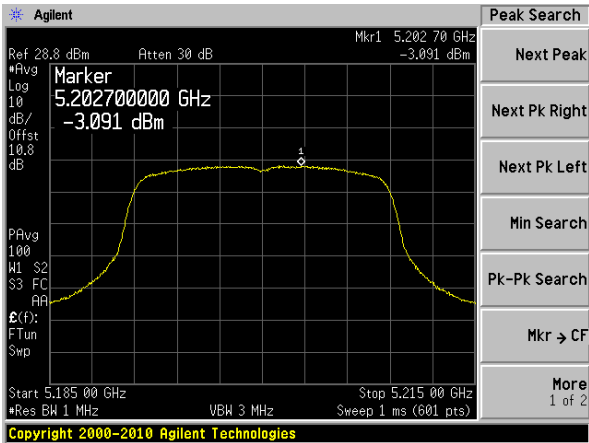

5240 MHz

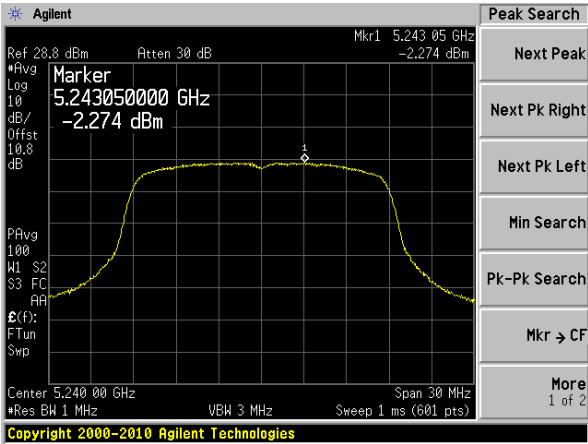


802.11n40 mode

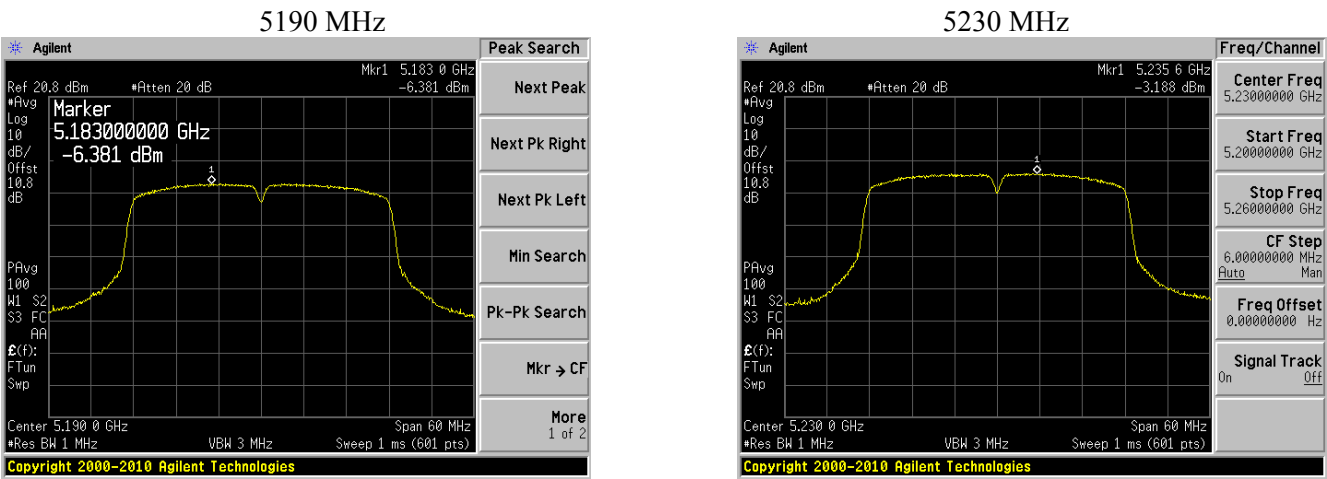


802.11ac20 mode


5180 MHz

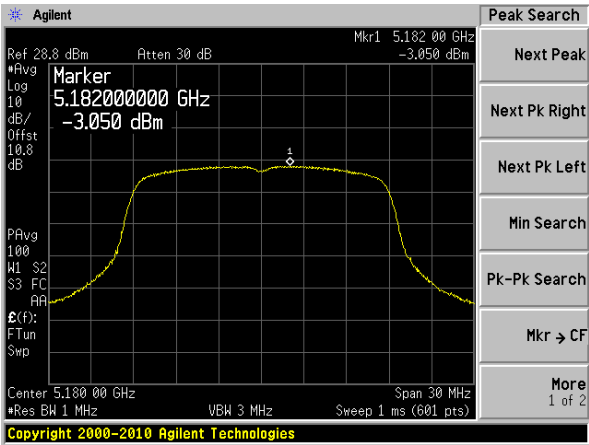


5200 MHz

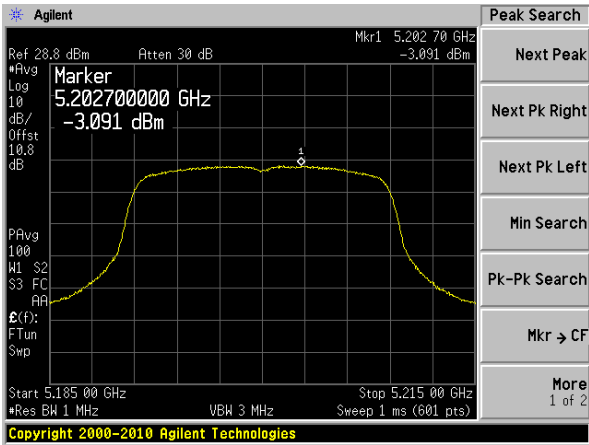


5240 MHz

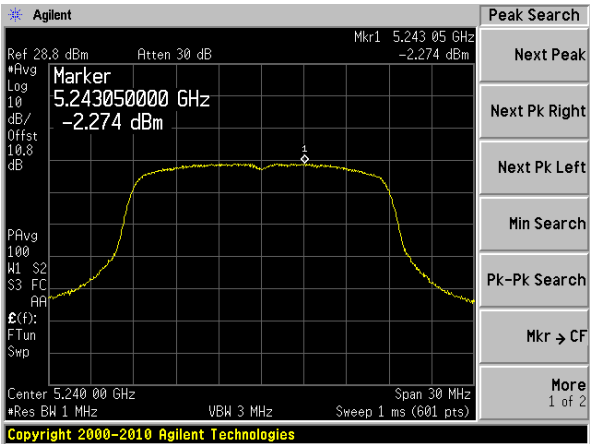

802.11ac40 mode

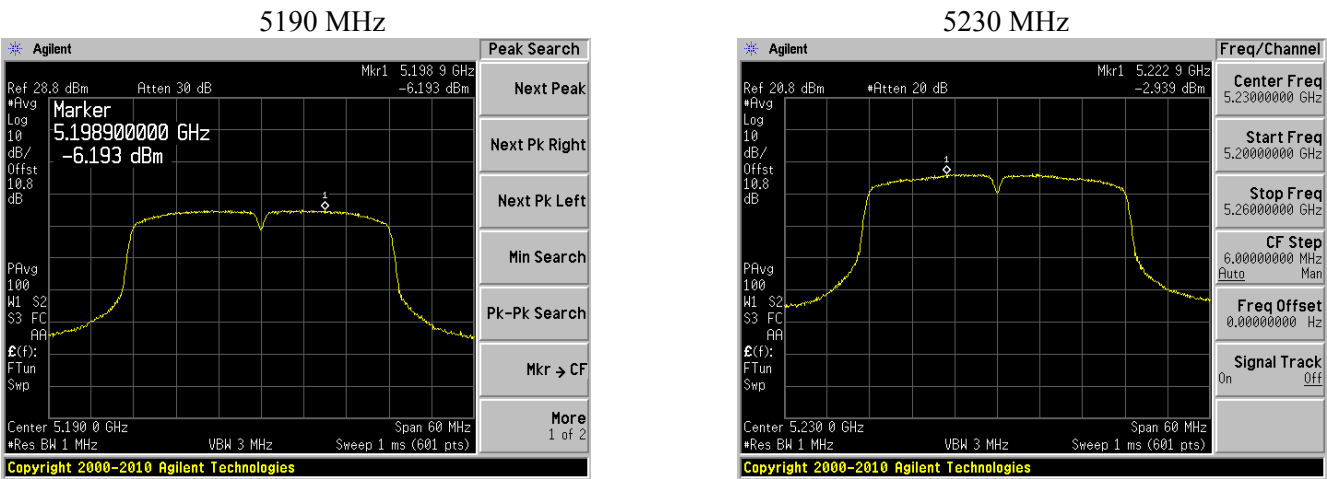


802.11ac80 mode, 5210 MHz

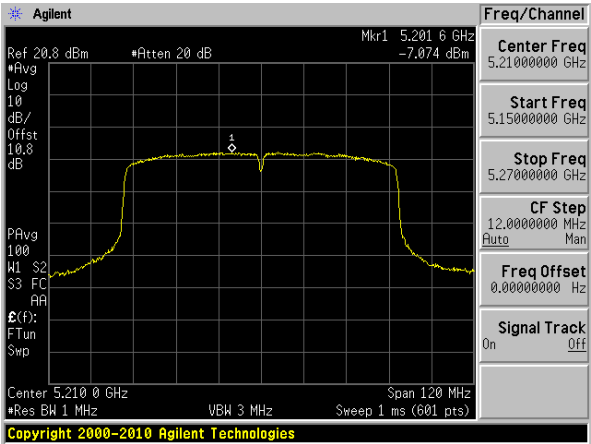


5250 – 5350 MHz

802.11a mode


5260 MHz

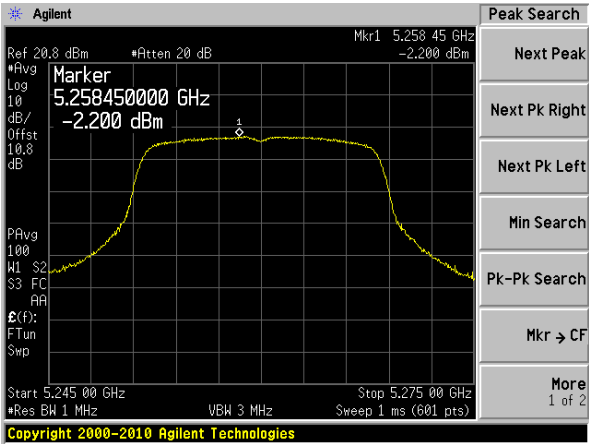

5280 MHz

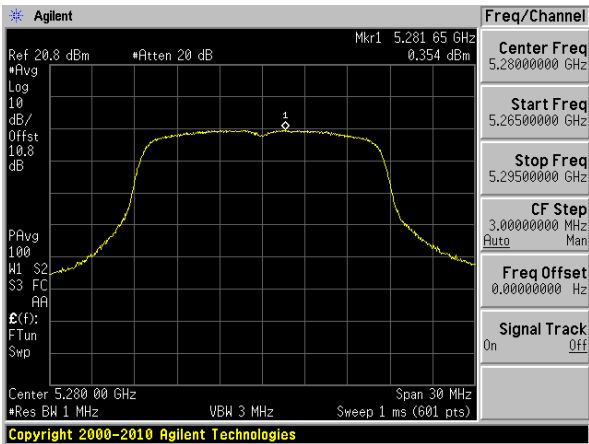


5320 MHz

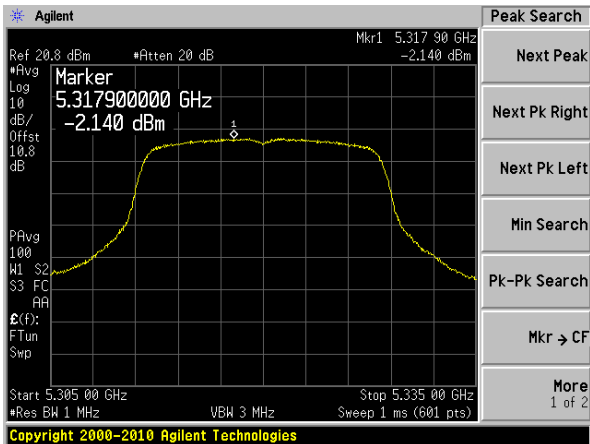


802.11n20 mode


5260 MHz

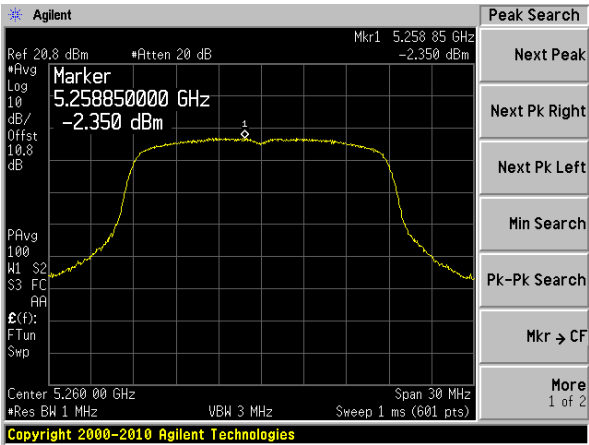

5280 MHz

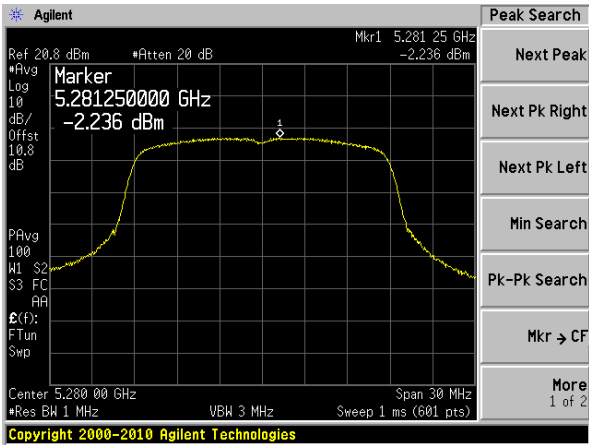


5320 MHz

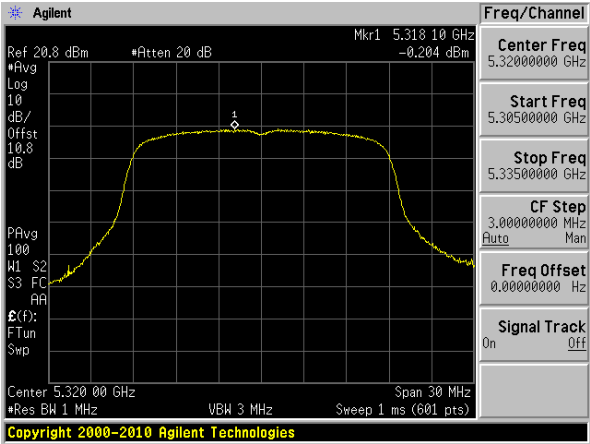


802.11n40 mode

5270 MHz

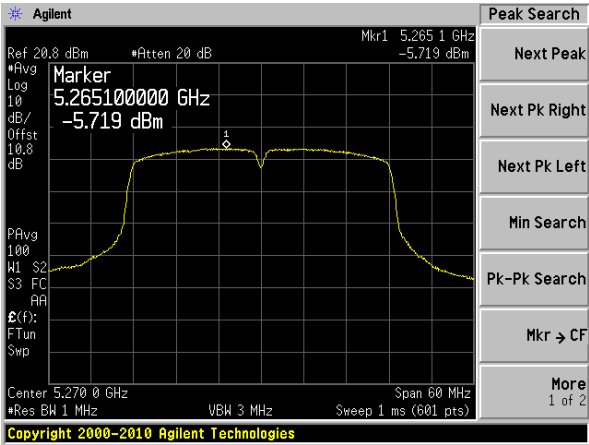


5310 MHz

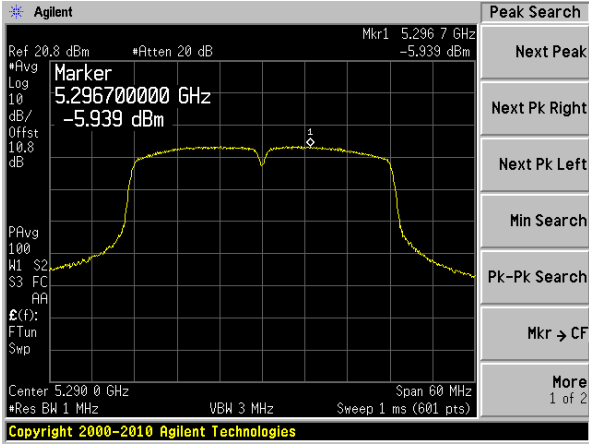


802.11ac20 mode


5260 MHz

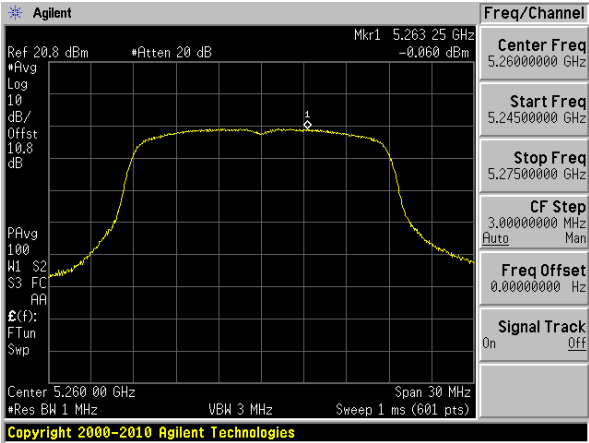


5280 MHz

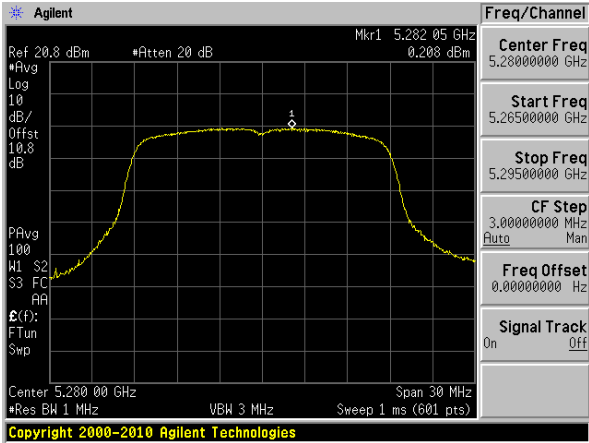


5320 MHz

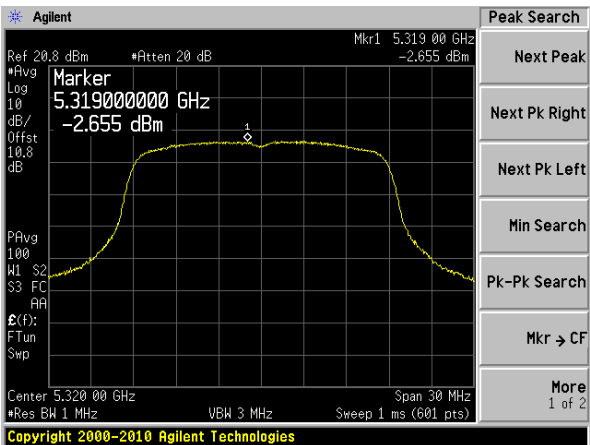

802.11ac40 mode

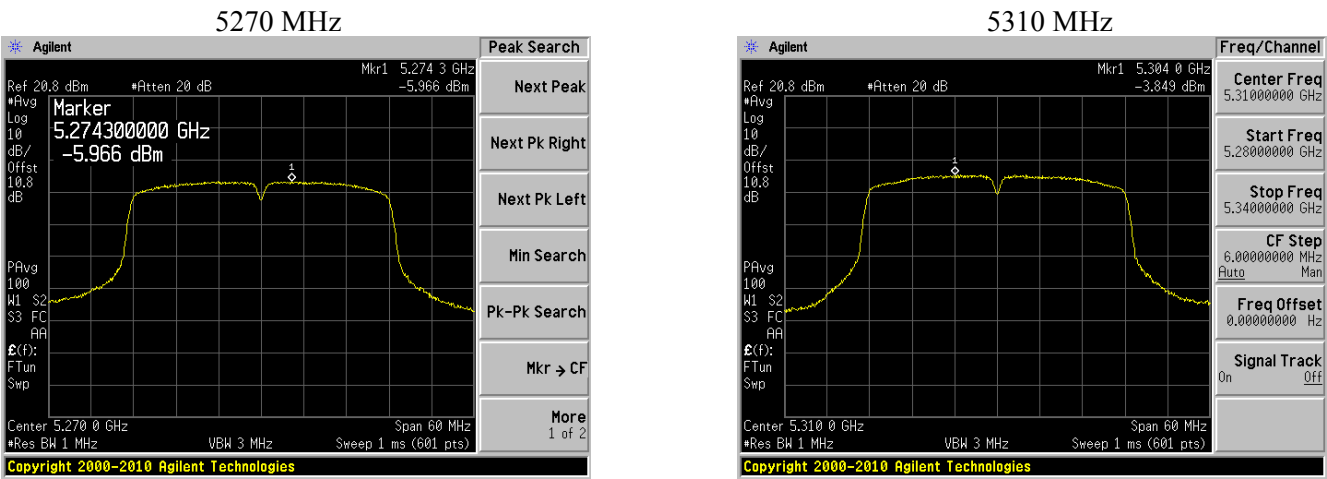


802.11ac80 mode, 5290 MHz

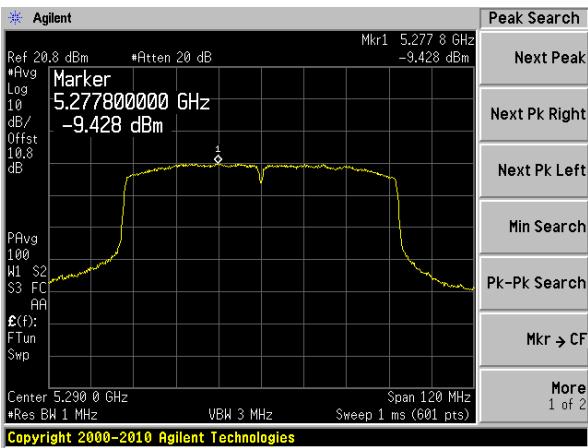


5470 – 5725 MHz

802.11a mode


5500 MHz

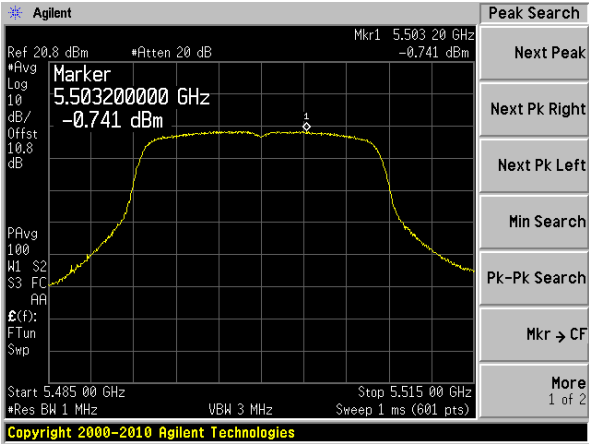


5580 MHz

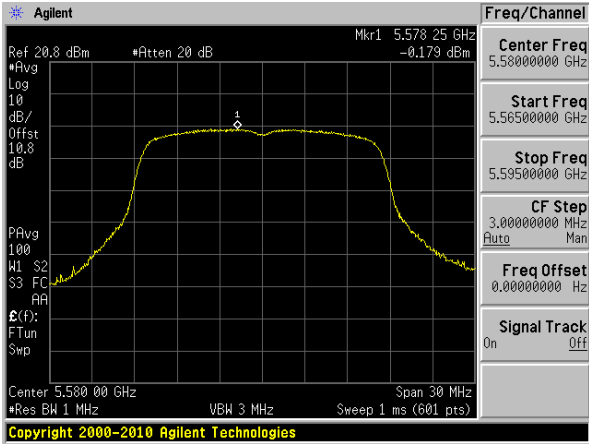

5700 MHz

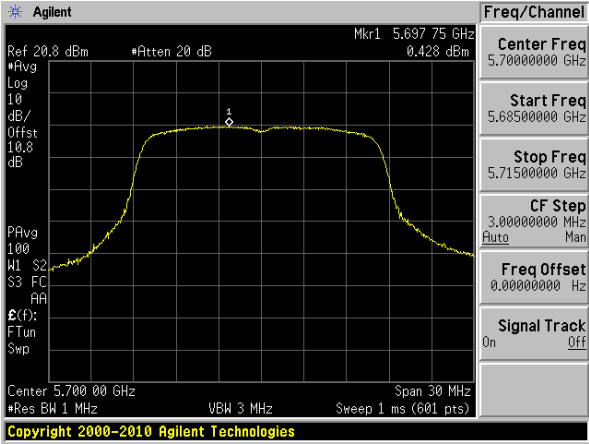


5720 MHz

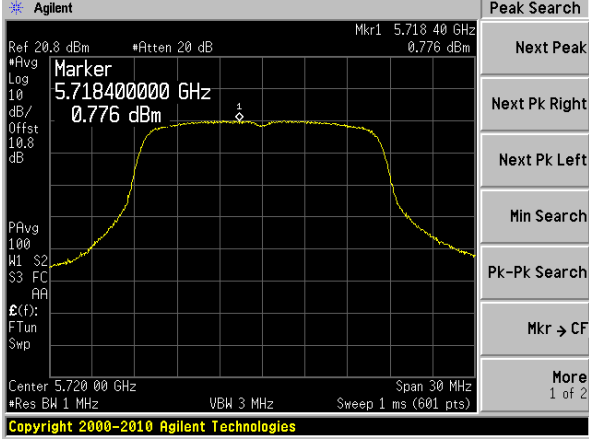


802.11n20 mode


5500 MHz

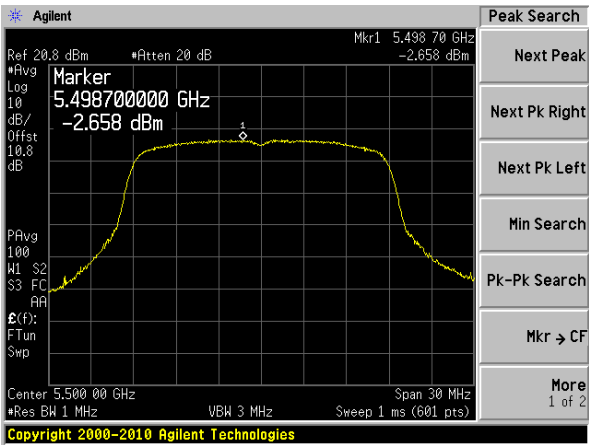


5580 MHz

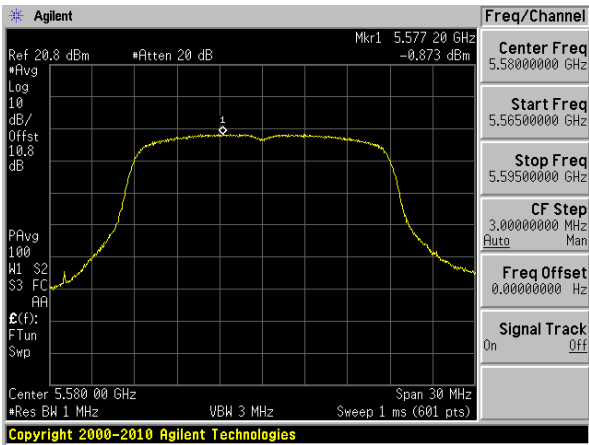

5700 MHz

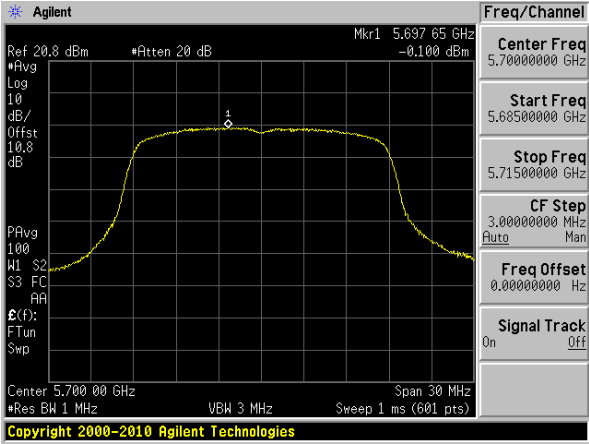


5720 MHz

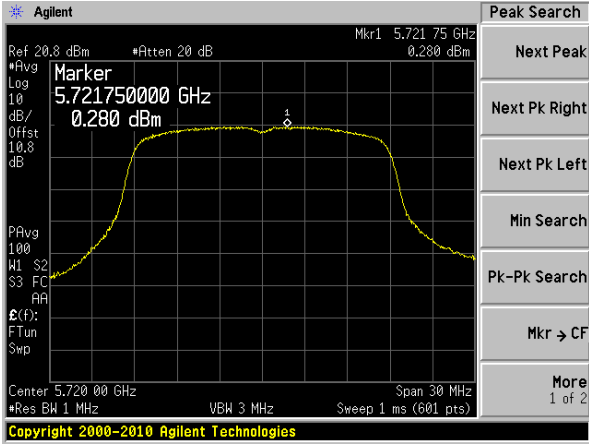


802.11n40 mode


5510 MHz

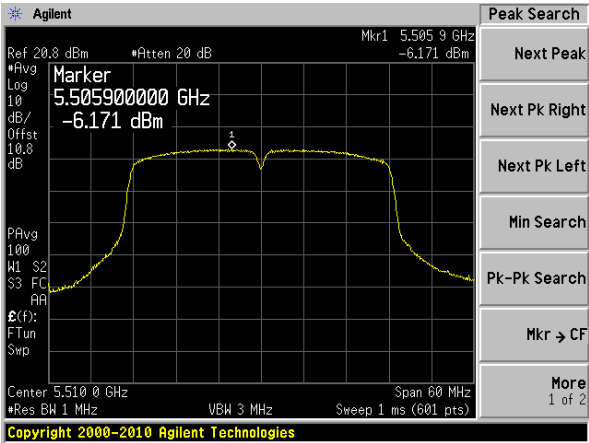


5550 MHz

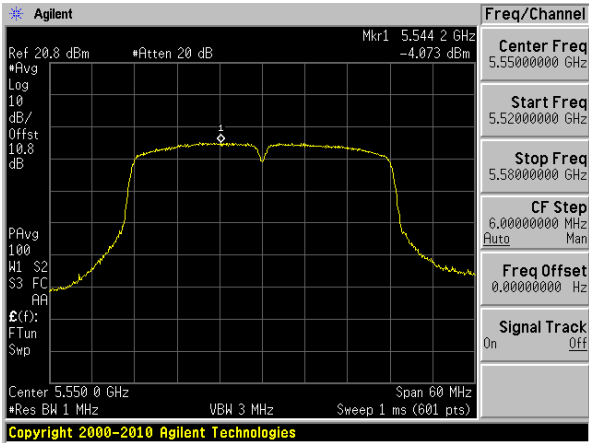

5670 MHz

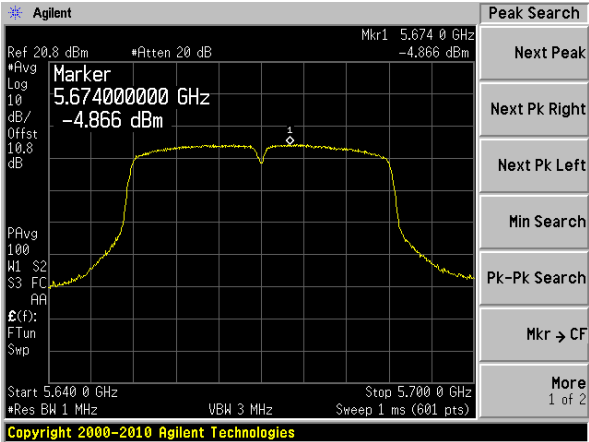


5710 MHz

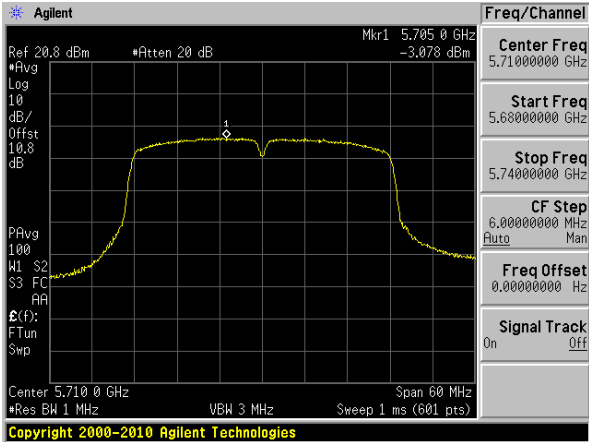


802.11ac20 mode


5500 MHz

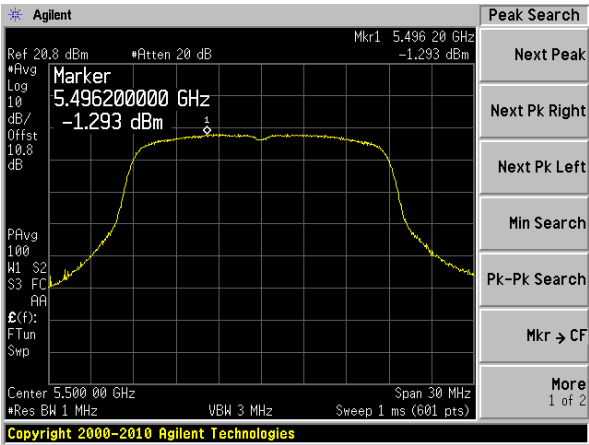


5580 MHz

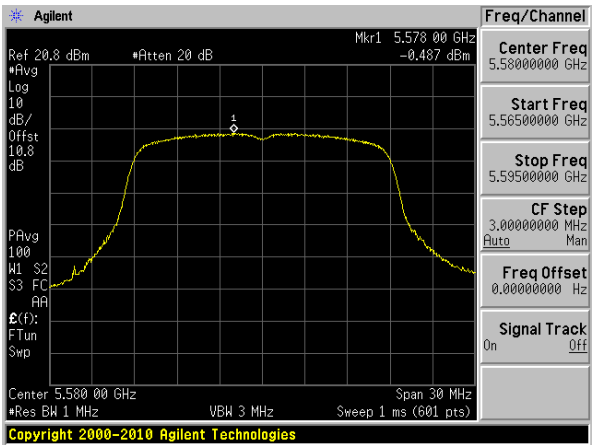

5700 MHz

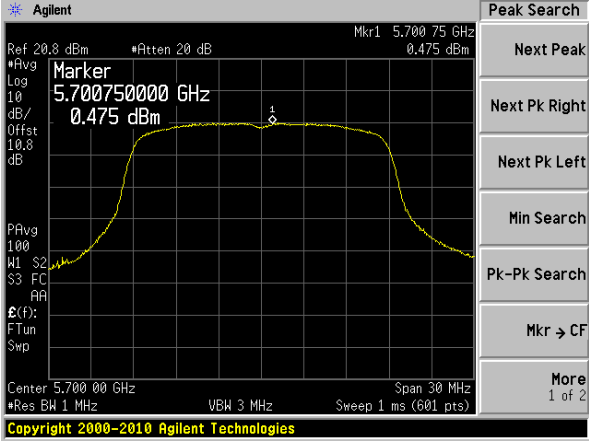


5720 MHz

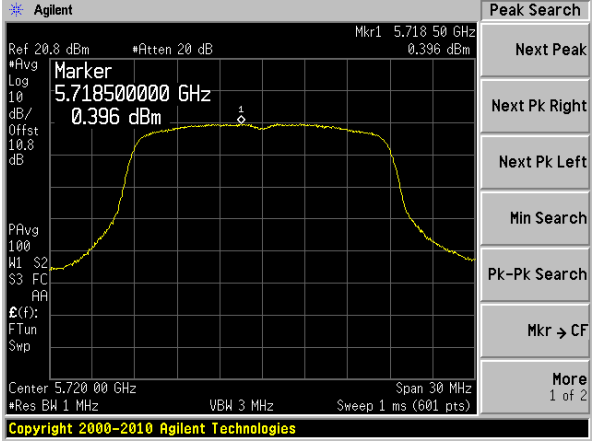


802.11ac40 mode


5510 MHz

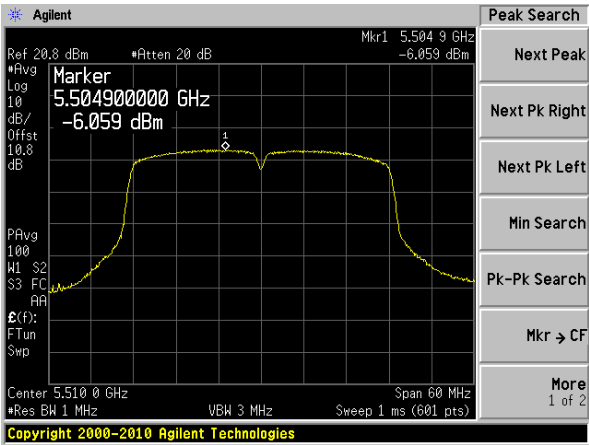


5550 MHz

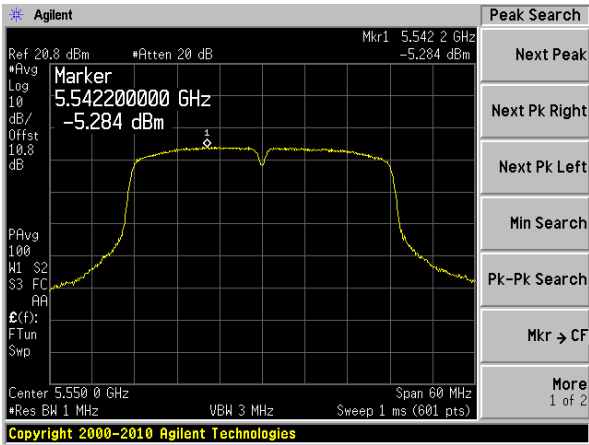

5670 MHz

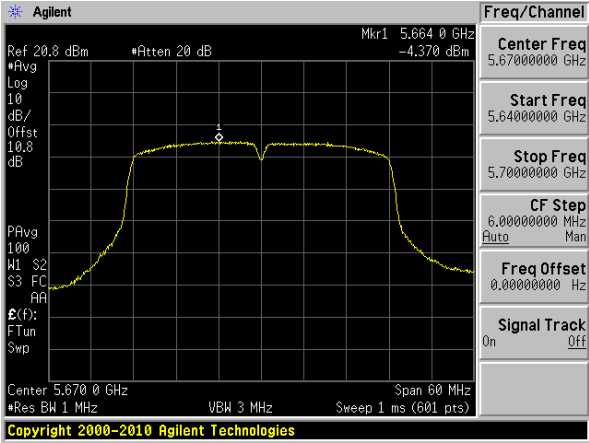


5710 MHz

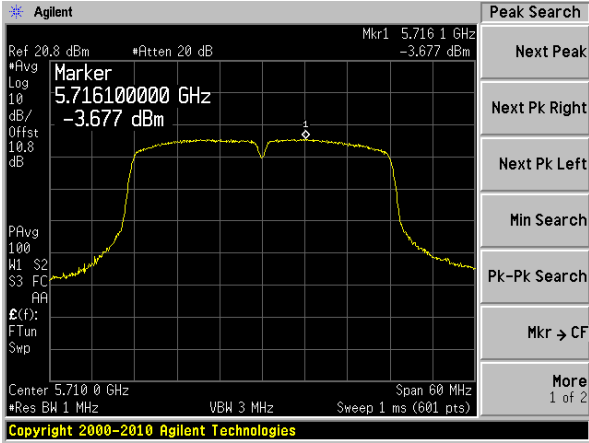


802.11ac80 mode


5530 MHz

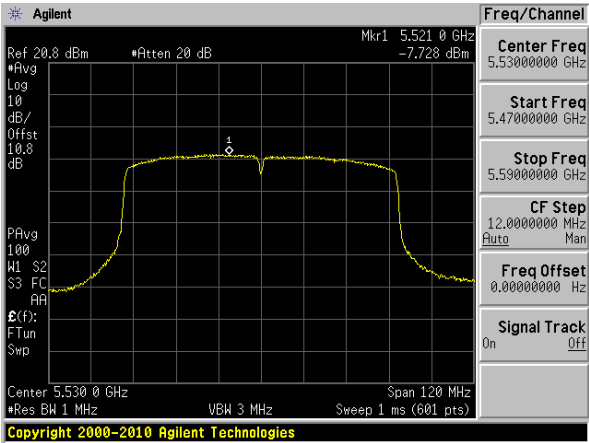

5610 MHz

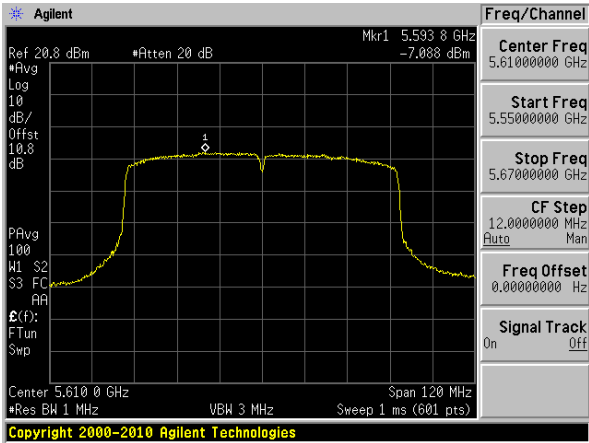


5690 MHz

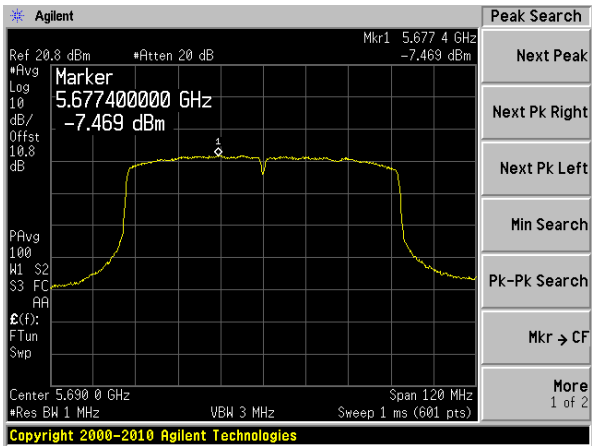


5725 – 5850 MHz

802.11a mode


5745 MHz

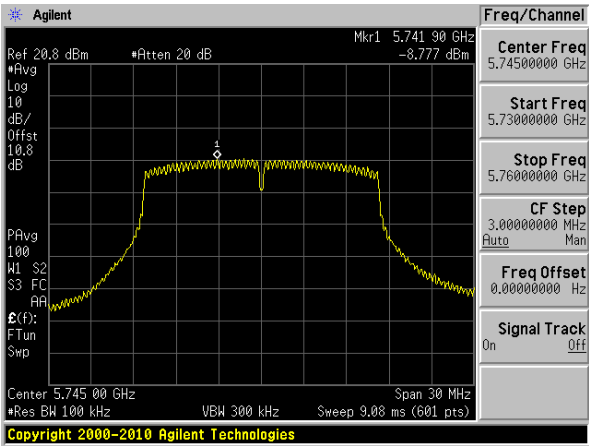

5785 MHz

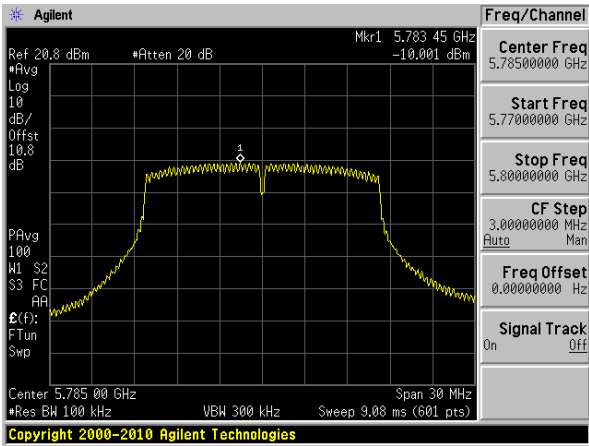


5825 MHz

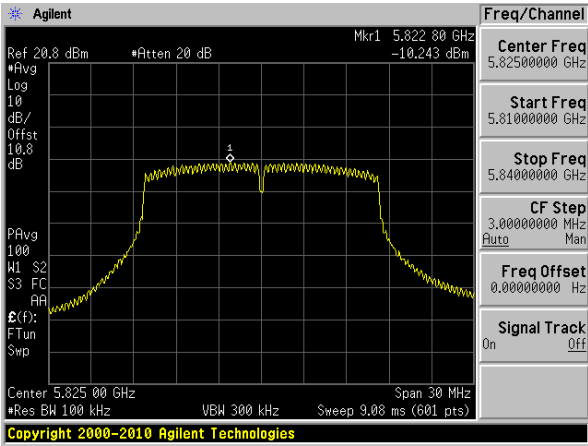


802.11n20 mode


5745 MHz

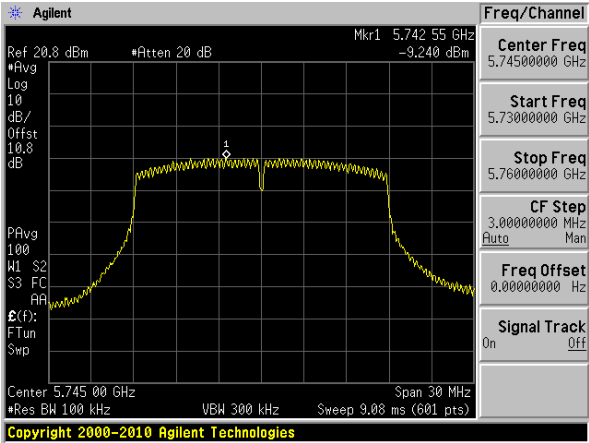



5785 MHz

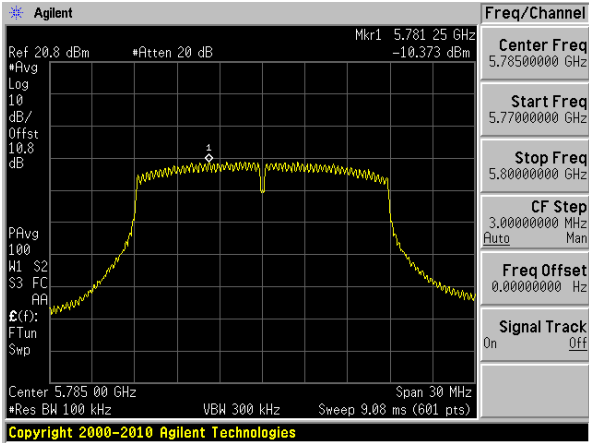

5825 MHz

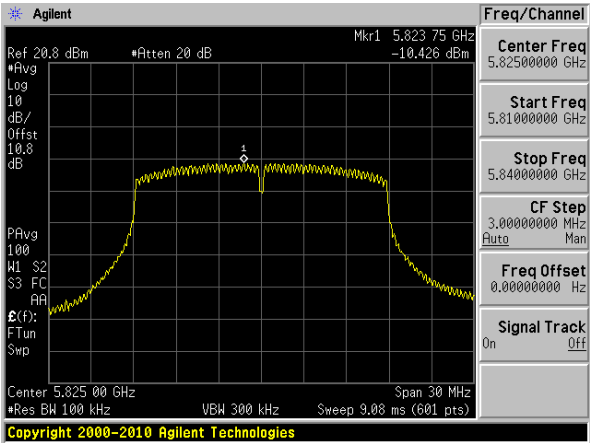


802.11n40 mode

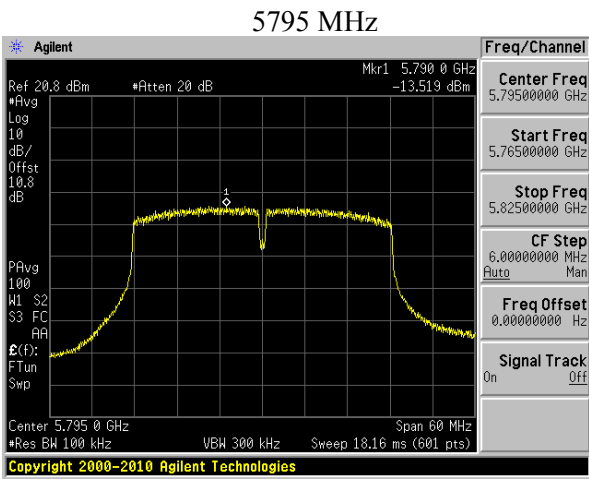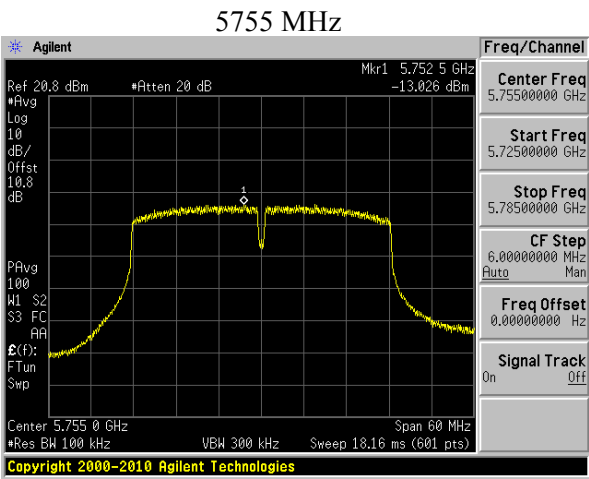


802.11ac20 mode


5745 MHz

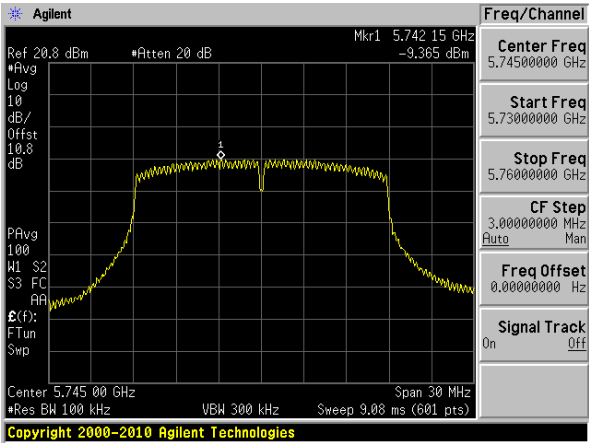

5785 MHz

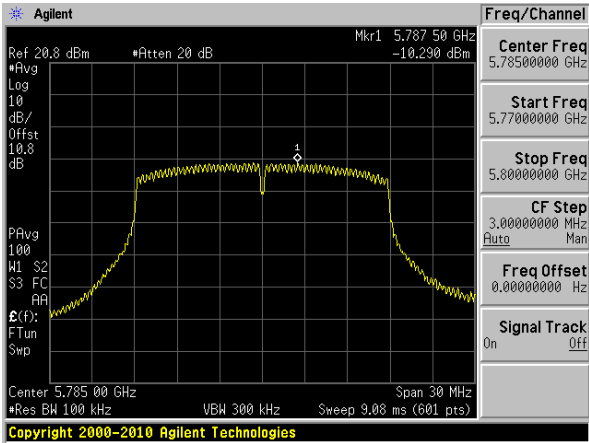


5825 MHz

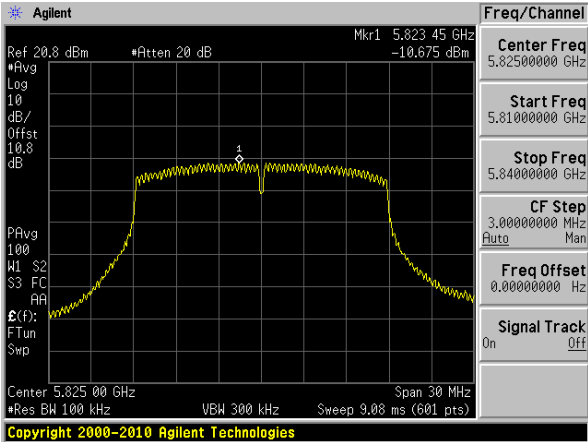


802.11ac40 mode


5755 MHz

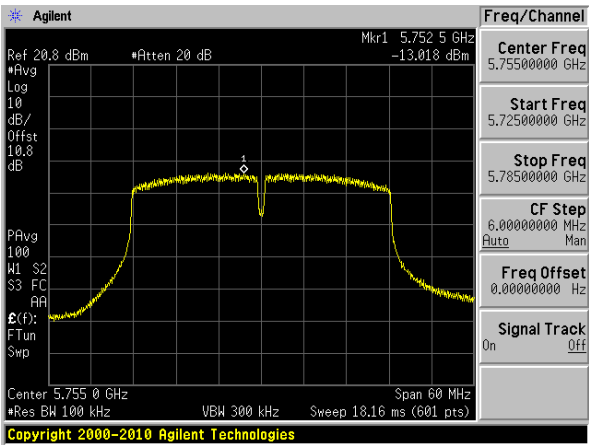

5795 MHz

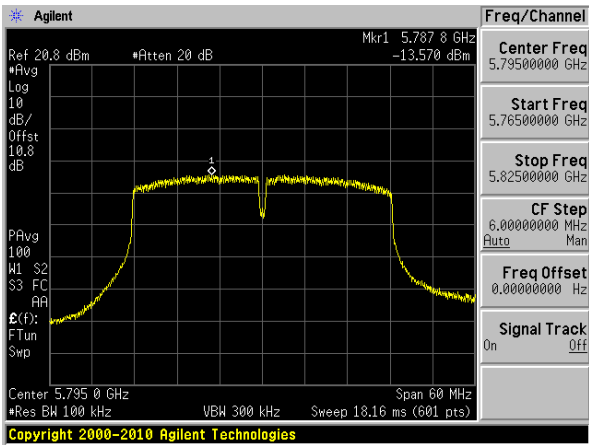

802.11ac80 mode, 5775 MHz

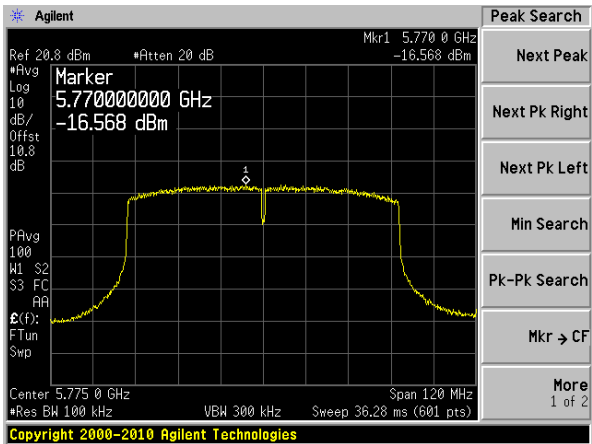

## **11 §15.407(b) & ISSED RSS-247 §6.2 - Out of Band Emissions**

### **11.1 Applicable Standards**

As per FCC Part 15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

According to IC RSS-247 §6.2.1 for devices operating in the frequency band 5150-5250 MHz:

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz.

According to IC RSS-247 §6.2.2 for devices operating in the frequency band 5250-5350 MHz:

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz, the device shall comply with the following:

1. All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. if the equipment is intended for outdoor use; or
2. All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and any emissions within the band 5150-5250 MHz shall meet the power spectral density limits of Section 6.2.1. The device shall be labelled “for indoor use only.”

For devices with operating frequencies in the band 5250-5350 MHz but having a channel bandwidth that overlaps the band 5150-5250 MHz, the devices’ unwanted emission shall not exceed -27 dBm/MHz e.i.r.p. outside the band 5150-5350 MHz and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device shall be labelled “for indoor use only.”

According to IC RSS-247 §6.2.3 for devices operating in the frequency band 5470-5600 MHz and 5650-5725 MHz. Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

According to IC RSS-247 §6.2.4 for devices operating in the frequency band 5725-5850 MHz:

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p.

For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.

## 11.2 Measurement Procedure

Add a correction factor (antenna gain+ Attenuator loss+cable loss) to the offset of the spectrum analyzer.

Integration Method

1. For peak emissions measurements, follow the procedures described in section H)5), “Procedures for Peak Unwanted Emissions Measurements above 1000 MHz”, except for the following changes:
  - Set RBW = 100 kHz
  - Set VBW = 3RBW
  - Perform a band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured. CAUTION: You must ensure that the spectrum analyzer or EMI receiver is set for peak-detection and max-hold for this measurement.
2. For average emissions measurements, follow the procedures described in section H)6), “Procedures for Average Unwanted Emissions Measurements above 1000 MHz”, except for the following changes:
  - Set RBW = 100 kHz
  - Set VBW = 3RBW
  - Perform a band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured.

### 11.3 Test Equipment List and Details

| Manufacturer    | Description        | Model No. | Serial No. | Calibration Date       | Calibration Interval |
|-----------------|--------------------|-----------|------------|------------------------|----------------------|
| Agilent         | Analyzer, Spectrum | E4446A    | US44300386 | 2015-10-22             | 1 year               |
| Rohde & Schwarz | Signal Analyzer    | FSQ26     | 200749     | 2016-03-24             | 1year                |
| -               | 10dB attenuator    | -         | -          | Each time <sup>1</sup> | N/A                  |

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.*

### 11.4 Test Environmental Conditions

|                      |                 |
|----------------------|-----------------|
| Test Date:           | 2016-07-31      |
| Test Site:           | RF Test Site    |
| Temperature:         | 22-24° C        |
| Relative Humidity:   | 40-41 %         |
| Barometric Pressure: | 103.1-104.1 kPa |
| Test Personnel:      | Frank Wang      |

### 11.5 Test Results


Please refer to the following plots

(1) Out-of-band spurious emission


5150 - 5250 MHz

802.11a mode


Low Channel 5180 MHz (30MHz-6GHz)

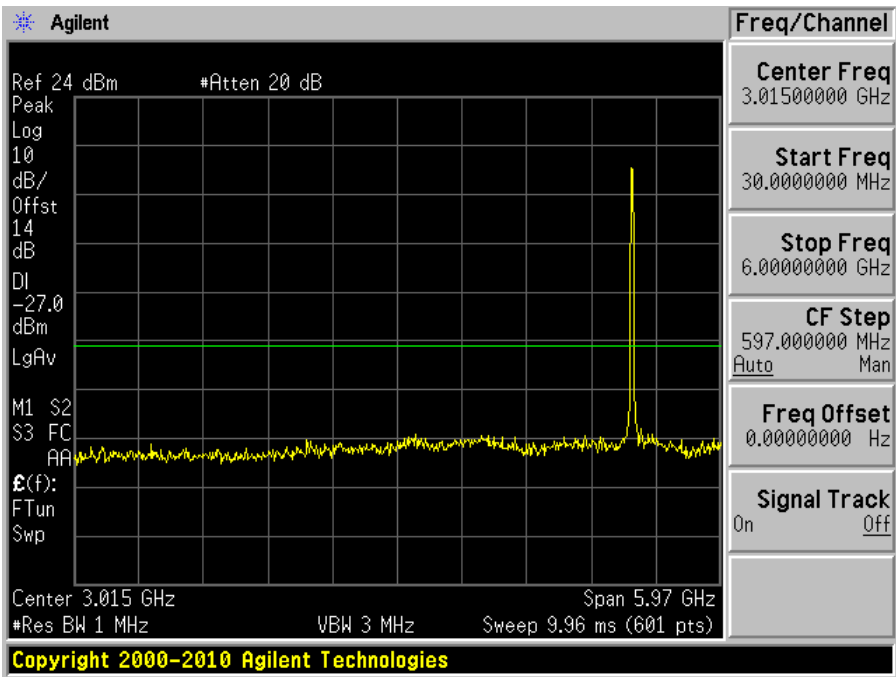


Low Channel 5180 MHz (6-40GHz)

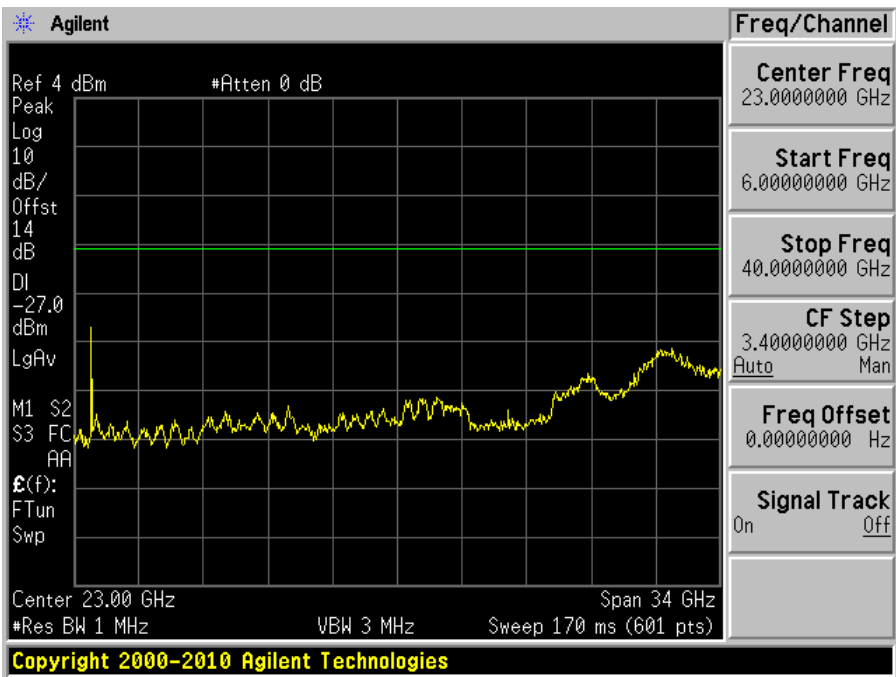


Middle Channel 5200 MHz (30MHz-6GHz)

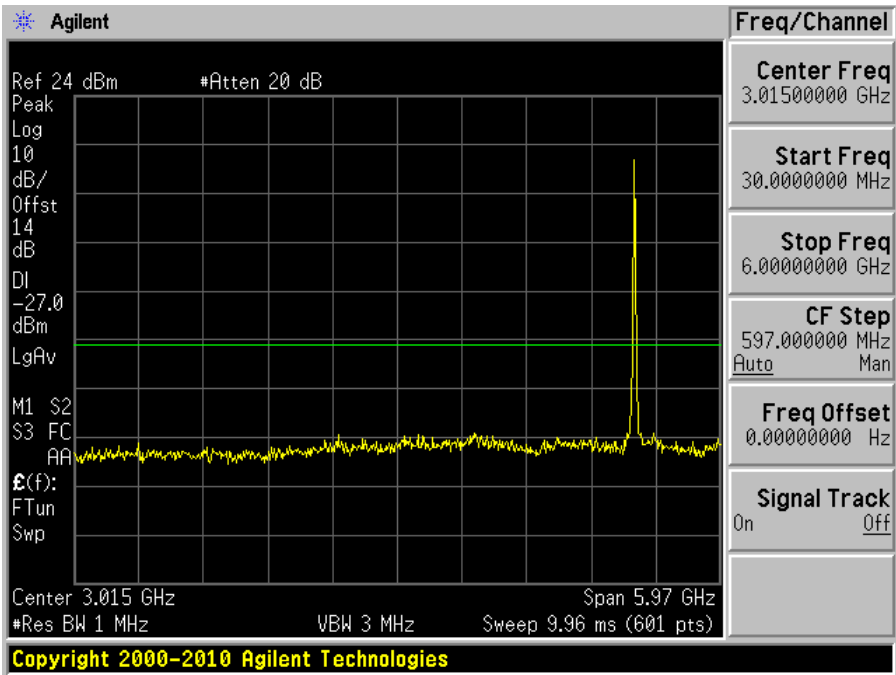


Middle Channel 5200 MHz (6-40GHz)

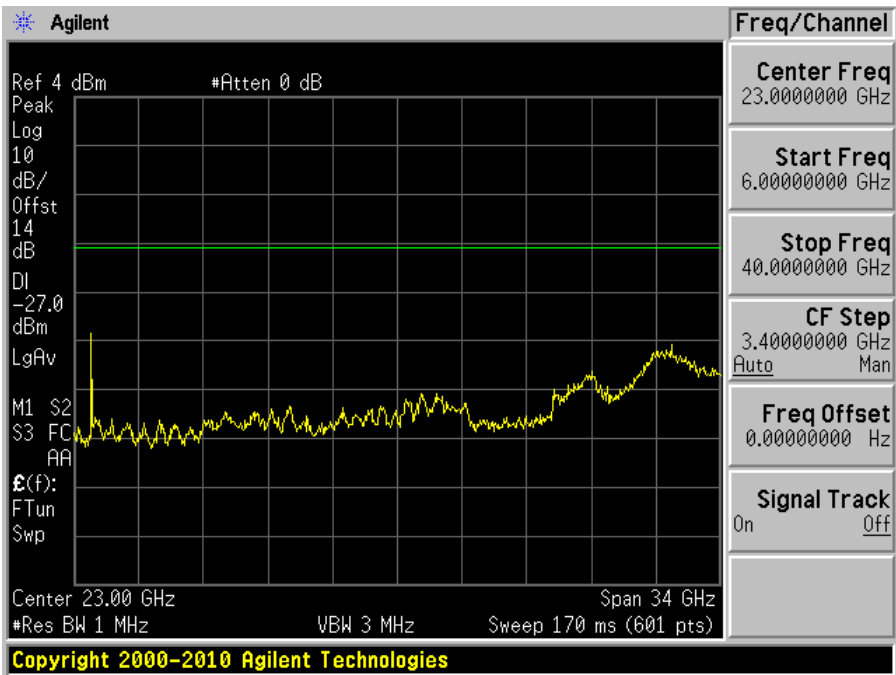

High Channel 5240 MHz (30MHz-6GHz)

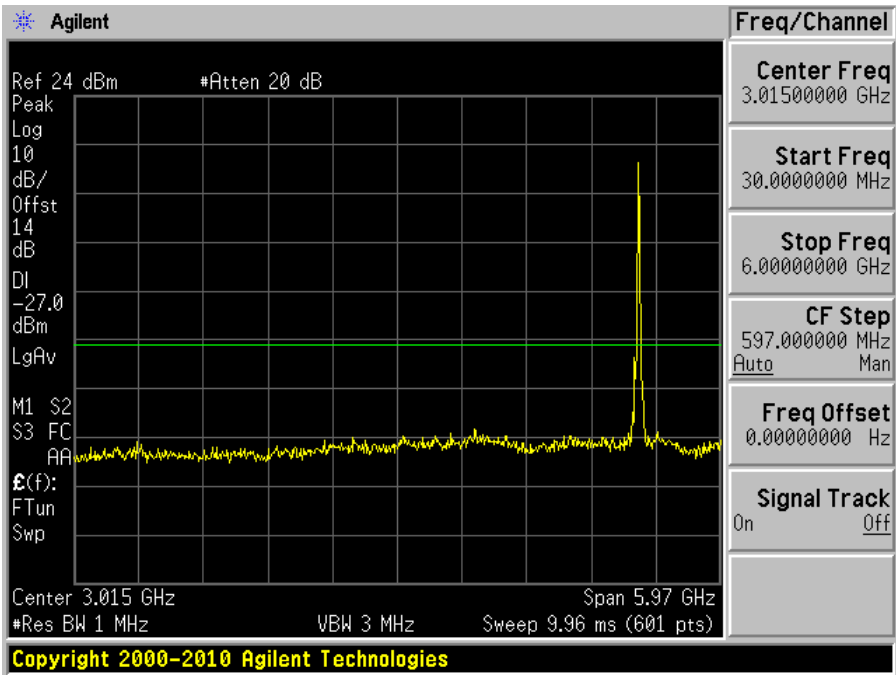


High Channel 5240 MHz (6-40GHz)

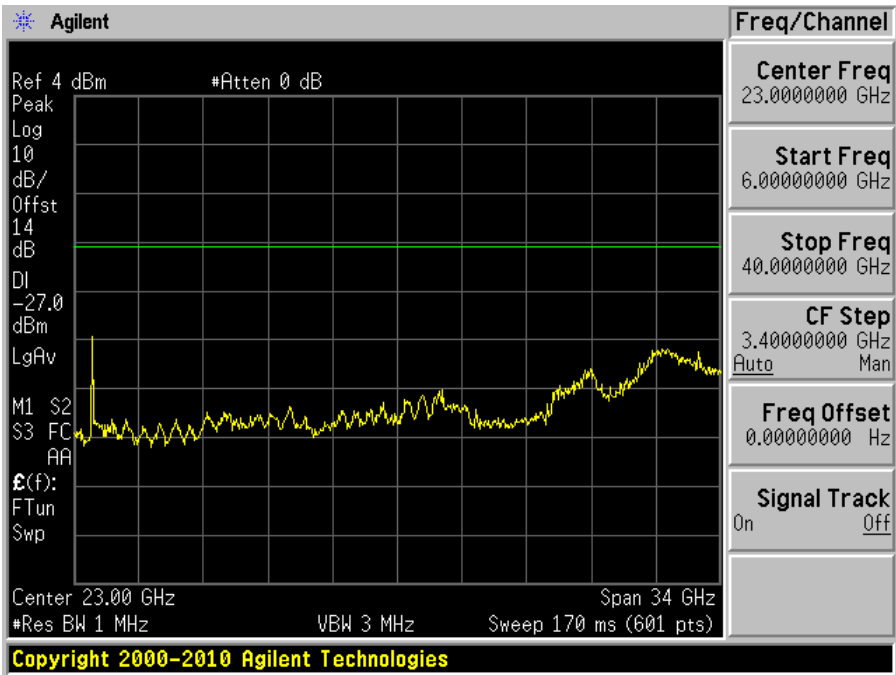


802.11n20 mode


Low Channel 5180 MHz (30MHz-6GHz)

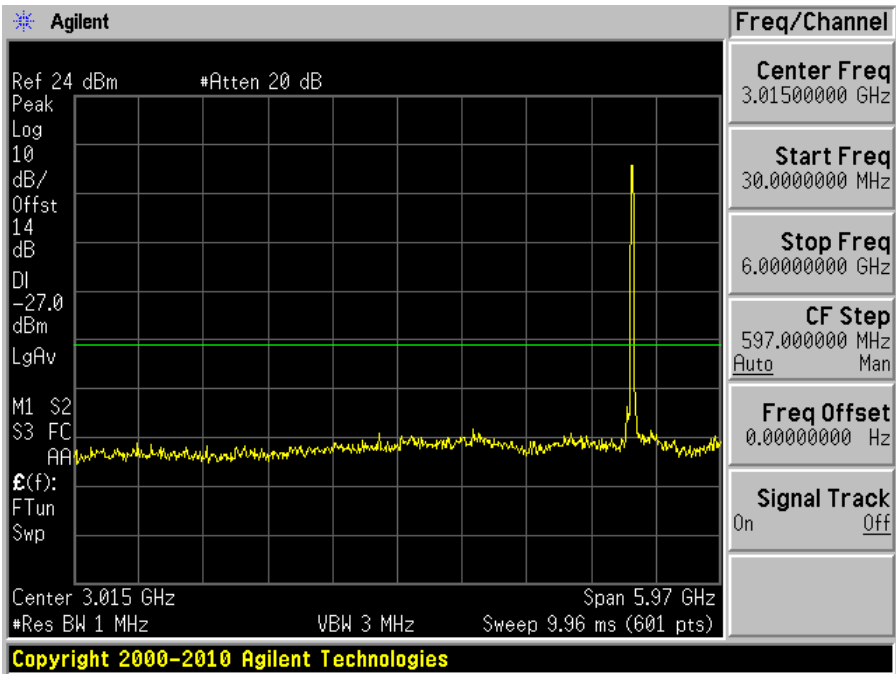


Low Channel 5180 MHz (6-40GHz)

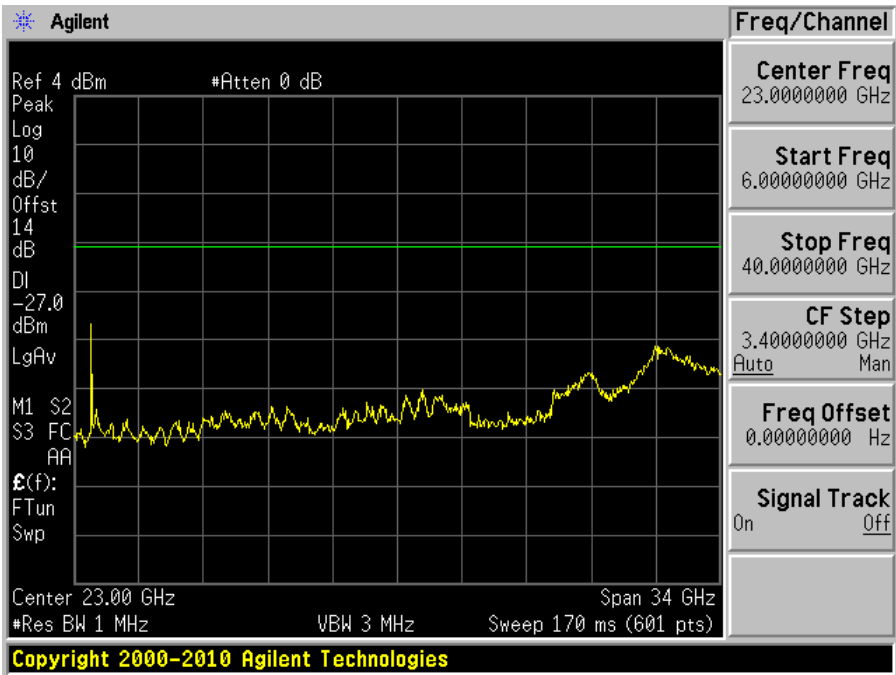


Middle Channel 5200 MHz (30MHz-6GHz)

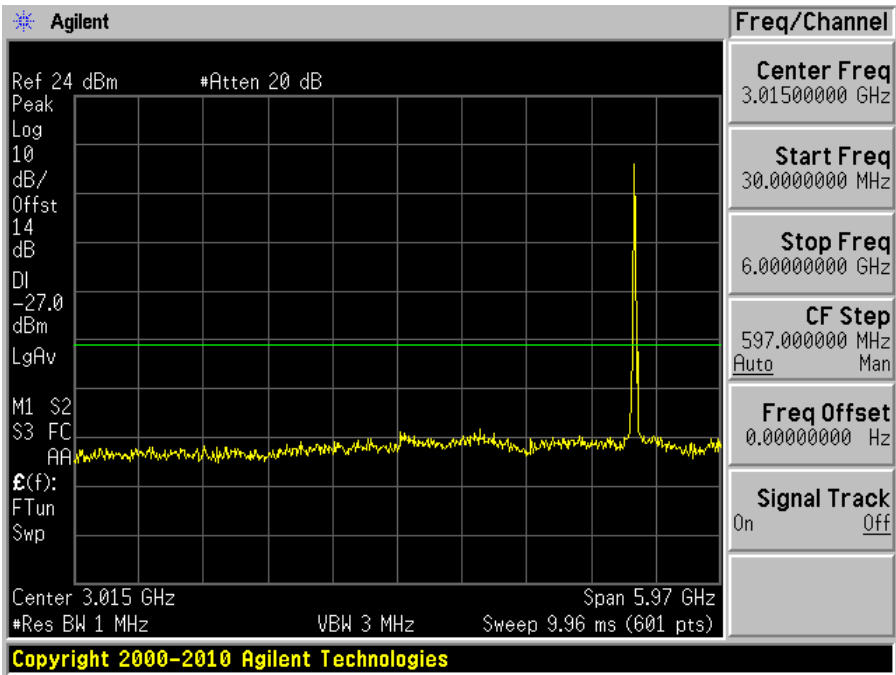


Middle Channel 5200 MHz (6-40GHz)

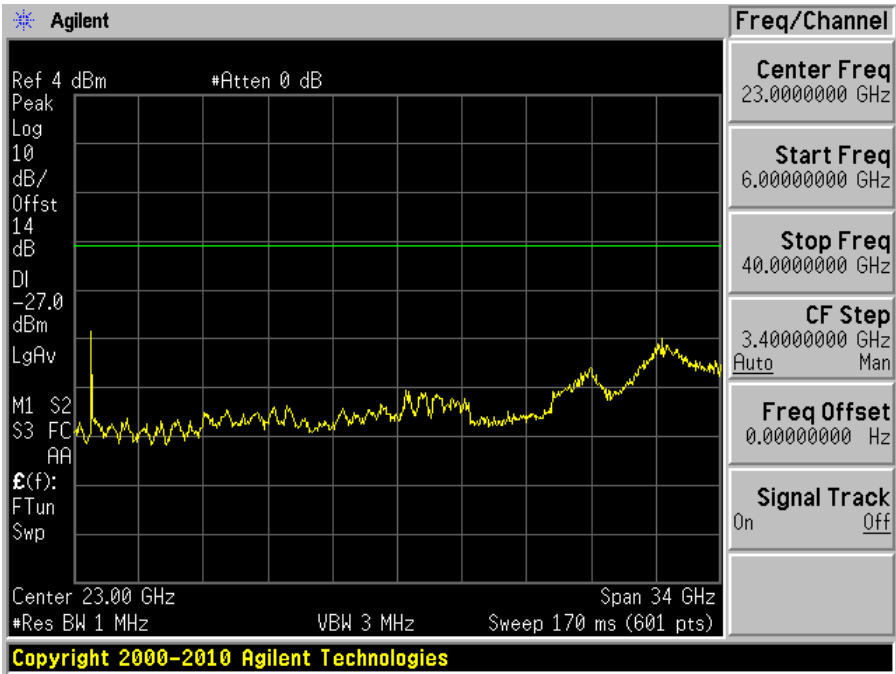

High Channel 5240 MHz (30MHz-6GHz)

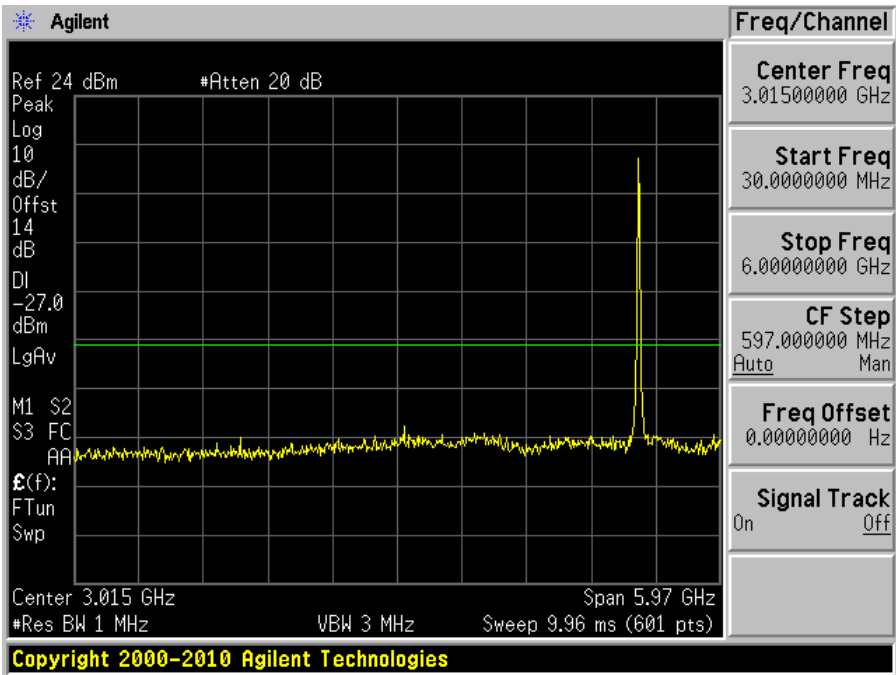


High Channel 5240 MHz (6-40GHz)

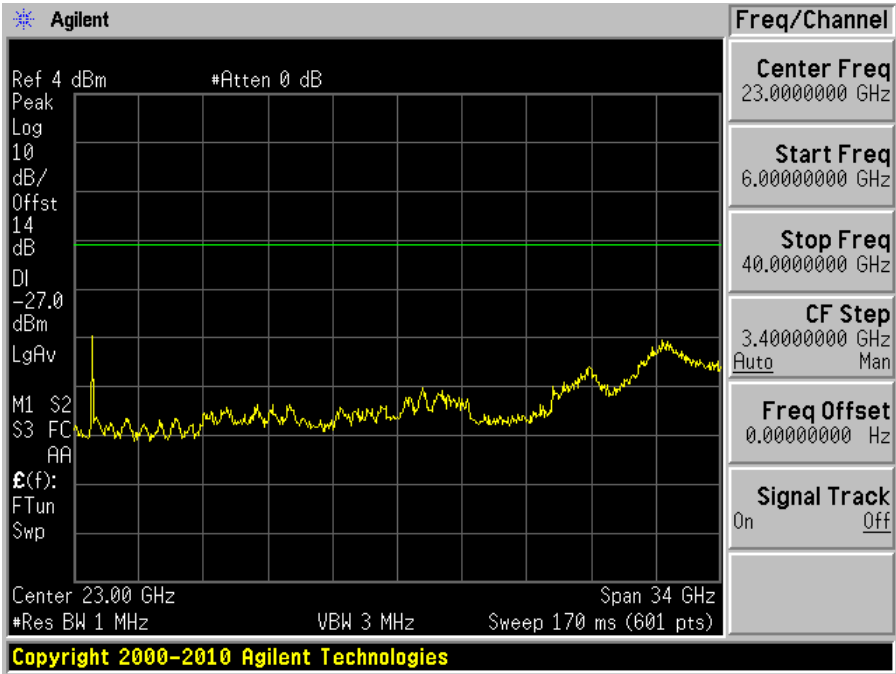


802.11n40 mode


Low Channel 5190 MHz (30MHz-6GHz)

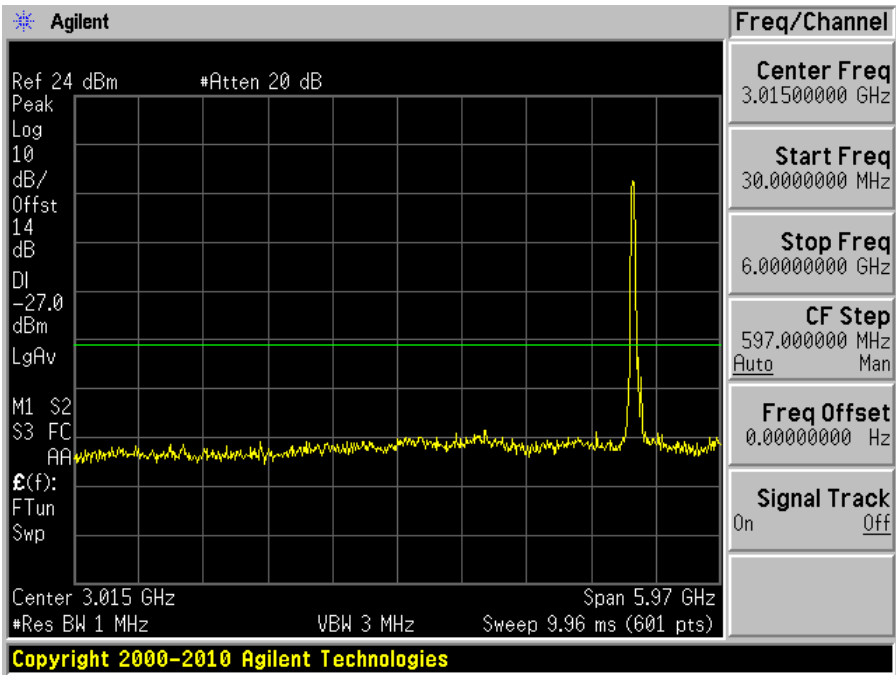


Low Channel 5190 MHz (6-40GHz)

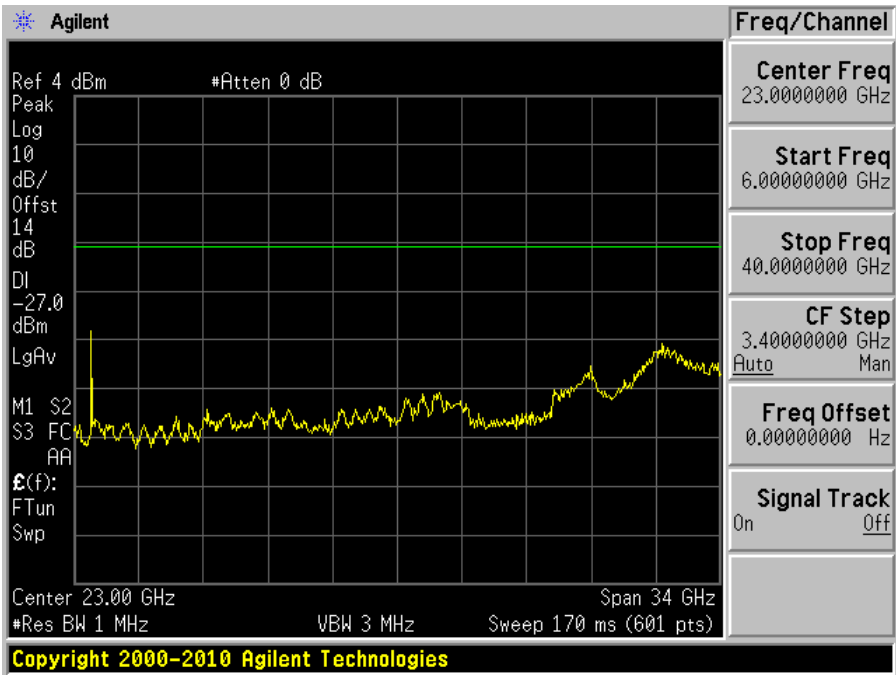

High Channel 5230 MHz (30MHz-6GHz)

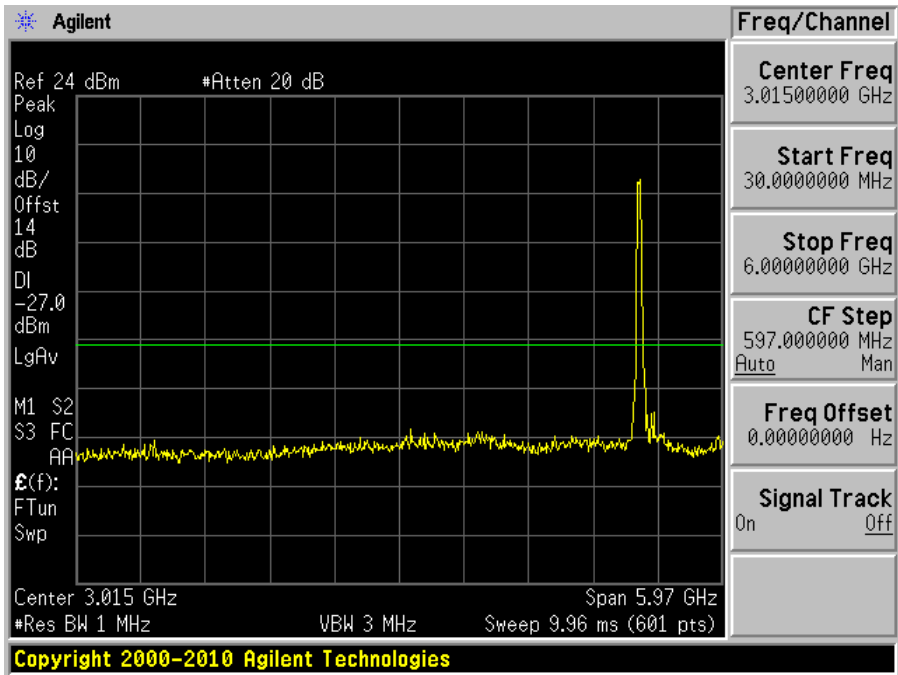


High Channel 5230 MHz (6-40GHz)

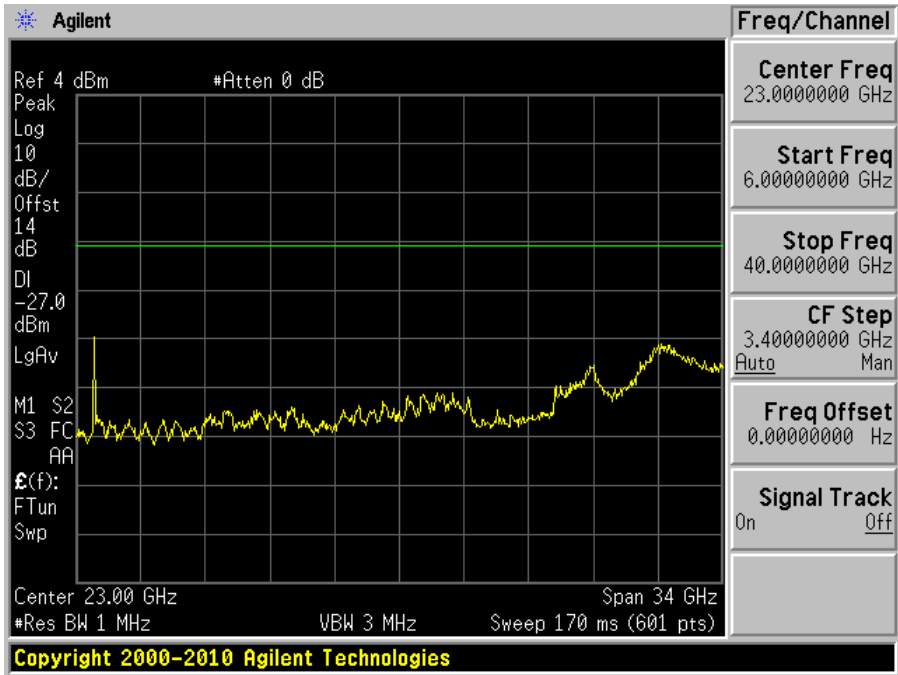


802.11ac20 mode


Low Channel 5180 MHz (30MHz-6GHz)

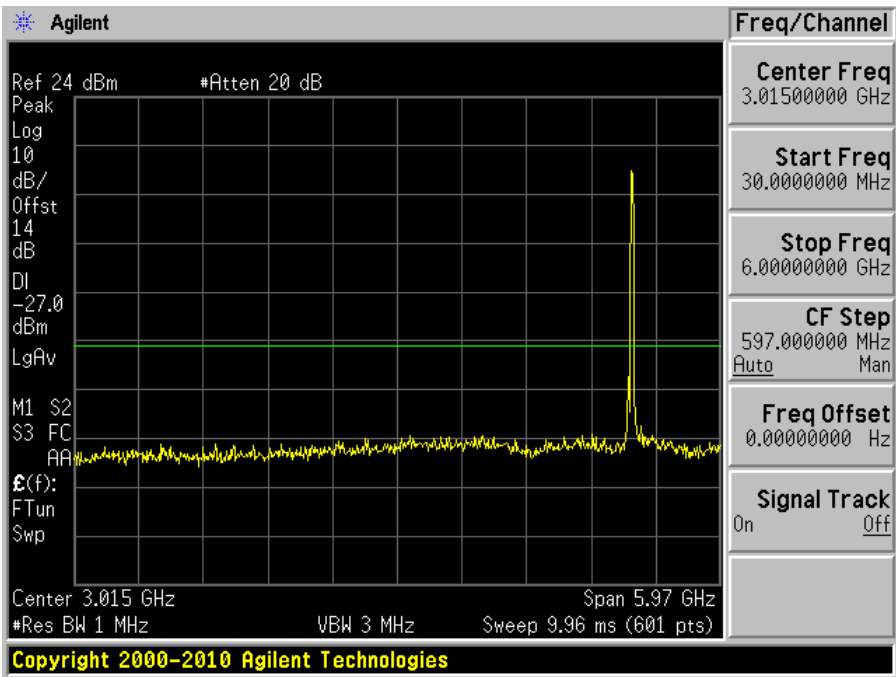


Low Channel 5180 MHz (6-40GHz)

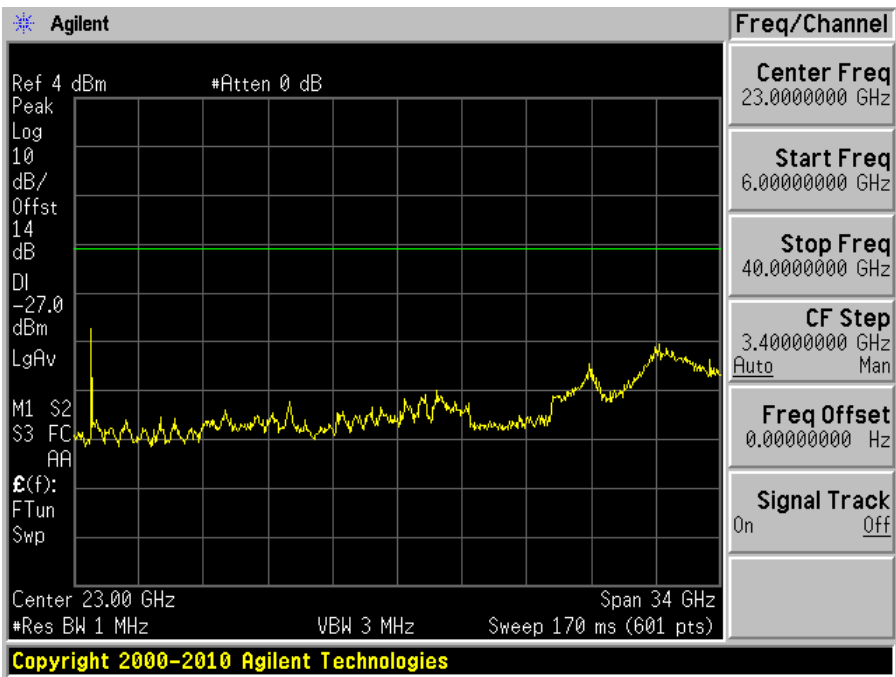


Middle Channel 5200 MHz (30MHz-6GHz)

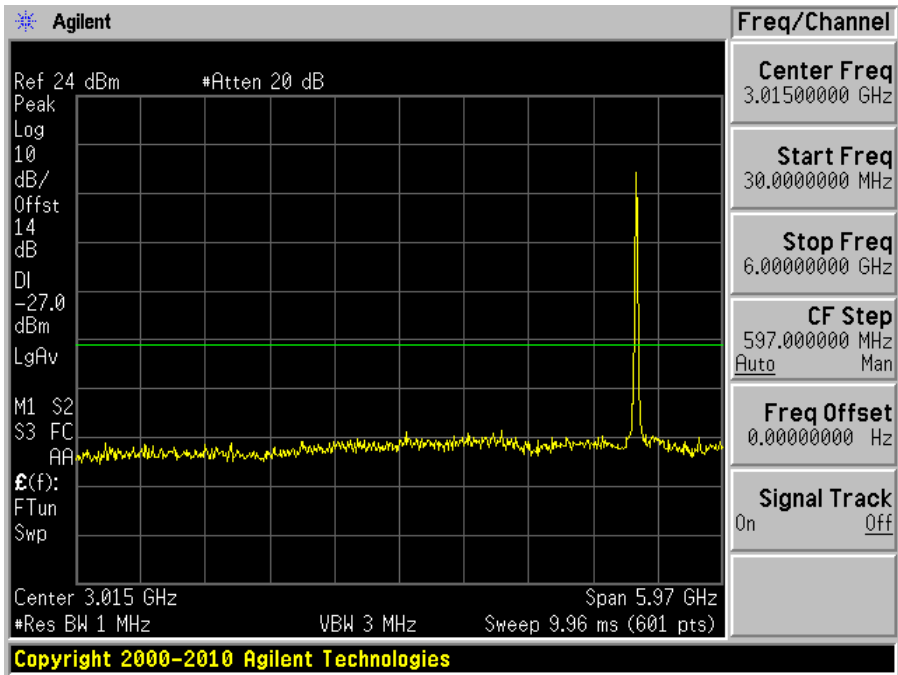


Middle Channel 5200 MHz (6GHz – 40GHz)

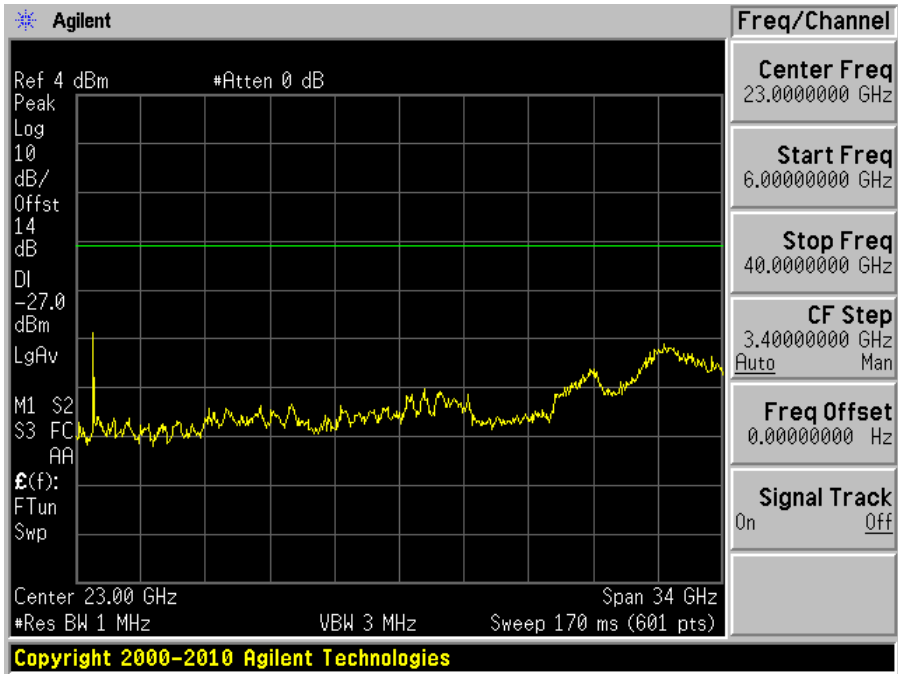

High Channel 5240 MHz (30MHz-6GHz)

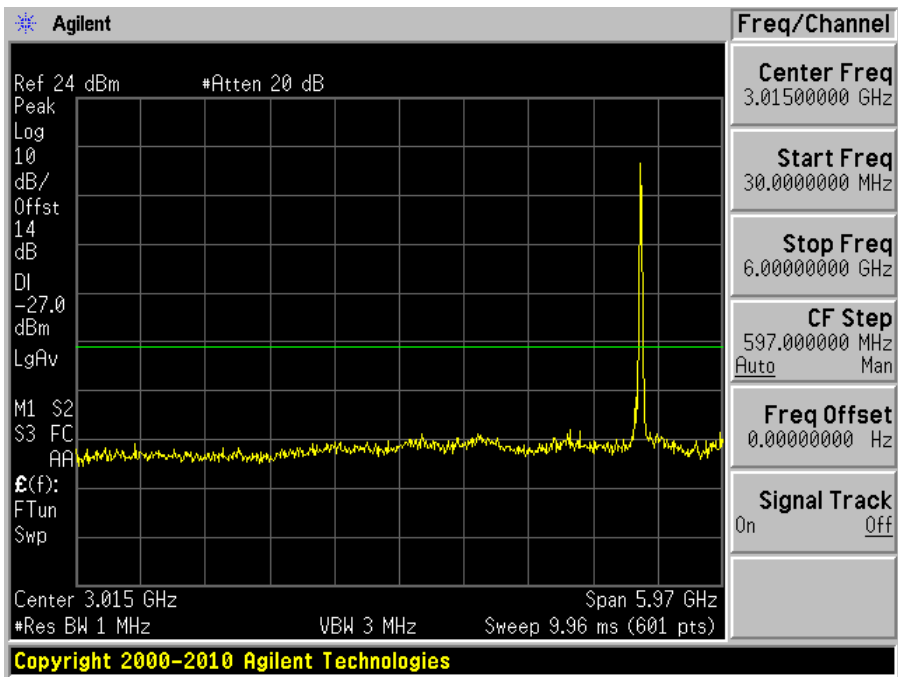


High Channel 5240 MHz (6GHz – 40GHz)

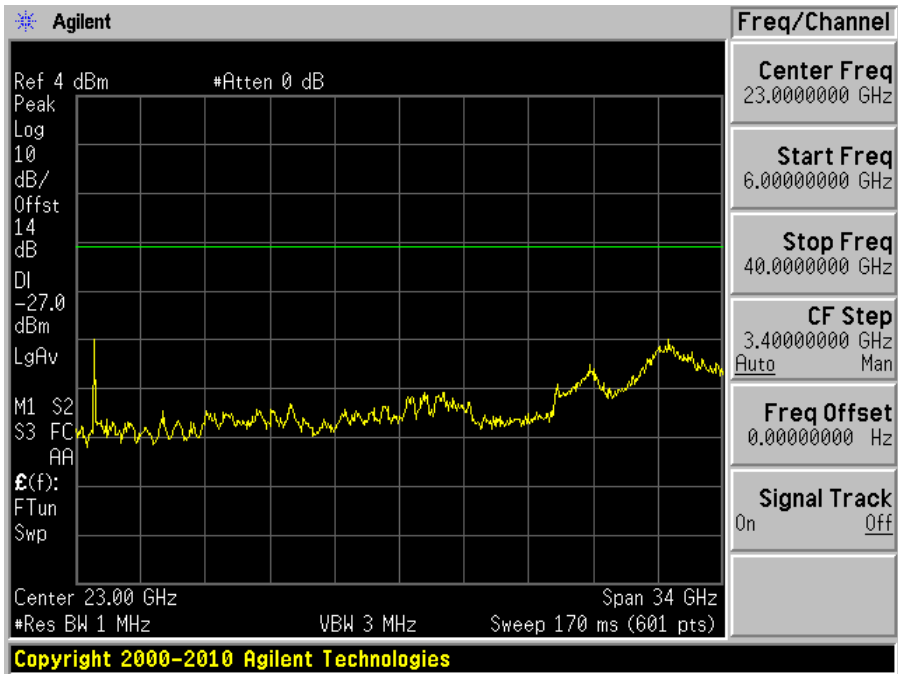


802.11ac40 mode


Low Channel 5190 MHz (30MHz-6GHz)

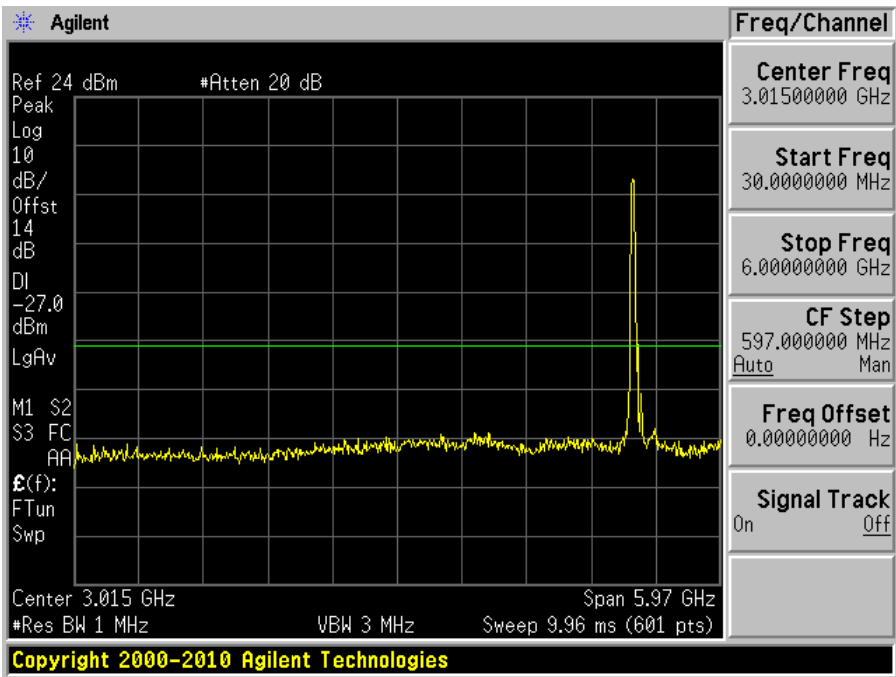


Low Channel 5190 MHz (6-40GHz)

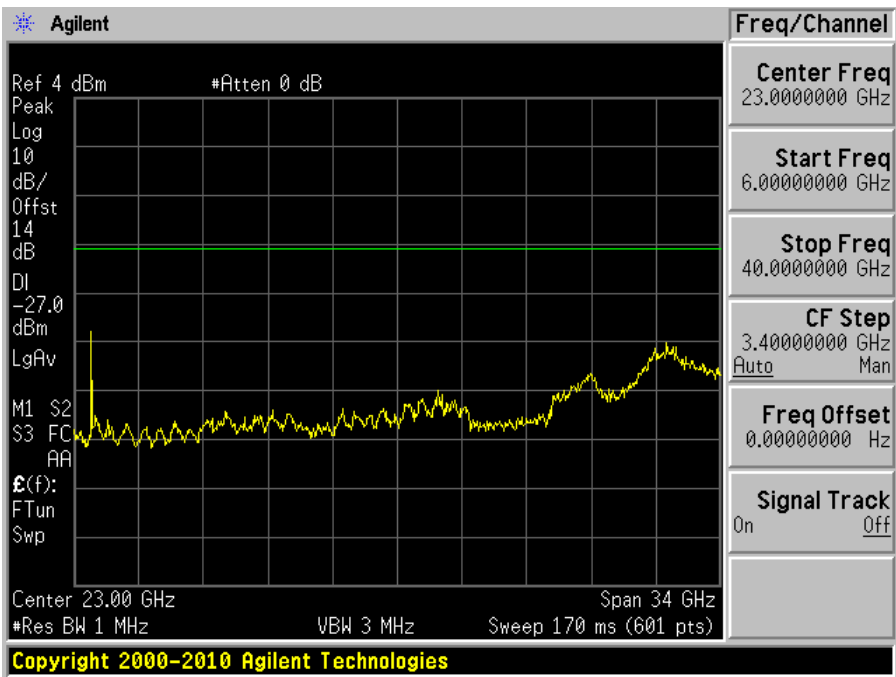

High Channel 5230 MHz (30MHz-6GHz)

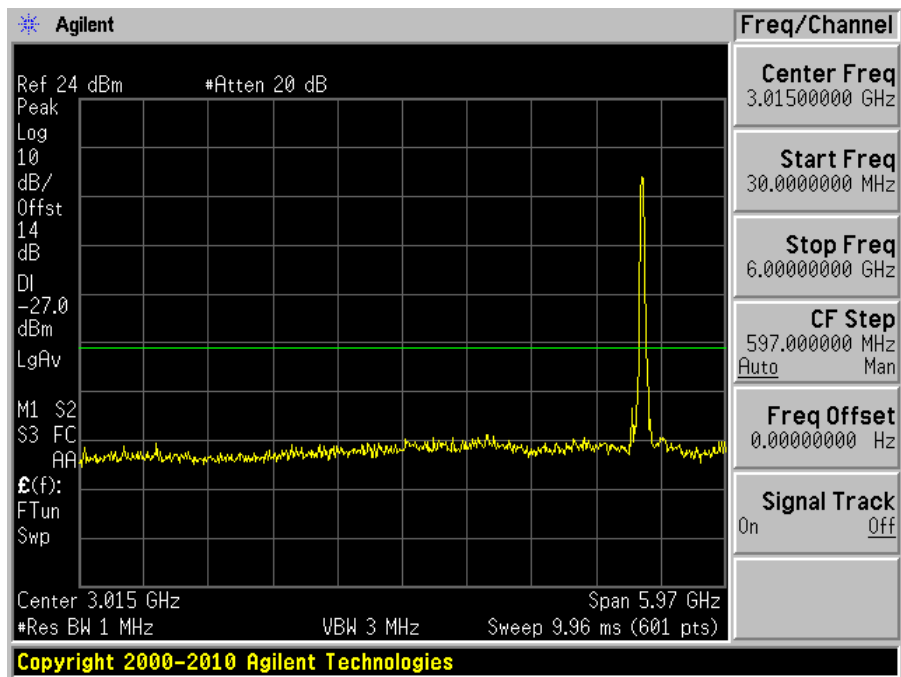


High Channel 5230 MHz (6GHz – 40GHz)

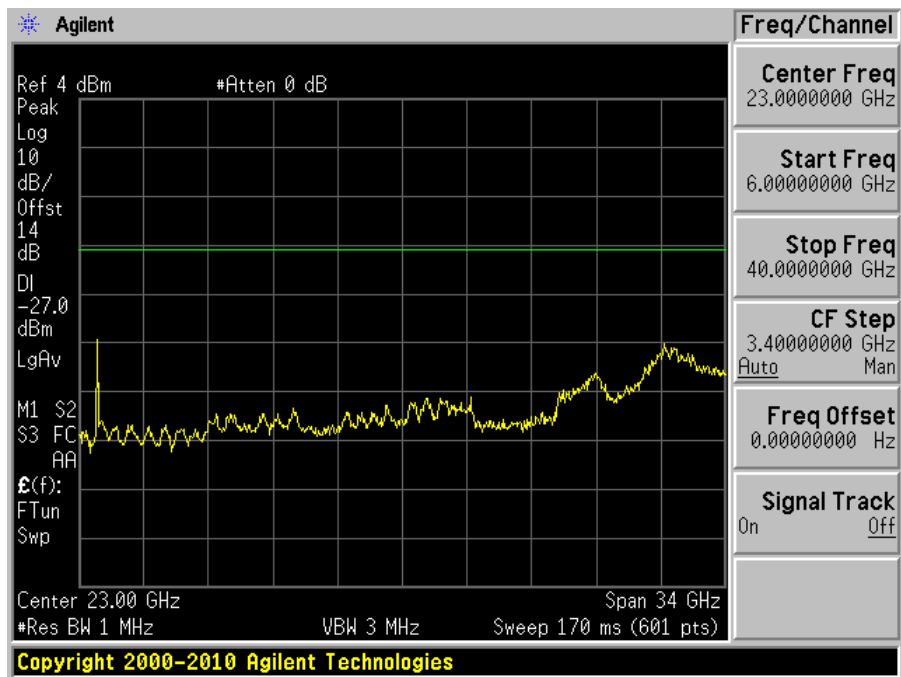


802.11ac80 mode

5210 MHz (30MHz-6GHz)

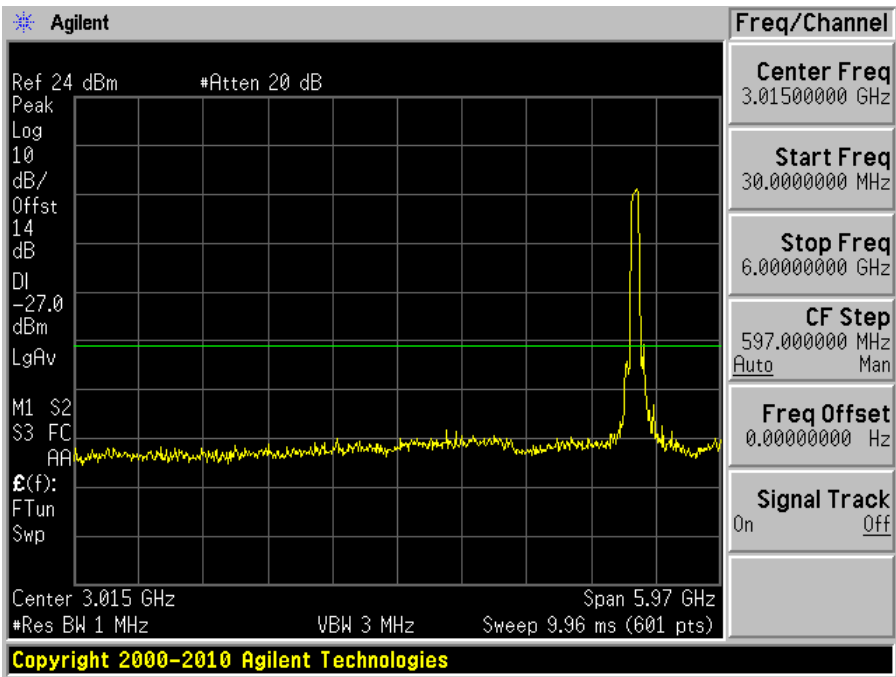


5210 MHz (6GHz – 40GHz)

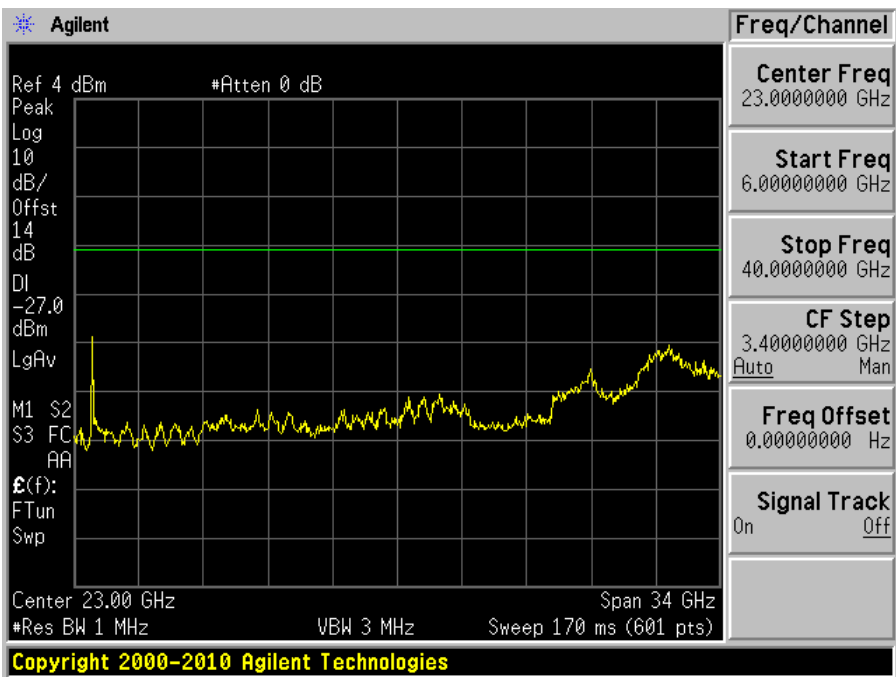


5250 – 5350 MHz

802.11a mode


Low Channel 5260 MHz (30MHz-6GHz)

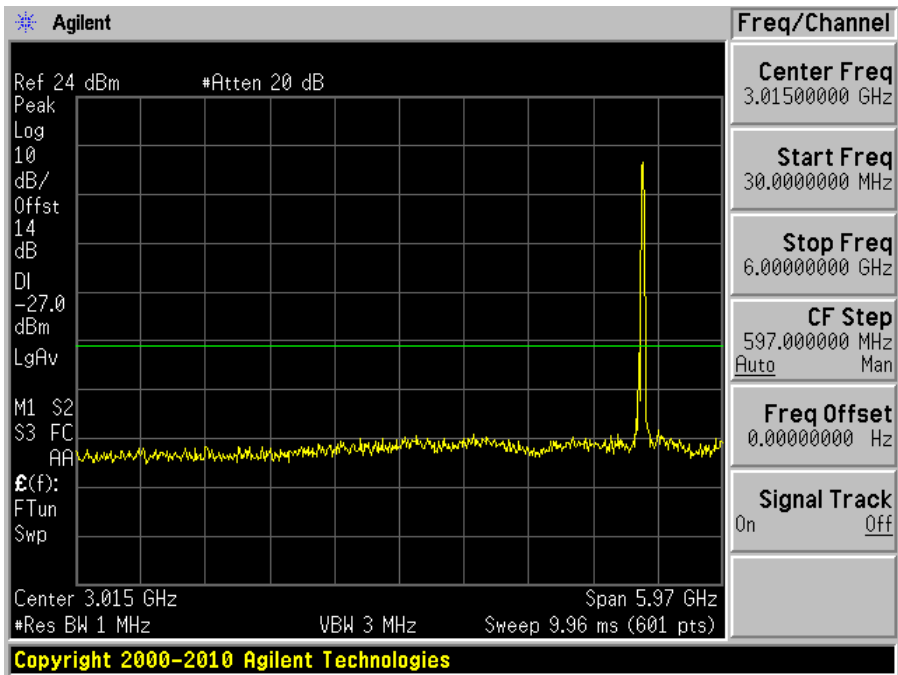


Low Channel 5260 MHz (6-40GHz)

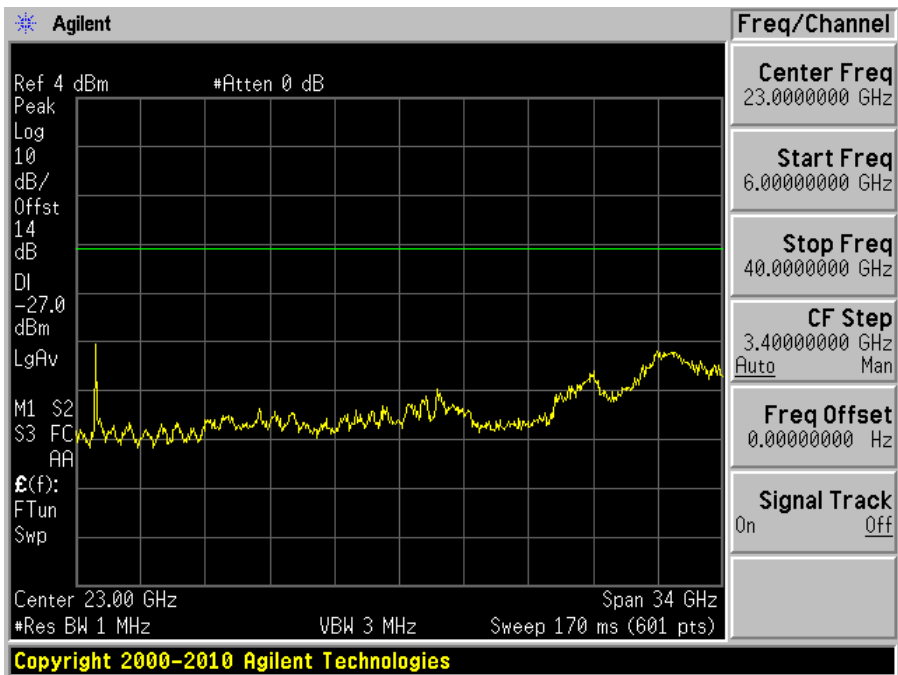


Middle Channel 5280 MHz (30MHz-6GHz)

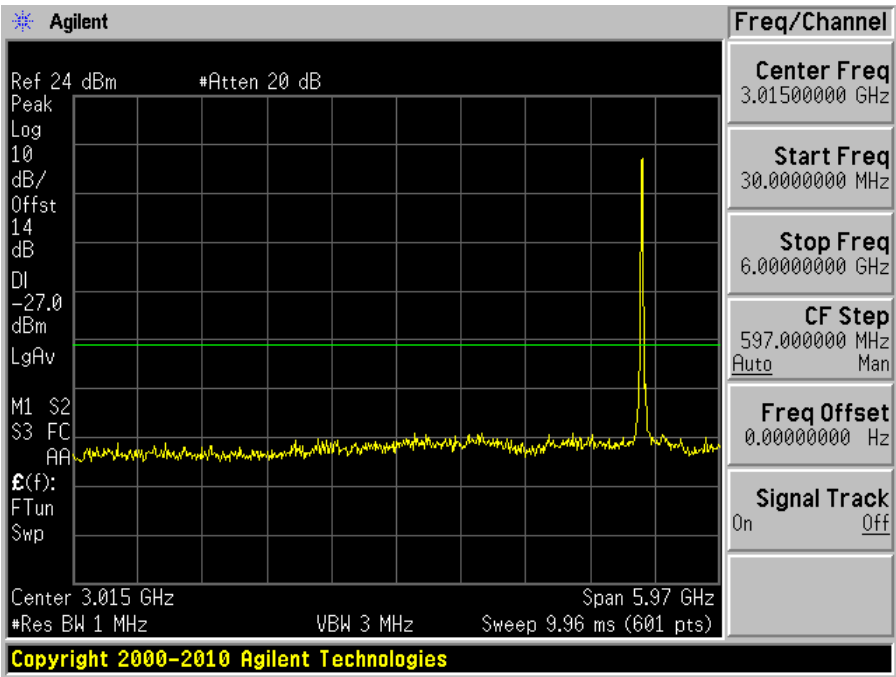


Middle Channel 5280 MHz (6-40GHz)

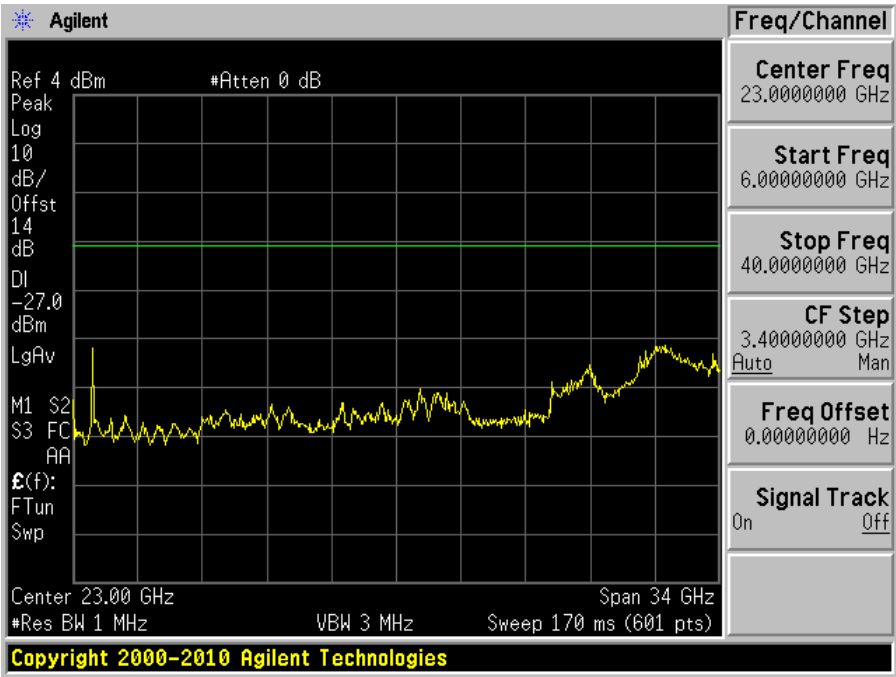

High Channel 5320 MHz (30MHz-6GHz)

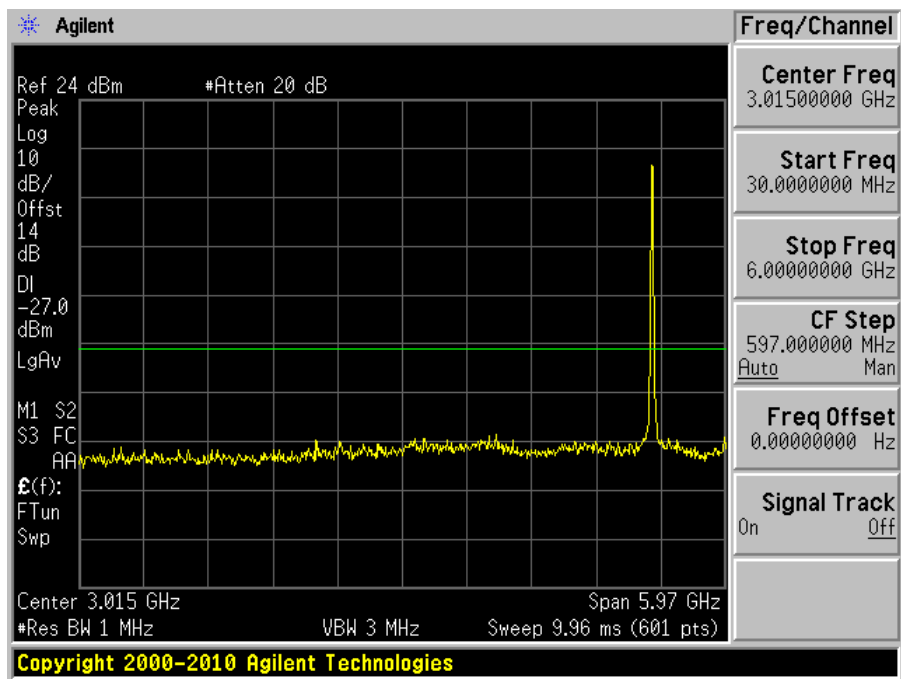


High Channel 5320 MHz (6-40GHz)

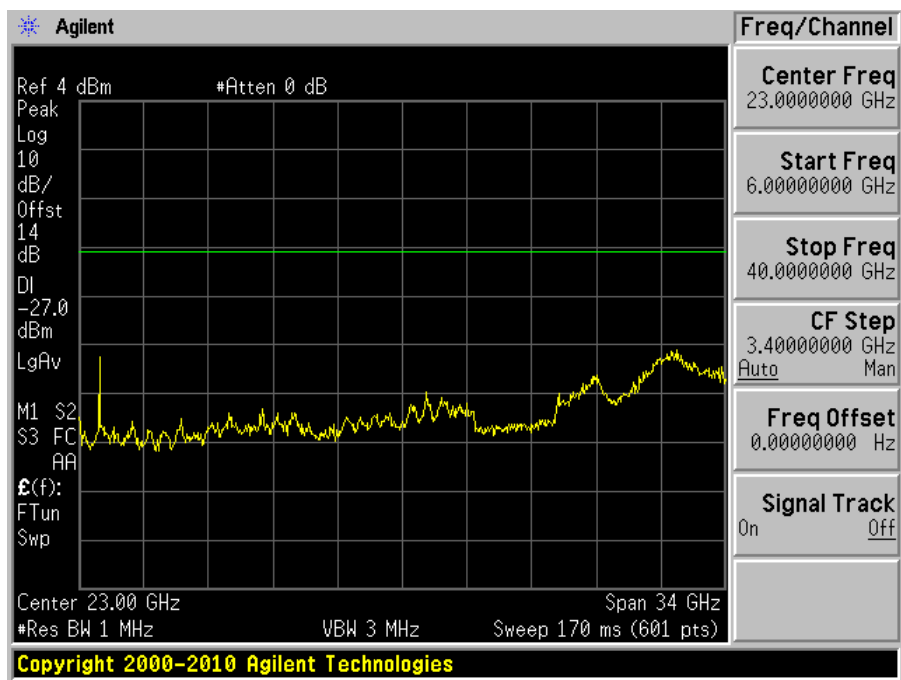


802.11n20 mode


Low Channel 5260 MHz (30MHz-6GHz)

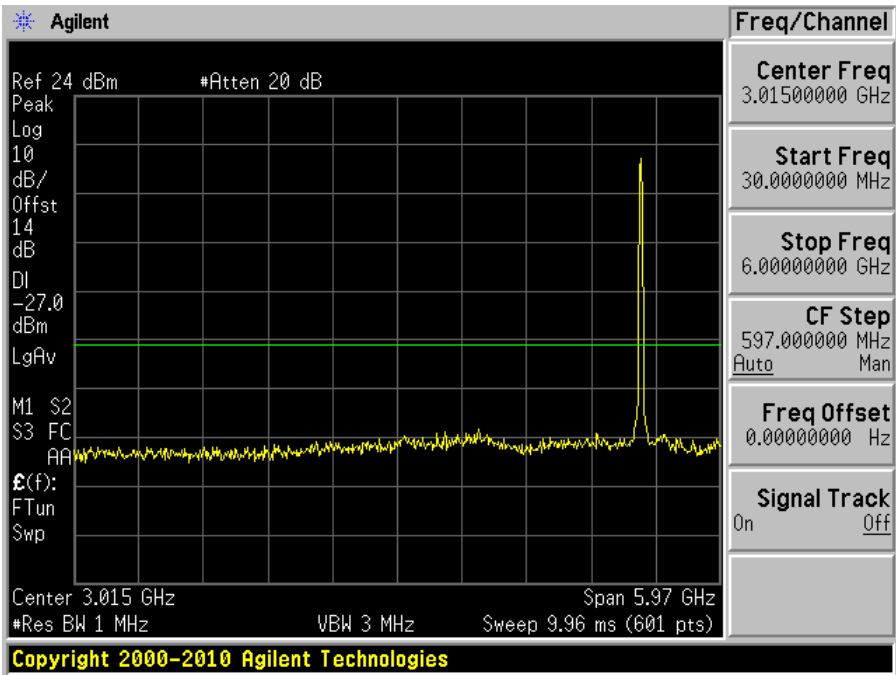


Low Channel 5260 MHz (6-40GHz)

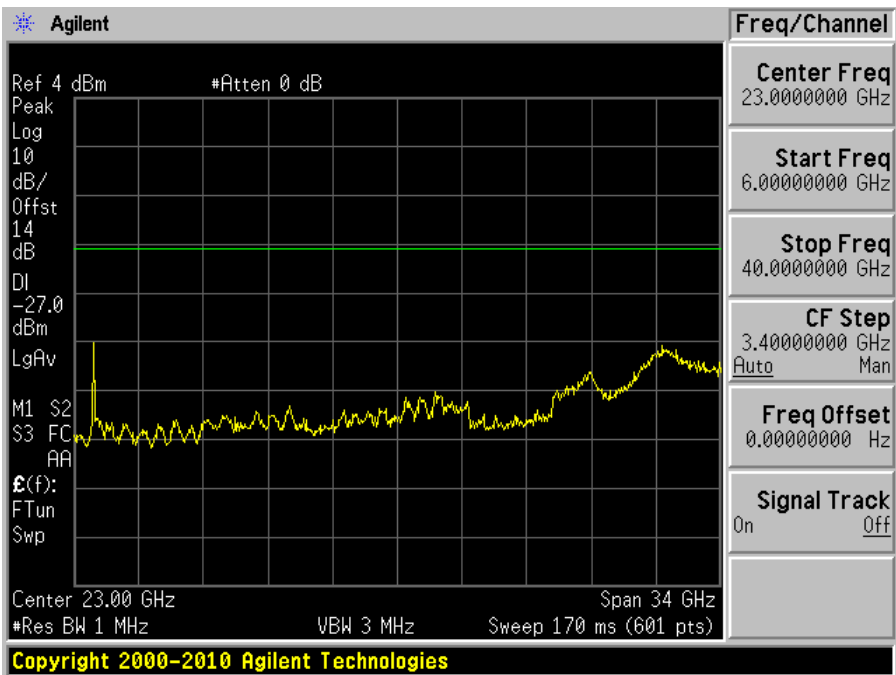


Middle Channel 5280 MHz (30MHz-6GHz)

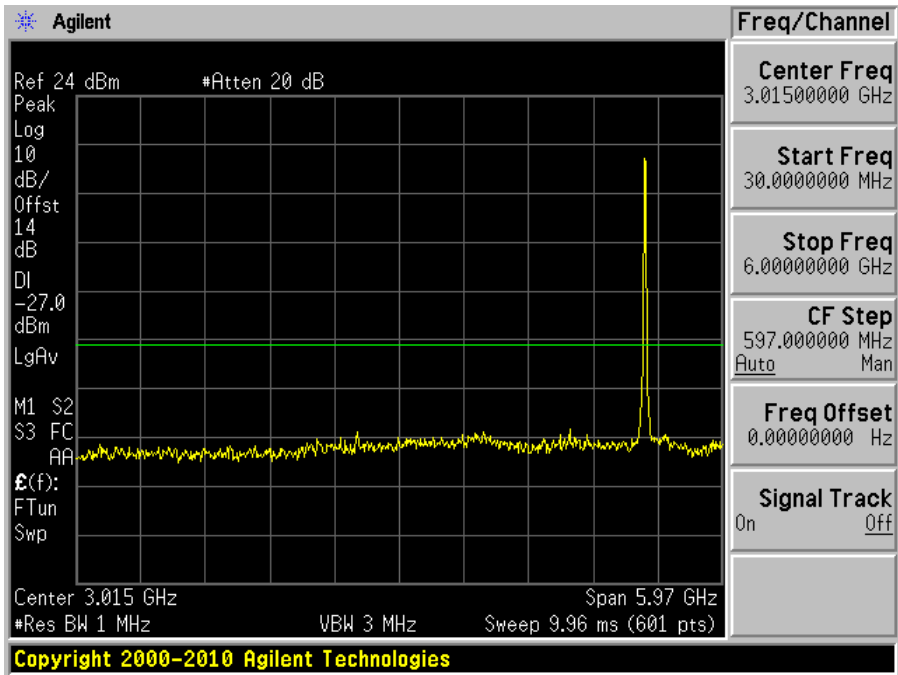


Middle Channel 5280 MHz (6-40GHz)

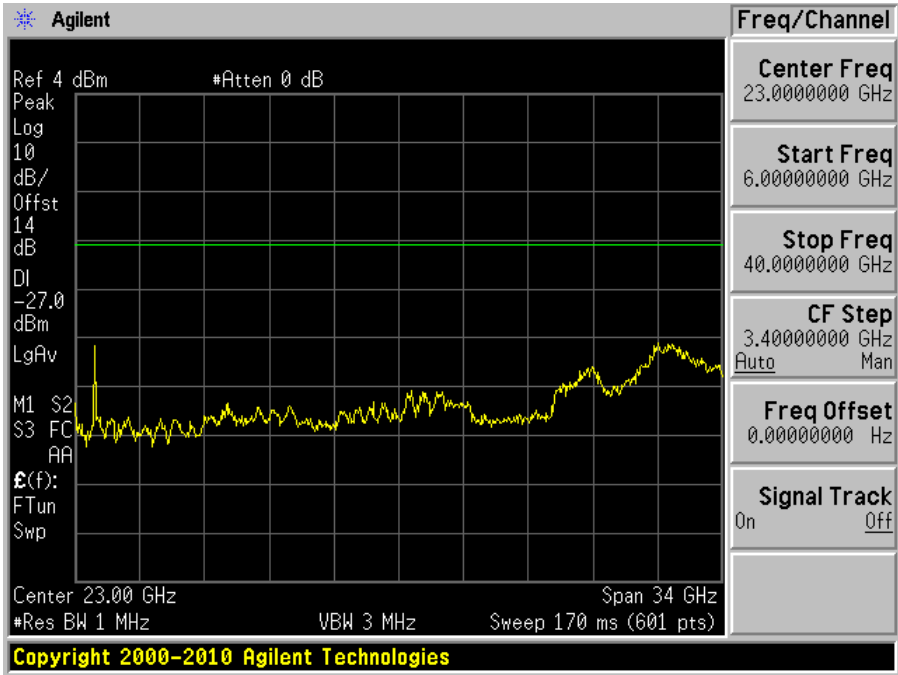

High Channel 5320 MHz (30MHz-6GHz)

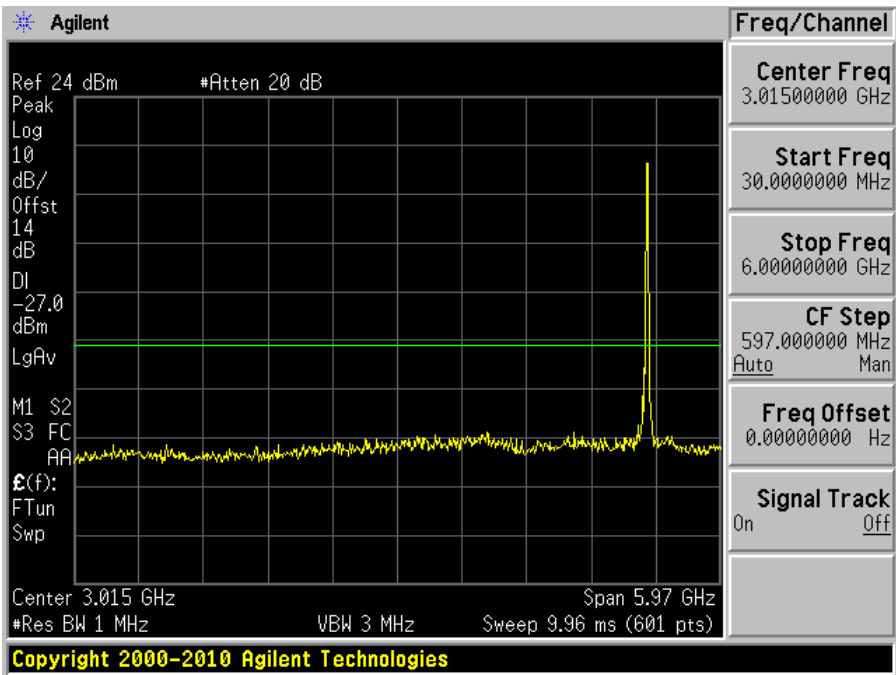


High Channel 5320 MHz (6-40GHz)

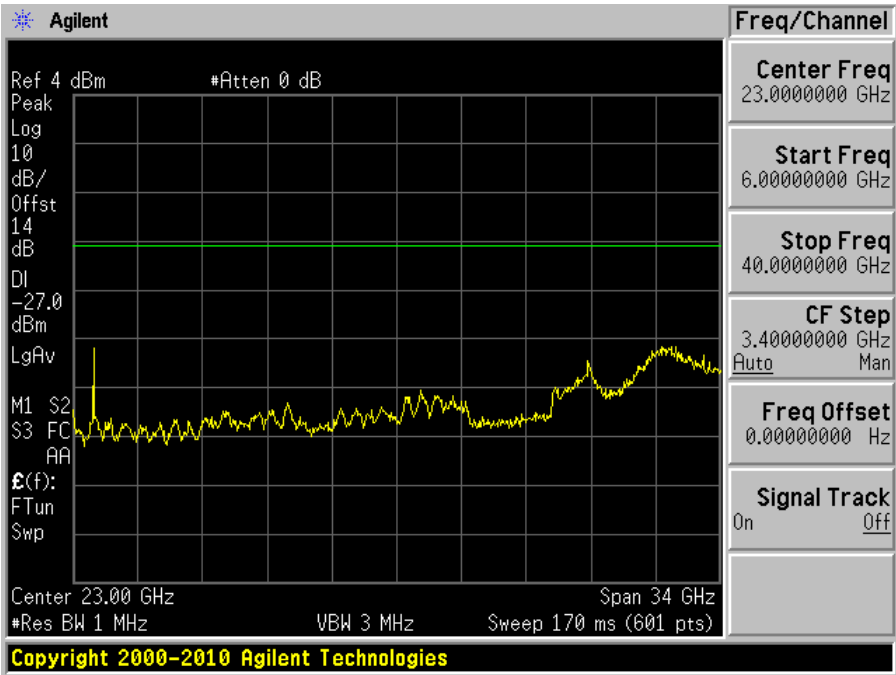


802.11n40 mode


Low Channel 5270 MHz (30MHz-6GHz)

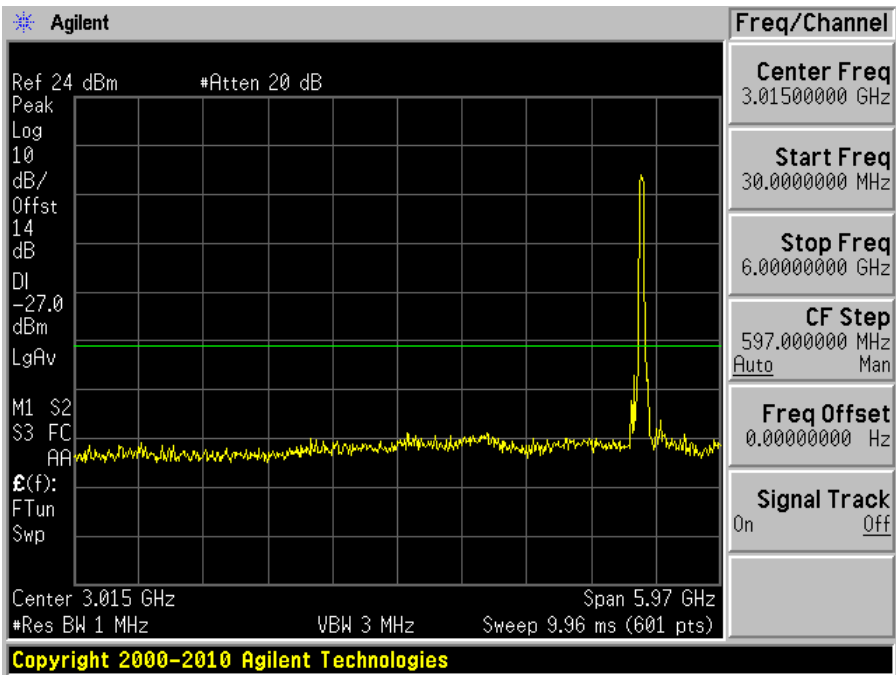


Low Channel 5270 MHz (6-40GHz)

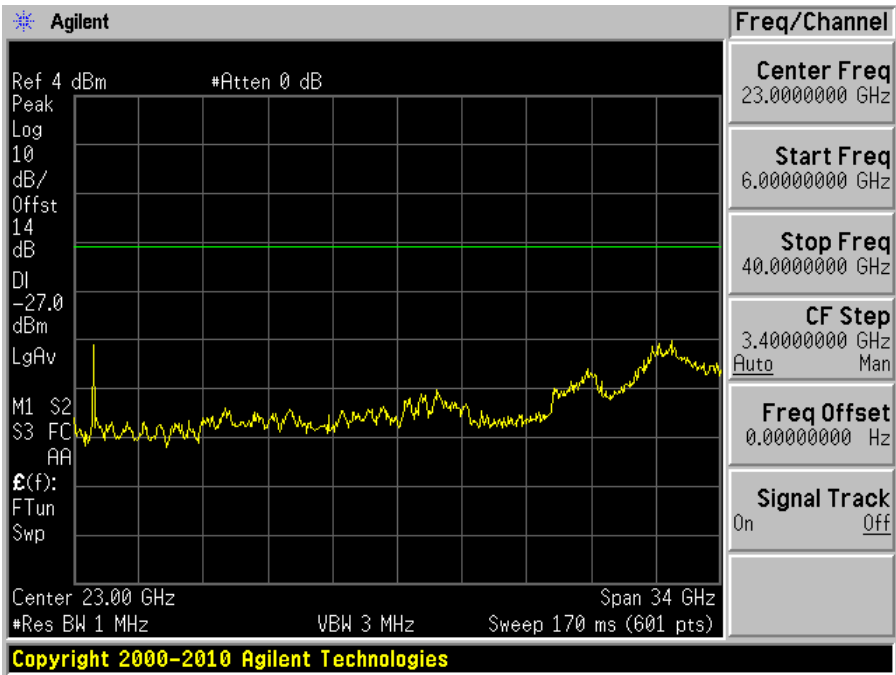

High Channel 5310 MHz (30MHz-6GHz)

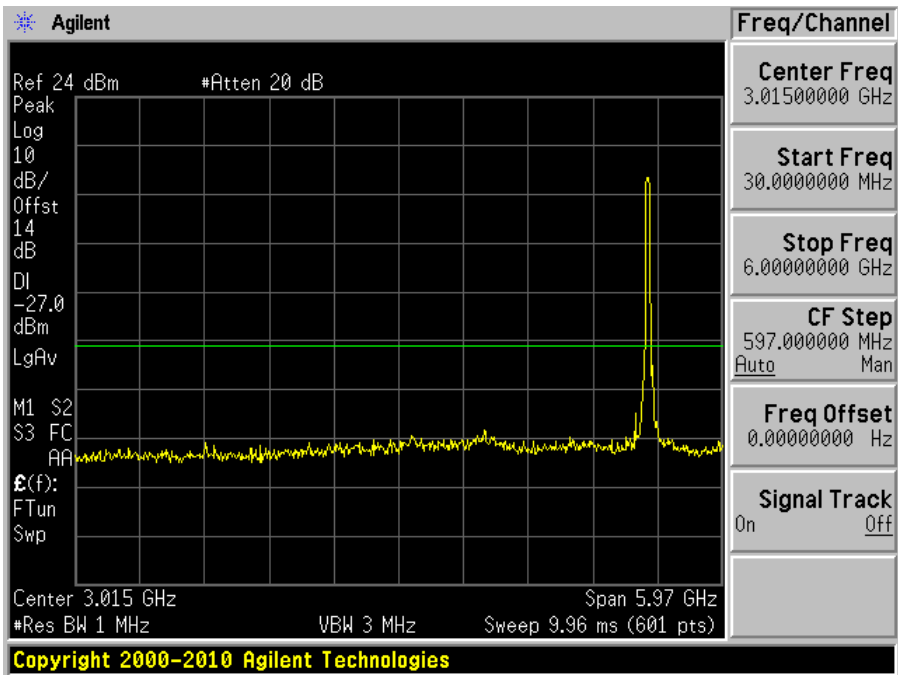


High Channel 5310 MHz (6-40GHz)

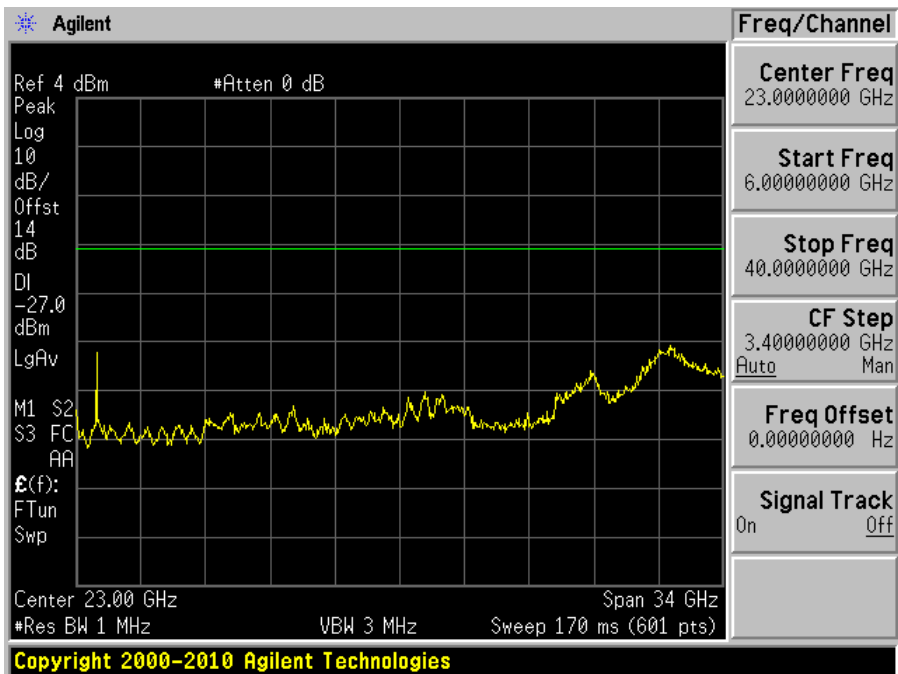


802.11ac20 mode


Low Channel 5260 MHz (30MHz-6GHz)

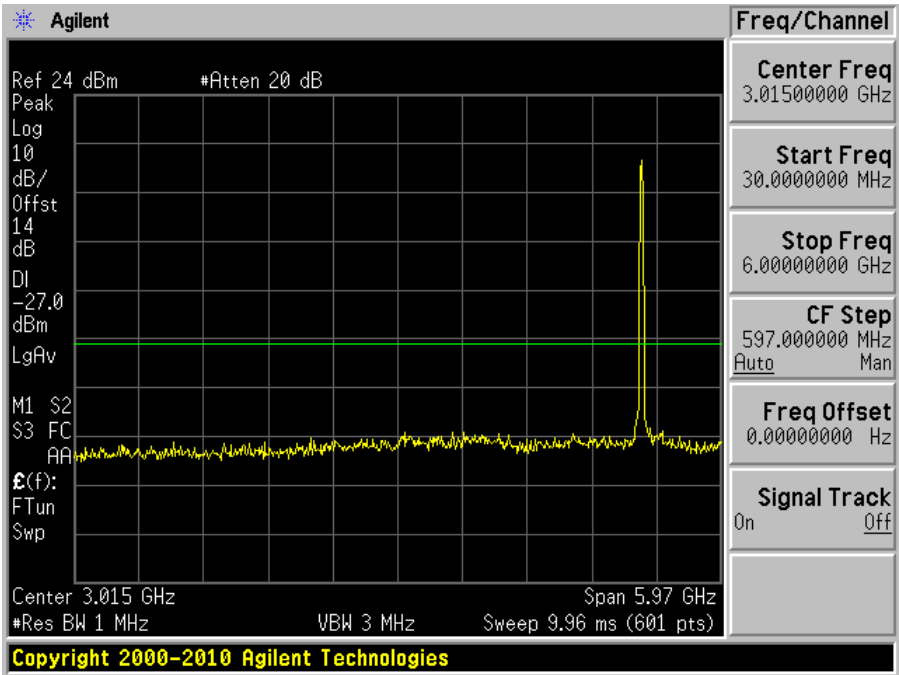


Low Channel 5260 MHz (6-40GHz)

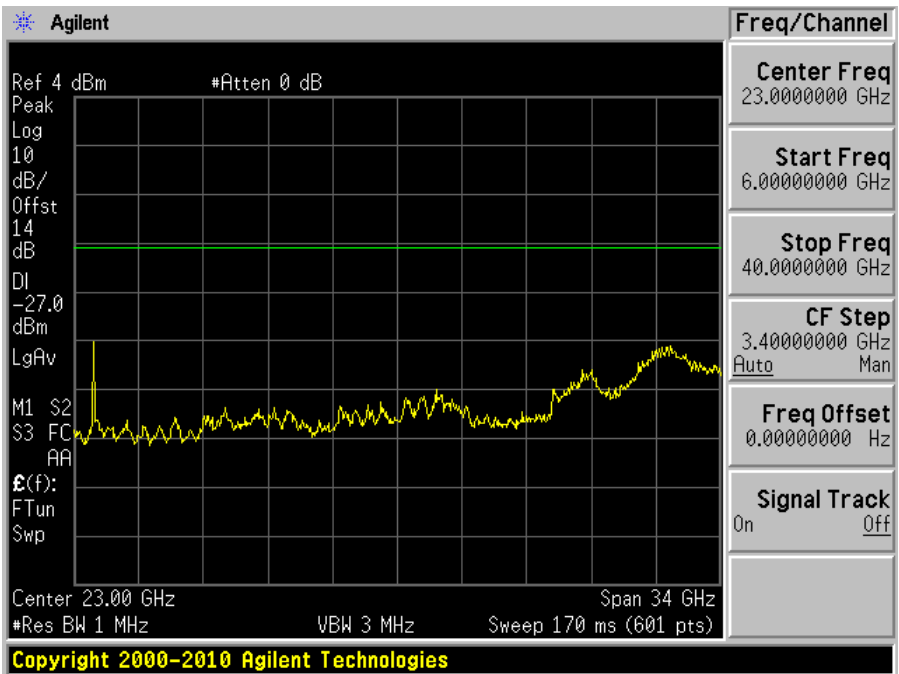


Middle Channel 5280 MHz (30MHz-6GHz)

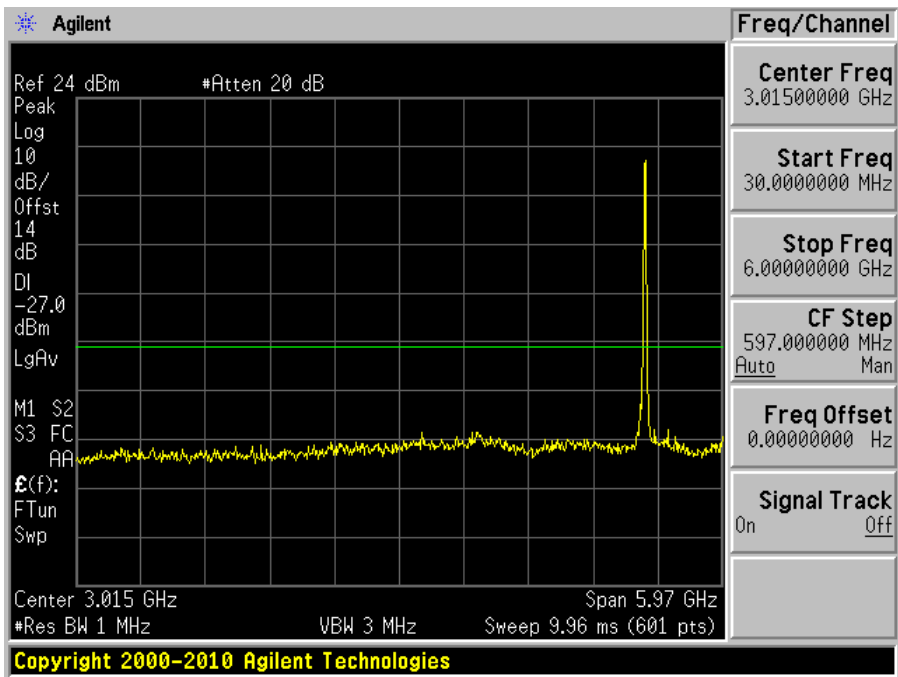


Middle Channel 5280 MHz (6GHz – 40GHz)

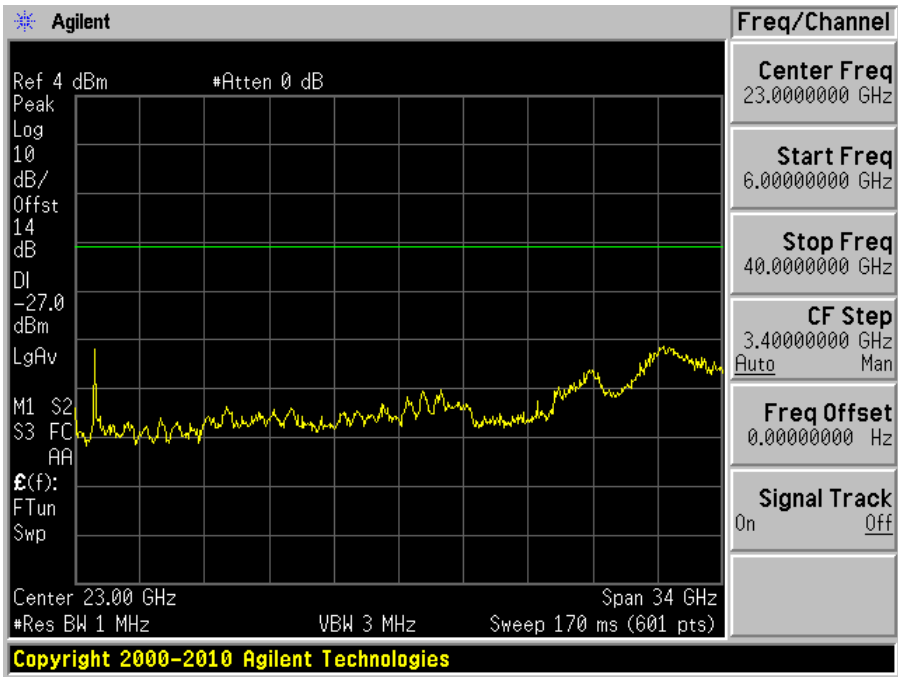

High Channel 5320 MHz (30MHz-6GHz)

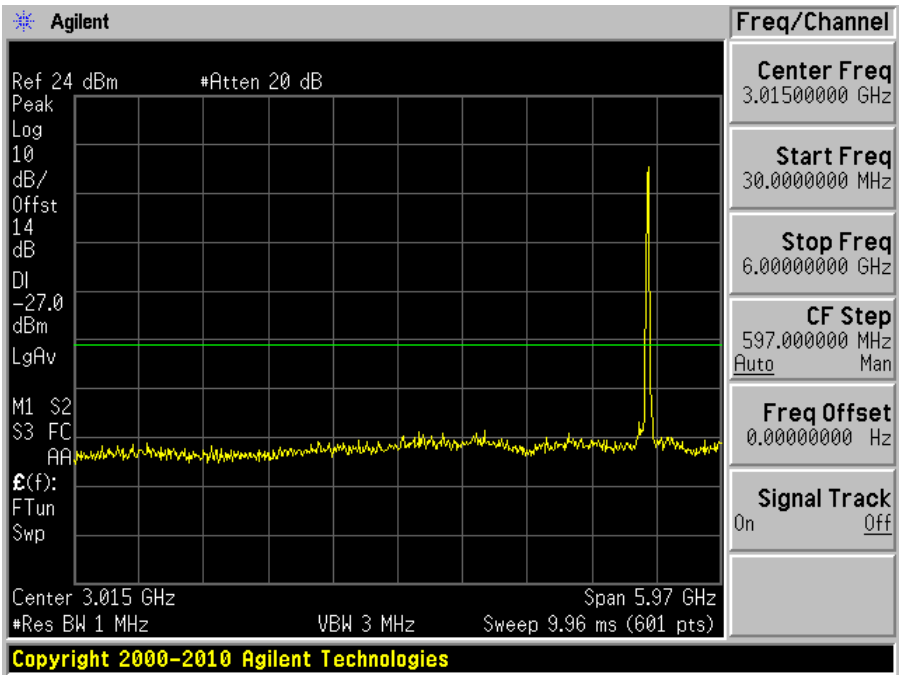


High Channel 5320 MHz (6GHz – 40GHz)

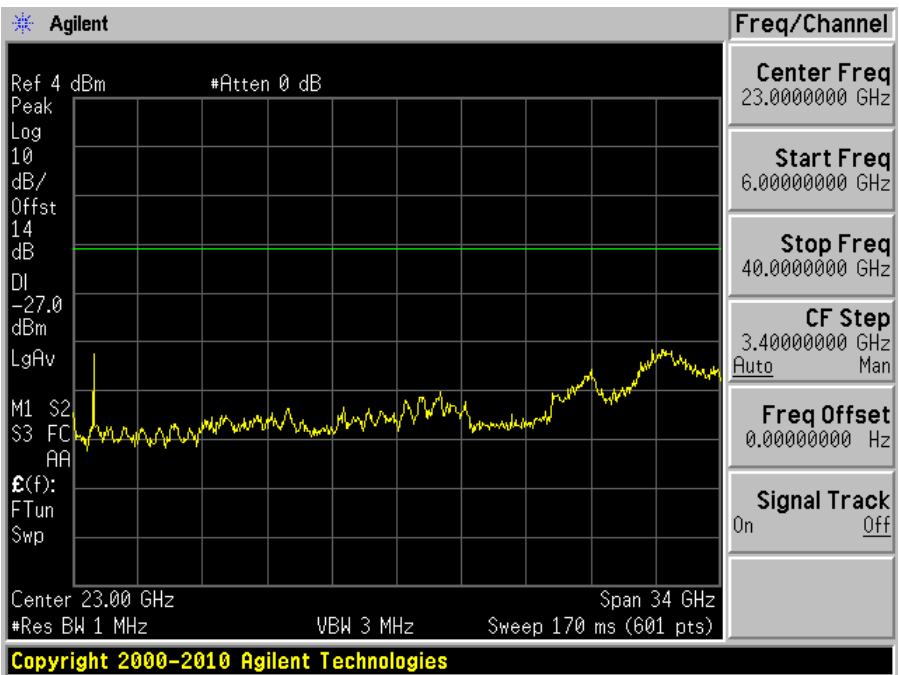


802.11ac40 mode


Low Channel 5270 MHz (30MHz-6GHz)

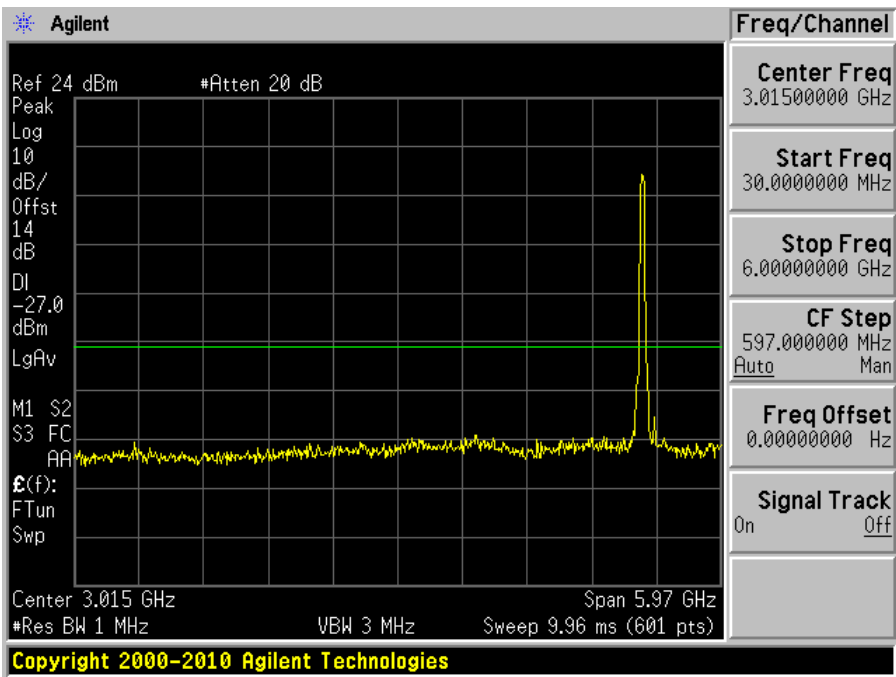


Low Channel 5270 MHz (6-40GHz)

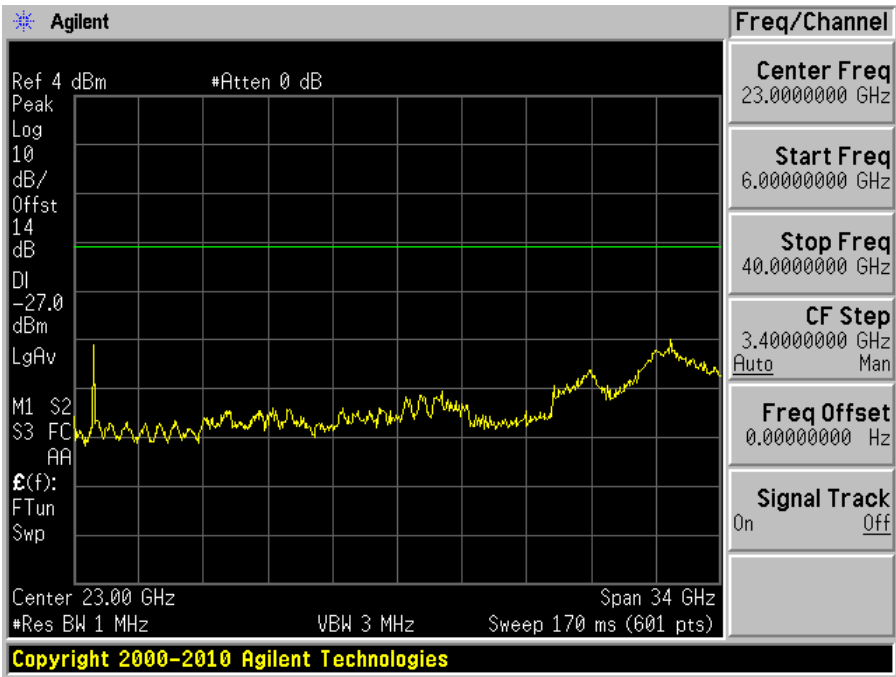

High Channel 5310 MHz (30MHz-6GHz)

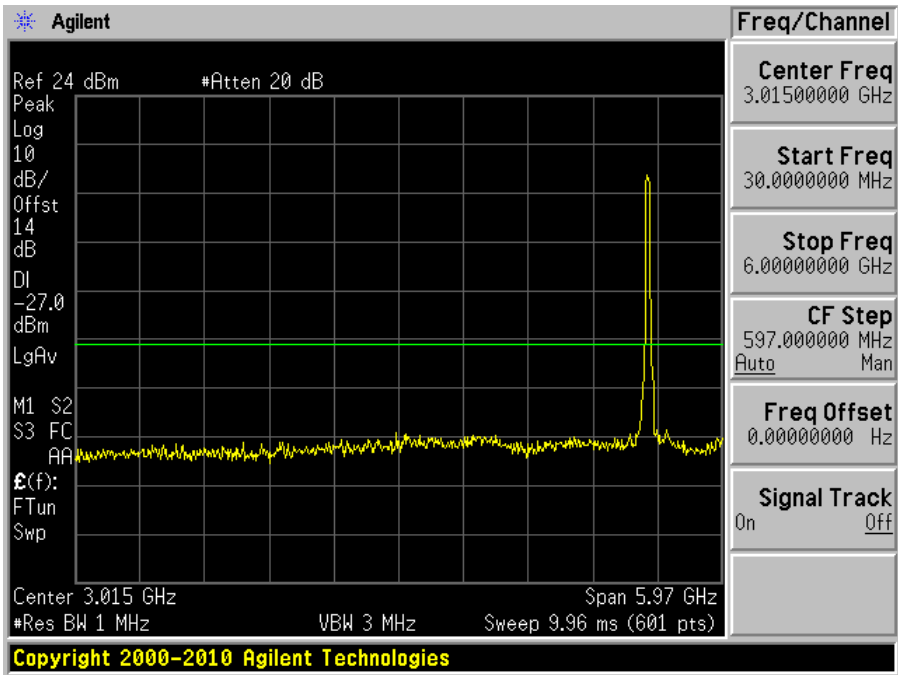


High Channel 5310 MHz (6GHz – 40GHz)

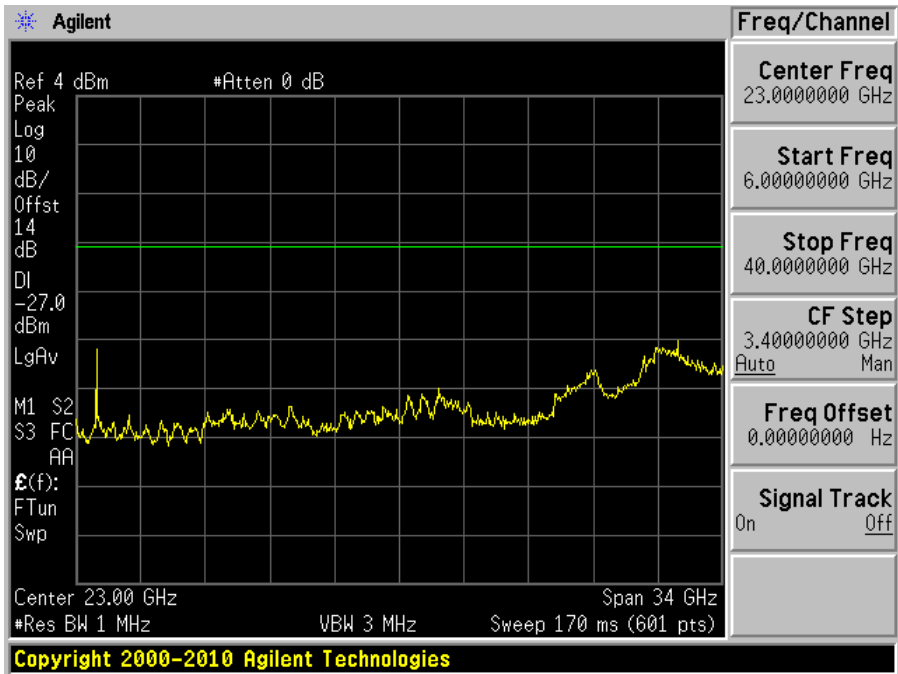


802.11ac80 mode

5290 MHz (30MHz-6GHz)

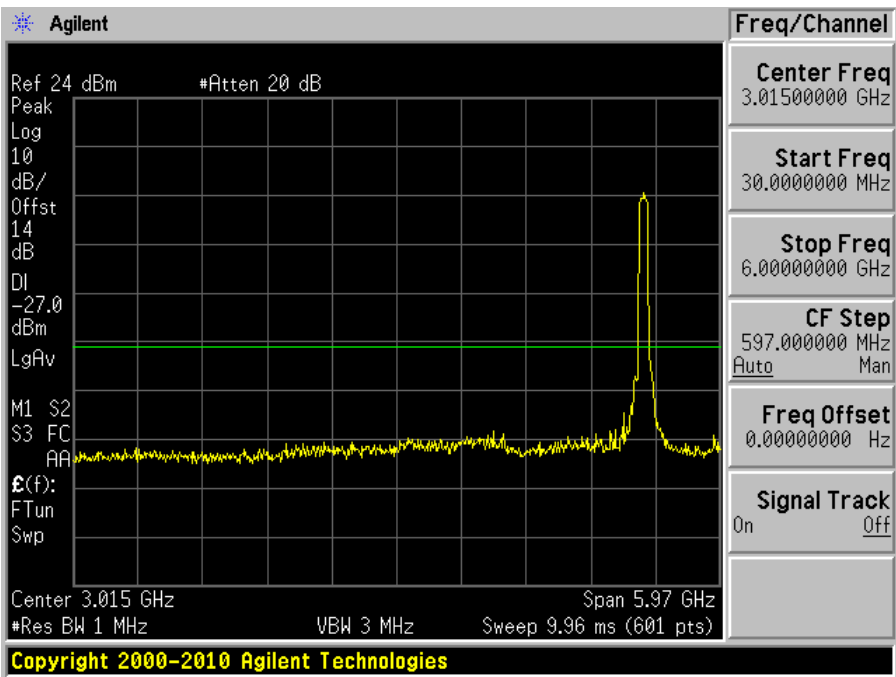


5290 MHz (6GHz – 40GHz)

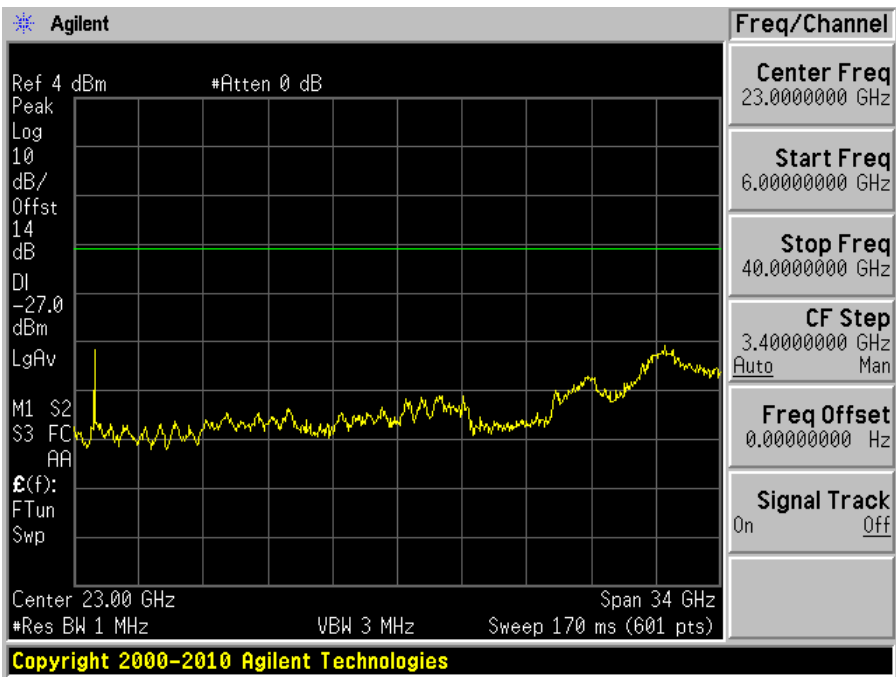


5470 – 5725 MHz

802.11a mode


Low Channel 5500 MHz (30MHz-6GHz)

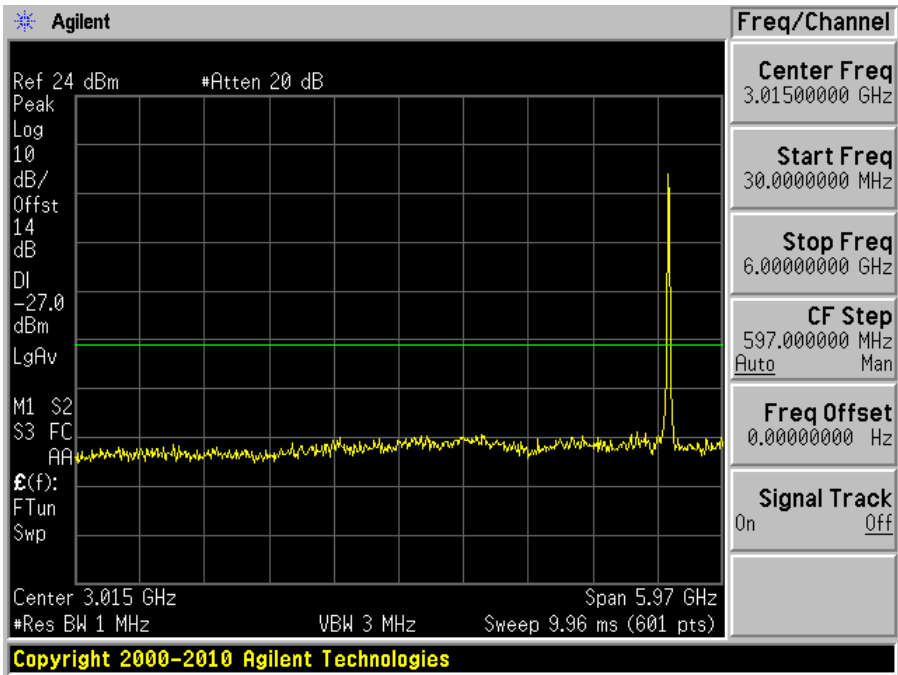


Low Channel 5500 MHz (6-40GHz)

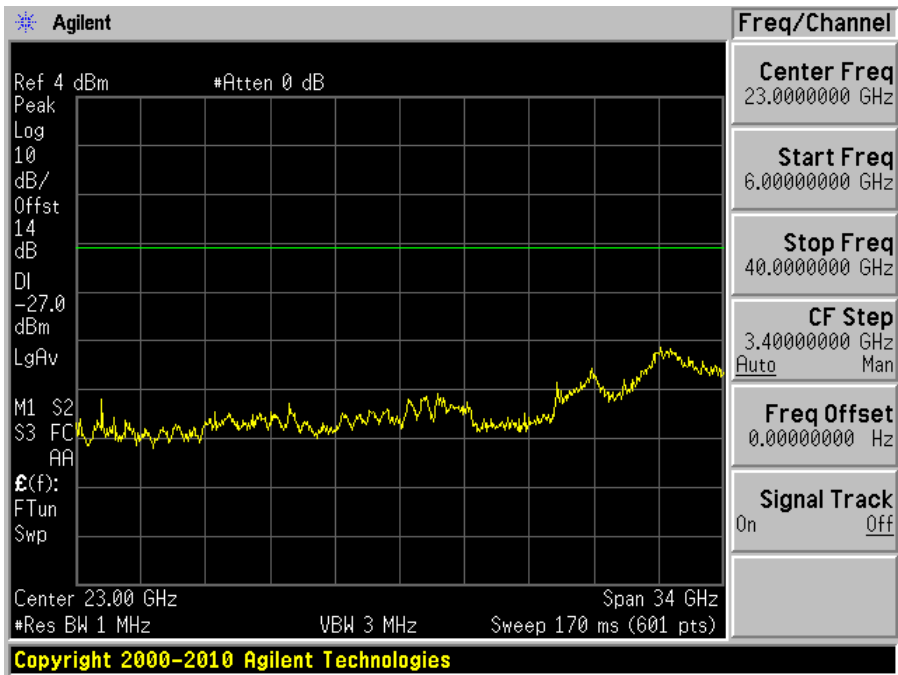


Middle Channel 5580 MHz (30MHz-6GHz)

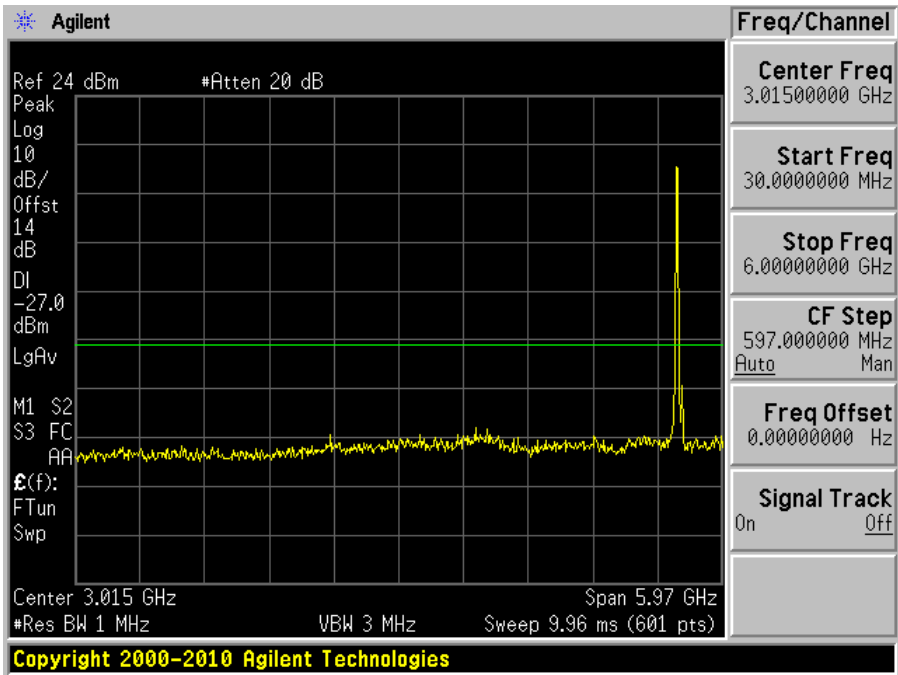


Middle Channel 5580 MHz (6-40GHz)

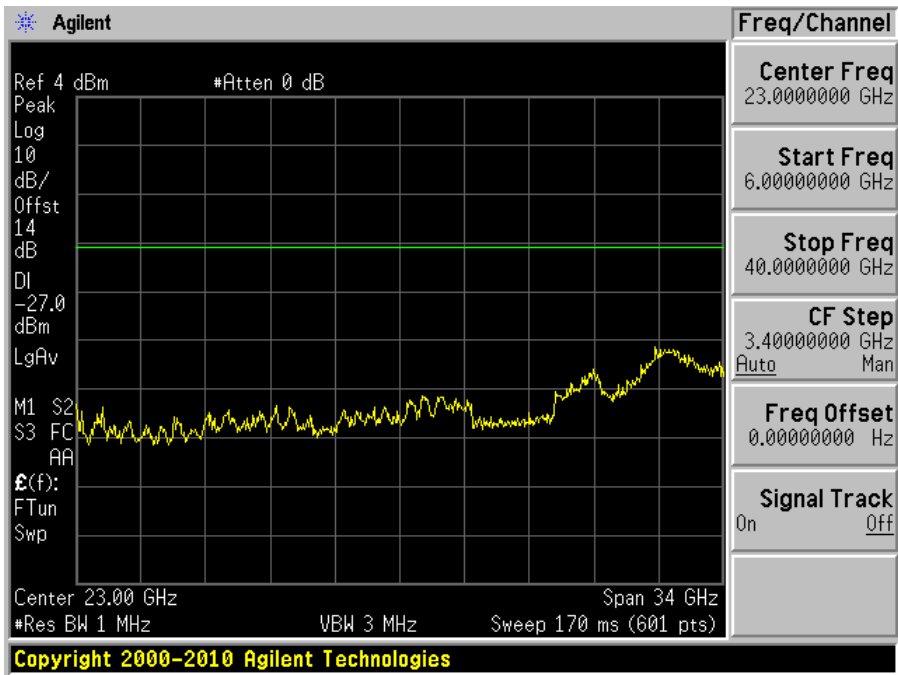


Middle Channel 5700 MHz (30MHz-6GHz)

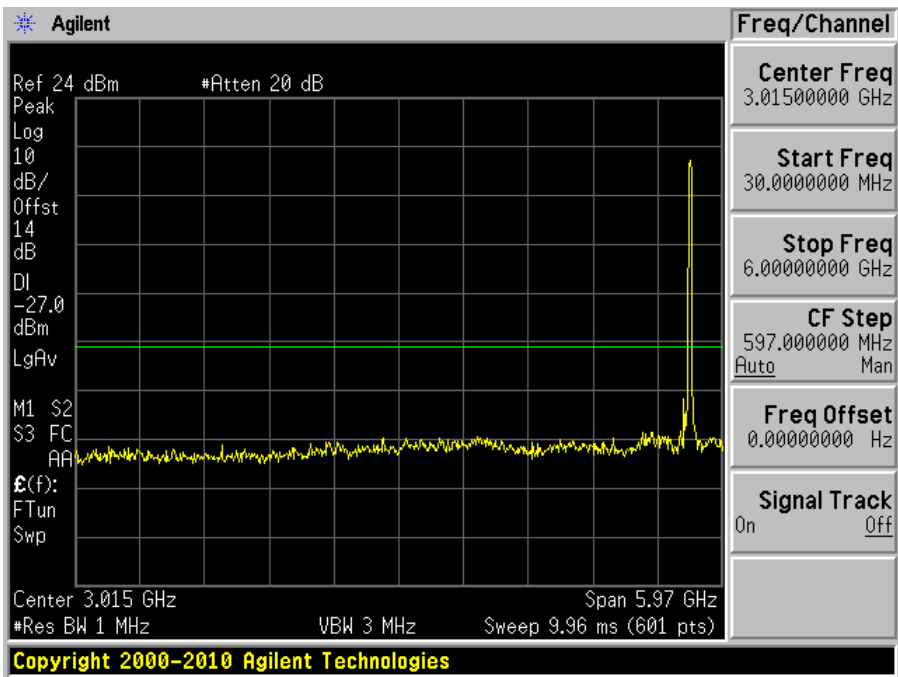


Middle Channel 5700 MHz (6-40GHz)

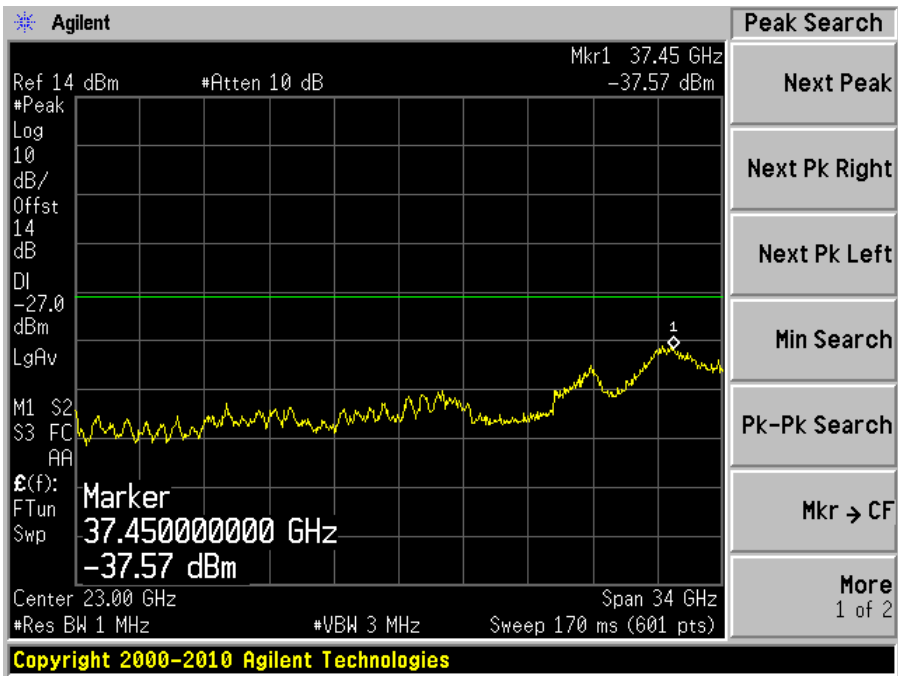

High Channel 5720 MHz (30MHz-6GHz)

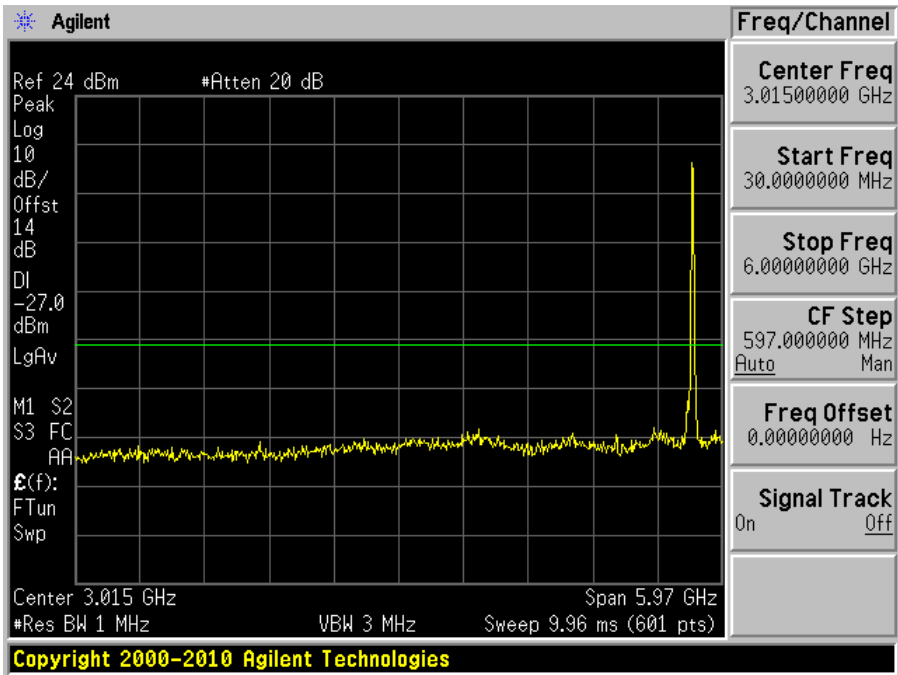


High Channel 5720 MHz (6-40GHz)

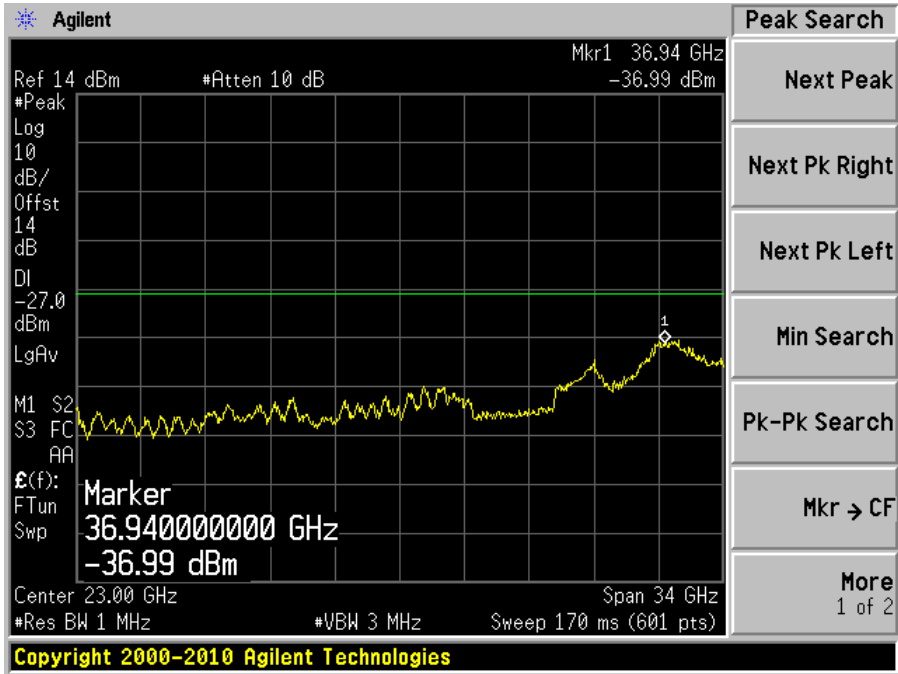


802.11n20 mode


Low Channel 5500 MHz (30MHz-6GHz)

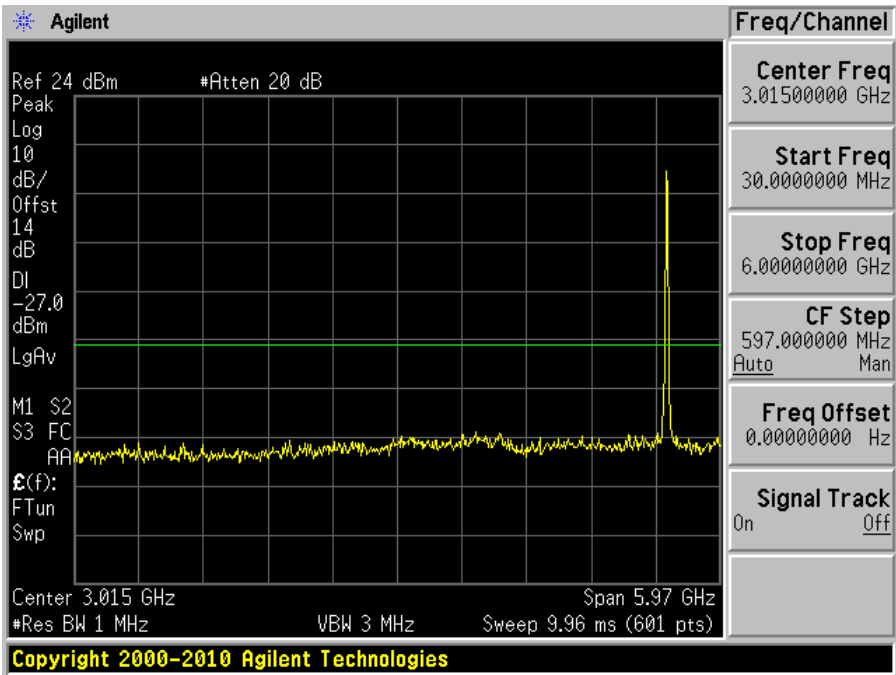


Low Channel 5500 MHz (6-40GHz)

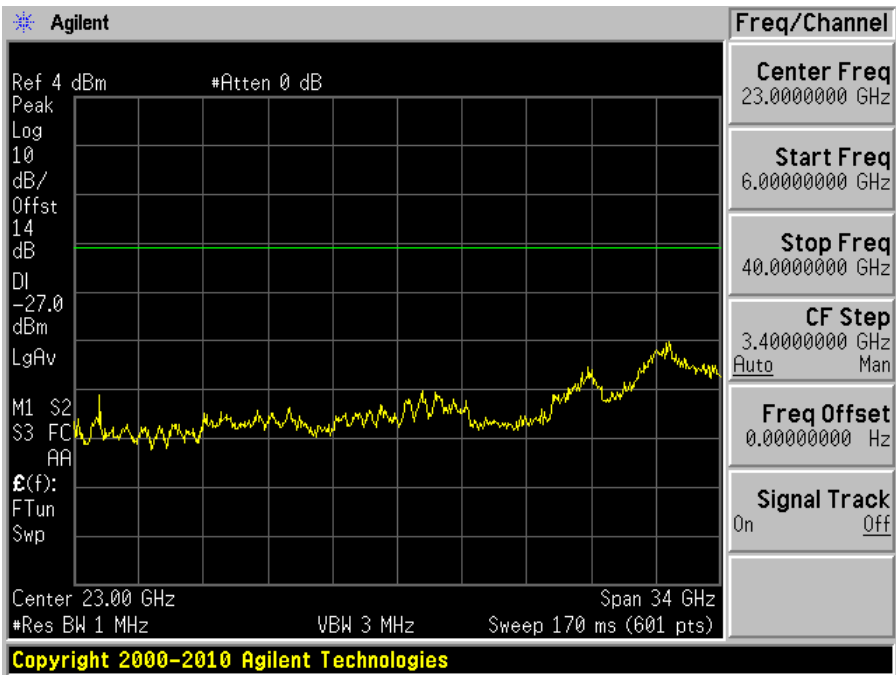


Middle Channel 5580 MHz (30MHz-6GHz)

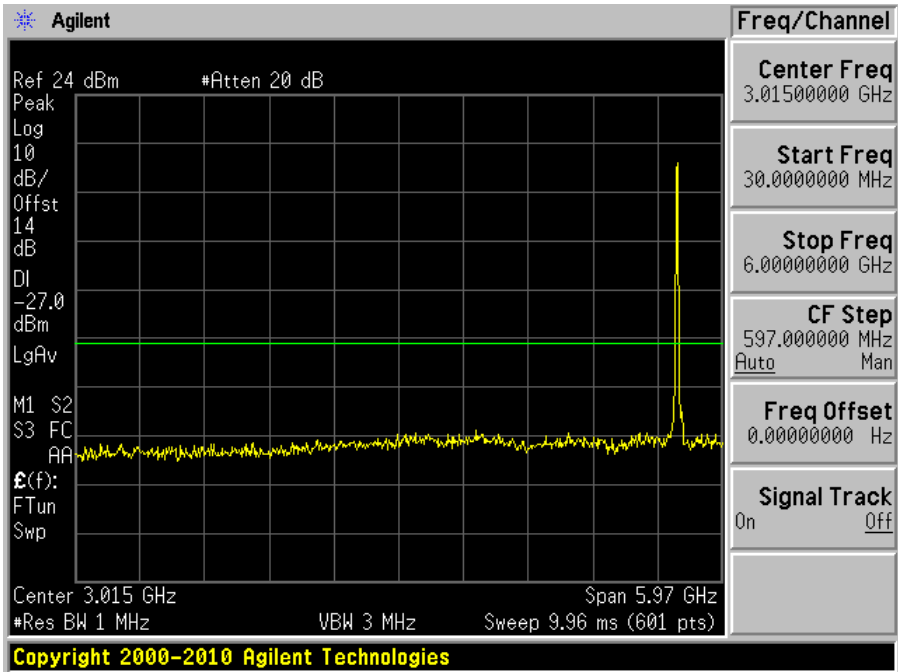


Middle Channel 5580 MHz (6-40GHz)

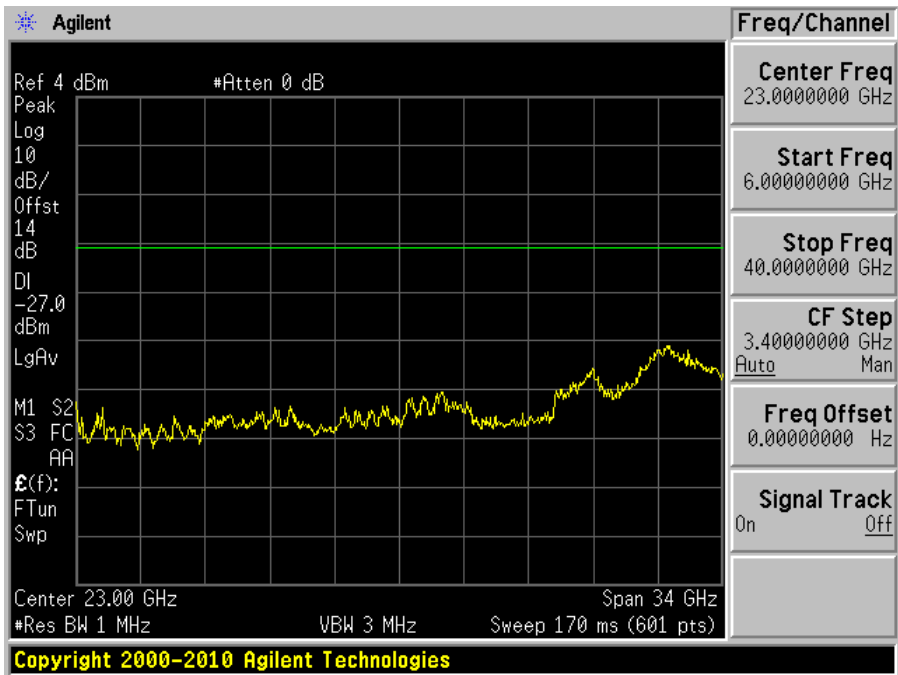


Middle Channel 5700 MHz (30MHz-6GHz)

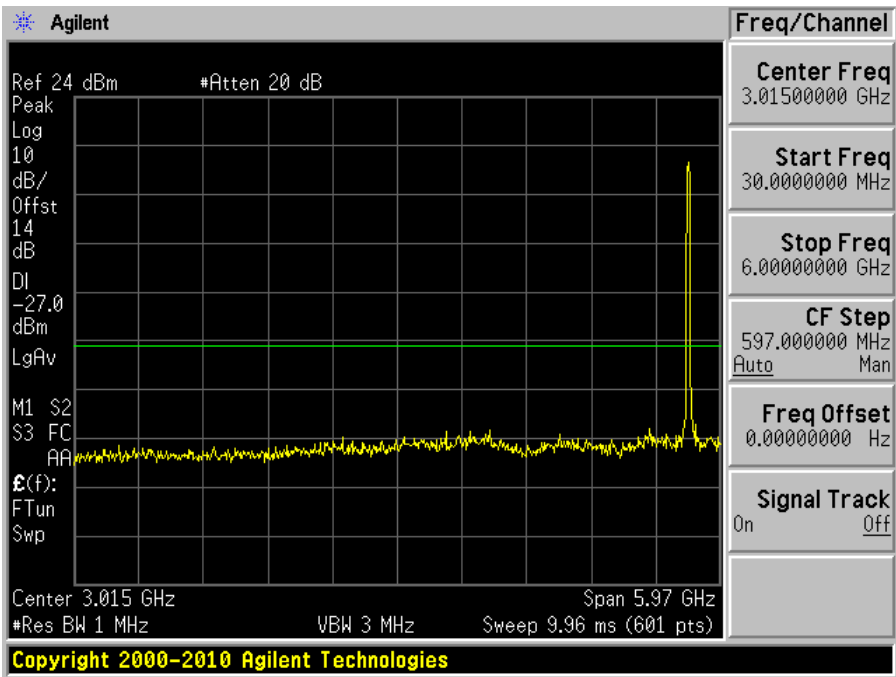


Middle Channel 5700 MHz (6-40GHz)

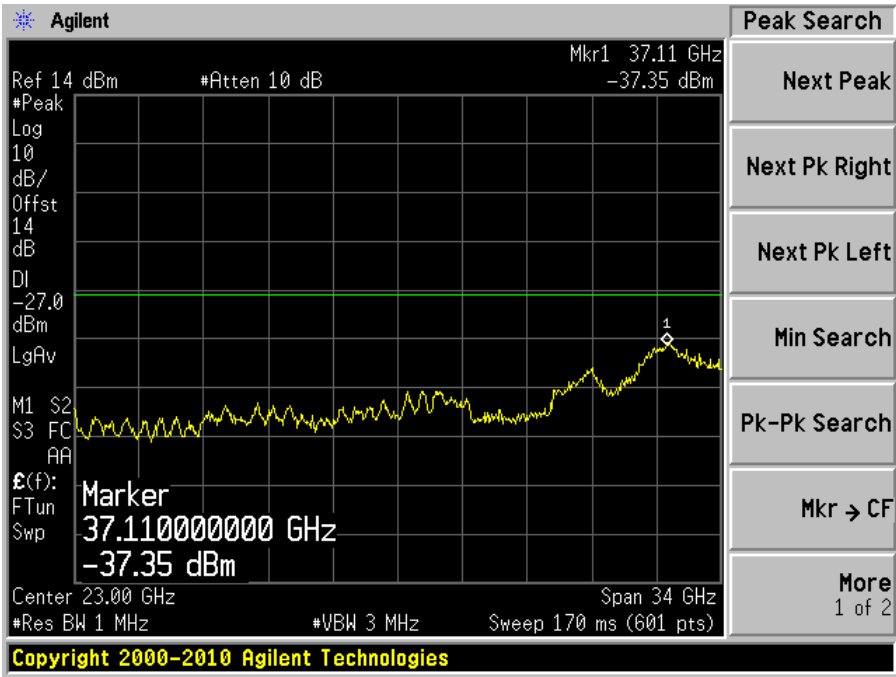

High Channel 5720 MHz (30MHz-6GHz)

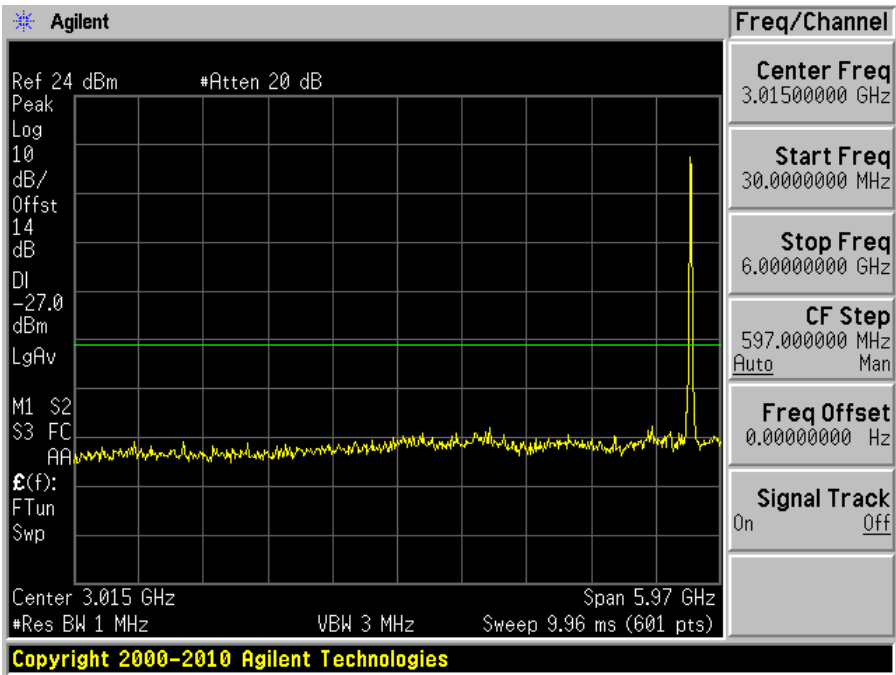


High Channel 5720 MHz (6-40GHz)

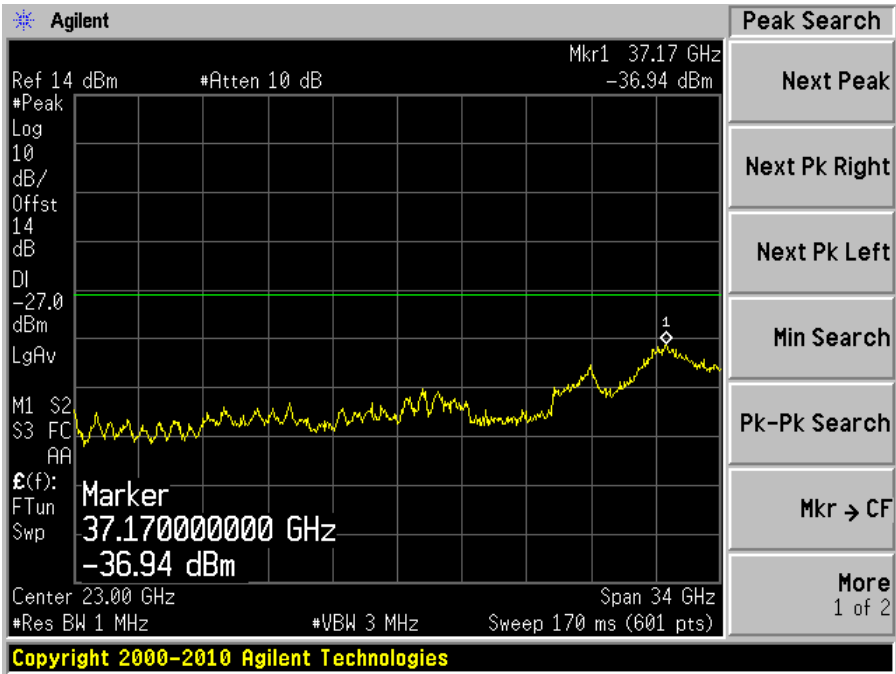


802.11n40 mode


Low Channel 5510 MHz (30MHz-6GHz)

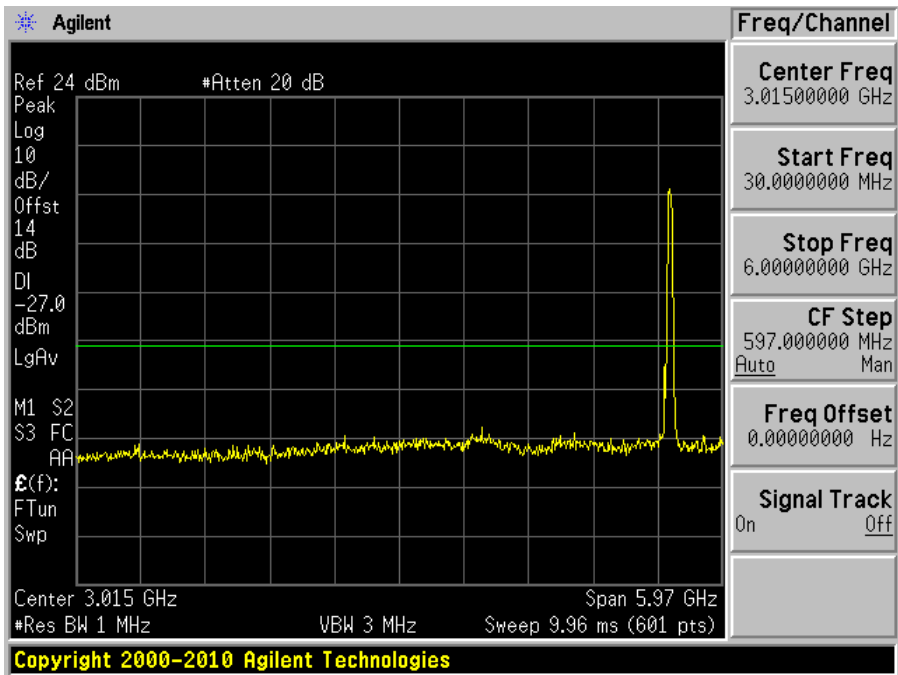


Low Channel 5510 MHz (6-40GHz)

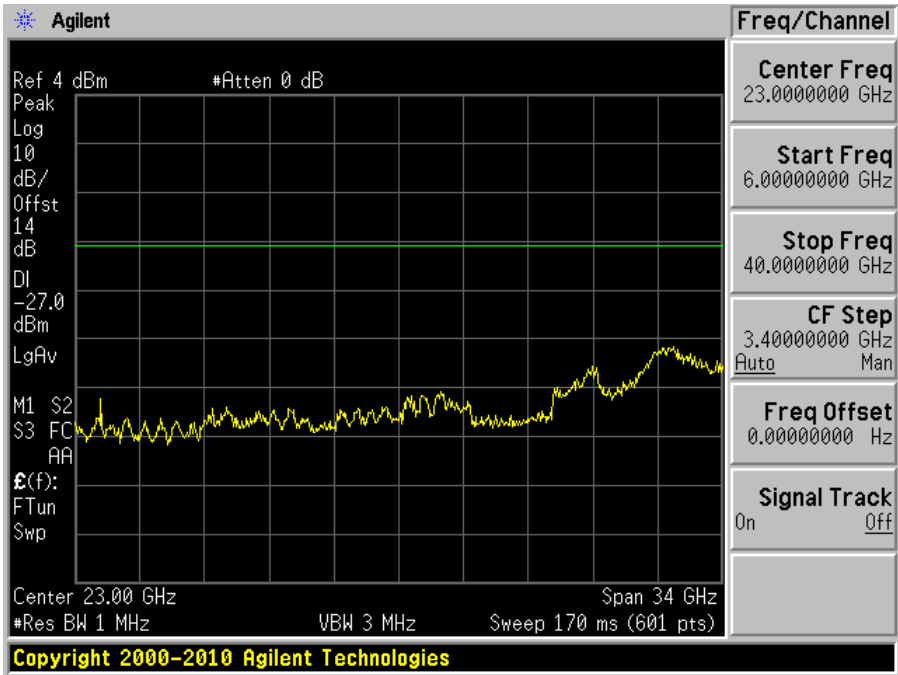


Middle Channel 5500 MHz (30MHz-6GHz)

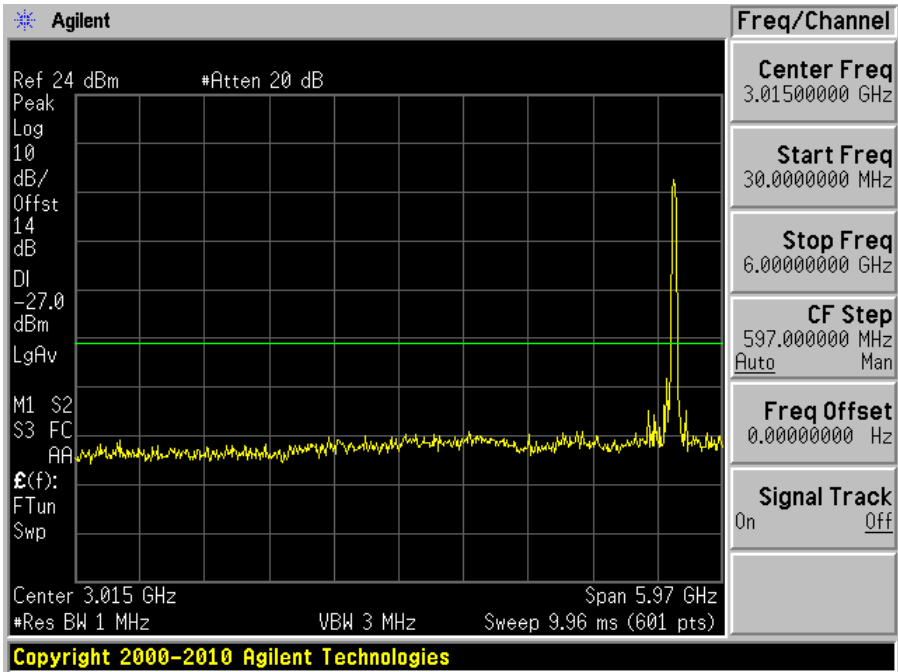


Middle Channel 5500 MHz (6-40GHz)

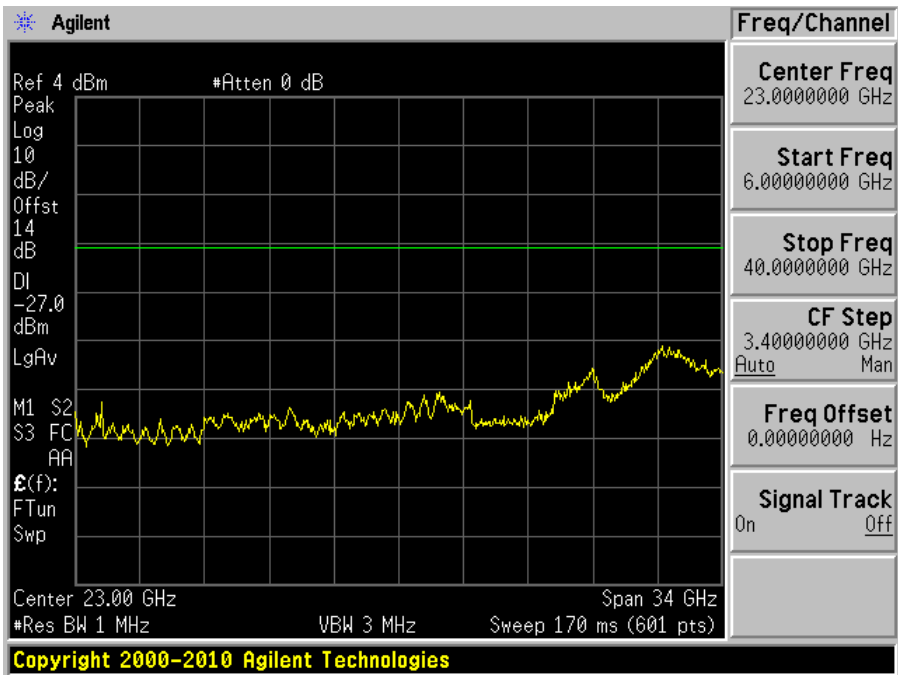


Middle Channel 5670 MHz (30MHz-6GHz)

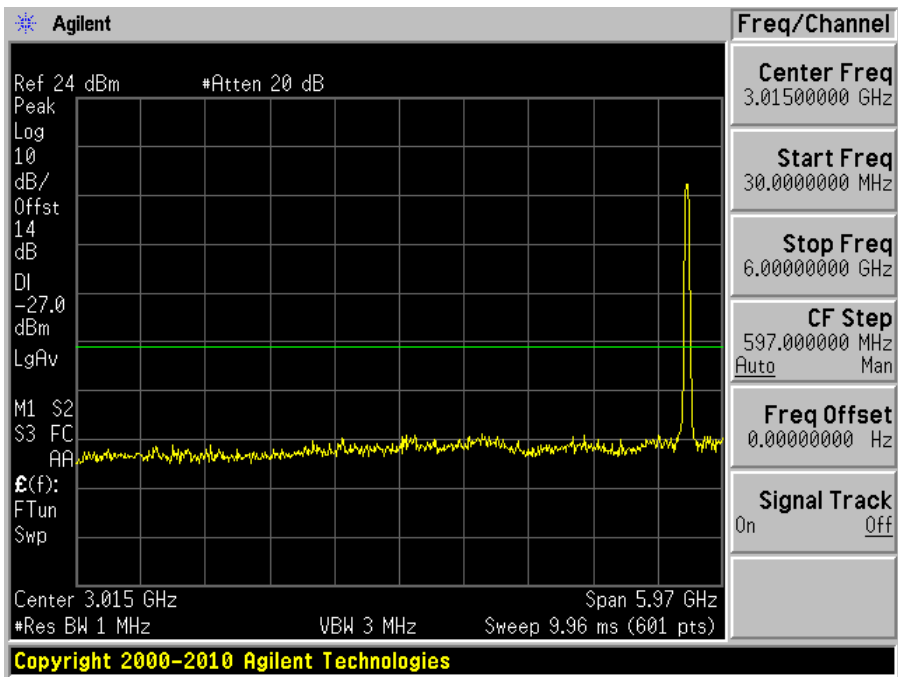


Middle Channel 5670 MHz (6-40GHz)

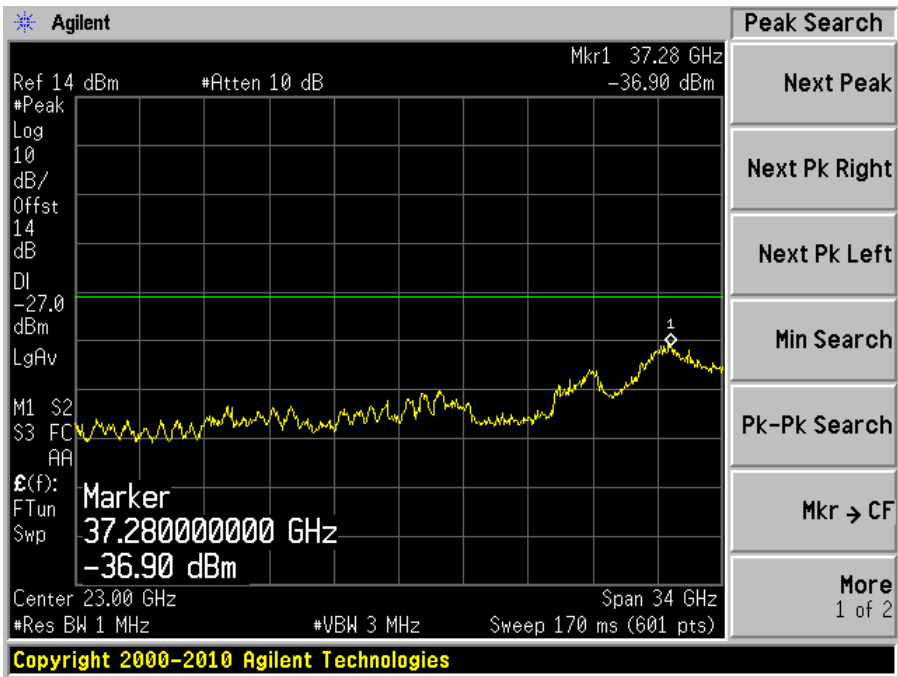

High Channel 5710 MHz (30MHz-6GHz)

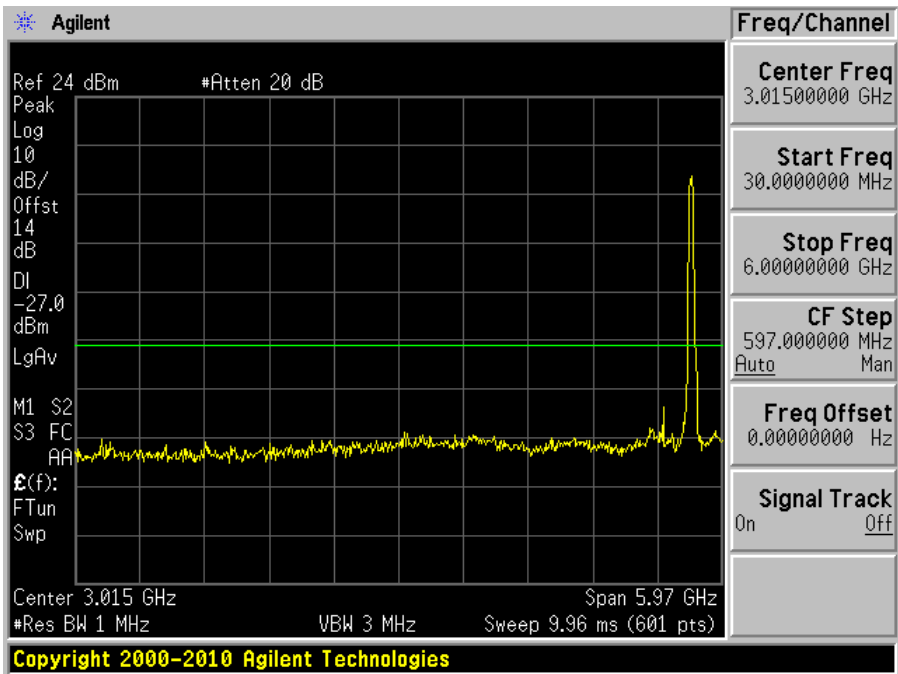


High Channel 5710 MHz (6-40GHz)

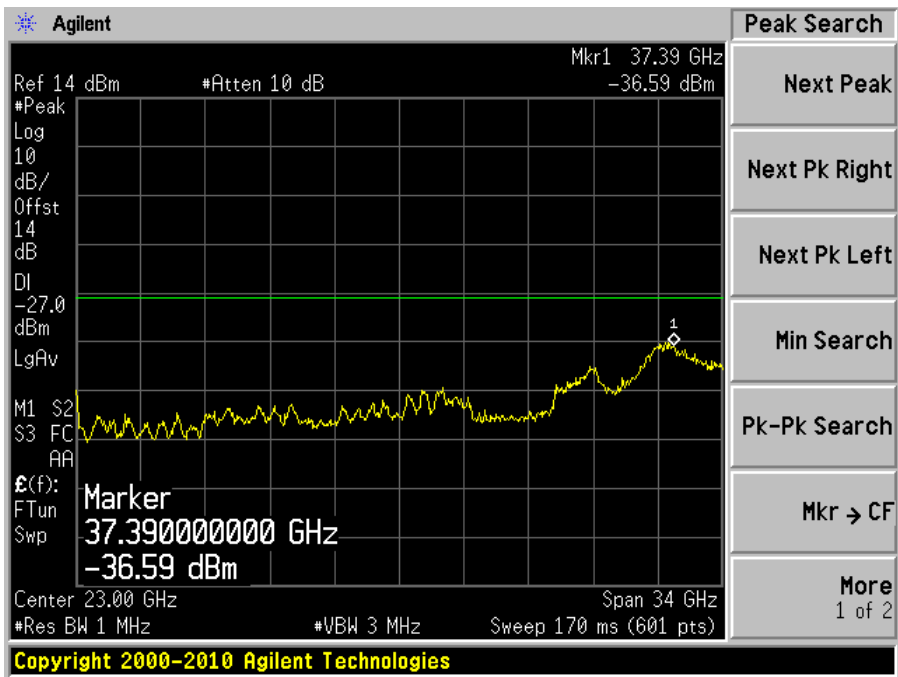


802.11ac20 mode


Low Channel 5500 MHz (30MHz-6GHz)

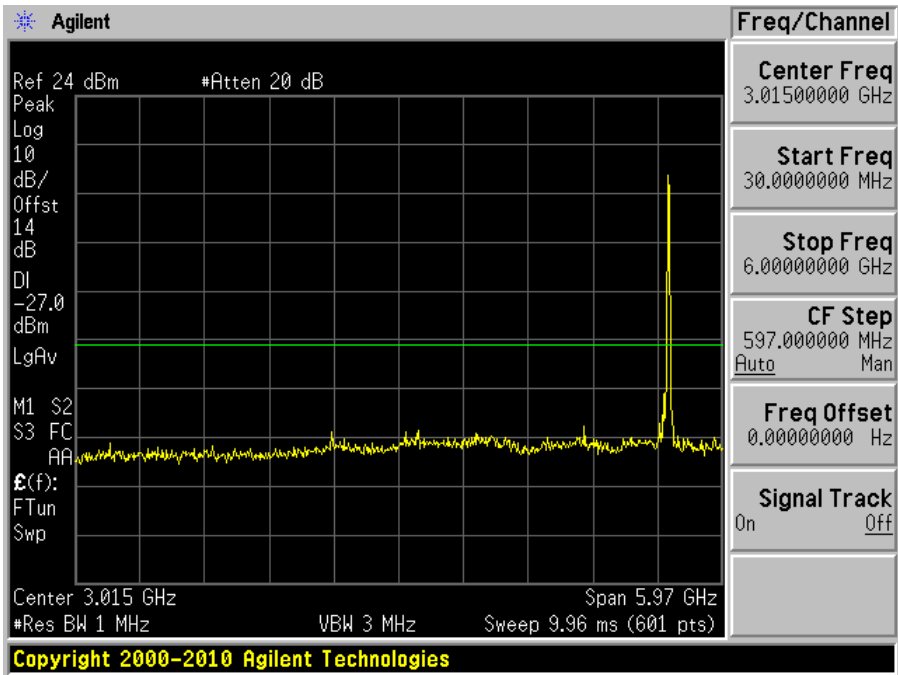


Low Channel 5500 MHz (6-40GHz)

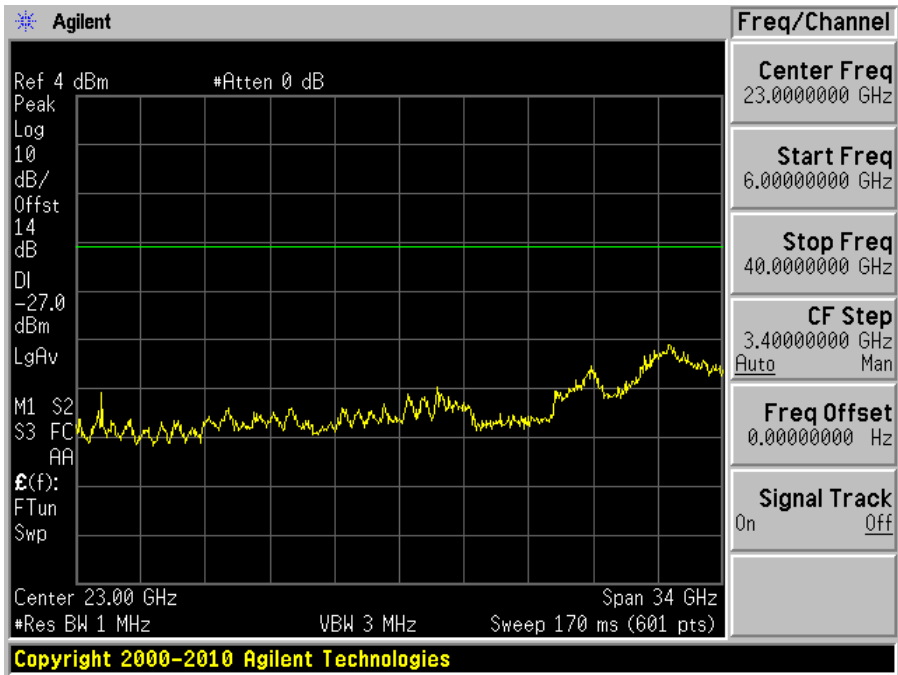


Middle Channel 5580 MHz (30MHz-6GHz)

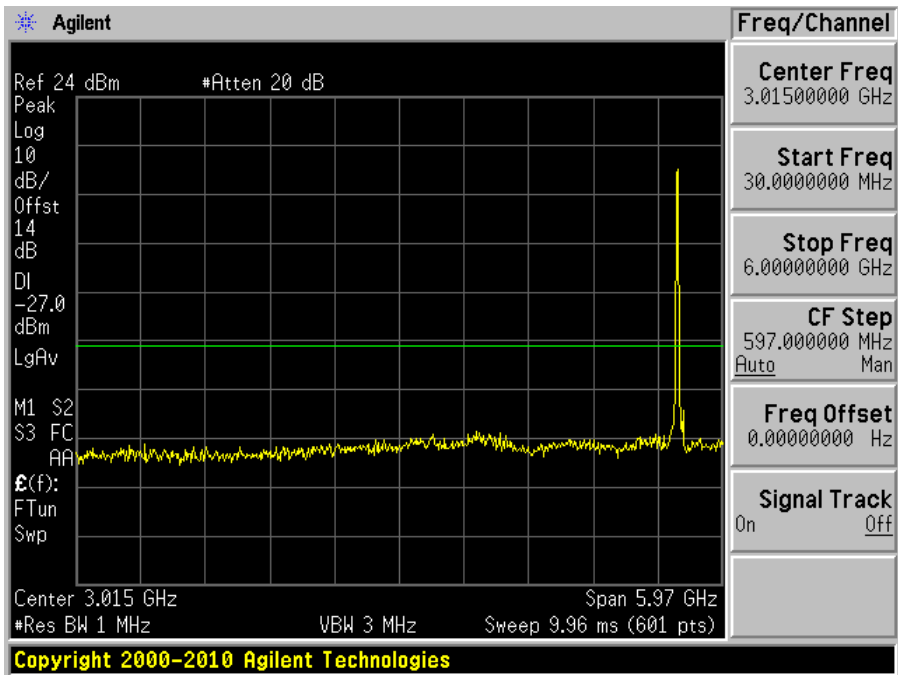


Middle Channel 5580 MHz (6GHz – 40GHz)

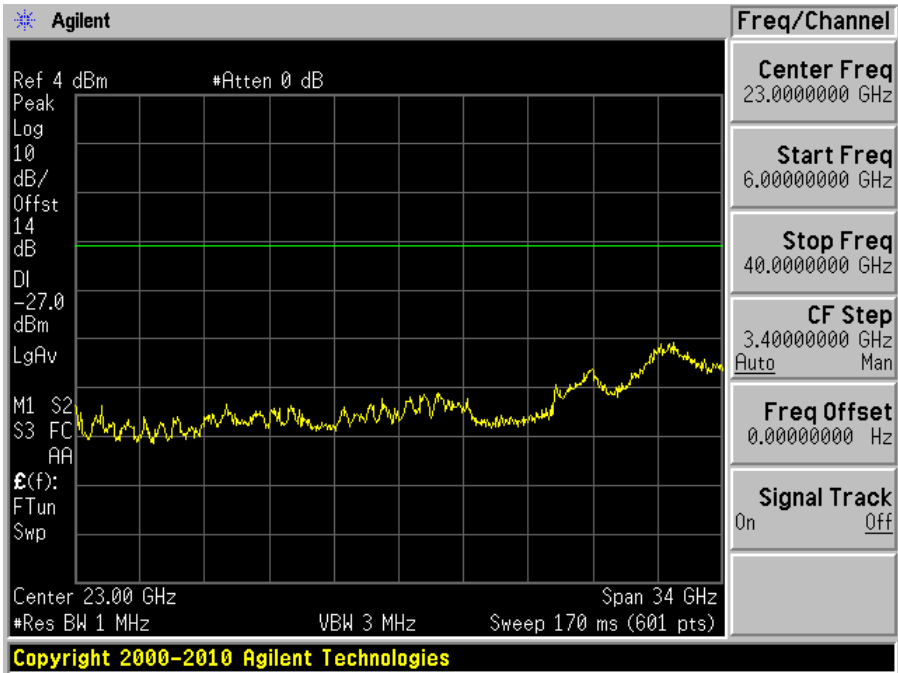


Middle Channel 5700 MHz (30MHz-6GHz)

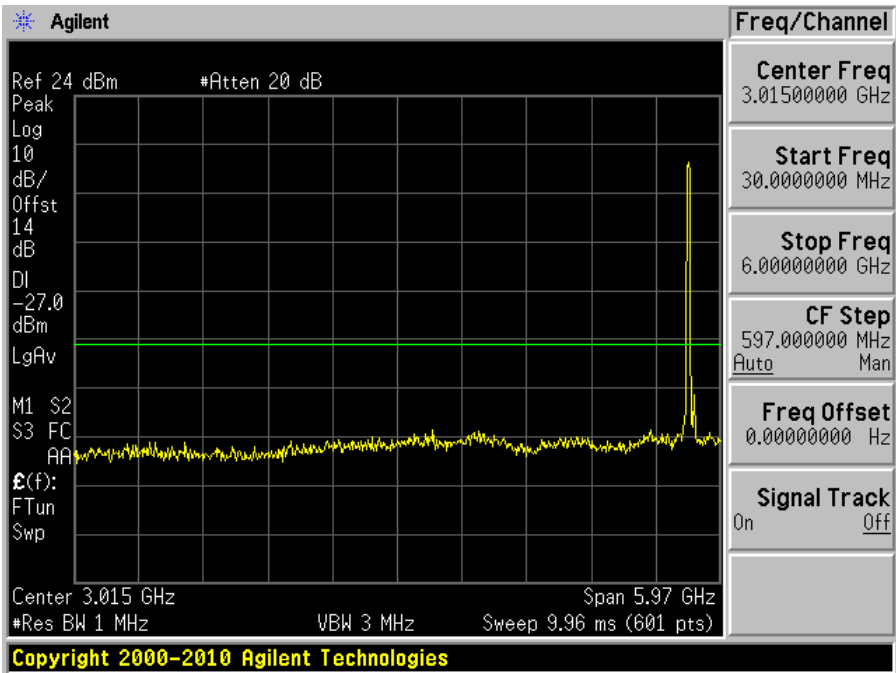


Middle Channel 5700 MHz (6GHz – 40GHz)

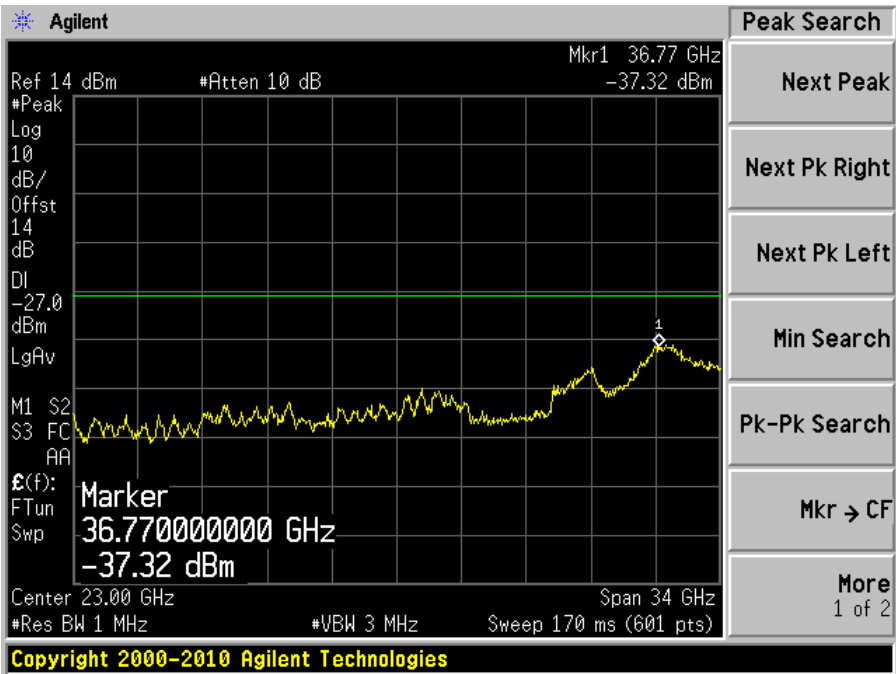

High Channel 5720 MHz (30MHz-6GHz)

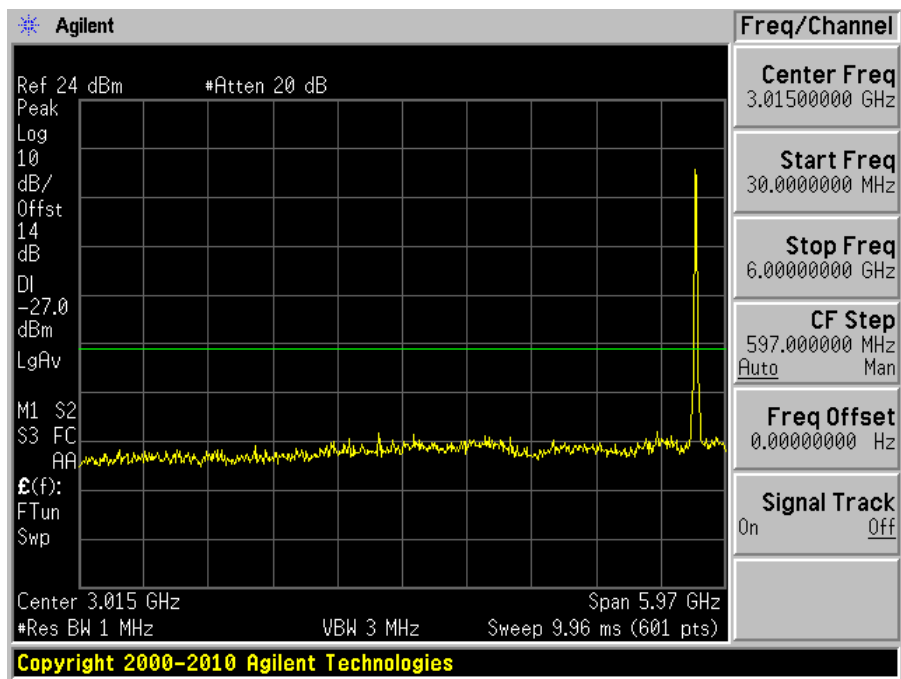


High Channel 5720 MHz (6-40GHz)

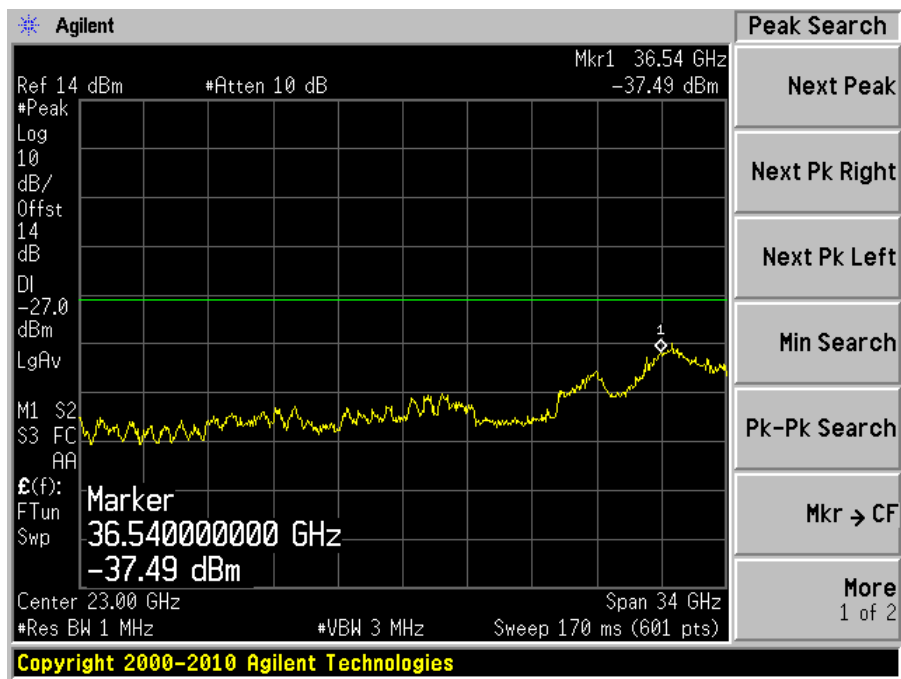


802.11ac40 mode


Low Channel 5510 MHz (30MHz-6GHz)

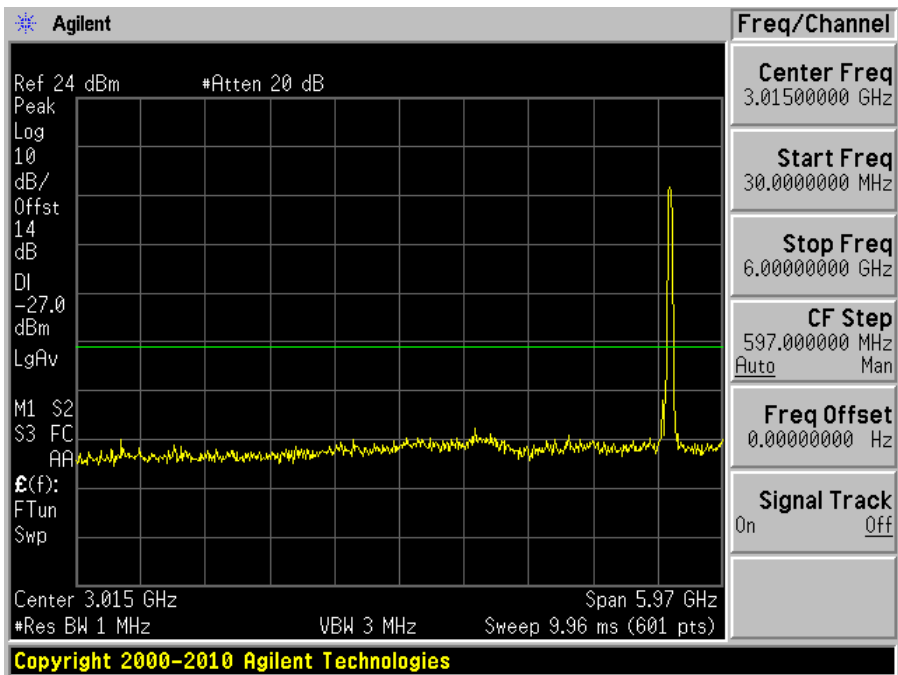


Low Channel 5510 MHz (6-40GHz)

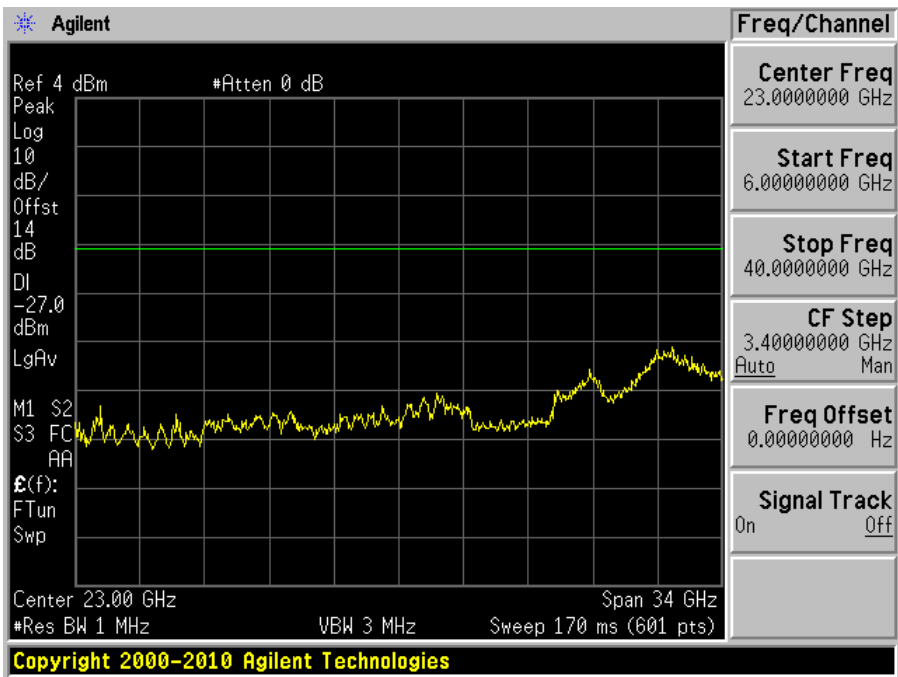


Middle Channel 5550 MHz (30MHz-6GHz)

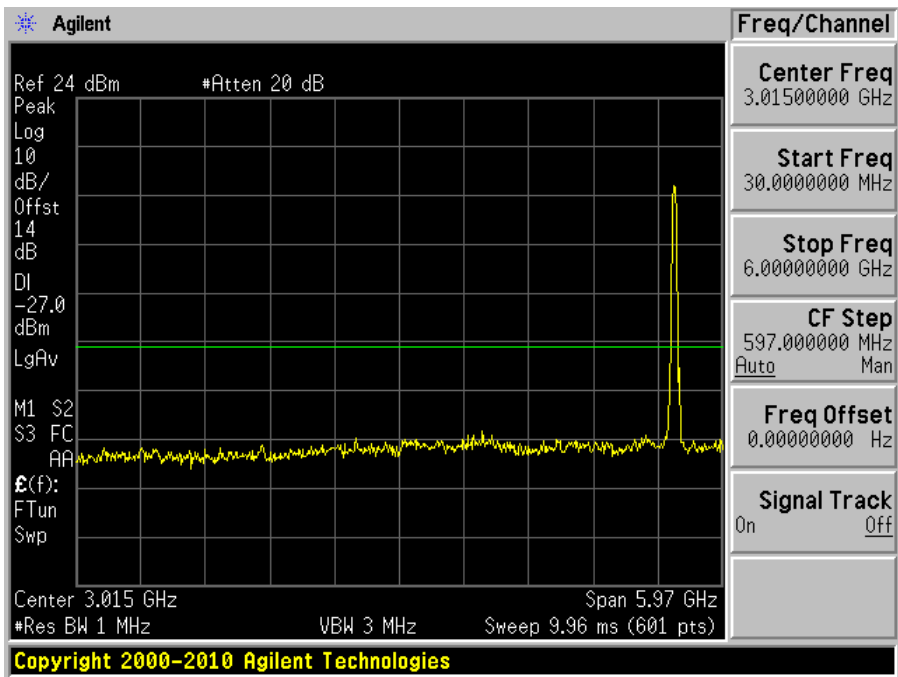


Middle Channel 5550 MHz (6-40GHz)

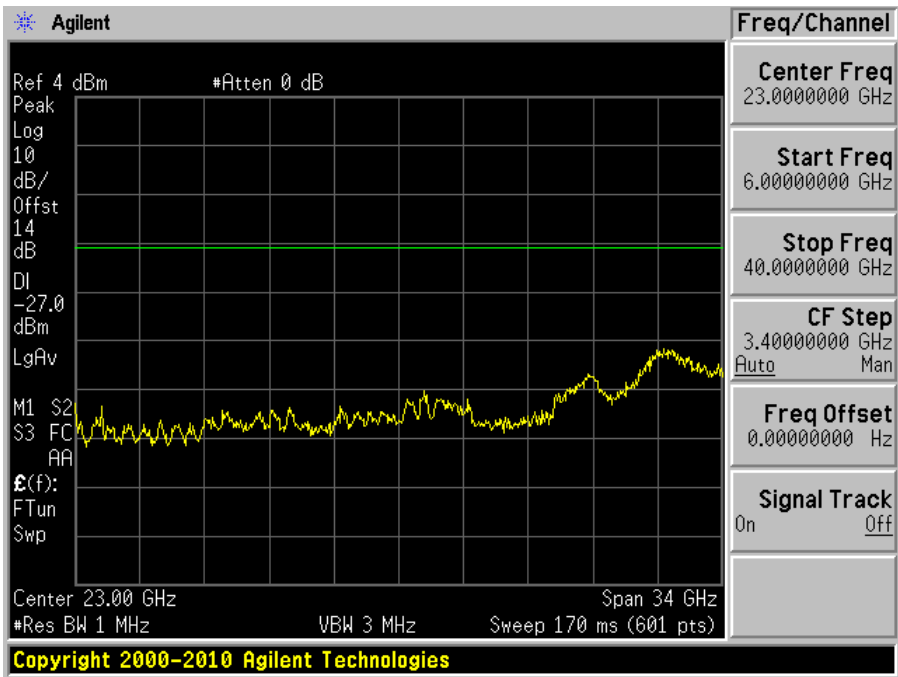


Middle Channel 5670 MHz (30MHz-6GHz)

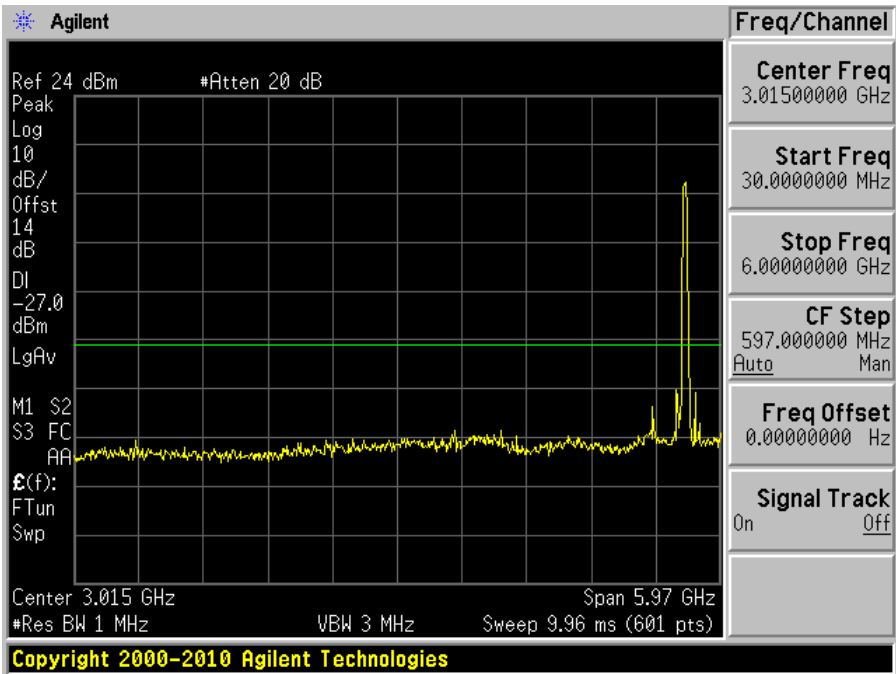


Middle Channel 5670 MHz (6-40GHz)

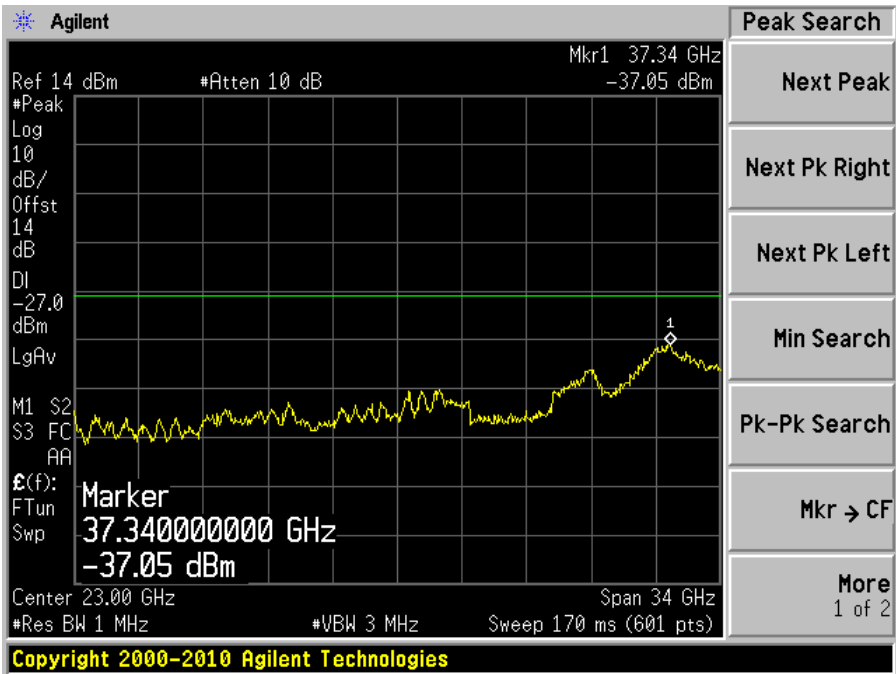

High Channel 5710 MHz (30MHz-6GHz)

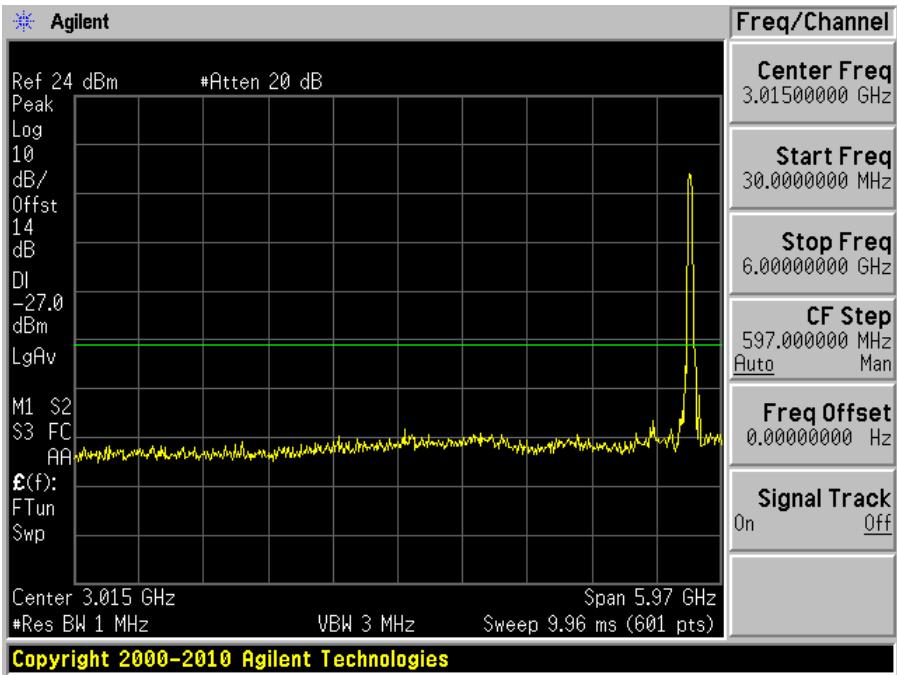


High Channel 5710 MHz (6-40GHz)

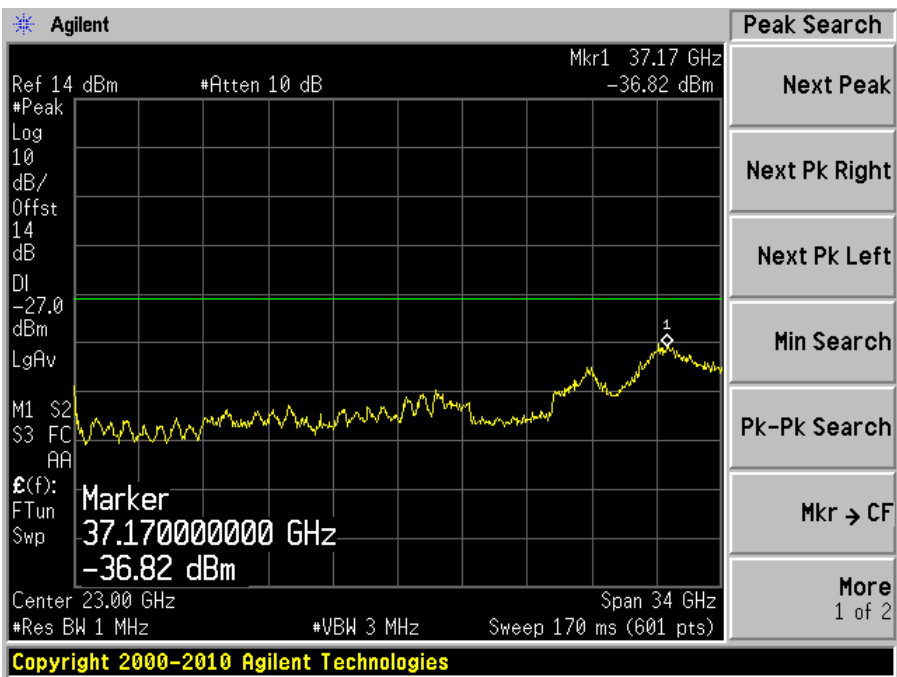


802.11ac80 mode


Low Channel 5530 MHz (30MHz-6GHz)

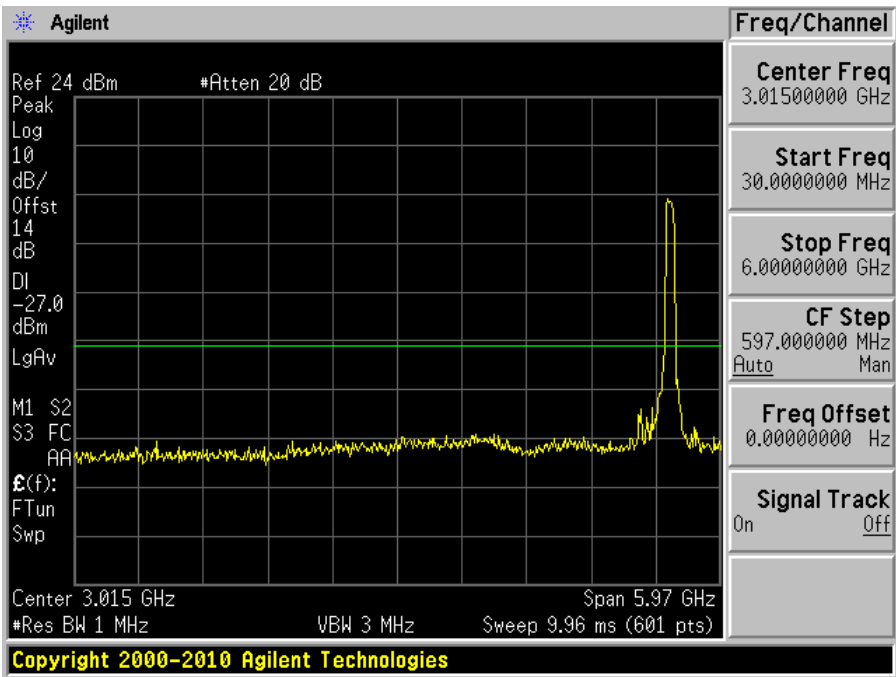


Low Channel 5530 MHz (6GHz – 40GHz)

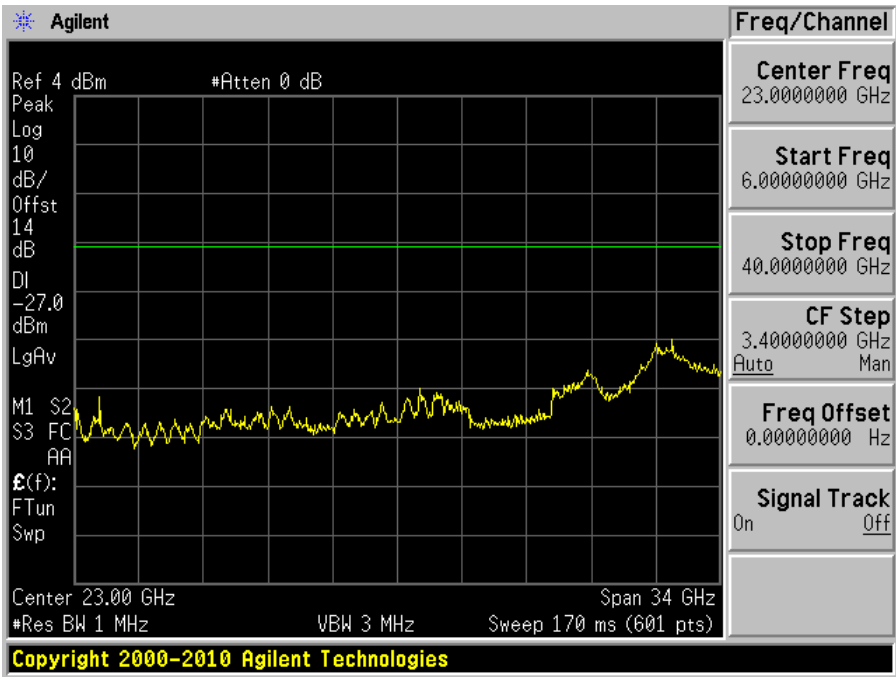


Middle Channel 5610 MHz (30MHz-6GHz)

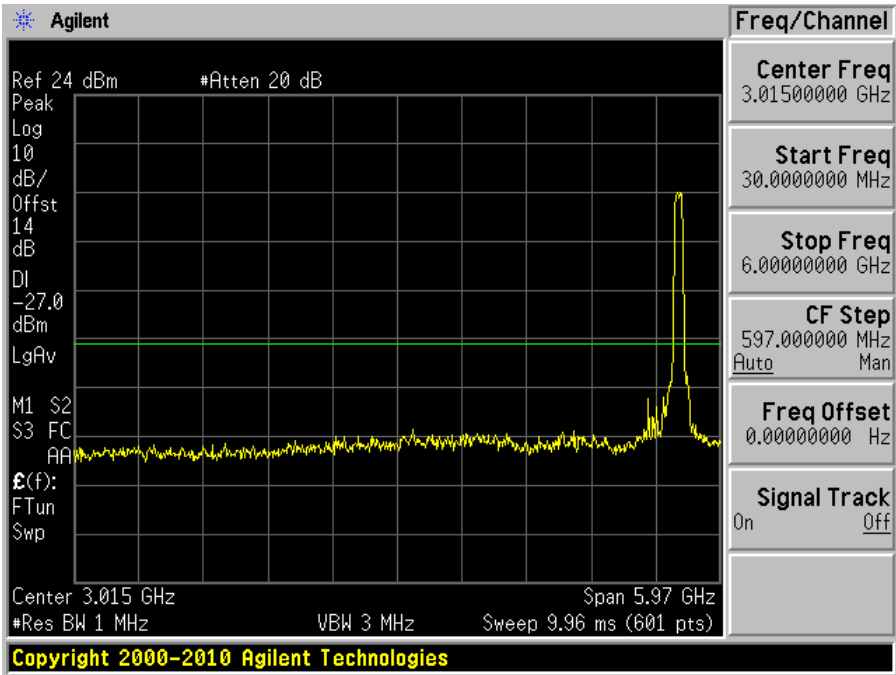


Middle Channel 5610 MHz (6GHz – 40GHz)

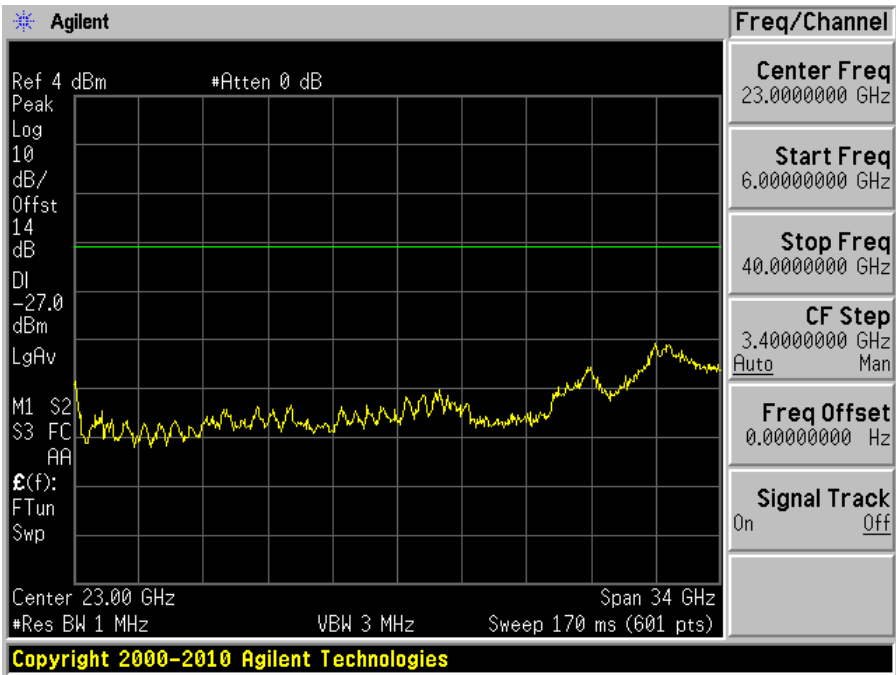

High Channel 5690 MHz (30MHz-6GHz)

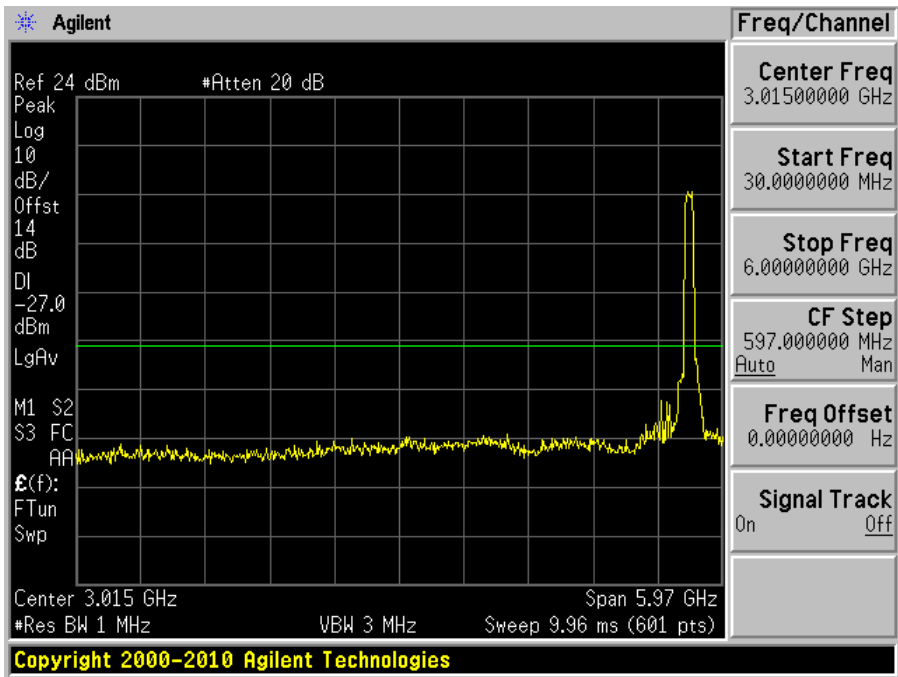


High Channel 5690 MHz (6GHz – 40GHz)

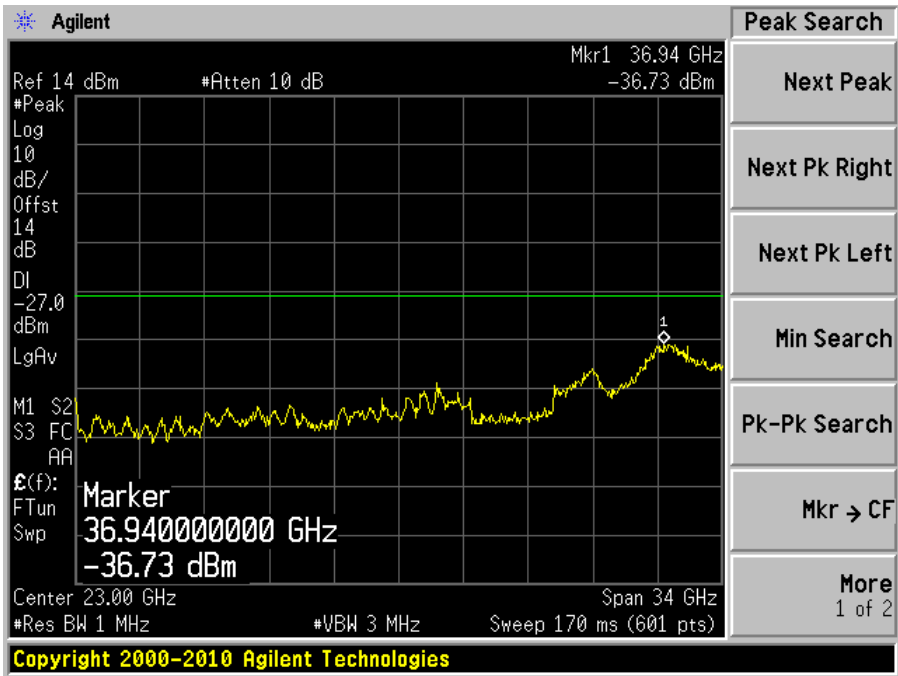


5725 – 5850 MHz

802.11a


Low Channel 5745 MHz (30MHz-6GHz)

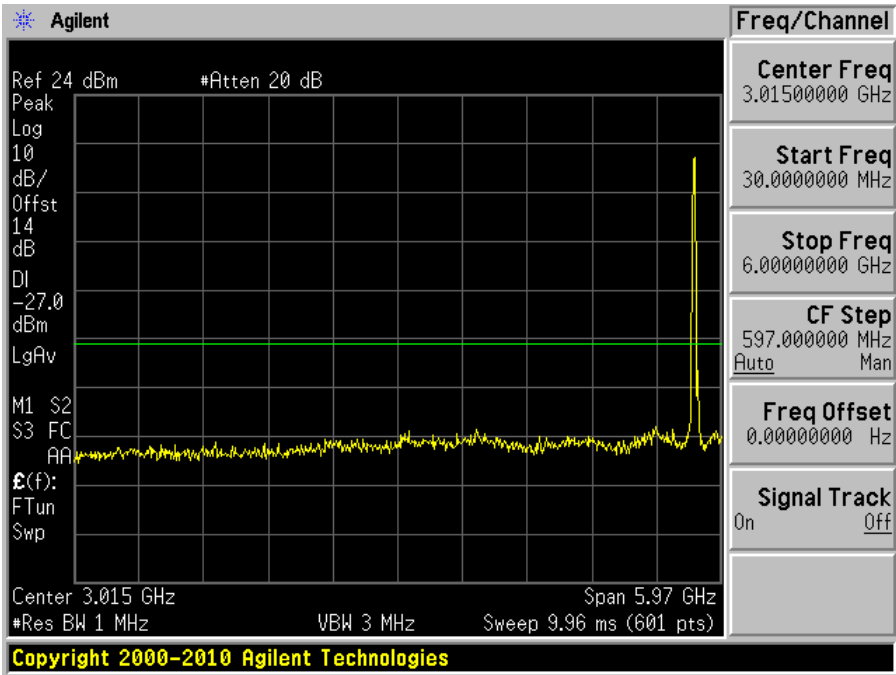


Low Channel 5745 MHz (6-40GHz)

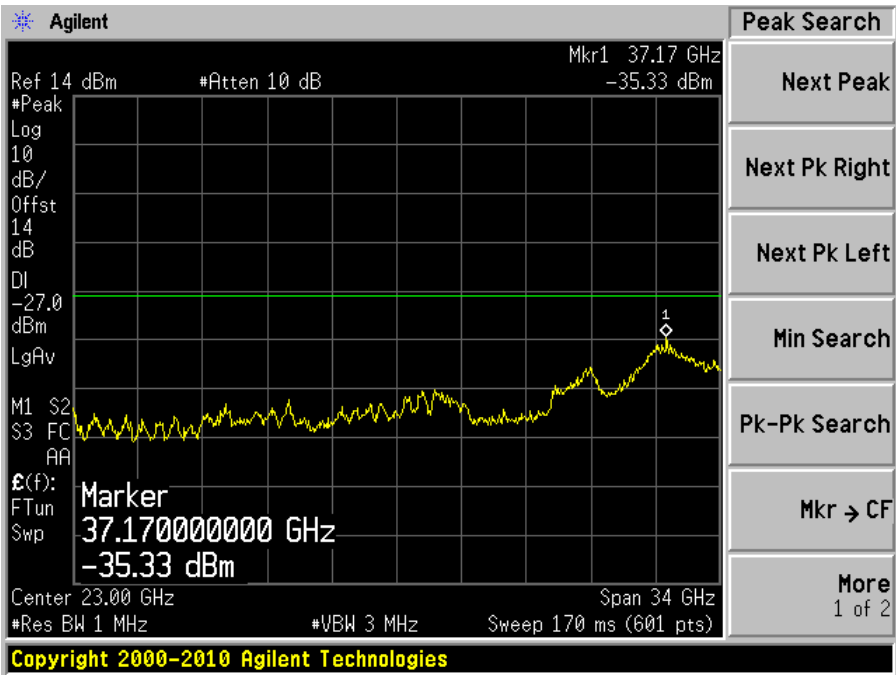


Middle Channel 5785 MHz (30MHz-6GHz)

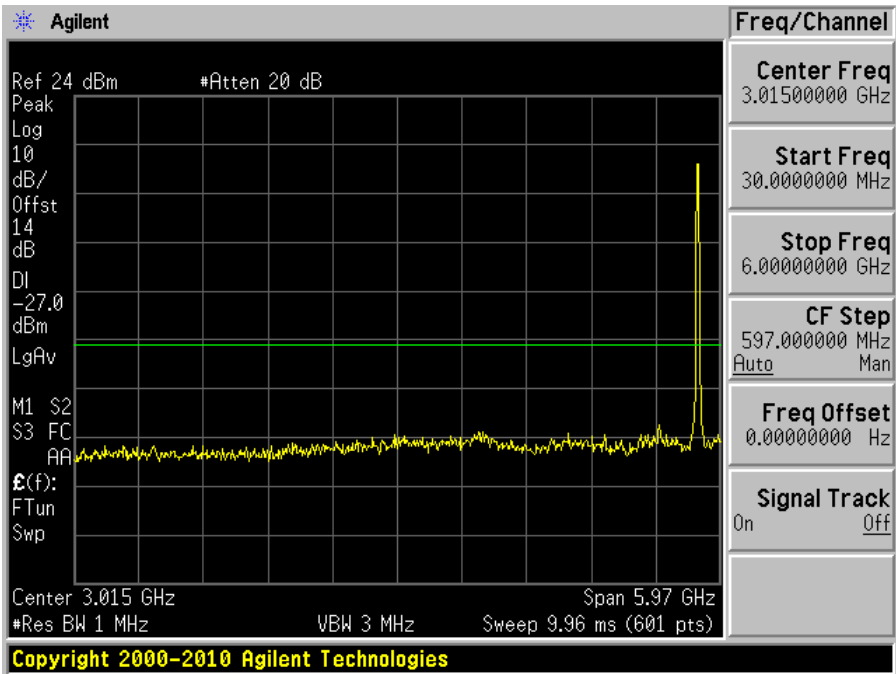


Middle Channel 5785 MHz (6-40GHz)

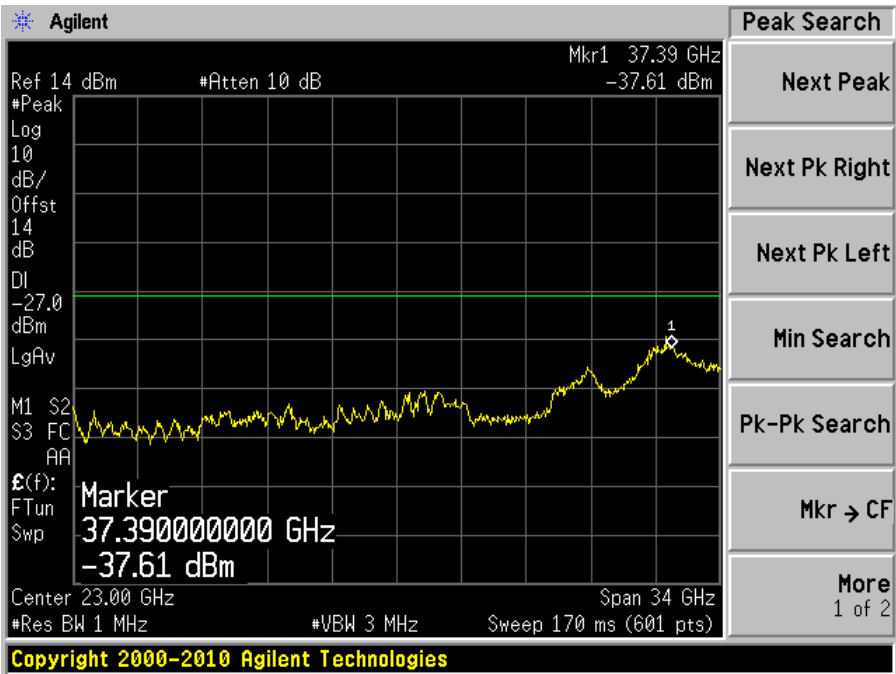

High Channel 5825 MHz (30MHz-6GHz)

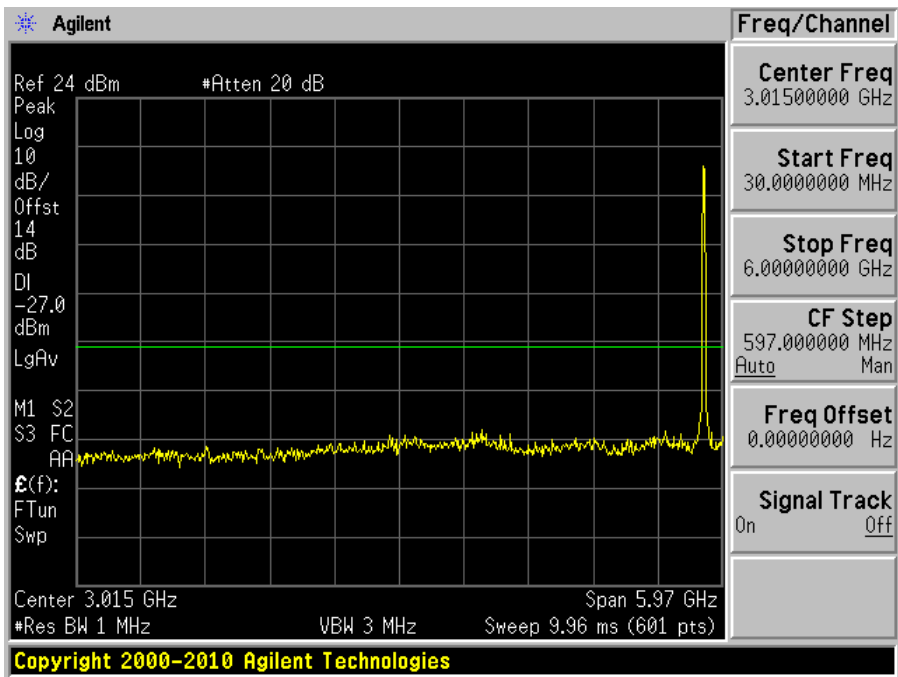


High Channel 5825 MHz (6-40GHz)

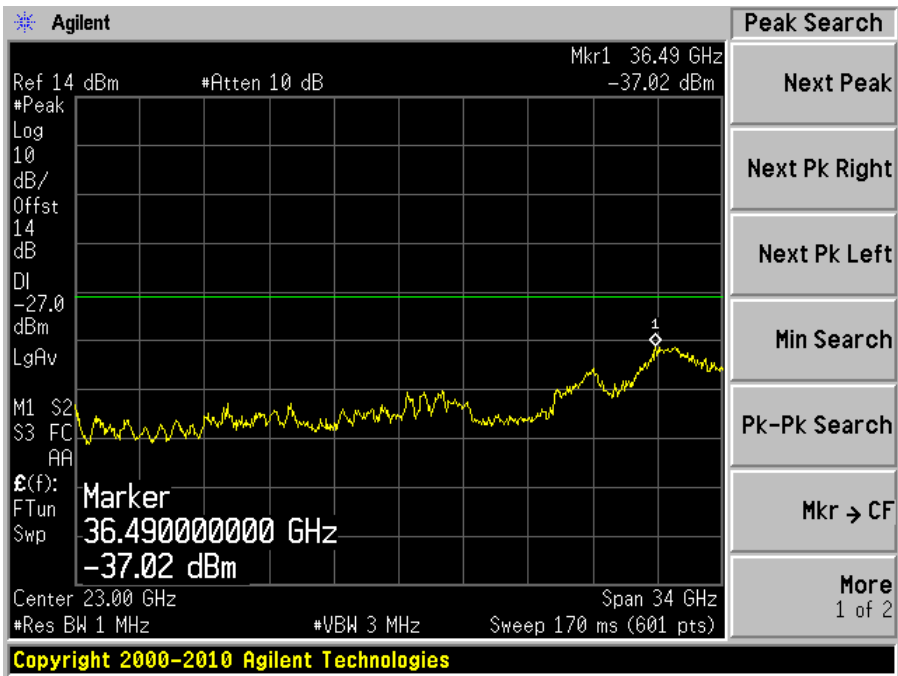


802.11n20 mode


Low Channel 5745 MHz (30MHz-6GHz)

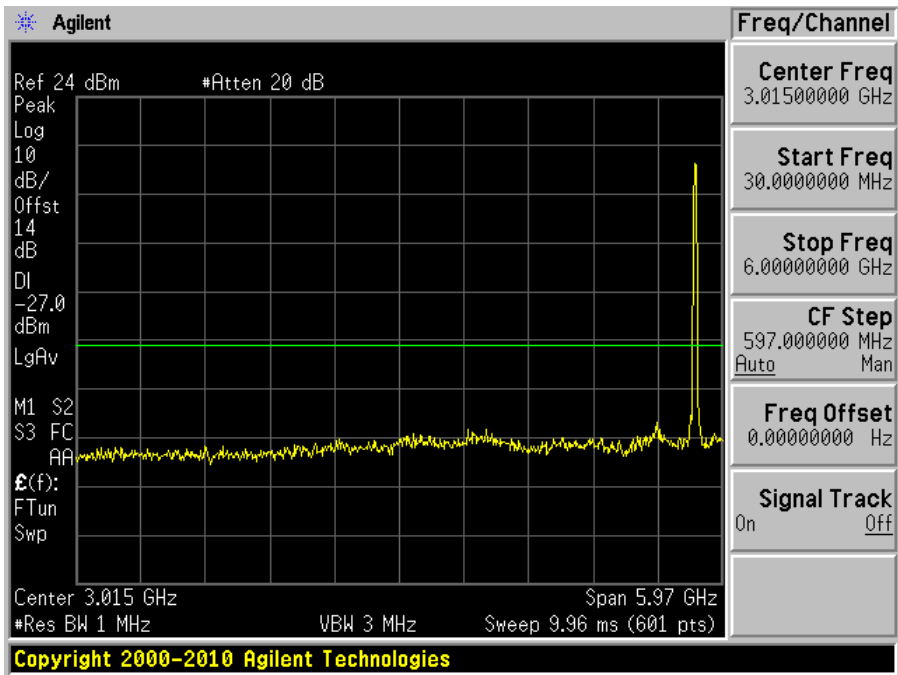


Low Channel 5745 MHz (6-40GHz)

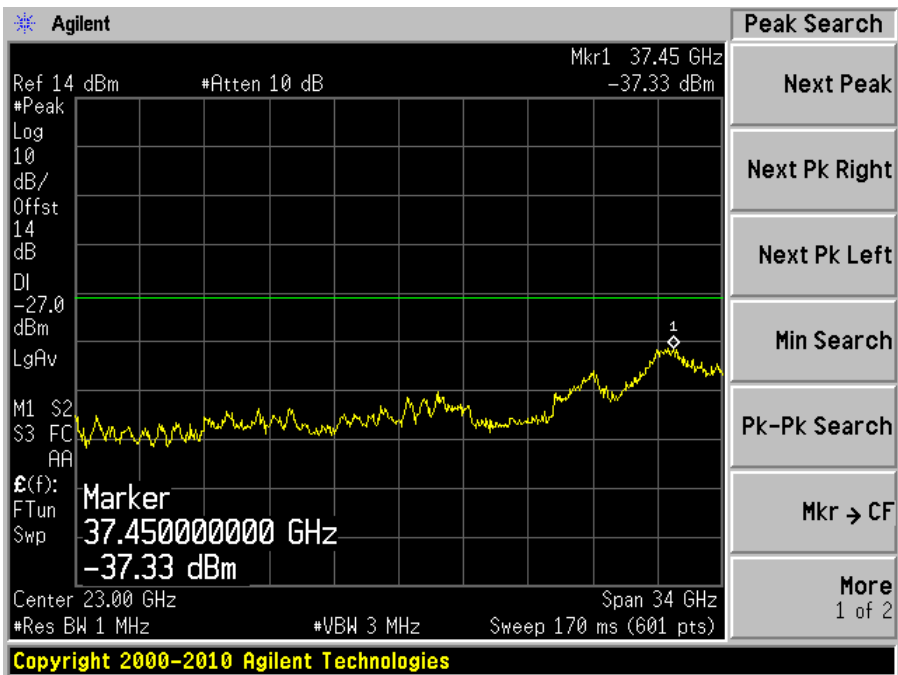


Middle Channel 5785 MHz (30MHz-6GHz)

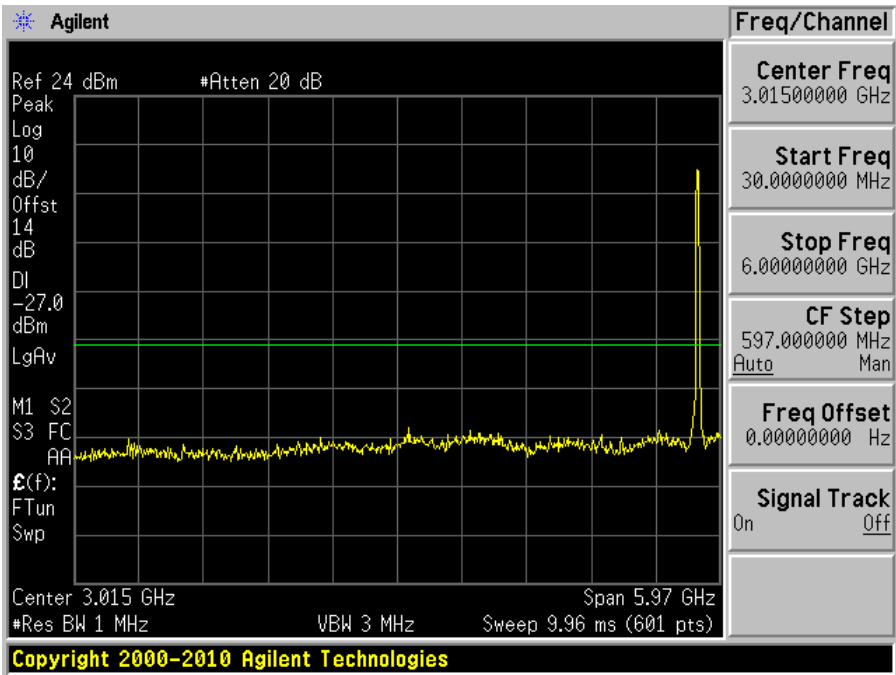


Middle Channel 5785 MHz (6-40GHz)

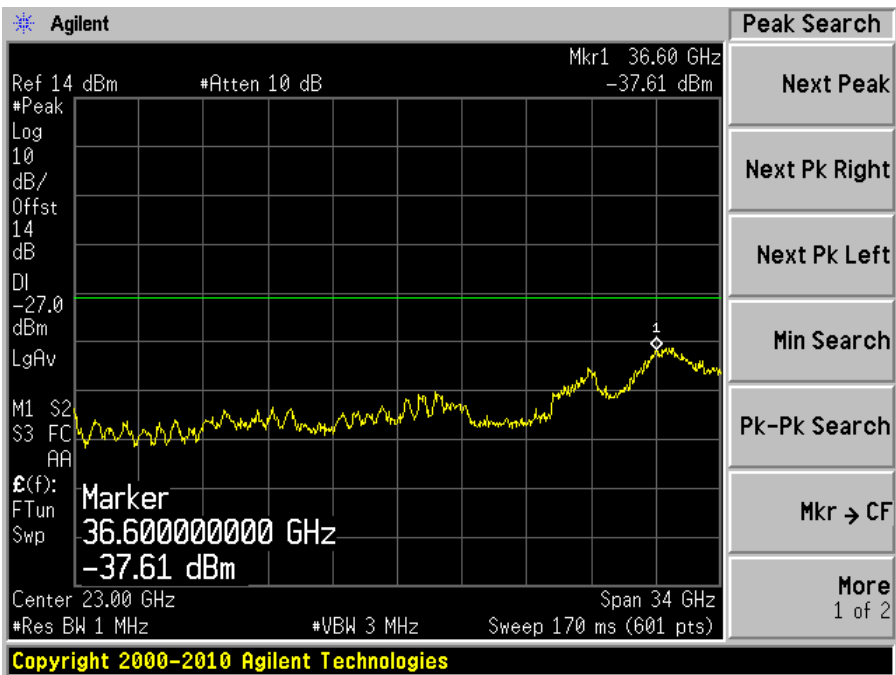

High Channel 5825 MHz (30MHz-6GHz)

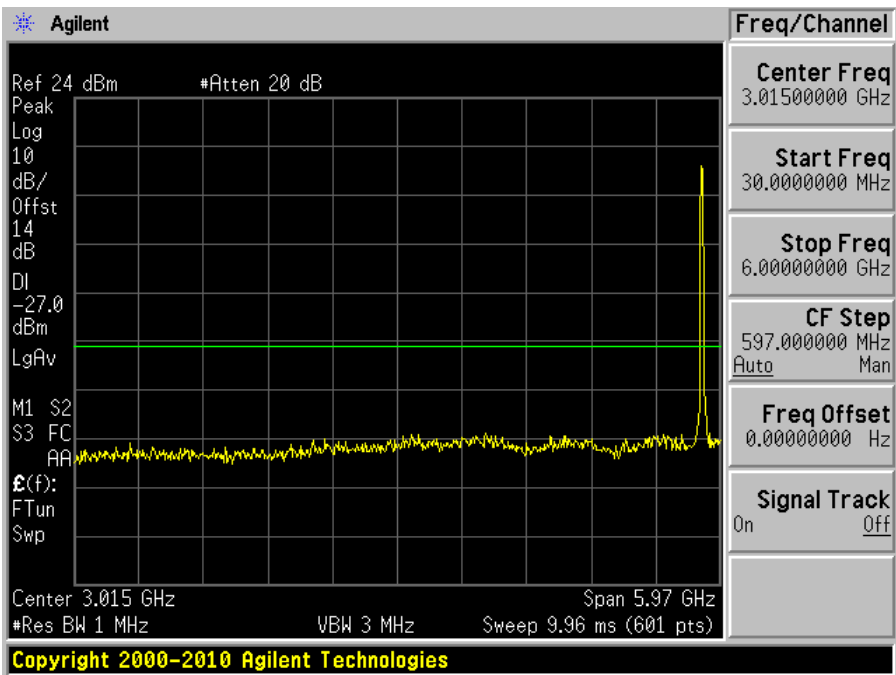


High Channel 5825 MHz (6-40GHz)

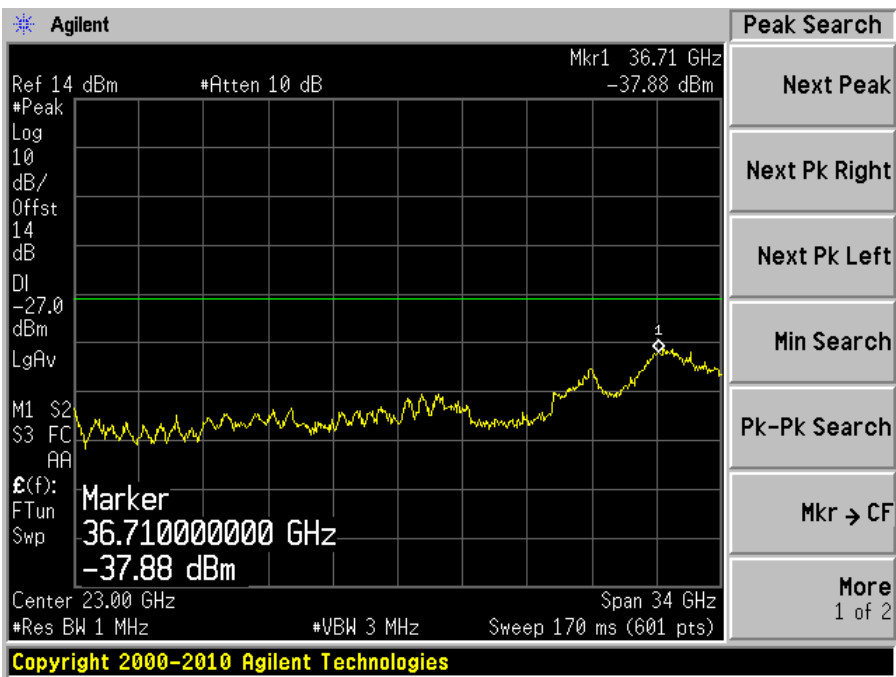


802.11n40 mode


Low Channel 5755 MHz (30MHz-6GHz)

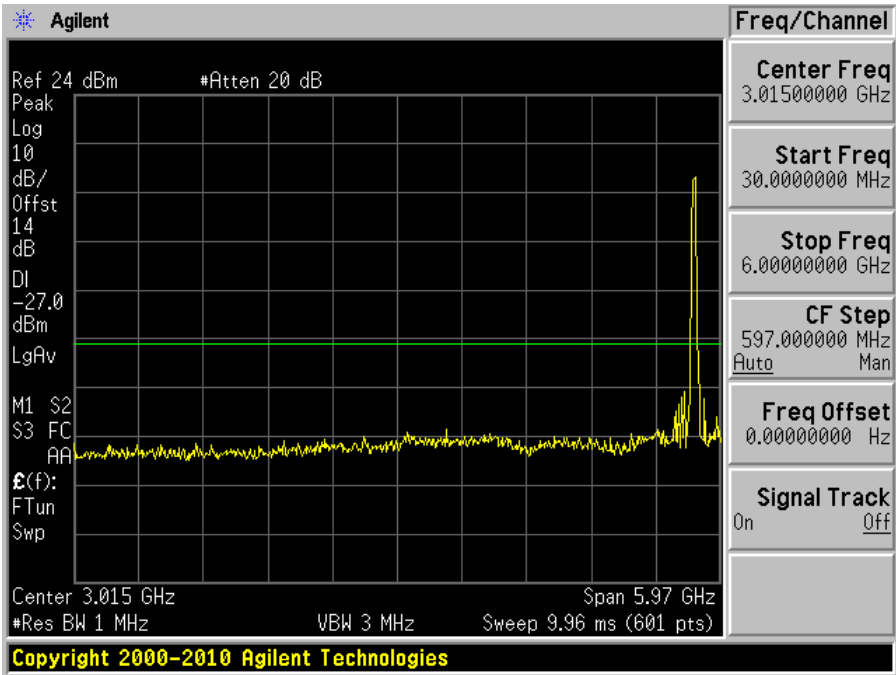


Low Channel 5755 MHz (6-40GHz)

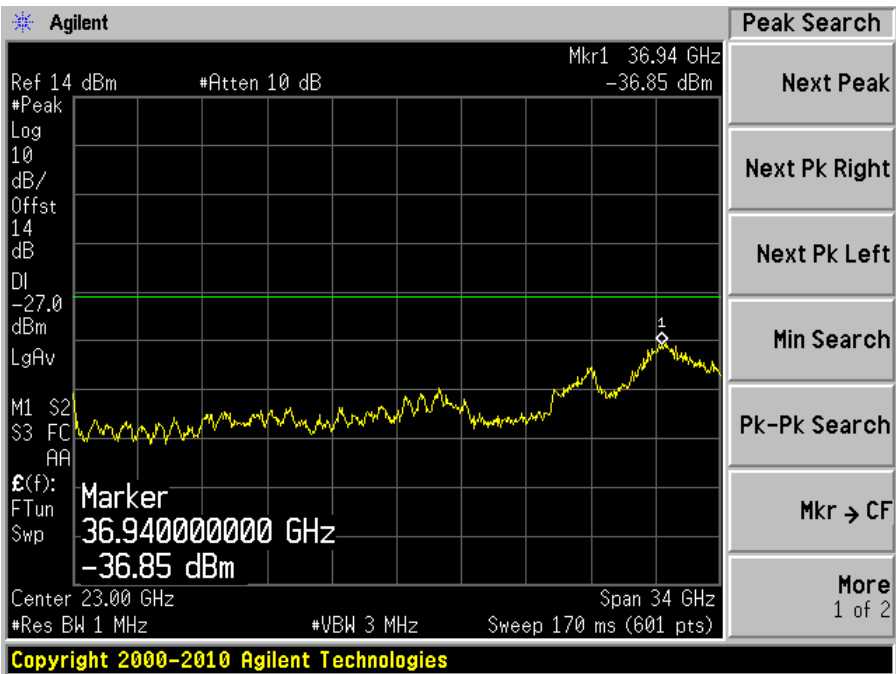

High Channel 5795 MHz (30MHz-6GHz)

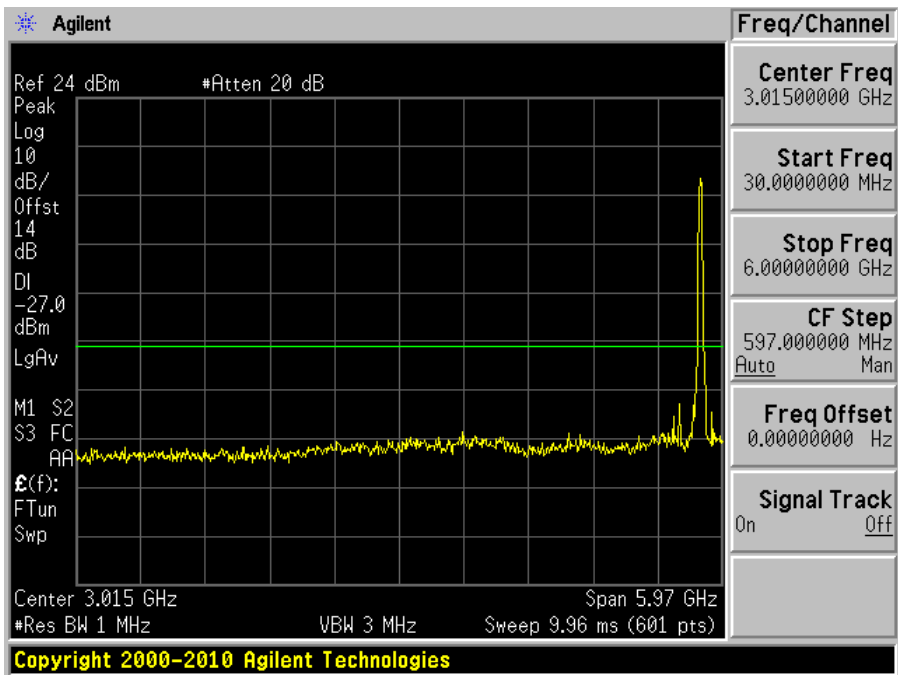


High Channel 5795 MHz (6-40GHz)

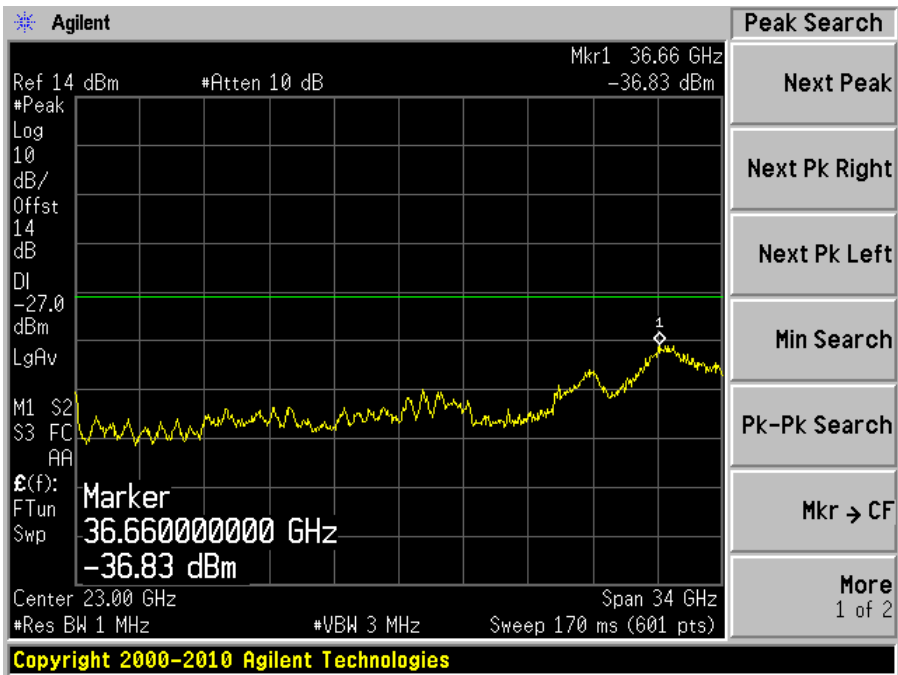


802.11ac20 mode


Low Channel 5745 MHz (30MHz-6GHz)

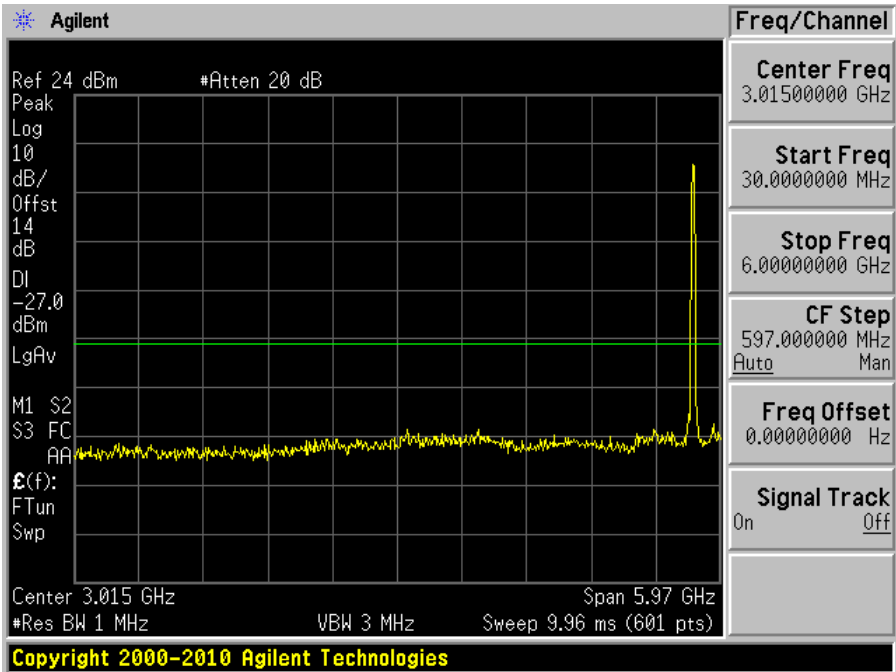


Low Channel 5745 MHz (6-40GHz)

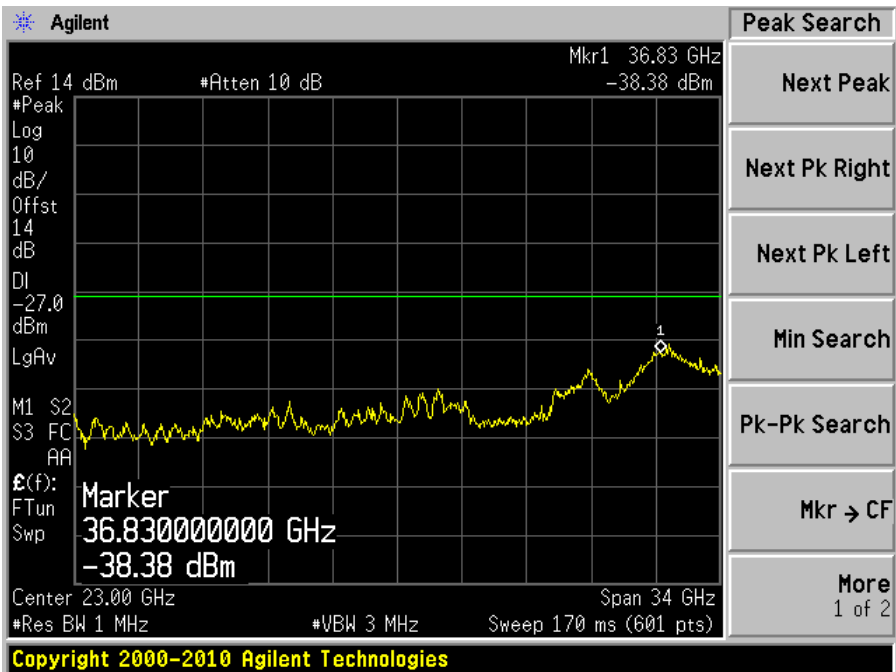


Middle Channel 5785 MHz (30MHz-6GHz)

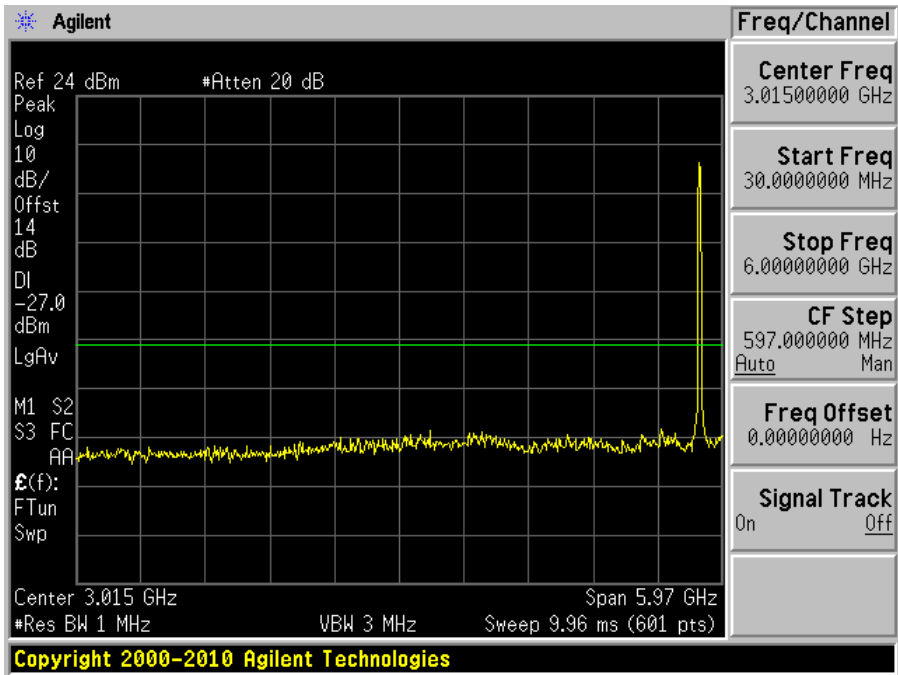


Middle Channel 5785 MHz (6-40GHz)

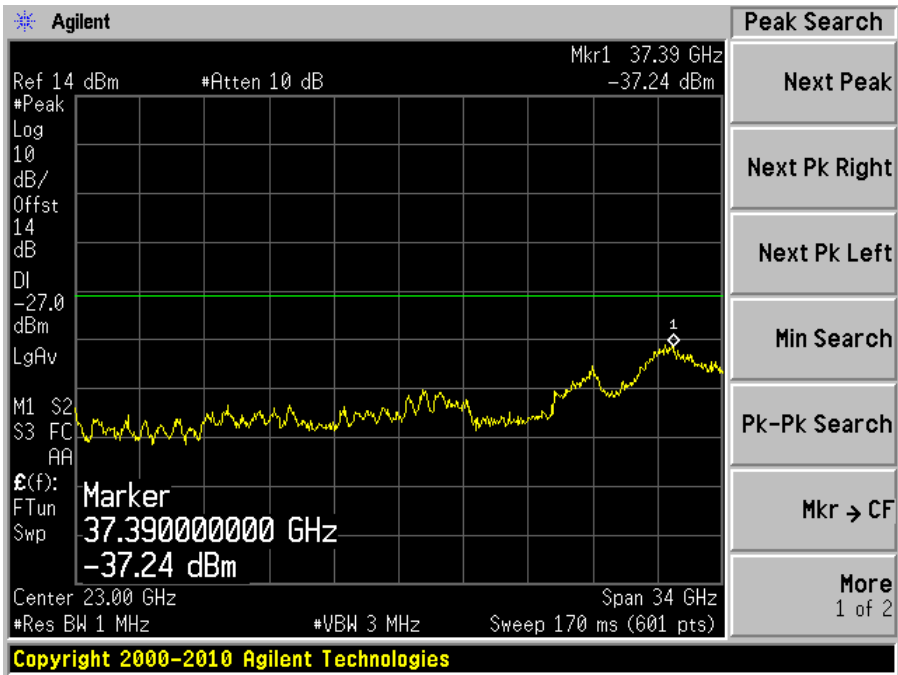

High Channel 5825 MHz (30MHz-6GHz)

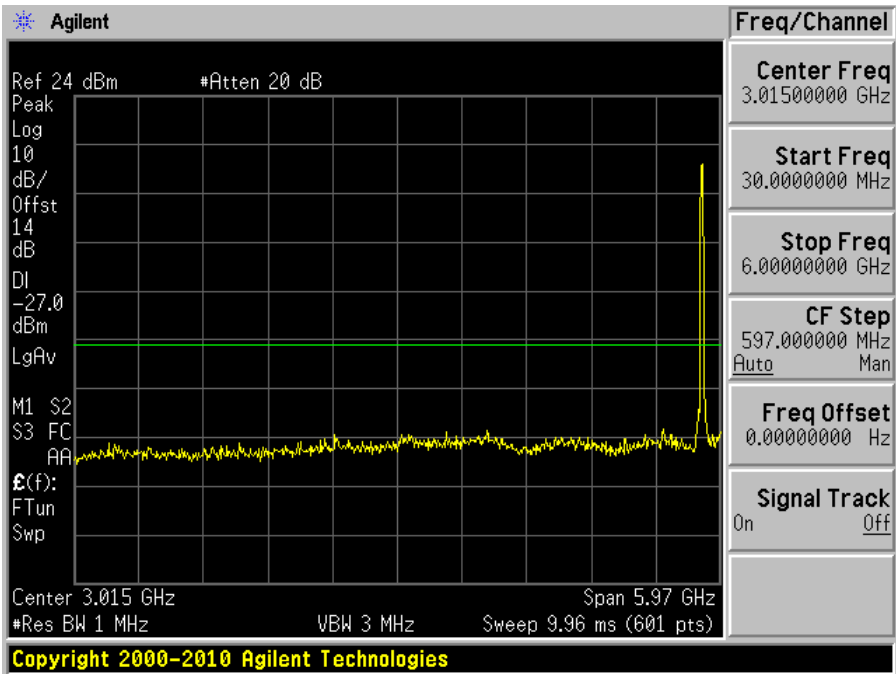


High Channel 5825 MHz (6-40GHz)

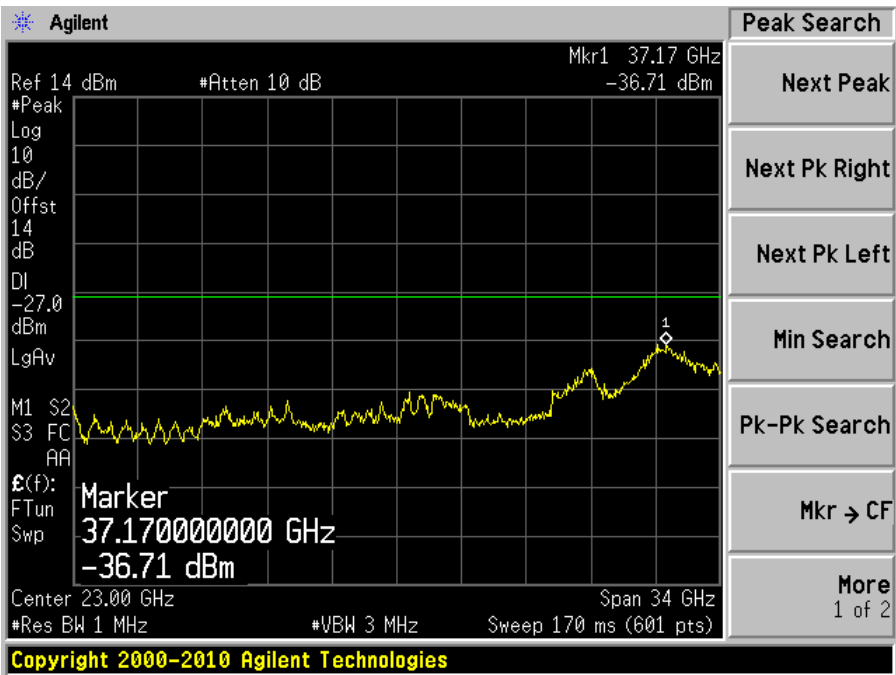


802.11ac40 mode


Low Channel 5755 MHz (30MHz-6GHz)

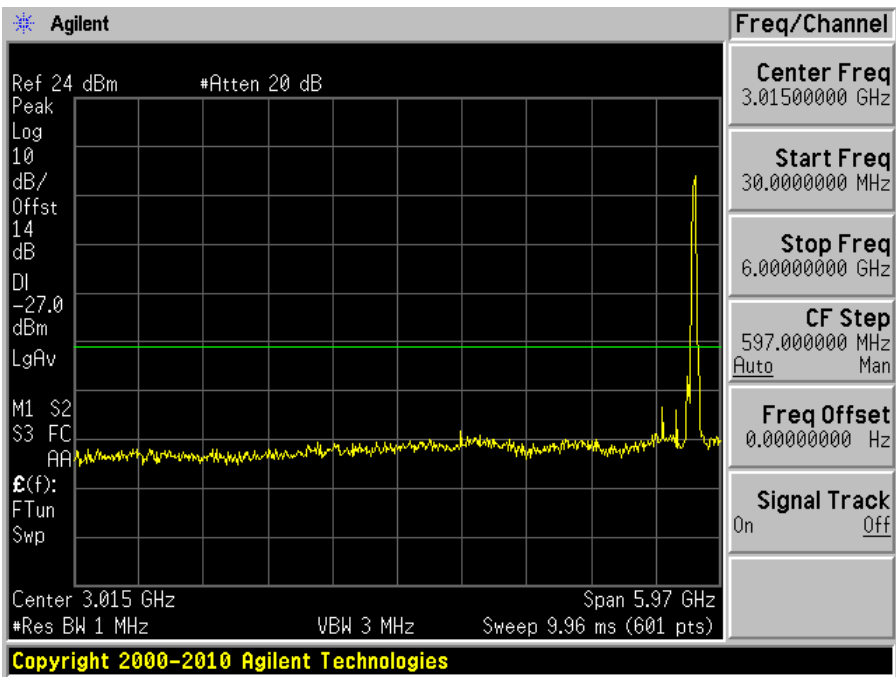


Low Channel 5755 MHz (6-40GHz)

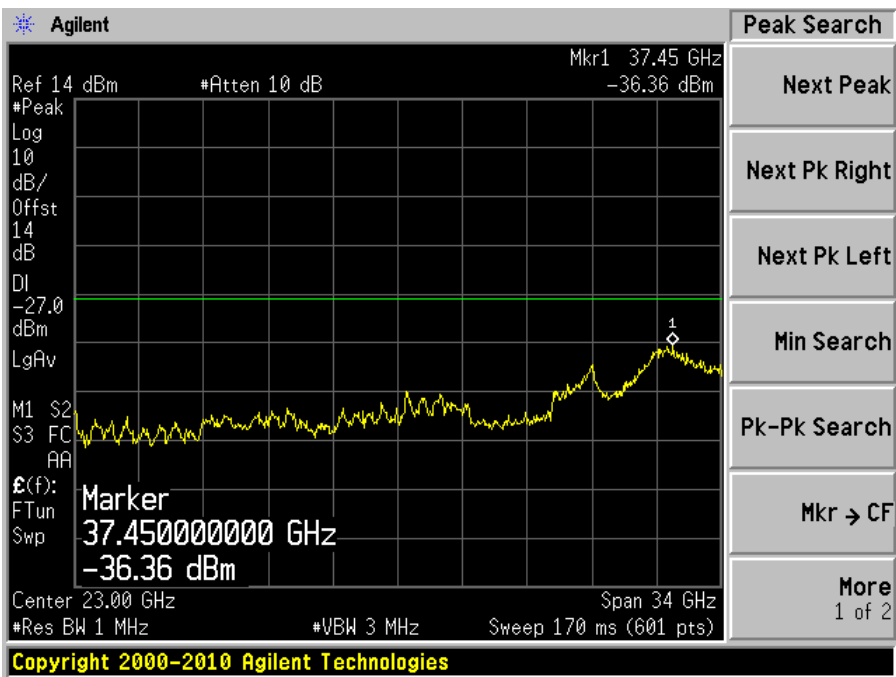

High Channel 5795 MHz (30MHz-6GHz)

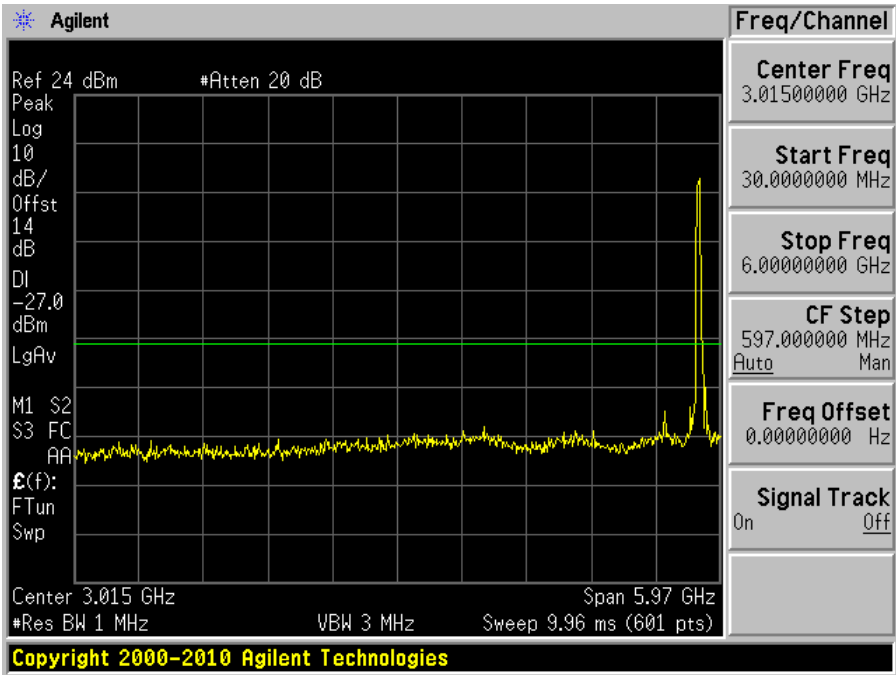


High Channel 5795 MHz (6-40GHz)

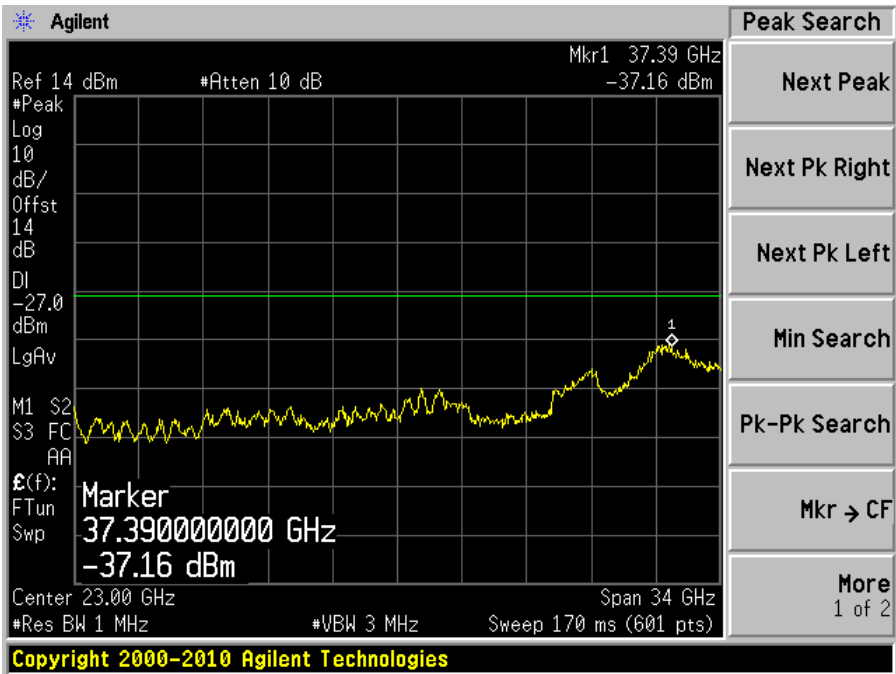


802.11ac80 mode

5755 MHz (30MHz-6GHz)

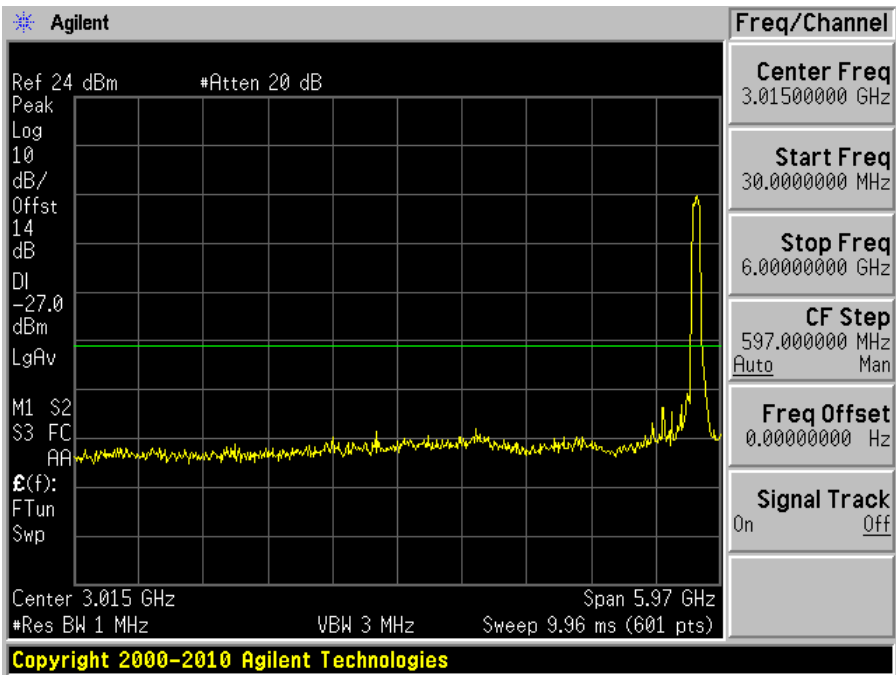

5755 MHz (6GHz – 40GHz)

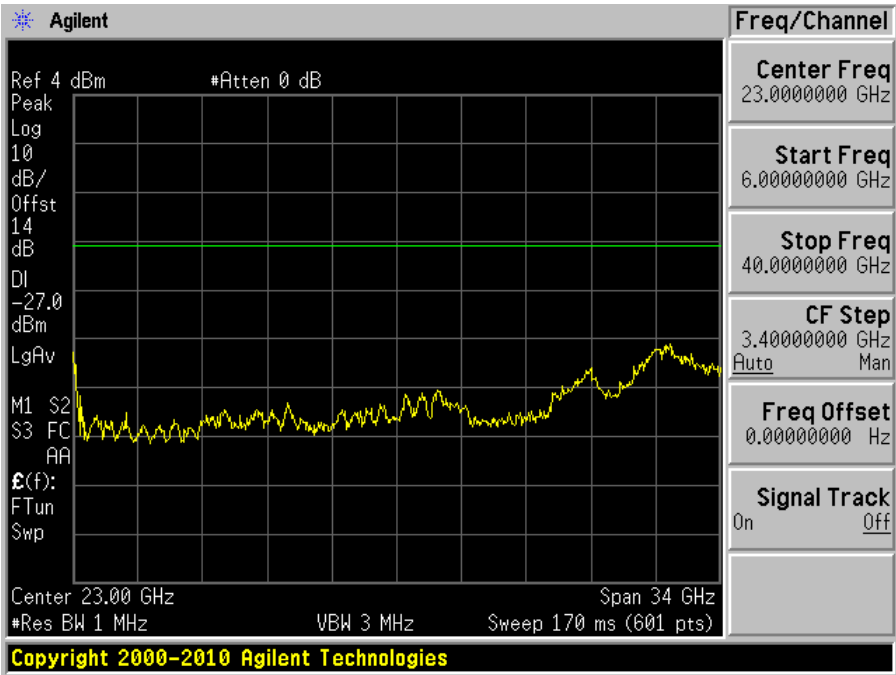


2) Band Edge Emissions

5150 - 5250 MHz


802.11a mode

Low Channel: 5180 MHz

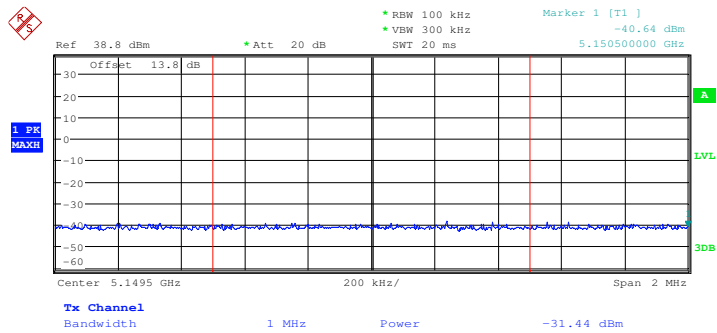

Date: 4.AUG.2016 02:23:04


High channel: 5240 MHz

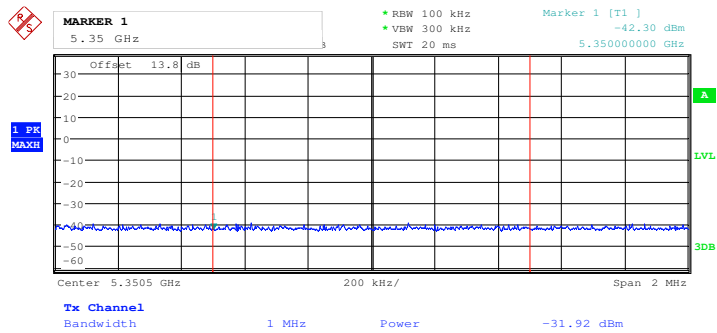

Date: 4.AUG.2016 02:24:04


802.11n20 mode

Low Channel: 5180 MHz

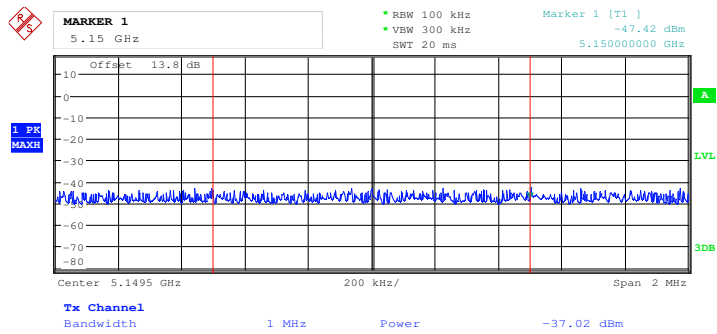

Date: 4.AUG.2016 03:26:00


High channel: 5240 MHz

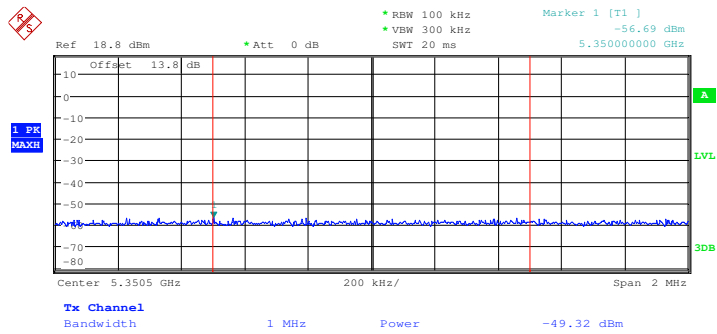

Date: 4.AUG.2016 03:26:48


802.11n40 mode

Low Channel: 5190 MHz

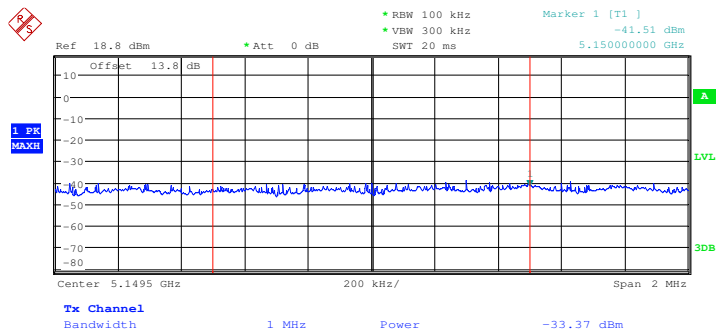

Date: 4.AUG.2016 03:38:45


High channel: 5230 MHz

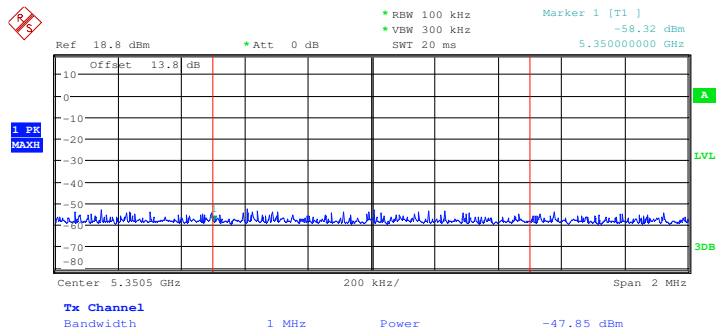

Date: 4.AUG.2016 03:39:46


802.11ac20 mode

Low Channel: 5180 MHz

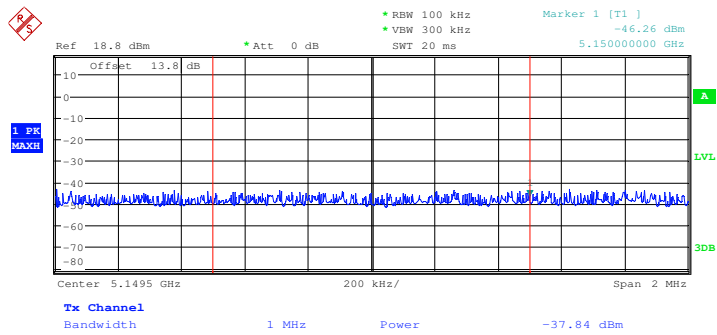

Date: 4.AUG.2016 03:32:07


High channel: 5240 MHz

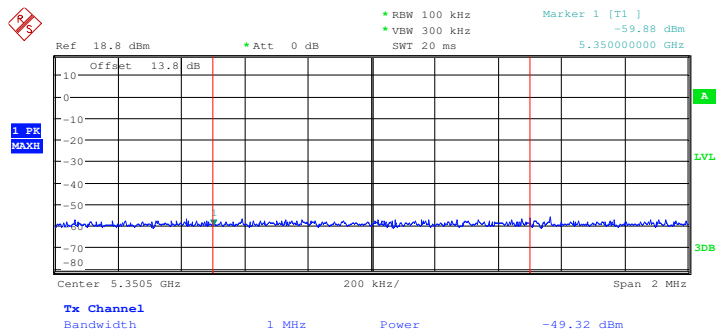

Date: 4.AUG.2016 03:32:46


802.11ac40 mode

Low Channel: 5190 MHz

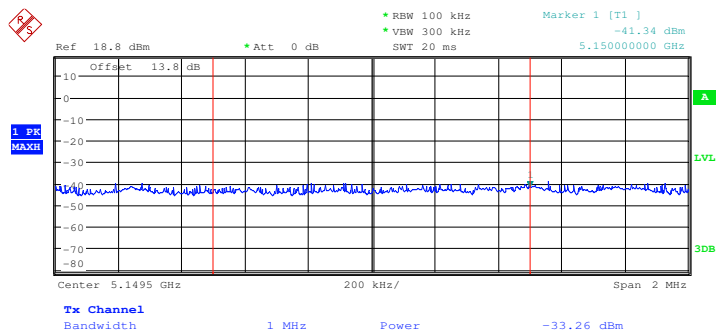

Date: 4.AUG.2016 03:47:53


High channel: 5230 MHz

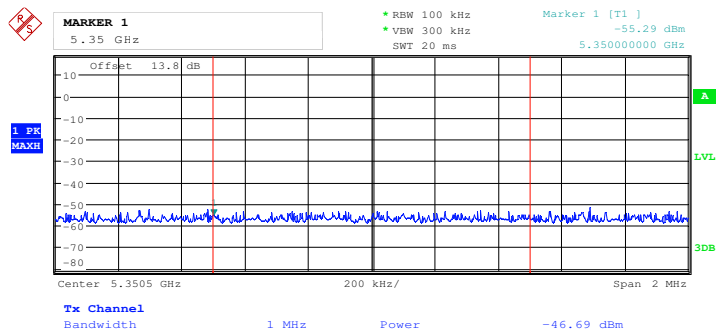

Date: 4.AUG.2016 03:48:45


802.11ac80 mode 5210 MHz

Lower band edge

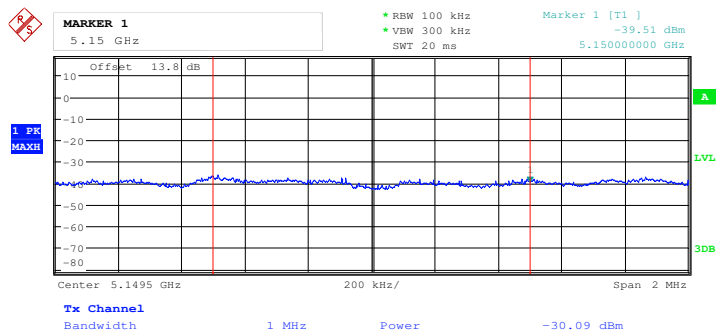

Date: 4.AUG.2016 03:56:22

Upper band edge

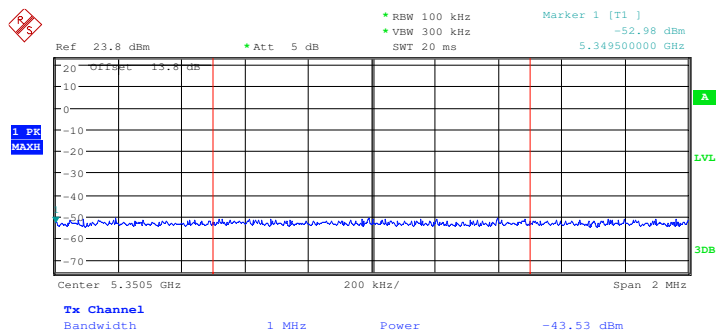


Date: 1.AUG.2016 03:00:46

5250 – 5350 MHz


802.11a mode

Low Channel: 5260 MHz

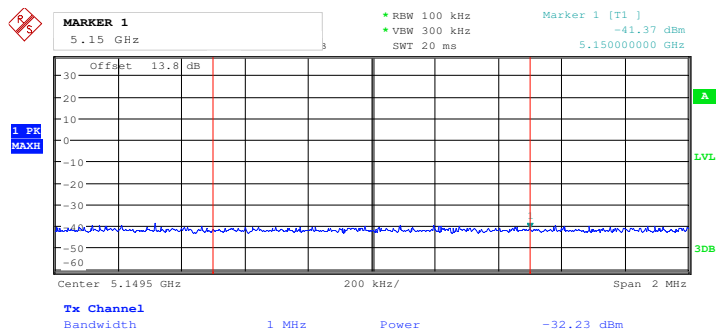

Date: 4.AUG.2016 02:24:38


High channel: 5320 MHz

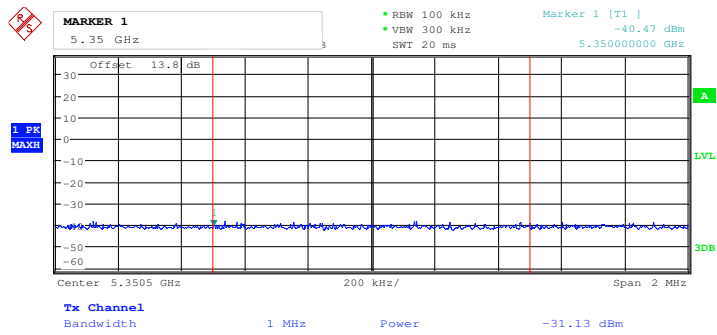

Date: 4.AUG.2016 02:25:17


802.11n20 mode

Low Channel: 5260 MHz

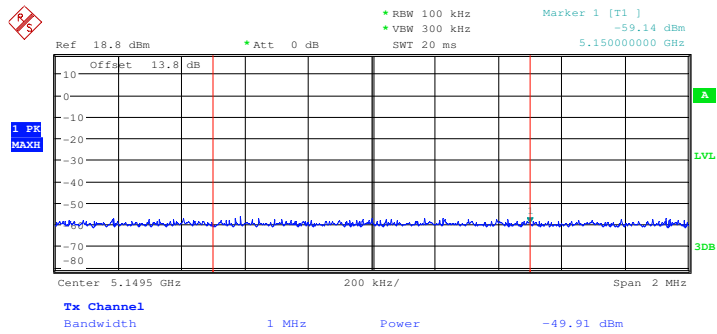

Date: 4.AUG.2016 03:27:21


High channel: 5320 MHz

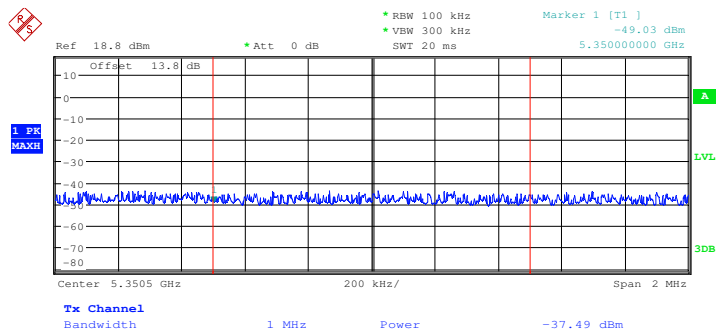

Date: 4.AUG.2016 03:27:55


802.11n40 mode

Low Channel: 5270 MHz

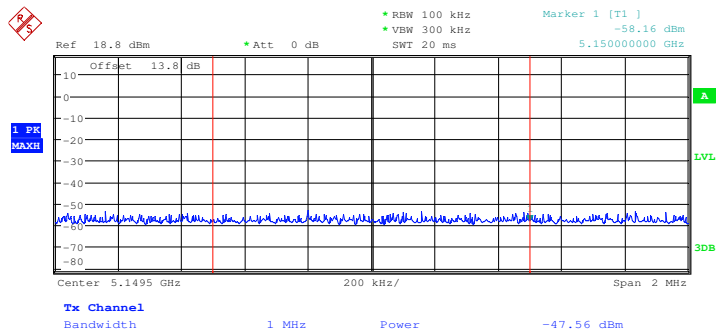

Date: 4.AUG.2016 03:40:23


High channel: 5310 MHz

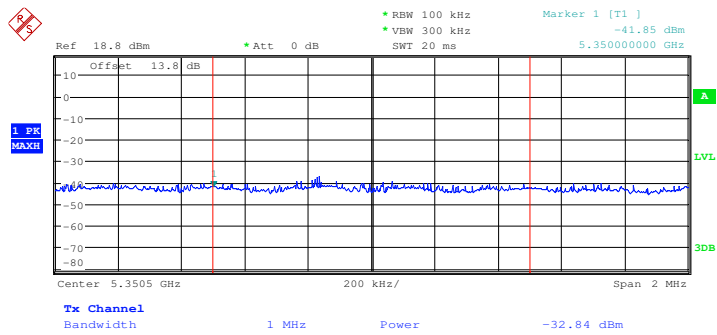

Date: 4.AUG.2016 03:41:53


802.11ac20 mode

Low Channel: 5260 MHz

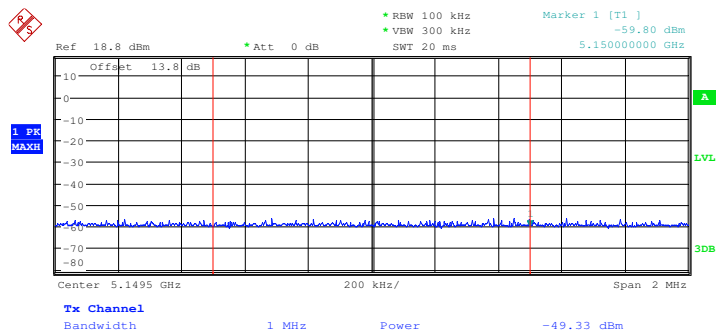

Date: 4.AUG.2016 03:33:21


High channel: 5320 MHz

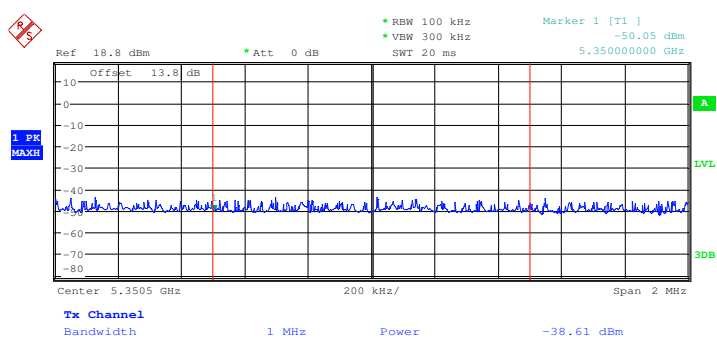

Date: 4.AUG.2016 03:33:49


802.11ac40 mode

Low Channel: 5270 MHz

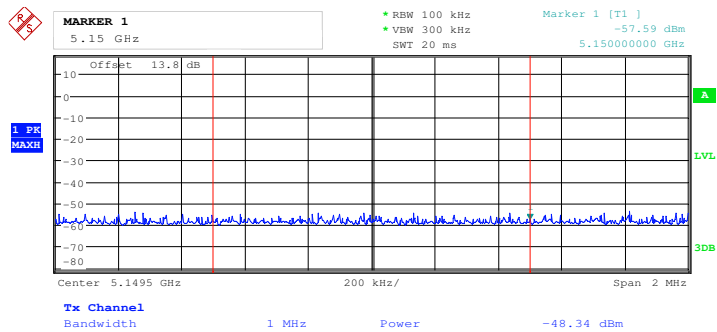

Date: 4.AUG.2016 03:49:18


High channel: 5310 MHz

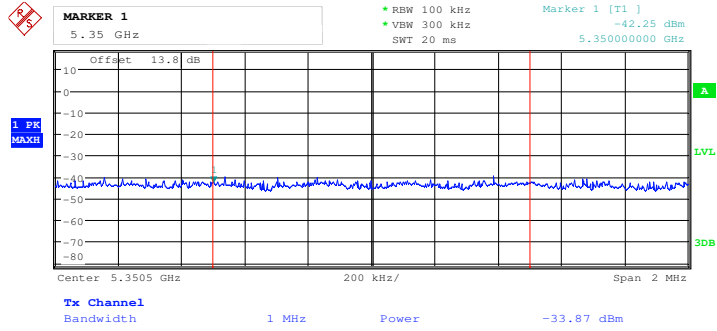

Date: 4.AUG.2016 03:49:56


802.11ac80 mode 5290 MHz

Lower Band Edge

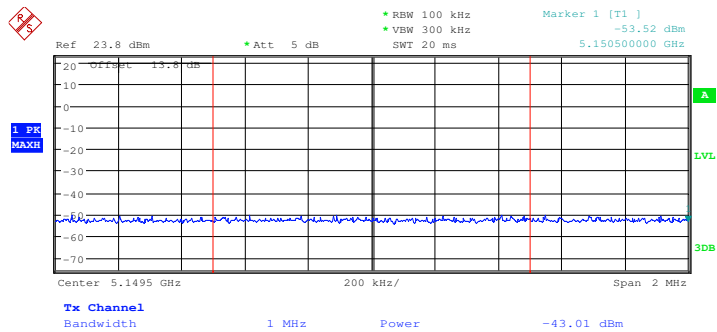

Date: 1.AUG.2016 03:06:12

Upper Band Edge

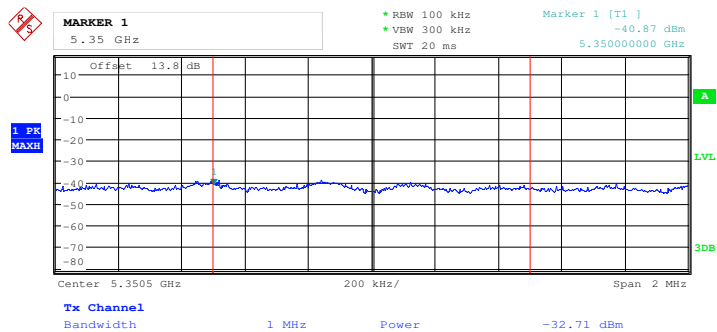


Date: 4.AUG.2016 03:58:22

5470 - 5725 MHz


802.11a mode

Low Channel: 5500 MHz

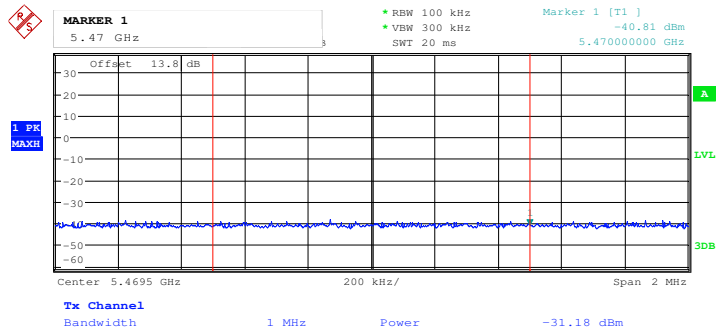

Date: 4.AUG.2016 02:25:58


High channel: 5700 MHz

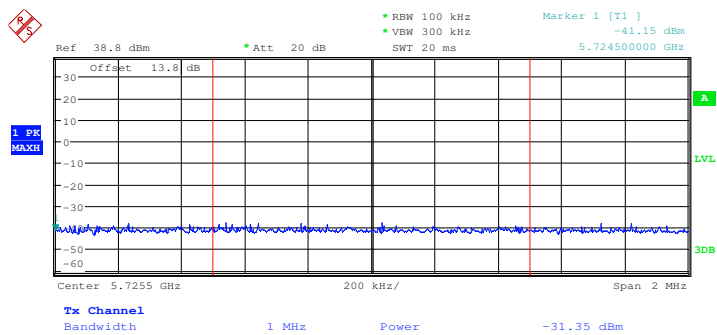

Date: 4.AUG.2016 02:26:31


802.11n20 mode

Low Channel: 5500 MHz

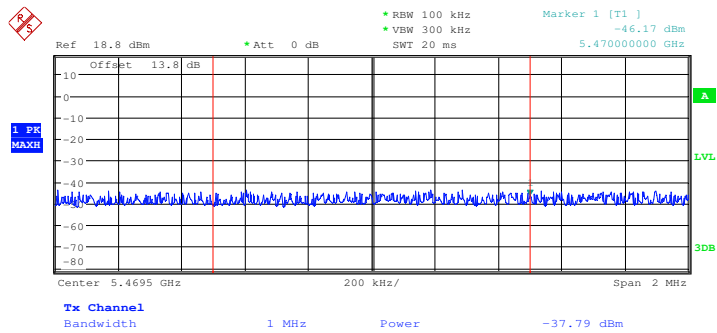

Date: 4.AUG.2016 03:28:36


High channel: 5700 MHz

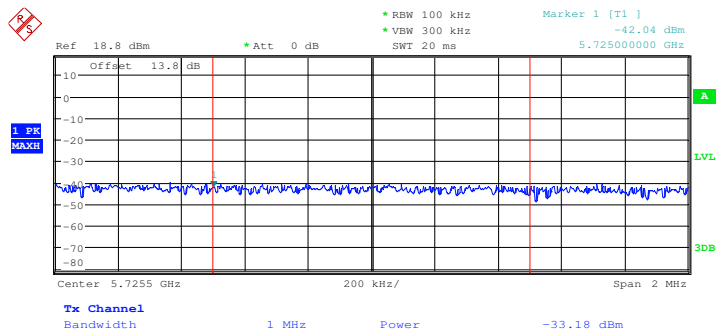

Date: 4.AUG.2016 03:29:25


802.11n40 mode

Low Channel: 5510 MHz

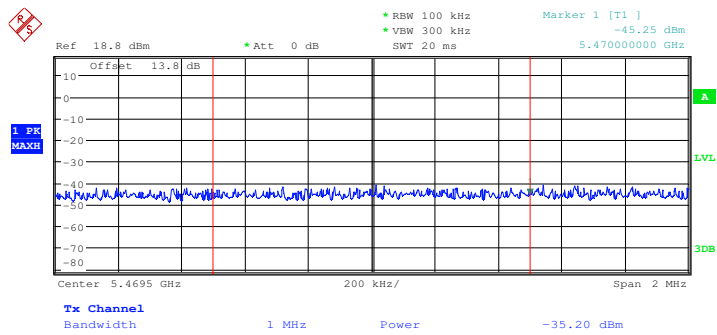

Date: 4.AUG.2016 03:42:41


High channel: 5670 MHz

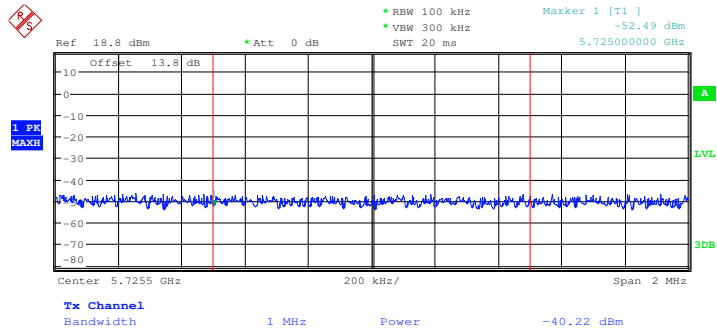

Date: 4.AUG.2016 03:43:37


802.11ac20 mode

Low Channel: 5500 MHz

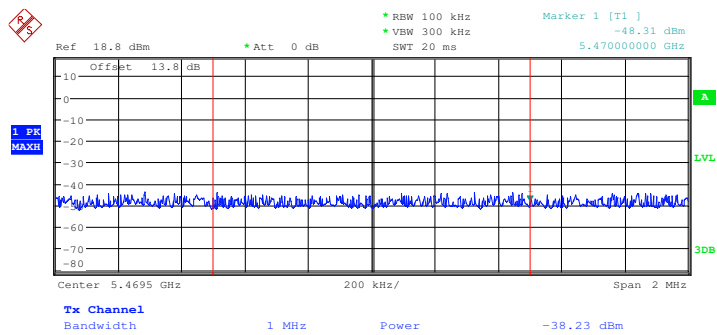

Date: 4.AUG.2016 03:34:22


High channel: 5700 MHz

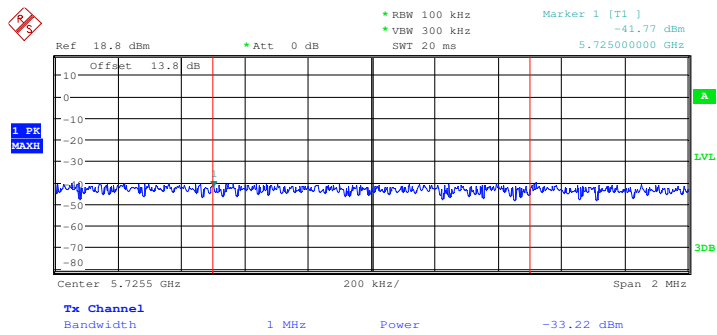

Date: 4.AUG.2016 03:35:13


802.11ac40 mode

Low Channel: 5510 MHz

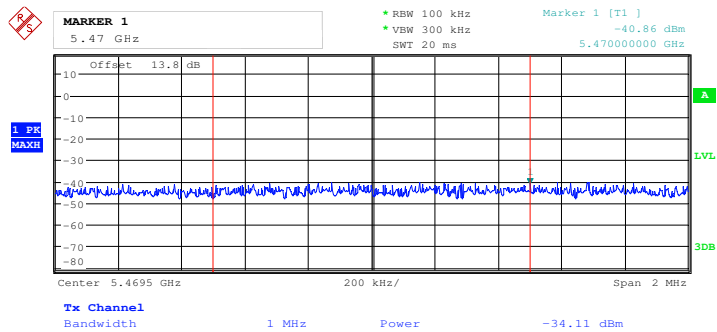

Date: 4.AUG.2016 03:50:37

High channel: 5670 MHz

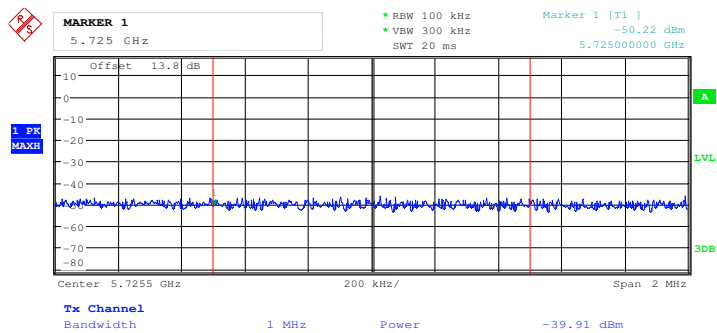


Date: 4.AUG.2016 03:52:17

802.11ac80 mode


5530 MHz

Lower Band Edge

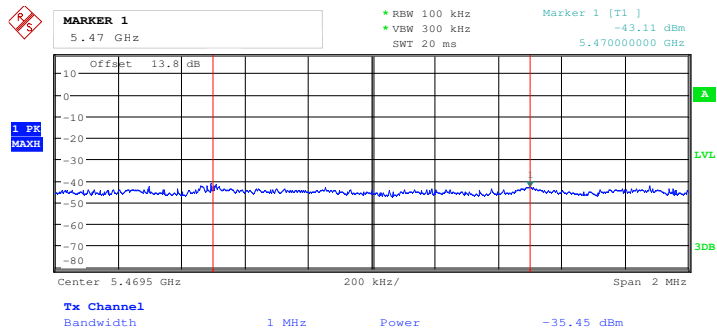


Date: 4.AUG.2016 03:59:01

Upper Band Edge

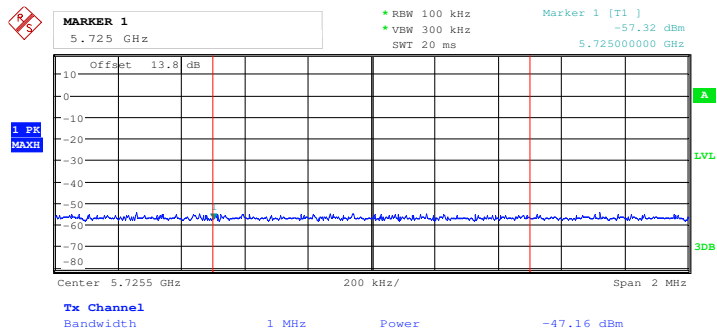

Date: 4.AUG.2016 03:59:32

5610 MHz

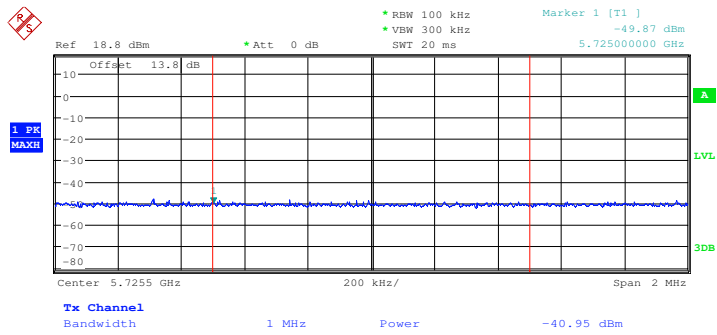


Date: 4.AUG.2016 04:00:19

5725 – 5850 MHz


FCC Emission Mask

802.11a mode  
5745 MHz

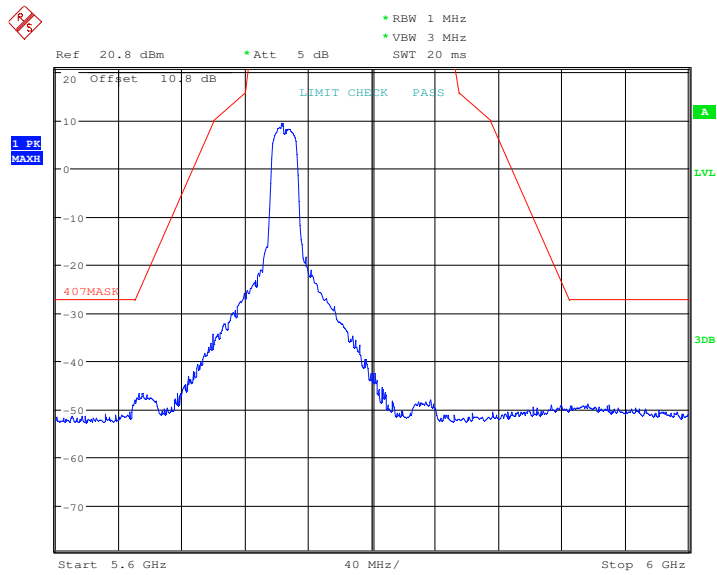


Date: 31.JUL.2016 03:54:20

5825 MHz

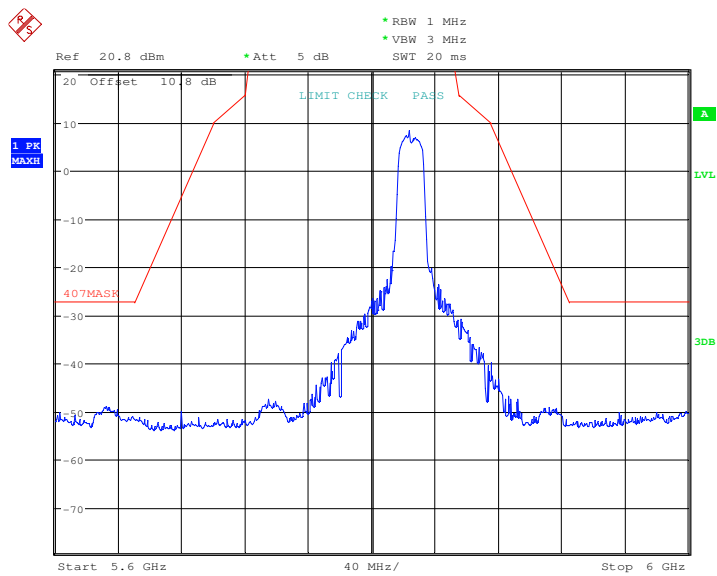


Date: 31.JUL.2016 03:56:08

802.11n20 mode  
5745 MHz

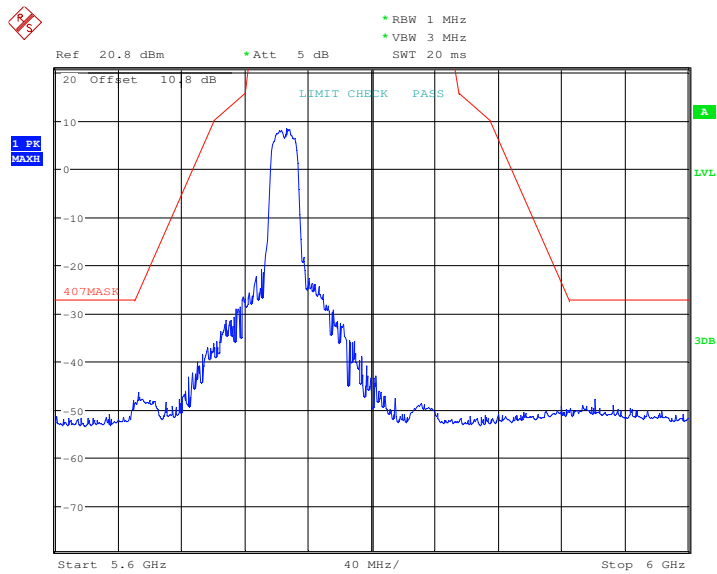

Date: 31.JUL.2016 03:57:25


5825 MHz

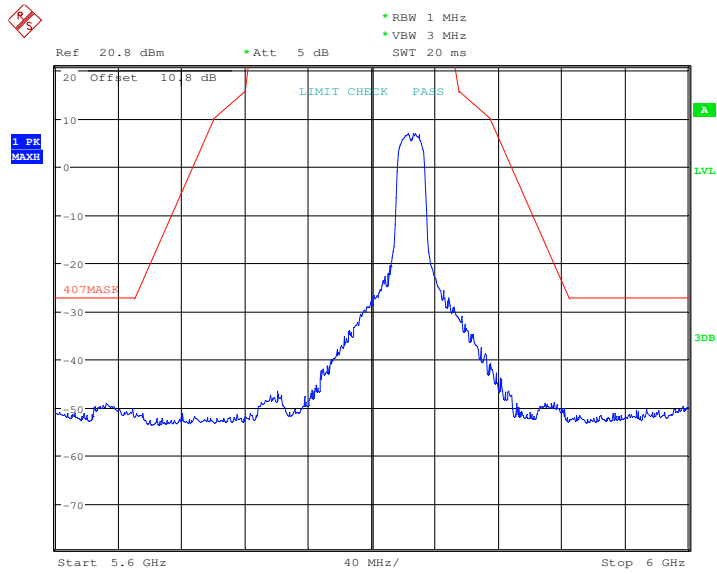

Date: 31.JUL.2016 03:59:02


802.11n40 mode

5755 MHz

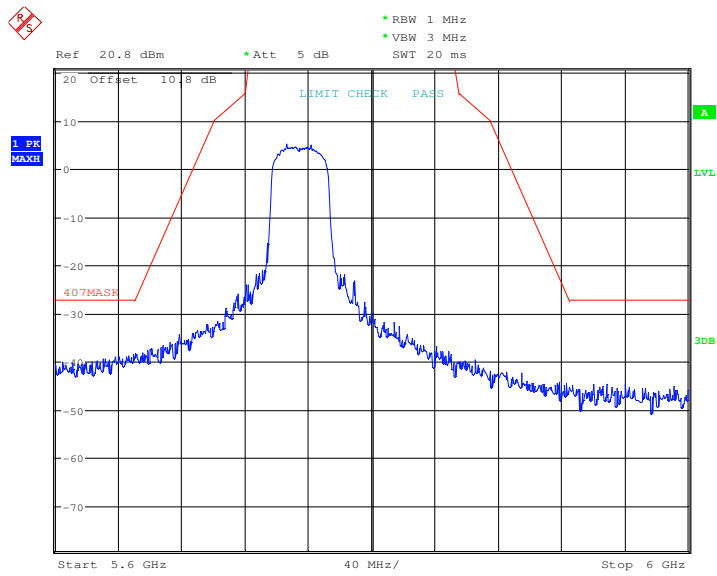

Date: 31.JUL.2016    04:01:02


5795 MHz

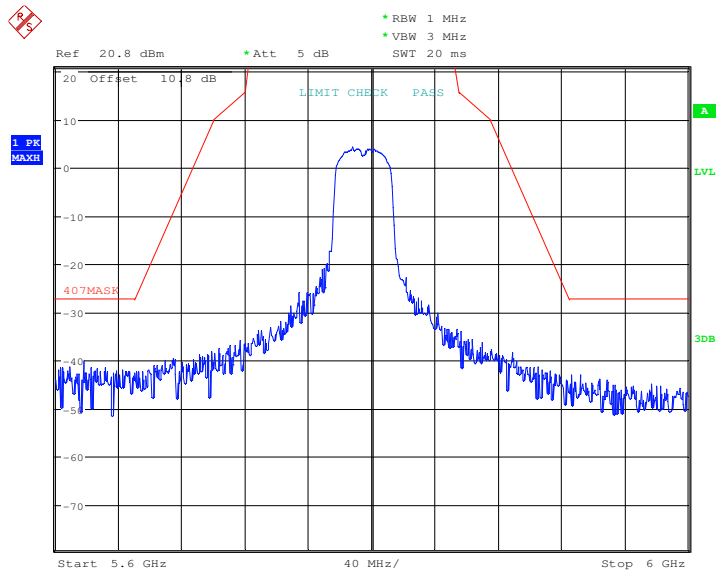

Date: 31.JUL.2016    04:02:00


802.11ac20 mode

5745 MHz

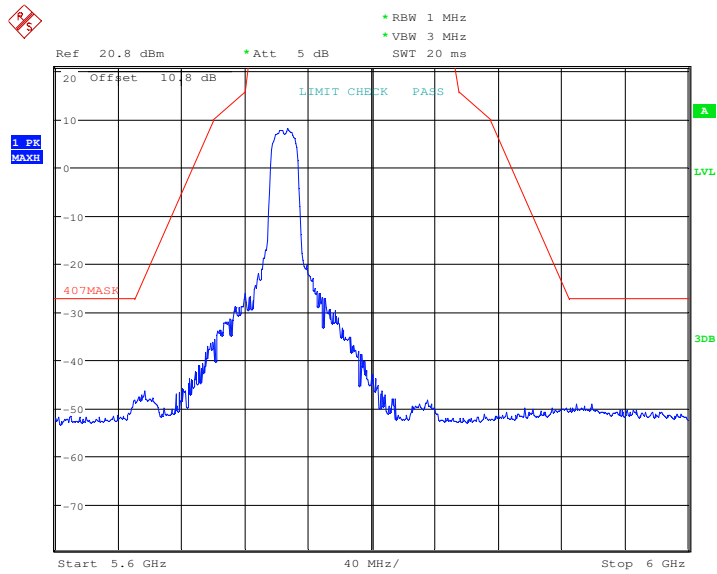

Date: 31.JUL.2016 04:03:17


5825 MHz

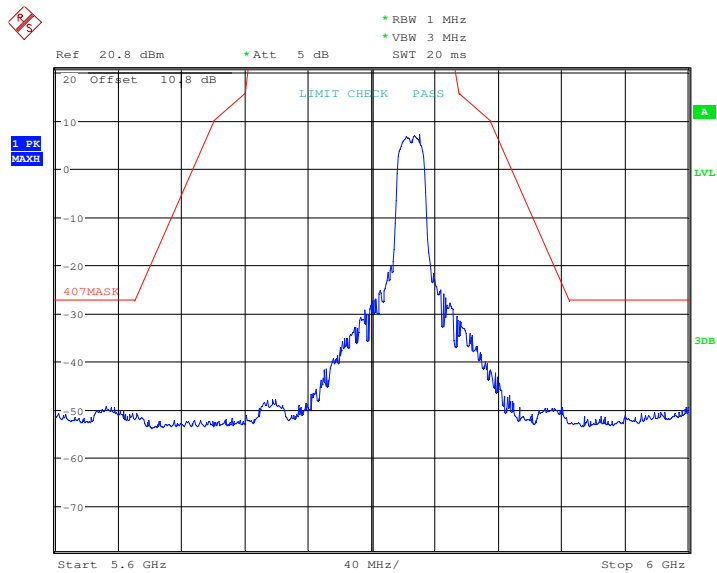

Date: 31.JUL.2016 04:04:33


802.11ac40 mode

5755 MHz

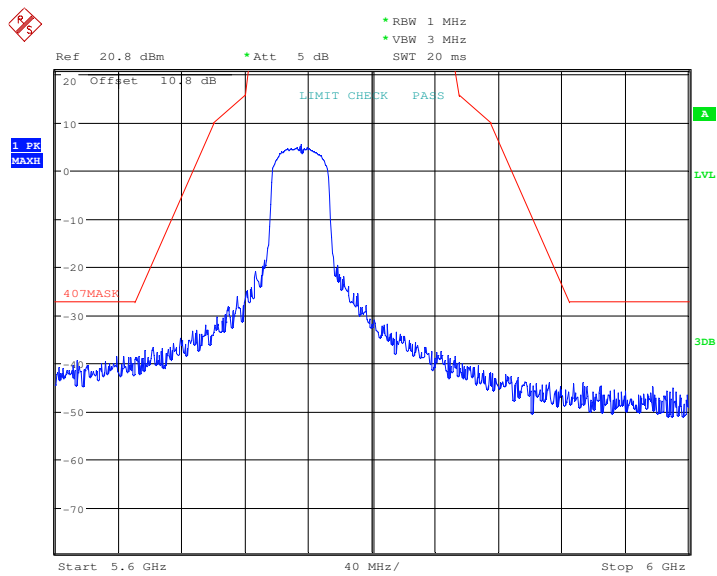


Date: 31.JUL.2016 04:05:50

5795 MHz

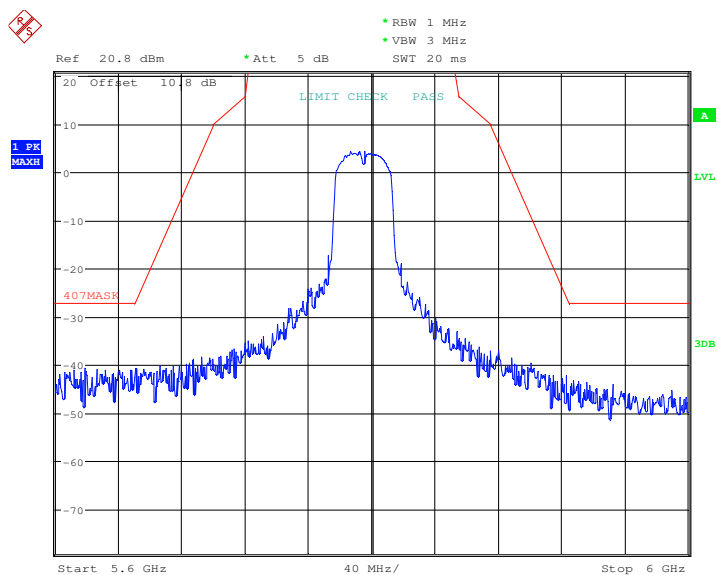

Date: 31.JUL.2016 04:07:09

802.11ac80 mode, 5775 MHz

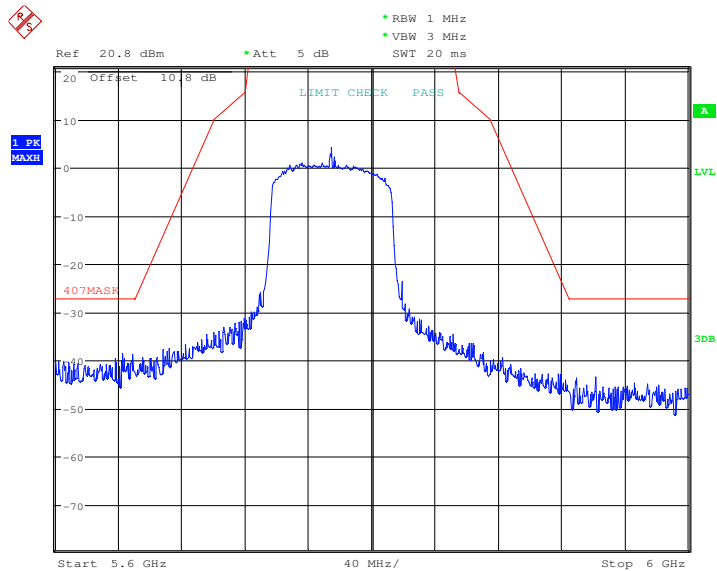


Date: 31.JUL.2016 04:08:01

IC


802.11a mode

Low Channel: 5745 MHz (-17 dBm/MHz limit)

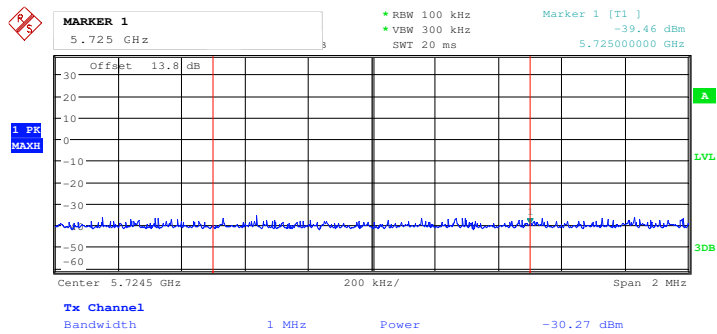


Date: 4.AUG.2016 02:27:58

Low Channel: 5745 MHz (-27 dBm/MHz limit)

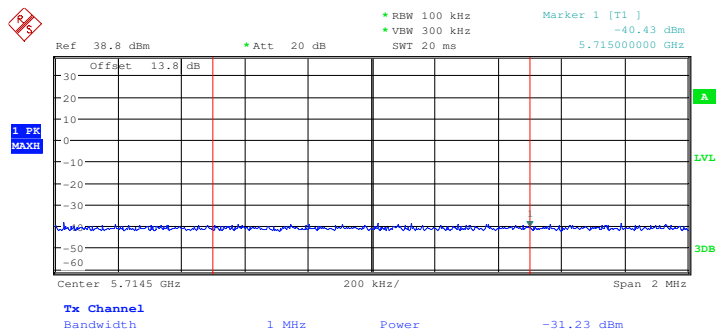


Date: 4.AUG.2016 02:27:28

High Channel: 5825 MHz (-17 dBm/MHz limit)

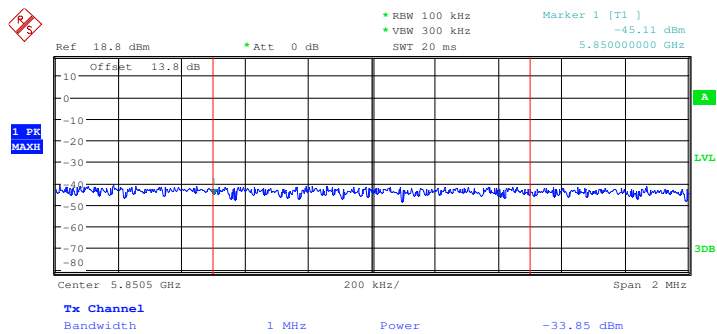

Date: 4.AUG.2016 03:19:52


High Channel: 5825 MHz (-27 dBm/MHz limit)

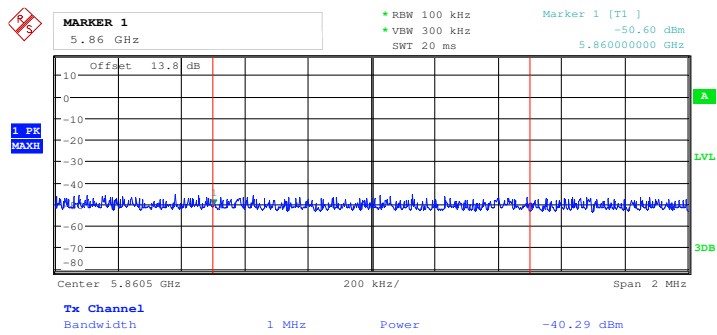

Date: 4.AUG.2016 03:20:26


802.11n20 mode

Low Channel: 5745 MHz (-17 dBm/MHz limit)

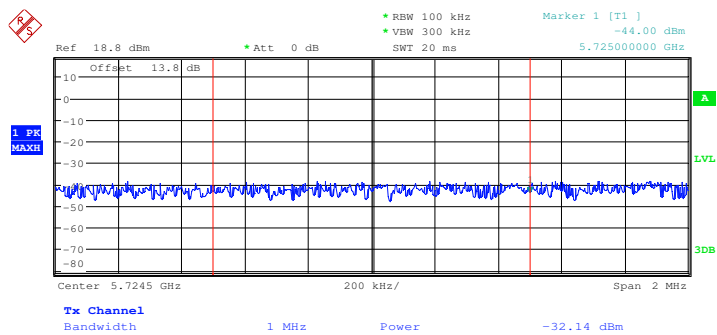


Date: 4.AUG.2016 03:30:25

Low Channel: 5745 MHz (-27 dBm/MHz limit)

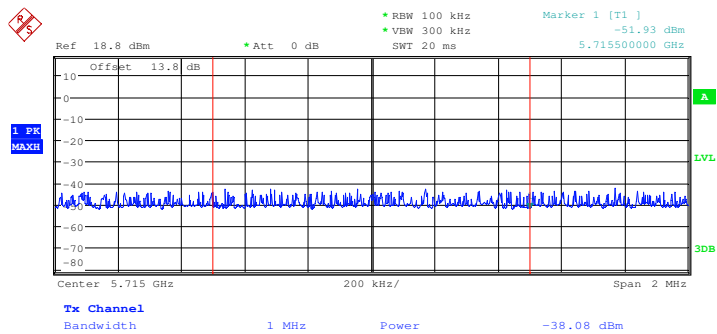


Date: 4.AUG.2016 04:39:11

High Channel: 5825 MHz (-17 dBm/MHz limit)

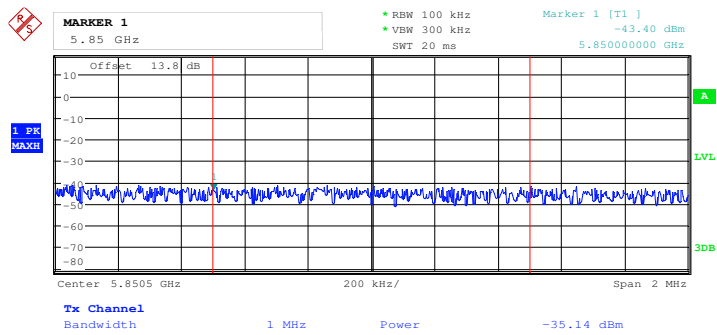

Date: 4.AUG.2016 03:31:01


High Channel: 5825 MHz (-27 dBm/MHz limit)

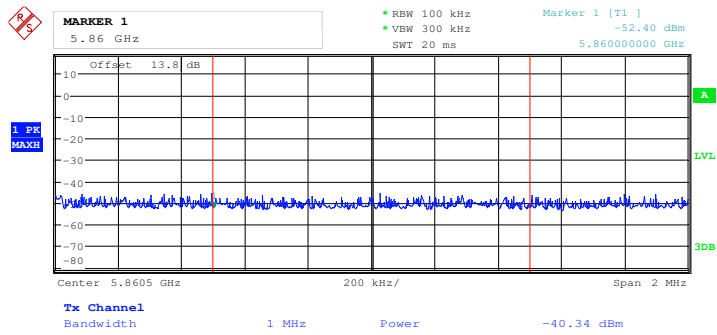

Date: 4.AUG.2016 03:31:28


802.11n40 mode

Low Channel: 5755 MHz (-17 dBm/MHz limit)

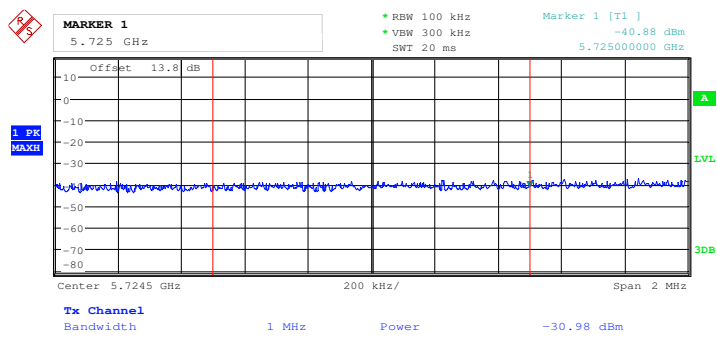


Date: 4.AUG.2016 03:45:32

Low Channel: 5755 MHz (-27 dBm/MHz limit)

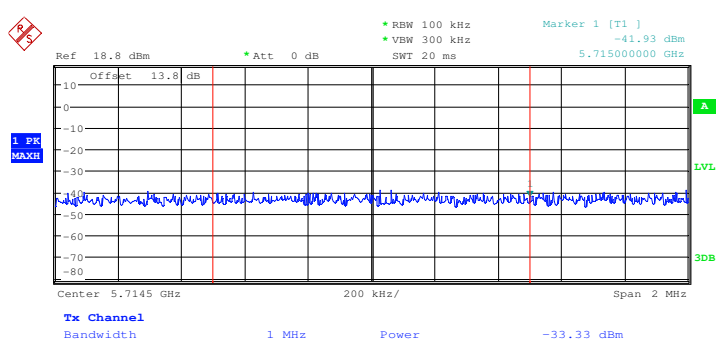


Date: 4.AUG.2016 03:44:52

High Channel: 5795 MHz (-17 dBm/MHz limit)

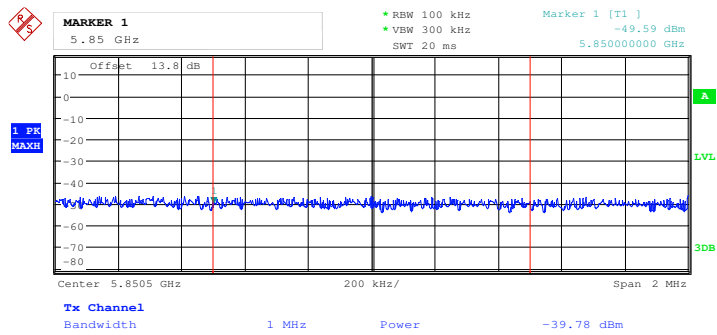

Date: 4.AUG.2016 03:46:21


High Channel: 5795 MHz (-27 dBm/MHz limit)

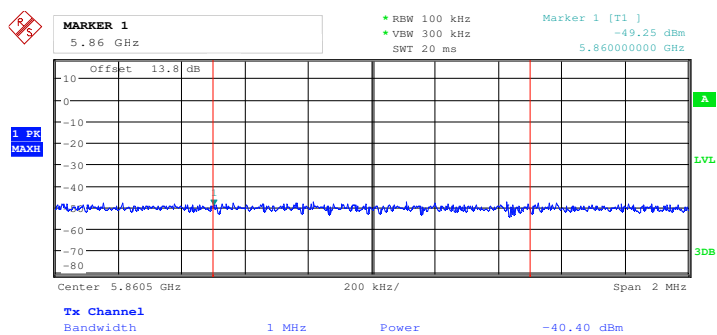

Date: 4.AUG.2016 03:47:04


802.11ac20 mode

Low Channel: 5745 MHz (-17 dBm/MHz limit)

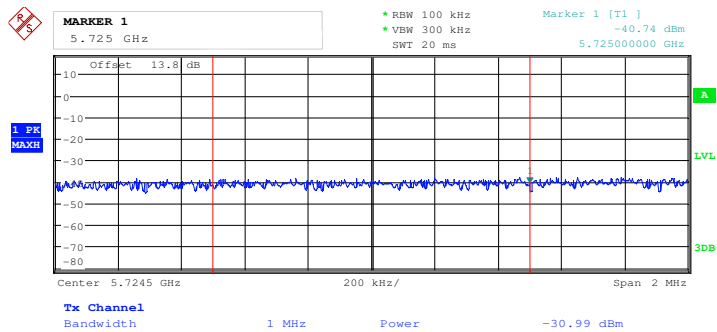


Date: 4.AUG.2016 03:36:35

Low Channel: 5745 MHz (-27 dBm/MHz limit)

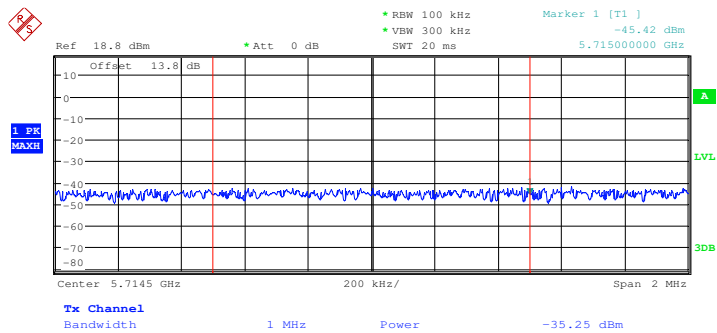


Date: 4.AUG.2016 03:35:58

High Channel: 5825 MHz (-17 dBm/MHz limit)

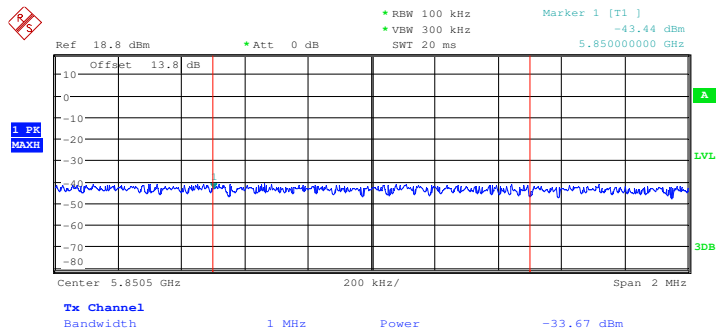

Date: 4.AUG.2016 03:37:24


High Channel: 5825 MHz (-27 dBm/MHz limit)

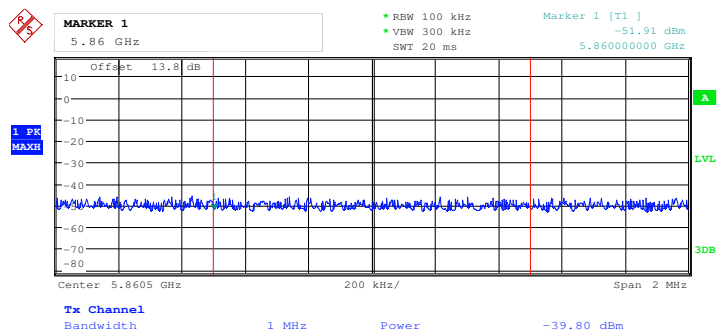

Date: 4.AUG.2016 03:37:48


802.11ac40 mode

Low Channel: 5755 MHz (-17 dBm/MHz limit)

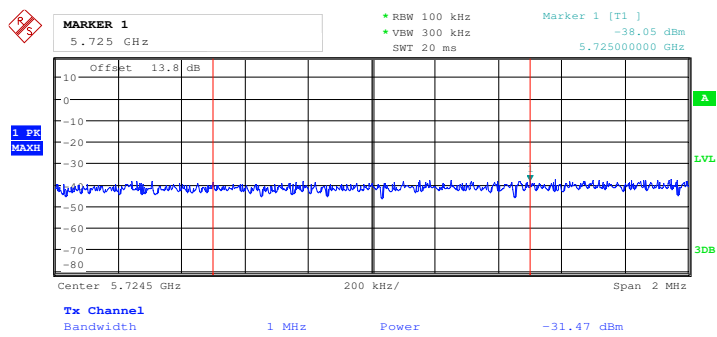


Date: 4.AUG.2016 03:53:43

Low Channel: 5755 MHz (-27 dBm/MHz limit)

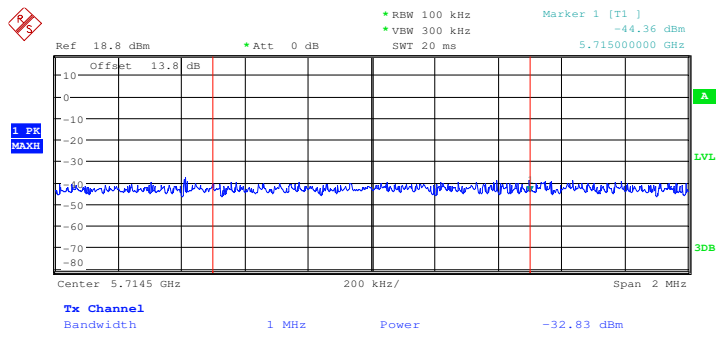


Date: 4.AUG.2016 03:53:08

High Channel: 5795 MHz (-17 dBm/MHz limit)

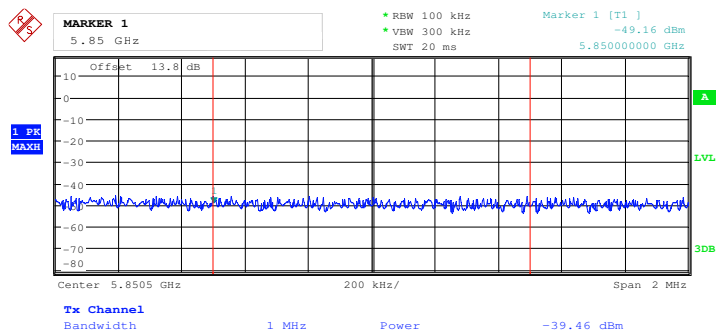

Date: 4.AUG.2016 03:54:36


High Channel: 5795 MHz (-27 dBm/MHz limit)

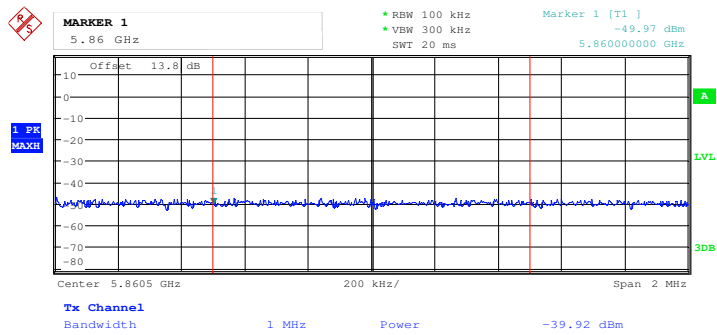

Date: 4.AUG.2016 03:55:36


802.11ac80 mode Lower Band Edge

5775 MHz (-17 dBm/MHz limit)

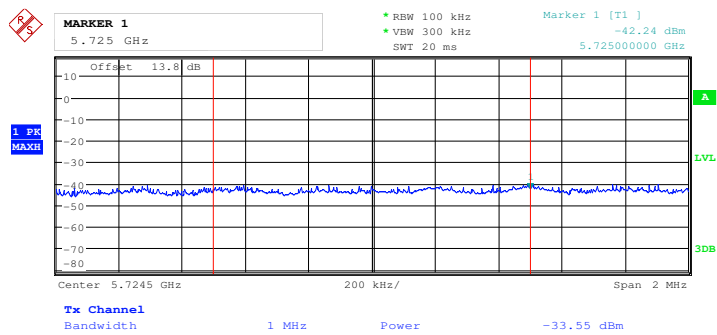

Date: 4.AUG.2016 04:01:54


5775 MHz (-27 dBm/MHz limit)

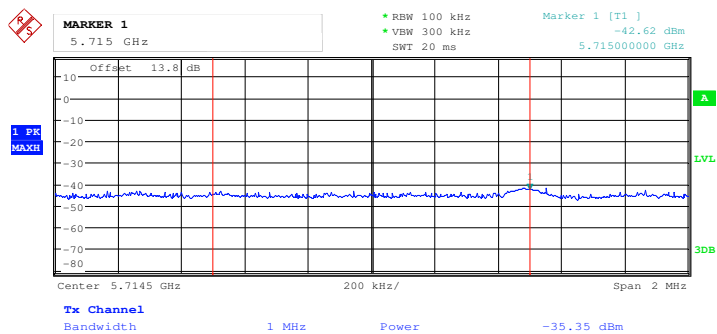

Date: 4.AUG.2016 04:01:24


802.11ac80 mode Upper Band Edge

5775 MHz (-17 dBm/MHz limit)

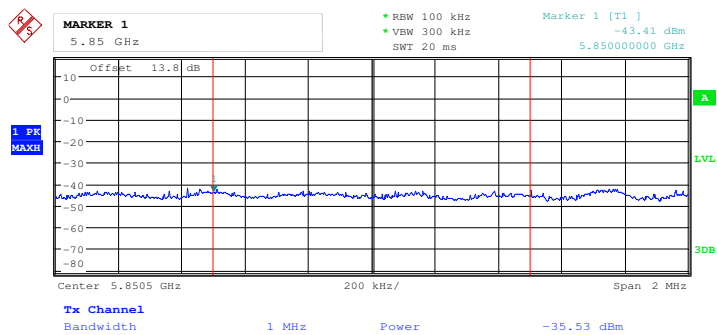

Date: 4.AUG.2016 04:02:09

5775 MHz (-27 dBm/MHz limit)

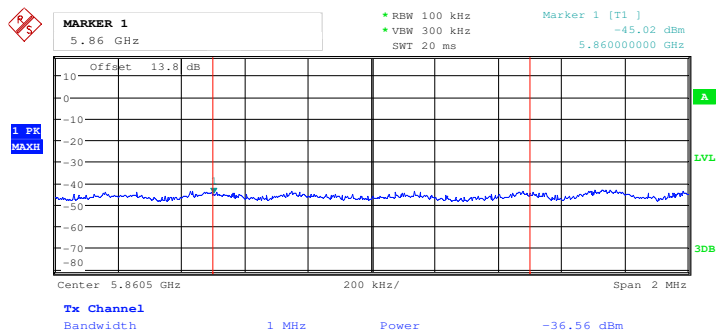

Date: 4.AUG.2016 04:02:27