

EMI TEST REPORT

Test Report No. 16342151H-B-R1

Customer	ALPS ALPINE CO., LTD.
Description of EUT	DK ECU
Model Number of EUT	T1AEA0001
FCC ID	CWT1AEA0001
Test Regulation	FCC Part 15 Subpart B
Test Result	Complied
Issue Date	July 28, 2026
Remarks	*For Permissive Change

Representative test engineerKiyoshiro Okazaki
Engineer**Approved by**Shinichi Miyazono
Leader

CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 26.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers EMC technical requirements. It does not cover administrative issues such as Manual or non-EMC test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For any test report referred in this report, the latest version (including any revisions) is always referred to.
- If the latest version is a revision, it replaces the previous version. See the table below for revisions and versions.

REVISION HISTORY

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	16342151H-B	June 15, 2026	-
1	16342151H-B-R1	July 28, 2026	Deletion of “*LF Part” from Remarks for Cover page. Addition of the following sentences under the configuration diagram in Clause 4.2; “*The system configuration for Item I normally consists of seven LF antennas. However, because the system was unable to operate with seven LF antennas connected, testing was performed using a nine-LF-antenna configuration. The output characteristics of each LF antenna are identical for the seven-antenna and nine-antenna configurations.” Correction of the Model Number for Item I in the list for Clause 4.2; From “72140-34A” to “34A-ANT”

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	Hori.	Horizontal
AAN	Asymmetric Artificial Network	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	I/O	Input/Output
AE	Auxiliary equipment	IEC	International Electrotechnical Commission
AM	Amplitude Modulation	IEEE	Institute of Electrical and Electronics Engineers
AMN	Artificial Mains Network	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISN	Impedance Stabilization Network
AP	Access Point	ISO	International Organization for Standardization
ASK	Amplitude Shift Keying	JAB	Japan Accreditation Board
Atten., ATT	Attenuator	LAN	Local Area Network
AV	Average	LCL	Longitudinal Conversion Loss
BPSK	Binary Phase-Shift Keying	LIMS	Laboratory Information Management System
BR	Bluetooth Basic Rate	LISN	Line Impedance Stabilization Network
BT	Bluetooth	MRA	Mutual Recognition Arrangement
BT LE	Bluetooth Low Energy	N/A	Not Applicable
BW	BandWidth	NIST	National Institute of Standards and Technology
C.F	Correction Factor	NS	No signal detect.
Cal Int	Calibration Interval	NSA	Normalized Site Attenuation
CAV	CISPR AV	OBW	Occupied BandWidth
CCK	Complementary Code Keying	OFDM	Orthogonal Frequency Division Multiplexing
CDN	Coupling Decoupling Network	PER	Packet Error Rate
Ch., CH	Channel	PK	Peak
CISPR	Comite International Special des Perturbations Radioelectriques	P _{LT}	long-term flicker severity
Corr.	Correction	POHC(A)	Partial Odd Harmonic Current
CPE	Customer premise equipment	Pol., Pola.	Polarization
CW	Continuous Wave	PR-ASK	Phase Reversal ASK
DBPSK	Differential BPSK	P _{ST}	short-term flicker severity
DC	Direct Current	QAM	Quadrature Amplitude Modulation
DET	Detector	QP	Quasi-Peak
D-factor, D.fac.	Distance factor	QPSK	Quadrature Phase Shift Keying
Dmax	maximum absolute voltage change during an observation period	r.m.s., RMS	Root Mean Square
DQPSK	Differential QPSK	RBW	Resolution BandWidth
DSSS	Direct Sequence Spread Spectrum	RE	Radio Equipment
DUT	Device Under Test	REV	Reverse
EDR	Enhanced Data Rate	RF	Radio Frequency
e.i.r.p., EIRP	Equivalent Isotropically Radiated Power	RFID	Radio Frequency Identifier
EM clamp	Electromagnetic clamp	RNSS	Radio Navigation Satellite Service
EMC	ElectroMagnetic Compatibility	RSS	Radio Standards Specifications
EMI	ElectroMagnetic Interference	Rx	Receiving
EMS	ElectroMagnetic Susceptibility	S.fac.	Site factor
EN	European Norm	SINAD	Ratio of (Signal + Noise + Distortion) to (Noise + Distortion)
e.r.p., ERP	Effective Radiated Power	S/N	Signal to Noise ratio
ETSI	European Telecommunications Standards Institute	SA, S/A	Spectrum Analyzer
EU	European Union	SABS	South African Bureau of Standards
EUT	Equipment Under Test	SANS	South African National Standards
Fac.	Factor	SG	Signal Generator
FCC	Federal Communications Commission	SVSWR	Site-Voltage Standing Wave Ratio
FHSS	Frequency Hopping Spread Spectrum	THC(A)	Total Harmonic Current
FM	Frequency Modulation	THD(%)	Total Harmonic Distortion
Freq.	Frequency	TR, T/R	Test Receiver
FSK	Frequency Shift Keying	Tx	Transmitting
Fund	Fundamental	UFA	Uniform field area
FWD	Forward	VBW	Video BandWidth
GFSK	Gaussian Frequency-Shift Keying	Vert.	Vertical
GNSS	Global Navigation Satellite System	WLAN	Wireless LAN
GPS	Global Positioning System	xDSL	Generic term for all types of DSL technology (DSL: Digital Subscriber Line)

CONTENTS	PAGE
SECTION 1: Customer information	5
SECTION 2: Equipment under test (EUT)	5
SECTION 3: Test Summary	7
SECTION 4: Operation of EUT during testing	9
SECTION 5: Radiated Emission	11
APPENDIX 1: Test data	13
Radiated Emission	13
APPENDIX 2: Test instruments	15
APPENDIX 3: Photographs of test setup.....	16
Radiated Emission	16
Worst Case Position	18

SECTION 1: Customer information

Company Name	ALPS ALPINE CO., LTD.
Address	6-3-36, Furukawanakazato, Osaki-City, Miyagi Pref., Japan
Telephone Number	+81-229-23-5111
Contact Person	Yuji Ouchi

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Description	DK ECU
Model Number	T1AEA0001
Serial Number	Refer to SECTION 4.2
Condition	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	May 20, 2026
Test Date	May 26, 2026

2.2 Product Description

General Specification

Rating	DC 12.0 V
Clock frequency (ies) in the system	240 MHz

Radio Specification

LF

Equipment Type	Transmitter
Frequency of Operation	125 kHz
Type of Modulation	ASK

UHF

Equipment Type	Receiver
Frequency of Operation	433.92 MHz
Crystal frequency	27.6 MHz
Local oscillator frequency (f_{LO})	433.715 MHz
Intermediate frequency	205 kHz

NFC

Equipment Type	Transceiver
Frequency of Operation	13.56 MHz
Type of Modulation	ASK

Bluetooth (Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	GFSK
Antenna Gain	3.3 dBi

SECTION 3: Test Summary

3.1 Test Specification

Test Specification	FCC Part 15 Subpart B The latest version on the first day of the testing period
Title	FCC 47CFR Part15 Radio Frequency Device Subpart B Unintentional Radiators

3.2 Reference Standards

ANSI/USEMCSC C63.2-2023
ANSI C63.4-2014+C63.4a-2017
ANSI C63.5-2017
ANSI C63.25.1-2018

3.3 Summary of Test Results

Item	Limits	Result	Remarks
Conducted emission	Class B	N/A	*1)
Radiated emission	Class B	Complied	-

* Note: UL Japan, Inc.'s EMI Work Procedure: Work Instructions-ULID-003591.
*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

3.4 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.5 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

Measurement distance	Frequency range	Unit	Calculated Uncertainty (+/-)
3 m	9 kHz to 30 MHz	dB	4.8
	30 MHz to 200 MHz	Horizontal	5.0
		Vertical	5.0
	200 MHz to 1000 MHz	Horizontal	5.2
		Vertical	6.2
10 m	9 kHz to 30 MHz	dB	4.7
	30 MHz to 200 MHz	Horizontal	5.5
		Vertical	5.4
	200 MHz to 1000 MHz	Horizontal	5.5
		Vertical	5.5
3 m	1 GHz to 6 GHz	dB	5.1
	6 GHz to 18 GHz	dB	5.4
1 m	10 GHz to 18 GHz	dB	5.4
	18 GHz to 26.5 GHz	dB	5.3
	26.5 GHz to 40 GHz	dB	4.8
0.5 m	26.5 GHz to 40 GHz	dB	5.0

3.6 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber (SAC1)	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber (SAC2)	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber (SAC3)	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room (PR3)	3 m
No.3 shielded room (SR3)	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber (SAC4)	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room (PR4)	3 m
No.4 shielded room (SR4)	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber (SAC5)	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room (MR5)	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room (SR6)	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room (MR6)	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room (SR7)	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room (MR8)	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room (MR9)	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room (SR10)	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room (MR11)	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room (MR12)	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.7 Test data, Test instruments, and Test set up

Refer to APPENDIX.


SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Mode	1. LF Transmitting + RF Receiving
Software(s)	M26EntryPreDvApp.exe for W69 - W71 Version: 1. 11. 20. 0

*The test signal level was confirmed to be sufficient to stabilize the local oscillator of the EUT.
*It was confirmed by using checker that the EUT receives the signal from the transmitter (pair of EUT).

4.2 Configuration and peripherals

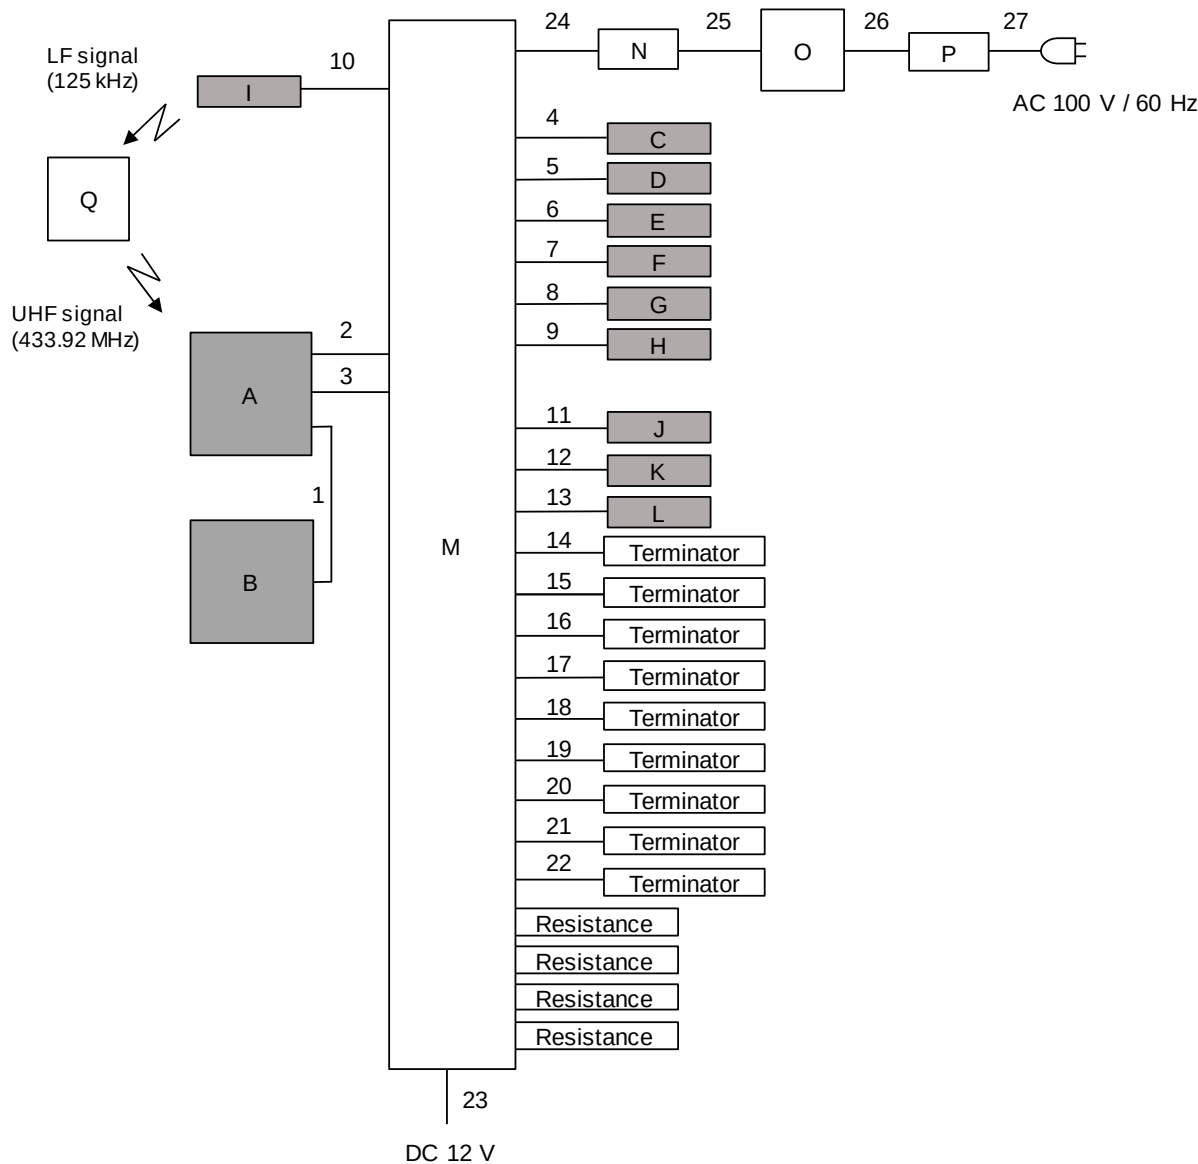

*Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.
*Item No. A includes Receiver Antenna.
*The system configuration for Item I normally consists of seven LF antennas. However, because the system was unable to operate with seven LF antennas connected, testing was performed using a nine-LF-antenna configuration. The output characteristics of each LF antenna are identical for the seven-antenna and nine-antenna configurations.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remark
A	DK ECU	T1AEA0001	No.143	ALPS ALPINE CO., LTD.	EUT
B	NFC Antenna	3MA-7D000-000-D	No.4	Minebea AccessSolutions	EUT
C	LF ANT (F)	A0 prototype	ANT BOARD No.4	SUMIDA CORPORATION	EUT
D	LF ANT (C)	T0 prototype	ANT BOARD No.4	SUMIDA CORPORATION	EUT
E	LF ANT (B)	T0 prototype	ANT BOARD No.4	SUMIDA CORPORATION	EUT
F	LF ANT (TI)	T0 prototype	ANT BOARD No.4	SUMIDA CORPORATION	EUT
G	LF ANT (RES)	T0 prototype	ANT BOARD No.4	SUMIDA CORPORATION	EUT
H	LF ANT (FRDR)	T0 prototype	ANT BOARD No.4	SUMIDA CORPORATION	EUT
I	LF ANT (FRAS)	34A-ANT	No.1	Minebea AccessSolutions	EUT
J	LF ANT (RRDR)	T0 prototype	ANT BOARD No.4	SUMIDA CORPORATION	EUT
K	LF ANT (RRAS)	T0 prototype	ANT BOARD No.4	SUMIDA CORPORATION	EUT
L	Immobi Antenna	4SW29265	No.3	TOYODENSO	EUT
M	CHECKER BOX	Ver.3-2	No.13	ALPS ALPINE CO., LTD.	-
N	CAN/LIN Interface	VN163¥0A	007113-057125	VECTOR	-
O	Laptop PC	TP00095C	U400333447	Lenovo	-
P	AC Adapter	ADLX45YLC2A	8SSA10E75842L1 CZ8B80J30	Lenovo	-
Q	Electrical Key	TWB1G0690	0152BDC0E6	ALPS ALPINE CO., LTD.	-

List of Cables Used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Signal Cable	2.3	Unshielded	Unshielded	-
2	DC & Signal Cable	2.0	Unshielded	Unshielded	-
3	DC & Signal Cable	2.0	Unshielded	Unshielded	-
4	Antenna Cable	2.3	Unshielded	Unshielded	-
5	Antenna Cable	2.3	Unshielded	Unshielded	-
6	Antenna Cable	2.3	Unshielded	Unshielded	-
7	Antenna Cable	2.3	Unshielded	Unshielded	-
8	Antenna Cable	2.3	Unshielded	Unshielded	-
9	Antenna Cable	2.3	Unshielded	Unshielded	-
10	Antenna Cable	2.4	Unshielded	Unshielded	-
11	Antenna Cable	2.3	Unshielded	Unshielded	-
12	Antenna Cable	2.3	Unshielded	Unshielded	-
13	Antenna Cable	0.3	Unshielded	Unshielded	-
14	Signal Cable	1.2	Unshielded	Unshielded	-
15	Signal Cable	1.2	Unshielded	Unshielded	-
16	Signal Cable	1.4	Unshielded	Unshielded	-
17	Signal Cable	1.6	Unshielded	Unshielded	-
18	Signal Cable	1.8	Unshielded	Unshielded	-
19	Signal Cable	1.8	Unshielded	Unshielded	-
20	Signal Cable	2.6	Unshielded	Unshielded	-
21	Signal Cable	2.6	Unshielded	Unshielded	-
22	Signal Cable	2.6	Unshielded	Unshielded	-
23	DC Cable	2.0	Unshielded	Unshielded	-
24	RS232C Cable	0.9	Shielded	Shielded	-
25	USB Cable	1.7	Shielded	Shielded	-
26	DC Cable	1.8	Unshielded	Unshielded	-
27	AC Cable	0.9	Unshielded	Unshielded	-

SECTION 5: Radiated Emission

5.1 Operating environment

Date	Test site	Temperature	Humidity	Engineer	Mode
See data	See data	See data	See data	See data	See data

5.2 Test configuration

EUT was placed on the platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The EUT was set on the edge of the platform.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Photographs of the set up are shown in APPENDIX.

5.3 Test conditions

Frequency range	:	30 MHz to 200 MHz (Biconical antenna) 200 MHz to 1000 MHz (Logperiodic antenna) 1000 MHz to 12500 MHz (Horn antenna)
Test distance	:	See Figure 1
EUT position	:	Table top
EUT operation mode	:	See Clause 4.1

5.4 Test procedure

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.


The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The radiated emission measurements were made with the following detector function of the Test Receiver and the Spectrum Analyzer.

Test antenna was aimed at the emission source for receiving the maximum signal and always kept. (Above 1 GHz)

Frequency	Below 1 GHz	Above 1 GHz
Instrument used	Test Receiver	Test Receiver
IF Bandwidth	QP: BW 120 kHz	PK: BW 1 MHz, CAV: BW 1 MHz

Figure 1: Test Setup

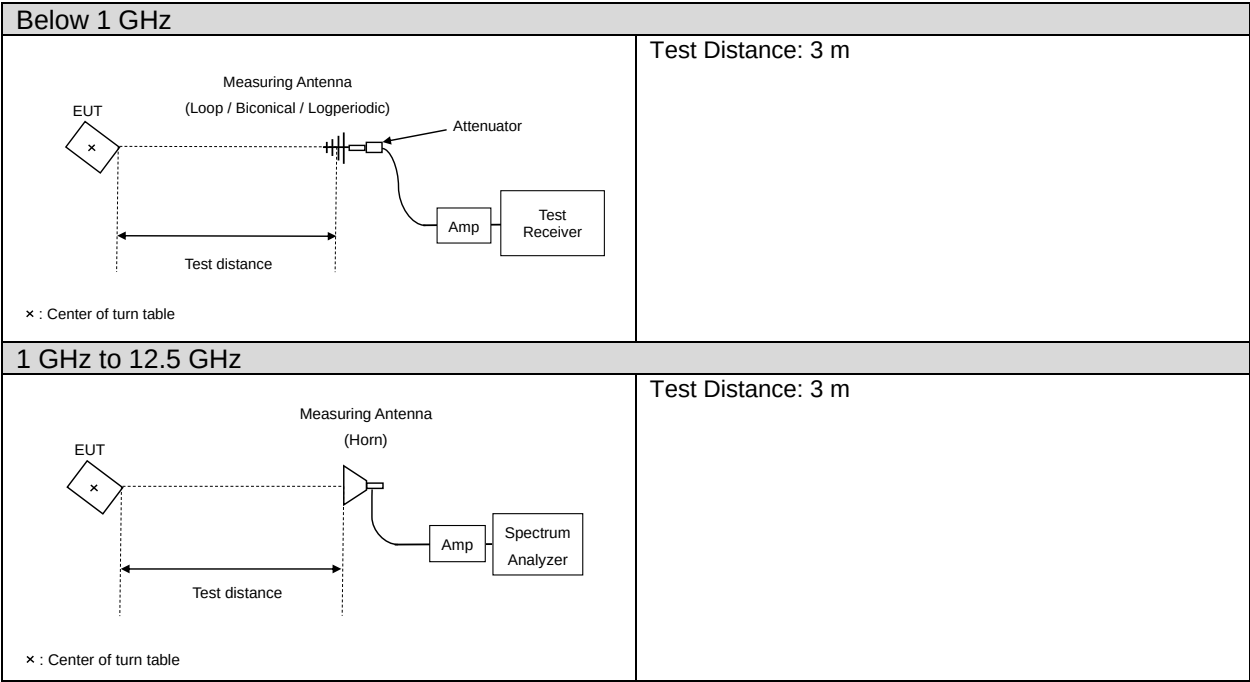

The noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at representative X-axis since no difference was found among each position.

5.5 Test result

Summary of the test results: Pass


Test results are rounded off and limit are rounded down, so some differences might be observed.

APPENDIX 1: Test data

Radiated Emission

Mode	1				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
May 26, 2026	SAC3	22 deg. C	58 % RH	Kiyoshiro Okazaki	Below 1 GHz

Limit : FCC_Part 15 Subpart B(15.109)_Class B

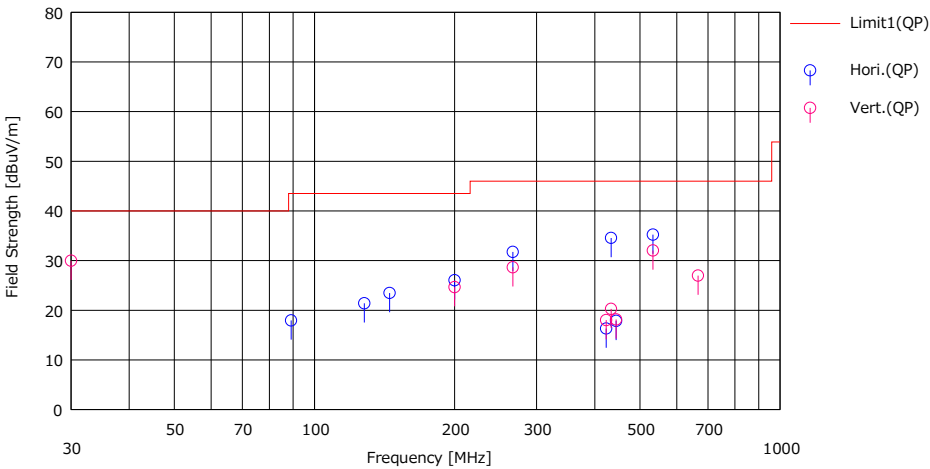


No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit	Margn	Polz. [H/V]	Height [cm]	Angle [deg.]	Ant. Type	Comment
		[dBUV]				[dBUV/m]	[dBUV/m]	[dB]					
1	89.086	33.90	8.36	7.80	32.11	17.95	43.50	25.55	Hori.	300	73	BA	
2	127.980	31.80	13.46	8.21	32.07	21.40	43.50	22.10	Hori.	257	14	BA	
3	144.980	32.50	14.65	8.38	32.06	23.47	43.50	20.03	Hori.	257	14	BA	
4	199.999	32.60	16.58	8.88	32.00	26.06	43.50	17.44	Hori.	223	152	BA	
5	266.658	41.80	12.49	9.41	31.96	31.74	46.00	14.26	Hori.	145	74	LA22	
6	423.220	21.70	16.06	10.52	31.96	16.32	46.00	29.68	Hori.	100	0	LA22	
7	433.715	39.70	16.23	10.60	31.97	34.56	46.00	11.44	Hori.	100	0	LA22	
8	444.620	22.60	16.54	10.67	31.97	17.84	46.00	28.16	Hori.	100	0	LA22	
9	533.327	38.10	17.92	11.18	31.98	35.22	46.00	10.78	Hori.	100	39	LA22	
10	30.000	36.60	18.57	6.97	32.16	29.98	40.00	10.02	Vert.	100	326	BA	
11	199.999	31.20	16.58	8.88	32.00	24.66	43.50	18.84	Vert.	100	359	BA	
12	266.661	38.70	12.49	9.41	31.96	28.64	46.00	17.36	Vert.	100	185	LA22	
13	423.220	23.40	16.06	10.52	31.96	18.02	46.00	27.98	Vert.	100	0	LA22	
14	433.715	25.40	16.23	10.60	31.97	20.26	46.00	25.74	Vert.	100	0	LA22	
15	444.620	22.90	16.54	10.67	31.97	18.14	46.00	27.86	Vert.	100	0	LA22	
16	533.328	34.90	17.92	11.18	31.98	32.02	46.00	13.98	Vert.	120	168	LA22	
17	666.664	27.30	19.79	11.87	31.99	26.97	46.00	19.03	Vert.	120	69	LA22	

CHART: WITH FACTOR
ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)
Except for the above table: adequate margin data below the limits.

Radiated Emission

Mode	1				
Date	Test site	Temperature	Humidity	Engineer	Measurement Range
May 26, 2026	SAC3	22 deg. C	58 % RH	Kiyoshiro Okazaki	1 GHz to 12.5 GHz

Limit : FCC_Part 15 Subpart B(15.109)_Class B

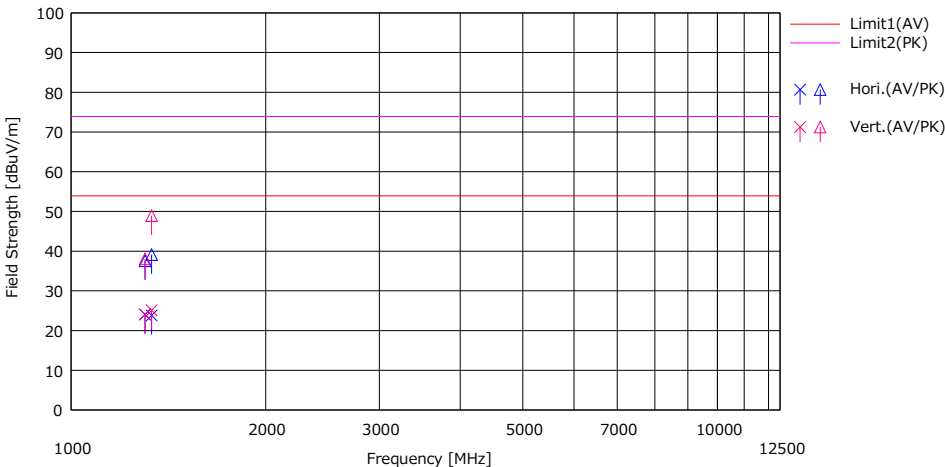

No.	Freq. [MHz]	Reading		Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]				(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]					
1	1301.145	30.70	44.20	25.70	1.76	34.10	24.06	37.56	53.90	73.90	29.84	36.34	Hori.	100	0	H2O	
2	1332.500	30.30	45.60	25.77	1.78	34.03	23.82	39.12	53.90	73.90	30.08	34.78	Hori.	100	0	H2O	
3	1301.145	30.70	44.70	25.70	1.76	34.10	24.06	38.06	53.90	73.90	29.84	35.84	Vert.	100	0	H2O	
4	1332.500	31.60	55.40	25.77	1.78	34.03	25.12	48.92	53.90	73.90	28.78	24.98	Vert.	100	34	H2O	

CHART: WITH FACTOR
ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE) - GAIN(AMP)
Except for the above table: adequate margin data below the limits.

* No signal was detected above 10 GHz.

APPENDIX 2: Test instruments

Test equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	141266	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	04/22/2026	12
RE	141323	Coaxial cable	UL-ISE	-	-	09/08/2025	12
RE	141424	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	1915	10/21/2025	12
RE	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	258	11/14/2025	12
RE	141532	DIGITAL HiTESTER	HIOKI E. E. CORPORATION	3805	051201197	01/05/2026	12
RE	141580	MicroWave System Amplifier	Keysight Technologies Inc	83017A	MY39500779	03/12/2026	12
RE	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/06/2026	12
RE	141901	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250080	04/06/2026	12
RE	141949	Test Receiver	Rohde & Schwarz	ESCI	100767	06/30/2025	12
RE	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	07/09/2025	24
RE	142013	AC3_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/14/2025	24
RE	142183	Measure	KOMELON	KMC-36	-	10/20/2025	12
RE	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/24/2025	12
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	244709	Thermo-Hygrometer	HIOKI E. E. CORPORATION	LR5001	231202103	01/13/2026	12
RE	245787	Double Ridge Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	689	04/23/2026	12
RE	263275	Microwave Cable	Junkosha	MWX221-05000DMSDMS+ MWX221-01000DMSDMS	2505S043+ 2503S145	04/21/2026	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated emission