


Since this device is always used with vehicle, it is not sold to general end users separately.
Therefore there is no user manual of this device by alone.

Product name : Hand Unit
Type : TWB1G0090

This unit is installed in vehicle. This unit has the following functions


Immobilizer Function

Unit Assy Immobilizer communicates with the transponder in the hand unit when the user moves the hand unit closer to the Unit Assy Immobilizer



Smart Function

With the user approaching the vehicle, the door unit can be locked or unlocked by operating the door unit (gripping the handle or operating the request SW).

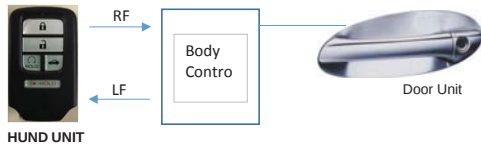

Keyless Function

When the user pushes LOCK, UNLOCK, START, TRUNK and the PANIC button of HAND UNIT, the radio wave is output, and the Receiver receives it, then door lock, door unlock, engine start, trunk open and panic alarm sounding are output.



Operation Voltage	typ. 3.0V / max 3.3V
Battery	Lithium battery CR2032
Operating temperature range	-20~+60 degree Keyless -30~+80 degree SMART -40~+85 degree Immobilizer
Weight	0.028kg
Operation of frequency	RF : 433.92MHz LF: 125kHz

CAUTION

Pay attention to the following.
• It may not be operated when using the equipment of the same frequency band in the vicinity.

Please DO NOT the following. Engine is not started by failure of electronic parts. (Product can not receive the signal correctly)

- Give a shock.
- Get it wet. If it got wet, wipe and dry up.
- Disassembly and modification.

The following statements must be described on the user manual of the vehicle

This device complies with Part 15 of FCC Rules and RSS-Gen of IC Rules.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of this device.

FCC WARNING

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- CAUTION - Danger of explosion if battery is incorrectly replaced.
Replace only with the same or equivalent type
- CAUTION - Do not exposed to excessive heat such as sunshine, fire or the like.

Indications of FCC ID or IC number are made inside the product.
The user can replace the battery without using any special tool.
Users can check their display when replacing the battery.